



(51) International Patent Classification:
H04L 29/06 (2006.01) **H04L 12/22** (2006.01)

(21) International Application Number:
PCT/EP2009/058142

(22) International Filing Date:
30 June 2009 (30.06.2009)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
08425464.8 4 July 2008 (04.07.2008) EP

(71) Applicant (for all designated States except US): **ALCATEL-LUCENT** [FR/FR]; 54 Rue la Boetie, F-75008 Paris (FR).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **DONADIO, Pasquale** [IT/IT]; Via Girolamo Santacroce, 10/c, I-80129 Napoli (NA) (IT). **PAPARELLA, Andrea** [IT/IT]; Via Buonarroti, 3, I-21052 Busto Arsizio (varese) (IT). **RIGLIETTI, Roberto** [IT/IT]; Via Brianza, 14, I-20059 Vimercate (MI) (IT).

(74) Agent: **URLICHS, Stefan**; Alcatel-Lucent Deutschland AG, Intellectual Property & Corporate Standards, Lorenzstr. 10, 70435 Stuttgart (DE).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

— as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))

Published:

— with international search report (Art. 21(3))

(54) Title: ANTI-INSTRUSION METHOD AND SYSTEM FOR A COMMUNICAITON NETWORK

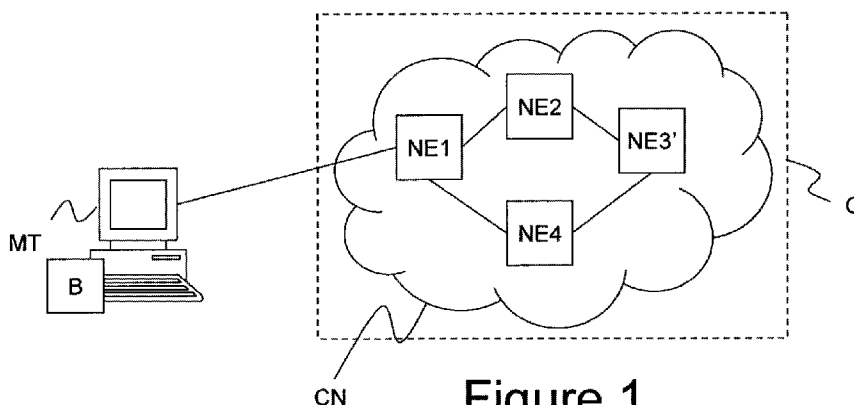


Figure 1

(57) Abstract: There is disclosed an anti-intrusion method for a communication network comprising a plurality of network elements. The method comprising the following steps: a) providing a passive monitoring component, a decision making component, and an action making component cooperating with the communication network; b) at the passive monitoring component, detecting management information indicative of an attack against at least one network element, processing the management information thus generating infection data and transmitting the infection data to the decision making component; c) at the decision making component, receiving the infection data, making a decision about an action to be carried out to block the attack, and transmitting the decision to the action making component; and d) at the action making component, based on the decision, instructing the at least one network element to perform the action.

ANTI-INTRUSION METHOD AND SYSTEM FOR A COMMUNICATION NETWORK

Technical Field

5 The present invention relates to the field of the communication systems. In particular, the present invention relates to an anti-intrusion method and system for a communication network.

Background Art

10 As it is known, a communication network comprises three logical main planes, i.e. a data plane, which is the plane suitable for transmitting user data, a control plane, which is the plane suitable for executing control operations, and a management plane, which is the plane suitable for executing management operations.

15 Managing a communication network provides to perform a number of operations, such as for instance:

- monitoring network performance;
- configuring network elements and their resources (boards, ports, cross-connections, etc.);
- managing errors occurring in the network; etc.

20 Typically, the management operations are performed by an apparatus which is termed "network management station or system" (or, briefly, NMS), which is connected to each network element of the network to be managed.

25 In particular, the NMS is provided with a software application which is termed "manager", capable of exchanging information with software applications which are termed "agent", which agents are placed at the network elements. Manager and agents exchange each other management information by using a management protocol, which is executed in the management plane and depends on the type of communication network. Examples of management protocols are SNMP (Simple Network Management
30 Protocol), CMIP (Common Management Information Protocol), Q3, and TL1.

Owing to their function, the control plane and the management plane are

particularly subjected to attacks by the so-called "hackers". In the following description and in the claims, the term "attack" will designate an attempt by an hacker to introduce unauthorized software in the communication network and/or to manipulate in a unauthorized way the management and control software managing and controlling the communication network. Possible types of attacks are:

- DOS (Denial of Service) attacks, which substantially aim to generate an inefficiency, that could result in a malfunctioning of the network element;
- malware reproductions, which aim to open a so-called "backdoor" in the network element, thereby favoring unauthorized accesses; and
- diffusion of Trojan horses, worms, key loggers, and virus.

Generally speaking, the data plane is secure as such, as it does not interact in any way with the software applications of the network elements. In other words, user data are transported in a transparent way in the data plane, i.e. the software applications of the network elements do not process the user data.

In the following description and in the claims, the expression "anti-intrusion mechanism-system-method" will designate a mechanism-system-method implemented in a communication network and suitable for isolating one or more network elements which are subjected to an attack from the other network elements of the network. Un elemento di rete soggetto ad un attacco verrà anche indicato "elemento di rete infetto".

In the art, a number of anti-intrusion mechanisms are known, such as for instance asymmetric cryptography, one-way hash functions, and the like. These known anti-intrusion mechanisms typically provide coding/decoding keys, such as typically a public coding/decoding key, which is known by everybody, and a private coding/decoding key, which is kept secret. The public and private coding/decoding keys are related one to another. In particular, information coded by the public coding key can be decoded only by the corresponding private decoding key, and vice versa information coded by the private coding key can be decoded only by the corresponding public decoding key.

Summary of the Invention

The Applicant has noticed that in the field of the communication networks it is desirable to provide management systems based on web technology. This is mainly due to the fact that management systems operating in this way
5 advantageously allow to use management graphic interfaces similar to the graphic interfaces of current computer programs for browsing the web (which are commonly termed "web browsers"), such as Mozilla, Internet Explorer, etc.

The Applicant has noticed that a management system could thus be implemented through a browser executed by the NMS and capable of
10 supporting a web-like management graphical interface, wherein the management information are displayed as graphic objects typical of the web interfaces, i.e. windows, icons, etc.

Using network management system based on web technology, together with the even more widespread employment of "open-source" software, result
15 in a increased vulnerability of the network elements. Therefore, on one hand the development of management systems based on web technology brings advantages in terms of accessibility of a communication network, while on the other hand it disadvantageously makes the communication networks, and in particular the above mentioned control plane and management plane, more
20 vulnerable to attacks by "hackers".

The Applicant has noticed that known anti-intrusion mechanisms have a number of drawbacks, when applied to the management system of a communication network above described.

Firstly, they are passive mechanisms from the decisional point of view. In
25 other words, these mechanisms detect an anomalous traffic within the network, which anomalous traffic generally indicates that the communication network is undergoing an attack, and they transmit to the operator a visual and/or acoustic alarm signal. In turn, the operator stops the traffic, for example by isolating the infected network element by closing the ports through which
30 the anomalous traffic transit, and he analyses the network thereby detecting the cause of the anomaly. Therefore, these mechanisms present a delay

between the detection time of the attack and the time at which the infected network element is isolated by the intervention of the operator. Then, disadvantageously, the operator may intervene when the damage is already particularly broaden.

- 5 Secondly, known anti-intrusion mechanisms are onerous in terms of the calculation resources employed.

Further, if for example a hacker enters the management plane of the communication network, he may change the management configuration of the network elements. Existing anti-intrusion mechanisms disadvantageously
10 operate by stopping the whole network elements and thus also the user data processing.

Therefore, the Applicant has faced the problem to provide an anti-intrusion method and system for a communication network capable of overcoming at least one of the above mentioned drawbacks.

- 15 In particular, the Applicant has faced the problem to provide a anti-intrusion method and system for a communication network which present a particularly reduced delay between the detection time of the attack and the time at which the infected network element is isolated from the other network elements.

According to a first aspect, the present invention provides an anti-intrusion
20 method for a communication network, the communication network comprising a plurality of network elements, the method comprising the following steps:

- a) providing a passive monitoring component, a decision making component and an action making component cooperating with the communication network;
- 25 b) at the passive monitoring component, detecting management information indicative of an attack against at least one network element of the plurality of network elements, processing the management information thus generating infection data, and transmitting the infection data to the decision making component;
- 30 c) at the decision making component, receiving the infection data, making a decision about an action to be carried out to block the attack, and transmitting the decision to the action making component; and

d) at the action making component, based on the decision, instructing the at least one network element to perform the action.

Preferably, step a) comprises providing the passive monitoring component at each of the plurality of network elements.

- 5 Profitably, step a) further comprises providing the decision making component and the action making component at one of the plurality of network elements.

Alternatively, step a) further comprises providing the decision making component and the action making component at each of the plurality of
10 network elements.

Alternatively, step a) comprises providing the decision making component at one of the plurality of network elements and providing the action making component at another one of the plurality of network elements.

- Alternatively, step a) further comprises at least one of the following steps:
- 15 - providing the decision making component at at least two of the plurality of network elements, thus forming a decision making cluster; and
- providing the action making component at at least another two of the plurality of network elements, thus forming an action making cluster.

Preferably, step c) further comprises making the decision by using at least
20 one of a static association table and a dynamic association table, each of the static association table and the dynamic association table comprising a plurality of rows, each of the plurality of rows including a security threshold value and a possible action associated to the security threshold value.

According to a second aspect, the present invention provides a anti-
25 intrusion system for a communication network, the communication network comprising a plurality of network elements, the system comprising: a passive monitoring component, a decision making component, and an action making component cooperating with the communication network, wherein:

- the passive monitoring component is suitable for detecting management
30 information indicative of an attack against at least one network element of the plurality of network elements, processing the management information thus generating infection data, and transmitting the infection data to the

decision making component;

- the decision making component is suitable for receiving the infection data, making a decision about an action to be carried out to block the attack, and transmitting the decision to the action making component; and
- 5 - the action making component is suitable for, based on the decision, instructing the at least one network element to perform the action.

Preferably, the passive monitoring component is provided at each of the plurality of network elements.

Profitably, the decision making component and the action making
10 component are provided at one of the plurality of network elements.

Alternatively, the decision making component and the action making component re provided at each of the plurality of network elements.

Alternatively, the decision making component is provided at one of the plurality of network elements and the action making component is provided at
15 another one of the plurality of network elements.

Alternatively, the decision making component is provided at at least two of the plurality of network elements, thus forming a decision making cluster; and/or the action making component is provided at at least another two of the plurality of network elements, thus forming an action making cluster.

20 Preferably, the system further comprises at least one of a static association table and a dynamic association table, each of the static association table and the dynamic association table comprising a plurality of rows, each of the plurality of rows including a security threshold value and a possible action associated to the security threshold value, the decision making component
25 being suitable for making the decision by using the at least one of a static association table and a dynamic association table.

Brief description of the drawings

The present invention will be better understood by reading the following detailed description, given by way of example and not of limitation, to be read
30 by referring to the accompanying drawings, wherein:

- Figure 1 schematically shows a communication network provided with an

- anti-intrusion system according to a first embodiment of the present invention;
- Figures 2 and 3 show in more detail, respectively, the structure of a first and second elements of the communication network of Figure 1;
 - 5 - Figure 4 schematically shows a communication network provided with an anti-intrusion system according to a second embodiment of the present invention;
 - Figure 5 schematically shows a communication network provided with an anti-intrusion system according to a third embodiment of the present invention;
 - 10 - Figures 6 and 7 show in more detail, respectively, the structure of a first and second network elements of the communication network of Figure 5; and
 - Figure 8 schematically shows a communication network provided with an anti-intrusion system according to a fourth embodiment of the present invention.
 - 15

Detailed description of preferred embodiments of the invention

Figure 1 schematically shows a communication network CN provided with an anti-intrusion system according to a first embodiment of the present invention.

20

For simplicity, it is assumed that the communication network CN comprises only four network elements NE1, NE2, NE3' and NE4. Obviously, this is merely exemplary, since the communication network CN may comprise any number of network elements. Each network element NE1, NE2, NE3' and NE4 comprises one or more input/output ports for a respective data traffic. For simplicity, the input/output ports are not shown in Figure 1.

25

Preferably, the network elements NE1, NE2, NE3' and NE4 form part of the same calculation grid G. As it is known, a calculation grid allows to execute distributed applications, i.e. it allows to share execution of a given application among all the computers forming the grid. In other words, the application is shared among all the computers forming the grid. Preferably, the computers

30

forming the grid communicate with each other via web by means of an application which is termed "middleware". An exemplary calculation grid is the one proposed by the Globus Alliance, which uses the middleware Globus.

According to this embodiment, the network elements NE1, NE2, NE3' and
5 NE4 of the communication network CN are connected the one to the others via web by means of a middleware. The Applicant has performed some positive tests by using the above mentioned middleware Globus.

Preferably, the communication network CN is further connected to a management terminal MT, which is configured to execute a browsing module
10 B and is connected to anyone of the network elements of the grid G, e.g. the network element NE1. The browsing module B is capable of supporting a web-like management graphic interface, which for simplicity is not shown in the figures.

The web-like management graphic interface is suitable for displaying as
15 graphic objects, such as windows and icons, management information relative to the management of the communication network CN, i.e.: resource configuration parameters of the network elements NE1, NE2, NE3' and NE4, resource performance parameters of the network elements NE1, NE2, NE3' and NE4, and any alarms generated by the network elements NE1, NE2, NE3'
20 and NE4.

According to embodiments of the present invention, the calculation grid G cooperates with an anti-intrusion module AIM and an anti-intrusion monitoring module AIMM.

According to the first embodiment of the present invention and with
25 reference to Figure 2, the anti-intrusion module AIM is installed in one network element of the communication network CN, e.g. the network element NE3'.

Preferably, the anti-intrusion module AIM comprises: a passive monitoring component PMC, a communication component CC, a decision making component DMC and an action making component AMC.

30 The passive monitoring component PMC is preferably suitable for:

- locally monitoring in a continuous way the management information traffic passing through the ports of the network element NE3';

- processing these management information to generate possible infection data; and
- providing the possible infection data to the decision making component DMC.

5 The decision making component DMC is preferably suitable for:

- receiving possible infection data coming from the passive monitoring component PMC, and, through the communication component CC, from the other network elements;
- making a decision, preferably in real time, on possible actions to be
- 10 carried out to block a possible attack; and
- transmitting such a decision to the action making component AMC.

The action making component AMC is configured to activate, based on the decision received from the decision making component DMC, the best blocking action to defend the communication network.

15 Preferably, the decision making component DMC decides on the basis of a pair of association tables, namely a static association table and a dynamic association table.

The static association table is compiled by the operator during the configuration step of the anti-intrusion module AIM, and it comprises a series

20 of rows, each row including a security threshold value. Preferably, each security threshold value is associated to a respective behavior of the anti-intrusion module AIM. Table 1 provides an example of a static association table.

Table 1

Security Threshold	AIM Behavior
1	DMC decides to exclude the infected network element from the communication network. AMC carries out the decision of excluding the infected network element from the communication network, by closing each port of the infected network element. CC carries out a continuous monitoring, thereby determining in real time any attack developments.

2	DMC decides to execute a "benign" code at the infected network element, thereby removing any infections. AMC carries out the decision of transmitting the "benign" code to the infected network element, through a port defined <i>ad hoc</i>. CC carries out a periodical monitoring, thereby determining any attack developments. For example, the network element is monitored every 10 minutes, and if the infection diffusion is detected, more invasive interventions are activated.
3	DMC decides to monitor the infected network element and to intervene only if dangerous developments are detected, e.g. the infection begins to propagate on the configuration files of the network element, or anomalies begin to occur in the memory operation. AMC carries out the decision of monitoring the infected network element. CC carries out a periodical monitoring, thereby determining any attack developments. For example the network element is monitored every hour, and if an infection diffusion is detected, more invasive interventions are activated.

On the contrary, the dynamic association table is dynamically compiled on the basis of previous behaviors of the communication network CN, by using known auto-learning techniques. Preferably, the static association table and the dynamic association table are implemented as one table, wherein some rows are compiled in a static way and other rows are dynamically compiled.

According to the first embodiment, the network elements NE1, NE2 and NE4 are provided with a respective anti-intrusion monitoring module AIMM. Figure 3 shows in detail the structure of one of the network elements NE1, NE2 and NE4.

As shown in Figure 3, the anti-intrusion monitoring module AIMM of the generic network element NE_i (i=1, 2, 4) comprises a passive monitoring component PMC and a communication component CC, which are connected in cascade. The passive monitoring component PMC is suitable for:

- locally monitoring in a continuous way the management information traffic flowing through the ports of the network element NE_i (i=1, 2, 4);
- processing these management information to generate possible infection data; and

- transmitting the possible infection data to the decision making component DMC of the network element NE3', by means of the communication component CC.

The communication component CC is thus suitable for putting the network element NE_i (i=1, 2, 4) in communication with the network element NE3', possibly through other network elements of the calculation grid G.

The operation of the anti-intrusion system and the components thereof according to a first embodiment will be now described in detail with reference to Figures 1, 2 and 3.

It is assumed, for example, that the network element NE4 is attacked by a hacker, e.g. a DOS type attack. In this case, the infected network element NE4 tends to attack the other network elements of the communication network CN, for example by duplicating the management information and broadcasting them in the communication network CN, so as to overload the links between the network elements.

Two cases can occur. In a first case, the network element NE4 autonomously detects, by means of its passive monitoring component PMC, that it has been attacked and it communicates this to the other network elements, in particular to the network element NE3'. In the second case, the network element NE4 does not become aware to be infected. In this latter case, the other network elements of the communication network CN detect the infection of the network element NE4, by monitoring the management information exchanged on the grid G by means of their respective passive monitoring components PMC.

In both the situations, the passive monitoring component PMC of the network element which has detected the anomaly of the management information traffic at the network element NE4 generates infection data and transmits them to the decision making component DMC of the network element NE3'. In particular, if the infection is detected by the passive monitoring component PMC of the network element NE3', it directly transmits the infection data to the decision making component DMC. On the contrary, if the infection is detected by the passive monitoring component PMC of any

other network element, it transmits the infection data to the decision making component DMC through its communication component CC.

On the basis of the infection data received, the decision making component DMC makes a decision. In particular, the decision making component DMC
5 has a security threshold stored therein, which security threshold is selected among those above listed in Table 1. Preferably, the security threshold can be set up by the operator responsible of managing the communication network CN based on the needs of the costumer which uses the communication network. When the decision making component DMC receives the infection
10 data indicating the infection of the network element NE4, it preferably determines if the security threshold has been overcome and, in the affirmative, selects the corresponding action within the static association table previously stored.

Alternatively, the decision making component DMC determines a new
15 security threshold and a new corresponding action and updates the dynamic association table. For example, the decision making component DMC can decide to close the port of the network element NE4 through which the management information traffic flows, and to consequently command the action making component AMC. As a result, the action making component
20 ACM commands the port closure by means of its communication component CC, thereby isolating the infected network element NE4 from the communication network CN.

Therefore, advantageously, the anti-intrusion system described above is active from the decisional point of view. This advantageously allows to react
25 substantially in real time upon detection of any infection affecting one or more of the network elements, thereby containing the damage caused by the attack to the communication network CN.

Therefore, advantageously, the anti-intrusion system described above presents a particularly reduced delay between the detection time of the attack
30 and the time at which the infected network element is isolated, since the communication network CN itself automatically reacts to the external attacks, without requiring the operator's intervention.

Moreover, the anti-intrusion system described above is implemented at the network elements of the communication network. This advantageously results in a decentralization of the anti-intrusion mechanism, thus allowing to reduce the amount of calculation resources dedicated to the implementation of the anti-intrusion mechanism at the management terminal MT.

According to a second embodiment of the present invention, shown in Figure 4, each network element NE1', NE2', NE3' and NE4' is provided with a respective anti-intrusion module AIM. In particular, the network elements NE1', NE2', NE3' and NE4' have all a structure similar to that of the network element NE3', shown in Figure 2.

Then, according to this second embodiment, each network element NE1', NE2', NE3' and NE4' is capable of independently managing a possible attack. In other word, in the event of an attack attempt, each network element is capable of:

- deciding, independently and substantially in real time, an action to be carried out (decision making component DMC); and
- making the decided action (action making component AMC).

Therefore, advantageously, in the event the anti-intrusion module AIM of one of the network elements stops to operate, the other network elements of the communication network CN continue to be suitable for executing all the operations provided from the above described anti-intrusion system (monitoring, decision making, action making).

According to a third embodiment of the present invention, shown in Figures 5 to 7, the decision making and action making functions are separately implemented in respective network elements of the communication network CN.

For example, each network element NE1, NE4 comprises a respective anti-intrusion monitoring module AIMM similar to that shown in Figure 3.

Moreover, for example, the network element NE2" comprises a module AIM' with a passive monitoring component PMC, a communication component CC and a decision making component DMC.

The passive monitoring component PMC is preferably suitable for:

- locally monitoring in a continuous way the management information flowing through the ports of the network element NE2";
- processing these management information, thereby generating possible infection data; and
- 5 - transmitting the possible infection data to the decision making component DMC.

The decision making component DMC is preferably suitable for:

- receiving the infection data coming from the passive monitoring component PMC, and by means of the communication component CC, from the other
10 network elements;
- making a decision, preferably in real time, on the possible actions to be made in order to block any attacks; and
- transmitting such a decision to the network element NE3", through the communication component CC.

- 15 Moreover, for example, the network element NE3" comprises a module AIM" with a passive monitoring component PMC, a communication component CC and an action making component AMC.

The passive monitoring component PMC is preferably suitable for:

- locally monitoring in a continuous way the management information traffic
20 flowing through the ports of the network element NE3";
- processing these management information thereby generating possible infection data; and
- transmitting the possible infection data to the network element NE2" by means of the communication component CC.

- 25 The action making component AMC is preferably suitable for:

- receiving the decision from the network element NE2"; and
- transmitting corresponding instructions to the other network elements, through the communication component CC.

- 30 Therefore, advantageously, the decision making function and the action making function may be separately located within the communication network according to various criteria, such as for instance: topology of the communication network CN, position of the infected network element(s), and

so on.

According to a fourth embodiment of the present invention, the decision making function is implemented in a first group of network elements of the communication network CN, which in the following is termed "decision making cluster". In addition or as an alternative, the action making function is implemented in a second group of network elements, which in the following is termed "action making cluster".

For example, in the embodiment shown in Figure 8, the decision making function is implemented at the network element NE2", whose structure is preferably similar to that shown in Figure 6. On the other hand, the action making function is implemented in an action making cluster AC formed by the network elements NE3" and NE4". The structure of the network elements NE3" and NE4" is preferably similar to that shown in Figure 7. Finally, the network element NE1 carries out the monitoring function only and therefore it has a structure preferably similar to that shown in Figure 3.

The composition of a decision making cluster and/or an action making cluster may be determined either by the operator or by the communication network CN itself according to different criteria, such as for instance: available calculation resources (the network elements NE3" and NE4" could be the ones with the greatest amount of available calculation resources), topology of the communication network CN, number of hops between the infected network element and the network elements implementing the decision making function and the action making function.

Further, advantageously, duplicating the decision function and/or the action function within the communication network CN advantageously allows to ensure that such functions continue being implemented even though one of the network elements belonging to the group become failed.

Although the above described anti-intrusion system is particularly suitable for protecting the communication network CN against attacks to the control plane and the management plane, it may be profitable used to face also attacks to the data plane. For example, if a hacker succeeds in accessing not only the management information flowing through a network element, but also

in applying wrong values to the configuration parameters of the network element, this involves a possible risk of an infection at the data plane, i.e. of an infection of the paying traffic. This situation should be avoided, owing to the economical damages it would cause to the communication network manager.

5 In order to obviate to this drawback, the inventive anti-intrusion system preferably provides that the network element that is infected at the management plane simulates a failure, by interrupting the transmission of the paying traffic. In this way, the other network elements of the communication network CN activate a restoration mechanism, which reroutes the paying
10 traffic along an alternative path which does not include the infected network element.

Therefore, advantageously, also according to the second, third and fourth embodiments of the present invention, the anti-intrusion system is active from the decisional point of view. This advantageously allows to react substantially
15 in real time upon detection of an attack against one or more of the network elements, thereby preventing the infected network element(s) from transmitting the "infection" to the other network elements.

Therefore, advantageously, the anti-intrusion system described above presents a particularly reduced delay between the detection time of the attack
20 and the time at which the infected network element is isolated, since the communication network CN itself automatically reacts to the external attacks, without requiring the operator's intervention.

CLAIMS

1. An anti-intrusion method for a communication network (CN), said communication network (CN) comprising a plurality of network elements (NE1, NE2, NE3', NE4; NE1', NE2', NE3', NE4'; NE1, NE2", NE3", NE4; NE1, NE2", NE3", NE4"), the method comprising the following steps:
- 5 a) providing a passive monitoring component (PMC), a decision making component (DMC) and an action making component (AMC) cooperating with said communication network (CN);
- b) at said passive monitoring component (PMC), detecting management information indicative of an attack against at least one network element (NE4) of said plurality of network elements, processing said management information thus generating infection data, and transmitting said infection data to said decision making component (DMC);
- 10 c) at said decision making component (DMC), receiving said infection data, making a decision about an action to be carried out to block said attack, and transmitting said decision to said action making component (AMC); and
- d) at said action making component (AMC), based on the decision, instructing said at least one network element (NE4) to perform said action,
- 15 said method being characterized in that said step a) comprises providing said passive monitoring component (PMC) at each of said plurality of network elements.
- 25 2. The method according to claim 1, wherein said step a) further comprises providing said decision making component (DMC) and said action making component (AMC) at one (NE3') of said plurality of network elements.
3. The method according to claim 1, wherein said step a) further comprises providing said decision making component (DMC) and said action making component (AMC) at each (NE1', NE2', NE3', NE4') of said plurality of network elements.
- 30

4. The method according to claim 1, wherein said step a) comprises providing said decision making component (DMC) at one (NE2") of said plurality of network elements and providing said action making component (AMC) at another one (NE3") of said plurality of network elements.
- 5 5. The method according to claim 1, wherein said step a) further comprises at least one of the following steps:
 - providing said decision making component (DMC) at at least two of said plurality of network elements, thus forming a decision making cluster; and
 - 10 - providing said action making component (AMC) at at least another two of said plurality of network elements (NE3", NE4"), thus forming an action making cluster (AC).
6. The method according to any of the preceding claims, wherein said step c) further comprises making said decision by using at least one of a static
15 association table and a dynamic association table, each of said static association table and said dynamic association table comprising a plurality of rows, each of said plurality of rows including a security threshold value and a possible action associated to said security threshold value.
7. An anti-intrusion system for a communication network (CN), said
20 communication network (CN) comprising a plurality of network elements (NE1, NE2, NE3', NE4; NE1', NE2', NE3', NE4'; NE1, NE2", NE3", NE4; NE1, NE2", NE3", NE4"), the system comprising: a passive monitoring component (PMC), a decision making component (DMC), and an action making component (AMC) cooperating with said communication network
25 (CN), wherein:
 - said passive monitoring component (PMC) is suitable for detecting management information indicative of an attack against at least one network element (NE4) of said plurality of network elements, processing said management information thus generating infection
30 data, and transmitting said infection data to said decision making component (DMC);

- said decision making component (DMC) is suitable for receiving said infection data, making a decision about an action to be carried out to block said attack, and transmitting said decision to said action making component (AMC); and
- 5 - said action making component (AMC) is suitable for, based on said decision, instructing said at least one network element (NE4) to perform said action,
the system being characterized in that said passive monitoring component (PMC) is provided at each of said plurality of network elements.
- 10 8. The system according to claim 7, wherein said decision making component (DMC) and said action making component (AMC) are provided at one (NE3') of said plurality of network elements.
- 9. The system according to claim 7, wherein said decision making component (DMC) and said action making component (AMC) are provided
15 at each (NE1', NE2', NE3', NE4') of said plurality of network elements.
- 10. The system according to claim 7, wherein said decision making component (DMC) is provided at one (NE2'') of said plurality of network elements and said action making component (AMC) is provided at another one (NE3'') of said plurality of network elements.
- 20 11. The system according to claim 7, wherein:
 - said decision making component (DMC) is provided at at least two of said plurality of network elements, thus forming a decision making cluster; and/or
 - said action making component (AMC) is provided at at least another
25 two of said plurality of network elements (NE3'', NE4''), thus forming an action making cluster (AC).
- 12. The system according to any of claims 7 to 11, wherein it further comprises at least one of a static association table and a dynamic association table, each of said static association table and said dynamic
30 association table comprising a plurality of rows, each of said plurality of

rows including a security threshold value and a possible action associated to said security threshold value, said decision making component (DMC) being suitable for making said decision by using said at least one of said static association table and said dynamic association table.

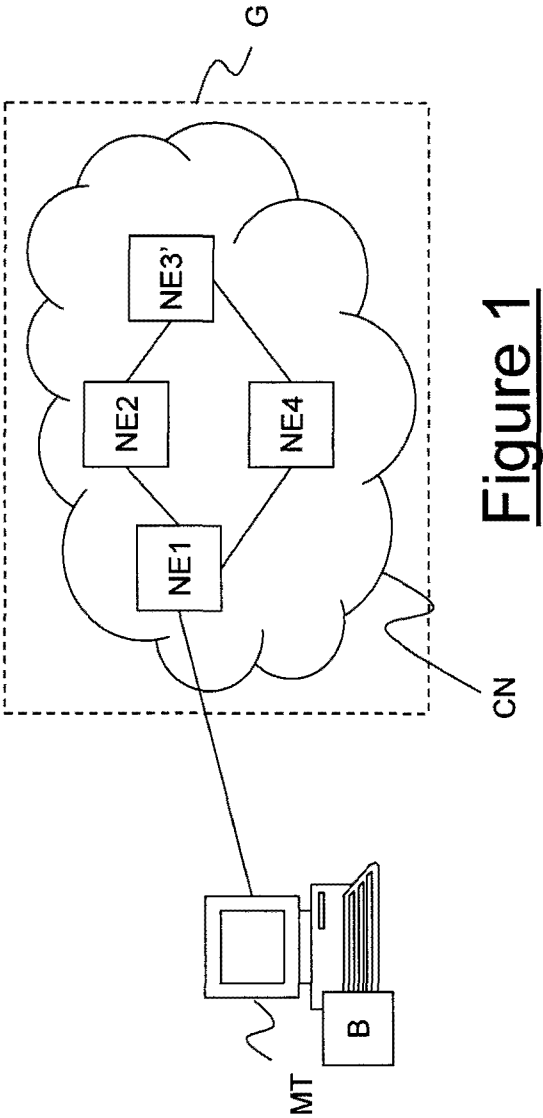


Figure 1

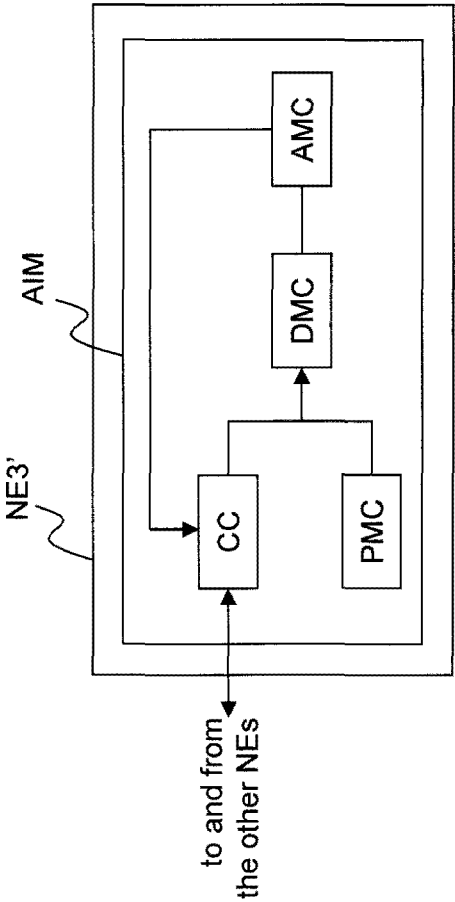


Figure 2

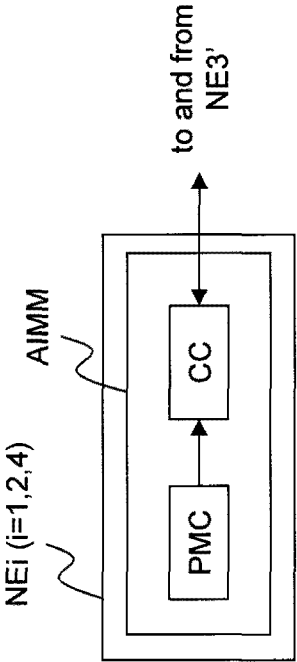


Figure 3

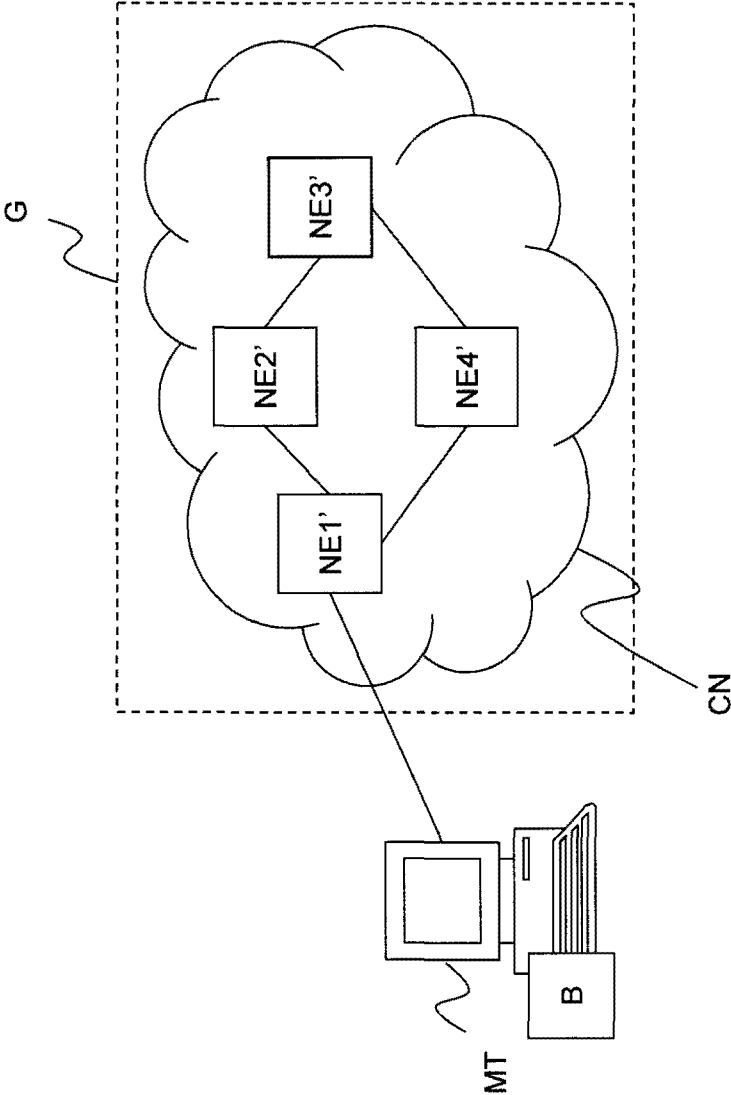


Figure 4

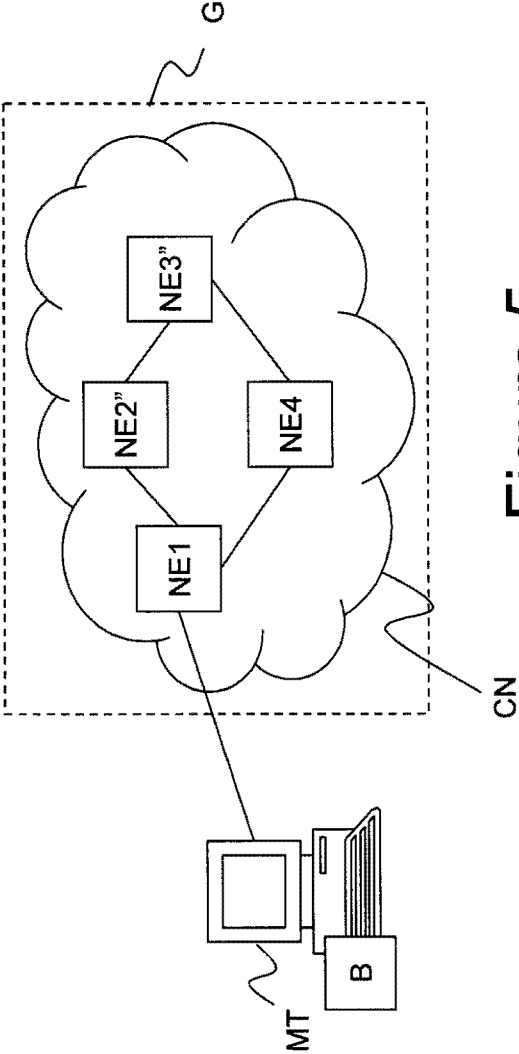


Figure 5

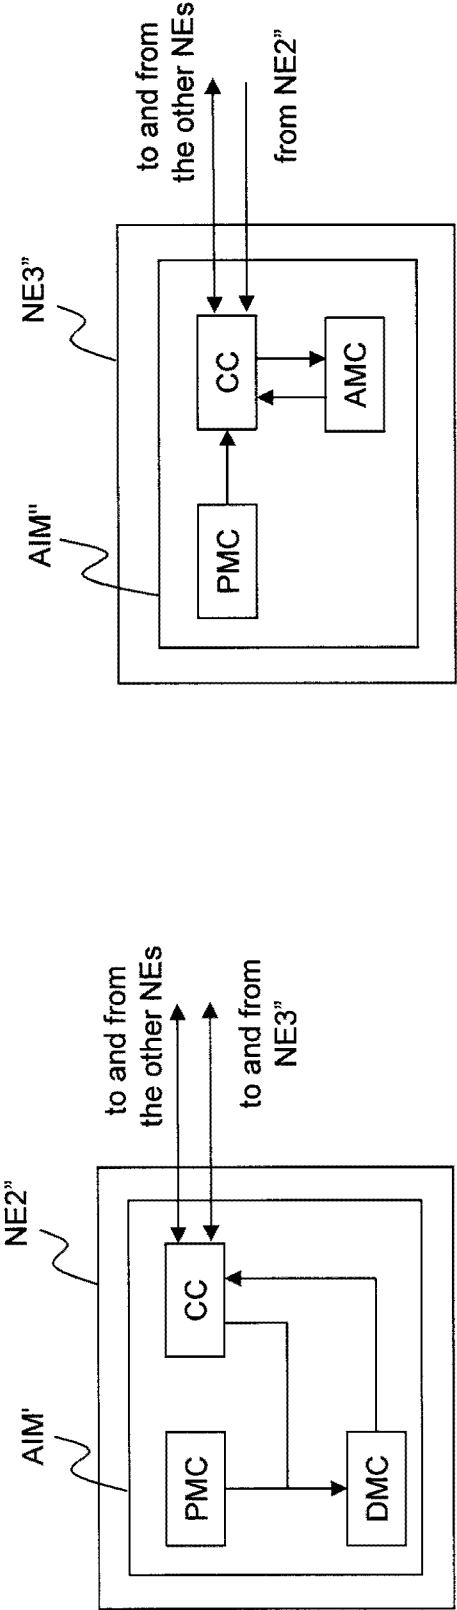


Figure 6

Figure 7

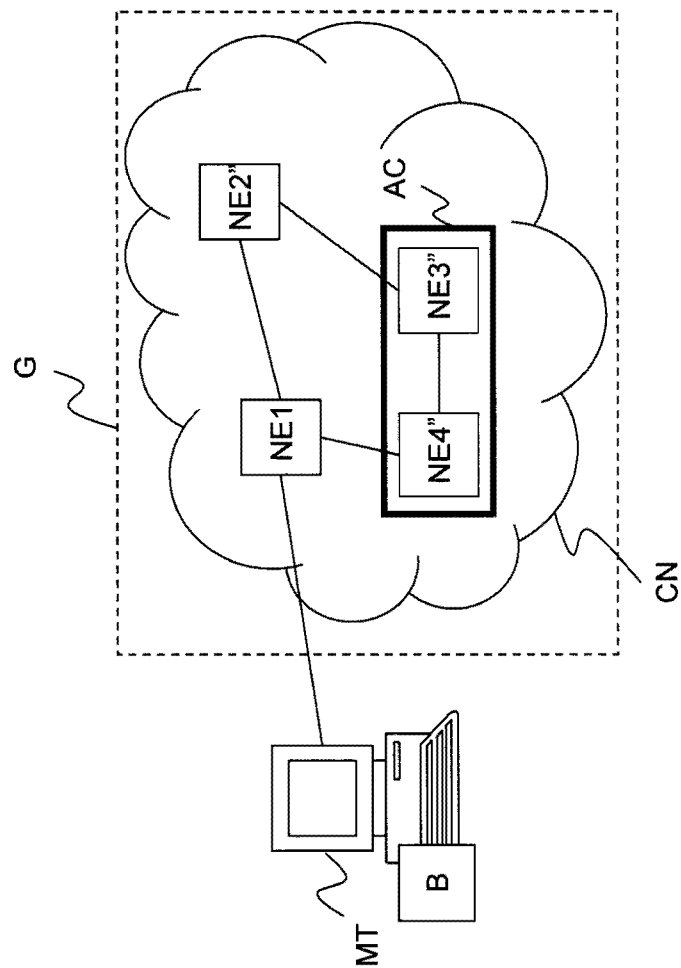


Figure 8

INTERNATIONAL SEARCH REPORT

International application No

PCT/EP2009/058142

A. CLASSIFICATION OF SUBJECT MATTER
 INV. H04L29/06 H04L12/22

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
 H04L

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 2006/080930 A (BARRIER GROUP [US]; DEMOPOULOS ROBERT JAMES [US]; FLADEBO DAVID JAMES) 3 August 2006 (2006-08-03) page 5, lines 19-33 page 7, lines 3-18 page 8, line 35 - page 13, line 5 page 14, lines 31-37 page 17, lines 20-35 page 19, lines 11-23	1-12
A	US 2005/005017 A1 (PTACEK THOMAS HENRY [US] ET AL) 6 January 2005 (2005-01-06) paragraphs [0014], [0019], [0034] - [0042], [0054], [0082], [0106], [0107], [0117] - [0132] ----- -/--	1-12

☒ Further documents are listed in the continuation of Box C.

☒ See patent family annex.

* Special categories of cited documents:

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *G* document member of the same patent family

Date of the actual completion of the international search

12 October 2009

Date of mailing of the international search report

20/10/2009

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
 NL - 2280 HV Rijswijk
 Tel. (+31-70) 340-2040,
 Fax: (+31-70) 340-3016

Authorized officer

Lázaro, Marisa

INTERNATIONAL SEARCH REPORT

International application No

PCT/EP2009/058142

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 2002/107953 A1 (ONTIVEROS MARK [US] ET AL) 8 August 2002 (2002-08-08) paragraphs [0007] - [0012], [0024], [0029], [0033], [0035] -----	1-12

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/EP2009/058142

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 2006080930 A	03-08-2006	NONE	
US 2005005017 A1	06-01-2005	WO 2005006710 A1	20-01-2005
US 2002107953 A1	08-08-2002	US 2002133586 A1	19-09-2002