

(19)



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11)

EP 1 265 740 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:
01.02.2006 Bulletin 2006/05

(51) Int Cl.:
B29D 11/00 (2006.01) *B29C 33/00 (2006.01)*

(21) Application number: 01920623.4

(86) International application number:
PCT/US2001/009075

(22) Date of filing: 22.03.2001

(87) International publication number:
WO 2001/070490 (27.09.2001 Gazette 2001/39)

(54) METHOD AND MOLDS FOR MAKING OPHTHALMIC LENSES

GIESSFORM UND VERFAHREN ZUR HERSTELLUNG VON OPHTHALMISCHEN LINSEN

PROCEDE ET MOULES DESTINES A LA FABRICATION DE DISPOSITIFS OPHTHALMIQUES

(84) Designated Contracting States:
DE FR GB IE IT

• MOLOCK, Frank, F.
Orange Park, FL 32073 (US)
• KIRK, James, F.
Jacksonville, FL 32256 (US)

(30) Priority: 22.03.2000 US 532233

(74) Representative: Fisher, Adrian John et al
CARPMAELS & RANSFORD
43-45 Bloomsbury Square
London WC1A 2RA (GB)

(43) Date of publication of application:
18.12.2002 Bulletin 2002/51

(56) References cited:
EP-A- 0 735 092 EP-A- 0 985 520
WO-A-97/13635 US-A- 5 578 332

(73) Proprietor: Johnson & Johnson Vision Care, Inc.
Jacksonville, FL 32256 (US)

(72) Inventors:
• FORD, James, D.
Orange Park, FL 32003 (US)

EP 1 265 740 B1

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description**BACKGROUND OF THE INVENTION**

5 [0001] This invention relates to molds and mold components for the manufacture of ophthalmic lenses such as contact lenses.

10 [0002] Ophthalmic lenses such as contact lenses are most often manufactured in casting processes. These processes involve injecting a reactive lens forming mixture of polymerizable monomers and other materials in a mold and curing the mixture by exposure to UV light or heat in the presence of an appropriate photoinitiator or catalyst. The molds are usually made of a number of cavities having female and/or male base surfaces or curvilinear mold portions for the formation of the curved ophthalmic lenses. The lens is formed at the interface of the mold surfaces.

15 [0003] A common problem is the adhesion of the lens formed in the mold to one or both of the mold parts. Edge tears and chips, nicks or other surface defects as well as holes, voids, pits, i.e. areas on non-uniform thickness, and puddles formed in the ophthalmic lenses can occur when the adhesion is too great. This problem is exacerbated in processes for making lenses with thin edges or intricate edge geometries. Separating mold halves or mold parts without causing damage to the lens formed in the mold is thus critically important to commercial lens making processes.

20 [0004] One method for dealing with this problem has been the incorporation of additives such as zinc stearate in the mold materials or the inclusion of mold release agents. Unfortunately, these agents can adversely affect mold surface texture or bulk polymer properties. Adjustments to the time, temperature, and heating profile of the cure and demold processes has also been used to affect the adhesion of the lens to at least one of the mold parts. Often, the adjustments to the cure and demold processes that might be helpful in solving the adhesion problem negatively affect the quality of the lens made. Mechanical and optical properties can be seriously eroded or altered.

25 [0005] Japanese Kokai application JP 98-133667 proposes an assembly of first and second molds consisting of a base mold with a thermoplastic film that covers the base mold on the cavity side. The base mold was made of PMMA with a polyethylene film and a female mold made of polypropylene. EP-A-0 985 520 discloses a similar arrangement EP-A-0 735 092, WO-A-9 713 635 and US-A-5 578 332 disclose a method and mold in accordance with the preamble of claims 1 and 6.

30 [0006] Simple methods for reducing or eliminating production loss of lenses due to adhesion to multiple mold parts are still in great demand.

SUMMARY OF THE INVENTION

35 [0007] The invention is a method of making an ophthalmic lens by reacting a lens forming mixture in a mold to form a polymer. The polymer is then demolded from the mold and formed into a completed lens. The molds are made of at least two parts, a first part having a surface for forming the polymer into a portion of the lens and a second part having a surface for forming the polymer into a portion of the lens. The first and second parts of the mold each have different surface energies, and the material used to make at least one of the mold parts is an amorphous polymer.

40 [0008] In another aspect of the invention, an ophthalmic lens mold comprises at least two parts. The first part has a surface for forming a portion of the lens and a second part has a surface for forming the lens. The first and second parts are each made from a material having different surface energies, and the material used to make at least one of the mold parts is an amorphous polymer. The combination of the first and second mold parts form a cavity. The ophthalmic lenses are formed in the cavity from the reaction of a ophthalmic lens forming mixture.

DETAILED DESCRIPTION

45 [0009] An "ophthalmic lens" refers to an intraocular lens, contact lens, or other similar device through which vision is corrected or eye physiology is cosmetically enhanced (e.g., iris color) without impeding vision.

50 [0010] A "lens forming mixture" as the term is used throughout this specification refers to a mixture of materials that can react or be cured to form an ophthalmic lens. Such a mixture includes polymerizable components (monomers), additives such as UV blockers and tints, photoinitiators or catalysts, and other additives one might desire in an ophthalmic lens such as a contact or intraocular lens. Suitable lens forming mixtures are described more fully in US Patents 5,849,209 (as a reactive monomer mix including crosslinking agent and initiator); 5,770,669 (as a prepolymerization mixture including monomers and initiator); and 5,512,205 (as a prepolymer plus monomer system including crosslinkers and initiators).

55 [0011] Lens forming mixtures for making silicone based hydrogel lens are most preferred including those comprising silicone/hydrophilic macromers, silicone based monomers, initiators and additives.

[0012] The terms "mold" and "mold assembly" as used throughout this specification refer to a form having a cavity into which a lens forming mixture is dispensed such that upon reaction or cure of the lens forming mixture, an ophthalmic

lens of a desired shape is produced. The molds and mold assemblies of this invention are made of more than one mold part and form the mold or mold assembly by the combination of the parts. This combination of mold parts is preferably temporary. The mold parts are brought together with a cavity formed between them in which the lens is formed and upon formation of the lens the mold is again separated into mold parts for removal of the lens as described below.


5 [0013] A "mold part" or "mold piece" as the term is used in this specification refers to a portion of mold, which when combined with another portion of a mold forms a mold or mold assembly. The molds of this invention are formed from at least two mold parts. At least one mold part has at least a portion of its surface in contact with the lens forming mixture such that upon reaction or cure of the mixture that surface provides the desired shape and form to the portion of the lens with which it is in contact. The same is true of at least one other mold part.

10 [0014] Thus, for example, in a preferred embodiment a mold is formed from two parts, a female concave piece (front piece) and a male convex piece (back piece) with a cavity formed between them. The portion of the concave surface in contact with lens forming mixture has the curvature of the front curve of a ophthalmic lens to be produced in the mold assembly and is sufficiently smooth that the surface of a ophthalmic lens formed by polymerization of the lens forming mixture in contact with the surface is optically acceptable. Preferably, the front mold piece also has an annular flange 15 integral with and surrounding circular circumferential edge and extends from it in a plane normal to the axis and extending from the flange. The back mold piece has a central curved section with a concave surface, convex surface and circular circumferential edge, wherein the portion of the convex surface in contact with the lens forming mixture has the curvature of the back curve of a ophthalmic lens to be produced in the mold assembly and is sufficiently smooth that the surface of a ophthalmic lens formed by reaction or cure of the lens forming mixture in contact with the back surface is optically acceptable. The back curve also has an annular flange integral with and surrounding the circular circumferential edge 20 and extending from it in a plane normal to the axis of the convex structure. The inner concave surface of the front mold half defines the outer surface of the lens, while the outer convex surface of the base mold half defines the inner surface of the lens.

25 [0015] In this assembly, the back mold piece is made of a material having a substantially different surface energy than the front mold piece. A material has a substantially different surface energy from another material when, after polymerization in a mold made from mold parts of such materials, and upon separation of the mold parts, the lens formed in contact with a surface of each does not adhere one mold part relative to another mold part with which it is in contact. Further, the absence of adhesion to the at least one mold part occurs in the absence of a mold release agent or surface active agent. Monomer undergoing polymerization increases in density or, conversely, shrinks in volume. Given that the 30 lens approximates a thin-walled hemispherical shell, this shrinkage makes the molded part tend towards adherence to the convex mold surface and tend towards delamination from the concave mold surface. Thus, the concave-mold surface has a surface energy at least about 1.0 mN/m higher than the convex mold-surface material surface energy (at the temperature at which the lenses are demolded), as evaluated by Zisman's Surface Energy concept. Preferably, the difference is at least about 5 mN/m, and more preferably it is at least about 9 mN/m. In the most preferred embodiment, 35 the front curve mold surface is a TOPAZ brand polymer made from a cyclic olefin (described more fully below) having a surface energy of 35.9 +/- 1.0 mN/m and the base curve mold is a polypropylene mold surface having a surface energy of 26.6 +/- 0.9 mN/m. This difference is sufficient to combat the bias towards adherence to the base curve.

40 [0016] The mold parts of this invention have different surface energies as a function of their composition and not the presence of mold release agents or surface active agents. Preferably, the mold parts comprise a unitary, homogeneous composition to imbue them with the surface energy of interest. It is most preferred that the mold parts are injection molded from neat polymers having only, at most, processing aids present in them. Neat polymers without processing aids are even more preferred. For example, in a most preferred embodiment, one mold part is made of neat isotactic or syndiotactic 45 polypropylene and another mold part is made of a neat cyclic olefin copolymer such as an ethene-norbornene copolymer. It is also possible to select for use as one of the mold parts, dissimilar materials that are not necessarily synthetic polymers. For example, one mold part can be made from a synthetic material and another can be made of a metal, metalloid, ceramic, or glass composition provided that the two different materials have the different surface energies described above.

45 [0017] With respect to the cyclic olefinic copolymer, the cyclic olefins useful in making them are the cyclic monomers of US patents 5,087,677 and 5,008,356. Other suitable cycloolefinic copolymers useful in this capacity are also commercially available or methods for their production are known as, for example, in United States Patent Nos. 5,545,829, 5,567,776, and 5,567,777 European Patent Application Nos. 203,799, 355,682, 485,893, and 503,422. The preferred cycloolefinic copolymers of this class are random polymers of the formula:

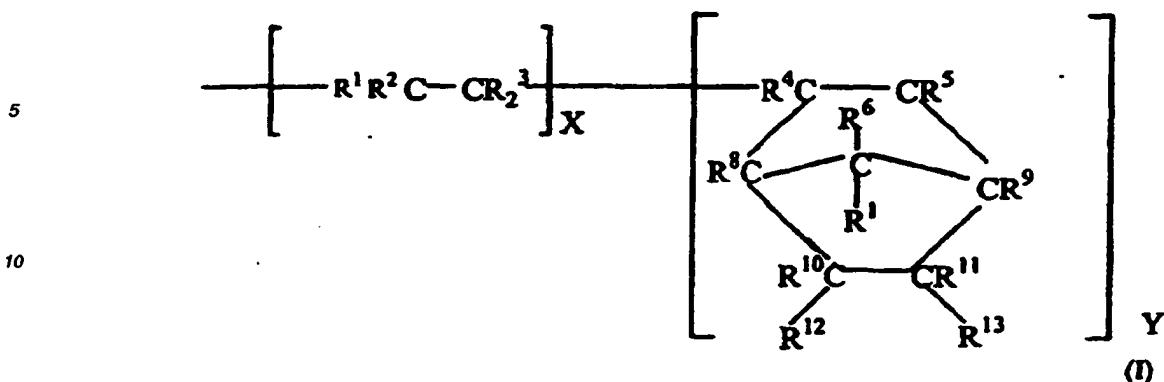

5 wherein R¹ through R³ are each independently H, a C₁₋₈ aliphatic or cycloaliphatic group; R⁴ through R¹³ are each independently H, C₁₋₁₀alkyl, cycloalkyl, aryl, C₃₋₁₀ alkylene, C₃₋₁₀ cycloalkenyl groups; X + Y = 1, and X=.05 to .9. Preferably, R¹ through R³ are H or C₁₋₇ aliphatic groups; R⁴ through R¹³ are H; X is .4-.6 and Y is .6-.4. Most preferably, R₁-R₁₃ are H and X and Y are each .5. These polymers have glass transition temperatures (Tg) of about 77°C-315°C. 10 Preferably the Tg is about 77°C-110°C for ease of injection molding.

20 [0018] The most preferred class of cycloolefinic copolymers of this type are commercially available from Ticona Polymers (formerly Hoechst) under the name TOPAS® polymers. Within the TOPAS® class of polymers, those that are random copolymers which are the reaction products of ethene and norbornene are most preferred.

25 [0019] Other preferred combinations of materials for at least two different mold parts used to make the molds of this invention include:

	Front (concave)	Back (convex)
30	TOPAS Polymer	Polypropylene
	TOPAS Polymer	Polystyrene
	TOPAS Polymer	Polyethylene
	Polystyrene	Polypropylene
	Polystyrene	Polyethylene

35 [0020] However, as a general matter, other combinations of molds sections will provide the benefits of this invention provided that they have the different surface energy characteristics described above.

40 [0021] Although less preferred, multilayer structures can also be used to produce mold parts having significantly different surface energies. In such structures, the bulk of the mold part is made of one material and its surface comprises a layer of a different material having the desired surface energy. Such a mold could be made from a combination of mold parts in which one part made from a polyamide coated with a polypropylene surface while another mold part is made from the ethene-norbornene copolymer. Preferably, such materials would be made in a coextrusion process using a suitable tie-layer. Alternatively, it is possible to fashion a mold from one or more mold parts made from metals, ceramics, and other materials provided that one mold part has a sufficiently different surface energy from other mold part within which the formed lens is in contact.

45 [0022] At least one of the mold parts is preferably made from a material transparent to either UV or visible light. This facilitates the preferred method of cure of the lens material by photoinitiation to promote the subsequent polymerization of a soft contact lens. Amorphous polymers such as atactic polystyrene are generally most suitable in this regard. The mold parts are designed with a thinness (typically 0.8 mm) and rigidity effective to transmit heat rapidly through it and to withstand prying forces applied to separate the mold parts from the mold during demolding.

50 [0023] Ophthalmic lenses are prepared in the molds of this invention by various techniques known to be skilled artisan. Generally, these simply involve forming a mold from mold parts, injecting an ophthalmic lens forming mixture into the cavity of the mold, curing the lens forming mixture into a lens as through exposure to UV radiation, demolding such that the lens is formed on only a portion of the mold, hydrating the formed lens, finishing and packaging the lens so formed. Further description of such processes can be found in U.S. Pat. Nos. 4,495,313 to Larsen, 4,565,348 to Larsen, 4,640,489 to Larsen et al., 4,680,336 to Larsen et al., 4,889,664 to Larsen, et al. and 5,039,459 to Larsen et al.

55 [0024] Notably, in these processes, the demolding process generally requires separation of the mold parts. In one demolding technique, a back curve lens mold is heated creating a differential expansion of the heated mold polymer

relative to the cooler lens polymer which shifts one surface with respect to the other. The resultant shear force breaks the polymerized lens/polymer mold adhesion and assists in the separation of mold portions. The greater the temperature gradient between the surfaces of the mold portions, the greater the shearing force and the easier the mold portions are separated. This effect is greatest when there is maximum thermal gradient. As time continues, heat is lost through conduction from the back mold portion into the lens polymer and the front mold portion, and then collectively into the surrounding environment. The heated back mold portion is, therefore, promptly removed so that very little energy is transferred to the polymer lens, avoiding the possibility of thermal decomposition of the lens. The heating may be accomplished by techniques known to one skilled in the art such as by steam, laser and the like. The process of laser demolding is described in U.S. Pat. No. 5,294,379 to Ross et al, the contents of which are incorporated by reference.

[0025] If the heating step is hot air or steam, after the heating step, the back curve is pried from the front curve and mold in the mold assembly. If on the other hand, the heating is by laser or infrared energy, no prying is used and the back curve separates spontaneously from the front curve.

[0026] The back curve mold part can also be physically pried from the front curve portion of each ophthalmic lens mold to physically expose each ophthalmic lens situated in the lens mold for conveyance to a hydration station for hydration of the lenses.

[0027] When the mold is made from parts having significantly different surface energies according to this invention, the number of lenses that are formed but are unusable because they contain defects, such as chips or edge tears or holes, i.e., voids in the center of the cast lenses are greatly reduced. For example, when a front curve lens mold portion is made of copolymer of ethene and norbornene and a back curve lens mold portion is made of polypropylene, in a prying action between the lens mold parts, as occurs during demolding, the lens will slip more easily from the convex mold portion.

[0028] The invention is further illustrated by the following nonlimiting examples.

EXAMPLE 1 (Mold Part Manufacture)

[0029] Contact lens molds were injection molded on a NETSTAL injection molding machine. Standard eight cavity molds of the type described in U.S. Patent 4,640,489 were produced. Front curve mold halves were injection molded using neat "TOPAS®" copolymers of ethene and norbornene obtained from Hoechst (now Ticona Polymers). They were molded at temperatures of about 104°C with an injection pressure of about 632 kg/cm² and a screw speed of about 150 rpm. Back curve mold halves were made from atactic polystyrene obtained from Exxon Chemical Company under the trade name "ESCORENE PP-EXXON PP1105" and polystyrene obtained from Huntsman Chemical Company under the trade name "HUNTSMAN PS-202".

[0030] The surface energy of the mold parts was determined using the Zisman surface energy concept as follows. Samples for each frame 4.5mm width and 3mm thick were prepared and the advancing contact angle data versus surface tension was plotted using a series of probe liquids of different surface tension and a Cahn DCA 315 instrument.

[0031] The advancing angle of each sample is linear function of surface tension for a homologous series of liquids. Each line extrapolates to zero contact angle at the critical surface tension - which is equivalent to the surface energy of the given sample.

[0032] Frame samples were cycled once in the probe liquids water ($\gamma = 72.8\text{mN/m}$), Glycerin ($\gamma = 63.4\text{ mN/m}$), Ethylene Glycol ($\gamma = 47.7\text{ mN/m}$) and Benzyl Alcohol ($\gamma = 39.0\text{ mN/m}$). Cycles were averaged for three samples per lot in each probe liquid to obtain advancing angle data. Results are shown in Table 1.

Table 1

Frame	Surface Energy mN/m	R Square
Topas Polymer	35.86	.9554
Polystyrene	33.22	.9448
Polypropylene	26.64	.9102

EXAMPLE 2 (Lens Yield)

[0033] Mold assemblies were fashioned according to U.S. Patent 4,640,489 from different combinations of mold parts made according Example 1. Mold A was a mold assembly having a front curve mold half made of TOPAS copolymer and a back curve mold half made of polypropylene.

[0034] An ophthalmic lens forming mixture was prepared by combining the following (all amounts are calculated as weight percent of the total weight of the combination): macromer (~18%); an Si₇₋₉ monomethacryloxy terminated poly-

dimethyl siloxane (~28%); methacryloxypropyl tris(trimethyl siloxy) silane, "TRIS" (~14%); dimethyl amide, "DMA" (~26%); hydroxy ethyl methacrylic acid, "HEMA" (~5%); triethyleneglycoldimethacrylate, "TEGDMA" (~1%), polyvinylpyrrolidone, "PVP" (~5%); with the balance comprising minor amounts of additives and photoinitiators. The macromer was prepared by the Group Transfer Polymerization (GTP) of about 19.1 moles of 2-hydroxyethyl methacrylate, 2.8 moles of methyl methacrylate, 7.9 moles of methacryloxypropyltris(trimethylsiloxy)silane, and 3.3 moles of mono-methacryloxypropyl terminated mono-butyl terminated polydimethylsiloxane. The macromer was completed by reacting the aforementioned material with 2.0 moles per mole of 3-isopropenyl- α,α -dimethylbenzyl isocyanate using dibutyltin dilaurate as a catalyst.

[0035] The lens forming solution was then pumped into each of the molds described above. To do this, eight individually controlled dosing pumps delivered monomer through eight tubes which terminated directly over the eight front-curve frame cavities when the frame was in the dosing station. Polymerization then occurred under a nitrogen purge and was photoinitiated with 5 mW cm⁻² of UV light generated with an Andover Corp. 420PS10-25 AM39565-02 light filter. Contact lenses were formed in the molds. The molds were then pried apart using an infrared (IR) demolding machine and the mold parts to which the lenses adhered were immersed in a 60:40 isopropyl alcohol/de-ionized water solution to hydrate the lenses which were subsequently removed from the mold part to which they were adhered and inspected under a modified microfiche reader (DL-2) at 13X.

[0036] The IR demolder lifts off the base curves and discards the same. Any lenses stuck to their respective base curves are also discarded. The loss rate due to demolding of the lens to the base curve dropped from ca. 50% to ca. 5% of the cavities processed. Further, a portion of the lens can remain attached to the base curve with another portion remaining attached to the front curve during the demolding cycle; causing significant distortion and tearing of the lens. The rate of this adverse event dropped from 10 to 15% of all cavities processed to ca. 0%. The following table presents the defect rates for two runs that used TOPAS polymer on TOPAS polymer mold pairs compared with two runs that used TOPAS polymer front curves with Polypropylene base curves (all with the same edge design).

Run #	1	2	3	4
Mold Pair	T/T	T/T	T/P	T/P
Lenses lost to demold & sub. proc.	68%	42%	11%	4%
Puddles	2.4%	18.8%	1.3%	0.0%
Excess	3.5%	4.8%	24.4%	18.2%
Holes	18.3%	33.9%	33.3%	55.8%
Edge chips	21.0%	51.6%	1.3%	6.5%
Edge tears	42.9%	37.4%	14.1%	2.6%
Surface tears	0.8%	1.3%	0.0%	0.0%
Partial lenses	4.4%	3.8%	1.3%	3.0%

In more recent runs, the defect rate for holes is typically less than 5% and, for excess, typically less than 10%. Chips run between 10 and 20% and edge tears typically less than 10%.


40

Claims

1. A method of making an ophthalmic lens comprising reacting lens forming mixture in a mold to form a polymer, demolding the polymer from the mold, and processing the polymer into a complete lens; wherein said mold comprises at least two parts, a first part having a surface for forming said polymer into a portion of said lens and a second part having a surface for forming said polymer into a portion of said lens; said first part made from a material having a different surface energy than said second part, characterised in that the material used to make at least one of said parts is an amorphous polymer.
2. The method of claim 1 wherein the surface energies of the polymer used to form the first part and the polymer used to form the second part are different by at least about 1.0 mN/m.
3. The method of claim 1 wherein the surface energies of the polymer used to form the first part and the polymer used to form the second part are different by at least about 9.0 mN/m.
4. The method of claim 1 wherein said first part is made from a polymer selected from the group consisting of polystyrene, polypropylene, and polyethylene and said second part is made from a polymer selected from the group consisting

of cyclic olefinic copolymer and polystyrene.

- 5. The method of claim 1 wherein the material used to make at least two of said parts is an amorphous polymer.
- 5 6. A mold for making ophthalmic lenses comprising at least two parts, a first part having a surface for forming a polymer into a portion of said lens and a second part having a surface for forming said polymer into a portion of said lens; said first part made from a material having a different surface energy than said second part, **characterised in that** the material used to make at least one of said parts is an amorphous polymer.
- 10 7. The mold of claim 6 wherein, the combination of said first and second mold parts form a cavity therebetween for the formation of said ophthalmic lenses from the reaction of a ophthalmic lens forming mixture therebetween.
- 8. The mold of claim 7 wherein the surface energies of the material used to form the first part and the material used to form the second part are different by at least about 1.0 mN/m.
- 15 9. The mold of claim 7 wherein the surface energies of the material used to form the first part and the material used to form the second part are different by at least about 9.0 mN/m.
- 20 10. The mold of claim 7 wherein said first part is made from a material selected from the group consisting of polystyrene, polypropylene, and polyethylene and said second part is made from a polymer selected from the group consisting of cyclic olefinic copolymer and polystyrene.
- 11. The mold of claim 7 wherein the material used to make at least two of said parts is an amorphous polymer.
- 25 12. The mold of claim 7 wherein the tendency of molded parts to adhere to the convex mold surface is lessened.
- 13. The mold of claim 7 wherein, either said first part or said second part further comprises a polymer of the formula

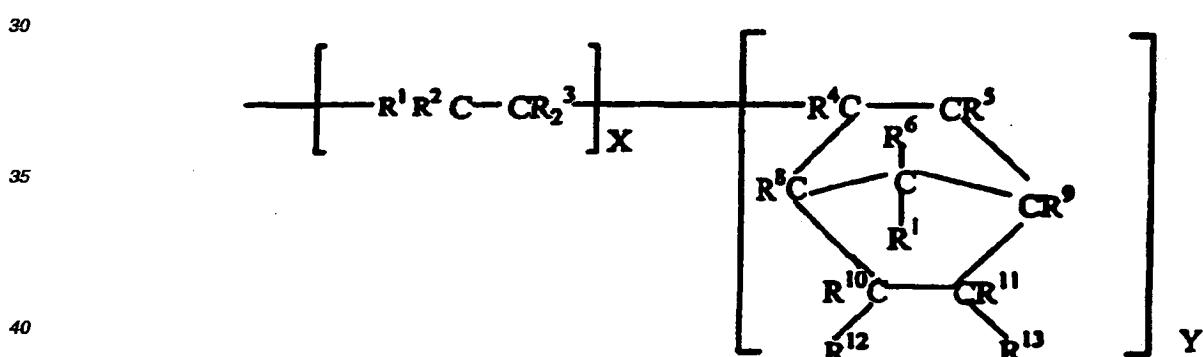

45 wherein R¹ through R³ are each independently H, a C₁₋₈ aliphatic or cycloaliphatic group; R⁴ through R¹³ are each independently H, C₁₋₁₀ alkyl, cycloalkyl aryl, C₃₋₁₀ alkylene, C₃₋₁₀ cycloalkenyl groups; X + Y = 1, and X=.05 to .9.

Patentansprüche

- 50 1. Verfahren zur Herstellung einer ophthalmischen Linse, umfassend das Reagieren der Linsen-bildenden Mischung in einer Form, um ein Polymer zu bilden, Entformen des Polymers aus der Form und Weiterverarbeitung des Polymers in eine vollständige Linse;
wobei die Form mindestens zwei Teile umfasst: einen ersten Teil, der eine Oberfläche zur Bildung des Polymers in einen Teil der Linse aufweist, und einen zweiten Teil, der eine Oberfläche zur Bildung des Polymers in einen Teil der Linse aufweist;
wobei der erste Teil aus einem Material hergestellt ist, das eine Oberflächenenergie aufweist, die verschieden ist zu der des zweiten Teils,
wobei das Material, das zur Herstellung von mindestens einem der Teile verwendet wird, ein amorphes Polymer ist.

2. Verfahren nach Anspruch 1, wobei die Oberflächenenergien des Polymers, das verwendet wird, um den ersten Teil zu bilden, und des Polymers, das verwendet wird, um den zweiten Teil zu bilden, um mindestens ungefähr 1,0 mN/m verschieden sind.

5 3. Verfahren nach Anspruch 1, wobei die Oberflächenenergien des Polymers, das verwendet wird, um den ersten Teil zu bilden, und des Polymers, das verwendet wird, um den zweiten Teil zu bilden, um mindestens ungefähr 9,0 mN/m verschieden sind.

10 4. Verfahren nach Anspruch 1, wobei der erste Teil aus einem Polymer hergestellt ist, das ausgewählt ist aus der Gruppe bestehend aus Polystyrol, Polypropylen und Polyethylen, und wobei der zweite Teil aus einem Polymer hergestellt ist, das ausgewählt ist aus der Gruppe bestehend aus zyklischem olefinischem Copolymer und Polystyrol.

15 5. Verfahren nach Anspruch 1, wobei das Material, das verwendet wird, um mindestens zwei der Teile herzustellen, ein amorphes Polymer ist.

16 6. Form zur Herstellung optalmischer Linsen, umfassend mindestens zwei Teile: einen ersten Teil, der eine Oberfläche zur Bildung eines Polymers in einen Teil der Linsen aufweist, und einen zweiten Teil, der eine Oberfläche zur Bildung des Polymers in einen Teil der Linsen aufweist; wobei der erste Teil aus einem Material hergestellt ist, das eine Oberflächenenergie aufweist, die verschieden ist zu der des zweiten Teils, wobei das Material, das verwendet wird, um mindestens eines der Teile herzustellen, ein amorphes Polymer ist.

20 7. Form nach Anspruch 6, wobei die Kombination der ersten und zweiten Formteile zur Ausbildung einer Kavität dazwischen zur Bildung der optalmischen Linsen aus der Reaktion einer optalmischen Linsen-bildenden Mischung dazwischen führt.

25 8. Form nach Anspruch 7, wobei die Oberflächenenergien des Materials, das verwendet wird, um den ersten Teil zu bilden, und des Materials, das verwendet wird, um den zweiten Teil zu bilden, um mindestens ungefähr 1,0 mN/m verschieden sind.


30 9. Form nach Anspruch 7, wobei die Oberflächenenergien des Materials, das verwendet wird, um den ersten Teil zu bilden, und des Materials, das verwendet wird, um den zweiten Teil zu bilden, um mindestens ungefähr 9,0 mN/m verschieden sind.

35 10. Form nach Anspruch 7, wobei der erste Teil aus einem Material hergestellt ist, das ausgewählt ist aus der Gruppe bestehend aus Polystyrol, Polypropylen und Polyethylen, und der zweite Teil aus einem Polymer hergestellt ist, das ausgewählt ist aus der Gruppe bestehend aus zyklischem olefinischen Copolymer und Polystyrol.

40 11. Form nach Anspruch 7, wobei das Material, das verwendet wird, um mindestens zwei der Teile herzustellen, ein amorphes Polymer ist.

12. Form nach Anspruch 7, wobei die Tendenz der geformten Teile, an die konvexe Formoberfläche anzuhaften, ver- ringert ist.

45 13. Form nach Anspruch 7, wobei entweder der erste Teil oder der zweite Teil weiterhin ein Polymer mit der Formel

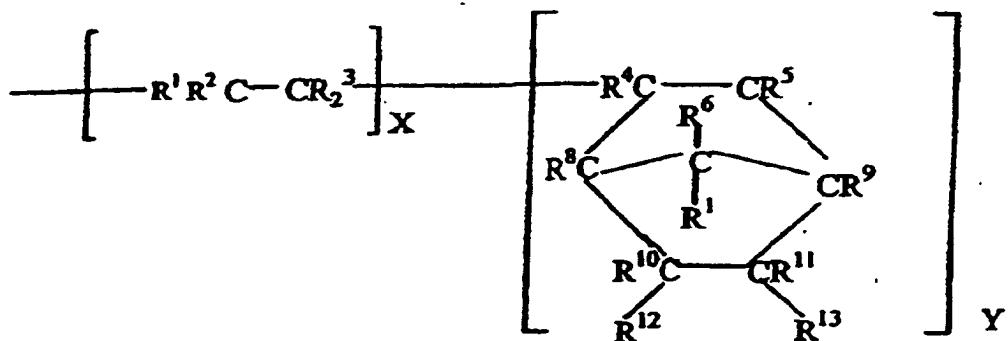

umfaßt wobei R¹ bis R³ jeder unabhängig voneinander H, eine C₁₋₈aliphatische oder zyklaliphatische Gruppe sind; R⁴ bis R¹³ jeder unabhängig voneinander H, C₁₋₁₀alkyl, Zykloalkyl, Aryl, C₃₋₁₀Alkylen, C₃₋₁₀Zykloalkenyl-Gruppen sind; X + Y = 1 und X = 0,05 bis 0,9.

20 Revendications

1. Procédé de préparation d'une lentille ophtalmique comprenant la réaction d'un mélange de formation de lentille dans un moule pour former un polymère, le démoulage du polymère hors du moule, et l'usinage du polymère en une lentille complète ; dans lequel ledit moule comprend au moins deux parties, une première partie ayant une surface pour former ledit polymère en une partie de ladite lentille et une deuxième partie ayant une surface pour former ledit polymère en une partie de ladite lentille ; ladite première partie étant faite d'un matériau ayant une énergie de surface différente de celle de ladite deuxième partie, et dans lequel le matériau utilisé pour préparer au moins l'une desdites parties est un polymère amorphe.
2. Procédé selon la revendication 1, dans lequel les énergies de surface du polymère utilisé pour former la première partie et du polymère utilisé pour former la deuxième partie sont différentes d'au moins environ 1,0 mN/m.
3. Procédé selon la revendication 1, dans lequel les énergies de surface du polymère utilisé pour former la première partie et du polymère utilisé pour former la deuxième partie sont différentes d'au moins environ 9,0 mN/m.
4. Procédé selon la revendication 1, dans lequel ladite première partie est produite à partir d'un polymère choisi dans le groupe constitué par le polystyrène, le polypropylène et le polyéthylène, et ladite deuxième partie est produite à partir d'un polymère choisi dans le groupe constitué par un copolymère oléfinique cyclique et le polystyrène.
5. Procédé selon la revendication 1, dans lequel le matériau utilisé pour préparer au moins deux desdites parties est un polymère amorphe.
6. Moule pour préparer des lentilles ophtalmiques comprenant au moins deux parties, une première partie ayant une surface pour former un polymère en une partie de ladite lentille et une deuxième partie ayant une surface pour former ledit polymère en une partie de ladite lentille ; ladite première partie étant faite d'un matériau ayant une énergie de surface différente de celle de ladite deuxième partie, dans lequel le matériau utilisé pour préparer au moins l'une desdites parties est un polymère amorphe.
7. Moule selon la revendication 6, dans lequel la combinaison desdites première et deuxième parties de moule forment une cavité entre elles pour la formation desdites lentilles ophtalmiques à partir de la réaction entre elles d'un mélange formant une lentille ophtalmique.
8. Moule selon la revendication 7, dans lequel les énergies de surface du matériau utilisé pour former la première partie et du matériau utilisé pour former la deuxième partie sont différentes d'au moins environ 1,0 mN/m.
9. Moule selon la revendication 7, dans lequel les énergies de surface du matériau utilisé pour former la première partie et du matériau utilisé pour former la deuxième partie sont différentes d'au moins environ 9,0 mN/m.

10. Moule selon la revendication 7, dans lequel ladite première partie est produite à partir d'un matériau choisi dans le groupe constitué par le polystyrène, le polypropylène et le polyéthylène, et ladite deuxième partie est produite à partir d'un polymère choisi dans le groupe constitué par un copolymère oléfinique cyclique et le polystyrène.


5 11. Moule selon la revendication 7, dans lequel le matériau utilisé pour préparer au moins deux desdites parties est un polymère amorphe.

12. Moule selon la revendication 7, dans lequel la tendance des parties moulées à adhérer à la surface de moule convexe est amoindrie.

10

13. Moule selon la revendication 7, dans lequel soit ladite première partie soit ladite deuxième partie comprend en outre un polymère de formule :

15

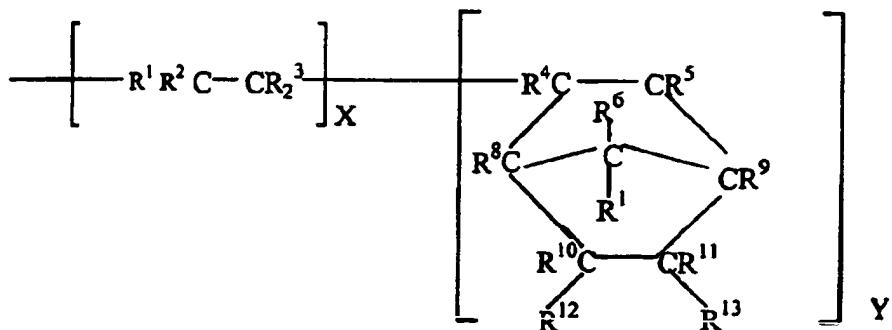

20

25

dans laquelle chacun de R¹ à R³ est indépendamment H ou un groupe aliphatique ou cycloaliphatique en C₁₋₈; chacun de R⁴ à R¹³ est indépendamment H ou un groupe alkyle, cycloalkyle en C₁₋₁₀, aryle, alkylène en C₃₋₁₀, cycloalcényle en C₃₋₁₀; X + Y = 1, et X = 0,05 à 0,9.

30

35

40

45

50

55

REGISTER ENTRY FOR EP1265740

European Application No EP01920623.4 filing date 22.03.2001

Priority claimed:

22.03.2000 in United States of America - doc: 532233

PCT EUROPEAN PHASE

PCT Application PCT/US2001/009075 Publication No WO2001/070490 on
27.09.2001

Designated States DE FR GB IE IT

Title METHOD AND MOLDS FOR MAKING OPHTHALMIC LENSES

Applicant/Proprietor

JOHNSON & JOHNSON VISION CARE, INC., 7500 Centurion Parkway, Suite 100,
Jacksonville, FL 32256, United States of America [ADP No. 69807873001]

Inventors

JAMES D. FORD, 515 Nassau Court, Orange Park, FL 32003, United States of
America [ADP No. 72296148001]

FRANK F. MOLOCK, 1543 Wildfern Drive, Orange Park, FL 32073, United States
of America [ADP No. 72296155001]

JAMES F. KIRK, 9009 Western Lake Drive 110, Jacksonville, FL 32256, United
States of America [ADP No. 72296163001]

Classified to

B29D B29C

Address for Service

JOHNSON & JOHNSON VISION CARE, INC., 7500 Centurion Parkway, Suite 100,
Jacksonville, FL 32256, United States of America [ADP No. 69807873001]

EPO Representative

ADRIAN JOHN FISHER, CARPMAELS & RANSFORD, 43-45 Bloomsbury Square, London,
WC1A 2RA, United Kingdom [ADP No. 50698612001]

Publication No EP1265740 dated 18.12.2002

Publication in English

Examination requested 23.09.2002

Patent Granted with effect from 01.02.2006 (Section 25(1)) with title METHOD
AND MOLDS FOR MAKING OPHTHALMIC LENSES

30.12.2005 EPO: Search report published on 16.05.2002
Entry Type 25.11 Staff ID. RD06 Auth ID. EPT

TIMED: 16/02/06 10:49:54

REGISTER ENTRY FOR EP1265740 (Cont.)

PAGE: 2

29.01.2006 Notification of change of Address For Service name and address of
JOHNSON & JOHNSON VISION CARE, INC., 7500 Centurion Parkway, Suite
100, Jacksonville, FL 32256, United States of America

[ADP No. 69807873001]

to

CARPMAELS & RANSFORD, 43 Bloomsbury Square, LONDON, WC1A 2RA,
United Kingdom [ADP No. 00000083001]

dated 10.01.2006. Written notification filed on EP REG ADMIN

Entry Type 7.1 Staff ID. VLAW Auth ID. F51

***** END OF REGISTER ENTRY *****

DA80-01
EP

OPTICS - PATENTS

16/02/06 10:50:01
PAGE: 1

RENEWAL DETAILS

PUBLICATION NUMBER EP1265740

PROPRIETOR(S)

Johnson & Johnson Vision Care, Inc., 7500 Centurion Parkway, Suite 100, Jacksonville, FL 32256, United States of America

DATE FILED 22.03.2001

DATE GRANTED 01.02.2006

DATE NEXT RENEWAL DUE 01.05.2006

DATE NOT IN FORCE

DATE OF LAST RENEWAL

YEAR OF LAST RENEWAL 00

STATUS PATENT IN FORCE
***** END OF REPORT *****