


2 Sheets—Sheet 1.

C. A. WEED.
MORTISING-MACHINE.

No. 186,182.

Patented Jan. 9, 1877.

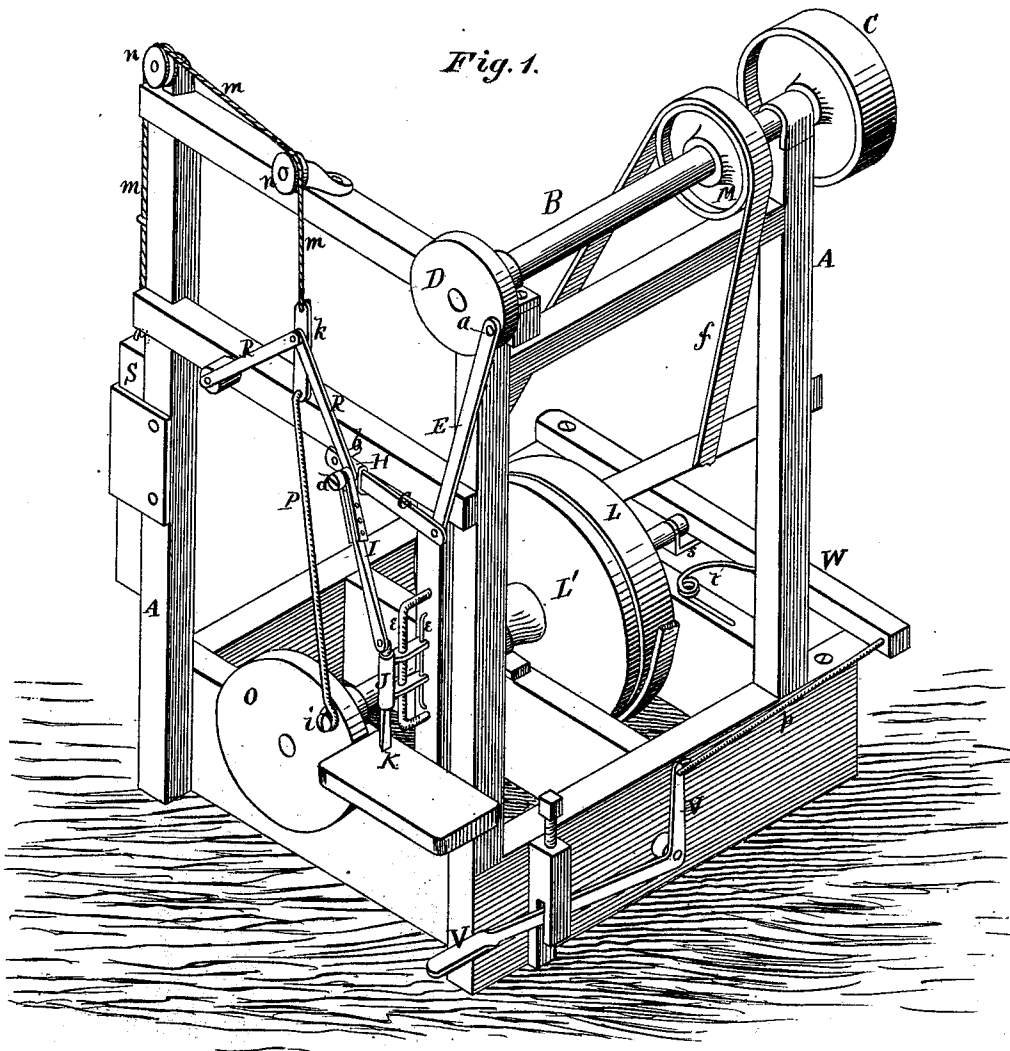

WITNESSES

Henry N. Miller
C. L. Ewert

INVENTOR

C. A. Weed


Alexander & Mason
ATTORNEYS

C. A. WEED.
MORTISING-MACHINE.

No. 186,182.

Patented Jan. 9, 1877.

Fig 2.

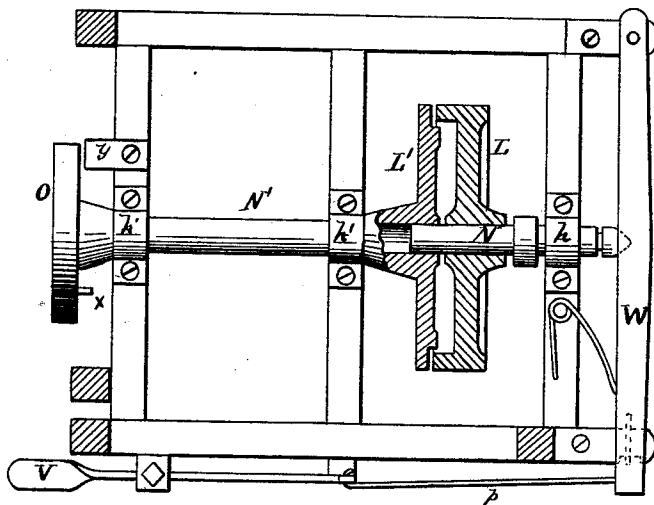

WITNESSES

Henry N. Miller
C. L. Ewert.

INVENTOR

C. A. Weed.
Alexander Mason
ATTORNEYS

UNITED STATES PATENT OFFICE.

CLINTON A. WEED, OF RACINE, WISCONSIN.

IMPROVEMENT IN MORTISING-MACHINES.

Specification forming part of Letters Patent No. **186,182**, dated January 9, 1877; application filed October 11, 1876.

To all whom it may concern:

Be it known that I, CLINTON A. WEED, of Racine, in the county of Racine, and in the State of Wisconsin, have invented certain new and useful Improvements in Mortising-Machines; and do hereby declare that the following is a full, clear, and exact description thereof, reference being had to the accompanying drawings, and to the letters of reference marked thereon, making a part of this specification.

The nature of my invention consists in the construction and arrangement of a mortising-machine, as will be hereinafter more fully set forth.

In order to enable others skilled in the art to which my invention appertains to make and use the same, I will now proceed to describe its construction and operation, referring to the annexed drawings, in which—

Figure 1 is a perspective view of my mortising-machine. Fig. 2 is a detailed view of a clutch arrangement used therein.

A represents a suitable frame-work to contain the various working parts of the machine. B is the main shaft, provided at one end with a driving-pulley, C, to which motion is communicated through a belt from the engine. At the other end of the shaft B is a disk, D, with crank or wrist pin *a*, on which is placed the pitman E, the other end of said pitman being pivoted to one end of a lever, G, the other end of which is pivoted on a stud, *b*, projecting from the frame. On the lever G is a slide, H, having a projecting stud, *d*, and on this stud is placed a pitman, I, which connects with a vertically-moving cross-head, J, having the chisel K attached to it. The cross-head J moves upon guides *ee*, attached to the main frame A, and the extent of its movement is regulated by the position of the slide H upon the lever G, as it will readily be seen that the farther said slide is away from the pivoted end of the lever the greater distance the cross-head will travel on its guides, and, in other words, the chisel will be fed downward by gradually moving the slide outward on the lever. This movement of the slide H is effected by the following means: On the main shaft B is a pulley, M, connected by a belt, *f*, with a friction-pulley, L, secured on a shaft, N, which has one bearing in a box, *h*,

on the main frame, and the other bearing in the hub of another friction-pulley, L', secured on a shaft, N'. The shaft N' rotates in boxes *h' h'*, but is not movable laterally therein, while the shaft N is movable laterally in its bearings, so as to bring the pulley L in contact with the pulley L' when desired. On the end of the shaft N' is a wheel or disk, O, provided with a crank or wrist pin, *i*, on which is placed a pitman, P. This pitman connects with a link, *k*, pivoted to the joint of two toggle-levers, R R. One of these levers is pivoted to a stud on the frame A, and the other to the stud *d* on the slide H. From the other end of the link *k* a cord, *m*, runs over pulleys *n n*, as shown, and has a weight, S, attached to its other end, as shown. V represents a foot-lever, pivoted to the side of the machine, and projecting in front thereof, as shown. This lever is L-shaped, and, by a rod, *p*, connected with a lever, W, and this lever is, by a plate, *s*, connected with the end of the shaft N, upon which the friction-pulley L is secured. *t* is a spring, operating upon the lever W in such a way as to draw the pulley L away from contact with the pulley L'.

When the machine is in operation and the operator places his foot on the lever V, the pulley L is brought in frictional contact with the pulley L', and causes the shaft N' to rotate in its boxes. The disk O will then turn until a pin, *x*, on its inner side strikes a stop, *y*, which movement of the disk, by means of the pitman P, draws down the toggle-levers R R, and moves the slide H outward on the lever G, so as to feed the chisel downward, said chisel having at the same time a continuous vertically-reciprocating movement. As soon as the pin *x* on the wheel O strikes the stop *y* the chisel will reach its lowest depth, and when the operator removes his foot from the lever V, the weight S at once draws up the toggle-joint, so as to move the slide H inward on the lever G, and the spring *t*, operating upon the lever W, removes the pulley L from contact with the pulley L'.

My invention, with very slight changes, may be used for boring instead of mortising.

Having thus fully described my invention, what I claim as new, and desire to secure by Letters Patent, is—

1. The combination, with the slide H upon the lever G, of the toggle-levers R R, cord *m*, with weight S, the pitman P, disk O, with wrist-pin *i*, shafts N N', and friction pulleys or clutch L L', all substantially as and for the purposes herein set forth.

2. The combination, with the pulley L' on the shaft N', of the laterally-movable shaft N, with pulley L, the lever W, with plate *s* and spring *t*, the connecting-rod *p*, and pivoted L-

shaped foot-lever V, substantially as and for the purposes herein set forth.

In testimony that I claim the foregoing I have hereunto set my hand this 24th day of August, 1876.

CLINTON A. WEED.

Witnesses:

ANSEL BATES,

THOS. ST. GEORGE.