



EUROPEAN PATENT SPECIFICATION

Date of publication of patent specification :
07.12.94 Bulletin 94/49

Int. Cl.⁵ : **F25D 11/02, F25D 17/06,
F25D 21/06, F25D 29/00**

Application number : **90102678.1**

Date of filing : **12.02.90**

Refrigerating device.

Priority : **13.02.89 IT 6707689**

Date of publication of application :
22.08.90 Bulletin 90/34

Publication of the grant of the patent :
07.12.94 Bulletin 94/49

Designated Contracting States :
DE ES FR GB

References cited :
**EP-A- 0 192 526
WO-A-85/03995
DE-A- 3 404 256
US-A- 3 411 312
US-A- 4 682 474**

Proprietor : **MERLONI ELETTRODOMESTICI
S.p.A.
Viale Aristide Merloni, 45
I-60044 Fabriano (AN) (IT)**

Inventor : **Aisa, Valerio
Via Serraloggia 78/A
I-60044 Fabriano (AN) (IT)
Inventor : Santini, Francesco
Via S. Pellico 4
I-60044 Fabriano (AN) (IT)
Inventor : Cappelletti, Domenico
Via Giacomo Brodolini 27
I-Matelica (MC) (IT)
Inventor : Mariani, Pietro
Via Serraloggia 103
I-60044 Fabriano (AN) (IT)
Inventor : Mariani, Alberto
Via Don Minzoni 61
I-60044 Fabriano (AN) (IT)
Inventor : Boninsegni, Aurelio
Via Dei Lorena 51
I-S.Sepolcro (AR) (IT)
Inventor : Monaldi, Natale
Via Broganelli 171
I-60044 Fabriano (AN) (IT)**

Representative : **Dini, Roberto
Merloni Elettrodomestici S.p.A
Ufficio Brevetti e Marchi
Via Pinerolo 25
I-10060 None (TO) (IT)**

EP 0 383 222 B1

Note : Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid (Art. 99(1) European patent convention).

Description

The present invention relates to a refrigerating device comprising three compartments, among which a first compartment is used for the storage of fresh food and a second compartment is used for the freezing and storing of foods, a refrigerating circuit comprising a compressor, a first and second evaporators arranged in said first and second compartments, respectively, and a condenser.

Refrigerating devices with three compartments are already known. For instance, EP-A- 0 181 781 describes a refrigerating device with three compartments, of which one is used for the freezing and storage of food (freezer), one for the storage of fresh food (refrigerator) and an intermediate one that can be set to obtain three different temperatures, the first one close to that of the freezer, the second close to that of the compartment for fresh food and the third at about zero degrees.

Said result can be reached through one evaporator only, a circulation fan, a complex system of thermostated changes of the forced air circulation (from evaporator to freezer, from evaporator to refrigerator and from evaporator to the intermediate compartment).

From the evaporator to the intermediate compartment two ways are available: the first one being enabled when acting as a freezer, the second when acting as a refrigerator or as a compartment at zero degrees. Zero degree temperature is reached by heating the thermostatic door probe to deceive it and let it assume that the temperature is higher than the real one. Thus, the system described in EP-A- 0 181 781 appears rather complex and costly.

A refrigerating device with three compartments is also described in EP-A- 0 289 408, where the refrigerating device covered by such an application shows a refrigerating circuit with two evaporators in series, a first one located in the freezer compartment and the second in the compartment for the storage of fresh food.

A capillary between the two evaporators is located in the third compartment, where in this way a zero degree temperature is maintained. This system is simple and inexpensive; however, it does not allow the user to change the temperature and consequently the use of the intermediate compartment.

Another refrigerating device with three compartments is described in EP-A- 0 192 526, which shows a refrigerating device having two compressors, three evaporators (one for each compartment), a three-way electrovalve and a number of thermostats, electrical switches and three control assemblies, each one comprising a manual rotating button, which permit to control the operation of the three compartments, among which one can be set for one of three different temperatures.

Purpose of the present invention is to indicate a refrigerating device relatively simple and of reasonable cost, which allows anyway to obtain at least two different temperatures inside the intermediate compartment.

To achieve said purpose it is the aim of the present invention to realize a refrigerating device comprising three compartments, among which a first compartment used for the storage of fresh food and a second compartment used for the freezing and storage of food, a refrigerating circuit comprising a compressor, a condenser, first and second evaporators, arranged in said first and said second compartments respectively, coupled to the refrigerating circuit through an electrovalve, and control means allowing the user to set the third compartment either for the storage of fresh food or for its freezing, characterized in that it further comprises a fan and slots for air circulation in the second and third compartments and in that said control means comprise a central electronic unit including in particular a microprocessor which, in response to the activation by the user of a specific control element, can control said compressor, the electrovalve and further electromechanical actuating means which comprise at least one actuator enabled to move a flap to close or open the relevant slots for air circulation adjustment inside the third compartment.

A preferred version of the refrigerating device according to the present invention is characterized in that means for setting and keeping the temperature in said third compartment at a selected value, chosen within a predetermined range of values, are provided.

Further aims and advantages of the present invention are clearly shown in the following detailed description and annexed drawings by way of an explicative but non limiting example, where:

- Fig. 1 shows schematically the refrigerating circuit of the refrigerating device according to the invention;
- Fig. 2 shows specifically some elements of the refrigerating device according to the invention;
- Fig. 3 shows schematically the electric circuit of the refrigerating device according to the invention;
- Fig. 4 shows specifically the display element of the refrigerating device according to the invention;
- Fig. 5 shows schematically a significant part of the control unit flowchart for the refrigerating device according to the invention;
- Fig. 6 shows schematically a further significant part of the control unit flowchart for the refrigerating device according to the invention.

In figure 1, showing schematically the refrigerating circuit of the refrigerating device according to the present invention, number 1 indicates a compressor to press the refrigerating fluid; number 2 indicates the

delivery pipe exiting from the compressor 1; number 3 indicates the condenser to cool the pressed fluid; number 4 indicates a three-way solenoid valve; number 5 indicates the capillary tube of the evaporator 6 for the compartment 9 used for the storage of fresh food (refrigerator); number 7 indicates the capillary tube of the evaporator 8 for the freezing compartment (freezer) 11; number 10 indicates a third intermediate compartment with variable temperature that can be used both for the storage of fresh food and for freezing purpose, as it will be better explained later.

Number 12 indicates a fan for air circulation in the compartments 10 and 11, number 13 indicates the slots for air circulation in the compartment 11, number 14 indicates a movable grid (flap) to close or open the relevant slots for air circulation adjustment inside the intermediate compartment 10.

Number 15 indicates one of the two linear electromechanical actuators to move the flap 14 back and forward as it is better explained in Fig. 2.

In Fig. 2, where some elements of the refrigerating device according to the invention as specifically shown, the opposite actuator 15a is also shown along with the flap 14 and actuator 15.

When actuator 15 is enabled, it pushes flap 14 away from it; the same applies for actuator 15a. Obviously, if one actuator is operated the slots will be open to allow air circulation, whereas the slots will be closed and air circulation stopped when the other actuator is operated.

When the slots are open the temperature in the compartment 10 will attain the same value as in compartment 11 (-18° condition), whereas when they are closed the temperature inside the compartment 10 will rise up to a value close to the one of compartment 9 ($+3^{\circ}$).

Operating both actuators suitably, the temperature inside the compartment 10 can be maintained at a predetermined value selected between the above two values, as it will be better explained later.

It should be noted that both actuators are preferably used according to the ON-OFF principle, i.e. flap 14 is either fully open or fully closed and the temperature setting is obtained by changing the opening and closing time.

Moreover, each actuator is only enabled for the time required to change the position of flap 14; thus, activation time is greatly reduced while the actuator life is considerably extended.

In Fig. 3, showing schematically the electric circuit of the refrigerating device according to the invention, the central rectangle represents the electronic control card of the refrigerating device.

Symbol uP indicates the microprocessor controlling the whole operation according to the flowchart schematically shown in Fig. 5.

Symbol ID indicates the connecting interface from the microprocessor to the display/keyboard unit,

as shown in Fig. 4.

Symbol AD indicates an analogic/digital converter to convert into digital signals that can be processed by the microprocessor the analogic signals collected by the four relevant temperature probes S1, S2, S3, S4, related to the refrigerator compartment, refrigerator evaporator, intermediate compartment and freezer compartment, respectively.

Specifically the microprocessor controls through the probe S3 that temperature in the intermediate compartment 10 reaches and keeps the temperature input by key 12 within the usual tolerance values (see Fig. 4).

Symbol ME indicates a non-volatile RAM memory (read and write memory), eg. of the EEPROM type (electronically erasable programmable read only memory). Said memory will be used to store the data should a current mains failure occur, eg. to let the alarm signal go on in case the max temperature admitted in the freezer compartment (-10°) be exceeded, also in case of a black-out.

The memory is also suitably used to store the user's instructions in case of a black-out, which is specifically important for a refrigerating device as described above, as in such an event the configuration of the intermediate compartment could be lost if not stored in a non-volatile memory.

Symbol IP indicates the power interface for actuators control. In fact, it is connected with:

- the flap closing actuator (CF)
- the flap opening actuator (AF)
- the flap heater (RF)
- the freezer heater (RR)
- the solenoid valve (EV, 4)
- the fan (EV, 12)
- the compressor (CO, 1).

Symbol PS indicates the power supply connected to the mains through a transformer/voltage reducer TR and an interference filter FI, feeding all card circuits.

Symbol FU indicates a fuse in series on the feed mains.

Symbol LF indicates an illumination lamp for the refrigerator compartment, which can be switched off by a manual switch I4 or by the switch I3 on the refrigerator compartment door.

Manual (mains) switch I4 is independent from the low voltage switch I1, which disables the refrigerator compartment. In fact, switch I1 disables the control logic of the bypass solenoid valve of the refrigerating circuit (EV, 4), so that the refrigerating fluid will skip the refrigerator evaporator 6 and go to the freezer evaporator 8 only.

This simple system allows switching off the refrigerator whenever the user wishes to do it, while only the freezer will be in operation.

Since the light switch I4 in the refrigerator compartment is independent from the one (I1) used to

switch off the refrigerator, it is possible either to switch off the light inside while the refrigerator is running or keep the light on, eg. for display purposes in a shop window, also while the refrigerator is disabled.

Switch I2 on the freezer compartment door enables the alarm in case of open door (element 27 of display, Fig. 4).

Symbol DS indicates the display/keyboard unit, as detailed in Fig. 4.

Besides the illustration shown in Fig. 3, the microprocessor (uP) is also connected with a program memory (ROM), of the read only type, not shown in the figure.

Said memory contains the operational instructions to the microprocessor; specifically, not only the microprocessor executes the functions described above in connection with the interfaces for control and handling as mentioned above, but it also provides for:

- intelligent defrost control, both in the freezer compartment (11) and in the refrigerator compartment (9), if not disabled, executing a defrost cycle each time the sum of the compressor operating times (1), for the compartment concerned, reaches a predetermined total time, eg. 10 hours; as for the freezer compartment, the time between two subsequent defrost cycles can be reduced if the compartment door is left open for quite a time; in the case of the refrigerator compartment, defrosting occurs anyway after a shorter time (eg. 6 hours) from the last defrost cycle, provided of course that the compartment has not been disabled in the meantime;
- activation of the alarm display (visual, element 26 of display) and sound alarm (buzzer, not shown) if, for any reason, the temperature in the freezer compartment exceeds the max value admitted (-10°), while this event is stored at the same time in the non-volatile memory (ME), so that also in case of a mains failure and its subsequent restoration, the alarm remains enabled till the user will acknowledge it by pressing the erasing key T4;
- handling a cooling timing (called "champagne function"), i.e. enabling, a timer for a max time of 95 minutes through the keys T6 and T7; if a different time from zero is input, the system will decrement it to zero; upon reaching this value the sound alarm will be enabled and the display start flashing till the user presses any key to inform the system that the elapsed time has been acknowledged;
- ensuring that both flap actuators (15 and 15a) cannot be enabled simultaneously, but only one at a time, to avoid damages caused by simultaneous actuation, as they have a contrasting action;

- activation of an automatic test program, comprising a fast enable sequence of all the loads and a real and true operation cycle lasting an adequate lapse of time to check correct operation, specifically of the second (11) and third (10) compartments; said fast sequence can be automatically enabled any time the refrigerating device is switched on, whereas the second part can obviously be enabled by qualified personnel only, either at the factory or for service purposes;

- execution of a test program in response to a proper simultaneous activation of control elements (eg. both pairs of keys T1, T2, T7, T8) to make field service easier, if required; during such a test program the display DS is used to release information on the tested operation, eg. digits 32 can be used to show the temperatures measured by the probes S1 ... S4.

In Fig. 4, representing specifically the display of the refrigerating device according to the invention, the upper part of the figure shows all the luminescent elements of the display, which is of fluorescent type; the elements are 29 totally.

The lower part of the figure shows eight control keys, indicated by symbols T1 to T8.

Number 21 indicates as a whole the three luminescent line elements that light alternatively one at a time by actuating the key T1 below.

Number 22 indicates an element consisting of three digits and a symbol representing the refrigerating device with the first compartment (refrigerator) lighted. Said element, and likewise the element 21, lights only if the refrigerator compartment is enabled (switch I1, Fig. 3).

By actuating key T1 the lines light up in the following sequence: line under nr. 6° , line under nr. 4° , line under nr. 2° , line under nr. 6° , and so on.

Number 23 indicates as a whole the three luminescent line elements that light up alternatively one at a time by actuating key T2 below.

The number 24 indicates a three digit elements and a symbol representing the refrigerating device with the second compartment lighted. Said element, and likewise elements 23, light up only if the third compartment is not configured as a freezer.

By actuating key T2 the following elements will light up in sequence: line under nr. 3° , line under nr. 0° , line under nr. -3° , line under nr. 3° , and so on.

Number 25 indicates an element consisting of a symbol that represents the refrigerating device with the intermediate compartment lighted and digits -18°; this element will light up only if the intermediate compartment is configured as a freezer by key T3 below.

Configuration of the intermediate compartment as a freezer or as an intermediate temperature compartment can be achieved very simply through key

T3. However, to prevent that said configuration may be changed either unwantedly, accidentally or by unauthorized people (eg. children), a protection is provided in the sense that when key T3 is pressed, the display element that was lit goes out and the other starts flashing. Key T3 must be kept pressed down for a predetermined number of flashes (eg. five) to attain acknowledgement of the configuration change otherwise the system goes back to its previous configuration.

Moreover, when switching from the freezer configuration to the intermediate temperature configuration, the defrost heater (RF) of flap (14) is first enabled while the relevant actuator will be enabled after a certain time has elapsed (eg. some ten minutes).

During the refrigerator configuration the heater RF is always ON.

Number 26 indicates an element representing a thermometer, which light up under temperature alarm conditions only, as mentioned above.

Simultaneously a buzzer (not shown) is enabled. The alarm goes out by pressing key T4 below.

Number 27 indicates an element that is intended to represent the freezer door. Said element lights up only when the freezer door has been left open. About 30 seconds later also the buzzer as mentioned above will be enabled. However, should one wish to keep the door open for a certain time, eg. to introduce lots of food inside, it is possible to exclude the buzzer. Since activation of the buzzer (which is anyway an intermittent function) due to an open door condition occurs less frequently than for a temperature alarm condition, the later alarm will produce a more intensive signal to draw the user's attention more than in the instance of an open door condition.

Number 28 indicates an element representing the refrigerating device with the freezer compartment lighted. Said element remains always lighted.

Number 29 indicates an element consisting of the writing SUPER. Said element will only light when the fast freezing condition is selected by the user by pressing the key T5 below.

Number 30 indicates an element consisting of the writing NORMAL. Said element will only light when the normal freezing condition is selected by the user by pressing the key T5 below.

Number 31 indicates an element consisting of the word "min". Said element remains always lighted.

Finally, number 32 indicates an element consisting of two digits (by seven segments), representing the "champagne" function time as explained above, inputted by keys T6 and T7 being used to increase or decrease such time respectively.

Key T8 sets the luminescence of the display elements according to three different levels: minimum to medium, medium to maximum and maximum to minimum.

In Fig. 5, showing schematically a significant por-

tion (namely the one relating to the configuration change of intermediate compartment 10) of the flowchart for the control unit of the refrigerating device according to the invention, number 39 indicates the start block of said flowchart. Said start, eg. in the specific instance, is the one that occurs when operating the refrigerating device for the first time; in fact, the system is set at the factory to start from said point, i.e. with the intermediate compartment configured as a freezer.

Block 39 transmits the control to the subsequent block 40, which is a test block to verify that key T2 has been pressed. In the affirmative case (output SI), the control goes over to the subsequent block 41; in the negative (output NO) the control returns to block 40.

Block 41 is also a test block to verify that key T2 has been kept pressed at least 5 seconds. In the affirmative case (output SI), the control goes over to the subsequent block 42; in the negative (output NO), the control returns to block 40.

Block 42 handles the switch-over operation from a freezer configuration to a refrigerator configuration, providing for the following sequence of operations:

- flap defrost heater RF is enabled
- 60 minutes' delay
- flap closes
- control goes over to the subsequent block 43.

Block 43 ensures thermostatic control of the intermediate compartment, i.e. it keeps the temperature value input by the opening/closing operations of flap 14.

Operation of block 43 will be explained more in detail later dealing with blocks 47 to 52.

Block 43 transmits the control to block 44, which is a test block to verify that key T3 has been pressed. In the affirmative case (output SI), the control goes to the subsequent block 45; in the negative (output NO), the control returns to block 43.

Block 45 is also a test block to verify that key T3 has been pressed at least for 5 seconds. In the affirmative case (output SI), the control goes over to the subsequent block 46; in the negative (output NO), the control returns to block 43.

Block 46 handles the switch-over operation from a refrigerator configuration to a freezer configuration, providing for the following sequence of operations:

- flap defrost heater RF is disabled
- flap opens
- control is returned to block 40.

Block 47 is a test block to verify that the temperature detected by the probe S3 in the intermediate compartment is lower than the one input by key 2. In the affirmative case (output SI), the control goes over to the subsequent block 48; in the negative (output NO), the control returns to block 47.

Block 48 is also a test block to verify that flap 14 opening actuator has been disenergized at least for 60 seconds. In the affirmative case (output SI), the

control goes over to the subsequent block 49; in the negative (output NO), the control returns to block 48.

Block 49 enables the flap 14 closing actuator and maintains it energized for a predetermined time to ensure it is actually closed.

Block 49 will then transmit the control to the subsequent block 50, which is a test block to verify that the temperature detected by probe S3 in the intermediate compartment is higher than the value input by key 2. In the affirmative case (output SI), the control goes over to the subsequent block 51; in the negative (output NO), the control returns to block 50.

Block 51 is also a test block to verify that the flap 14 closing actuator has been disenergized at least for 60 seconds. In the affirmative case (output SI), the control goes over to the subsequent block 52; in the negative (output NO), the control returns to block 51.

Block 52 enables the flap 14 opening actuator and maintains it energized for a predetermined time to ensure it is actually open.

Then block 52 return the control to block 47.

In Fig. 6, representing schematically a further significant portion of the control system flowchart of the refrigerating device according to the invention, the left side indicates the defrost control of the freezer compartment 11, whereas the right side refers to the time-controlled cooling function.

Block 59 represents the function start block and the control from block 59 is transmitted to the subsequent block 60.

Block 60 is a test block to verify that the compressor is enabled. In the affirmative case (output SI), the control goes over to the subsequent block 61; in the negative (output NO), the control returns to block 60.

Block 61 is also a test block to verify if the freezer door is open.

In the affirmative case (output SI), the control goes over to block 63; in the negative (output NO), the control goes over to block 62.

Block 62 increases by one unit the time storage counter of active compressor ($CONT=CONT+1$). Block 63 increases by two units the time storage counter of active compressor ($CONT=CONT+2$).

Both the block 62 and block 63 transmit the control to the subsequent block 64, which is a test block to verify that the counter above (CONT) shows a time over 10 hours. In the affirmative case (output SI), the control goes over to the subsequent block 65; in the negative (output NO), the control returns to block 60.

Block 65 is a test block to verify that the compressor has been active at least for three hours. In the affirmative case (output SI), the control goes over to block 67; in the negative (output NO), the control goes over to block 66.

Block 66 is also a test block to verify that the compressor is out. In the affirmative case (output SI), the control goes over to block 68; in the negative (output NO), the control returns to block 65.

Block 67 provides for the forced cutout of the compressor, then it transmit the control to the subsequent block 68. Block 68 provides for the defrosting of the freezer compartment 11, then the control is transmitted to the subsequent block 69.

Block 69 resets the counter ($CONT=0$), then the control is returned to block 60.

Let us now consider the handling of the time-controlled cooling function.

Block 70 represents the function start block; block 70 transmits the control to the subsequent block 71.

Block 71 is a test block to verify that the time (T) input by keys T6-T7 is equal or 5 minutes higher. In the affirmative case (output SI), the control goes over to the subsequent block 72; in the negative (output NO), the control returns to block 71.

Block 72 decrease the time by one second ($T=T-1$), then the control goes over to subsequent block 73.

Block 73 is a test block to verify that the time is equal to zero ($T=0?$). In the affirmative case (output SI), the control goes over to the subsequent block 74; in the negative (output NO), the control returns to block 72.

Block 74 is also a test block to verify that the time has been manually reset. In the affirmative case (output SI), the control returns to block 71; in the negative (output NO), the control goes over to the subsequent block 75.

Block 75 enables the visual display (flashing of digits 32) and sound alarm (buzzer) signalling the exceeded time, then the control goes over to the subsequent block 76.

Block 76 is a test block to verify that any key whatever has been pressed. In the affirmative case (output SI), the control returns to block 71; in the negative (output NO) the control returns to block 75.

The advantages of the refrigerating device according to the present invention are clear.

Specifically, they are represented by the following features:

- Availability of a third compartment for food preservation, which can be configured at will either as an extra freezer or an extra refrigerator compartment (by setting it on $+3^{\circ}$), or still as a compartment for temporary preservation of perishable food, eg. fresh meat (by setting it on -3°);
- Easy and comfortable control through its clear display and relevant keyboard;
- Low-cost thanks to its simple air regulating system (only one flap and two linear actuators);
- Operating safety through the incorporated protecting devices;
- Easy testing and service procedures through the programs contained in the ROM memory associated with the microprocessor.

The use of only one actuator of the push-pull type instead of the two actuators (15, 15a) is possible, whose loose element will be suitably hooked onto flap 14.

Said sole actuator can always operate according to the ON-OFF system or according to a proportional system.

Claims

1. Refrigerating device comprising three compartments (9, 10, 11), among which a first compartment (9) used for the storage of fresh food and a second compartment (11) used for the freezing and storage of food, a refrigerating circuit comprising a compressor (1), a condenser (3), first and second evaporators (6,8), arranged in said first and said second compartments (9,11) respectively, coupled to the refrigerating circuit through an electrovalve (4), and control means allowing the user to set the third compartment (10) either for the storage of fresh food or for its freezing, characterized in that it further comprises a fan (12) and slots for air circulation in the second and third compartments (10,11) and in that said control means comprise a central electronic unit including in particular a microprocessor (μP) which, in response to the activation by the user of a specific control element (T2, T3), can control said compressor (1), the electrovalve (4) and further electromechanical actuating means (14, 15, 15a) which comprise at least one actuator (15, 15a) enabled to move a flap (14) to close or open the relevant slots for air circulation adjustment inside the third compartment (10).
2. Refrigerating device according to claim 1, characterized in that electronic protection means (μP , 41, 45) are provided to prevent an accidental change of the use of the said third compartment (10).
3. Refrigerating device according to claim 1, characterized in that said specific control element comprises a key (T2, T3), in particular being part of a keyboard/display unit (Fig. 4) of easy access for the user.
4. Refrigerating device according to claim 1, characterized in that said central electronic unit is associated with the specific control element (T2) to achieve temperature selection among various different values in said third compartment (10).
5. Refrigerating device according to claim 1, characterized in that means (S3, μP , 43) are provided to maintain the temperature substantially at a

predetermined value in said third compartment (10).

6. Refrigerating device according to claims 4 and 5, characterized in that means (T2, S3, μP , 43) are provided to set and maintain said temperature at a preferred value selected within a predetermined range of values (+3°, -3°).
7. Refrigerating device according to claim 1, characterized in that said at least one actuator (15, 15a), which is of the linear type, is enabled to move said flap (14) for air circulation adjustment through an ON-OFF system or a proportional system.
8. Refrigerating device according to claim 7, characterized in that said further electromechanical actuating means (14, 15, 15a) comprise two linear actuators (15, 15a) which are enabled alternatively to move said flap (14) for air circulation adjustment.
9. Refrigerating device according to claim 8, characterized in that electronic protection means (μP , 48, 51) are provided to avoid that both actuators (15, 15a) may be simultaneously enabled.
10. Refrigerating device according to claim 1, characterized in that heating means (RF) are provided to defrost said flap (14) and that said heating means (RF) are always energized for a time interval before said at least one actuator (15, 15a) is enabled.
11. Refrigerating device according to claim 1, characterized in that said at least one actuator (15, 15a) is of the push-pull type.
12. Refrigerating device according to claim 1, characterized in that display means (DS) associated with control elements (T1 ... T8) are provided to make user's control of the refrigerating device easier.
13. Refrigerating device according to claim 12, characterized in that the luminescence of said display (DS) can be adjusted by means of one of said control elements (T8).
14. Refrigerating device according to claim 12, characterized in that said control elements comprise a number of keys (T1 ... T8).
15. Refrigerating device according to claim 1, characterized in that display means (DS) of fluorescent type are provided, which comprise a number of either numerical and/or graphical luminescent

elements (21 ... 32), to be enabled either individually or in common.

16. Refrigerating device according to claim 1, characterized in that said central electronic unit comprises defrost handling means (60 ... 69) both for said first compartment (9) and said second compartment (11), in such a way that a defrost cycle is executed each time the sum of the compressor (1) active times relating to the compartment concerned reaches a predetermined total value. 5 10
17. Refrigerating device according to claim 16, characterized in that said central electronic unit comprises some means for the handling of defrost cycles for said first compartment (9) in such a way that a defrost cycle of said first compartment (9) is anyway executed after a predetermined time has elapsed since the last defrost cycle, and provided that operation of said compartment (9) is not disabled in the meantime. 15 20
18. Refrigerating device according to claim 16, characterized in that said central electronic unit comprises some means (60 ... 69) to handle the defrost cycles of said second compartment (11) in such a way that the time elapsing between two subsequent defrost cycles is reduced if the compartment (11) door has been left open for some time. 25 30
19. Refrigerating device according to claim 1, characterized in that said central electronic unit is associated with non-volatile memory means (ME) into which operative data are stored, specifically referring to the selected modes, such as the configuration of the third compartment (10), in order that should there be a mains failure, such data are stored to allow resuming regular operation when the mains supply is restored. 35 40
20. Refrigerating device according to claim 19, characterized in that said central electronic unit associated with non-volatile memory means (ME) enables an alarm signal (26) when the temperature in said second compartment (11) exceeds a predetermined value, and that, even if the temperature in said second compartment (11) decreases again below said predetermined value, said alarm signal (26) remains enabled though in the meantime the mains supply has failed and has been restored again. 45 50
21. Refrigerating device according to claim 1, characterized in that it comprises some pre-settable timing means (32), which can be enabled by means of control elements (T6, T7) and capable of signalling that the preset time interval has 55

elapsed.

22. Refrigerating device according to claim 1, characterized in that said central electronic unit comprise some means to execute an automatic test program, comprising a fast enable sequence of all loads and/or a real and true operation cycle of suitable length to check the correct operation specifically of the second and third compartments (10, 11). 10
23. Refrigerating device according to claim 12, characterized in that said central electronic unit comprises some means for executing a test program in response to a suitable simultaneous activation of some (T1, T2, T7, T8) of the control elements (T1, T2, ..., T8). 15
24. Refrigerating device according to claim 23, characterized in that during said test program said display (DS) is used for signalling information data relating to the tested operation; specifically, to indicate the temperatures measured by relevant probes (S1 .. S4). 20
25. Refrigerating device according to claim 1, characterized in that said electrovalve (4) provides for the exclusion, after enabling a control (I1), of said first compartment (9) from the refrigerating circuit. 25
26. Refrigerating device according to claim 25, characterized in that said electrovalve (4) is represented by an electric low-voltage switch (I1). 30
27. Refrigerating device according to claim 1, characterized in that some visual (27) and sound alarm means are provided to inform that the door of the second compartment remains open for a time exceeding a predetermined period. 35
28. Refrigerating device according to claim 27, characterized in that said sound alarm means can be switched off. 40
29. Refrigerating device according to claims 20 and 27, characterized in that said alarm signal (26) produces a more intensive signal than the one of said visual (27) and sound alarm. 45
30. Refrigerating device according to claim 25, characterized in that some illumination means (LF) are provided in said first compartment (9) and that manual disable means (I4) for said illumination means (LF) are foreseen independently from said control (I1). 50

Patentansprüche

1. Kühleinrichtung, bestehend aus drei Fachern (9, 10, 11), von denen das erste Fach (9) zur Aufbewahrung von frischen Lebensmitteln und das zweite Fach (11) zum Einfrieren und zur Aufbewahrung von Lebensmitteln verwendet wird, einem Kühlkreislauf, bestehend aus einem Kompressor (1), einem Kühlapparat (3), ersten und zweiten Verdampfern (6, 8), die im ersten bzw. zweiten Fach (9, 11) angeordnet sind und die über ein Elektroventil (4) an den Kühlkreislauf gekoppelt sind, und Bedienelementen, die es dem Benutzer gestatten, das dritte Fach (10) entweder für die Aufbewahrung von frischen Lebensmitteln oder für deren Einfrierung zu nutzen, **dadurch gekennzeichnet**, daß sie weiterhin ein Gebläse (12) und Schlitze für die Luftzirkulation in dem zweiten und dritten Fach (10, 11) aufweist, und daß die Bedienelemente eine zentrale elektronische Einheit aufweisen, die insbesondere einen Mikroprozessor (μ P) einschließt, der in Antwort auf die Betätigung des Benutzers eines speziellen Bedienelementes (T2, T3) den Kompressor (1), das Elektroventil (4) und weitere elektromechanische Aktuatoreinrichtungen (14, 15, 15a) bedienen kann, die mindestens einen Aktuator (15, 15a) aufweisen, der eine Klappe (14) zum Schließen oder Öffnen der betreffenden Schlitze für die Regelung der Luftzirkulation innerhalb des dritten Faches (10) bewegen kann.
2. Kühleinrichtung nach Anspruch 1, **dadurch gekennzeichnet**, daß elektronische Schutzvorrichtungen (μ P, 41, 45) vorgesehen sind, um eine zufällige Änderung der Benutzung des dritten Faches (10) zu vermeiden.
3. Kühleinrichtung nach Anspruch 1, **dadurch gekennzeichnet**, daß das spezielle Bedienelement eine Taste (T2, T3) aufweist, die insbesondere Teil einer Tastatur/Displayeinheit (Fig. 4) und für den Benutzer leicht zugänglich ist.
4. Kühleinrichtung nach Anspruch 1, **dadurch gekennzeichnet**, daß die zentrale elektronische Einheit mit dem speziellen Bedienelement (T2) verbunden ist, um die Wahl einer Temperatur unter verschiedenen Werten in dem dritten Fach (10) zu ermöglichen.
5. Kühleinrichtung nach Anspruch 1, **dadurch gekennzeichnet**, daß Mittel (S3, μ P, 43) vorgesehen sind, um die Temperatur im wesentlichen auf einem vorbestimmten Wert in dem dritten Fach (10) zu halten.
6. Kühleinrichtung nach den Ansprüchen 4 und 5, **dadurch gekennzeichnet**, daß Mittel (T2, S3, μ P, 43) vorgesehen sind, um die Temperatur auf einen bevorzugten, aus einem vorbestimmten Wertebereich (+3°, -3°) ausgewählten Wert einzustellen und auf diesem zu halten.
7. Kühleinrichtung nach Anspruch 1, **dadurch gekennzeichnet**, daß mindestens ein Aktuator (15, 15a), der vom linearen Typ ist, in die Lage versetzt ist, die Klappe (14) zur Regelung der Luftzirkulation durch ein EIN-AUS-System oder ein proportionales System zu bewegen.
8. Kühleinrichtung nach Anspruch 7, **dadurch gekennzeichnet**, daß die weiteren elektromechanischen Aktuatoreinrichtungen (14, 15, 15a) zwei lineare Aktuatoren (15, 15a) aufweisen, die wahlweise in die Lage versetzt werden, die Klappe (14) zur Regelung der Luftzirkulation zu bewegen.
9. Kühleinrichtung nach Anspruch 8, **dadurch gekennzeichnet**, daß elektronische Schutzvorrichtungen (μ P, 48, 51) vorgesehen sind, um eine gleichzeitige Steuerung beider Aktuatoren (15, 15a) zu verhindern.
10. Kühleinrichtung nach Anspruch 1, **dadurch gekennzeichnet**, daß Heizvorrichtungen (RF) vorgesehen sind, um die Klappe (14) abzutauen, und daß die Heizvorrichtungen (RF) stets über einen Zeitintervall betrieben werden, bevor mindestens ein Aktuator freigegeben ist.
11. Kühleinrichtung nach Anspruch 1, **dadurch gekennzeichnet**, daß zumindest ein Aktuator (15, 15a) ein abwechselnd in entgegengesetzter Richtung arbeitender Typ ist.
12. Kühleinrichtung nach Anspruch 1, **dadurch gekennzeichnet**, daß Anzeigevorrichtungen (DS) verbunden mit Bedienelementen (T1 ... T8) vorgesehen sind, um dem Benutzer die Bedienung der Kühleinrichtung zu erleichtern.
13. Kühleinrichtung nach Anspruch 12, **dadurch gekennzeichnet**, daß die Lumineszenz der Anzeige (DS) mittels eines der Bedienelemente (T8) geregelt werden kann.
14. Kältevorrichtung nach Anspruch 12, **dadurch gekennzeichnet**, daß die Bedienelemente eine Anzahl von Tasten (T1 ... T8) aufweisen.
15. Kühleinrichtung nach Anspruch 1, **dadurch gekennzeichnet**, daß die Anzeigevorrichtungen (DS) des fluoreszierenden Typs vorgesehen sind, die eine Anzahl entweder numerischer und/oder grafi-

scher Leuchtelemente (21 ... 32) aufweisen, die individuell oder gemeinsam ansteuerbar sind.

16. Kühleinrichtung nach Anspruch 1, **dadurch gekennzeichnet**, daß die zentrale elektronische Einheit Abtau-Betriebsabwicklungssteuerungen (60 ... 69) sowohl für das erste Fach (9) als auch für das zweite Fach (11) aufweist, in der Weise, daß ein Abtauzyklus jedesmal erfolgt, wenn die Summe der Aktivzeiten des Kompressors (1) in Verbindung mit dem betreffenden Fach einen vorbestimmten Gesamtwert erreicht. 5
17. Kühleinrichtung nach Anspruch 16, **dadurch gekennzeichnet**, daß die zentrale elektronische Einheit einige Mittel zur Betriebsabwicklung der Abtauzyklen für das erste Fach (9) aufweist, in der Weise, daß der Abtauzyklus des ersten Faches (9) in jedem Fall durchgeführt wird, nachdem nach dem letzten Abtauzyklus eine vorbestimmte Zeit vergangen ist und vorausgesetzt, daß der Betrieb des Faches (9) in der Zwischenzeit nicht eingestellt ist. 10 15
18. Kühleinrichtung nach Anspruch 16, **dadurch gekennzeichnet**, daß die zentrale elektronische Vorrichtung einige Mittel (60 ... 69) zum Betreiben der Abtauzyklen des zweiten Faches (11) aufweist, in der Weise, daß die Zeit zwischen zwei nachfolgenden Abtauzyklen reduziert wird, wenn die Tür des Faches (11) einige Zeit offen- 20 gelassen worden ist. 25
19. Kühleinrichtung nach Anspruch 1, **dadurch gekennzeichnet**, daß die zentrale elektronische Einheit mit nichtflüchtigen Speichermitteln (ME) verbunden ist, in denen die Betriebsdaten gespeichert sind, die sich speziell auf die gewählten Modi beziehen, wie die der Konfiguration des dritten Faches (10), um, falls ein Stromausfall sein sollte, diese Daten zu speichern, um den regulären Betrieb wieder aufnehmen zu können, sobald die Stromzufuhr wieder erfolgt. 30 35
20. Kühleinrichtung nach Anspruch 19, **dadurch gekennzeichnet**, daß die zentrale elektronische Einheit, die mit nichtflüchtigen Speichermitteln (ME) verbunden ist, ein Alarmsignal (26) abgibt, wenn die Temperatur in dem zweiten Fach (11) einen vorbestimmten Wert übersteigt, und daß, auch wenn die Temperatur in dem zweiten Fach (11) wieder unter den vorbestimmten Wert fällt, das Alarmsignal wirksam bleibt, obwohl in der Zwischenzeit die Stromzufuhr unterbrochen und wieder hergestellt worden ist. 40 45 50 55
21. Kühleinrichtung nach Anspruch 1, **dadurch gekennzeichnet**, daß sie einige voreinstellbare

Zeitgebereinrichtungen (32) aufweist, die mittels Bedienelementen (T6, T7) steuerbar und fähig sind, zu signalisieren, daß der voreingestellte Zeitintervall verstrichen ist.

22. Kühleinrichtung nach Anspruch 1, **dadurch gekennzeichnet**, daß die zentrale elektronische Einheit einige Mittel zur Durchführung eines automatischen Testprogramms aufweist, das eine rasche mögliche Folge aller Betriebszustände und/oder einen realen und wahren Betriebsablaufzyklus von geeigneter Länge durchläuft, um den korrekten Betrieb speziell des zweiten und dritten Faches (10,11) zu überprüfen. 5
23. Kühleinrichtung nach Anspruch 12, **dadurch gekennzeichnet**, daß die zentrale elektronische Einheit einige Mittel zur Durchführung eines Testprogramms als Antwort auf eine geeignete gleichzeitige Betätigung einiger (T1, T2, T7, T8) der Bedienelemente (T1, T2, ..., T8) aufweist. 10
24. Kühleinrichtung nach Anspruch 23, **dadurch gekennzeichnet**, daß während des Testprogramms die Anzeigevorrichtung (DS) zur Anzeige der Informationsdaten, die die überprüfte Funktion betreffen, verwendet wird; insbesondere um die von den relevanten Fühlern (S1 .. S4) gemessenen Temperaturen anzugeben. 15
25. Kühleinrichtung nach Anspruch 1, **dadurch gekennzeichnet**, daß das Elektroventil (4) die Abschaltung des Faches (9) von dem Kühlkreislauf nach Inbetriebsetzung eines Antriebes (I1) bewirkt. 20
26. Kühleinrichtung nach Anspruch 25, **dadurch gekennzeichnet**, daß das Elektroventil (4) durch einen elektrischen Niedervolt-Schalter dargestellt ist. 25
27. Kühleinrichtung nach Anspruch 1, **dadurch gekennzeichnet**, daß einige visuelle (27) und akustische Alarmeinrichtungen vorgesehen sind zur Mitteilung, daß die Tür des zweiten Faches während einer Zeitspanne offen ist, die eine vorbestimmte Periode übersteigt. 30
28. Kühleinrichtung nach Anspruch 27, **dadurch gekennzeichnet**, daß der akustische Alarm abgeschaltet werden kann. 35
29. Kühleinrichtung nach den Ansprüchen 20 und 27, **dadurch gekennzeichnet**, daß das Alarmsignal (26) ein intensiveres Signal als das visuelle und akustische Alarmsignal ist. 40
30. Kühleinrichtung nach Anspruch 25, **dadurch ge-** 45

kennzeichnet, daß einige Beleuchtungsrichtungen (LF) im ersten Fach (9) vorgesehen sind, und daß manuelle Schaltmittel (I4) für die Beleuchtungsrichtungen (LF) unabhängig von dem Antrieb (I1) vorgesehen sind.

Revendications

1. Appareil frigorifique comprenant trois compartiments (9, 10, 11), parmi lesquels un premier compartiment (9) est utilisé pour le stockage de produits alimentaires frais, et un second compartiment (11) est utilisé pour la congélation et le stockage de produits alimentaires, un circuit frigorifique comprenant un compresseur (1), un condenseur (3), un premier et un second évaporateur (6, 8), agencés respectivement dans ledit premier et dans ledit second compartiment (9, 11), accouplés au circuit frigorifique au moyen d'une électrovalve (4), et des moyens de commande qui permettent à l'utilisateur de régler le troisième compartiment (10) soit pour le stockage de produits alimentaires frais soit pour leur congélation, caractérisé en ce qu'il comprend en outre un ventilateur (12) et des fentes pour la circulation d'air dans le second et dans le troisième compartiment (10, 11), et en ce que lesdits moyens de commande comprennent une unité électronique centrale qui comprend en particulier un microprocesseur (μP) qui peut commander, en réponse à l'activation d'un élément de commande spécifique (T2, T3) par l'utilisateur, ledit compresseur (1), l'électrovalve (4) et d'autres organes d'actionnement électromécaniques (14, 15, 15a) qui comprennent au moins un actionneur (15, 15a) mis en route afin de déplacer un volet (14) afin de fermer ou d'ouvrir les fentes en question pour régler la circulation d'air à l'intérieur du troisième compartiment (10).
2. Appareil frigorifique selon la revendication 1, caractérisé en ce que des moyens de protection électroniques (μP , 41, 45) sont prévus afin d'empêcher un changement accidentel de l'utilisation dudit troisième compartiment (10).
3. Appareil frigorifique selon la revendication 1, caractérisé en ce que ledit élément de commande spécifique comprend une touche (T2, T3), formant en particulier partie d'une unité de clavier/affichage (fig. 4) aisément accessible à l'utilisateur.
4. Appareil frigorifique selon la revendication 1, caractérisé en ce que ladite unité électronique centrale est associée à l'élément de commande spécifique (T2) afin d'assurer un choix de tempéra-

ture parmi différentes valeurs dans ledit troisième compartiment (10).

5. Appareil frigorifique selon la revendication 1, caractérisé en ce que des moyens (S3, μP , 43) sont prévus pour maintenir la température sensiblement à une valeur prédéterminée dans ledit troisième compartiment (10).
6. Appareil frigorifique selon les revendications 4 et 5, caractérisé en ce que des moyens (T2, S3, μP , 43) sont prévus pour fixer et pour maintenir ladite température à une valeur préférée choisie parmi une gamme prédéterminée de valeurs (+3°, -3°).
7. Appareil frigorifique selon la revendication 1, caractérisé en ce que ledit au moins un actionneur (15, 15a), qui est du type linéaire, est mis en route afin de déplacer ledit volet (14) pour régler la circulation d'air au moyen d'un système en TOUT-OU-RIEN ou un système proportionnel.
8. Appareil frigorifique selon la revendication 7, caractérisé en ce que lesdits autres moyens d'actionnement électromécaniques (14, 15, 15a) comprennent deux actionneurs linéaires (15, 15a) qui sont mis en route alternativement pour déplacer ledit volet (14) afin de régler la circulation d'air.
9. Appareil frigorifique selon la revendication 8, caractérisé en ce que des moyens de protection électroniques (μP , 48, 51) sont prévus afin d'éviter que les deux actionneurs (15, 15a) puissent être simultanément mis en route.
10. Appareil frigorifique selon la revendication 1, caractérisé en ce que les moyens de chauffage (RF) sont prévus pour dégivrer ledit volet (14), et en ce que lesdits moyens de chauffage (RF) sont toujours excités pendant une période de temps avant que ledit au moins un actionneur (15, 15a) soit mis en route.
11. Appareil frigorifique selon la revendication 1, caractérisé en ce que ledit au moins un actionneur (15, 15a) est du type tiré-poussé (push-pull).
12. Appareil frigorifique selon la revendication 1, caractérisé en ce que des moyens d'affichage (DS) associés à des éléments de commande (T1...T8) sont prévus pour faciliter la commande de l'appareil frigorifique par l'utilisateur.
13. Appareil frigorifique selon la revendication 12, caractérisé en ce que la luminescence dudit affichage (DS) peut être réglée au moyen de l'un desdits éléments de commande (T8).

14. Appareil frigorifique selon la revendication 12, caractérisé en ce que lesdits éléments de commande comprennent un certain nombre de touches (T1...T8).
15. Appareil frigorifique selon la revendication 1, caractérisé en ce que des moyens d'affichage (DS) du type fluorescent sont prévus, qui comprennent un certain nombre d'éléments lumineux (21...32) soit du type numérique soit du type graphique, qui peuvent être actionnés soit individuellement soit en commun.
16. Appareil frigorifique selon la revendication 1, caractérisé en ce que ladite unité électronique centrale comprend des moyens de traitement de dégivrage (60...69) à la fois pour ledit premier compartiment (9) et pour ledit second compartiment (11), d'une manière telle qu'un cycle de dégivrage est exécuté chaque fois que la somme des temps de fonctionnement du compresseur (1), en relation avec le compartiment concerné, atteint une valeur totale prédéterminée.
17. Appareil frigorifique selon la revendication 16, caractérisé en ce que ladite unité électronique centrale comprend des moyens pour le traitement des cycles de dégivrage pour ledit premier compartiment (9), de manière telle qu'un cycle de dégivrage dudit premier compartiment (9) est exécuté de toute façon après écoulement d'un temps prédéterminé depuis le dernier cycle de dégivrage, et à condition que le fonctionnement dudit compartiment (9) ne soit pas arrêté entre temps.
18. Appareil frigorifique selon la revendication 16, caractérisé en ce que ladite unité électronique centrale comprend des moyens (60...69) pour traiter les cycles de dégivrage dudit second compartiment (11) d'une manière telle que le temps écoulé entre deux cycles de dégivrage successifs est réduit si la porte du compartiment (11) a été laissée ouverte pendant un certain temps.
19. Appareil frigorifique selon la revendication 1, caractérisé en ce que ladite unité électronique centrale est associée à une mémoire non volatile (ME) dans laquelle sont stockées des données de fonctionnement, qui se rapportent spécifiquement aux modes choisis, comme par exemple la configuration du troisième compartiment (10), afin de mémoriser ces données dans le cas où se produit une panne du secteur, pour permettre la reprise du fonctionnement régulier lorsque l'alimentation secteur est rétablie.
20. Appareil frigorifique selon la revendication 19, caractérisé en ce que ladite unité électronique centrale associée à une mémoire non volatile (ME) met en route un signal d'alarme (26) lorsque la température dans ledit second compartiment (11) dépasse une valeur prédéterminée, et en ce que même si la température dans ledit second compartiment (11) diminue à nouveau au-dessous de ladite valeur prédéterminée, ledit signal d'alarme (26) reste en route, même si l'alimentation secteur a été coupée et a été à nouveau rétablie entre temps.
21. Appareil frigorifique selon la revendication 1, caractérisé en ce qu'il comprend des moyens de temporisation pré réglables (32) qui peuvent être mis en route au moyen d'éléments de commande (T6, T7) et capables de signaler que l'intervalle de temps préétabli s'est écoulé.
22. Appareil frigorifique selon la revendication 1, caractérisé en ce que ladite unité électronique centrale comprend des moyens pour exécuter un programme de test automatique, qui comprend une séquence de mise en route rapide de toutes les charges et/ou un cycle de fonctionnement réel d'une durée convenable pour vérifier le fonctionnement correct, spécifiquement du second et du troisième compartiment (10, 11).
23. Appareil frigorifique selon la revendication 12, caractérisé en ce que ladite unité électronique centrale comprend des moyens pour exécuter un programme de test en réponse à un actionnement simultané convenable de certains des éléments de commande (T1, T2...T8).
24. Appareil frigorifique selon la revendication 23, caractérisé en ce que pendant ledit programme de test ledit affichage (DS) est utilisé pour signaler des données se rapportant à l'opération en cours de test, spécifiquement afin d'indiquer les températures mesurées par des sondes associées (S1...S4).
25. Appareil frigorifique selon la revendication 1, caractérisé en ce que ladite électrovalve (4) assure l'exclusion, après actionnement d'une commande (I1), dudit premier compartiment (9) par rapport au circuit frigorifique.
26. Appareil frigorifique selon la revendication 25, caractérisé en ce que ladite électrovalve (4) est représentée par un commutateur électrique à basse tension (I1).
27. Appareil frigorifique selon la revendication 1, caractérisé en ce que des éléments d'alarme visuel-

le (27) et sonore sont prévus afin d'informer que la porte du second compartiment reste ouverte pendant un temps qui dépasse une période prédéterminée.

5

- 28.** Appareil frigorifique selon la revendication 27, caractérisé en ce que ladite alarme sonore peut être coupée.

- 29.** Appareil frigorifique selon les revendications 20 et 27, caractérisé en ce que ledit signal d'alarme (26) produit un signal plus intense que celui de ladite alarme visuelle (27) et sonore.

10

- 30.** Appareil frigorifique selon la revendication 25, caractérisé en ce que des moyens d'éclairage (LF) sont prévus dans ledit premier compartiment (9), et en ce que des éléments de coupure manuels (14) sont prévus pour lesdits moyens d'éclairage (LF), indépendamment de ladite commande (11).

15

20

25

30

35

40

45

50

55

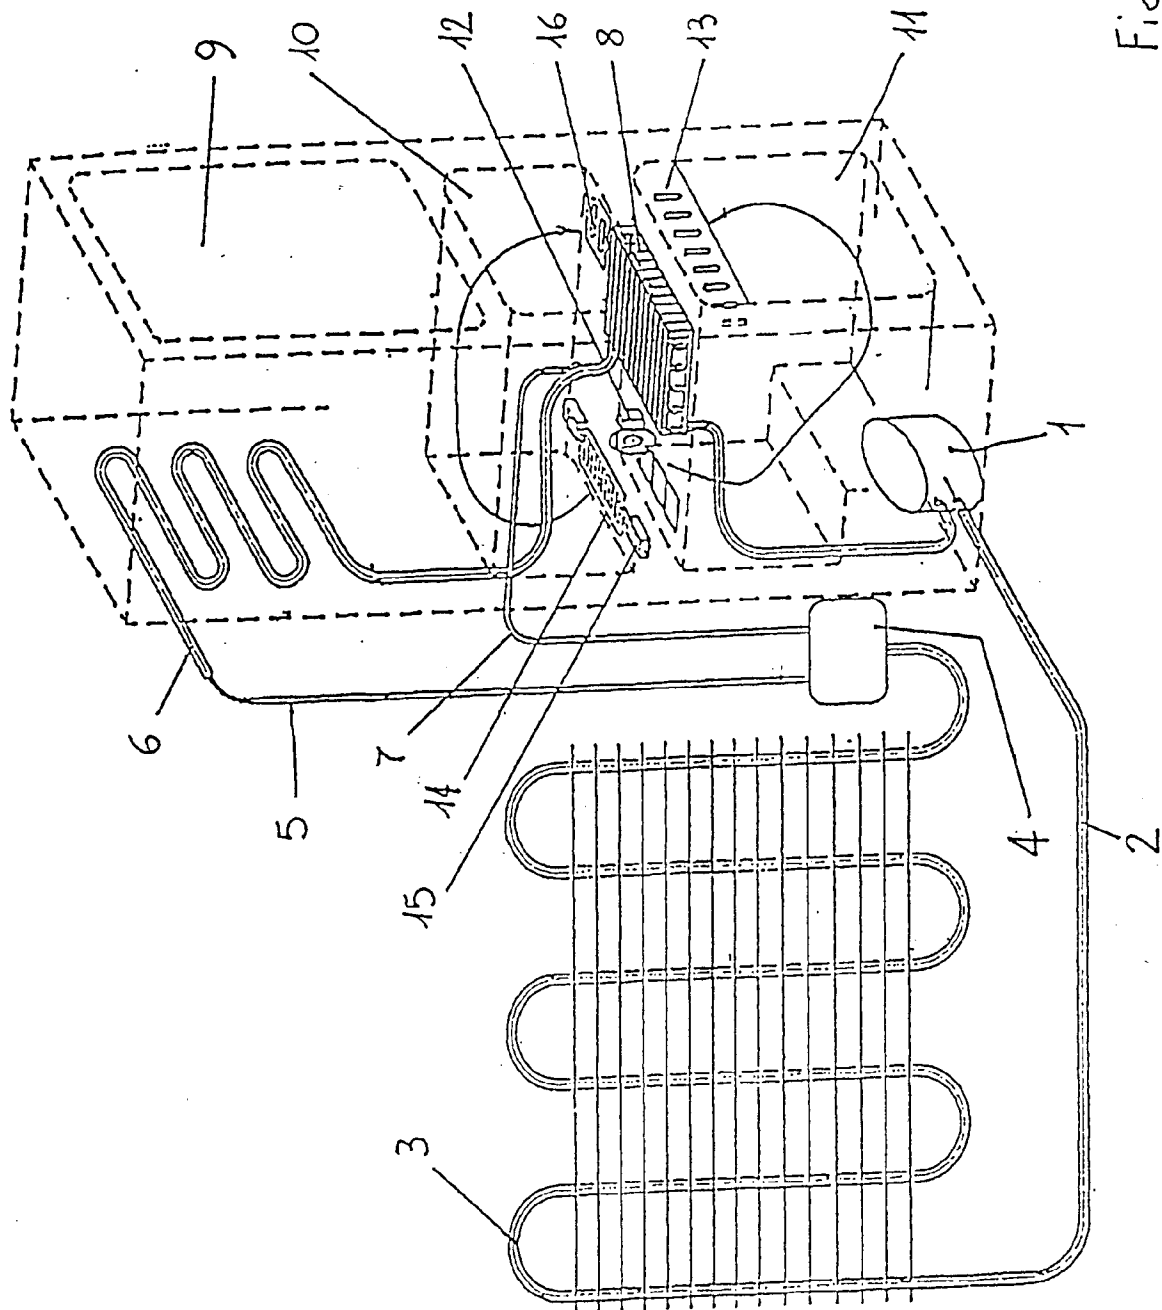


Fig. 1

Fig. 2

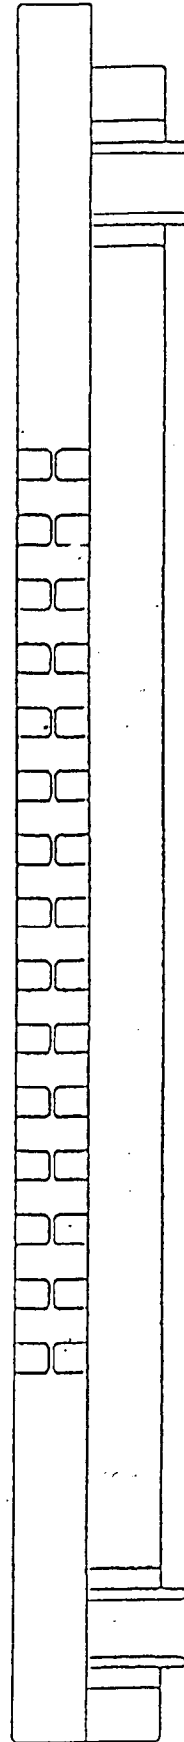
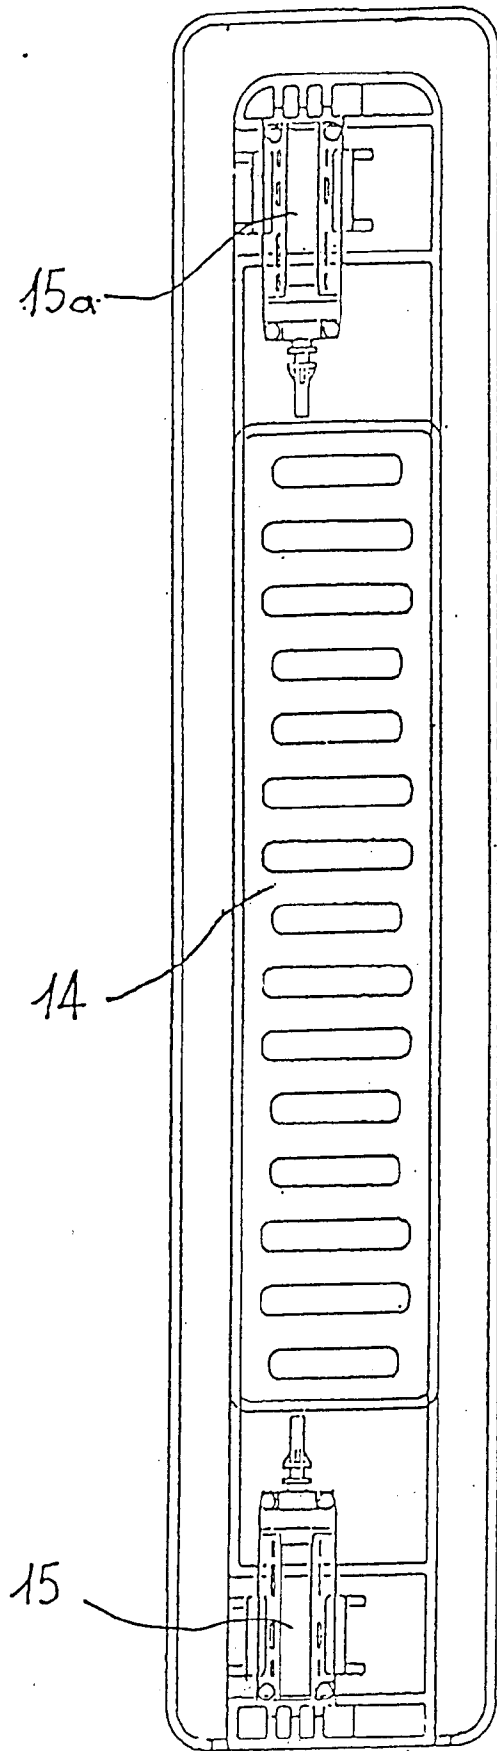


Fig. 3

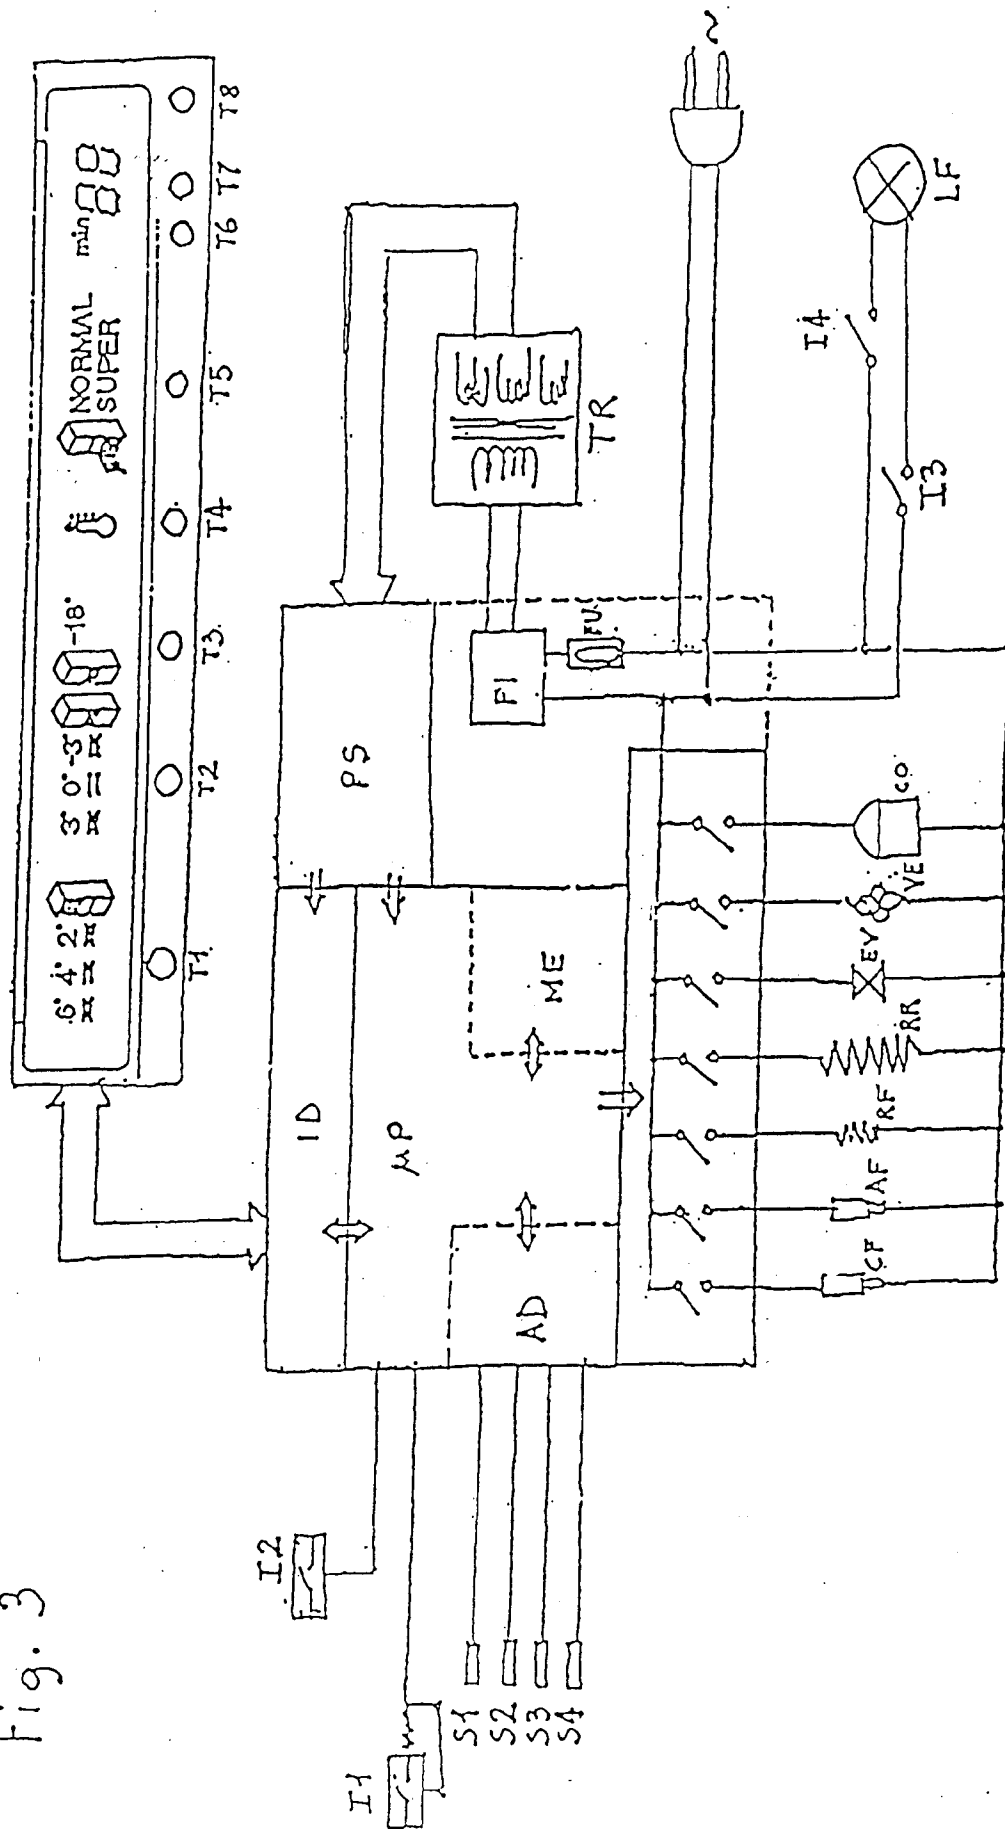


Fig. 4

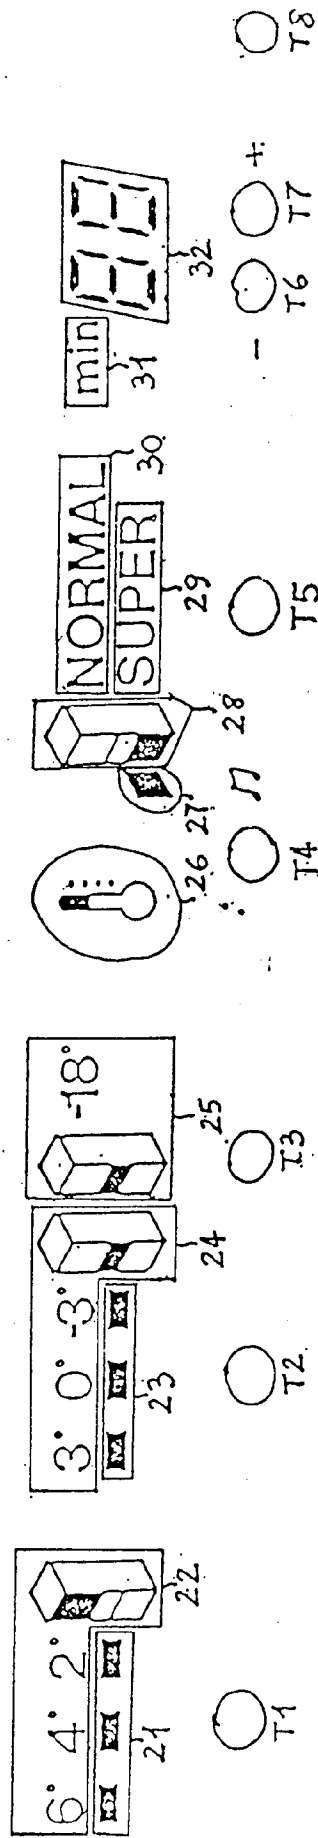


Fig. 5


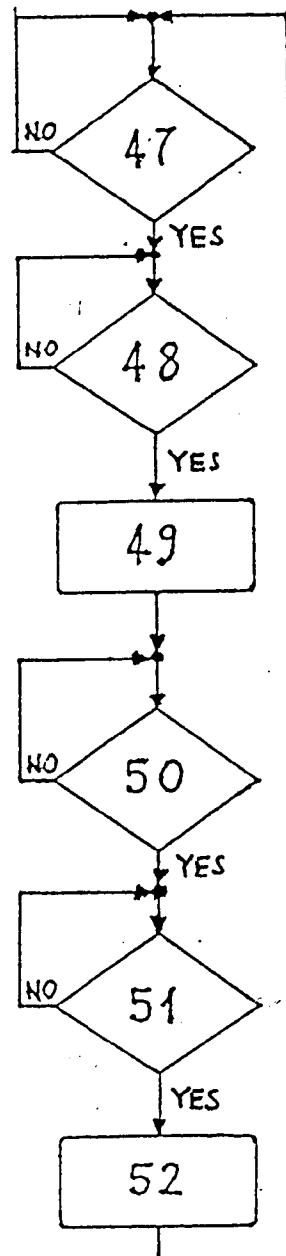


Fig. 6

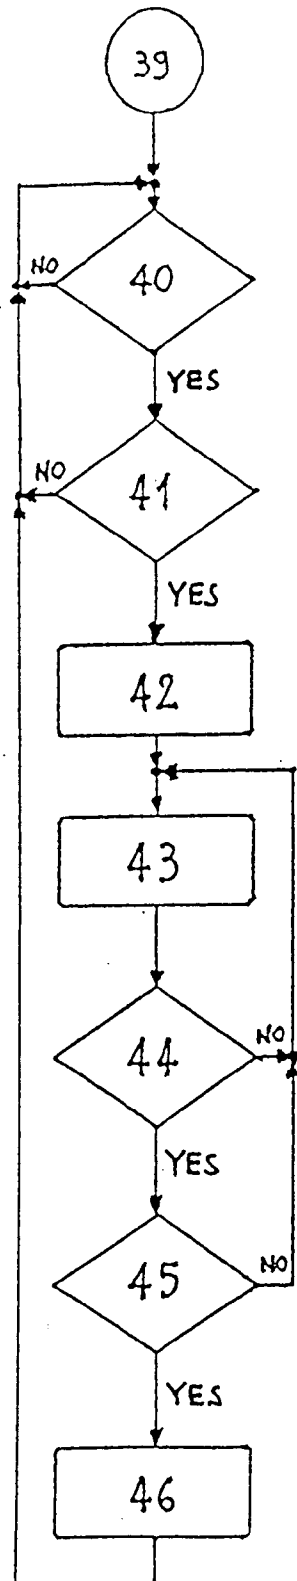