




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : H04N 7/16, 7/58	A1	(11) International Publication Number: WO 95/19091 (43) International Publication Date: 13 July 1995 (13.07.95)
(21) International Application Number: PCT/US95/00050 (22) International Filing Date: 4 January 1995 (04.01.95) (30) Priority Data: 9400101.3 5 January 1994 (05.01.94) GB (71) Applicant: THOMSON CONSUMER ELECTRONICS, INC. [US/US]; 10330 North Meridian Street, Indianapolis, IN 46290-1024 (US). (72) Inventor: CHANEY, John, William; 8107 Shoreridge Terrace, Indianapolis, IN 46236 (US). (74) Agents: TRIPOLI, Joseph, S. et al.; GE & RCA Licensing Management Operation, Inc., CN 5312, Princeton, NJ 08540 (US).		(81) Designated States: AM, AT, AU, BB, BG, BR, BY, CA, CH, CN, CZ, DE, DK, EE, ES, FI, GB, GE, HU, JP, KE, KG, KP, KR, KZ, LK, LR, LT, LU, LV, MD, MG, MN, MW, MX, NL, NO, NZ, PL, PT, RO, RU, SD, SE, SI, SK, TJ, TT, UA, UZ, VN, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG), ARIPO patent (KE, MW, SD, SZ). Published <i>With international search report.</i>

(54) Title: A DIGITAL TELEVISION SYSTEM CHANNEL GUIDE HAVING A LIMITED LIFETIME

(57) Abstract

A television system for receiving a plurality of digitally-encoded television programs includes circuitry for selecting a particular digital data transmission channel from a plurality of digital data transmission channels containing a desired digitally-encoded television program in response to a control signal, at least one of the data transmission channels also including television program schedule data. The system also includes user-operable data entry circuitry for entering data, and a controller for generating the above-noted control signal in response to user-entered data. The controller selects a virtual channel from a plurality of virtual channels in response to user-entered data, each virtual channel being subject to reassignment to a different one of said a plurality of digital data transmission channels, the television program schedule data defining the relationship of each of the television programs to respective ones of the plurality of digital data transmission channels.

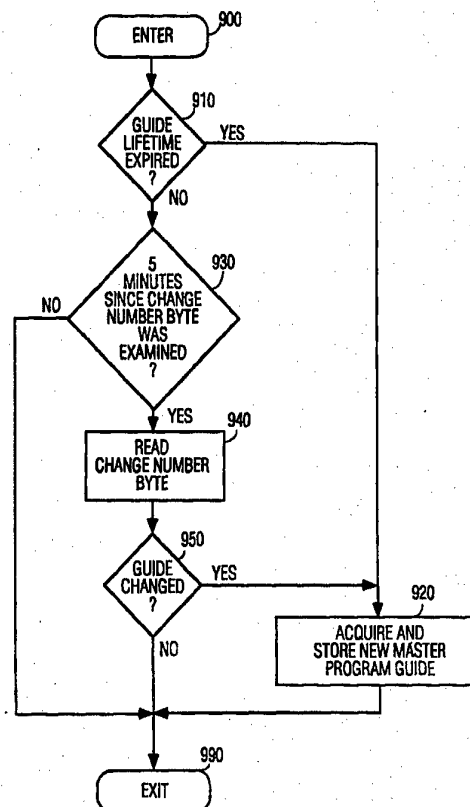

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	GB	United Kingdom	MR	Mauritania
AU	Australia	GE	Georgia	MW	Malawi
BB	Barbados	GN	Guinea	NE	Niger
BE	Belgium	GR	Greece	NL	Netherlands
BF	Burkina Faso	HU	Hungary	NO	Norway
BG	Bulgaria	IE	Ireland	NZ	New Zealand
BJ	Benin	IT	Italy	PL	Poland
BR	Brazil	JP	Japan	PT	Portugal
BY	Belarus	KE	Kenya	RO	Romania
CA	Canada	KG	Kyrgyzstan	RU	Russian Federation
CF	Central African Republic	KP	Democratic People's Republic of Korea	SD	Sudan
CG	Congo	KR	Republic of Korea	SE	Sweden
CH	Switzerland	KZ	Kazakhstan	SI	Slovenia
CI	Côte d'Ivoire	LI	Liechtenstein	SK	Slovakia
CM	Cameroon	LK	Sri Lanka	SN	Senegal
CN	China	LU	Luxembourg	TD	Chad
CS	Czechoslovakia	LV	Latvia	TG	Togo
CZ	Czech Republic	MC	Monaco	TJ	Tajikistan
DE	Germany	MD	Republic of Moldova	TT	Trinidad and Tobago
DK	Denmark	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	US	United States of America
FI	Finland	MN	Mongolia	UZ	Uzbekistan
FR	France			VN	Viet Nam
GA	Gabon				

A DIGITAL TELEVISION SYSTEM CHANNEL GUIDE HAVING A LIMITED LIFETIME

5

FIELD OF THE INVENTION

This invention is related to the field of digital communications systems, and is described with reference to a digital satellite television system, but also may be applicable to such systems as a digital cable system, digital terrestrial broadcast system, or a digital communication system which utilizes telephone lines. The invention specifically concerns a method and apparatus for ensuring that the television schedule data, for generating screen displays for controlling the system, are current.

15

BACKGROUND OF THE INVENTION

In a satellite television communication system, the satellite receives a signal representing audio, video, or data information from an earth-based transmitter. The satellite amplifies and rebroadcasts this signal to a plurality of receivers, located at the homes of consumers, via transponders operating at specified frequencies and having given bandwidths. Such a system includes an uplink transmitting portion (earth to satellite), an earth-orbiting satellite receiving and transmitting unit, and a downlink portion (satellite to earth) including a receiver located at the user's residence. The subject matter of the present invention is especially concerned with a downlink receiving unit designed for relatively easy use by the user.

The subject system is designed to utilize two satellites within a few degrees of each other in geosynchronous earth-orbit stationed at an altitude of 22,300 miles, approximately over the state of Texas. With this arrangement, receivers located anywhere in the contiguous 48 states of the United States can receive signals from both satellites on the same receiving antenna dish without having to reposition the antenna dish. Each satellite transmits its signals with a respective polarization. Selecting a

35

satellite for reception of its signals is accomplished at the receiving antenna by selecting those signals with the appropriate polarization. Each satellite includes sixteen transponders for transmitting signals to the receiving antenna dish over a range of frequencies. Each transponder is time-multiplexed to convey a plurality of television channels (e.g., six to eight channels), substantially simultaneously. The satellite signals are transmitted in compressed and packetized form, and comprise television and ancillary data signals. Because the system is capable of carrying as many as two hundred fifty-six channels, some television program selection method and apparatus, which is easy to understand and operate, should be provided for the user.

If we look to conventional analog VHF and UHF broadcast television as a guide, we find that the solution provided therein is of little help, for the following reasons. The channel number of a given television station corresponds to a fixed band of frequencies. In other words, channel 6 in the United States is regulated to occupy the range from 82-88 MHz. Most non-technical consumers have no understanding of the frequency allocations of the television broadcast bands. Instead, they tune a desired channel by entering its channel number into their receiver. Their receiver is programmed with the proper information to perform the required tuning to the desired channel by generating the appropriate bandswitching and tuning commands, in response to the entering of the channel number by the user. It is possible for manufacturers to build a fixed channel number-to-frequency translation arrangement into each television receiver, only because the relationship between channel number and frequency band must conform to a broadcast standard.

In the United States, there is a terrestrial television schedule guide system known as Starsight® which provides a channel guide display for selecting television channels at fixed broadcast frequencies. Starsight® data is transmitted in the

vertical interval of televisions programs of certain broadcasters (usually public broadcasting stations (PBS)), and displayed in the form of a schedule guide on the user's television screen. Unfortunately, three problems with the Starsight® system are perceived. First, it can take several hours for a Starsight® receiver to load its channel guide data due to its transmission at a low data rate. Thus, a viewer will not be able to use his Starsight® system to tune channels for at least several hours after installing it in his home. Second, the channel guide information is not transmitted on every channel, so updating the guide requires retuning to the PBS channel, thereby interrupting the viewer's use of the receiver during the several hours it takes to reload the guide. Third, a Starsight® user must choose a several-hour window in time, which occurs once every twenty-four hours, for the Starsight® receiver to download a current copy of the channel guide. It is important to note that, unexpected changes in the television schedule cannot be detected by the Starsight® unit if the currently watched channel does not carry Starsight® signals, and most channels do not carry those signals. Thus, unexpected changes in the television schedule cannot be handled within a reasonable time due to, failure of the system to detect those changes, and the constraint of loading the schedule from a particular broadcast station during a predetermined time window.

SUMMARY OF THE INVENTION

A television system for receiving a plurality of digitally-encoded television programs includes an integrated receiver decoder (IRD) having circuitry for selecting a particular digital data transmission channel from a plurality of digital data transmission channels containing a desired digitally-encoded television program in response to a control signal, many of said data transmission channels also including television program schedule data. The system also includes user-operable data entry circuitry for entering data, and a controller for generating the

above-noted control signal in response to user-entered data. The controller selects a virtual channel from a plurality of virtual channels in response to user-entered data, each virtual channel being subject to reassignment to a different one of said plurality of digital data transmission channels, the television program schedule data defining the relationship of each of the television programs to respective ones of the plurality of digital data transmission channels. The television schedule data being repeated several times per minute, and bearing a code indicative of its usable lifetime. The receiver acquires a new master program guide upon determining that its current channel guide has expired. In order to accommodate unexpected changes in schedule, every few minutes the receiver checks a status byte to see if the master program guide has changed. The exact number of minutes being predetermined to be several times less than the lifetime of the program guide. If the status byte indicates that the program guide has changed, then a new program guide is read in, without waiting for the current guide to expire. The status byte may be a version number for the master program guide, which is compared to the version number of the currently-stored master program guide.

25 BRIEF DESCRIPTION OF THE DRAWING

FIGURES 1 and 2 are illustrations of a typical transmitted data stream from a transponder in accordance with the invention.

FIGURE 3 is an illustration of a program guide screen display in accordance with the invention.

FIGURE 4 is an illustration of segmentation of the master program guide and special program guides in accordance with the invention.

FIGURES 5a and 5b are illustrations of program data structures in accordance with the invention.

5

FIGURE 6 is a block diagram of a satellite transmitting/receiving system according to the invention.

5 FIGURE 7 is a block diagram of the IRD receiver unit.

FIGURE 8 is a block diagram of a portion of the IRD receiver unit of FIGURES 6 and 7, in detail.

FIGURE 9 is a flow chart showing a portion of the control program of the microcomputer of the IRD receiver unit.

10

DETAILED DESCRIPTION OF THE DRAWING

In the subject system, the information necessary to select a given television program is not fixedly-programmed into each receiver but is rather is down-loaded from the satellite
15 continually on each transponder. The television program selection information comprises a set of data known as a Master Program Guide (MPG), which relates television program titles, their start and end times, a virtual channel number to be displayed to the user, and information allocating virtual channels to transponder
20 frequencies and to a position in the time-multiplexed data stream transmitted by the particular transponder. In a system according to the subject invention, it is not possible to tune any channel until the first master program guide is received from the satellite, because the receiver literally does not know where any channel is
25 located, in terms of frequency and position (i.e. data time slot) within the data stream of any transponder. Advantageously, the system is totally flexible in that any program may be assigned, or reassigned at any master program guide transmission time, to any transponder or data time slot, in a fashion which is completely
30 transparent to the user, who sees only the unchanged program title and virtual channel.

The problem of changes in television schedule is overcome in that a master program guide preferably is transmitted on all transponders with television program video,
35 audio, and auxiliary data, and is repeated periodically, for example, every 2 seconds. However, a system in which only one

or some of the transponders carries the master program guide is also envisioned, in that a fast tuner could be employed to switch
5 to the transponder carrying the master program guide, or a second tuner could be tuned to receive the master program guide data. The data rate for transmitting a master program guide is approximately 100 kbits per second. The master program guide, once received, is maintained in a memory unit in the receiver, and
10 updated periodically, for example every 30 minutes. Retention of the master program guide allows instantaneous television program selection because the necessary selection data are always available.

The master program guide has a lifetime (time within
15 which its data is considered valid) of thirty minutes. A byte indicating the remaining lifetime of the master program guide is transmitted with every transmission of the guide itself (i.e., about every two seconds). In addition to the thirty minute lifetime of a master program guide, an "emergency guide" is available for
20 providing a way to correct errors in the program guide, caused by operator error at the uplink site, or caused by a sporting event running "overtime" (i.e., beyond its scheduled time). A program guide status byte (i.e., the "change number" byte) is checked repeatedly at the end of every five minute interval to see if the
25 content of the master program guide just received (but not yet stored) is changed from the content of the currently-stored master program guide. If so, then the newly-received master program guide is loaded into memory for immediate use. If not, the newly-received master program guide is discarded.

30 Following is an explanation of how such a system is implemented. As noted above, the system is capable of transmitting hundreds of programs. Each program may include a number of services. A service is defined herein as a program component, such as a video signal, an audio signal, a closed caption
35 signal, or other data, including executable computer programs for an appropriate receiver. Each service of each program is

identified by a unique Service Component Identifier (SCID). The information for the respective services is transmitted in packets of predetermined amounts of data (e.g., 130 bytes) and each packet includes an SCID corresponding to the service.

A representation of a typical data stream from one of the transponders is shown in FIGURE 1, and a typical packet from that data stream is shown in FIGURE 2. In FIGURE 1, a string of boxes represents signal packets which are components of a plurality of different television programs transmitted by a given transponder. Packets with letters having like subscripts represent components of a single television program. For example, packet identified as V₁, A₁ and D₁, represent video, audio, and data for program 1. In the upper line of the string of packets, the respective components of a particular program are shown grouped together. However, it is not necessary to group components of a particular program together, as indicated by the packet sequence in the middle of the string. Moreover, there is no requirement to place the packets of a string in any particular order.

The string of packets shown in the lower portion of FIGURE 1, represents three time multiplexed programs, programs 1, 2, and 3, plus packets representing a program guide (packets D₄). It is important to note that the data of the program guide interrelates program components and virtual channels by virtue of the SCID. The respective packets are arranged to include a prefix and a payload as shown in FIGURE 2. The prefix of this example includes two 8-bit bytes comprising five fields, four of which are 1-byte fields (P,BB,CF,CS), and one 12-bit field (SCID). The Payload portion contains the actual information to be received and processed. The exemplary prefix includes a 1-bit priority field (P); a 1-bit boundary field (BB), which indicates boundaries between significant signal changes; a 1-bit field (CF), which indicates whether or not the payload is scrambled; a 1-bit field (CS), which indicates which one of two descrambling keys is to be used to descramble a scrambled payload; and a 12-bit SCID. The

remainder of the packet comprises the payload which may include error code parity bits appended to the end of the payload data.

5 A master program guide comprises packetized data formatted as defined above, and is assigned a specific SCID, such as, 0000 0000 0001. A master program guide comprises four sequential blocks of data, designated, SEGM, APGD, CSSM1 . . . CSSMnseg, and PISM1 . . . PISMnseg, to be described below.

10 A master program guide typically includes television schedules for the next two hours, but may include schedules for four, six, or eight hours depending on the size of the memory allocated to store it in the receiver. In addition to the master program guide, there is also provided one or more special
15 program guides (SPG), containing additional data, such as, for example, television program schedules for the following eight hours. That is, the master guide holds all information necessary for selecting current television programs, and the special guides contain information about future television programs. Special
20 guides are downloaded from the satellite as needed and are not retained in memory due to their large size. As shown in FIGURE 4, both the master program guide and special program guides are partitioned into a plurality of segments or portions (from 0 to 15) with an index "nseg" indicating the current number of segments
25 comprising the special guide. Each segment carries program information for one or more virtual channels which range from 100 to 999. FIGURE 4 shows only an exemplary allocation of virtual channels to segments, and other groupings can be, and are, made at the discretion of the operators at the satellite uplink
30 center. Each special guide segment includes two sequential blocks of data, CSSM1 . . . CSSMnseg, and PISM1 . . . PISMnseg, also to be described below.

 FIGURES 5a and 5b illustrate program data structures of the subject system, not all of which are relevant to the virtual
35 channel selection and updating of the master program guide. Only those portion which are relevant will be discussed. Referring to

FIGURES 5a and 5b, the Segment Map (SEGM) block of the master program guide contains information about the partitioning of the channel space into segments, and the number of segments. The Additional Program Guide Data (APGD) block contains a program guide map which indicates which special program guide segments are active, and their location (i.e., the particular transponder carrying the segment), as well as the SCIDs of the respective segments. The APGD block contains program information relating to ratings and theme of a particular television program. The APGD also includes a program guide map associating special guide segments with respective virtual channel names, virtual channel numbers, and content types.

The master guide and every special guide contain a Channel to Service Segment Map (CSSM) block and a Program Information Segment Map (PISM) block. The CSSM describes virtual channels by defining characteristics such as, channel name, call letters, channel number, and type, which are in the corresponding segment. The PISM block contains linked lists of program information such as, title, start time, duration, rating, and category, that are on each virtual channel described in the corresponding CSSM.

Relevant portions of the data structures shown in FIGURES 3, 4, 5a and 5b will be referred to in the following description of the program selection process. In order to understand the importance of maintaining an accurate master program guide, it may be helpful to describe how a master program guide is used to select a television program. Referring to FIGURE 3, a user selects a television program for viewing, by moving a cursor (via operation of remote control up, down, right, and left, direction control keys) to a block of the program guide screen display which contains the name of the desired program. The remote control unit is not shown for simplicity. When a SELECT key of the remote control is pressed, the current x and y

10

position of the cursor is evaluated to derive virtual channel and program time information.

5 As shown in FIGURE 4, and as noted above, the master program guide and special program guides are divided into segments (which may be as little as one segment or as many as 16). The lowest virtual channel (100) is always allocated as the first channel of seg (0). Each segment contains channel and
10 program information for a defined number of virtual channels. Upon deriving the virtual channel number from the X and Y cursor position information, the virtual channel number is used to point into the proper segment of the particular program guide (either master program guide, or a special program guide) to
15 retrieve the specific channel information and program information. Specifically, the Channel Information (CI) Records in the CSSM (Channel to Service Segment Map) are a fixed length of seventeen bytes and contain such items as, the number of SCIDs in use (typically 2, audio and video), the channel transponder (Chan
20 Xpndr) the channel number and short name (i.e., typically 4 characters), and a pointer into the linked program information. In order to access any specific Channel Information (CI) it is only required to repeatedly add 17 to a base value. Program
25 information includes the start day and time of the program, the number of 30 minute slots it occupies, the theme category (i.e., drama, sports, comedy), and parental rating.

 Once the channel transponder carrying a desired television program is tuned, the data packets containing the audio and video information for that program can be selected from the
30 data stream received from the transponder by examining the data packets for the proper SCID (Service Component Identifier) 12 bit code. If the SCID of the currently received data packet matches the SCID of the desired television program as listed in the program guide, then the data packet is routed to the proper data
35 processing sections of the receiver, if the SCID of a particular

packet does not match the SCID of the desired television program as listed in the program guide, then that data packet is discarded.

5 Referring again to the Segment Map (SEGM), of FIGURE 5a, there are included in the SEGM two bytes of particular interest. The first is the lifetime byte which is initially set to thirty minutes when a new master program guide is first transmitted. Each transmission of that same master program
10 guide will have the lifetime byte decremented by an amount equal to the time delay between transmissions of that guide (typically, every two seconds). When the lifetime byte reaches a value of zero (indicating that the currently stored master program guide is thirty minutes old), then a new master program guide is
15 acquired and stored for immediate use. The second byte of particular interest is the "change number" byte. Each master program guide having content which is different from the content of the currently-stored master program guide will have a different number from the currently-stored master program
20 guide. It is this byte which will be examined to determine whether an unscheduled change in programming has occurred (i.e., a change in television programming which occurred during the valid lifetime of the currently-stored master program guide). Detection of such an unexpected change requires the acquisition
25 and storage of a new master program guide. At the end of every five minute interval (although another time period may be used) during the valid lifetime of the currently-stored master program guide, the "change number" byte of a newly received guide will be examined to determine if a change in master program guide
30 content has occurred, and whether or not the newly-received master program guide should be stored and used, or discarded. The "change number" byte may be a version number for the master program guide, which is compared to the version number of the currently-stored master program guide. A flowchart
35 illustrating the portion of the control program for the receiver

which is relevant to the master program guide updating operation is shown in FIGURE 9.

5 The routine of FIGURE 9 is entered at step 900 and proceeds to step 910 wherein a check is made to see if the lifetime of thirty minutes of the currently-stored master program guide has expired. If so, the program advances to step 920 to acquire and store a new master program guide, and then exits at
10 step 990. If, at step 910, the lifetime of the currently-stored master program guide had not expired, then the NO path is taken to step 930 wherein a check is made to see if five minutes has elapsed since the last time that change number byte was examined. If the five minute period has not elapsed, then the
15 routine is exited at step 990. If the five minute period has elapsed, then the change number byte is read at step 940. At step 950, a determination is made as to whether or not the newly-received master program guide has been changed from the currently-stored master program guide. If so, the program
20 advances to step 920 to acquire and store a new master program guide, and then exits at step 990. If not, then the NO path is taken to the exit at step 990. Thus, in the normal course of events, every thirty minutes the master program guide is updated with new information. However, in the event of an unexpected
25 television program schedule change, the receiver will correct its master program guide within a five minute period, because a master program guide including schedule data for all active virtual channels is transmitted on every transmission channel every two seconds, and because a complete new master program
30 guide takes only two seconds to load.

 A brief description of system hardware, suitable for implementing the above-described invention, now follows. In
FIGURE 6, a transmitter 601 processes a data signal from a source
614 (e.g., a television signal source) and transmits it to a satellite
35 613 which receives and rebroadcasts the signal to a receiver 612. Transmitter 601 includes an encoder 602, a modulator/forward

error corrector (FEC) 603, and an uplink unit 604. Encoder 602 compresses and encodes signals from source 614 according to a predetermined standard such as MPEG. MPEG is an international standard developed by the Moving Picture Expert Group of the International Standards Organization for coded representation of moving pictures and associated audio stored on digital storage medium. An encoded signal from unit 602 is supplied to modulator/Forward Error Corrector (FEC) 603, which encodes the signal with error correction data, and Quaternary Phase Shift Key (QPSK) modulates the encoded signal onto a carrier. Both convolutional and Reed-Solomon (RS) block coding are performed in block 603.

Uplink unit 604 transmits the compressed and encoded signal to satellite 613, which broadcasts the signal to a selected geographic reception area. In this embodiment, satellite 613 operates in two modes, which trade off channel capacity for transmission power, or transmission power for channel capacity. In the first mode, satellite 613 illustratively transmits sixteen channels at 120 watts each. In the second mode, satellite 613 transmits eight channels at 240 watts each.

The signal from satellite 613 is received by an antenna dish 605 coupled to an input of a so-called set-top receiver 612 (i.e., an interface device situated atop a television receiver). Receiver 612 includes a demodulator/Forward Error Correction (FEC) decoder 607 to demodulate the signal and to decode the error correction data, a microprocessor 606, which operates interactively with demodulator/FEC unit 607, and a transport unit 608 to transport the signal to an appropriate decoder within unit 609 depending on the content of the signal, i.e., audio or video information. Transport unit 608 receives corrected data packets from unit 607 and checks the header of each packet to determine its routing. Decoders in unit 609 decode the signal and remove added transport data, if used. An NTSC Encoder 610 encodes the

decoded signal to a format suitable for use by signal processing circuits in a standard NTSC consumer television receiver 611.

5 FIGURE 7 is a block diagram showing the components of the IRD receiver system including the outdoor antenna dish unit 7-5. The IRD includes a block 707 including a tuner 734 and a demodulator unit 735 for tuning various television signals. The IRD is under control of a microcontroller 706, which also controls
10 the interfaces between the IRD and a telephone network via a telephone modem 734, between the IRD and a user via an IR link 725 and between the IRD and a television receiver via an MPEG decoder 723, a video encoder 721, and an RF modulator 722, and finally, between the IRD unit and a user via a smart card interface
15 and transport IC 708. The master program guide is stored, for example, in RAM 709.

Referring now to FIGURE 8, demodulator/FEC unit 807 acquires, demodulates, and decodes the data signal which is received from antenna dish 805. This unit includes a tuner 834, a
20 Quaternary Phase Shift Key (QPSK) demodulator 835, a Viterbi convolutional decoder 836, a de-interleaver 837, and a Reed-Solomon (RS) decoder 838, all of conventional design, arranged as shown.

Tuner 834 receives an input signal from antenna dish
25 805. Based upon a user's channel selection, a control unit 806 (i.e., a microprocessor) sends a frequency signal to tuner 834. This signal cause tuner 834 to tune to the appropriate channel and to downconvert the received signal in frequency in response to the tuning frequency signal sent to tuner 834 from microprocessor
30 806. An output signal from tuner 34 is provided to QPSK demodulator 835.

QPSK demodulator 835 locks onto (synchronizes with) the tuned channel, demodulates the modulated data signal, and generates a signal indicative of the quality of the demodulated
35 signal. Demodulator 835 demodulates the modulated input data signal regardless of the error correction code rate of the received

15

data signal. Phase-locked loop circuitry in demodulator 835 synchronizes the operation of demodulator 835 with the input
5 signal using well-known techniques. Demodulator 835 generates a Demodulator Lock output control signal that indicates whether or not demodulator 835 is synchronized with the input signal, and supplies this signal to a storage register in microprocessor 806.
10 an output demodulated data signal from unit 835 is provided to Viterbi decoder 836. Demodulator 835 also generates an output Signal Quality signal, which is indicative of the quality of the signal received from the satellite transmission, and is related to the signal-to-noise ratio of the received signal. Various sources of noise, as well as rain fade, may impair the quality of a received
15 signal. A QPSK demodulator suitable for use as unit 835 is commercially available from Hughes Network Systems of Germantown, Maryland (integrated circuit type No. 1016212), and from Comstream Corp., San Diego California (No. CD2000).

Decoder 836 uses a Viterbi algorithm to decode and to
20 correct bit errors in the demodulated signal from unit 835. Decoder 836 includes internal networks, as known, to synchronize its operation to the incoming demodulated signal in order to effectively decode the demodulated signal.

After decoder 836 decodes and error corrects the
25 demodulated data signal, the decoded data signal is supplied to a de-interleaver 837. De-interleaver 837 restores the ordering of the data signal to its original sequence, and forms Reed-Solomon blocks (RS blocks), in accordance with known techniques. For this purpose de-interleaver 837 relies upon an 8-bit sync word
30 inserted by the encoder at the beginning of each RS block, thereby providing RS block synchronization. The de-interleaved signal is supplied to a Reed-Solomon (RS) decoder 838.

RS decoder 838 decodes the RS blocks and corrects
byte errors within a block. A decoded signal from Viterbi decoder
35 836 is provided to RS decoder 838 via de-interleaver 837. If decoder 36 uses the proper error correction decode rate to decode

the data signal, de-interleaver 837 and Reed-Solomon decoder 838 will operate normally.

- 5 Thus, a digital multi-channel transmission system has been disclosed and described which allocates television programs to transponders and to time-multiplexed slots in the data stream of a given transponder in a way which is completely transparent to the user, who simply tunes a desired television program by
10 selecting a virtual channel. Clearly, the key to smooth operation of this system is the transmission of the master and special channel guides which relate transponder channels and program data positions in the transponder data stream to virtual channel numbers. The subject invention ensures that the stored master
15 program guide data are current by reloading it every half hour, and by checking every five minutes to see if the content of a newly-received master program guide differs from the content of the currently-stored master program guide.

17

CLAIMS

- 5 1. A television system for receiving a plurality of
digitally-encoded television programs, comprising:
 means for selecting a particular digital data
transmission channel from a plurality of digital data transmission
channels containing a desired one of said digitally-encoded
10 television programs in response to a control signal, at least one of
said data transmission channels also including television program
schedule data;
 user-operable data entry means for entering data;
 control means coupled to said selecting means and to
15 said data entry means for generating said control signal in
response to said user-entered data; and
 said control means selecting a virtual channel from a
plurality of virtual channels in response to said user-entered data,
said television program schedule data defining the relationship of
20 each of said television programs to respective ones of said
plurality of digital data transmission channels;
 said television program schedule data including
information having a first portion indicative of a time period
during which said television program schedule data is valid, and a
25 second portion indicative of change of content;
 said control means causing said television program
schedule data to be acquired and stored when said first portion of
said information indicates that said time period has expired, and
causing said television program schedule data to be acquired and
30 stored when said second portion of said information indicates that
said content has changed regardless of whether said time period
has expired.

2. The television system of claim 1 wherein, said all of
said data transmission channels also include said television
5 program schedule data.

3. The television system of claim 1 wherein, said first
portion of said information conveys information indicative of the
time remaining of a time period during which said television
10 program schedule data is to be considered valid.

4. The television system of claim 3 wherein, said time
period during which said television program schedule data is to be
considered valid is thirty minutes.

15

5. The television system of claim 1 wherein, said
second portion of said information is a number indicative of a
version of said television program schedule data.

20

6. A television system for receiving a plurality of
digitally-encoded television programs, comprising:

means for selecting a particular data channel from one of a
plurality of data channels on a plurality of transmission channels
in response to a control signal, at least one of said transmission
25 channels also including television program schedule data;

user-operable data entry means for entering data;

control means coupled to said selecting means and to said
data entry means for generating said control signal in response to
said user-entered data; and

30

said control means selecting a data channel in response to
said user-entered data, said television program schedule data
defining the relationship of each of said television programs to
respective ones of said plurality of transmission channels;

said television program schedule data including
35 information having a first portion indicative of a time period

during which said television program schedule data is valid, and a second portion indicative of change of content;

5 said control means causing said television program schedule data to be acquired and stored when said first portion of said information indicates that said time period has expired, and causing said television program schedule data to be acquired and stored when said first portion of said information indicates that
10 said content has changed regardless of whether said time period has expired.

7. The television system of claim 6 wherein, said all of said data transmission channels also include said television
15 program schedule data.

8. Method for receiving a plurality of digitally-encoded television programs, comprising the steps of:

20 selecting a digital data transmission channel from a plurality of digital data transmission channels containing a desired one of said digitally-encoded television programs in response to a control signal, at least one of said data transmission channels also including television program schedule data;

25 reading user-operable data entry means for entering data;

 generating said control signal in response to said user-entered data; and

30 inputting said television program schedule data including information having a first portion indicative of a time period during which said television program schedule data is valid, and a second portion indicative of change of content;

35 controlling said control means to acquire and store said television program schedule data when said first portion of said information indicates that said time period has expired, and causing said television program schedule data to be acquired and stored when said first portion of said information indicates that

20

said content has changed regardless of whether said time period has expired.

5

9. The method of claim 8 wherein, said all of said data transmission channels also include said television program schedule data.

1/10

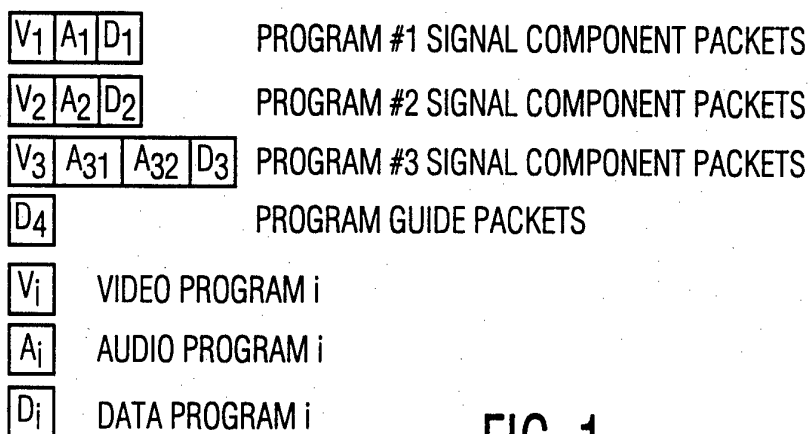
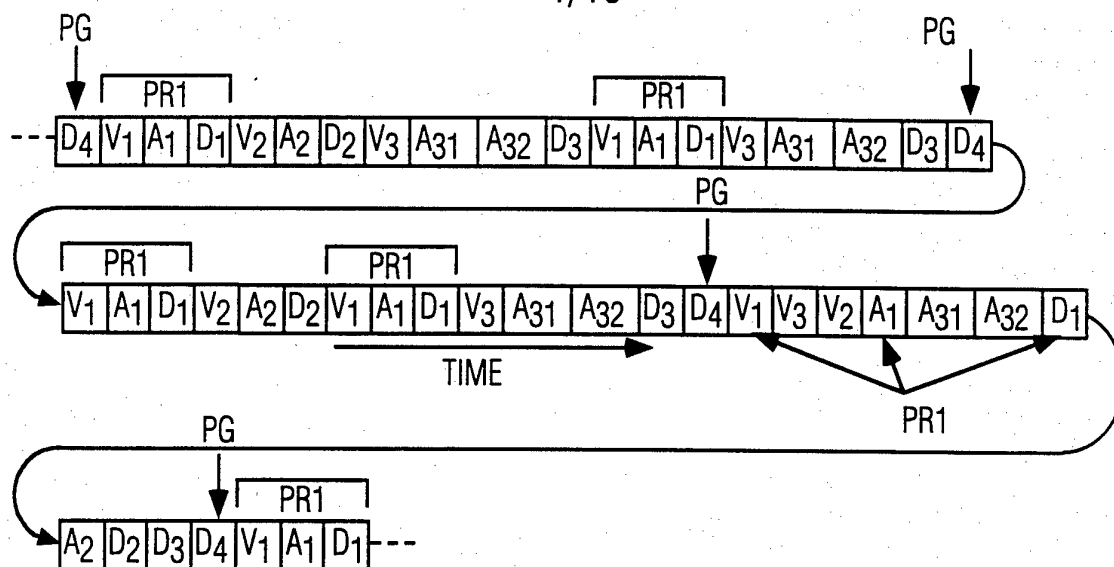


FIG. 1

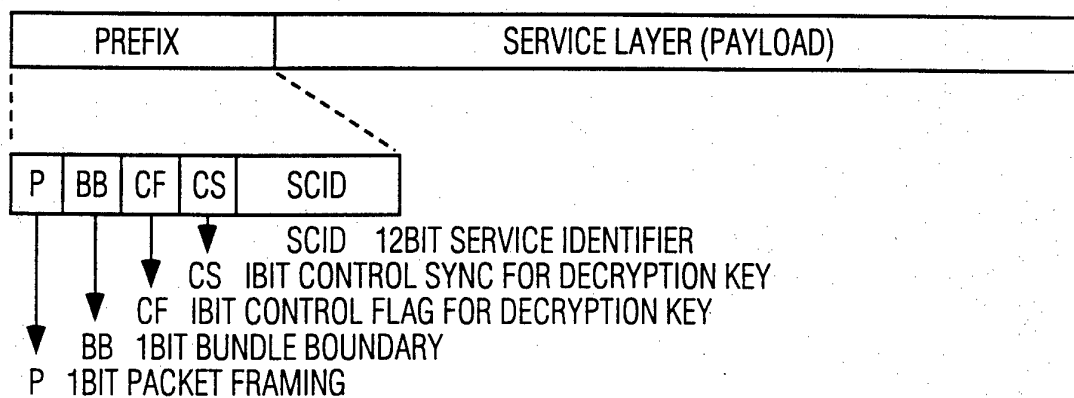


FIG. 2

2/10

CH 150		Program Guide			7:35pm	
		7:30pm	8:00pm	8:30pm	9:00pm	
HBO 102		OTHER PEOPLE'S MONEY		FREE PREVIEW	DREAM ON	
CBS 106		EVENING NEWS	FRANNIE'S TURN	BROOKLYN BRIDGE	RAVEN	
WTTV 150		MASH	IMMEDIATE FAMILY			
CINE 210		EYEWITNESS	FUN CITY		DOUBLE TROUBLE	
CNN 305		PRIME NEWS	BOTH SIDES	RELIABLE SOURCES	WORLD NEWS	
USA 422		COUNTER STRIKE	QUANTUM LEAP			
MORE		MOVIES	SPORTS	OTHER	ALL	EXIT

FIG. 3

3/10



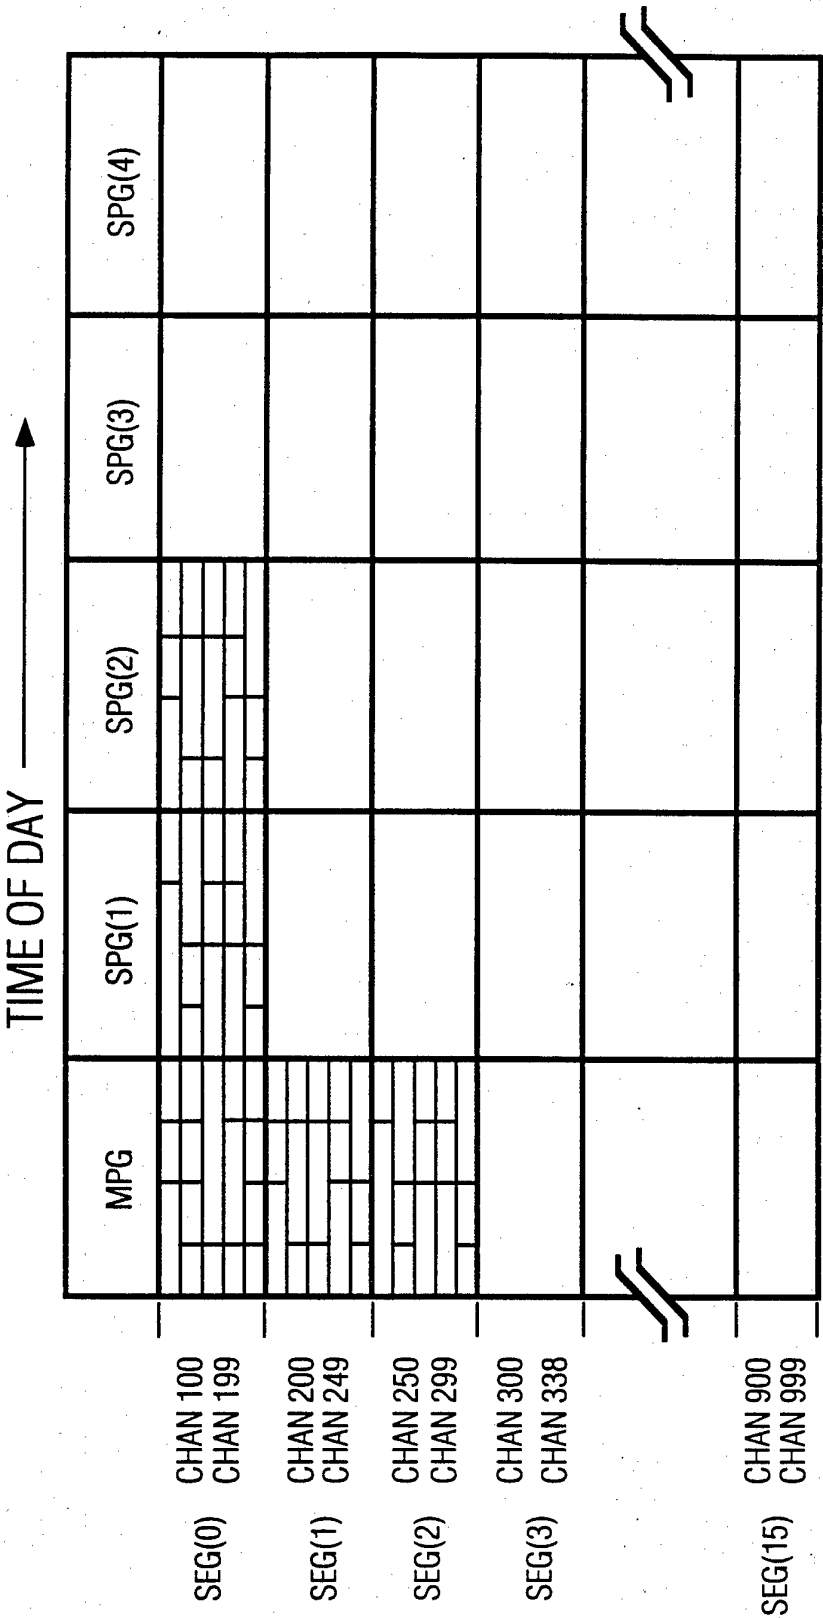


FIG. 4

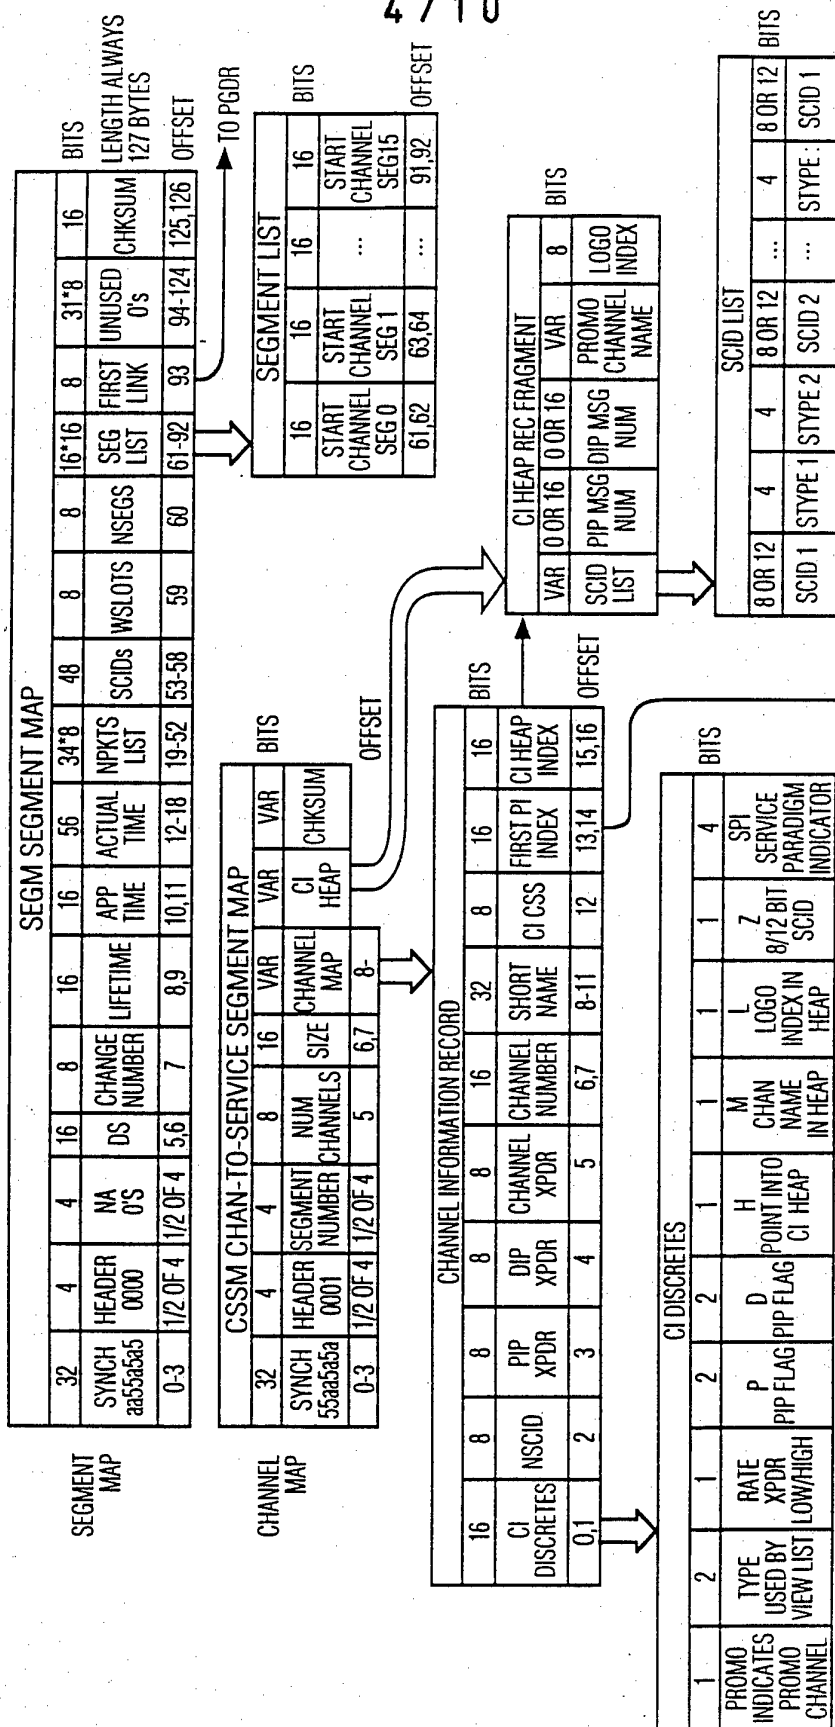

TOPI PROGRAM
INFORMATION
FIG. 5b

FIG. 5a



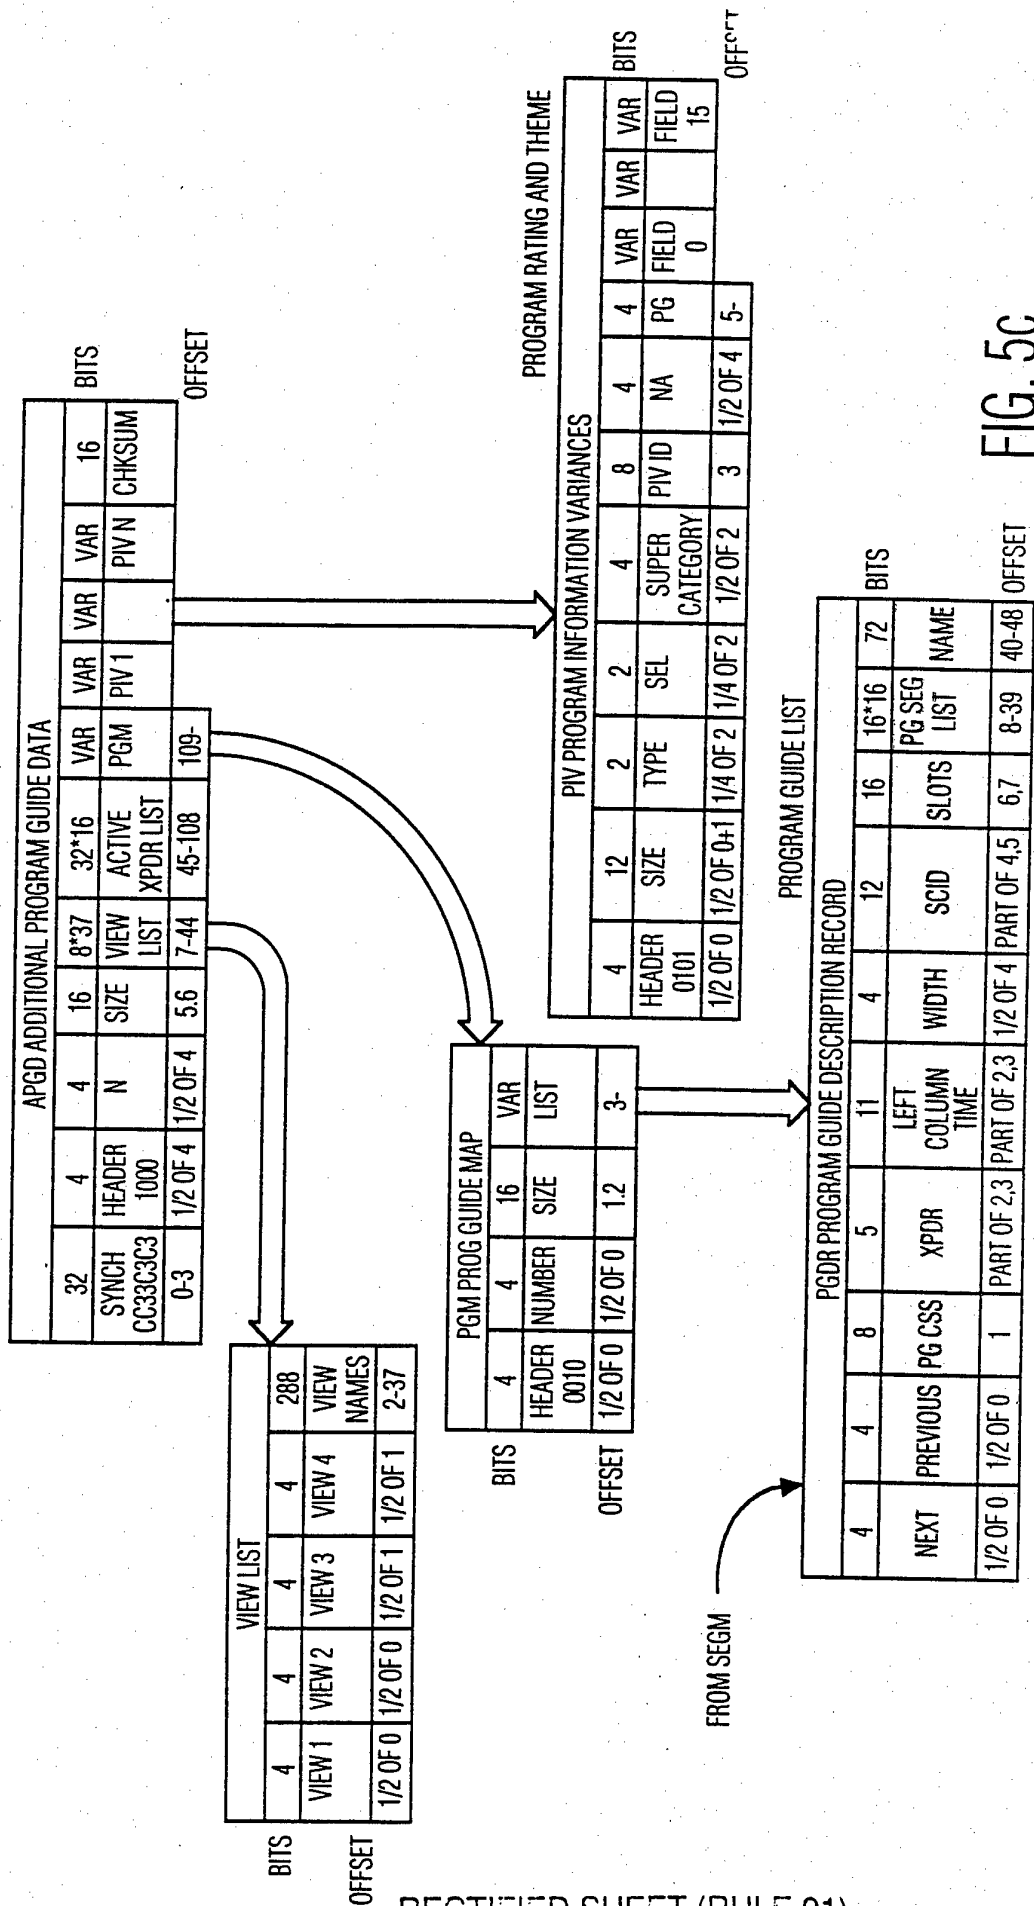


FIG. 5C

7/10

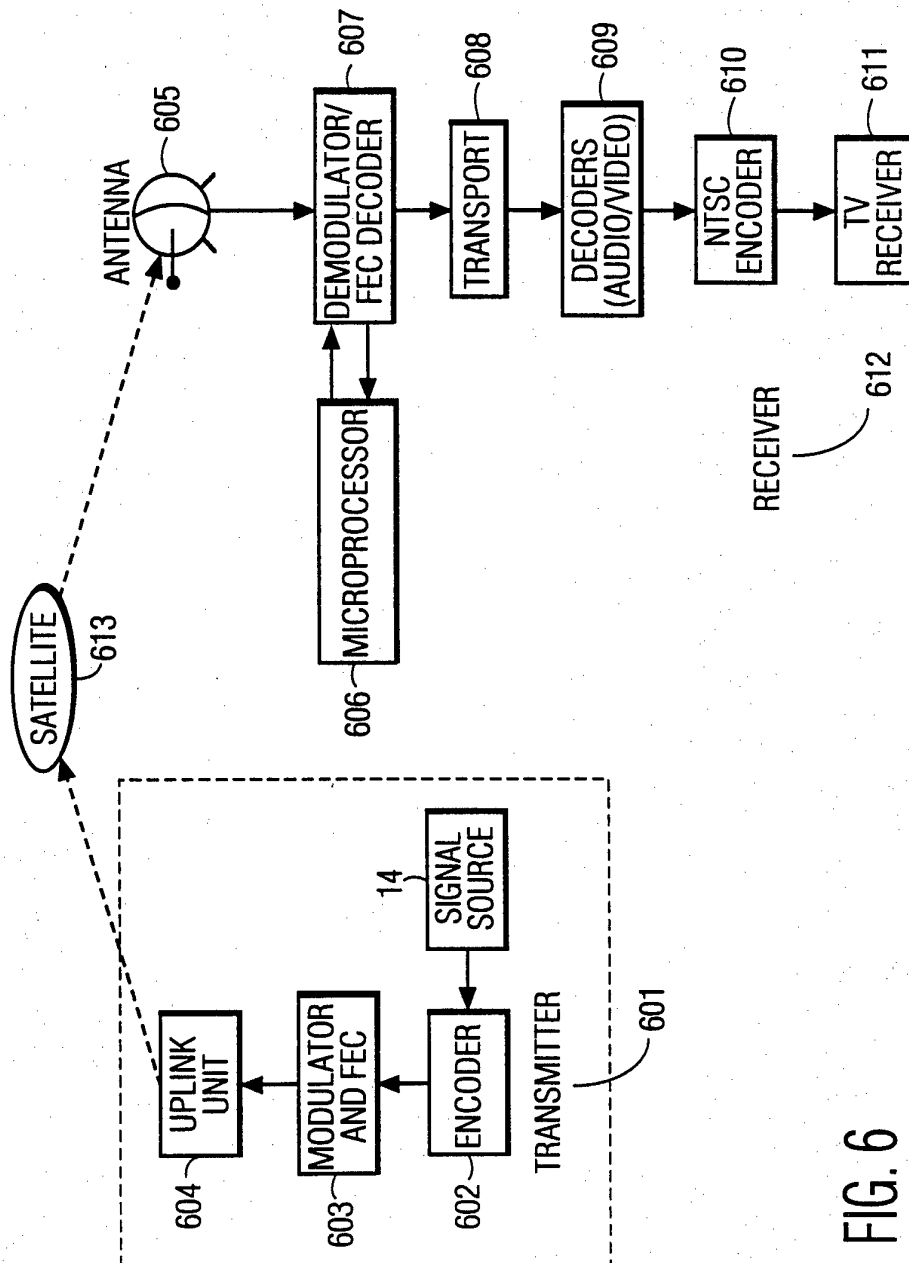


FIG. 6

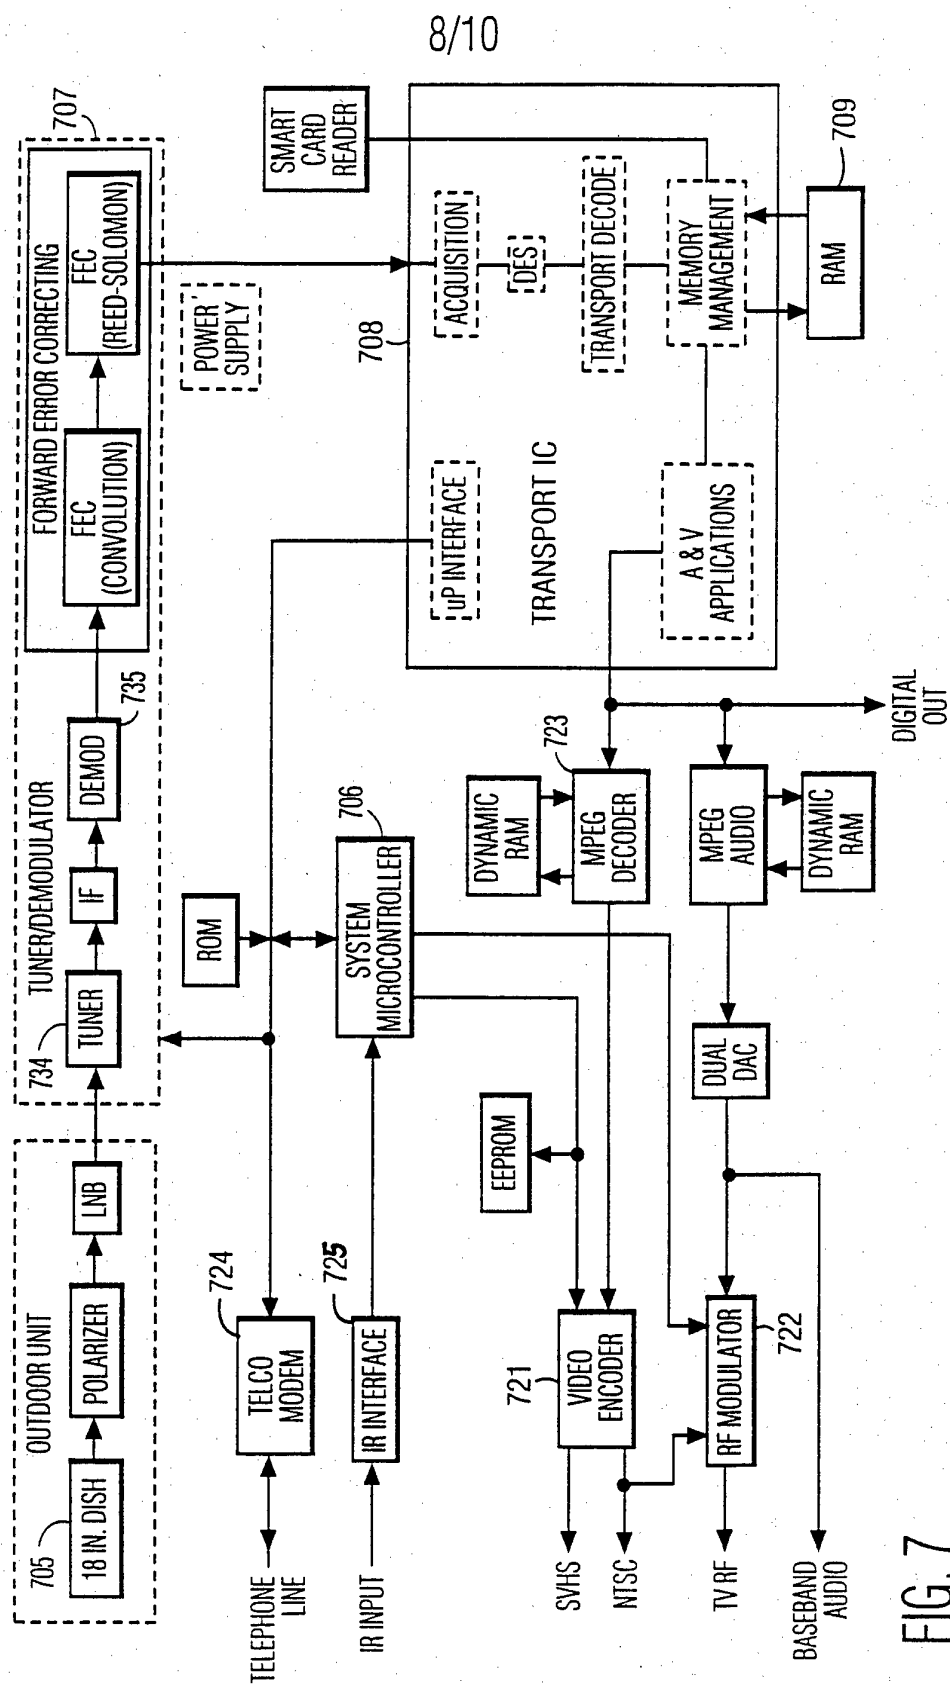


FIG. 7

9/10

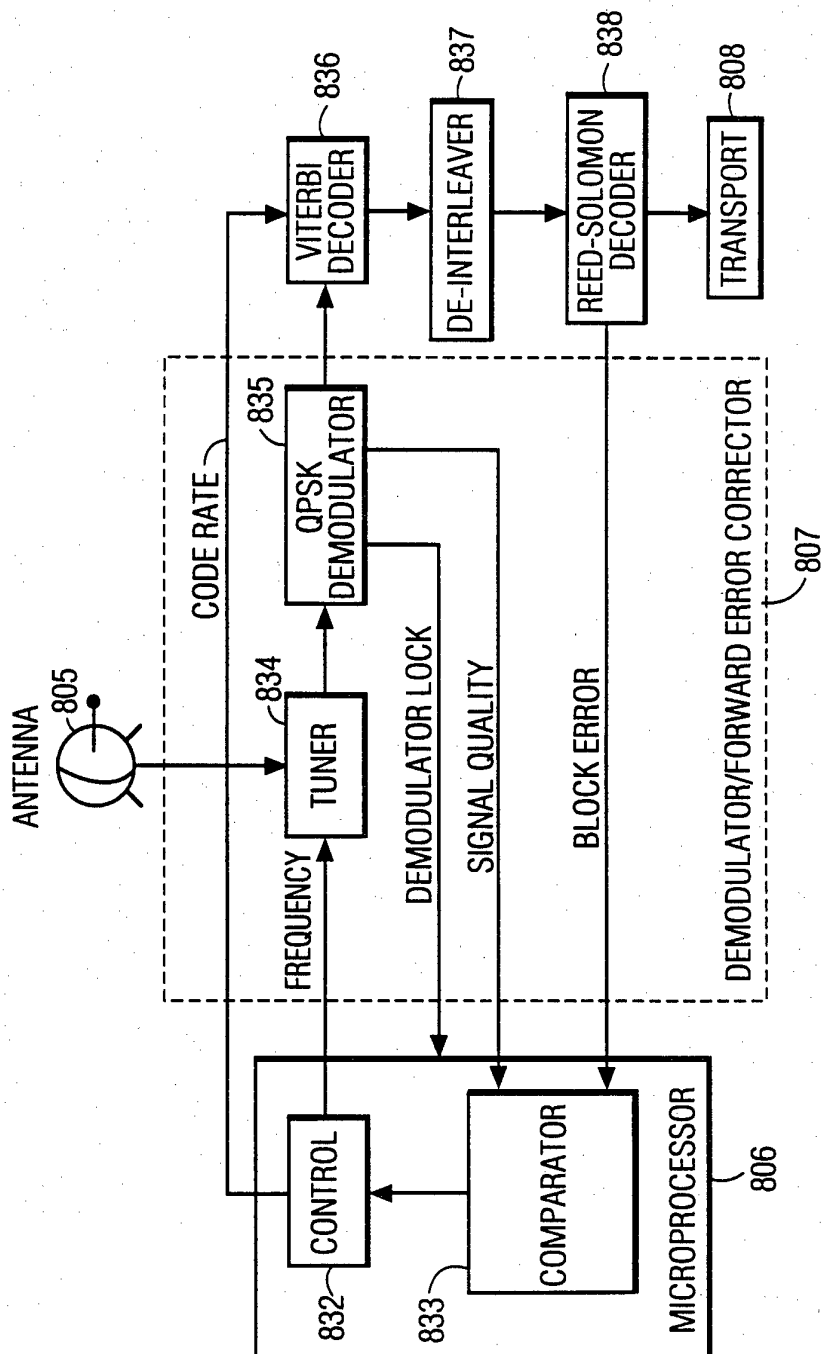


FIG. 8

10/10

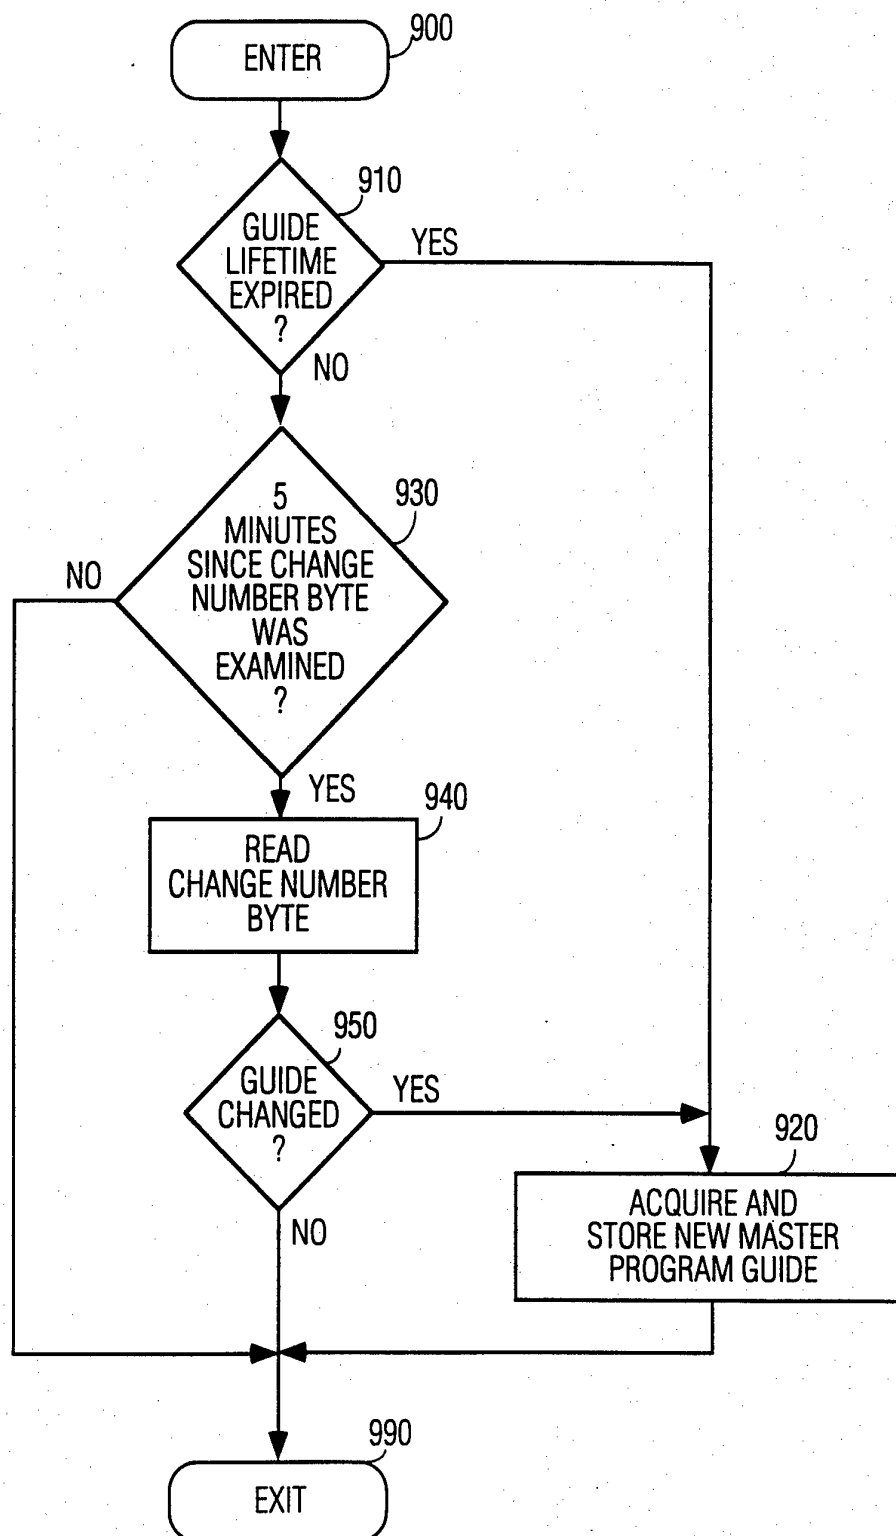


FIG. 9

INTERNATIONAL SEARCH REPORT

Inter. al Application No
PCT/US 95/00050

A. CLASSIFICATION OF SUBJECT MATTER
IPC 6 H04N7/16 H04N7/58

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
IPC 6 H04N H04M

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	18TH INTERNATIONAL TELEVISION SYMPOSIUM AND TECHNICAL EXHIBITION, 15 June 1993, MONTREUX, SWITZERLAND pages 458 - 462 BOYER 'DIGITAL BROADCAST SATELLITE SYSTEM' see the whole document ---	1-9
A	42ND ANNUAL CONVENTION AND EXPOSITION OF THE NATIONAL CABLE TELEVISION ASSOCIATION, 9 June 1993, SAN FRANCISCO, CALIFORNIA pages 223 - 236 BESTLER 'FLEXIBLE DATA STRUCTURES AND INTERFACE RITUALS FOR RAPID DEVELOPMENT OF OSD APPLICATIONS' see the whole document --- -/--	1-9

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents :

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

- "I" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- "&" document member of the same patent family

Date of the actual completion of the international search

13 March 1995

Date of mailing of the international search report

13.04.95

Name and mailing address of the ISA
European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+ 31-70) 340-2040, Tx. 31 651 cpo nl,
Fax: (+ 31-70) 340-3016

Authorized officer

Greve, M

INTERNATIONAL SEARCH REPORT

Intern. al Application No

PCT/US 95/00050

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	42ND ANNUAL CONVENTION AND EXPOSITION OF THE NATIONAL CABLE TELEVISION ASSOCIATION, 9 June 1993, SAN FRANCISCO, CALIFORNIA pages 185 - 191 COX ET AL. 'EXTENDED SERVICES IN A DIGITAL COMPRESSED SYSTEM' see the whole document ----	1-9
A	42ND ANNUAL CONVENTION AND EXPOSITION OF THE NATIONAL CABLE TELEVISION ASSOCIATION, 9 June 1993, SAN FRANCISCO, CALIFORNIA pages 82 - 89 DAILY 'ADDRESSABLE DECODER WITH DOWNLOADABLE OPERATION' see the whole document ----	1-9
A	WO,A,90 10988 (VIEWFACTS) 20 September 1990 see page 7, line 23 - page 8, line 3 -----	1-9

INTERNATIONAL SEARCH REPORT

Information on patent family members

Intern. Application No

PCT/US 95/00050

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO-A-9010988	20-09-90	EP-A- 0461107	18-12-91
