



US009334065B2

(12) **United States Patent**
Bessho et al.

(10) **Patent No.:** **US 9,334,065 B2**

(45) **Date of Patent:** **May 10, 2016**

(54) **LIGHTNING-RESISTANT FASTENER, CAP,
AND METHOD OF MOUNTING
LIGHTNING-RESISTANT FASTENER**

(58) **Field of Classification Search**
USPC 361/218
See application file for complete search history.

(71) Applicant: **MITSUBISHI AIRCRAFT
CORPORATION**, Nagoya-shi, Aichi
(JP)

(56) **References Cited**

U.S. PATENT DOCUMENTS

4,826,380 A 5/1989 Henry
4,832,049 A 5/1989 Hofmeister et al.

(Continued)

FOREIGN PATENT DOCUMENTS

EP 2256030 A1 * 12/2010 B29C 65/562
GB 2226801 A 7/1997

(Continued)

OTHER PUBLICATIONS

International Search Report for PCT/JP2010/002429; Jun. 15, 2010.

(Continued)

Primary Examiner — Ronald W Leja

(74) *Attorney, Agent, or Firm* — Pearne & Gordon LLP

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 269 days.

(21) Appl. No.: **13/939,893**

(22) Filed: **Jul. 11, 2013**

(65) **Prior Publication Data**

US 2015/0344151 A1 Dec. 3, 2015

Related U.S. Application Data

(62) Division of application No. 13/262,036, filed as application No. PCT/JP2010/002429 on Apr. 2, 2010, now Pat. No. 8,520,358.

(30) **Foreign Application Priority Data**

Apr. 2, 2009 (JP) 2009-090552

Dec. 9, 2009 (JP) 2009-279601

(51) **Int. Cl.**

H05F 1/00 (2006.01)

B64D 45/02 (2006.01)

(Continued)

(52) **U.S. Cl.**

CPC **B64D 45/02** (2013.01); **F16B 33/004**

(2013.01); **F16B 37/14** (2013.01); **F16B 39/01**


(2013.01);

(Continued)

(57) **ABSTRACT**

There are provided a lightning-resistant fastener and a cap, which, while assuring sufficient insulation properties, provide improved workability and highly stable quality to thereby enable a reduction in the manufacturing cost of an airframe, and a method of mounting the lightning-resistant fastener. A hole 32 is formed in a cap 30, and a screw groove 32a is formed in the hole 32. The configuration enables the cap 30 to be reliably and easily positioned and installed on a fastener member 24 and reliably prevents the cap 30 from coming off after the installation thereof. This improves the workability to reduce the production cost while assuring sufficient insulation properties and enables the cap 30 to be installed with stable quality irrespective of workers. Preferably, the cap 30 is made of a resin in view of mass producibility, weight reduction, and the like.

15 Claims, 9 Drawing Sheets

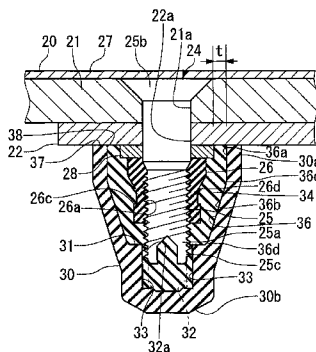

- (51) **Int. Cl.**
F16B 33/00 (2006.01)
F16B 37/14 (2006.01)
F16B 39/01 (2006.01)
F16B 39/02 (2006.01)
F16B 33/06 (2006.01)
- (52) **U.S. Cl.**
 CPC *F16B 39/021* (2013.01); *F16B 33/06*
 (2013.01); *Y10T 29/49835* (2015.01); *Y10T*
29/49947 (2015.01)

2009/0126973 A1* 5/2009 Martin Hernandez . B64D 45/02
 174/138 D
 2009/0147429 A1* 6/2009 Martin Hernandez . B64D 45/02
 361/218
 2009/0284427 A1* 11/2009 Ceecom H01Q 1/50
 343/705
 2010/0224724 A1 9/2010 Kamino et al.
 2012/0155987 A1* 6/2012 Watanabe F16B 37/14
 411/337

FOREIGN PATENT DOCUMENTS

(56) **References Cited**

U.S. PATENT DOCUMENTS

4,905,931 A * 3/1990 Covey F16B 33/004
 244/1 A
 5,175,665 A 12/1992 Pegg
 5,461,534 A * 10/1995 Gondot F16B 33/004
 174/2
 8,520,358 B2 * 8/2013 Bessho B64D 45/02
 361/218

JP 02-007398 A 1/1990
 JP 2009-227166 A 10/2009

OTHER PUBLICATIONS

English Translation of International Preliminary Report of Patent-ability of PCT/JP2010/002429; Nov. 15, 2011.
 Japanese Office action for Patent Application No. 2013-124329 dated Mar. 5, 2014.

* cited by examiner

FIG. 1

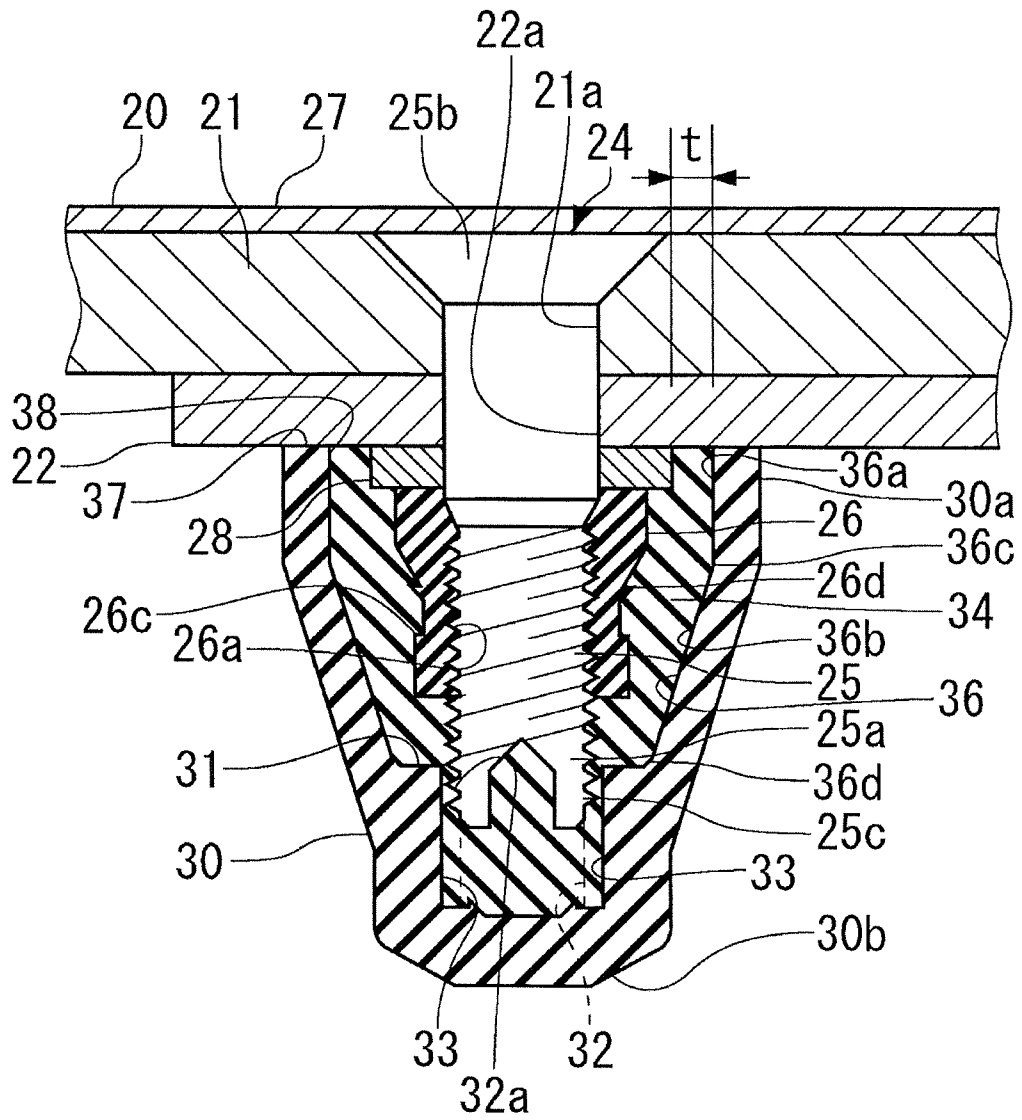


FIG. 2A

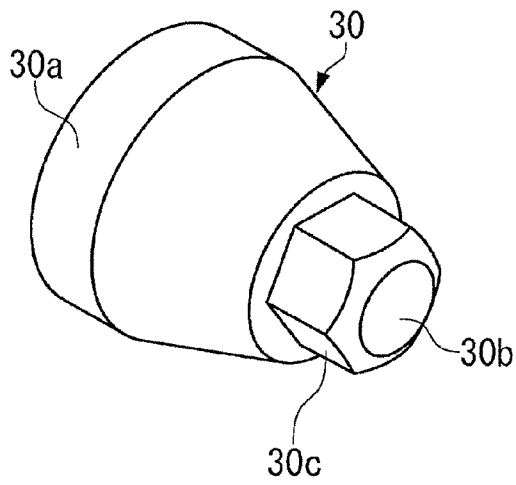


FIG. 2B

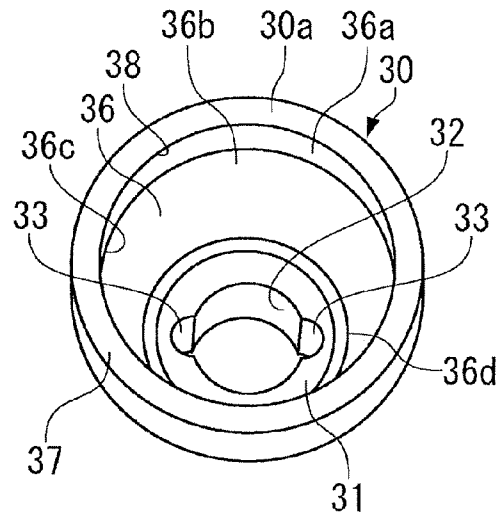


FIG. 3

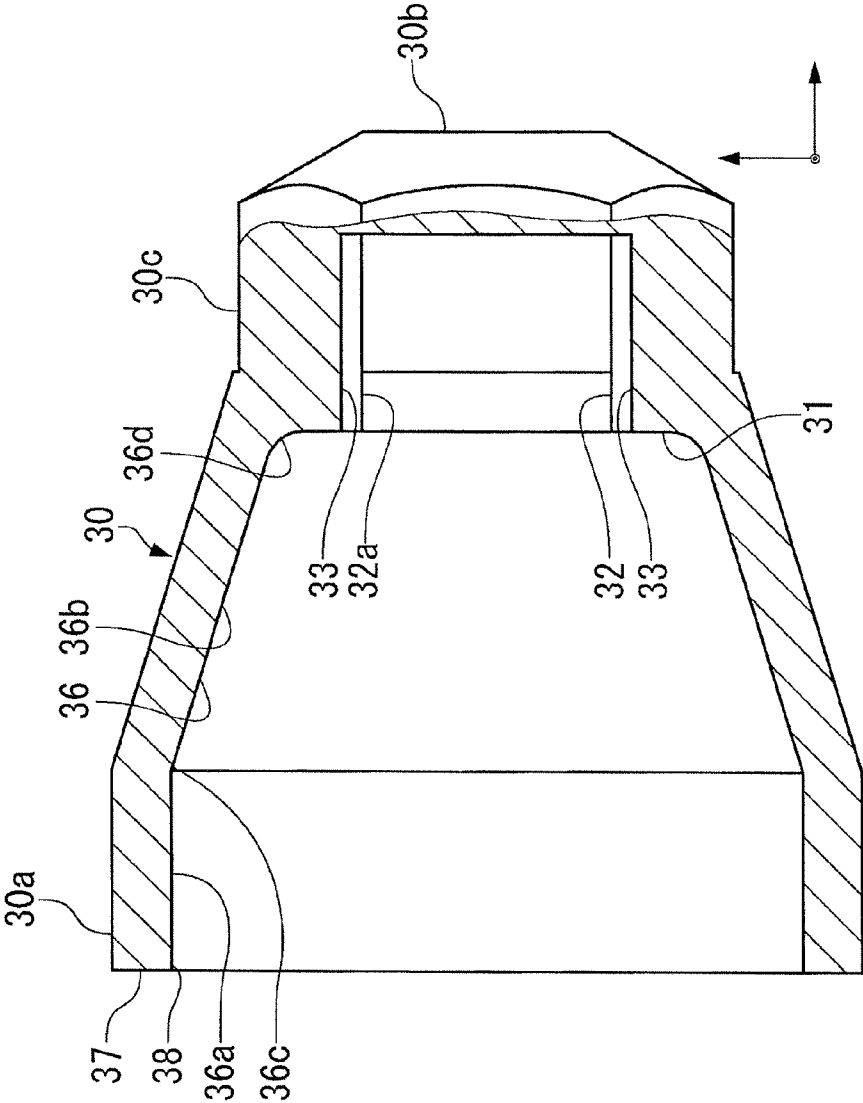


FIG. 4

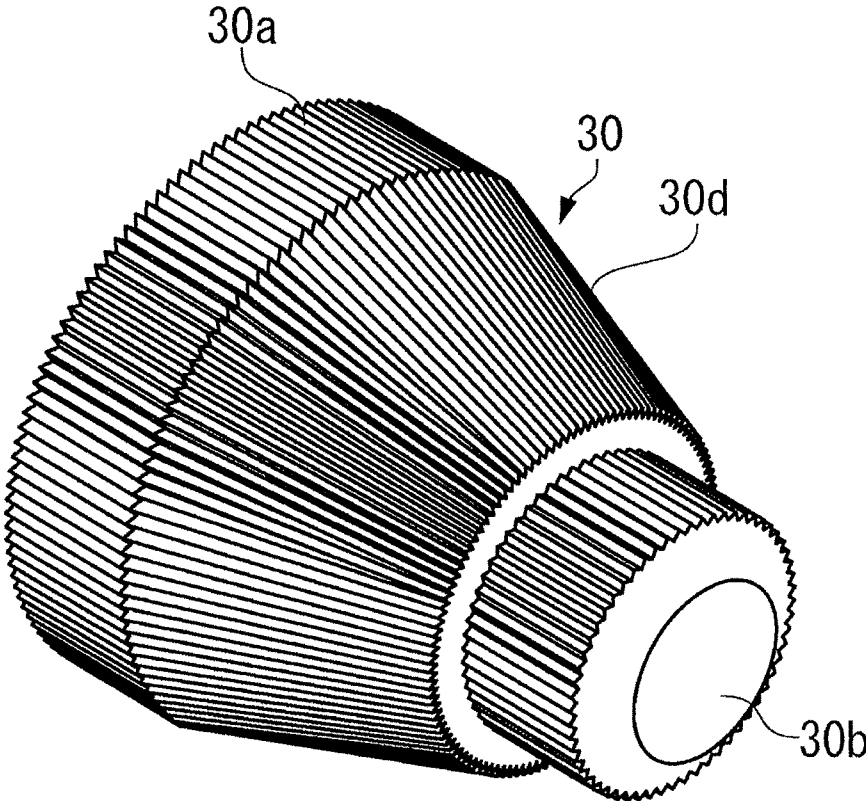


FIG. 5

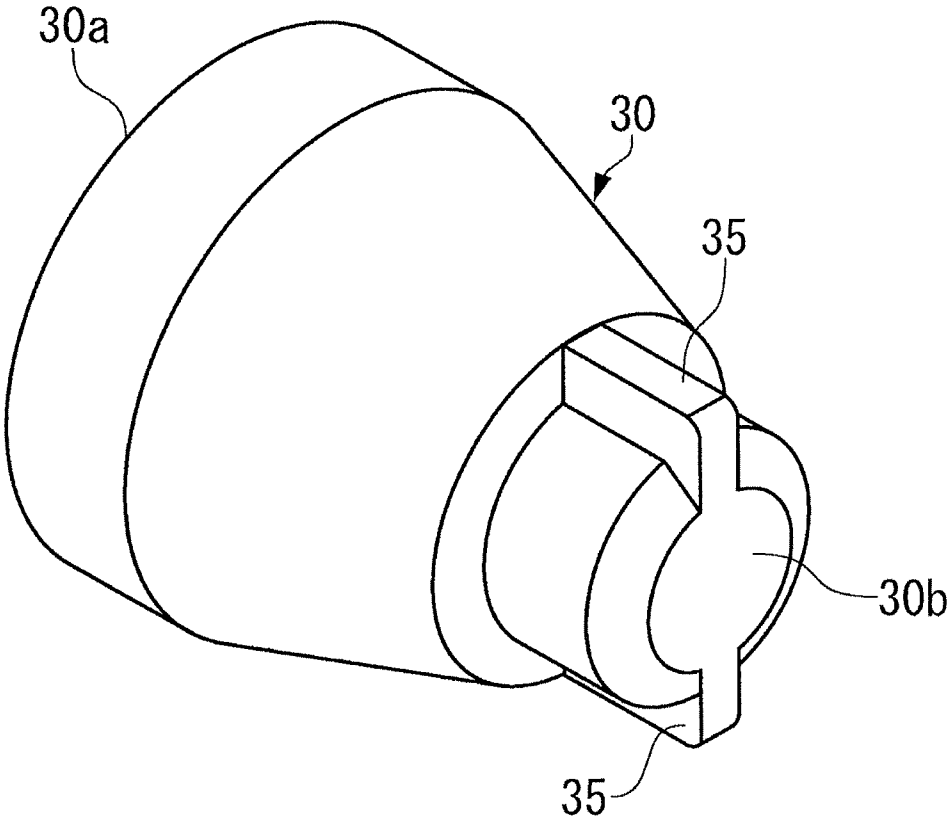


FIG. 6

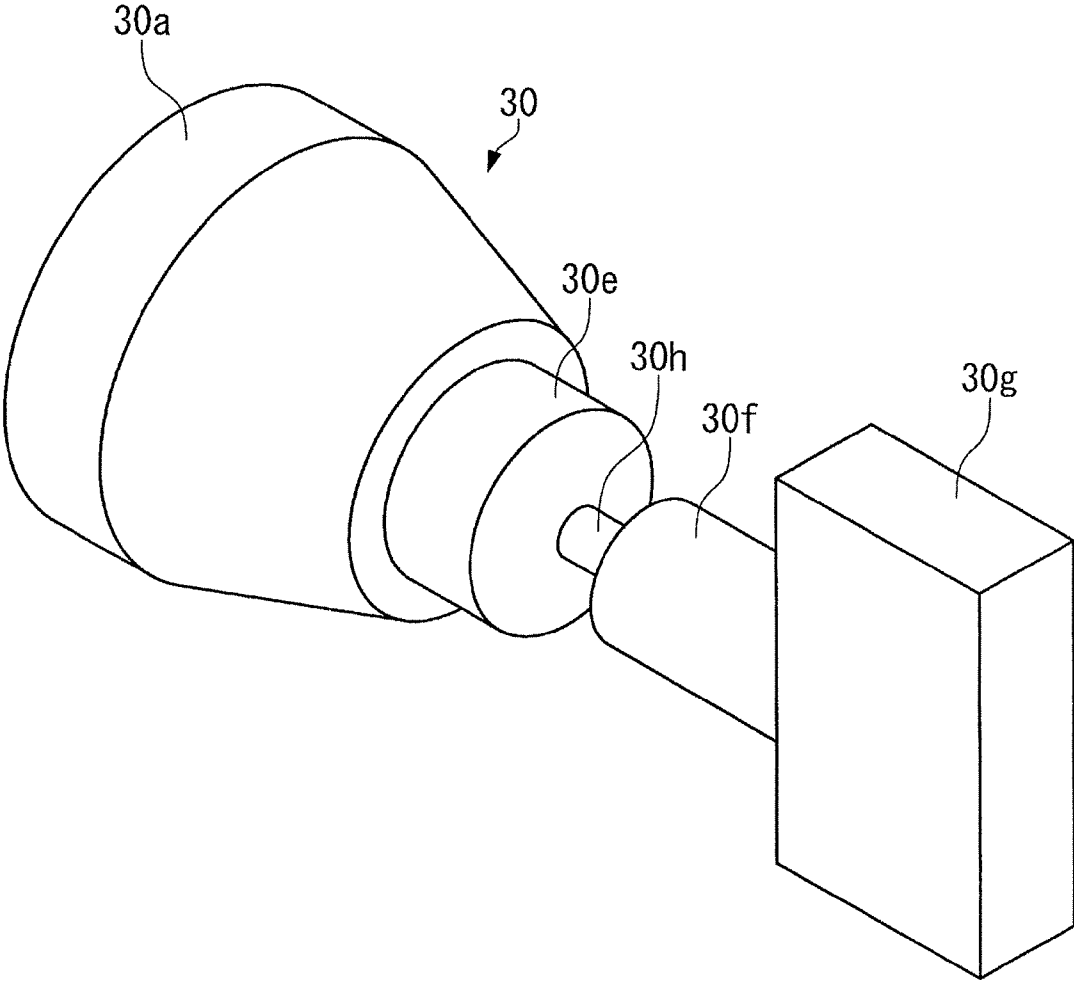


FIG. 7

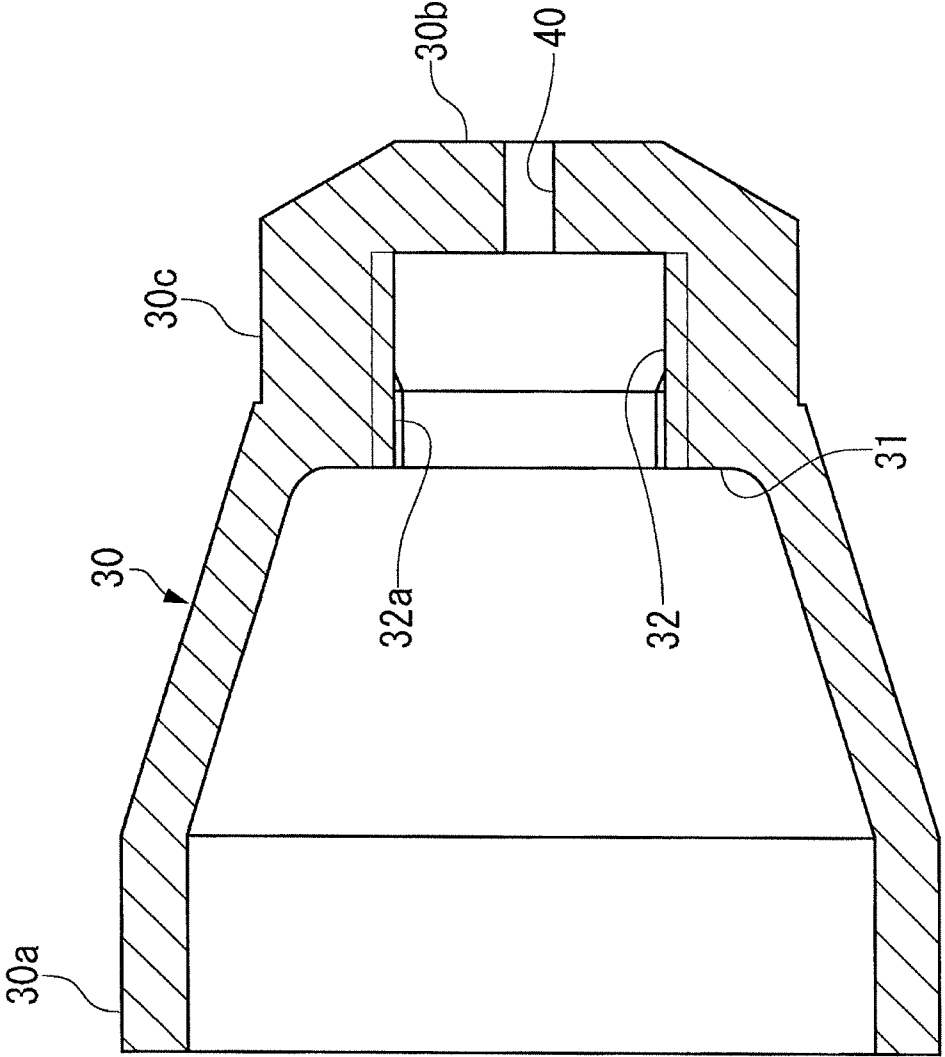


FIG. 9A
PRIOR ART


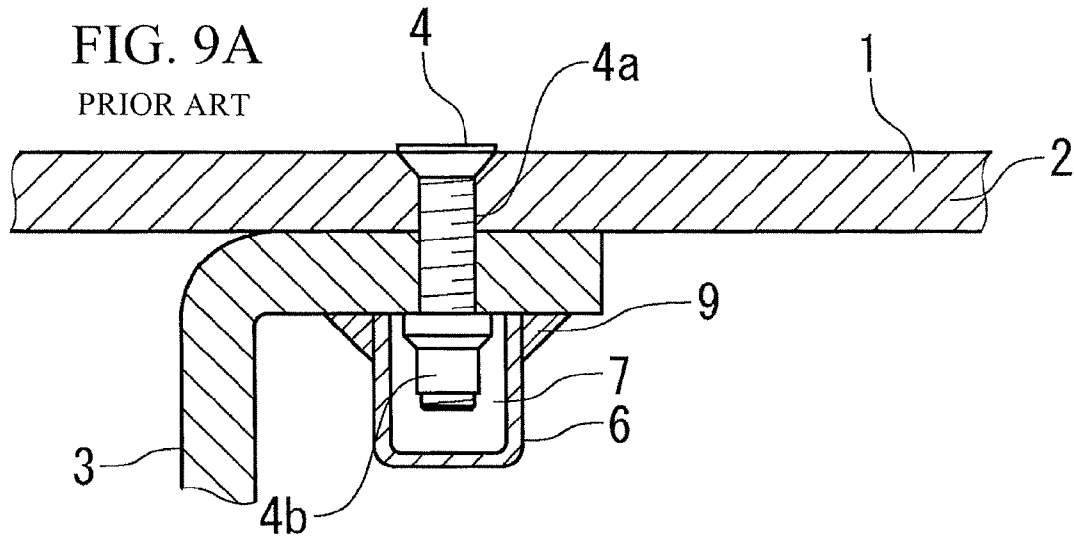


FIG. 9B
PRIOR ART

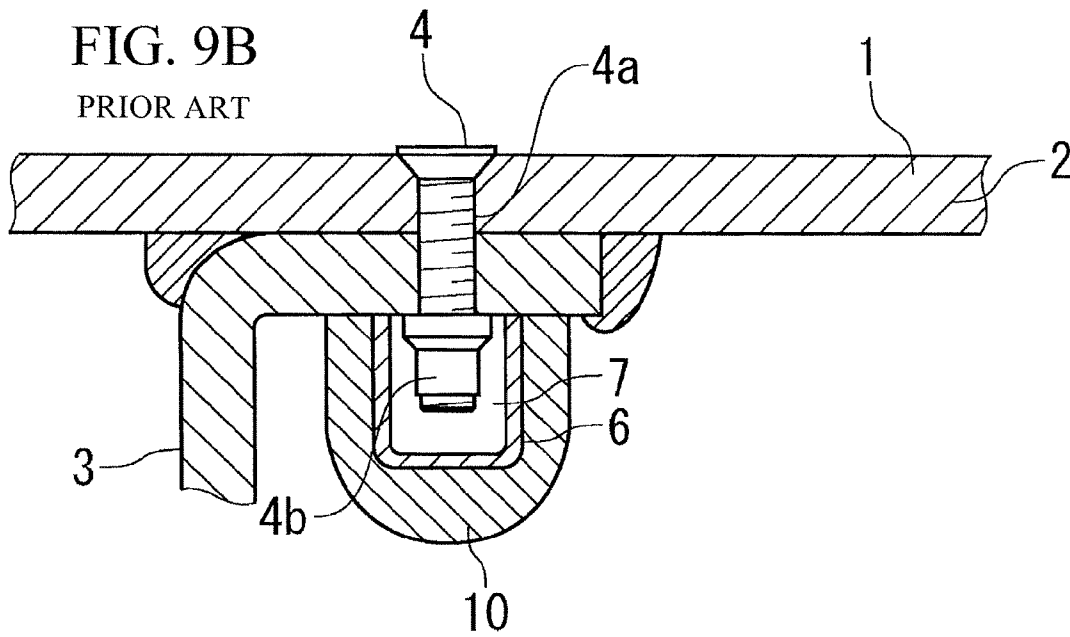

1

LIGHTNING-RESISTANT FASTENER, CAP, AND METHOD OF MOUNTING LIGHTNING-RESISTANT FASTENER

This application is a divisional/continuation of U.S. patent application Ser. No. 13/262,036 filed on Dec. 15, 2011, which is incorporated herein by reference on its entirety.

TECHNICAL FIELD

The present invention relates to a lightning-resistant fastener and a cap, which are used for an airframe of an aircraft, especially for a wing thereof, and a method of mounting a lightning-resistant fastener.

BACKGROUND ART

A wing constituting an airframe of an aircraft is of a hollow construction, and a wing surface panel forming a wing surface is fixed to a structural member existing in the wing by a fastener member (fastener).

The fastener member fastens the wing to the structural member by inserting a pin-shaped fastener main body into through holes, which have been formed in both the wing and the member attached to the wing, from the outside of wing, and by fixing the front end portion of the fastener main body by using a fixture from the interior side of the wing.

The aircraft must make thoroughgoing provisions against lightning strikes. In the case where the wing surface panel and the fastener member are made of different materials, at the time of lightning strikes, an arc discharge (spark) is produced in the direction extending along the interface between the wing surface panel and the fastener member by an electric potential difference between the wing surface panel and the fastener member. Since a fuel tank is housed in the internal space of the wing, it is necessary to reliably suppress the production of arc discharge at the time of lightning strikes.

To meet such necessity, a structure has conventionally been proposed in which, as shown in FIG. 9, on the inside of a wing 1, a cap 6 is installed in a state of being separate from a fastener main body 4a of a fastener member 4, which penetrates a first member 2 corresponding to the wing surface panel and a second member 3 installed within the wing, and a fixture 4b, and an air-gap 7 filled with air is formed between the cap 6 and the fastener main body 4a, the fixture 4b (for example, refer to Patent Literature 1).

CITATION LIST

Patent Document

Patent Document 1: Japanese Patent Laid-Open No. 2-7398

SUMMARY OF THE INVENTION

Technical Problems to be Solved by the Invention

However, the technique described in Patent Document 1 does not provide a structure in which the cap 6 can be positioned with respect to the fastener member 4, and the installation position of the cap 6 depends on the worker. Therefore, the center of the cap 6 and the center of the fastener member 4 may shift greatly. If in the air-gap 7, a place where a gap between the fastener member 4 and the cap 6 is narrow is produced, the function (insulation properties) of the cap 6 decreases. In the worst case, if the cap 6 is installed in a state

2

of being in contact with the fastener member 4, the function itself of the cap 6 may be impaired greatly.

The cap 6 is installed on the second member 3 with an adhesive 9 as shown in FIG. 9A, or is outer-peripherally covered with a rubber (insulating material) 10 as shown in FIG. 9B. Therefore, in the installation site, the bonding work or the coating work of the rubber 10 is required, so that the work takes much time and labor. Needless to say, the interior of the wing 1 of aircraft has a narrow space, and the above-described work performed at a secluded position provides very poor workability. Moreover, since the fastener member 4 is provided at several thousands to several ten thousands places throughout the wing 1, the deterioration in workability leads directly to the rise in cost.

Furthermore, the above-described work is what is called manual work, so that the work quality is easily varied depending on the worker, which also exerts an influence on the reliability.

The present invention has been made to solve the above-described technical problems, and accordingly an object thereof is to provide a lightning-resistant fastener and a cap, which, while assuring sufficient insulation properties, provide improved workability and highly stable quality to thereby enable a reduction in the manufacturing cost of a wing, and a method of mounting a lightning-resistant fastener.

Solution to the Problems

To achieve the above object, the present invention provides a lightning-resistant fastener comprising a fastener member, which is made of a conductive material, used for fastening a second member on the interior side of an airframe of an aircraft to a first member constituting the airframe; and a cap, which is made of an insulating material, installed so as to cover the fastener member projecting to the interior side of the airframe. In the lightning-resistant fastener, the fastener member comprises an engaging part in a portion projecting to the interior side of the airframe; and the cap comprises an engaged part engaged with the engaging part of the fastener member in the central portion of the inner peripheral surface thereof, and the cap is installed to the fastener member in a state in which the engaging part of the fastener member engages with the engaged part while a gap is provided between the cap and a portion of the fastener member other than the engaged part. By engaging the fastener with the engaged part formed in the cap as described above, the cap can be positioned to the center and installed to the fastener member easily and reliably. As the engaging part and the engaged part, a male screw and a female screw, a convex boss and a concave part corresponding to the convex boss, or the like can be used appropriately.

It is also effective to fill the gap between the cap and the fastener member with an insulating sealant.

The above-described lightning-resistant fastener can be applied to an airframe of an aircraft, not limited to a wing.

In the engaging part or the engaged part, a groove extending along the direction away from the second member is preferably formed. Thereby, when the fastener member is inserted into the engaged part of the cap, the excess of sealant filled in the engaged part can be pushed out through the groove.

The head part of cap may have a shape on which a tool for screwing the cap on the fastener member can be laid. Alternatively, if a worker turns the cap manually, non-slip work is preferably applied onto an outer peripheral surface of the cap.

3

Also, the cap may comprise a projecting knob part for a worker to turn the cap manually. At this time, the knob part is connected to the cap via a connecting part. If the connecting part is twisted off when the cap is screwed increasingly on the front end part of the fastener member by gripping the knob part and tightening torque thereof reaches a predefined level, the tightening torque of the cap can be controlled easily.

It is preferable that an inside diameter of the inner peripheral surface of the cap gradually decrease toward a side where the engaged part is formed, from an opening end side on the opposite side of the side where the engaged part is formed. Thereby, when the interior of the cap is filled with the sealant, a void can be prevented from being produced in the sealant. Also, when an impact or the like is applied to the cap, only the cap comes off, and the sealant may remain in the front end part of the fastener member as it is.

Also, on the opening end side of the cap, the thickness of the sealant in the radial direction of the cap is preferably set at a predefined value or more. Thereby, even when the cap comes off, the lightning-resistant performance can be assured by the sealant only.

By forming a step part or a flange part projecting toward the outer periphery side on an outer peripheral surface of the fastener member, even when the cap comes off, the sealant can be prevented from coming off the outer surface of the fastener member.

The adhesion strength between the cap and the sealant can also be set so as to be smaller than the adhesion strength between the sealant and the fastener member. Thereby, too, when an impact or the like is applied to the cap, only the cap comes off, and the sealant may remain in the front end part of the fastener member as it is.

The present invention can also provide a cap installed to a front end of a fastener member which fastens a first member and a second member together, wherein the cap is made of an insulating material and is of an umbrella shape; the cap comprises an engaged part on an inner peripheral surface of a top portion of the cap, the engaged part is engaged with an engaging part formed on the fastener member which penetrates the first member and the second member and projects on the second member side; and the cap is installed to the fastener member in a state in which the engaging part of the fastener member engages with the engaged part while a gap is provided between the cap and a portion of the fastener member other than the engaged part. Such a cap can be applied to not only an airframe including a wing of an aircraft made of a composite material but also a fastener member used for fastening members in any other application.

Also, the present invention can provide a method of mounting a lightning-resistant fastener, comprising the steps of causing a fastener main body to penetrate through a first member constituting an airframe of an aircraft and a second member attached to the first member on the interior side of the airframe from an outer periphery side of the airframe in a state in which the first member and the second member are laid on each other; attaching a fixture to the fastener main body from the interior side of the airframe; and engaging an engaged part of a cap with the fastener main body projecting from the fixture on the inside of the airframe by causing the fastener main body to penetrate from the outer periphery side of the airframe.

Also, the method can further comprise a step of filling a sealant on the inner periphery side of the cap, which is made of an insulating material and has an umbrella shape, and comprises the engaged part on an inner peripheral surface of a top portion thereof, before the engaged part of the cap is

4

engaged with a front end of the fastener main body after the fixture is attached to the fastener main body from the interior side of the airframe.

Advantageous Effects of Invention

According to the present invention, the workability is improved to reduce the production cost while sufficient insulation properties are assured, and the cap can be installed at the front end of the fastener member for fastening the second member to the first member with stable quality irrespective of workers.

Also, by filling the gap between the cap and the fastener member with an insulating sealant, the sealability of fastener member against fuel can be assured. Further, since the sealant has a very strong arc preventing effect, even in a state in which the cap is broken, the arc preventing effect is maintained, so that a double arc preventing function can be provided by the cap and the sealant.

BRIEF DESCRIPTION OF DRAWINGS

FIG. 1 is a sectional view of a lightning-resistant fastener in accordance with an embodiment of the present invention.

FIGS. 2A and 2B are perspective views of a cap.

FIG. 3 is a sectional view of the cap.

FIG. 4 is a perspective view showing an example in which an outer peripheral surface of a cap has been subjected to slitting processing.

FIG. 5 is a perspective view showing an example in which protrusions are provided in a head portion of a cap.

FIG. 6 is a perspective view showing an example in which a knob part is provided in a head part of a cap.

FIG. 7 is a sectional view showing another example of a cap.

FIG. 8 is a sectional view showing another example of the lightning-resistant fastener in accordance with an embodiment of the present invention.

FIG. 9A is a sectional view showing an example of a conventional lightning-resistant fastener.

FIG. 9B is a sectional view showing another example of a conventional lightning-resistant fastener.

DESCRIPTION OF EMBODIMENTS

The present invention will now be described in detail based on an embodiment shown in the accompanying drawings.

FIG. 1 is a sectional view of a part of a wing constituting an airframe of an aircraft, to which a lightning-resistant fastener, a cap and a method of mounting the lightning-resistant fastener in accordance with this embodiment are applied.

As shown in FIG. 1, a wing 20 comprises a wing panel (first member) 21 as the outer shell thereof. The wing panel 21 is, for example, made of CFRP (Carbon Fiber Reinforced Plastics), which is a composite material of a carbon fiber and a resin, or a metallic material such as an aluminum alloy. A structural member for reinforcement, a fuel tank, and various types of equipment, which are provided within the wing 20, are fixed to the wing panel 21 via a member (second member) 22 such as a stay. The stay is made of a metallic material such as an aluminum alloy. The member 22 such as the stay is installed on the wing panel 21 by using a fastener member 24.

The fastener member 24 comprises a pin-shaped fastener main body 25, a collar 26 mounted on the fastener main body 25 on the interior side of the wing 20, and a washer 28.

The fastener main body 25 and the collar 26 are generally made of a metallic material from the viewpoint of strength.

5

The pin-shaped fastener main body **25** comprises a screw groove (engaging part) **25a** on the front end portion thereof. The rear end portion of the pin-shaped fastener main body **25** is formed into a taper-shaped diameter increasing part **25b** in which the diameter increases from the front end portion side. This fastener main body **25** is inserted into holes **21a** and **22a**, which are formed penetratingly in the wing panel **21** and the member **22**, from the outside of the wing **20**. The front end portion of the pin-shaped fastener main body **25** is projected to the inside of the wing **20** in a state in which the diameter increasing part **25b** in the rear end portion is abutted against the taper surface of the hole **21a**.

The collar **26** has a tubular shape, and the inner peripheral surface thereof comprises a screw groove **26a** engaging with the screw groove **25a** of the fastener main body **25**. This collar **26** is screwed onto the screw groove **25a** of the fastener main body **25** projecting to the inside of the wing **20**. Thereby, the wing panel **21** and the member **22** are held between the diameter increasing part **25b** of the fastener main body **25** and the collar **26**, and thereby the member **22** is fixed to the wing panel **21**.

In this state, a front end part **25c** of the fastener main body **25** projects to the inner periphery side of the wing **20** from the collar **26**, and further a certain length of the screw groove **25a** is exposed to the inner periphery side of the wing **20** from the collar **26**.

If uncoated, the rear end portion of the fastener main body **25** is exposed to the surface of the wing **20**. Therefore, in the case where the wing **20** is made of a composite material, the whole surface of the wing **20**, and the rear end portion of the fastener main body **25** are covered with a paint film **27** made of a paint containing Cu (copper). Thereby, an electric current is prevented from concentrating on the fastener member **24** at the time of lightning strikes.

Also, to protect the fastener main body **25** from a direct strike of lightning, it is preferable that the surface of the fastener main body **25** be coated with an insulating material such as a resin.

The washer **28** has an annular shape with a predetermined thickness, and is made of an insulating material such as polyimide. By constructing the washer **28** of an insulating material, an arc discharge is prevented from being produced at the interface between the member **22** and the washer **28**.

In the internal space of the wing **20**, a cap **30** is mounted on the fastener member **24**, and the interior of the cap **30** is filled with an insulating sealant **34**.

As shown in FIGS. 2 and 3, the cap **30** has a circular cross section, and has a shape such that only the one end part **30a** side is open, and the inside diameter and the outside diameter thereof decrease gradually toward the other end part **30b** side. This cap is preferably made of an insulating resin such as PPS (polyphenylene sulfide resin), polyimide, PEEK (polyether ether ketone resin), and nylon resin.

On the inner peripheral surface on the other end part **30b** side (hereinafter, the inner peripheral surface is referred to as a bottom surface **31**) of the cap **30**, a bottomed hole (engaged part) **32** having a circular cross section is formed. The inner peripheral surface of the hole **32** comprises a screw groove **32a** engaged with the screw groove **25a** of the fastener main body **25**. This cap **30** is configured so that in a state in which the end surface of the one end part **30a** is pushed against the member **22**, the front end part **25c** of the fastener main body **25** is inserted into the hole **32**. At this time, the screw groove **32a** of the cap **30** engages with the screw groove **25a** of the fastener main body **25**, whereby the cap **30** can be positioned and fixed to the fastener member **24** easily and reliably.

6

For this cap **30**, the inside diameter of an inner peripheral surface **36** is set so that when the cap **30** is installed on the fastener member **24**, a predetermined gap is formed with respect to the washer **28**, the fastener main body **25**, and the collar **26**. In particular, the cap **30** is formed so that in the one end part **30a** on the opening side of the cap **30**, a gap not smaller than a predetermined dimension t can be assured between the inner peripheral surface of the cap **30** and the washer **28** and the fastener main body **25**.

For the inner peripheral surface **36** of the cap **30**, the one end part **30a** side thereof is formed into a straight part **36a** in which the inside diameter thereof is constant, and further a tapered part **36b** in which the inside diameter thereof decreases gradually is formed from the straight part **36a** toward the hole **32**.

A corner part **36c** where the straight part **36a** and the tapered part **36b** are adjacent to each other and a corner part **36d** where the tapered part **36b** and the hole **32** are adjacent to each other are of a rounded shape having a predetermined radius of curvature.

Thus, the inner peripheral surface **36** of the cap **30** is formed into a surface continuous smoothly from the straight part **36a**, to the corner part **36c**, the tapered part **36b**, and the corner part **36d**. Thereby, when the cap **30** is filled with the sealant **34**, air is prevented from being caught in the sealant **34** or a void is prevented from being produced in the sealant **34** on the inner peripheral surface **36** (especially, in the corner parts **36c** and **36d**).

In the state in which the cap **30** is installed on the fastener member **24**, the interior of the cap **30** is filled with the insulating sealant **34**. By the interposition of the sealant **34** between the inner peripheral surface of the cap **30** and the fastener main body **25** and the collar **26**, the insulation properties between the cap **30** and the fastener member **24** are further enhanced. In the one end part **30a** on the opening side of the cap **30**, since the sealant **34** between the inner peripheral surface **36** of the cap **30** and the washer **28** and the fastener main body **25** has a thickness not smaller than the predetermined dimension t , the insulation properties at the interface between the inner peripheral surface **36** of the cap **30** and the washer **28** and the fastener main body **25** can be assured.

When the cap **30** is installed on the fastener member **24** for fastening the wing panel **21** and the member **22** together, the interior of the cap **30** is beforehand filled with the uncured sealant **34**. In the internal space of the wing **20**, the cap **30** is pushed against the fastener main body **25** of the fastener member **24** projecting to the inside.

At this time, the sealant **34** filled in the cap **30** overflows through the opening portion of the one end part **30a** of the cap **30**. It is preferable that the sealant **34** overflow from the entire periphery of the cap **30** so that the sealant **34** spreads uniformly to the entire zone in the cap **30**. For this purpose, it is preferable that a surface **37** of the one end part **30a** of the cap **30** be a flat and smooth surface, and also it is preferable that an inner peripheral edge part **38** of the one end part **30a** be formed in such a manner that burrs, flashes and the like are not produced.

When the cap **30** is pushed against the fastener main body **25** increasingly, since the hole **32** is formed in the cap **30**, the fastener member **24** can be positioned reliably and easily at the center of the cap **30**. Thereby, a phenomenon can be prevented that the cap **30** and the fastener member **24** shift from each other and the gap between the cap **30** and the fastener member **24** becomes narrow depending on the place, and also a phenomenon can be prevented that the fastener member **24** comes into direct contact with the cap **30**.

For ease of positioning of the cap **30** relative to the fastener member **24**, it is also effective to make the peripheral edge portion of the hole **32** a tapered surface in which the inside diameter thereof decreases gradually toward the depth side of the hole **32**.

After the hole **32** of the cap **30** has been pushed against the fastener main body **25**, the cap **30** is turned to be screwed on the fastener main body **25**.

At this time, if the interior of the hole **32** is filled with the sealant **34**, the front end part **25c** of the fastener main body **25** is inserted into the hole **32**. When the fastener main body **25** intrudes further into the hole **32** with the screwing of the cap **30**, the sealant **34** in the hole **32** has nowhere to go, and the pressure of the sealant **34** increases, so that the front end part of the fastener main body **25** cannot sometimes be inserted to a predetermined depth of the hole **32**.

Accordingly, it is preferable that a groove **33** extending along the center axis direction of the hole **32** be formed at least at one place in the inner peripheral surface of the hole **32** of the cap **30**. In the example shown in FIGS. **2** and **3**, two grooves **33** are formed in the hole **32**. Needless to say, three or more grooves **33** can be formed.

If the groove **33** is formed in the hole **32** as described above, when the front end part of the fastener main body **25** is inserted into the hole **32**, the excess sealant in the hole **32** is pushed out of the hole **32** through the groove **33**. Thereby, a void is prevented from remaining in the sealant **34** in the hole **32**, and also the insertion of the fastener main body **25** into the hole **32**, that is, the installation of the cap **30** on the fastener member **24** can be accomplished easily.

When the cap **30** is screwed until the end surface of the one end part **30a** of the cap **30** is pushed against the member **22**, the screwing of the cap **30** is finished. In this state, the screw groove **25a** formed on the fastener main body **25** engages with the screw groove **32a** formed in the hole **32** of the cap **30**, so that the cap **30** is reliably and fixedly held to the fastener member **24**.

Also, if the filling sealant **34** is cured, this sealant **34** also achieves an effect of fixing the cap **30** to the fastener member **24**.

Thus, the fastener member **24** on which the cap **30** is installed is a lightning-resistant fastener.

If something hits against the outer peripheral surface of the cap **30**, the cap **30** may be removed by the hitting impact or the like. Even in such a case, it is preferable that the cured sealant **34** do not come off together with the cap **30**, and the sealant **34** be kept in a state of covering the head portion of the fastener main body **25**.

For this purpose, it is preferable that the material of the sealant **34** be selected so that the adhesion strength between the cap **30** and the sealant **34** is smaller than the adhesion strength between the sealant **34** and the fastener member **24**. When the adhesion strength between the cap **30** and the sealant **34** is smaller than the adhesion strength between the sealant **34** and the fastener member **24** as described above, even if an impact or the like is applied to the cap **30**, the cap **30** separates from the sealant **34** and only the cap **30** comes off, and the fastener member **24** is kept in a state of being covered with the sealant **34**, so that the lightning-resistant performance can be maintained.

To prevent the sealant **34** from coming off the fastener **24**, for example, a step part **26c** expanding toward the outer periphery side, a flange part **26d**, or the like may be formed on the outer peripheral surface of the collar **26**.

The cap **30** may be screwed by a worker by using a tool or may be screwed by hand.

For example, in the case where the cap **30** is screwed by a worker by using a tool, as shown in FIGS. **2** and **3**, a head part **30c** of the other end part **30b** of the cap **30** can be formed into a hexagonal shape, a hexagon socket shape, or the like corresponding to the shape of tool.

Also, in the case where the cap **30** is screwed by a worker by hand, as shown in FIG. **4**, an outer peripheral surface **30d** of the cap **30** can be formed so as to be non-slip surface by being subjected to slitting processing, knurling processing, diamond cutting processing, or the like. In the example shown in FIG. **4**, the whole of the outer peripheral surface **30d** of the cap **30** is subjected to slitting processing. Needless to say, however, only a part thereof may be subjected to slitting processing. Furthermore, as shown in FIG. **5**, a plurality of (two or more) protrusions **35** may be formed at intervals in the circumferential direction in the other end part **30b** of the cap **30**. The number and the shapes of the protrusions **35** are not subject to any special restriction.

Additionally, as shown in FIG. **6**, a head part **30e** of the cap **30** can be provided with a knob part **30g** having an appropriate shape via a rod part **30f** having a predetermined outside diameter. In this configuration, a worker installs the cap **30** on the fastener member **24** by turning the knob part **30g**. A part **30h** of the rod part **30f** may be thinned to set the strength thereof such that the thinned part **30h** of the rod part **30f** is twisted off when a predefined tightening torque of the cap **30** is reached. Thereby, the worker can install the cap **30** by tightening it reliably with the predefined torque.

As described above, the cap comprises the hole **32**, and the screw groove **32a** is formed in the hole **32**, whereby the cap **30** can be positioned and installed reliably and easily on the fastener member **24**, and even after installation, the cap can be reliably prevented from coming off.

Also, if the cap **30** has been screwed on the fastener member **24**, the cure of the sealant **34** need not be waited, and the installation work of the cap **30** can be performed rapidly.

Thereby, while the insulation properties are assured reliably, the workability is improved to reduce the manufacturing cost, and the cap **30** can be installed with stable quality irrespective of workers.

Also, if the cap **30** is made of a resin, the mass production thereof is easy to do, and therefore the manufacturing cost can be reduced. Also, the wall thickness of the cap **30** can be controlled easily by mass production, so that the weight of the cap **30** can be reduced.

The above-described cap **30** can also be formed by cutting processing, but is preferably formed by injection molding considering the mass producibility. In the case of injection molding, it is difficult to form the screw groove **32a** in the hole **32** (after formation, the cap **30** must be removed by being rotated), so that the screw groove **32a** may be formed by screwing a heli-sert in the hole **32**.

In the above-described embodiment, by forming the grooves **33** in the hole **32**, the excess of the sealant **34** filled in the hole **32** is pushed out. However, the configuration is not limited to this one. For example, as shown in FIG. **7**, a through hole **40** may be formed in the head part **30c** of the cap **30** so that the excess sealant **34** is pushed out to the outside of the cap **30** via this through hole **40**.

Also, in the above-described embodiment, the cap **30** is screwed on the screw groove **25a** formed in the front end part of the fastener main body **25** of the fastener member **24**. However, other different configurations may be adopted if the cap **30** is screwed on a portion projecting to the inside of the wing **20** of the fastener member **24**.

For example, as shown in FIG. **8**, a screw groove **26b** may be formed on the outer peripheral surface of the collar **26**

installed on the fastener main body **25** on the interior side of the wing **20** so that the screw groove **32b** formed on the inner peripheral surface of the cap **30** is screwed on this screw groove **26b**.

Further, the configuration is not limited to one in which the cap **30** is screwed on the screw groove **25a** formed in the front end part of the fastener main body **25** of the fastener member **24**. The configuration can be made such that the cap **30** is fitted on the front end part of the fastener main body **25**. In this case, for example, a configuration can be adopted in which a groove or a ridge continuous in the circumferential direction is formed on the outer peripheral surface of the front end part of the fastener main body **25**, and a convex or a protrusion engaging with the groove of the fastener main body **25** is formed or a groove engaging with the ridge of the fastener main body is formed, whereby the cap **30** is fitted on the fastener main body **25**.

Besides, the configurations described in the above embodiment can be selected or can be changed as appropriate to other configurations without departing from the gist of the present invention.

REFERENCE SIGNS LIST

20 . . . wing, **21** . . . wing panel (first member), **21a** . . . hole, **22** . . . member (second member), **24** . . . fastener member, **25** . . . fastener main body, **25a** . . . screw groove (engaging part), **25b** . . . diameter increasing part, **25c** . . . front end part, **26** . . . collar, **26a** . . . screw groove, **30** . . . cap, **30a** . . . one end part, **30b** . . . the other end part, **30c** . . . head part, **30d** . . . outer peripheral surface, **30e** . . . head part, **30f** . . . rod part, **30g** . . . knob part, **31** . . . bottom surface, **32** . . . hole (engaged part), **32a** . . . screw groove, **33** . . . groove, **34** . . . sealant, **35** . . . protrusion, **40** . . . through hole

The invention claimed is:

- 1.** A lightning-resistant fastener comprising:
 - a fastener main body, which penetrates through a first member and a second member, and projects on a side of the second member, the first member constituting an airframe of an aircraft and the second member being located on an interior side of the airframe,
 - a collar, which is mounted on the fastener main body and fastens the second member to the first member, and
 - a cap for covering the fastener main body and the collar on the side of the second member, the cap being made of an insulating material, the cap including:
 - a bottomed hole formed on an inner peripheral surface of the cap, the bottomed hole for receiving a front end part of the fastener main body,
 - a groove formed at least at one place on an inner peripheral surface of the bottomed hole of the cap, the groove extending parallel to a center axis of the bottomed hole, and
 - a thickness of a top of the cap is larger than a thickness of a part of the cap that is formed on an opening end side of the cap that faces the second member, wherein the cap is filled with an insulating sealant, and wherein the fastener main body comprises a screw groove, the screw groove projecting from the collar to contact the insulating sealant.
- 2.** The lightning-resistant fastener according to claim **1**, wherein the second member is made of a metallic material.

3. The lightning-resistant fastener according to claim **1**, further comprising a washer which is held between the second member and the collar.

4. The lightning-resistant fastener according to claim **3**, wherein the washer is made of an insulating material.

5. The lightning-resistant fastener according to claim **1**, wherein the fastener main body is made of a metallic material, and the collar is made of a metallic material.

6. The lightning-resistant fastener according to claim **1**, wherein the collar comprises, on an outer peripheral surface thereof, a step part or a flange part projecting toward an outer periphery side of the collar.

7. The lightning-resistant fastener according to claim **1**, wherein the fastener main body is made of a metallic material, and a surface of the fastener main body is coated with an insulating material.

8. An aircraft comprising the lightning-resistant fastener according to claim **1**.

9. The aircraft according to claim **8**, wherein the first member is a wing panel.

10. The aircraft according to claim **8**, wherein the first member is made of CFRP (Carbon Fiber Reinforced Plastics) and the fastener main body is made of a metallic material, and a rear end portion of the fastener main body is covered with a paint film which is formed on a surface of the first member.

11. The aircraft according to claim **10**, wherein the paint film is made of a paint containing copper.

12. A method of mounting a lightning-resistant fastener, comprising the steps of:

- causing a fastener main body with a screw groove to penetrate through a first member constituting an airframe of an aircraft and a second member attached to the first member on an interior side of the airframe from an outer side of the airframe in a state in which the first member and the second member are laid on each other;
- mounting a collar on the fastener main body from an interior side of the airframe so as to project the screw groove of the fastener main body from the collar; and
- mounting a cap made of an insulating material so as to cover the fastener main body and the collar, wherein the cap is mounted in a state that the cap is filled with an uncured insulating sealant and thereby the screw groove projecting from the collar contacts the sealant, wherein the cap comprises, on an inner peripheral surface of the cap, a bottomed hole for receiving a front end part of the fastener main body,
- a groove extending along a center axis direction of the hole is formed at least at one place in an inner peripheral surface of the hole of the cap, and
- a thickness of a top of the cap is larger than a thickness of a part of the cap, the part is formed on an opening end side of the cap so as to face the second member.

13. The method according to claim **12**, wherein the cap is mounted so that a one end part of the cap is in contact with a surface of the second member.

14. The method according to claim **12**, wherein the collar is mounted on the fastener main body after a washer is mounted on the fastener main body from the interior side of the airframe.

15. The method according to claim **14**, wherein the washer is made of an insulating material.