

(19) AUSTRALIAN PATENT OFFICE

(54) Title
Process to prepare a lubricating base oil

(51)⁶ International Patent Classification(s)
C10G 65/16 (2006.01)20060101AFI2006010
C10G 65/16 1BHAU
PCT/EP02/02452

(21) Application No: 2002253100 (22) Application Date: 2002 .03 .05

(87) WIPO No: W002/070631

(30) Priority Data

(31) Number	(32) Date	(33) Country
01400561.5	2001 .03 .05	EP

(43) Publication Date : 2002 .09 .19

(43) Publication Journal Date : 2003 .03 .13

(71) Applicant(s)
Shell Internationale Research Maatschappij B.V.

(72) Inventor(s)
Germaine, Gilbert Robert Bernard

(74) Agent/Attorney
Spruson & Ferguson, Level 35 St Martins Tower 31 Market Street, Sydney, NSW, 2000

(56) Related Art
EP 0776959

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
12 September 2002 (12.09.2002)


PCT

(10) International Publication Number
WO 02/070631 A3

- (51) International Patent Classification: **C10G 65/16** (81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, IR, IT, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LI, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZM, ZW.
- (21) International Application Number: PCT/EP02/02452
- (22) International Filing Date: 5 March 2002 (05.03.2002)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data: 01400561.5 5 March 2001 (05.03.2001) EP
- (71) Applicant (for all designated States except US): **SHELL INTERNATIONALE RESEARCH MAATSCHAPPIJ B.V.** [NL/NL]; Carel van Bylandtlaan 30, NL-2596 HR The Hague (NL).
- (84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NI, SN, TD, TG).
- (72) Inventor; and
(75) Inventor/Applicant (for US only): **GERMAINE, Gilbert, Robert, Bernard** [FR/FR], Route Departementale n° 3, F-76650 Petit Couronne (FR).
- Published:
with international search report
- (88) Date of publication of the international search report:
24 July 2003

[Continued on next page]

(54) Title: PROCESS TO PREPARE A LUBRICATING BASE OIL

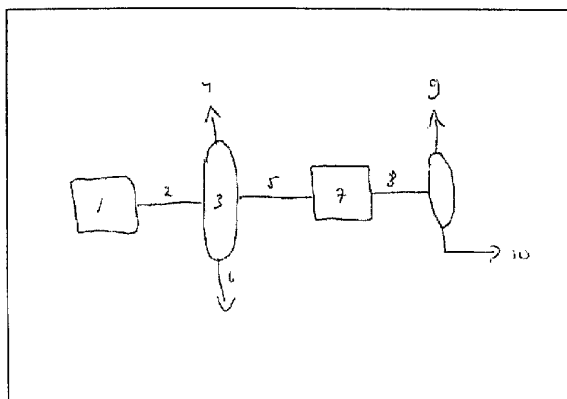

(57) Abstract: Process to prepare two or more base oil grades, which base oil grades having different kinematic viscosity's at 100°C from a waxy paraffinic Fischer-Tropsch product having a content of non-cyclic iso-paraffins of more than 70 wt% by (a) obtaining from the waxy paraffinic Fischer-Tropsch product a distillate fraction having a viscosity corresponding to one of the desired base oil products, (b) performing a catalytic dewaxing step using the distillate fraction obtained in step (a) as feed, (c) separating the lower boiling compounds from the dewaxed product obtained in step (b) in order to obtain the desired base oil, and (d) repeating steps (a)-(c) for each base oil.

WO 02/070631 A3



For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

PROCESS TO PREPARE A LUBRICATING BASE OIL

The invention is directed to a process to prepare a base oil from a waxy paraffinic Fischer-Tropsch product having a content of non-cyclic iso-paraffins of more than 80 wt%.

5 Such a process is known from EP-A-776959. This publication describes a process wherein the high boiling fraction of a Fischer-Tropsch synthesis product is first hydroisomerised in the presence of a silica/alumina supported Pd/Pt catalyst. The isomerised product having a
10 content of non-cyclic iso-paraffins of more than 80 wt% is subsequently subjected to a pour point reducing step. The disclosed pour point reducing step in one of the examples is a catalytic dewaxing step performed in the presence of a silica-supported dealuminated ZSM-23
15 catalyst at 310 °C.

A disadvantage of such a process is that only one grade of base oils is prepared. A next disadvantage is that the hydroisomerisation step is performed on a narrow boiling range fraction of a Fischer-Tropsch synthesis
20 product, which hydroisomerisation step is especially directed to prepare a base oil precursor fraction having the desired properties. The hydroisomerisation process step can also yield valuable large volumes of middle distillates next to base oil precursor fractions if the
25 feed would also include more lower boiling compounds. There is thus a desire to prepare base oils from a waxy paraffinic fraction as obtainable from a hydro-isomerisation process step, which yields both middle distillates, such as naphtha, kerosine and gas oil, and
30 the waxy paraffinic fraction having a content of non-cyclic paraffins of more than 80 wt%. There is also a

desire to have a flexible process wherein two or more base oils having different viscosity properties are obtained of excellent quality.

5 The object of the present invention is to provide a process wherein two or more high quality base oils are prepared having different viscosities from a waxy Fischer-Tropsch product.

10 The following process achieves this object. Process to prepare two or more base oil grades, which base oil grades having different kinematic viscosities at 100 °C from a waxy paraffinic Fischer-Tropsch product having a content of non-cyclic iso-paraffins of more than 70 wt% by

15 (a) obtaining from the waxy paraffinic Fischer-Tropsch product a distillate fraction having a viscosity corresponding to one of the desired base oil products, (b) performing a pour point reducing step using the distillate fraction obtained in step (a) as feed, (c) optionally separating the lower boiling compounds
20 from the dewaxed product obtained in step (b) in order to obtain the desired base oil, and (d) repeating steps (a)-(c) for each base oil.

Applicants found that by performing the process in the afore mentioned manner a haze free base oil grade
25 having also other excellent quality properties can be prepared. A further advantage is that in step (c) no higher boiling compounds need to be removed. Thus an energy consuming distillation step can be omitted. The advantages are even higher when two or more base oils are
30 prepared having a difference in kinematic viscosity at 100 °C of less than 2 cSt.

The waxy paraffinic Fischer-Tropsch product having the high content of non-cyclic iso-paraffins of more than 70 wt%, preferably more than 80 wt%, can be obtained by
35 well-known processes, for example the so-called

commercial Sasol process, the Shell Middle Distillate Process or by the non-commercial Exxon process. These and other processes are for example described in more detail in EP-A-776959, EP-A-668342, US-A-4943672, US-A-5059299, 5 WO-A-9934917 and WO-A-9920720. The process will generally comprise a Fischer-Tropsch synthesis and a hydroisomerisation step as described in these publications. The hydroisomerisation step is needed to obtain the required content of non-cyclic iso-paraffins in the feed.

10 In step (a) a distillate fraction having a viscosity corresponding to one of the desired base oil products is obtained from the waxy paraffinic Fischer-Tropsch product. Step (a) is suitably performed by means of distillation of a hydroisomerisation product. The 15 distillation step may include a first distillation at about atmospheric conditions, preferably at a pressure of between 1.2-2 bara, wherein lower boiling fractions, for example naphtha, kerosine and gas oil are separated from a higher boiling fraction. The higher boiling fraction, 20 of which suitably at least 95 wt% boils above 350 °C, preferably above 370 °C, is subsequently further separated in a vacuum distillation step wherein a vacuum gas oil fraction, the distillate base oil precursor fraction and a higher boiling fraction are obtained. The 25 vacuum distillation is suitably performed at a pressure of between 0.001 and 0.05 bara. When the waxy paraffinic Fischer-Tropsch product is a high boiling mixture, having an initial boiling point of between 330 and 400 °C, an atmospheric distillation step may suitably be omitted.

30 The distillate fraction, or the distillate base oil precursor fraction as obtained in step (a), has a viscosity corresponding to the desired viscosity of the base oil product.

35 For targeted base oils having a kinematic viscosity at 100 °C of between 4.5 and 6 cSt the kinematic

viscosity at 100 °C of the distillate fraction is preferably between 0.05 and 0.3 cSt lower than the target viscosity of the base oil. More preferably the kinematic viscosity at 100 °C of the distillate fraction as
5 obtained in step (a) is between $0.8 \cdot P$ and $1.2 \cdot P$, wherein

$$P = vK@100p - \Delta PP/200.$$

In the above formula $vK@100p$ is the kinematic viscosity at 100 °C of the base oil product as to be obtained in step (c) expressed in centistokes and ΔPP is the absolute
10 difference in pour point of said fraction obtained in step (a) and said product obtained in step (c) in degrees Celsius. Even more preferably said viscosity is between $0.9 \cdot P$ and $1.1 \cdot P$ and most preferably about 1.

The kinematic viscosity at 100 °C of the distillate
15 fraction is preferably between 3 and 10 cSt. Suitable distillate fractions obtained in step (a) have a T10 wt% boiling point of between 200 and 450 °C and a T90 wt% boiling point of between 300 and 650 more preferably between 300 and 550 °C.

In a preferred embodiment a first base oil grade
20 having a kinematic viscosity at 100 °C of between 3.5 and 4.5 cSt and a second base oil grade having a kinematic viscosity at 100 °C of between 4.5 and 5.5 cSt are advantageously prepared in high yields by performing
25 step (a) in a first mode (v1) to obtain a base oil precursor fraction having a kinematic viscosity at 100 °C corresponding to the first base oil grade and in a second mode (v2) to obtain a base oil precursor fraction having a kinematic viscosity at 100 °C corresponding to the
30 second base oil grade. By performing the pour point reducing step (b) separately on the first and second base oil precursor fractions high quality base oils can be obtained.

In step (b) the distillate base oil precursor fraction obtained in step (a) is subjected to a pour point reducing treatment. With a pour point reducing treatment is understood every process wherein the pour point of the base oil is reduced by more than 10 °C, preferably more than 20 °C, more preferably more than 25 °C.

The pour point reducing treatment can be performed by means of a so-called solvent dewaxing process or by means of a catalytic dewaxing process. Solvent dewaxing is well known to those skilled in the art and involves admixture of one or more solvents and/or wax precipitating agents with the base oil precursor fraction and cooling the mixture to a temperature in the range of from -10 °C to -40 °C, preferably in the range of from -20 °C to -35 °C, to separate the wax from the oil. The oil containing the wax is usually filtered through a filter cloth which can be made of textile fibres, such as cotton; porous metal cloth; or cloth made of synthetic materials. Examples of solvents which may be employed in the solvent dewaxing process are C₃-C₆ ketones (e.g. methyl ethyl ketone, methyl isobutyl ketone and mixtures thereof), C₆-C₁₀ aromatic hydrocarbons (e.g. toluene), mixtures of ketones and aromatics (e.g. methyl ethyl ketone and toluene), autorefrigerative solvents such as liquefied, normally gaseous C₂-C₄ hydrocarbons such as propane, propylene, butane, butylene and mixtures thereof. Mixtures of methyl ethyl ketone and toluene or methyl ethyl ketone and methyl isobutyl ketone are generally preferred. Examples of these and other suitable solvent dewaxing processes are described in Lubricant Base Oil and Wax Processing, Avilino Sequeira, Jr, Marcel Dekker Inc., New York, 1994, Chapter 7.

Preferably step (b) is performed by means of a catalytic dewaxing process. With such a process it has

been found that base oils having a pour point of below -40 °C can be prepared when starting from a base oil precursor fraction as obtained in step (a) of the present process.

5 The catalytic dewaxing process can be performed by any process wherein in the presence of a catalyst and hydrogen the pour point of the base oil precursor fraction is reduced as specified above. Suitable dewaxing catalysts are heterogeneous catalysts comprising a
10 molecular sieve and optionally in combination with a metal having a hydrogenation function, such as the Group VIII metals. Molecular sieves, and more suitably intermediate pore size zeolites, have shown a good catalytic ability to reduce the pour point of the
15 distillate base oil precursor fraction under catalytic dewaxing conditions. Preferably the intermediate pore size zeolites have a pore diameter of between 0.35 and 0.8 nm. Suitable intermediate pore size zeolites are ZSM-5, ZSM-12, ZSM-22, ZSM-23, SSZ-32, ZSM-35 and ZSM-48.
20 Another preferred group of molecular sieves are the silica-aluminaphosphate (SAPO) materials of which SAPO-11 is most preferred as for example described in US-A-4859311. ZSM-5 may optionally be used in its HZSM-5 form in the absence of any Group VIII metal. The other
25 molecular sieves are preferably used in combination with an added Group VIII metal. Suitable Group VIII metals are nickel, cobalt, platinum and palladium. Examples of possible combinations are Ni/ZSM-5, Pt/ZSM-23, Pd/ZSM-23, Pt/ZSM-48 and Pt/SAPO-11. Further details and examples of
30 suitable molecular sieves and dewaxing conditions are for example described in WO-A-9718278, US-A-5053373, US-A-5252527 and US-A-4574043.

 The dewaxing catalyst suitably also comprises a binder. The binder can be a synthetic or naturally
35 occurring (inorganic) substance, for example clay, silica

and/or metal oxides. Natural occurring clays are for example of the montmorillonite and kaolin families. The binder is preferably a porous binder material, for example a refractory oxide of which examples are:

5 alumina, silica-alumina, silica-magnesia, silica-zirconia, silica-thoria, silica-beryllia, silica-titania as well as ternary compositions for example silica-alumina-thoria, silica-alumina-zirconia, silica-alumina-magnesia and silica-magnesia-zirconia. More preferably a

10 low acidity refractory oxide binder material which is essentially free of alumina is used. Examples of these binder materials are silica, zirconia, titanium dioxide, germanium dioxide, boria and mixtures of two or more of these of which examples are listed above. The most

15 preferred binder is silica.

A preferred class of dewaxing catalysts comprise intermediate zeolite crystallites as described above and a low acidity refractory oxide binder material which is essentially free of alumina as described above, wherein

20 the surface of the aluminosilicate zeolite crystallites has been modified by subjecting the aluminosilicate zeolite crystallites to a surface dealumination treatment. A preferred dealumination treatment is by contacting an extrudate of the binder and the zeolite

25 with an aqueous solution of a fluorosilicate salt as described in for example US-A-5157191 or WO-A-0029511. Examples of suitable dewaxing catalysts as described above are silica bound and dealuminated Pt/ZSM-5, silica bound and dealuminated Pt/ZSM-23, silica bound and

30 dealuminated Pt/ZSM-12, silica bound and dealuminated Pt/ZSM-22 as for example described in WO-A-0029511 and EP-B-832171.

Catalytic dewaxing conditions are known in the art and typically involve operating temperatures in the range

35 of from 200 to 500 °C, suitably from 250 to 400 °C,

hydrogen pressures in the range of from 10 to 200 bar, preferably from 40 to 70 bar, weight hourly space velocities (WHSV) in the range of from 0.1 to 10 kg of oil per litre of catalyst per hour (kg/l/hr), suitably from 0.2 to 5 kg/l/hr, more suitably from 0.5 to 3 kg/l/hr and hydrogen to oil ratios in the range of from 100 to 2,000 litres of hydrogen per litre of oil. By varying the temperature between 275 and suitably between 315 and 375 °C at between 40-70 bars, in the catalytic dewaxing step it is possible to prepare base oils having different pour point specifications varying from suitably lower than -60 to -10 °C.

After performing a catalytic dewaxing step (b) lower boiling compounds formed during catalytic dewaxing are removed in step (c), preferably by means of distillation, optionally in combination with an initial flashing step.

In step (d) steps (a)-(c) are repeated for every desired base oil.

In a preferred embodiment a first base oil (grade-4) is prepared having a kinematic viscosity at 100 °C of between 3.5 and 4.5 cSt (according to ASTM D 445), a volatility of below 20 wt% and preferably below 14 wt% (according to CEC L40 T87) and a pour point of between -15 and -60 °C (according to ASTM D 97), more preferably between -25 and -60 °C, by catalytic dewaxing in step (b) a distillate fraction obtained in step (a) having a kinematic viscosity at 100 °C of between 3.2 and 4.4 cSt and a second base oil (grade 5) is prepared having a kinematic viscosity at 100 °C of between 4.5 and 5.5, a volatility of below 14 wt% and preferably below 10 wt% and a pour point of between -15 and -60 °C, more preferably between -25 and -60 °C, by catalytic dewaxing in step (b) a distillate fraction obtained in step (a) having a kinematic viscosity at 100 °C of between 4.2 and 5.4 cSt.

Figure 1 shows a preferred embodiment of the process according to the present invention. In a process (1) a waxy paraffinic Fischer-Tropsch product (2) is prepared having a content of non-cyclic iso-paraffins of more than 70 wt%. From this product (2) a distillate fraction (5) is obtained in distillation column (3) by separating of a light (4) and heavy fraction (6). This fraction (5) has a viscosity which corresponds with the desired base oil grade (10). In reactor (7) a catalytic dewaxing step is performed on the fraction (5) thereby obtaining a dewaxed oil (8). By separating off light fraction (9) in distillation column (11) the desired base oil grade (10) is obtained. By variation of the separation in distillation column (3) the properties of base oil grade (10) can be varied according to the process of the present invention.

The above-described Base oil grade-4 can suitably find use as base oil for an Automatic Transmission Fluids (ATF). If the desired kinematic viscosity at 100 °C ($\nu K@100$) of the ATF is between 3 and 3.5 cSt, the Base Oil grade-4 is suitably blended with a grade having a $\nu K@100$ of about 2 cSt. The base oil (grade-2) having a kinematic viscosity at 100 °C of about 2 to 3 cSt can suitably be obtained by catalytic dewaxing of a suitable gas oil fraction as obtained in the atmospheric distillation in step (a) as described above. The Automatic Transmission Fluid will comprise the base oil (blend) as described above, preferably having a $\nu K@100$ of between 3 and 6 cSt, and one or more additives. Examples of additives are antiwear, antioxidant, and viscosity modifier additives.

The invention is furthermore directed to a novel class of base oils having a saturates content of above 95 wt%, preferably above 97 wt%, a kinematic viscosity at 100 °C of between 8 and 12 cSt, preferably above 8.5 cSt

and a pour point of below -30 °C and a viscosity index of above 120 preferably above 130. The combination of such low pour point high viscosity index fluids containing almost only cyclo, normal and iso-paraffins is considered novel. Such base oils may be advantageously used as white oils in medicinal or food applications. To obtain a base oil having the desired colour specification it may be required to hydrofinish the base oil, for example using a noble metal hydrofinishing catalyst C-624 of Criterion Catalyst Company, or by contacting the base oil with active carbon. Base oils having a colour according to ASTM D 1500 of less than 0.5 and according to ASTM D 156 Saybolt of greater than +10 and even equal to +30 can thus be obtained.

The base oils obtained by the present process having intermediate $\nu K@100$ values of between 2 and 9 cSt, of which preferred grade-4 and grade-5 have been described above, are preferably used as base oil in formulations such as gasoline engine oils, diesel engine oils, electrical oils or transformer oils and refrigerator oils. The use in electrical and refrigerator oils is advantageous because of the naturally low pour point when such a base oil, especially the grades having a pour point of below -40 °C, is used to blend such a formulation. This is advantageous because the highly iso-paraffinic base oil has a naturally high resistance to oxidation compared to low pour point naphthenic type base oils. Especially the base oils having the very low pour points, suitably lower than -40 °C, have been found to be very suitable for use in lubricant formulations such as gasoline and diesel engine oils of the OW-x specification according to the SAE J-300 viscosity classification, wherein x is 20, 30, 40, 50 or 60. It has been found that these high tier lubricant formulations can be prepared with the base oils obtainable by the process of the

current invention. Other gasoline and diesel engine oil applications are the 5W-x and the 10W-x formulations, wherein the x is as above. The gasoline oil formulation will suitably comprise the above-described base oil and one or more of additives. Examples of additive types which may form part of the composition are dispersants, detergents, viscosity modifying polymers, extreme pressure/antiwear additives, antioxidants, pour point depressants, emulsifiers, demulsifiers, corrosion inhibitors, rust inhibitors, antistaining additives, friction modifiers. Specific examples of such additives are described in for example Kirk-Othmer Encyclopedia of Chemical Technology, third edition, volume 14, pages 477-526.

The invention will be illustrated by the following non-limiting examples.

Example 1

1000 g per hour of a distillate fraction of an isomerised Fischer-Tropsch product having the properties as Feed N°1 in Table 1 was fed to a catalytic dewaxing reactor. The effluent of the catalytic dewaxing reactor was topped at 390 °C to remove only the light boiling fraction. The thus obtained base oil was recovered in a 69 wt% yield based on Feed N°1. The dewaxing conditions are as in Table 2. The catalyst used in the dewaxing step was a Pt/silica bound ZSM-5 catalyst as described in Example 9 of WO-A-0029511. The properties of the thus obtained base oils are in Table 3.

Example 2

Example 1 was repeated except at different dewaxing conditions (see Table 2). The properties of the base oil are in Table 3.

Table 1

Feed No.	1	2
Density at 70 °C	784.8	784.5
T10 wt% boiling point (°C)	407	346
T90 wt% boiling point (°C)	520	610
Kinematic viscosity at 10 °C (cSt)	5.151	6.244
Pour point (°C)	+46	+30

Table 2

Dewaxing conditions	Example 1	Example 2
Reactor temperature (°C)	325	342
Hydrogen pressure (bar)	37	36
Weight hourly space velocity (kg/l/h)	1.0	1.0
Hydrogen flow rate (Nl/h)	700	700

Table 3

	Example 1	Example 2
Feed	Feed No. 1	Feed No. 1
Base oil properties		
Density at 20 °C (kg/m ³)	819.7	819.0
Kinematic viscosity at 100 °C (cSt)	5.51	5.41
Pour Point (°C)	-20	-48
Noack (wt%)	6.3	7.4

Example 3

Example 1 was repeated at the conditions described in Table 4 using Feed No. 2 (see Table 1). The properties of the resulting base oil are presented in Table 5.

Example 4

Example 1 was repeated at the conditions described in Table 4 using Feed No. 2 (see Table 1). The properties of the resulting base oil are presented in Table 5.

Table 4

Dewaxing conditions	Feed 2 Example 3	Feed 2 Example 4
Reactor temperature (°C)	290	296
Hydrogen pressure (bar)	48	47
Weight hourly space velocity (kg/l/h)	1.0	1.0
Hydrogen flow rate (Nl/h)	750	750

Table 5

Base oil properties	Feed 2 Example 1	Feed 2 Example 2
Density at 20 °C (kg/m ³)	826	825.9
Kinematic viscosity at 100 °C (cSt)	9.78	9.75
Viscosity index	151	151
Pour Point (°C)	-9	-30
Noack (wt%)	6.1	6.0

- 5 The above experiments illustrate that base oils
 having a kinematic viscosity at 100 °C in the range of 3
 to 12 cSt and especially 4 to 12 cSt having excellent
 properties like pour point and viscosity index can be
 obtained using the process according to the invention. It
 10 will be clear that by performing step (a) and (b) in a
 controlled manner according to the present invention all
 viscosity grades in that range can be sequentially
 obtained.

The claims defining the invention are as follows:

1. Base oil having a saturates content of above 97 wt%, a kinematic viscosity at 100°C of between 8 and 12 cSt, a pour point of below -30°C and a viscosity index of above 120.
- 5 2. Base oil according to claim 1, wherein the kinematic viscosity at 100°C is higher than 8.5 cSt and the viscosity index is above 130.
3. Base oil according to any one of claims 1-2, wherein the colour of the base oil is a colour according to ASTM D 1500 of less than 0.5 and according to ASTM D 156 Saybolt of between +10 and +30.
- 10 4. Base oil according to any one of claims 1-3, wherein the base oil is derived from a waxy paraffinic Fischer-Tropsch product.
5. Base oil having a saturates content of above 97 wt%, substantially as hereinbefore described with reference to any one of the examples.
6. Use of the base oil according to claim 3 as white oil in medicinal or food
15 applications.
7. Process to prepare a base oil according to any one of claims 1-5 and another base oil having a different kinematic viscosity at 100°C from a waxy paraffinic Fischer-Tropsch product having a content of non-cyclic iso-paraffins of more than 70 wt% by
 - (a) obtaining from the waxy paraffinic Fischer-Tropsch product a distillate
20 fraction having a viscosity corresponding to one of the desired base oil products,
 - (b) performing a catalytic dewaxing step using the distillate fraction obtained in step (a) as feed,
 - (c) separating the lower boiling compounds from the dewaxed product obtained in step (b) in order to obtain the desired base oil, and
 - 25 (d) repeating steps (a)-(c) for each base oil.
8. Process according to claim 7, wherein the base oil according to any one of claims 1-3 is furthermore subjected to a hydrofinishing step or contacted with active carbon in order to improve its colour.
9. Process according to any one of claims 7 to 8, wherein the catalytic dewaxing
30 is performed in the presence of a catalyst comprising a Group VIII metal, an intermediate pore size zeolite having a pore diameter between 0.35 and 0.8nm, and a low acidity refractory binder which binder is essentially free of alumina.

2002253100 31 Oct 2006

10. Process to prepare a base oil having a saturates content of above 97 wt% comprising the steps, substantially as hereinbefore described with reference to any one of the examples.

11. Base oil produced by the process of any one of claims 7 to 10.

Dated 30 October, 2006
Shell Internationale Research Maatschappij B.V.

Patent Attorneys for the Applicant/Nominated Person
SPRUSON & FERGUSON

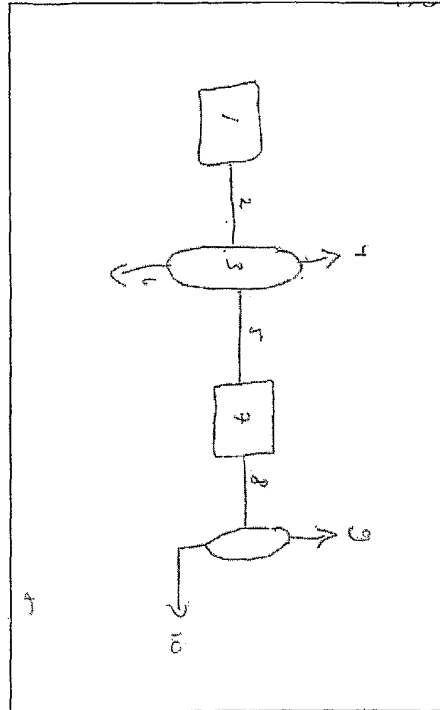


Fig. 1