

(No Model.)

J. T. FOX.
GATE LATCH.

No. 480,189.

Patented Aug. 2, 1892.

Fig-1-


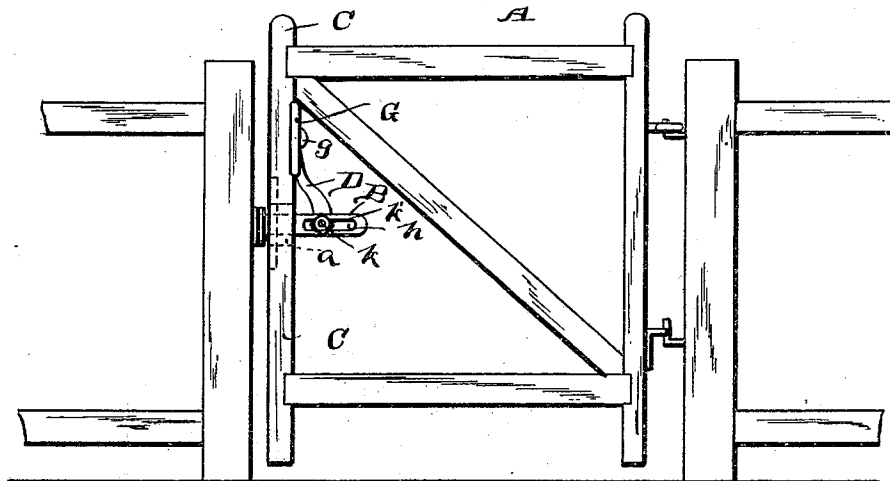


Fig-2-

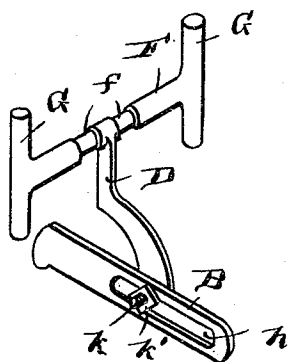

Witnesses
Jesse Heller.
Phillips Mass.

Inventor
J. T. Fox
by E. W. Anderson
Attorney

UNITED STATES PATENT OFFICE.

JAMES T. FOX, OF SHERMAN, TEXAS, ASSIGNOR TO W. H. TORIAN, OF SAME PLACE.

GATE-LATCH.

SPECIFICATION forming part of Letters Patent No. 480,189, dated August 2, 1892.

Application filed April 30, 1892. Serial No. 431,259. (No model.)

To all whom it may concern:

Be it known that I, JAMES T. FOX, a citizen of the United States, and a resident of Sherman, in the county of Grayson and State of Texas, have invented certain new and useful Improvements in Gate-Latches; and I do declare the following to be a full, clear, and exact description of the invention, such as will enable others skilled in the art to which it ap-
10 pertains to make and use the same, reference being had to the accompanying drawings, and to letters of reference marked thereon, which form a part of this specification.

Figure 1 of the drawings is a side view of
15 gate and latch. Fig. 2 is a perspective view of the latch.

This invention has relation to certain new and useful improvements in gate-latches, the object being to provide a simple and conven-
20 ient device of this character so constructed as to permit of its ready adjustment to different gates, and also its adjustment, as may be required, subsequent to its attachment to the gate, without necessitating its removal; and
25 the invention consists in the novel construction and combination of parts, all as herein-after specified.

In the accompanying drawings, the letter A designates a swinging gate, to any ordinary
30 form of which my latch is applicable. Said latch consists of a latch-bar B, working loosely in an elongated vertical slot *a* in the front post C of the gate, through which it projects. Connected to the intermediate portion of said
35 bar is an arm D, curved forwardly at its upper portion and rigidly secured to a transverse handle-bar F. Said bar F at its intermediate portion is reduced in diameter, as shown at *f*, to form a journal portion having loose bearings in staples or brackets *g g* on the post C,
40 and it is to this reduced or journal portion between the bearings that the arm D is connected. On each end of the bar F are vertical handles G. The connection between the
45 arm D and the latch-bar B is effected by means of an elongated longitudinal slot *h* in said latch-bar, which is adjustably engaged by a small bolt or pin *k*, having a nut *k'*, said bolt or pin passing through the lower portion
50 of the arm D. It will therefore be apparent

that the throw of the latch-bar or the extent of its projection through the post C may be governed by varying the point of connection between said bar and the arm D, so that the latch may be withdrawn sufficiently to pre-
55 vent the latching, if desired, and may also be adjusted to gates having front posts of different thicknesses or separated by different intervals from the latch-post H of the fence; also, that an angular adjustment may be read-
60 ily effected between said bar and the arm D, if required, to bring the bar into alignment with the slot *a* or with the latch-plate of the post H. Said latch-plate, when it is desired that the gate shall swing freely both ways, is
65 beveled from both edges to the central keeper-slot *p*, which is engaged by a catch projection *p'* on the projecting end of the latch-bar. If it is desired to permit the gate to swing but
70 one way, a stop may be provided on the post H or one wall of the slot *p* may be projected to form a stop, as shown in the drawings. It is usually intended that the weight of the handles shall be sufficient to normally hold the
75 latch locked; but in case it may be desired to use light handles a spring M may be employed for this purpose, as shown in the drawings. Raising the handles will rock the bar F in its bearings to withdraw the latch-bar from en-
80 gagement with the latch-plate.

Having described this invention, what I claim as new, and desire to secure by Letters Patent, is—

A gate-latch comprising the latch-bar B, having therein a longitudinal slot *h*, the arm
85 D, connected to the intermediate portion of said bar by a bolt or pin *k*, passing adjustably through said slot, said arm being curved forwardly at its upper portion, and a transverse handle-bar F, rigidly secured to the upper
90 end of said arm, said handle-bar having a central reduced portion *f*, forming a journal for its rocking support on the gate-post, substantially as specified.

In testimony whereof I affix my signature in
95 presence of two witnesses.

JAMES T. FOX.

Witnesses:

ROSS BAKER,
G. W. EASTWARD.