



- (51) International Patent Classification:
B01D 53/04 (2006.01) *B01D 53/26* (2006.01)
- (21) International Application Number:
PCT/BE2017/000012
- (22) International Filing Date:
13 February 2017 (13.02.2017)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
62/299,068 24 February 2016 (24.02.2016) US
BE2016/5303 29 April 2016 (29.04.2016) BE
- (71) Applicant: **ATLAS COPCO AIRPOWER, NAAM-LOZE VENNOOTSCHAP** [—/BE]; Boomsesteenweg 957, 2610 Wilrijk (BE).
- (72) Inventor: **HERMANS Hans Maria Karel**; Boomsesteenweg 957, 2610 Wilrijk (BE).

- (74) Agent: **VAN VARENBERG, Patrick**; Bureau M.F.J. Bockstael nv., Arenbergstraat 13, 2000 Antwerpen (BE).
- (81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.
- (84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU,

[Continued on next page]

(54) Title: METHOD FOR REGULATING THE REGENERATION TIME OF AN ADSORPTION DRYER AND ADSORPTION DRYER IMPLEMENTING SUCH A METHOD

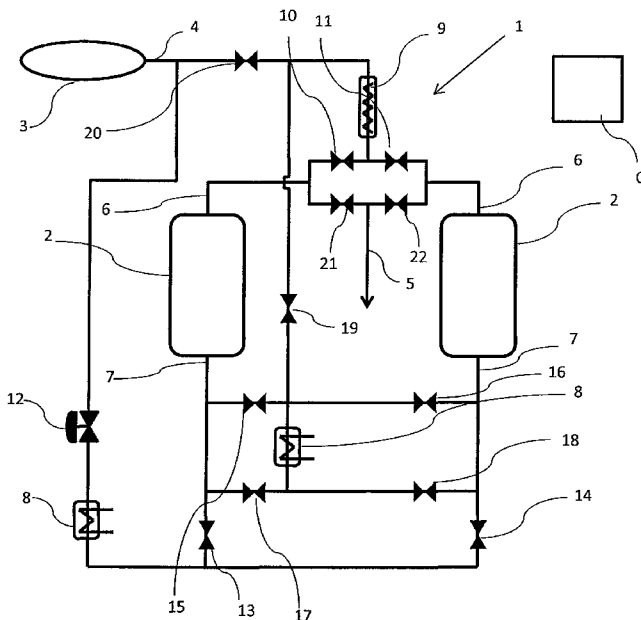


Figure 1

(57) Abstract: The present invention is directed to a method for regulating the regeneration time of an adsorption dryer, the method comprising the steps of: subjecting the adsorption dryer (1) to an adsorption cycle; stopping the adsorption cycle after a preset adsorption time interval (T₁); and subsequently subjecting the adsorption dryer (1) to a first regeneration cycle during a preset time interval (Time₃); characterized in that: - maintaining the first regeneration cycle for an additional regeneration time interval (T_{E1}) if said measured pressure dew point or relative humidity is higher than a predetermined pressure dew point or relative humidity threshold; and/or - stopping said first regeneration cycle if the outlet temperature (temp₁) is higher than or equal to a predetermined temperature threshold, and, if the time frame in which the adsorption dryer (1) is subjected to said first regeneration cycle is greater than a minimum heat regeneration time interval (T_{Heat-min}).

WO 2017/143409 A1

LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK,
SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,
GW, KM, ML, MR, NE, SN, TD, TG).

— of inventorship (Rule 4.17(iv))

Published:

— with international search report (Art. 21(3))

Declarations under Rule 4.17:

— as to applicant's entitlement to apply for and be granted
a patent (Rule 4.17(ii))

Method for regulating the regeneration time of an adsorption dryer and adsorption dryer implementing such a method.

5

This invention relates to a method for regulating the regeneration time of an adsorption dryer, the method comprising the steps of: subjecting the adsorption dryer to an adsorption cycle wherein a process gas is directed through a dryer inlet and moisture is adsorbed from the process gas; stopping the adsorption cycle after a preset adsorption time interval; and subsequently subjecting the dryer to a first regeneration cycle during a preset minimum heat regeneration time interval, by heating a regeneration gas prior to directing it through the dryer inlet.

Adsorption dryers are frequently used in different applications requiring a flow of dry and cooled air.

A challenge encountered is maintaining a low energy consumption of such adsorption dryers. Typically, the adsorbent material within an adsorption dryer reaches saturation and needs to be periodically regenerated. This is typically performed by either heating a regeneration gas, prior to guiding it through the adsorbent material or just by maintaining the regeneration gas flow through the dryer for a certain time interval.

While the regeneration with the help of an external heat source is efficient in terms of regenerating the

adsorbent material, it is also results in increased energy consumption.

Because of this, a balance needs to be found such that the adsorption dryer is maintained in optimum parameters
5 with the minimum required energy consumption.

Existing dryers, like the one found in US 2014/0,216,105 A, in the name of Parker Hannifin Manufacturing S.R.L., proposes a method in which the efficiency is believed to be maintained by adopting a particular layout for the two
10 adsorption columns. More specific, a process gas is first guided through a first column, it is then heated and further guided through said second column for regenerating it. The process is maintained for a predetermined maximum time duration and as long as the
15 temperature at the outlet of the column does not exceed a maximum value.

A drawback of such a dryer according to the above identified patent application is the fact that by applying such a method the energy consumption is not
20 optimized throughout the complete functioning cycle of the dryer, since the method does not consider the current state of the adsorbent column, and because of this the method is not efficient.

Taking the above mentioned drawback and concerns into
25 account, it is an object of the present invention to provide a method capable of optimizing the energy usage based on the current state of the adsorption dryer.

Another object of the present invention is to provide a self-learning and evolving method capable of reducing the

energy consumption as the adsorption dryer is functioning.

The present invention aims to provide an easy to implement and user-friendly method for regenerating an
5 adsorption dryer.

The present invention solves at least one of the above and/or other problems by providing a method for regulating the regeneration time of an adsorption dryer, the method comprising the steps of:

- 10 - subjecting the adsorption dryer to an adsorption cycle wherein a process gas is directed through a dryer inlet and moisture is adsorbed from the process gas;
- stopping the adsorption cycle after a preset
15 adsorption time interval; and subsequently
- subjecting the adsorption dryer to a first regeneration cycle during a preset minimum heat regeneration time interval, by heating a regeneration gas prior to directing it through the
20 dryer inlet;

characterized in that

- the pressure dew point or the relative humidity within said adsorption dryer is measured after a second preset adsorption time interval, and, if said
25 measured pressure dew point or relative humidity is higher than a predetermined pressure dew point or relative humidity threshold, maintaining the first regeneration cycle for an additional regeneration time interval; and/or

- the outlet temperature of the regeneration gas at a dryer outlet is measured, and, if the outlet temperature is higher than or equal to a predetermined temperature threshold, and, if the time frame in which the adsorption dryer is subjected to said first regeneration cycle is greater than a minimum heat regeneration time interval, then the method comprises the step of stopping said first regeneration cycle.

10 By maintaining the regeneration gas flowing through the adsorption dryer for a minimum heat regeneration time interval, $T_{\text{Heat-min}}$, an efficient regeneration of said adsorption dryer is performed, regardless of the temperature measured at the dryer outlet. Accordingly, the regeneration process can be configured through design and according to known requirements of the adsorbent material used. Because of this, influences of the environment or of a possibly higher than usual temperature of the regeneration gas are being eliminated.

20 Because the regeneration process is maintained until the temperature $temp_1$ is reached, the method according to the present invention ensures that optimum parameters of the adsorption dryer are reached and the system implementing the method according to the present invention is immediately prepared for a next adsorption cycle.

Because of this, optimum results for regenerating an adsorption dryer with a low energy consumption and in a minimum amount of time can be achieved. Consequently, the energy consumption associated with the regeneration with heated regeneration gas is reduced to a minimum.

By measuring the pressure dew point or relative humidity after a first time interval, said first time interval being initiated when the adsorption cycle is started, the current capabilities of the adsorption dryer are taken
5 into account and, based on the measured value, the time interval in which the regeneration cycle is being maintained is regulated. Accordingly, depending on the actual requirements of the network to which such adsorption dryer is connected, and on the behavior of
10 said network, the time necessary for the regeneration is regulated, such that optimum operating conditions are reached throughout the entire functioning time.

Because of this optimization, the method according to the present invention is self-learning and adapting based on
15 the actual state of the adsorption dryer, not based on initial or design approximations. Further, an adsorption dryer implementing a regulating method according to the present invention can perfectly function in a tropical environment or within a network with high fluctuations of
20 humidity, since the influence of the environmental conditions upon the adsorbent material within the adsorption dryer are easily controlled and counteracted.

Tests have shown that, during the functioning of an adsorption dryer implementing a method according to the
25 present invention, the time interval in which the heated regeneration gas is used within the regeneration process, decreases over time. Accordingly, the energy used by the adsorption dryer decreases as well.

Preferably, if said measured outlet temperature, $temp_1$,
30 of the regeneration gas is lower than said predetermined temperature threshold and if the time frame in which the

adsorption dryer is subjected to said first regeneration cycle is larger than or equal to a maximum heat regeneration time interval, $T_{\text{Heat-Max}}$, said first regeneration cycle is stopped.

5 Because of this, the regeneration cycle cannot exceed a maximum set time interval.

The present invention is further directed to an adsorption dryer comprising:

- 10 - at least one adsorption vessel comprising adsorption means, an inlet and an outlet for allowing a gas to flow therethrough;
- a controller unit;
- a source of said gas, connectable to the inlet of said at least one adsorption vessel through a dryer inlet, said gas being a process and/or a
15 regeneration gas;
- a heater positioned on said dryer inlet and configured to heat a regeneration gas flowing therethrough when the adsorption vessel is
20 maintained in a first regeneration cycle;

characterized in that

- said controller unit further comprises means to
measure a pressure dew point or a relative humidity
within said at least one adsorption vessel after a
25 second preset adsorption time interval, to receive
said measured data, and to maintain the flow of the
regeneration gas through said inlet for an
additional regeneration time interval, if said

measured pressure dew point or relative humidity is higher than a first predetermined threshold; and/or

- said controller unit further comprises a temperature sensor positioned at the outlet of said at least one adsorption vessel and is further configured to stop the first regeneration cycle after a minimum heat regeneration time interval, if the measured outlet temperature is higher than or equal to a predetermined threshold.

10 By using the controller unit, an accurate measurement of the parameters of the at least one adsorption vessel can be performed and retrieved. Because of this, the regeneration cycle time is being regulated based on the latest measurements and based on the current status of
15 the at least one adsorption vessel.

By comparing the measured dew point or determined relative humidity with a predetermined threshold and regulating the time during which the regeneration gas is flowing through the inlet, the at least one adsorption
20 vessel is maintained at required standards throughout the entire functioning and the adsorption dryer is capable of providing at the dryer outlet a gas with at least the required level of humidity.

Because of its capabilities, the controller unit will
25 help in reducing the energy consumption of the adsorption dryer during functioning, irrespective of the process gas parameters.

Because the controller unit uses the temperature measurement at the outlet of the at least one adsorption
30 vessel, said adsorption vessel is not allowed to reach

very high temperatures that would possibly cause damages to the adsorbent material comprised therein. On the other hand, by maintaining the first regeneration cycle for a minimum set time interval, a full regeneration of the adsorbent material is assured and accordingly optimum functioning parameters of the adsorption dryer.

The present invention is also directed to a controller unit regulating the time in which an adsorption dryer is maintained in a regeneration cycle, said controller unit comprising:

- a timer, for determining the time interval in which an adsorption vessel of said adsorption dryer is maintained in a regeneration cycle, said adsorption vessel comprising an inlet and an outlet for allowing a flow of gas therethrough;

characterized in that said controller unit:

- further comprises: a user interface for receiving a requested pressure dew point or relative humidity, a dew point pressure sensor or a relative humidity determinant positioned within the adsorption vessel of said adsorption dryer,
- being further configured to maintain the adsorption dryer in a first regeneration cycle for an additional regeneration time interval, if the measured pressure dew point or the relative humidity is higher than said requested pressure dew point or relative humidity; and/or
- further comprises a temperature sensor positioned at the outlet of said adsorption vessel and is

further configured to stop the first regeneration cycle if the measured outlet temperature is greater than or equal to a predetermined temperature threshold, and, if said time interval
5 in which the adsorption dryer is maintained in said regeneration cycle is greater than a minimum heat regeneration time interval.

The present invention is also directed to a use of a controller unit according to the present invention in an
10 adsorption dryer for compressed gas.

With the intention of better showing the characteristics of the present invention, some preferred configurations according to the present invention are described hereinafter by way of an example, without any limiting
15 nature, with reference to the accompanying drawings, wherein:

figure 1 schematically represents an adsorption dryer according to an embodiment of the present invention;

20 figures 2 to 7 schematically illustrate the working principle of a device according to figure 1; and

figures 8 to 23 illustrate different embodiments of an adsorption dryer according to the present invention.

25 Figure 1 shows an adsorption dryer 1 comprising, in this case, two adsorption vessels 2 connected to a source of gas 3 through a dryer inlet 4. Said adsorption dryer 1 being capable of removing moisture from a gas flowing through said dryer inlet 4 and provide, through a dryer

outlet 5, dry and possibly cold gas to an external network (not shown).

In the context of the present invention it should be understood that the adsorption dryer 1 can also comprise more than two adsorption vessels 2 or even only one adsorption vessel 2.

Preferably said adsorption vessels 2 comprise an adsorbent material (not shown) capable of capturing the moisture from the gas flowing therethrough.

10 In the context of the present invention it should be understood that adsorption could also include absorption.

Each of the two adsorption vessels 2 comprises an inlet 6 and an outlet 7 for allowing a gas to flow therethrough. The adsorption dryer 1 further comprises a controller unit C and a source of a gas 3, connectable to the dryer inlet 4, said gas being a process and/or a regeneration gas.

A heater 9 is preferably positioned on said dryer inlet 4 and configured to heat a regeneration gas flowing therethrough when the at least one adsorption vessel 2 is maintained in a first regeneration cycle.

Preferably, said controller unit C further comprises means to measure a pressure dew point or a relative humidity within said at least one adsorption vessel 2. Said means can be in the shape of a sensor such as for example a temperature sensor and/or a pressure sensor positioned within said at least one adsorption vessel 2, or at the inlet 6 of said adsorption vessel 2, or on the dryer outlet 5.

Preferably, the pressure dew point or relative humidity is measured after a second preset adsorption time interval, T₂.

When measuring the relative humidity, the pressure and/or
5 temperature within the respective adsorption vessel 2 is/are preferably also measured by using for example a pressure and/or a temperature sensor (not shown) and based on these measurements, the pressure dew point can be calculated with known formulas or deduced from
10 existing tables. For such determination, the measurements of the temperature sensor positioned at the outlet 7 of the adsorption vessel 2 can be used or another temperature sensor.

The controller unit C receives said measured data through
15 a communication channel such as a wired or a wireless communication channel and maintains the flow of the regeneration gas through said inlet 6 for an additional regeneration time interval, T_{E1}, if said measured pressure dew point or determined relative humidity is
20 higher than a first predetermined threshold.

The controller unit C further makes use of a temperature sensor (not shown) positioned at the outlet 7 of said at least one adsorption vessel 2 and is further configured to stop the first regeneration cycle after a minimum heat
25 regeneration time interval, T_{Heat-min}, if the measured outlet temperature, temp₁, at the outlet 7 of said adsorption vessel 2 is higher than or equal to a predetermined threshold.

Preferably, when stopping the first regeneration cycle,
30 the controller unit C actuates an inlet valve 10 and/or

11 and stops the flow of regeneration gas at the inlet 6 of the adsorption vessel 2.

In another embodiment according to the present invention, when stopping the first regeneration cycle, the controller unit C stops the heater 9.

In a preferred embodiment according to the present invention, but not limiting to, said source of a gas 3 comprises a compressor unit.

When said source of gas 3 is a compressor unit, it should be understood that the regeneration gas coming from said compressor unit and flowing through the dryer inlet 4 is a regeneration gas that has been subjected to a compression process and is therefore heated regeneration gas, reaching a relatively high temperature.

For a more efficient design, the adsorption dryer 1 comprises at least two adsorption vessels 2, each having an inlet 6 and an outlet 7. Preferably, the outlet of the compressor unit is connected through a dryer inlet 4 to the inlet 6 of the at least two adsorption vessels 2.

In another preferred embodiment, when the adsorption dryer 1 comprises at least two adsorption vessels 2 and one of these adsorption vessels 2 is subjected to a regeneration cycle and the other adsorption vessel 2 is subjected to an adsorption cycle, the flow of gas from the outlet 7 of one of the at least two adsorption vessels 2 can be guided through the inlet 6 of the other adsorption vessel 2.

Preferably, the flow of gas from the outlet 7 of the adsorption vessel 2 being subjected to a regeneration

cycle is being guided through the inlet 6 of the adsorption vessel 2 being subjected to an adsorption cycle.

Even though other configurations are possible, in the context of the present invention it is preferred that during the adsorption cycle, process gas is directed through the outlet 7 of the adsorption vessel 2, and dried process gas is flowing through the inlet 6.

If is further preferred that during the regeneration cycle, regeneration gas is preferably being directed through the inlet 6 of the adsorption vessel 2, and relatively wet regeneration gas is flowing through the outlet 7.

In the context of the present invention the inlet 6 is positioned at the bottom of the adsorption vessel 2 and the outlet 7 is positioned at the top of the adsorption vessel 2. It should not be excluded that the adsorption vessels 2 can be also rotated such that the outlet 7 is connected to the dryer inlet 4 and the inlet 6 is connected to the dryer outlet 5, such that the above referenced flow and benefit can still be achieved.

In another embodiment according to the present invention, each of the at least two adsorption vessels 2 comprises a temperature sensor positioned at the outlet 7.

In another embodiment according to the present invention, said temperature sensor can also be mounted within said at least one adsorption vessel 2, in the vicinity of the outlet 7.

Preferably, the adsorption dryer 1 further comprises a cooler 8 positioned at the outlet 7 of the at least one adsorption vessel 2 and being configured to cool the gas flowing through said outlet 7.

5 The adsorption dryer 1 can comprise one cooler 8 positioned on a common outlet 7 of the at least two adsorption vessels 2, or each of said at least two adsorption vessels 2 can comprise a cooler 8 positioned at the outlet 7 of each adsorption vessel 2.

10 Preferably, the controller unit C further comprises means to alternatively maintain each of the at least two adsorption vessels 2 in a second regeneration cycle wherein said heater 9 is switched off; subsequently in a first regeneration cycle wherein said heater 9 is
15 switched on; subsequently in a cooling cycle wherein the gas is cooled by means of a cooler 8; and subsequently in a standby cycle wherein the flow of gas through said adsorption vessel 2 is stopped.

Preferably, the controller unit C is further configured
20 to regulate the time interval in which each of the adsorption vessels 2 is maintained in said first regeneration cycle, second regeneration cycle, cooling cycle and standby cycle based on the measured temperature and measured pressure dew point or relative humidity.

25 Preferably, the controller unit C is configured to maintain the adsorption vessel 2 in a standby cycle until the measured pressure dew point or relative humidity is higher than the predetermined pressure dew point or relative humidity threshold.

In this way, the controller is able to regulate the time intervals for each of said adsorption vessels 2 individually, according to the need and current state.

The adsorption dryer 1 can further comprise a regulating valve 12 for controlling the volume of gas flowing through the inlet 6. Preferably the regulating valve 12 is provided on a different conduit than where the heater is provided.

When the heater 9 is switched on by said controller unit C, the volume of gas allowed to flow through said heater 9 will have an influence on the temperature of the gas reaching the adsorption vessel 2. Accordingly, by opening the regulating valve 12 and allowing only a certain percentage of the volume of gas to flow through the inlet 6, the temperature of said gas will be higher than when the entire volume of gas is allowed to reach the inlet 6 of the adsorption vessel 2.

Because of this, the comparison of the temperature at the outlet 7 of the adsorption vessel 2 with a temperature threshold becomes very important for maintaining the properties of the adsorbent material.

Preferably, when said at least one adsorption vessel 2 is maintained in a cooling cycle, the controller unit C is configured to actuate a two way valve 13 and/or 14 for allowing the flow of gas coming from said source of gas 3 to be cooled by the cooler 8 and flow through the adsorption vessel 2.

When said cooler 8 is used for cooling the gas flowing through the dryer outlet 5, the adsorption dryer 1 further uses control valves 15, 16, 17, 18 and 19 for

controlling the path of the gas within the adsorption dryer 1.

Preferably, the adsorption dryer 1 further comprises a cut-off valve 20, configured to stop the flow of gas from the source of gas 3 towards the inlet 6 of the adsorption vessels 2.

The adsorption dryer 1 further comprises an outlet valve 21 or 22 for allowing the gas from the dryer outlet 5 to reach an external network (not shown). It goes without saying that, if the adsorption dryer 1 comprises two or more adsorption vessels 2, each of said adsorption vessels 2 can comprise one outlet valve 21 or 22.

The present invention is further directed to a controller unit C regulating the time in which the adsorption dryer 1 is maintained in a regeneration cycle, said controller unit C comprising: a timer, for determining the time interval in which an adsorption vessel 2 of said adsorption dryer 1 is maintained in a regeneration cycle, said adsorption vessel 2 comprising an inlet 6 and an outlet 7 for allowing a flow of gas therethrough.

The controller unit C preferably further comprises a user interface (not shown) for receiving a requested pressure dew point or relative humidity, a dew point pressure sensor or a relative humidity determinant positioned within the adsorption vessel 2 of said adsorption dryer 1.

In the context of the present invention a relative humidity determinant should be understood as module adapted to measure parameters such as pressure and temperature and determine the relative humidity by

calculating it with known formulas or deduce it from existing tables. Such module being a separate module, part of the adsorption dryer 1 or being incorporated in the controller unit C.

5 The user interface can be part of the adsorption dryer 1 or can be an external module such as an external computer or electronic platform communicating through a wired or wireless connection with the adsorption dryer 1.

Preferably, a user of the adsorption dryer 1 can select
10 the value of the pressure dew point or relative humidity through said user interface, or the value of said pressure dew point or relative humidity can be selected through design.

The electronic platform can be the external network using
15 the dried gas provided by said adsorption dryer 1.

The controller unit C is preferably further configured to maintain the adsorption dryer 1 in a first regeneration cycle for an additional regeneration time interval, T_{E1} , if the measured pressure dew point or the relative
20 humidity is higher than said requested pressure dew point or relative humidity; and/or further comprises a temperature sensor positioned at the outlet 7 of said adsorption dryer 1 and is further configured to stop the first regeneration cycle if the measured outlet
25 temperature, $temp\ 1$, at the outlet 7 of the adsorption dryer is greater than or equal to a predetermined temperature threshold, and, if said time interval in which the adsorption dryer 1 is maintained in said regeneration cycle is greater than a minimum heat
30 regeneration time interval, $T_{Heat-min}$.

In a preferred embodiment according to the present invention, the controller unit C further comprises a processing unit configured to recalculate said additional regeneration time interval, T_{E1} by adding a first predetermined time interval, t_0 , to a previously set additional regeneration time interval $T_{E1,0}$.

In another preferred embodiment, the controller unit C further comprises storing means configured to store said recalculated additional regeneration time interval, T_{E1} , said controller unit C applying said recalculated additional time interval in a subsequent regeneration cycle.

Said storing means can be in the shape of a local hard drive or an external hard drive with which the controller unit C can communicate through a wired or wireless connection.

Preferably, but not limiting to, the controller unit C further comprises means for maintaining the regeneration cycle for a second additional regeneration time interval, T_{E2} , if the measured pressure dew point or relative humidity is lower than the requested pressure dew point or relative humidity.

In a further preferred embodiment according to the present invention, the controller unit C further comprises calculating means configured to calculate said second additional regeneration time interval, T_{E2} , by adding a second predetermined time interval, t_1 , to a previously set time interval, $T_{E2,0}$.

Preferably, said calculating means are in the shape of a processor having computing capabilities. Said processor

can be positioned at the level of the adsorption dryer 1 or can be at the level of the external computer or electronic platform with which the controller is preferably communicating.

- 5 If said calculating means are positioned at the level of the external computer or electronic platform, the adsorption dryer 1 is preferably sending through a wired or wireless connection measured data and is able to receive calculated data.
- 10 Preferably, the controller unit C further comprises storing means configured to store said recalculated second additional regeneration time interval, T_{E2} , and apply it in a subsequent regeneration cycle.

As mentioned above, said storing means can be in the
15 shape of a local hard drive or an external hard drive with which the controller unit C can communicate through a wired or wireless connection.

In another embodiment according to the present invention, said calculating means are configured to further
20 calculate:

- a minimum heat regeneration time interval, $T_{Heat-min}$, by adding said additional regeneration time interval, T_{E1} , to a preset minimum heat regeneration time interval, $Time3$; or by adding
25 said second additional regeneration time interval, T_{E2} , to said preset minimum heat regeneration time interval $Time3$; and/or
- a maximum heat regeneration time interval in which the first regeneration cycle can be

maintained, $T_{\text{Heat-Max}}$, by adding said additional regeneration time interval, T_{E1} , to a preset maximum heat regeneration time interval, Time4 ; or by adding said second additional regeneration time interval, T_{E2} , to said preset maximum heat regeneration time interval, Time4 ; and/or

5

- minimum regeneration time interval, T_{min} , in which the flow of gas from the outlet of the compressor unit is maintained at the dryer inlet 4 by: subtracting said additional regeneration time interval, T_{E1} , from said preset minimum regeneration time interval, Time1 , or by subtracting said second additional regeneration time interval, T_{E2} , from said preset minimum regeneration time interval, Time1 ; and/or

10

15

- a maximum regeneration time interval, T_{Max} , in which the flow of gas from the outlet of a compressor unit is maintained at the dryer inlet 4 by subtracting said additional regeneration time interval, T_{E1} , from a preset maximum regeneration time interval, Time2 , or by subtracting said second additional regeneration time interval, T_{E2} , from said preset maximum regeneration time interval, Time2 .

20

25 In yet another embodiment the controller unit C further comprises means to store one or more of said time intervals: $T_{\text{Heat-min}}$ and/or $T_{\text{Heat-Max}}$ and/or T_{min} and/or T_{Max} , and apply it in a subsequent regeneration cycle.

30

In the context of the present invention it should be understood that said means to store said recalculated

time intervals can be the same as said storing means configured to store said recalculated second additional regeneration time interval, T_{E2} , or can be a different one positioned at the level of the adsorption dryer 1 or
5 externally.

Further, the controller unit C can comprises means for maintaining said adsorption vessel 2 in a first regeneration cycle for the calculated additional regeneration time interval, T_{E1} , if said calculated
10 additional regeneration time interval, T_{E1} , or second additional regeneration time interval, T_{E2} , is comprised within the interval delimited by the minimum heat regeneration time interval, $T_{Heat-min}$, and the maximum heat regeneration time interval, $T_{Heat-Max}$, and/or stopping said
15 first regenerating cycle after said maximum heat regeneration time interval, $T_{Heat-Max}$, when said calculated additional regeneration time interval, T_{E1} or second additional regeneration time interval, T_{E2} , is higher than said maximum heat regeneration time interval, $T_{Heat-Max}$.

20 Preferably, but not limiting to, the controller unit C comprises means for maintaining said adsorption vessel 2 in a second regeneration cycle if said calculated additional regeneration time interval, T_{E1} , or second additional regeneration time interval, T_{E2} , is comprised
25 within the interval delimited by the minimum regeneration time interval, T_{min} , and the maximum regeneration time interval, T_{Max} , and/or stopping said first regenerating cycle after the maximum regeneration time interval, T_{Max} , when said calculated additional regeneration time
30 interval, T_{E1} , or second additional regeneration time

interval, T_{E2} , is higher than the maximum regeneration time interval, T_{Max} .

The present invention is further directed to the use of a controller unit C according to the present invention in
5 an adsorption dryer 1 for compressed gas.

The present invention is further directed to a method for efficiently performing a regeneration cycle, such that the adsorption dryer 1 is prepared for a subsequent adsorption cycle.

10 Typically, an adsorption dryer 1 is subjected to an adsorption cycle whereby a process gas is directed through an inlet 6 of the at least one adsorption vessel 2 and moisture is adsorbed from the process gas.

In the context of the present invention it should be
15 understood that the inlet 6 and the outlet 7 can also be switched between each other, such that said process gas can also be directed through the outlet 7 of the at least one adsorption vessel 2 and relatively dry gas can be retrieved at the inlet 6 of said at least one adsorption
20 vessel 2.

After a certain functioning time, the adsorbent material becomes saturated and is not able to capture the humidity from the gas in an efficient manner anymore. Consequently, the at least one adsorption vessel 2 needs
25 to be subjected to a regeneration cycle in which the moisture entrapped therein is removed from said adsorption vessel 2.

For achieving this, the method according to the present can comprise a step in which the pressure dew point or

relative humidity is being measured at the outlet 7 of the at least one adsorption vessel 2, during the adsorption cycle.

Preferably, said pressure dew point or relative humidity is being measured at the dryer outlet 5.

Tests have shown that, depending on the volume of said adsorption vessel 2 and on the type of adsorbent material, each adsorption vessel 2 will achieve an optimum pressure dew point or relative humidity after a calculable time interval. Preferably, the measurement of the pressure dew point or relative humidity is performed when such optimum value is reached. As an example, and not limiting to, such optimum value can be reached after 30 minutes, 45 minutes, 1 hour, 1.5 hours or more.

In another embodiment according to the present invention, the measurement of the pressure dew point or relative humidity is performed during an adsorption cycle and an average value for the dew point or relative humidity is being calculated.

Further, the method comprises the steps of stopping the adsorption cycle after a preset adsorption time interval, T_1 ; and subsequently subjecting the adsorption vessel 2 to a first regeneration cycle during a preset minimum heat regeneration time interval, $Time_3$, by heating a regeneration gas prior to directing it through the inlet 6 of the adsorption vessel 2.

In an embodiment according to the present invention, said regeneration gas can be said process gas or said regeneration gas can be a different gas being provided by

the same gas source 3 or by a different gas source (not shown).

The method according to the present invention further comprises the step of comparing the measured pressure dew point or relative humidity with a predetermined pressure dew point or relative humidity threshold and if said
5 measured pressure dew point or the relative humidity is higher than said predetermined pressure dew point or relative humidity threshold, the first regeneration cycle is maintained for an additional regeneration time
10 interval, T_{E1} .

It goes without saying that, in case the method calculates an average value for the pressure dew point or relative humidity, such calculated value is being
15 compared with a predetermined pressure dew point or relative humidity threshold.

By performing such a step, an optimum regeneration of the adsorbent material within said at least one adsorption vessel 2 is assured.

20 Tests have shown that, if the load of the at least one adsorption vessel 2 is maintained at approximately 80% load or 60% or lower during the adsorption cycle, the additional regeneration time interval, T_{E1} , will decrease more and more with each cycle until reaching zero.

25 Because of such a behavior, the energy consumption needed for regenerating said adsorption vessel 2 is also decreasing with every regeneration cycle, reaching a value of zero. Accordingly, the efficiency of the regeneration cycle will increase and, at the same time,

the costs associated with regenerating the adsorption dryer 1 will decrease.

In the context of the present invention it should be understood that, depending on the measured dew point or relative humidity, the additional regeneration time interval, T_{E1} , can subsequently increase and again decrease until reaching a value of zero.

For ease of measurement and/or determination, but not limiting to, the measured parameter is the pressure dew point, which is being further compared with a predetermined pressure dew point threshold.

In another preferred embodiment, said predetermined pressure dew point threshold is selected accordingly to the requirements of the gas at the dryer outlet 5.

In another embodiment according to the present invention, the outlet temperature, $temp1$, is measured and compared with a predetermined temperature threshold, and, if said measured outlet temperature $temp1$ is higher than or equal to said predetermined temperature threshold, and, if the time frame in which the adsorption dryer 1 is subjected to said first regeneration cycle is greater than a minimum heat regeneration time interval, $T_{Heat-min}$, then the method comprises the step of stopping said first regeneration cycle.

Tests have proven that, once the temperature of the regeneration gas measured at the outlet 7 of the adsorption vessel 2 reaches a predetermined temperature threshold, the at least one adsorption vessel 2 is regenerated. Said predetermined temperature threshold can be calculated based on the volume of the at least one

adsorption vessel 2 and the type of adsorbent material comprised therein.

By maintaining the first regeneration cycle for at least said minimum heat time interval, $T_{\text{Heat-min}}$, a safety measurement is being taken and an optimum regeneration of the adsorbent material is being performed.

In another preferred embodiment, the method according to the present invention performs both steps when performing said first regeneration cycle: maintaining the first regeneration cycle for an additional regeneration time interval, T_{E1} , if said measured pressure dew point or the relative humidity is higher than said predetermined pressure dew point or relative humidity threshold; and stopping said first regeneration cycle if the outlet temperature, $temp1$, is higher than or equal to said predetermined temperature threshold, and, if the time frame in which the adsorption dryer 1 is subjected to said first regeneration cycle is greater than a minimum heat regeneration time interval, $T_{\text{Heat-min}}$.

By applying both steps, the current state of the adsorbent material is considered and the method according to the present invention is allowed to evolve and adapt accordingly.

In another preferred embodiment, if said measured outlet temperature, $temp1$, of the regeneration gas is lower than said predetermined temperature threshold and if the time frame in which the adsorption dryer 1 is subjected to said first regeneration cycle is larger than or equal to

a maximum heat regeneration time interval, $T_{\text{Heat-Max}}$, said first regeneration cycle is stopped.

By stopping the first regeneration cycle after said maximum heat regeneration time interval, $T_{\text{Heat-Max}}$, is reached, an efficient functioning of the adsorption dryer 1 is maintained, since long waiting times for starting a subsequent adsorption cycle are avoided and the efficiency of the adsorption dryer is increased.

In a preferred embodiment according to the present invention, the method uses the calculated additional regeneration time interval, T_{E1} , in a subsequent first regeneration cycle. Accordingly, in a subsequent regeneration cycle the additional regeneration time interval, T_{E1} , is calculated by adding a first predetermined time interval, t_0 , to a previously set additional regeneration time interval $T_{E1,0}$ wherein said previously set additional regeneration time interval $T_{E1,0}$ is the additional regeneration time interval determined during the previous regeneration cycle.

In the context of the present invention it is to be understood that t_0 can be a particular value or can be calculated based on a function having as parameters the measurements performed in a previous regeneration cycle.

It should not be excluded that, a user of the adsorption dryer 1 according to the present invention is able to choose the value of t_0 , by using the user interface.

For example, and not limiting to, said first predetermined time interval, t_0 , can be approximately 15 minutes, or approximately 30 minutes, or approximately 45 minutes or more.

Preferably, when the adsorption dryer 1 is started, the previously set additional regeneration time interval $T_{E1,0}$ is zero.

In another embodiment according to the present invention,
5 if said measured pressure dew point or relative humidity is not higher than said predetermined pressure dew point or relative humidity threshold, the method further comprises the step of comparing said measured pressure
10 dew point or relative humidity with a second pressure dew point or relative humidity threshold and, if the measured pressure dew point or relative humidity is lower than a second pressure dew point or relative humidity threshold, the present method preferably further comprises the step of maintaining the regeneration cycle for a second
15 additional regeneration time interval, T_{E2} , wherein said second predetermined pressure dew point or relative humidity threshold is lower than the first predetermined pressure dew point or relative humidity threshold.

Preferably, the method according to the present invention
20 will apply either the additional regeneration time interval, T_{E1} , or the second additional regeneration time interval, T_{E2} , in the subsequent regeneration cycle, depending on the result of the comparison.

Preferably, but not limiting to, said second additional
25 regeneration time interval, T_{E2} , is smaller than the additional regeneration time interval, T_{E1} .

In yet another preferred embodiment, said second
additional regeneration time interval, T_{E2} , has a
negative value. In other words, if the measured pressure
30 dew point or relative humidity is lower than a second

pressure dew point or relative humidity threshold, a subsequent first regeneration cycle will be with $|T_{E2}|$ shorter than the previous one, wherein $|T_{E2}|$ represents the absolute number of T_{E2} .

- 5 Preferably, the difference between the measured pressure dew point or relative humidity and the second pressure dew point or relative humidity threshold is a tolerance that the method takes into account before the first regeneration cycle is being prolonged.
- 10 Said tolerance can be any selected value, depending on the required results of the adsorption dryer 1 and the behavior of the adsorbent material. For example, such tolerance can be a value selected between 1° and 10° , such as approximately 5° .
- 15 Preferably, the second additional regeneration time interval, T_{E2} , is calculated by adding a second predetermined time interval, $t1$, to a previously set time interval $T_{E2,0}$, wherein said previously set additional regeneration time interval $T_{E2,0}$ is the second additional
- 20 regeneration time interval determined during the previous regeneration cycle.

In the context of the present invention it is to be understood that $t1$ can be a particular value or can be calculated based on a function having as parameters the

25 measurements performed in a previous regeneration cycle.

It should not be excluded that, a user of the adsorption dryer 1 according to the present invention is able to choose the value of $t1$, by using the user interface.

For example, and not limiting to, said second predetermined time interval, t_1 , can be approximately 15 minutes, or approximately 30 minutes, or approximately 45 minutes or more.

5 In the context of the present invention it should be understood that said second predetermined time interval, t_1 , can also be a negative time interval, case in which time is subtracted.

10 Preferably, when the adsorption dryer 1 is started, the previously set additional regeneration time interval $T_{E2,0}$ is zero.

The method according to the present invention can further comprise the step of recalculating said predetermined minimum heat regeneration time interval, $T_{Heat-min}$, by
15 adding said additional regeneration time interval, T_{E1} , to a predetermined minimum time interval, $Time_3$; or by adding said second additional regeneration time interval, T_{E2} , to said predetermined minimum heat regeneration time interval $Time_3$.

20 Preferably, said predetermined minimum heat regeneration time interval $Time_3$ is selected through design.

In a further embodiment according to the present invention, the method further comprises the step of calculating a maximum heat regeneration time interval in
25 which the regeneration cycle can be maintained, $T_{Heat-Max}$, by adding said additional regeneration time interval, T_{E1} , to a preset maximum heat regeneration time interval, $Time_4$; or by adding said second additional regeneration time interval, T_{E2} , to said preset maximum heat
30 regeneration time interval, $Time_4$.

Preferably, said preset maximum heat regeneration time interval, Time 4 is selected through design.

Because the minimum heat regeneration time interval, Time 3, and the maximum heat regeneration time interval, Time 4, are being selected through design, an adsorption dryer 1 implementing the present method will follow a well-defined pattern during its functioning, and will eliminate the risk of having a lower than requested quality of the gas provided at the dryer outlet 5 or of encountering long waiting time intervals between subsequent adsorption cycles.

Preferably, the adsorption dryer 1 is subjected to a second regeneration cycle, by maintaining the flow of process gas through the dryer inlet 4, for a preset minimum regeneration time interval, T_{im1} .

By maintaining the flow of process gas through the dryer inlet 4, an adsorption dryer 1 implementing the method according to the present invention uses the source of gas 3 during part of the regeneration cycle of an adsorption vessel 2, without the influence of the heated gas, for reducing even more the energy consumption.

In a further embodiment, the previously calculated T_{E1} , T_{E2} , are used to recalculate the minimum regeneration time interval in which the flow of process gas is maintained at the dryer inlet 4, T_{min} , by: subtracting said additional regeneration time interval, T_{E1} , from said preset minimum regeneration time interval, T_{im1} , or by: subtracting said second additional regeneration time interval, T_{E2} , from said preset minimum regeneration time interval, T_{im1} . Accordingly, the pressure dew point or

relative humidity measurement constitutes a basis for adjusting the time intervals in which both regeneration cycles are being performed: the first regeneration cycle and the second regeneration cycle.

- 5 Further, the method can further comprise the step of calculating a maximum regeneration time interval, T_{Max} , in which the flow of process gas is maintained at the dryer inlet 4, by subtracting said additional regeneration time interval, T_{E1} , from a predetermined maximum time interval,
10 Time2, or by subtracting said second additional regeneration time interval, T_{E2} , from said preset maximum regeneration time interval, Time2.

Preferably, the adsorption dryer 1 is first subjected to the second regeneration cycle and then to the first
15 regeneration cycle. Because of this, the adsorption dryer 1 uses the properties of the regeneration gas as much as possible and only when this is not sufficient, it will use the heated gas. Tests have shown that, when the at least one adsorption vessel 2 is maintained at for
20 example at approximately 80% load or 60% load or less during the adsorption cycle, and once the time interval in which the heated gas is used reaches a zero value, because of the present method, the zero value will be maintained.

- 25 Depending on the requirements of the adsorption dryer 1, it can be provided with at least two adsorption vessels 2 and the first regeneration cycle and the second regeneration cycle are applied to each adsorption vessel 2 alternatively.

By doing this, each adsorption vessel 2 will be treated individually, and depending on the current state of each adsorption vessel 2, the method regulates the time intervals in which the first regeneration cycle and the
5 second regeneration cycle are performed, such that an optimum result is achieved.

Accordingly, even if one of the at least two adsorption vessels 2 is subjected to a process gas with a higher level of humidity, the method according to the present
10 invention will regulate the time intervals individually for each adsorption vessel 2, such that an optimum regeneration of the adsorbent material will be performed, at the lowest cost and within an optimum period of time.

In the context of the present invention it should be understood that the number of adsorption vessels 2 can
15 vary and that the method of the present invention can be equally applied to an adsorption dryer 1 comprising more than two adsorption vessels 2, such as for example three adsorption vessels, four adsorption vessels or more.

20 Preferably, the method according to the present invention further comprises the step of subjecting the at least one adsorption vessel 2 to a cooling cycle wherein said process gas is cooled by means of a cooler 8. By doing this, the temperature of the gas provided through the
25 dryer outlet 5 will be controlled according to the requirements.

Preferably, after the regeneration cycles are performed, the at least one adsorption vessel 2 of the adsorption dryer 1 is preferably maintained in standby. By
30 performing this step, each adsorption vessel 2 is

maintained ready to start a new adsorption cycle possibly before such a request is even retrieved. Because of this, the response time of the adsorption dryer 1 implementing a method according to the present invention is reduced to
5 a minimum.

Preferably, when the adsorption vessel 2 is maintained in standby, the flow of gas through the inlet 6 is stopped and the flow at the dryer outlet 5 is maintained, such that a minimum pressure is maintained within the
10 adsorption vessel 2.

In a preferred embodiment according to the present invention, but not limiting to, the method applies the following steps for each of the at least one adsorption vessel 2 in the following order: first one of the
15 adsorption vessels 2 is subjected to a second regeneration cycle, then the same adsorption vessel 2 is preferably subjected to a first regeneration cycle, then the same adsorption vessel 2 is preferably subjected to a cooling cycle and afterwards is preferably maintained in
20 standby. During the cooling cycle, the gas coming from the gas source 3 is preferably cooled by means of a cooler 8.

Even more preferably, for controlling the temperature of the regeneration gas flowing through the dryer outlet 5,
25 the regeneration gas flowing through the at least one adsorption vessel 2, after leaving said at least one adsorption vessel 2, is cooled by means of the same or a different cooler 8 during both first regeneration cycle and second regeneration cycle.

Even more preferably, said cooler 8 is further used during the adsorption phase for controlling the process gas flowing through said dryer outlet 5.

For clarity's sake, the functioning principle will be further explained with reference to the accompanying drawings.

It should be understood that the following examples explain different working states of the adsorption dryer 1 and that the method for regulating the regeneration time as described in the present paper is applicable during the regeneration cycles of each example that will be further explained.

It should be understood that the adsorption dryer can work with a different configuration as well, and the following section should not be considered limiting for the design.

Figure 2 illustrates an example of an adsorption dryer 1 comprising at least two adsorption vessels 2a and 2b, wherein while one adsorption vessel 2b is subjected to a second regeneration cycle, the second adsorption vessel 2a is subjected to an adsorption cycle.

Accordingly, the gas from the outlet of the compressor 3 is allowed to flow through the cut-off valve 20 and through valve 10, reaching the adsorption vessel 2b. The control valve 19, inlet valve 11 and outlet valve 21 are preferably brought in a closed state by the controller unit C.

After the flow of gas leaves the adsorption vessel 2b, is directed through control valve 15, through cooler 8a,

where it is cooled. The flow of cooled gas is further directed through control valve 18 and further through adsorption vessel 2a, wherein moisture is adsorbed before leaving the adsorption dryer 1 through outlet valve 22 and
5 dryer outlet 5.

In this example, regulating valve 12 is preferably brought into a partial open state, such that a volume of gas from the outlet of the compressor 3 reaches the cooler 8b, under the influence of which it is cooled,
10 flows through the two-way valve 14 and reaches the adsorption vessel 2a. The two way valve 13 is preferably brought into a closed state.

The gas flow reaches the dryer outlet 5 and is further used in an external network. For this to happen, the
15 inlet valve 11 is preferably brought in closed state.

Preferably, adsorption vessel 2b is in the second regeneration phase, wherein the heat of the compressed gas is used to remove moisture from the adsorbent medium, and the adsorption vessel 2a is in adsorption phase.

20 As an example, the regulating valve 12 can be controlled by the controller unit C such that approximately 50% of the compressed gas is allowed to reach the heater 9 and approximately 50% of the compressed gas is allowed to reach the cooler 8b.

25 Another effect of opening the regulating valve 12 is to control the pressure drop through the adsorption dryer 1 and accordingly through adsorption vessels 2a and 2b.

In a subsequent step, the adsorption vessel 2b can be subjected to a first regeneration cycle, wherein the flow

of gas follows the same path as previously explained with reference to Figure 2, with the difference that heater 9 is switched on by the controller unit C.

Another possible difference is to regulate the degree of openness of the regulating valve 12, such that the volume of compressed gas reaching the heater 9 is controlled. Preferably, the degree of openness of the valve 12 is increased when compared with the previous example, such that the heater 9 will increase more easily the temperature of the compressed gas and/or would possibly achieve a higher temperature of said compressed gas before being directed through the adsorption vessel 2b.

As an example, the regulating valve 12 can be controlled by the controller unit C such that approximately 30% of the compressed gas is allowed to reach the heater 9 and approximately 70% of the compressed gas is allowed to reach the cooler 8b.

Figure 3 illustrates an example wherein while one adsorption vessel 2b is subjected to a cooling cycle, the other adsorption vessel, 2a, is subjected to or maintained in an adsorption cycle.

After the adsorption vessel 2b has been subjected to a second regeneration cycle and a first regeneration cycle, the temperature within said adsorption vessel 2b reaches high values and is preferably cooled down. For achieving this, the adsorption dryer 1 uses cooler 8b.

Accordingly, the compressed gas is directed through the regulating valve 12, through cooler 8b where it is cooled, further through the two-way valve 13 and into the adsorption vessel 2b.

Preferably, the cut-off valve 20, the control valves 17 and 15 are brought into a closed state.

The gas flowing through the adsorption vessel 2b will reach a higher temperature and because of this it will be directed through inlet valve 10, and control valve 19 through the cooler 8a.

In this example, the heater 9 is switched off, the inlet valve 11 and outlet valve 21 are brought into a closed state.

After the gas is being cooled by cooler 8a, the flow is directed through control valve 18, into the adsorption vessel 2a wherein moisture is adsorbed from said gas before being guided through the outlet valve 22 and through the dryer outlet 5 into an external network.

Preferably, the two-way valve 14 and the control valve 16 are brought into a closed state.

As an example, the regulating valve 12 can be controlled by the controller unit C such that approximately 100% of the volume of gas from the compressor 3 is directed through the cooler 8b.

Figure 4 illustrates an example in which one adsorption vessel, 2b, is in standby and the other adsorption vessel, 2a, is in adsorption.

In this example, the air coming from the compressor 3 is preferably allowed to flow through the regulating valve 12 and through the control valve 19.

After passing the regulating valve 12, the air is cooled by the cooler 8b, part of it reaches the outlet of the

adsorption vessel 2b, through the two-way valve 13 and part of it reaches the outlet of the adsorption vessel 2a through the two way valve 14. Preferably, the control valves 15 and 17, the inlet valve 10 and the outlet valve
5 21 are brought into a closed state.

Because part of the cooled air reaches the outlet of the adsorption vessel 2b and because inlet valve 10 and outlet valve 21 are brought into a closed state, a minimum desired pressure is maintained into the
10 adsorption vessel 2b such that, when such adsorption vessel is subjected to an adsorption cycle, the adsorption dryer 1 does not experience a significant pressure drop.

Further, the compressed air flowing through control valve
15 19 reaches the cooler 8a wherein it is cooled and reaches the outlet of the adsorption vessel 2a through control valve 18. As it passes through said adsorption vessel 2a, moisture is adsorbed. Further the cooled and dry air is directed through outlet valve 22 into the external
20 network.

Preferably, inlet valve 11 is also brought into a closed state, such that the air coming from the compressor 3 is only allowed to flow through the regulating valve 12 and control valve 19. In this example, the heater 9 is
25 preferably maintained in a switched off state.

For efficiency purposes and because, during this stage a minimum pressure is desired to be maintained in adsorption vessel 2b, the opening of the regulating valve 12 will be controlled such that a minimum volume of
30 compressed air is allowed to reach the cooler 8b and

further, the adsorption vessel 2b, such as, for example:
40% or less from the volume of compressed air, or,
preferably 30% or less from the volume of compressed air,
or, even more preferably, 25% or less from said volume of
5 compressed air.

Figure 5 illustrates an example in which adsorption
vessel 2b is in an adsorption phase and adsorption vessel
2a is in a second regeneration phase.

In this example, the air coming from the compressor unit
10 3 is preferably allowed to flow through the regulating
valve 12 and through the inlet valve 11 and further reach
the adsorption vessel 2a.

Preferably, the heater 9 is switched off, control valve
19, inlet valve 10 and outlet valve 22 are brought into a
15 closed state.

Because the air coming from the compressor 3 is warm due
to the compression process, it will regenerate said
adsorption vessel 2a. After leaving the adsorption vessel
2a, the air is directed through cooler 8a wherein it is
20 cooled and further through the adsorption vessel 2b since
control valve 17 is brought into an open state.
Preferably, control valves 14, 15 and 18 are brought into
a closed state.

Further, the air flowing through the regulating valve 12
25 is further directed through the cooler 8b wherein it is
cooled and is further directed through the two-way valve
13 and further through the adsorption vessel 2b. The
moisture from the cooled air flowing through said
adsorption vessel 2b is adsorbed and the cooled and dry

air is guided to the external network through outlet valve 21 and dryer outlet 5.

Preferably, the regulating valve 12 is controlled such that part of the air coming from the compressor 3 is guided through valve 12 and reach the cooler 8b, and the rest is guided through cut-off valve 20 and further through adsorption vessel 2a.

As an example, the regulating valve 12 can be controlled by the controller unit C such that approximately 50% of the compressed gas is allowed to reach adsorption vessel 2a and approximately 50% of the compressed gas is allowed to reach the cooler 8b.

In a subsequent step, adsorption vessel 2a can be subjected to a first regeneration cycle, wherein the flow of air is maintained as in the previous example, and wherein the heater 9 is switched on by the controller unit C.

For a better efficiency, the regulating valve 12 can be controlled such that a bigger volume of air reaches the cooler 8b and further the adsorption vessel 2b, and a smaller volume of air is allowed to reach the heater 9.

As an example, the regulating valve 12 can be controlled by the controller unit C such that approximately 30% of the compressed gas is allowed to reach the heater 9 and approximately 70% of the compressed gas is allowed to reach the cooler 8b.

Figure 6 illustrates an example in which adsorption vessel 2a is subjected to a cooling cycle and adsorption vessel 2b is maintained in an adsorption cycle.

In this example, the cut-off valve 20 is preferably brought into a closed state such that the air coming from the compressor 3 is guided through the regulating valve 12 and further through the cooler 8b wherein it is cooled.

The cooled air is further directed through the two-way valve 14 and further through the adsorption vessel 2a wherein heat entrapped within said adsorption vessel 2a is transferred through the gas flowing therethrough. Preferably, the two-way valve 13, control valves 16 and 18 are brought into a closed state.

The air leaving the adsorption vessel 2a is guided through inlet valve 11 and control valve 19 through the cooler 8a, wherein the air is cooled. Preferably, outlet valve 22, inlet valve 10 and control valve 15 are brought into a closed state.

After the air is cooled by said cooler 8a, it is further directed through control valve 17 through adsorption vessel 2b wherein moisture is adsorbed. The air leaving the adsorption vessel 2b is further directed to the external network through outlet valve 21.

For a better efficiency, the regulating valve 12 is preferably controller such that approximately the entire volume of compressed gas coming from the compressor 3 is guided therethrough.

Figure 7 illustrates an example in which adsorption vessel 2a is in standby and adsorption vessel 2b is maintained in an adsorption cycle.

In this example, the air coming from the compressor 3 is guided through the regulating valve 12 and through the control valve 19 to reach cooler 8b and 8a respectively, wherein the two flows are cooled.

5 Preferably, inlet valves 10 and 11 and outlet valve 22 are brought into a closed state.

Part of the air flowing through the regulating valve 12 and further cooled by cooler 8b is guided through the adsorption vessel 2b through the two-way valve 13 and
10 part of it is brought at the outlet of the adsorption vessel 2a with the help of the two way valve 14 which is brought into an open state.

Further the air flowing through cooler 8a is guided through adsorption vessel 2b, since control valve 17 is
15 preferably brought into an open state.

Further preferably, control valves 15, 16 and 18 are brought into a closed state.

The air leaving the adsorption vessel 2b is guided to the external network through outlet valve 21.

20 Because part of the cooled air is brought to the outlet of the adsorption vessel 2a, a minimum pressure level is maintained through said adsorption vessel 2a such that, when the adsorption vessel 2a is subjected to an adsorption cycle, a pressure drop within the adsorption
25 dryer 1 is very small or even eliminated.

Figure 8 shows another possible embodiment of an adsorption dryer according to the present invention, wherein an additional cooler 8c is included. The working

principle remains the same as in the above described examples.

The only difference is that instead of using only cooler 8a, the adsorption dryer will make use of two coolers 8a and 8c, mounted in parallel. Accordingly, the flow of gas previously reaching cooler 8a will be reduced in half, which will increase even more the efficiency of the cooling process.

10 Figure 9 illustrates another example of a dryer 1 according to the present invention in which a volume of gas is used for cooling down each of the two adsorption vessels 2. Said volume of gas will be referred to as the purge gas.

15 The layout of the adsorption dryer 1 illustrated in Figure 9 differs from the one of Figure 1 in that the adsorption dryer 1 uses a nozzle 23 and a purge valve 24 for controlling the volume of purge gas and when such purge gas will be used.

20 Another difference is that control valves 15 and 16 have been replaced with one way valves 25 and 26. It should be however understood that control valves 15 and 16 could have also been used in this specific example, however, by using one way valves 25 and 26, the control unit does not
25 need to actuate them anymore and the flow regulation will be done based on the pressure difference within the conduits on which said one way valves 25 and 26 are mounted.

The adsorption dryer 1 further uses pressure relief valves 27 and 28 for controlling the pressure within the adsorption vessels 2a and 2b and allowing the pressure build within said adsorption vessels 2a and 2b to be
5 evacuated into the atmosphere or the outside environment.

Further, extract valves 29 and 30 are being used for allowing a volume of gas to leave the adsorption dryer 1 into the atmosphere or the outside environment.

Figure 10 illustrates the situation in which adsorption
10 vessel 2b is in a second regeneration cycle and adsorption vessel 2a is in an adsorption cycle.

In such a working state, the regeneration gas flowing through the dryer inlet 4 and coming from the compressor 3, having a relatively high temperature is directed
15 through adsorption vessel 2b, is subsequently cooled down by cooler 8 and guided through adsorption vessel 2a and further through the dryer outlet 5 to the external network.

Accordingly inlet valve 10, control valve 18 and outlet
20 valve 22 are open and inlet valve 11, outlet valve 21, purge valve 24, the regulating valve 12, the pressure relief valves 27 and 28, control valve 17, extract valves 29 and 30, are maintained closed.

Because the pressure level at the level of conduit A is
25 higher than the pressure level at the level of conduit B, the one way valve 25 opens and allows the gas flow to reach the cooler 8.

Figure 11 illustrates the working state in which adsorption vessel 2b is subjected to a first regeneration

cycle, in which heater 9 is switched on and adsorption vessel 2a is in an adsorption cycle.

In such a working state, part of the gas flowing through the dryer inlet 4 and coming from the compressor 3 reaches the heater 9 which increases the temperature even more, is guided through adsorption vessel 2b, the flow of gas is subsequently cooled by cooler 8 and is further guided through adsorption vessel 2a and further through the dryer outlet 5 to the external network.

10 Preferably, the regulating valve 12 is partially open. Even more preferably, the regulating valve 12 allows approximately 80% of the gas flow to flow through it and only approximately 20% of the gas flow to reach the heater 9.

15 Accordingly, inlet valve 10, regulating valve 12, control valve 18 and outlet valve 22 are open and inlet valve 11, outlet valve 21, purge valve 24, pressure relief valves 27 and 28, extract valves 29 and 30, and control valve 17 are maintained closed.

20 Because the pressure level at the level of conduit A is higher than the pressure level at the level of conduit B, the one way valve 25 opens and allows the gas flow to reach the cooler 8. The gas flowing through the regulating valve 12 also reaches the cooler 8 and it is cooled before reaching the adsorption vessel 2a. After the first regeneration cycle ends, adsorption vessel 2b can be subjected to a pressure relief state, as illustrated in Figure 12. At the same time, adsorption vessel 2a is preferably maintained in the adsorption cycle.

The gas flowing through the dryer inlet 4 is cooled down by cooler 8, is guided through adsorption vessel 2a and further through the dryer outlet 5 to the external network.

5 Preferably, regulating valve 12 is open, as well as control valve 18 and outlet valve 22. Inlet valves 10 and 11, purge valve 24, outlet valve 21, control valve 17, extract valves 29 and 30 and pressure relief valve 28 are maintained closed.

10 Preferably, in such a working state pressure relief valve 27 is maintained open such that the pressure build within the adsorption vessel 2b can be evacuated.

Because the pressure level at conduit A is smaller than the pressure level at conduit B, one way valve 25 is not
15 opening.

Preferably, in a subsequent step the adsorption vessel 2b is cooled by means of a purge gas flow and the adsorption vessel 2a is maintained in adsorption state, as illustrated in Figure 13.

20 In such a working state, the gas flowing through the dryer inlet 4 reaches the cooler 8, the cooled gas is then guided through the adsorption vessel 2a and part of the gas flow will reach the external network through the dryer outlet 5 and part of it will flow through the
25 nozzle 23, will reach adsorption vessel 2b which will be cooled and will be further evacuated to the atmosphere or the outside environment.

Accordingly, regulating valve 12, control valve 18, outlet valve 22, purge valve 24 and extract valve 29 are

open and inlet valves 10 and 11, outlet valve 21, pressure relief valves 27 and 28, control valve 17 and extract valve 30 are closed.

Preferably, said nozzle 23 allows only a limited volume
5 of the gas flow to pass therethrough and reach the adsorption vessel 2b. Depending on the type of nozzle used, such a nozzle can allow between 5 and 20% of the gas flow to pass therethrough. As an example, but not limiting to, the nozzle used by the adsorption dryer 1
10 allows approximately 10% of the gas flow to pass therethrough.

Since the pressure level at the level of conduit A is smaller than the pressure level at the level of conduit B, one way valve 25 does not open.

15 The control system can further bring the adsorption vessel 2b in a pressure equalization state while the adsorption vessel 2a is maintained in an adsorption state, as illustrated in Figure 14.

Preferably, the gas flowing through the dryer inlet 4
20 reaches the cooler 8, the cooled gas is guided through the adsorption vessel 2a and part of the gas flow reaches the external network through the dryer outlet 5 and part of said gas flow enters in the adsorption vessel 2b.

Preferably, pressure relief valve 27, control valve 17
25 and extract valve 29 are closed such that the pressure within the adsorption vessel 2b reaches the desired value.

Regulating valve 12, control valve 18, outlet valve 22 and purge valve 24 are open and inlet valves 10 and 11 and outlet valve 21 are maintained closed.

After adsorption vessel 2b has been pressurized, the
5 controller can further subject the adsorption vessels 2a and 2b to a split flow state, as illustrated in Figure 15.

The gas flowing through the dryer inlet 4 and coming from the compressor 3 reaches the cooler 8, the cooled gas is
10 then split and reaches both adsorption vessels 2a and 2b before reaching the external network through dryer outlet 5.

The regulating valve 12, control valves 17 and 18 and outlet valves 21 and 22 are open and inlet valves 10 and
15 11, purge valve 24, pressure relief valves 27 and 28, and extract valves 29 and 30 are maintained closed.

It should be understood that such a working state is optional. The benefit of a split flow state is a low pressure drop between the pressure at the level of the
20 dryer inlet 4 and the pressure level at the level of the dryer outlet 5.

Subsequently, adsorption vessel 2b can be brought into a standby state while adsorption vessel 2a can be maintained in adsorption state, as illustrated in Figure
25 16.

During such a working state, the gas flowing through the dryer inlet 4 reaches the cooler 8, the cooled gas is guided through adsorption vessel 2a and further reaches the external network through dryer outlet 5.

Accordingly, regulating valve 12, control valve 18 and outlet valve 22 are open and inlet valves 10 and 11, purge valve 24, outlet valve 21, pressure relief valves 27 and 28, extract valves 29 and 30 and control valve 17
5 are maintained closed.

Subsequently, the working stages described above with respect to Figures 10 to 16 will be applied to the adsorption vessels 2a and 2b in such a way that the adsorption vessels will be shifted between each other
10 such that adsorption vessel 2b will be subjected to an adsorption stage and adsorption vessel 2a will be regenerated. Accordingly, the working principle as described above with respect to Figures 10 to 16 will remain the same.

15 Figure 17 illustrates the case in which adsorption dryer 1 comprises 3 adsorption vessels 2a, 2b and 2c. Preferably, but not limiting to, each adsorption vessel 2a, 2b and 2c comprises an internal heater 9.

The adsorption dryer 1 preferably further comprises an
20 additional regulating valve 33 for controlling the volume of gas reaching at least one of the adsorption vessels 2a, 2b and 2c based on the temperature measured within said at least one adsorption vessel 2a, 2b and 2c.

25 Additionally, a water separator 36 can be used for eliminating excess water from the system. Said water separator 36 being provided with at least one extract valve 37 for eliminating the collected water. The adsorption dryer 1 further comprises cut-off valves 38 and 38 for controlling the flow of gas.

As in the above presented examples, the control valve 19 and the cut-off valve 20 are maintained, as well as the layout of the inlet valves, outlet valves, two way valves and control valves for each adsorption vessel.

5 Additionally, inlet valve 31, outlet valve 32, a two way valve 34 and a control valve 35 have been added for the third adsorption vessel 2c.

Figure 18 illustrates the flow within the adsorption dryer 1 when adsorption vessel 2a is subjected to a

10 second regeneration cycle and adsorption vessels 2b and 2c are subjected to an adsorption cycle. Preferably, the gas flowing through the dryer inlet 4 is at a relatively high temperature because is preferably being previously compressed by compressor 3.

15 Preferably, regulating valve 33 is partially open such that approximately 50% of the volume of gas flowing through the dryer inlet 4 is allowed to flow therethrough and the rest of the volume of gas reaches adsorption vessel 2a.

20 The gas flowing through the outlet 7 of adsorption vessel 2a recombines with the volume of gas flowing through the regulating valve 33 and reaches the cooler 8. The cooled gas is guided through the water separator before being split between adsorption vessels 2b and 2c.

25 The relatively cold and dry gas leaving the two adsorption vessels 2b and 2c is guided through the dryer outlet 5 towards the external network.

Accordingly, cut-off valve 20, regulating valve 33, inlet valve 11, control valve 16, cut-off valve 38, two way

30 valves 13 and 34, and outlet valves 21 and 32 are

maintained open and control valve 19, extract valve 37, cut-off valve 39, outlet valve 22, inlet valves 10 and 31, two way lave 14, and control valves 15 and 35 are maintained closed.

5 Subsequently, the adsorption vessel 2a can be subjected to a first regeneration cycle while the adsorption vessels 2b and 2c are maintained in an adsorption cycle.

Preferably, the internal heater 9 of the adsorption vessel 2a is switched on, increasing even more the
10 temperature of the volume of gas reaching said adsorption vessel 2a.

The path of the gas flow remains the same as in the previous example, the only difference being the degree of openness of regulating valve 33 which, in this case is
15 preferably open approximately 80%, such that the volume of gas reaching the adsorption vessel 2a is approximately 20% and, accordingly, the efficiency of the internal heater 9 is increased.

In a subsequent step, as illustrated in Figure 19, the
20 adsorption vessel 2a can be subjected to a cooling cycle, while adsorption vessels 2b and 2c are maintained in an adsorption cycle.

Preferably, regulating valve 33 is fully open and regulating valve 12 is partially open. The degree of
25 openness of regulating valve 12 can be for example approximately 80%.

The gas flowing through the dryer inlet 4 is preferably cooled by cooler 8, passes through the water separator 36, and because of the degree of openness of regulating

valve 12, approximately 20% of the gas flow reaches the adsorption vessel 2a, cooling it. The gas flowing through the inlet 6 of the adsorption vessel 2a is guided through the cooler 8 and recombines with the gas flowing through the regulating valve 12. Further the resulting gas flow reaches adsorption vessels 2b and 2c and moisture is adsorbed.

The relatively cold and dry gas is guided through the dryer outlet 5 towards the external network.

Subsequently, the working stages described above with respect to Figures 18 and 19 will be applied to the adsorption vessels 2a, 2b and 2c in such a way that the adsorption vessel subjected to a first and/or a second regeneration cycle will be shifted. For example, adsorption vessel 2b will be regenerated while adsorption vessels 2a and 2c will be maintained in a regeneration cycle. The working principle as described above with respect to Figures 18 and 19 will remain the same. Subsequently, adsorption vessel 2c will be regenerated while adsorption vessels 2a and 2b will be maintained in a regeneration cycle.

Figure 20 illustrates a layout of the adsorption dryer 1 comprising 3 adsorption vessels 2a, 2b and 2c in which a volume of purge gas is used for cooling down each of the three adsorption vessels 2a, 2b and 2c.

The layout of said adsorption dryer 1 is similar to the one disclosed in Figure 17, one of the differences being that each of the adsorption vessels 2a, 2b, 2c further comprises a nozzle 23, 42 and 44 and a purge valve 24, 41

and 43 for controlling the flow of gas through said nozzle 23, 42 and 44.

Each adsorption vessel 2a, 2b and 2c further comprises a pressure relief valve 28, 27 and 40 allowing the pressure
5 built within said adsorption vessel 2a, 2b and 2c to be relieved into the atmosphere or the outside environment.

In this case control valve 19, cooler 8 (which was positioned on the same conduit as control valve 19, in Figure 17), regulating valve 12 and cut-off valve 39 are
10 removed and cut-off valve 45 and extract valve 29 have been added.

Figure 21 illustrates the case in which adsorption vessel 2a is subjected to a second regeneration cycle and adsorption vessels 2b and 2c are subjected to an
15 adsorption cycle.

The gas flow through the adsorption dryer 1 is the same as the one described in correlation with Figure 18.

Preferably, the regulating valve 33 is partially open, such that approximately 50% of the gas flowing through
20 the dryer inlet 4 is allowed to reach adsorption vessel 2a and the rest approximately 50% of the gas flow is flowing through said regulating valve 33.

Subsequently, the adsorption vessel 2a can be subjected to a first regeneration cycle, in which case, internal
25 heater 9 of said adsorption vessel 2a is switched on and adsorption vessels 2b and 2c are maintained in a adsorption cycle.

The gas flow remains the same as in the case of Figure 21, and regulating valve 33 is preferably partially open,

such that approximately 20% of the gas flowing through the dryer inlet 4 reaches the adsorption vessel 2a wherein its temperature is further increased.

Subsequently, adsorption vessel 2a can be subjected to a depressurization cycle, while adsorption vessels 2b and 2c are maintained in an adsorption cycle, as illustrated in Figure 22.

In such a situation, the gas flowing through the dryer inlet 4 is cooled by cooler 8, is further guided through the water separator 36 and towards the adsorption vessels 2b and 2c before being directed to the external network through the dryer outlet 5.

Preferably, the pressure relief valve 28 is opened such that pressure previously built within adsorption vessel 2a is relieved within the atmosphere or the outside environment.

Accordingly, regulating valve 33, cut-off valve 45, two way valves 13 and 34, outlet valves 21 and 32, and pressure relief valve 28 are open and cut-off valve 20, cut-off valve 38, extract valve 37, two way valve 14, control valves 15, 16, and 35, pressure relief valves 27 and 40, extract valve 29, inlet valves 10, 11 and 31, outlet valve 22, purge valves 24, 41 and 43 are maintained closed.

Subsequently, adsorption vessel 2a can be further subjected to a cooling cycle by using a purge gas, while adsorption vessels 2b and 2c are maintained in an adsorption cycle, as illustrated in Figure 23.

Preferably, the gas flowing through the dryer inlet 4 is cooled by the cooler 8, flows through the water separator 36 and reaches the adsorption vessels 2b and 2c. Further, part of the gas flow reaches the external network through the dryer outlet 5 and a small part of said gas flow is guided through the nozzle 23, into the adsorption vessel 2a, cooling it.

The gas flowing through the outlet 7 of the adsorption vessel 2a, which is relatively dry gas at a relatively high temperature is guided to the atmosphere or the outside environment.

Accordingly, regulating valve 33, cut-off valve 45, two way valves 13 and 34, outlet valves 21 and 32, purge valve 24, control valve 16 and extract valve 29 are open and cut-off valves 20 and 38, extract valve 37, two way valve 14, pressure relief valves 27, 28 and 40, control valves 15 and 35, inlet valves 10, 11 and 31, outlet valve 22, purge valves 41 and 43 are maintained closed.

Subsequently, the working stages described above with respect to Figures 21 to 23 will be applied to the adsorption vessels 2a, 2b and 2c in such a way that the adsorption vessel subjected to a first and/or a second regeneration cycle will be shifted. For example, adsorption vessel 2b will be regenerated while adsorption vessels 2a and 2c will be maintained in a regeneration cycle. The working principle as described above with respect to Figures 21 to 23 will remain the same. Subsequently, adsorption vessel 2c will be regenerated while adsorption vessels 2a and 2b will be maintained in a regeneration cycle.

In the above presented examples it should be understood that, when going from one working state to another, the control system can either change the state of all valves (open or close) at the same time or can perform such an operation such that the state of only one valve is changed at a specific moment in time.

It should be further understood that all the described examples can comprise a water separator 36 positioned as in figures 17 to 23 or in a different location, each having at least one extract valve 37, even though such a water separator is not explicitly included in the respective drawings. Said at least one extract valve 37 being periodically open such that water collected by said water separator 36 is eliminated from the adsorption dryer 1.

It should be further understood that the control system follows the above presented sequence partially or completely, or can follow another sequence having another order for the working states of the adsorption dryer 1.

Moreover, with respect to the examples presented above in correlation with figures 9 to 23, it should be understood that the method for regulating the regeneration time of an adsorption dryer and one or more of the respective time intervals as defined in the present document are being calculated and implemented according to the present invention.

The present invention is by no means limited to the embodiments described as an example and shown in the drawings, but such an adsorption dryer 1 can be realized

in all kinds of variants, without departing from the scope of the invention.

Claims.

1. A method for regulating the regeneration time of an
5 adsorption dryer, the method comprising the steps
of:

- subjecting the adsorption dryer (1) to an
adsorption cycle wherein a process gas is
directed through a dryer inlet (4) and moisture
10 is adsorbed from the process gas;

- stopping the adsorption cycle after a preset
adsorption time interval (T1); and subsequently

- subjecting the adsorption dryer (1) to a first
regeneration cycle during a preset minimum heat
15 regeneration time interval (Time3) by heating a
regeneration gas prior to directing it through
the dryer inlet (4);

characterized in that:

- the pressure dew point or the relative humidity
20 within said adsorption dryer (1) is measured
after a second preset adsorption time interval
(T2), and, if said measured pressure dew point or
relative humidity is higher than a predetermined
pressure dew point or relative humidity
25 threshold, maintaining the first regeneration
cycle for an additional regeneration time
interval (TE1); and/or

- the outlet temperature (t_{emp1}), of the regeneration gas at a dryer outlet (7) is measured, and, if the outlet temperature (t_{emp1}) is higher than or equal to a predetermined temperature threshold, and, if the time frame in which the adsorption dryer (1) is subjected to said first regeneration cycle is greater than a minimum heat regeneration time interval, ($T_{Heat-min}$), then the method comprises the step of stopping said first regeneration cycle.

2. Method according to claim 1, characterized in that if said measured outlet temperature (t_{emp1}) is lower than said predetermined temperature threshold and if the time frame in which said adsorption dryer (1) is subjected to said first regeneration cycle is larger than or equal to a maximum heat regeneration time interval ($T_{Heat-Max}$), said first regeneration cycle is stopped.

3. Method according to claim 1, characterized in that the additional regeneration time interval, (T_{E1}), is calculated by adding a first predetermined time interval (t_0), to a previously set additional regeneration time interval ($T_{E1,0}$).

4. Method according to any one of the preceding claims, characterized in that if the measured pressure dew point or relative humidity is lower than a second pressure dew point or relative humidity threshold, maintaining the regeneration cycle for a second additional regeneration time interval, (T_{E2}), wherein said second predetermined pressure dew point or relative humidity threshold is lower than the

first predetermined pressure dew point or relative humidity threshold.

5. Method according to claim 4, characterized in that the second additional regeneration time interval, (T_{E2}), is calculated by adding a second predetermined time interval, ($t1$), to a previously set time interval ($T_{E2,0}$).
6. Method according to claim 4 or 5, further comprising the step of recalculating said predetermined minimum heat regeneration time interval, ($T_{Heat-min}$), by adding said additional regeneration time interval, (T_{E1}), to a predetermined minimum time interval, ($Time3$); or by adding said second additional regeneration time interval, (T_{E2}), to said predetermined minimum heat regeneration time interval ($Time3$).
7. Method according to claims 3 or 5, further comprising the step of calculating a maximum heat regeneration time interval ($T_{Heat-Max}$) in which the regeneration cycle can be maintained, by adding said additional regeneration time interval, (T_{E1}), to a preset maximum heat regeneration time interval ($Time4$); or by adding said second additional regeneration time interval, (T_{E2}), to said preset maximum heat regeneration time interval ($Time4$).
8. Method according to claim 1, characterized in that the adsorption dryer (1) is subjected to a second regeneration cycle, by maintaining the flow of process gas through the dryer inlet (4), for a preset minimum regeneration time interval ($Time1$).

9. Method according to claims 3 and 5, characterized in that the method further comprises the step of recalculating the minimum regeneration time interval (T_{\min}) in which the flow of process gas is maintained at the dryer inlet (4), by subtracting said additional regeneration time interval (T_{E1}), from said preset minimum regeneration time interval (Time1), or by subtracting said second additional regeneration time interval (T_{E2}), from said preset minimum regeneration time interval (Time1).
10. Method according to claims 3 and 5, characterized in that the method further comprises the step of calculating a maximum regeneration time interval (T_{\max}), in which the flow of process gas is maintained at the dryer inlet (4), by subtracting said additional regeneration time interval (T_{E1}), from a predetermined maximum time interval (Time2), or by subtracting said second additional regeneration time interval (T_{E2}), from said preset maximum regeneration time interval (Time2).
11. Method according to claim 8, characterized in that the adsorption dryer (1) is first subjected to the second regeneration cycle and then to the first regeneration cycle.
12. Method according to any of the previous claims, characterized in that the adsorption dryer (1) is provided with at least two adsorption vessels (2) and in that the first regeneration cycle and the second regeneration cycle are applied to each adsorption vessel (2) alternatively.

13. Method according to claim 1, characterized in that it further comprises the step of subjecting the adsorption dryer (1) to a cooling cycle wherein said process gas is cooled by means of a cooler (8).

5 14. Method according to claim 1, characterized in that it further comprises the step of maintaining said at least one adsorption vessel (2) in standby.

15. An adsorption dryer comprising:

10 - at least one adsorption vessel (2) comprising adsorption means, an inlet (6) and an outlet (7) for allowing a gas to flow therethrough;

- a controller unit (C);

15 - a source of said gas (3), connectable to the inlet (6) of said at least one adsorption vessel (2) through a dryer inlet (4), said gas being a process and/or a regeneration gas;

20 - a heater (9) positioned on said dryer inlet (4) and configured to heat a regeneration gas flowing therethrough when the adsorption vessel (2) is maintained in a first regeneration cycle;

characterized in that:

25 - said controller unit (C) further comprises means to measure a pressure dew point or a relative humidity within said at least one adsorption vessel (2) after a second preset adsorption time interval (T2), to receive said measured data, and to maintain the flow of the regeneration gas through said inlet (6) for an additional

regeneration time interval (T_{E1}), if said measured pressure dew point or relative humidity is higher than a first predetermined threshold; and/or

5 - said controller unit (C) further comprises a temperature sensor positioned at the outlet (7) of said at least one adsorption vessel (2) and is further configured to stop the first regeneration cycle after a minimum heat regeneration time interval ($T_{Heat-min}$), if the measured outlet
10 temperature, $temp1$ is higher than or equal to a predetermined threshold.

16. Adsorption dryer according to claim 15, characterized in that said source of a gas (3) comprises a compressor unit.

15 17. Adsorption dryer according to claim 15, characterized in that it comprises at least two adsorption vessels (2).

18. Adsorption dryer according to claim 17, characterized in that each of the at least two
20 adsorption vessels (2) comprises a temperature sensor positioned at the outlet (7).

19. Adsorption dryer according to claim 15, further comprising a cooler (8) positioned at the outlet (7) of the at least one adsorption vessel (2) and being
25 configured to cool the gas flowing through said outlet (7).

20. Adsorption dryer according to claim 17 and 19, characterized in that each of the at least two adsorption vessels (2) comprises a cooler (8)

positioned at the outlet (7) of each of said adsorption vessels (2).

21. Adsorption dryer according to claim 17, characterized in that the controller unit (C) further comprises means to alternatively maintain each of the at least two adsorption vessels in:

- a second regeneration cycle wherein said heater (9) is switched off; subsequently in
- a first regeneration cycle wherein said heater (9) is switched on; subsequently in
- a cooling cycle wherein the gas is cooled by means of a cooler (8); and subsequently in
- a standby cycle wherein the flow of gas through said adsorption vessel (2) is stopped.

22. Adsorption dryer according to claim 21, characterized in that the controller unit (C) is further configured to regulate the time interval in which each of the adsorption vessels (2) is maintained in said first regeneration cycle, second regeneration cycle, cooling cycle and standby cycle based on the measured temperature and measured pressure dew point or relative humidity.

23. Adsorption dryer according to claim 15, further comprising a regulating valve (12) for controlling the volume of gas flowing through the inlet (6).

24. Adsorption dryer according to claims 19 or 20, characterized in that when said at least one adsorption vessel (2) is maintained in a cooling

cycle, the controller unit (C) is configured to actuate a two way valve (13, 14) for allowing the flow of gas coming from said source (3) to be cooled by the cooler (8) and flow through the adsorption vessel (2).

5

25. A controller unit regulating the time in which an adsorption dryer (1) is maintained in a regeneration cycle, said controller unit (C) comprising:

10

- a timer, for determining the time interval in which an adsorption vessel (2) of said adsorption dryer (1) is maintained in a regeneration cycle, said adsorption vessel (2) comprising an inlet (6) and an outlet (7) for allowing a flow of gas therethrough;

15

characterized in that said controller unit (C):

20

- further comprises: a user interface for receiving a requested pressure dew point or relative humidity, a dew point pressure sensor or a relative humidity determinant positioned within the adsorption vessel (2) of said adsorption dryer (1),

25

- being further configured to maintain the adsorption dryer (1) in a first regeneration cycle for an additional regeneration time interval (T_{E1}), if the measured pressure dew point or the relative humidity is higher than said requested pressure dew point or relative humidity; and/or

- further comprises a temperature sensor positioned at the outlet (7) of said adsorption vessel (2) and is further configured to stop the first regeneration cycle if the measured outlet temperature, temp 1, is greater than or equal to a predetermined temperature threshold, and, if said time interval in which the adsorption dryer (1) is maintained in said regeneration cycle is greater than a minimum heat regeneration time interval ($T_{\text{Heat-min}}$).

26. Controller unit according to claim 25, characterized in that it further comprises a processing unit configured to recalculate said additional regeneration time interval (T_{E1}) by adding a first predetermined time interval (t_0), to a previously set additional regeneration time interval ($T_{E1,0}$).

27. Controller unit according to claim 26, characterized in that the controller unit (C) further comprises storing means configured to store said recalculated additional regeneration time interval (T_{E1}), said controller unit (C) applying said recalculated additional regeneration time interval in a subsequent regeneration cycle.

28. Controller unit according to claim 25, characterized in that the controller unit (C) further comprises means for maintaining the regeneration cycle for a second additional regeneration time interval (T_{E2}), if the measured pressure dew point or relative humidity is lower

than the requested pressure dew point or relative humidity.

29. Controller unit according to claim 28, further comprising calculating means configured to calculate said second additional regeneration time interval (T_{E2}), by adding a second predetermined time interval ($t1$), to a previously set time interval ($T_{E2,0}$).

30. Controller unit according to claim 29, characterized in that the controller unit (C) further comprises storing means configured to store said recalculated second additional regeneration time interval (T_{E2}), and apply said in a subsequent regeneration cycle.

31. Controller unit according to claims 26 and 29, characterized in that said calculation means are configured to further calculate:

- a minimum heat regeneration time interval ($T_{Heat-min}$), by adding said additional regeneration time interval (T_{E1}), to a preset minimum heat regeneration time interval (Time3); or by adding said second additional regeneration time interval (T_{E2}), to said preset minimum heat regeneration time interval (Time 3); and/or
- a maximum heat regeneration time interval ($T_{Heat-max}$) in which the first regeneration cycle can be maintained , by adding said additional regeneration time interval (T_{E1}), to a preset maximum heat regeneration time interval (Time4); or by adding said second additional regeneration

time interval (T_{E2}), to said preset maximum heat regeneration time interval (Time4); and/or

- 5 - minimum regeneration time interval (T_{min}) in which the flow of gas from the outlet of the compressor unit is maintained at the dryer inlet (4) , by subtracting said additional regeneration time interval (T_{E1}), from said preset minimum regeneration time interval (Time1), or by subtracting said second additional regeneration time interval (T_{E2}), from said preset minimum regeneration time interval (Time1); and/or
- 10 - a maximum regeneration time interval (T_{Max}) in which the flow of gas from the outlet of a compressor unit is maintained at the dryer inlet (4), by subtracting said additional regeneration time interval (T_{E1}), from a preset maximum regeneration time interval (Time2), or by subtracting said second additional regeneration time interval (T_{E2}), from said preset maximum regeneration time interval (Time2).
- 15
- 20

32. Controller unit according to claims 26 to 30, characterized in that the controller unit (C) further comprises storing means configured to store one or more of said time intervals ($T_{Heat-min}$ and/or $T_{Heat-Max}$ and/or T_{min} and/or T_{Max}), and apply it in a subsequent regeneration cycle.

33. Controller unit according to claim 31, characterized in that, the controller unit (C) comprises means for maintaining said adsorption vessel (2) in a first regeneration cycle for the

calculated additional regeneration time interval (T_{E1}), if said calculated additional regeneration time interval (T_{E1}), or second additional regeneration time interval (T_{E2}), is comprised within the interval delimited by the minimum heat regeneration time interval ($T_{Heat-min}$) and the maximum heat regeneration time interval ($T_{Heat-Max}$), and/or stopping said first regenerating cycle after said maximum heat regeneration time interval ($T_{Heat-Max}$), when said calculated additional regeneration time interval (T_{E1}) or second additional regeneration time interval (T_{E2}), is higher than said maximum heat regeneration time interval ($T_{Heat-Max}$).

34. Controller unit according to claim 31, characterized in that, the controller unit (C) comprises means of maintaining said adsorption vessel (2) in a second regeneration cycle if said calculated additional regeneration time interval (T_{E1}), or second additional regeneration time interval (T_{E2}), is comprised within the interval delimited by the minimum regeneration time interval (T_{min}) and the maximum regeneration time interval (T_{Max}) and/or stopping said first regenerating cycle after the maximum regeneration time interval (T_{Max}), when said calculated additional regeneration time interval (T_{E1}), or second additional regeneration time interval (T_{E2}), is higher than the maximum regeneration time interval (T_{Max}).

35. The use of a controller unit according to any of the claims 25 to 34 in an adsorption dryer (1) for compressed gas.

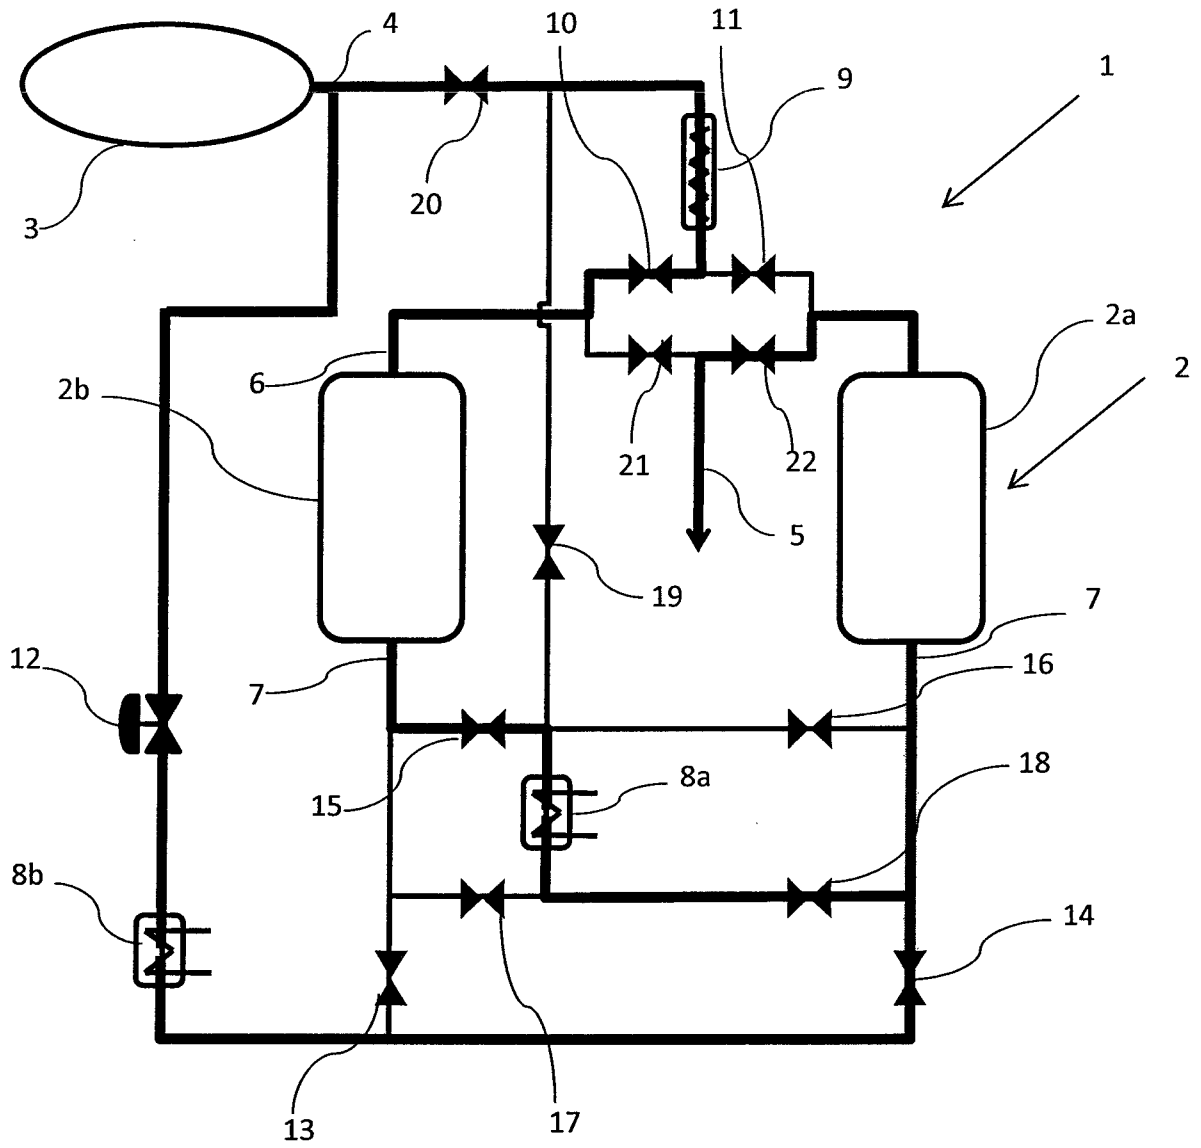


Figure 2

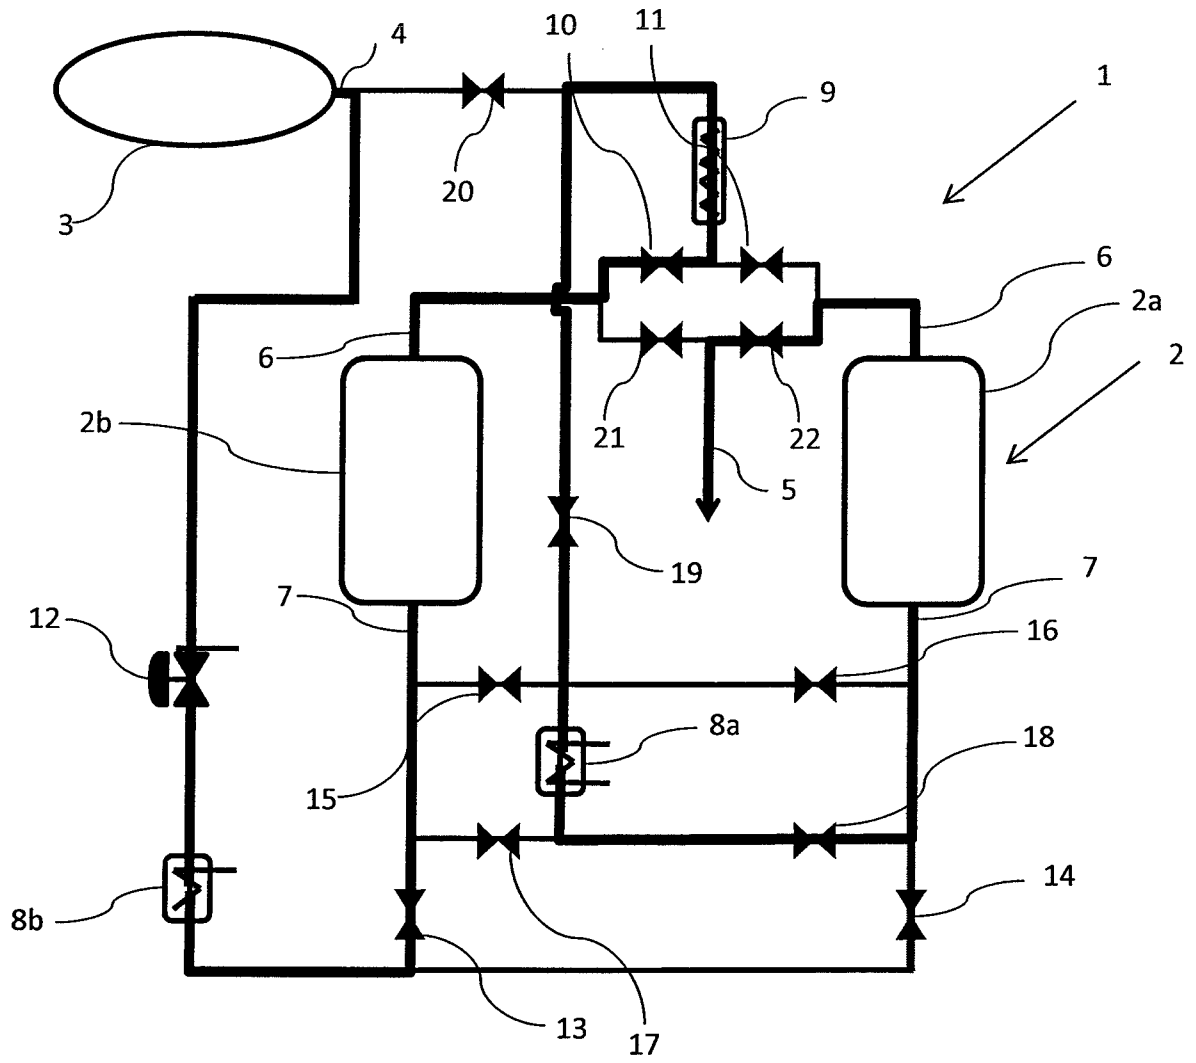


Figure 3

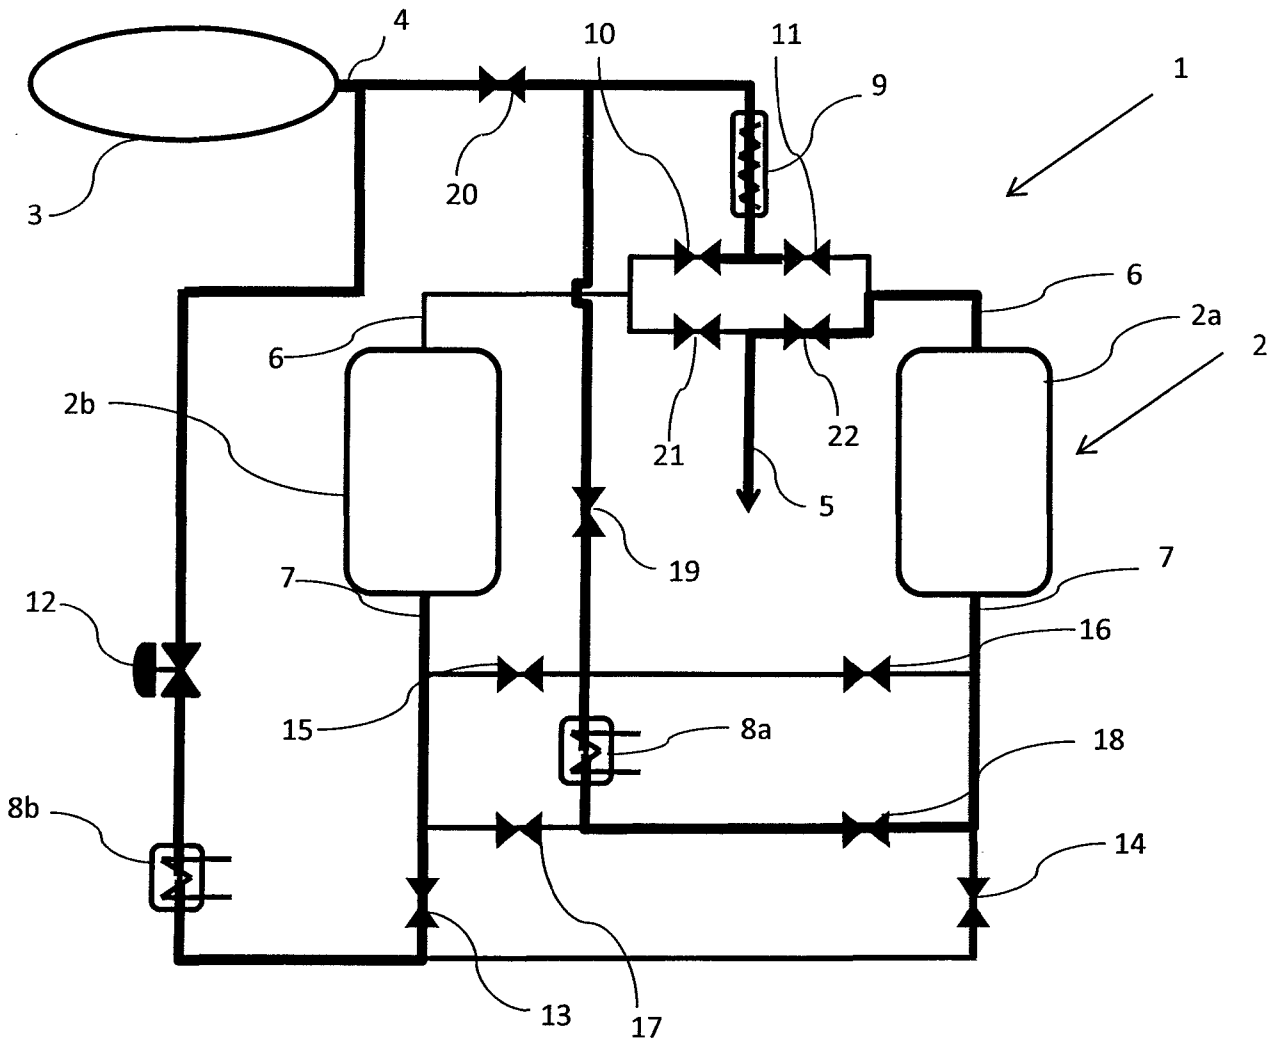


Figure 4

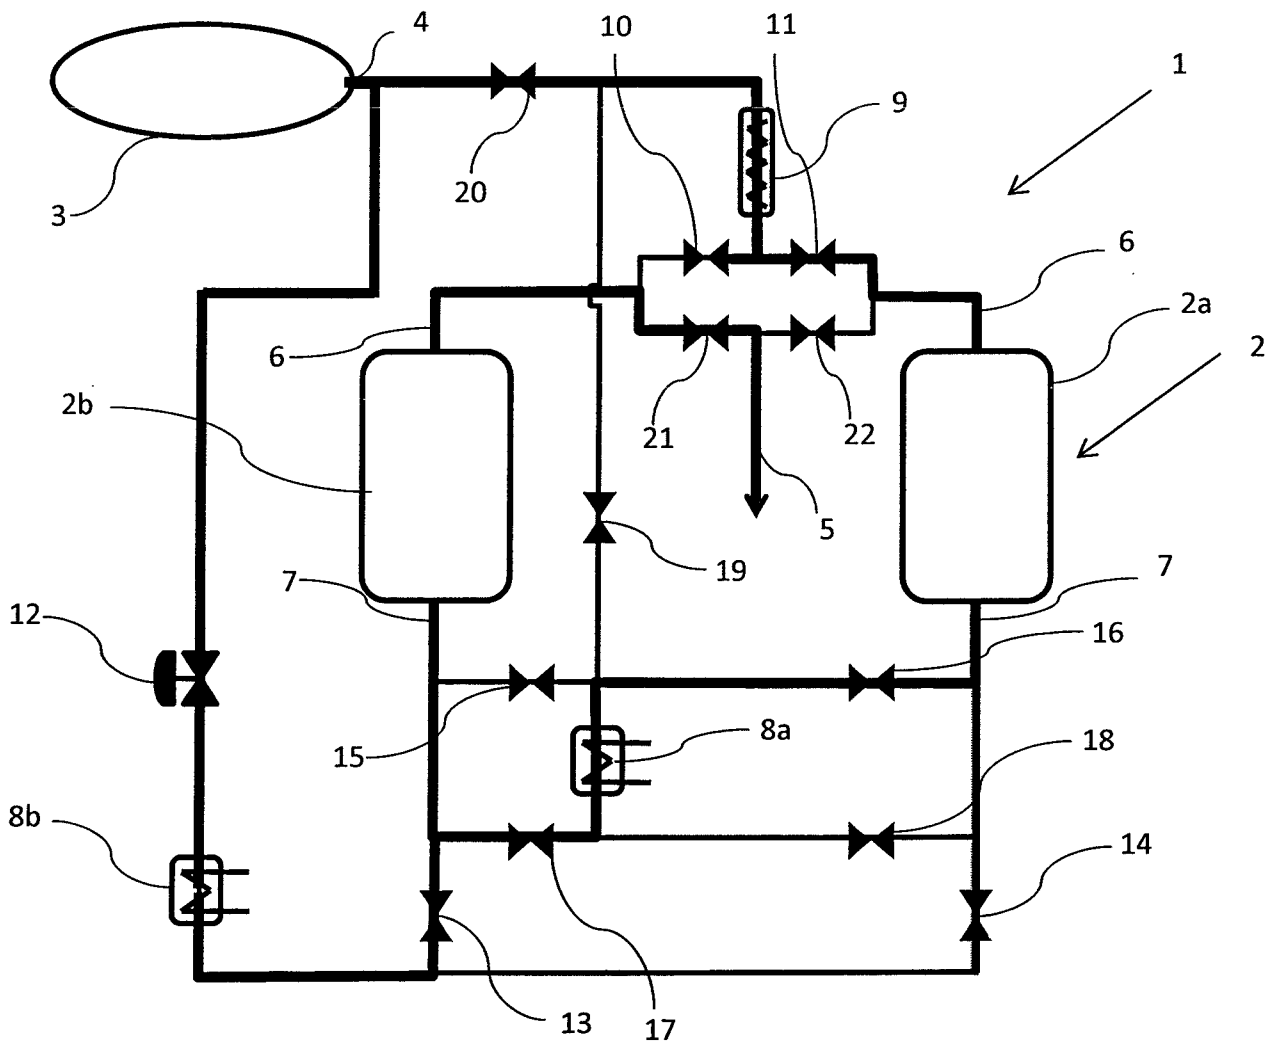


Figure 5

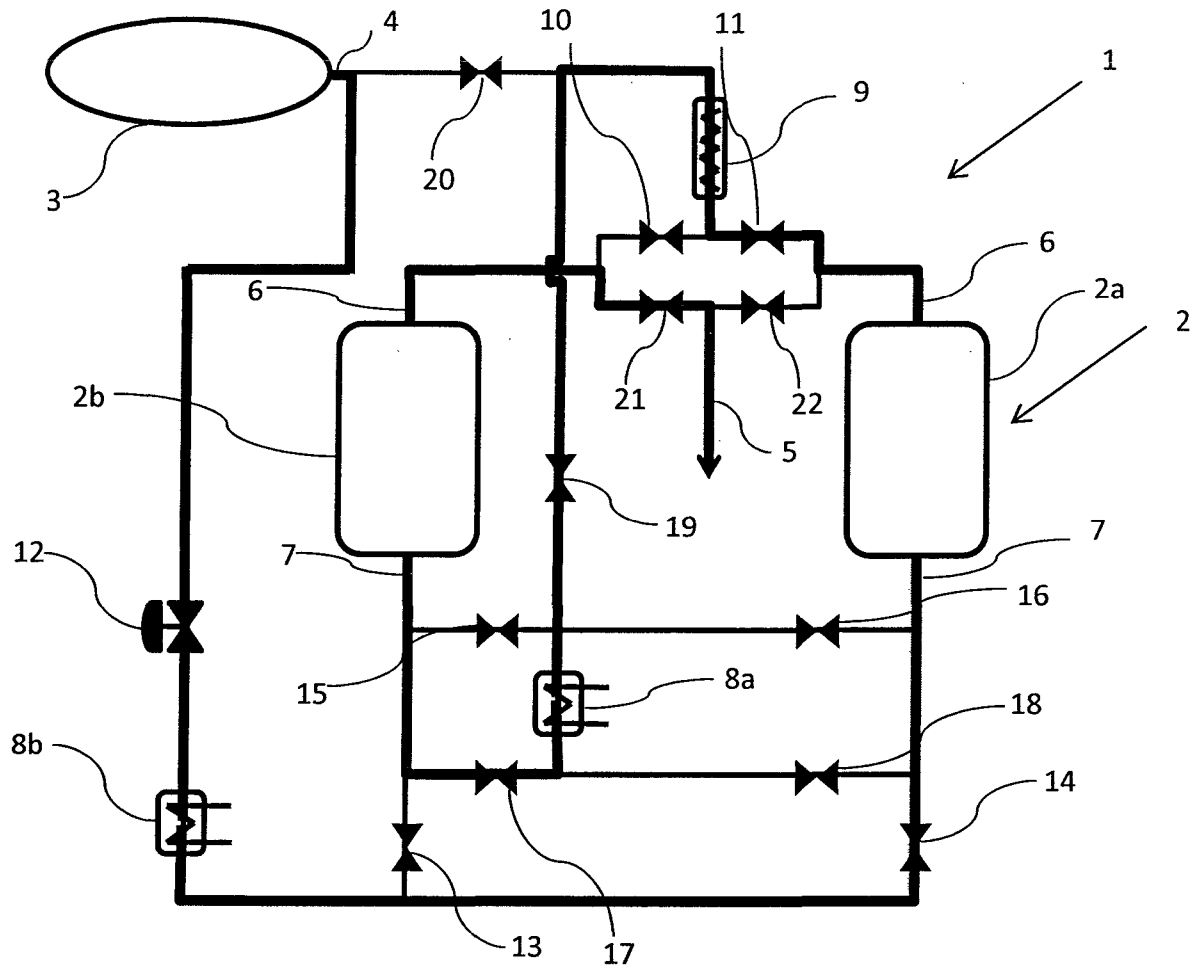


Figure 6

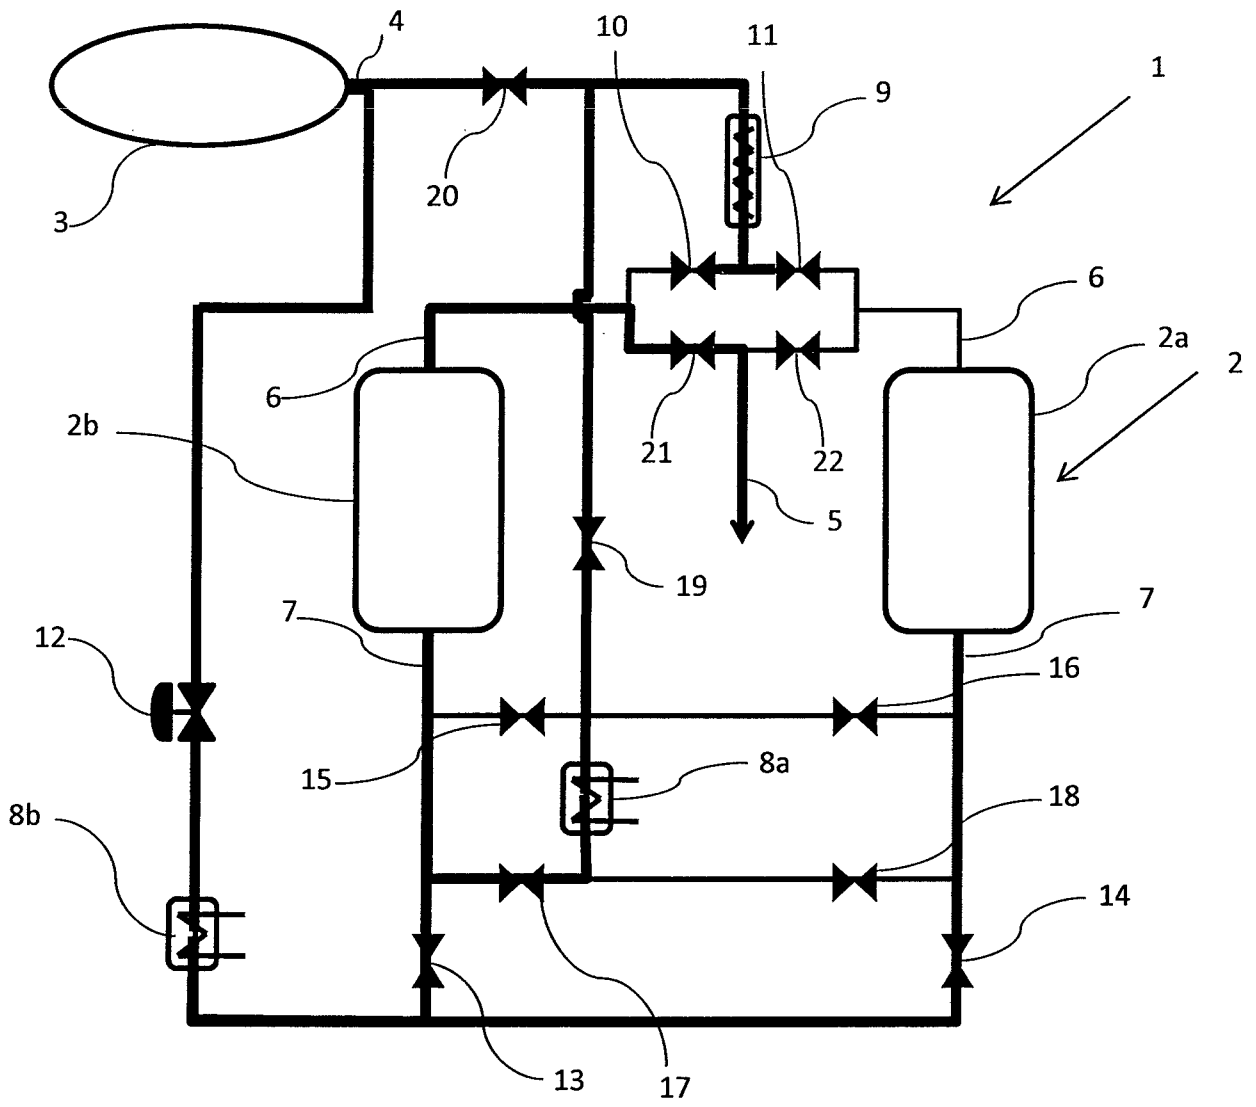


Figure 7

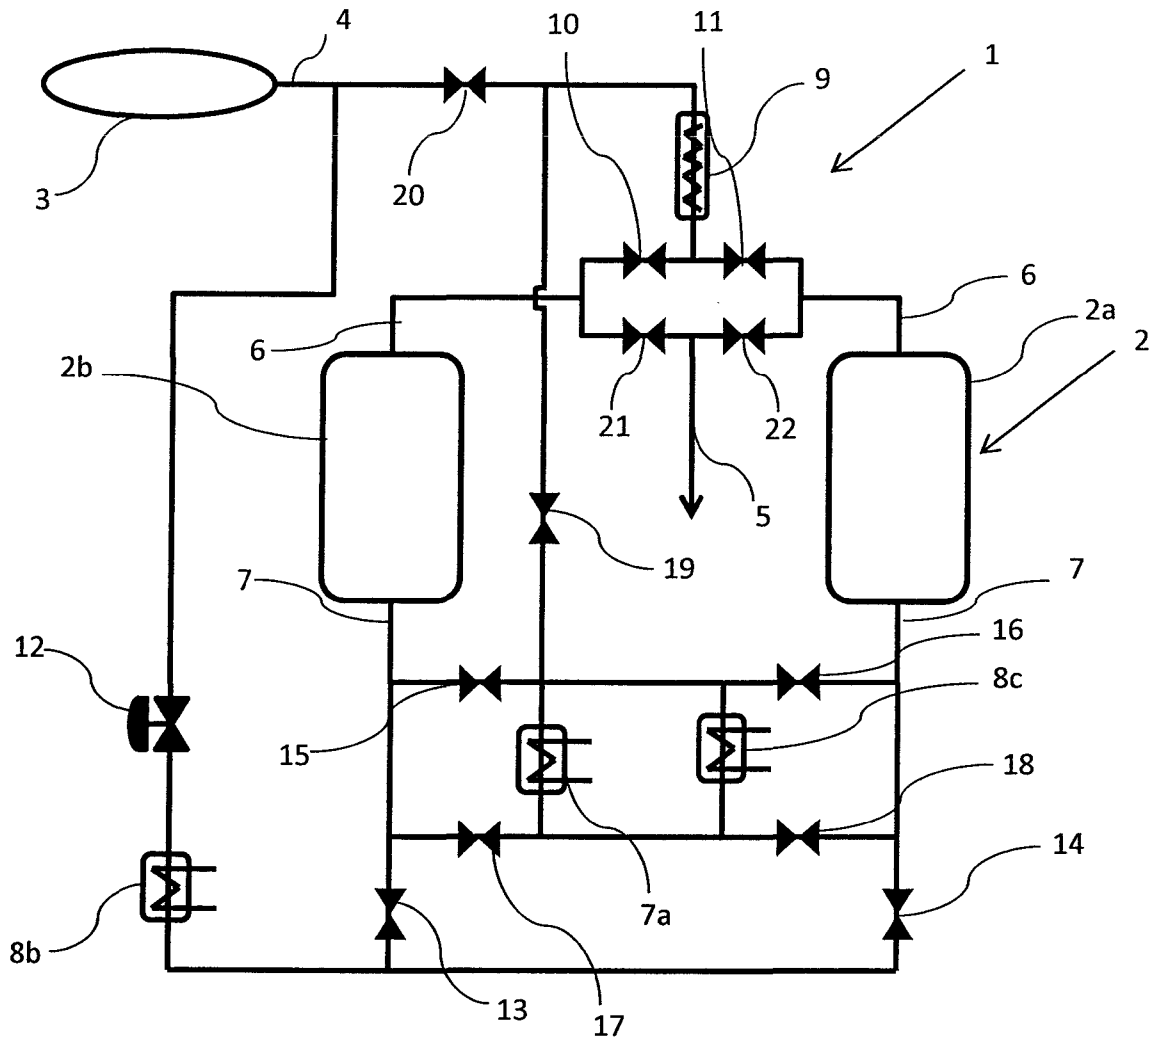


Figure 8

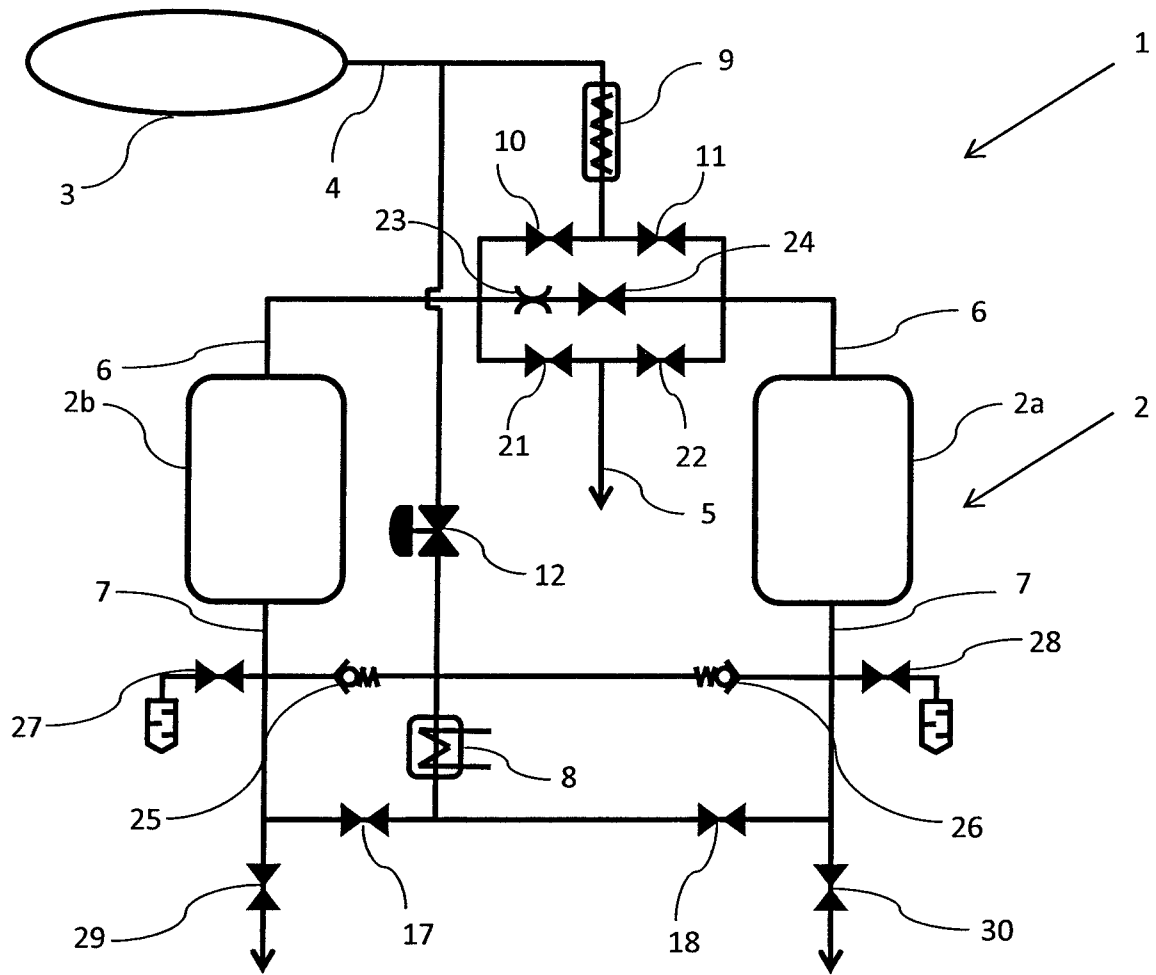


Figure 9

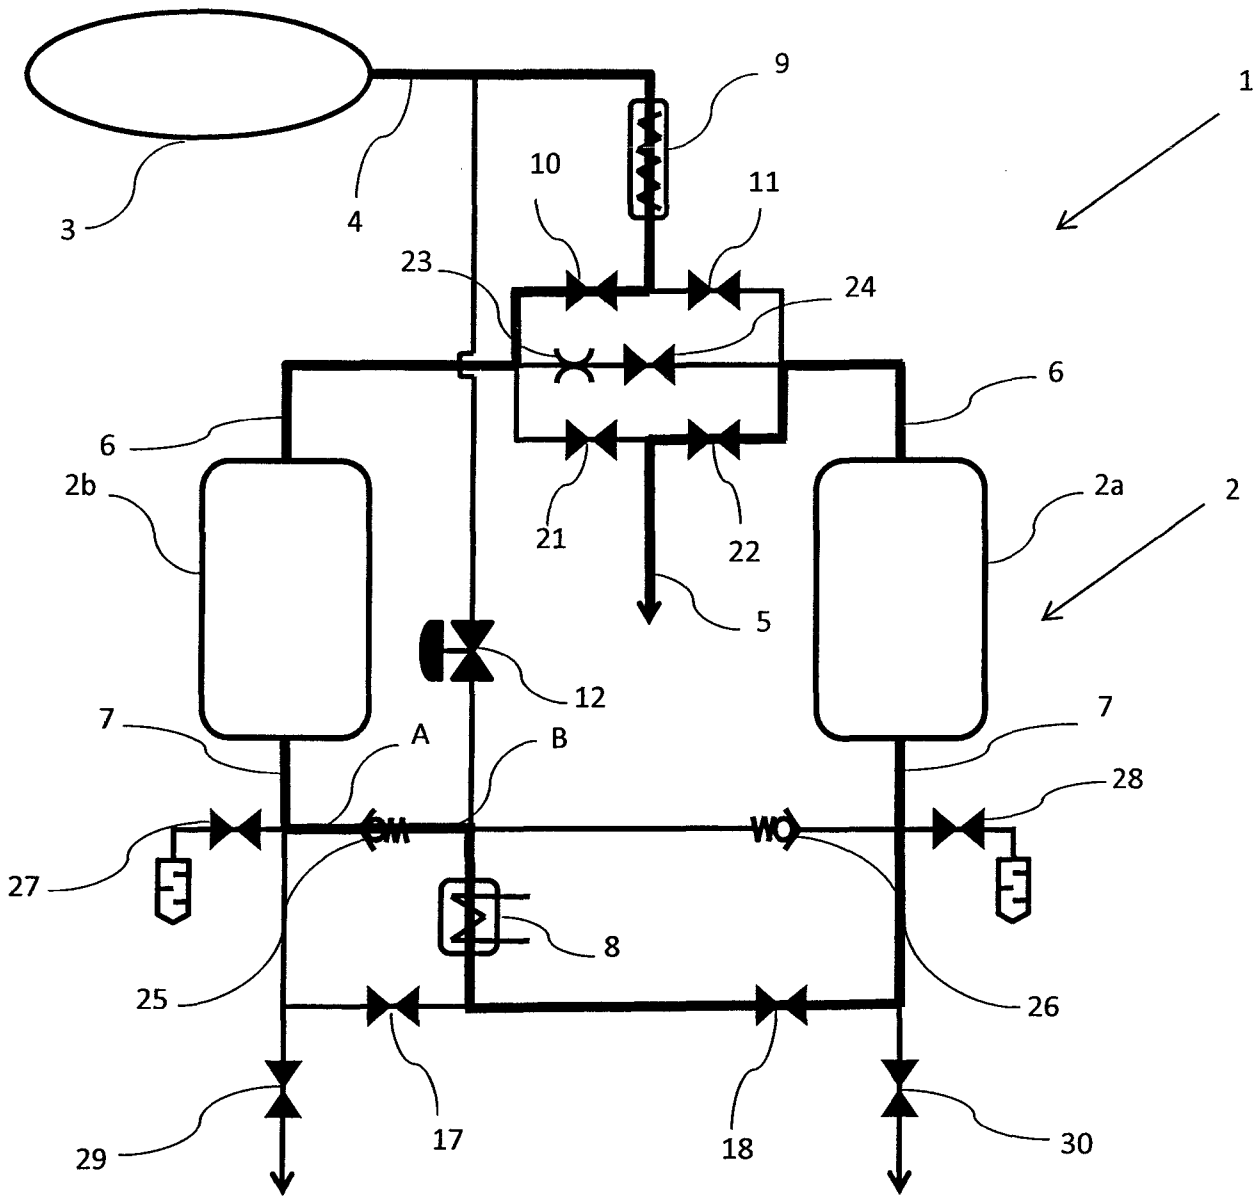


Figure 10

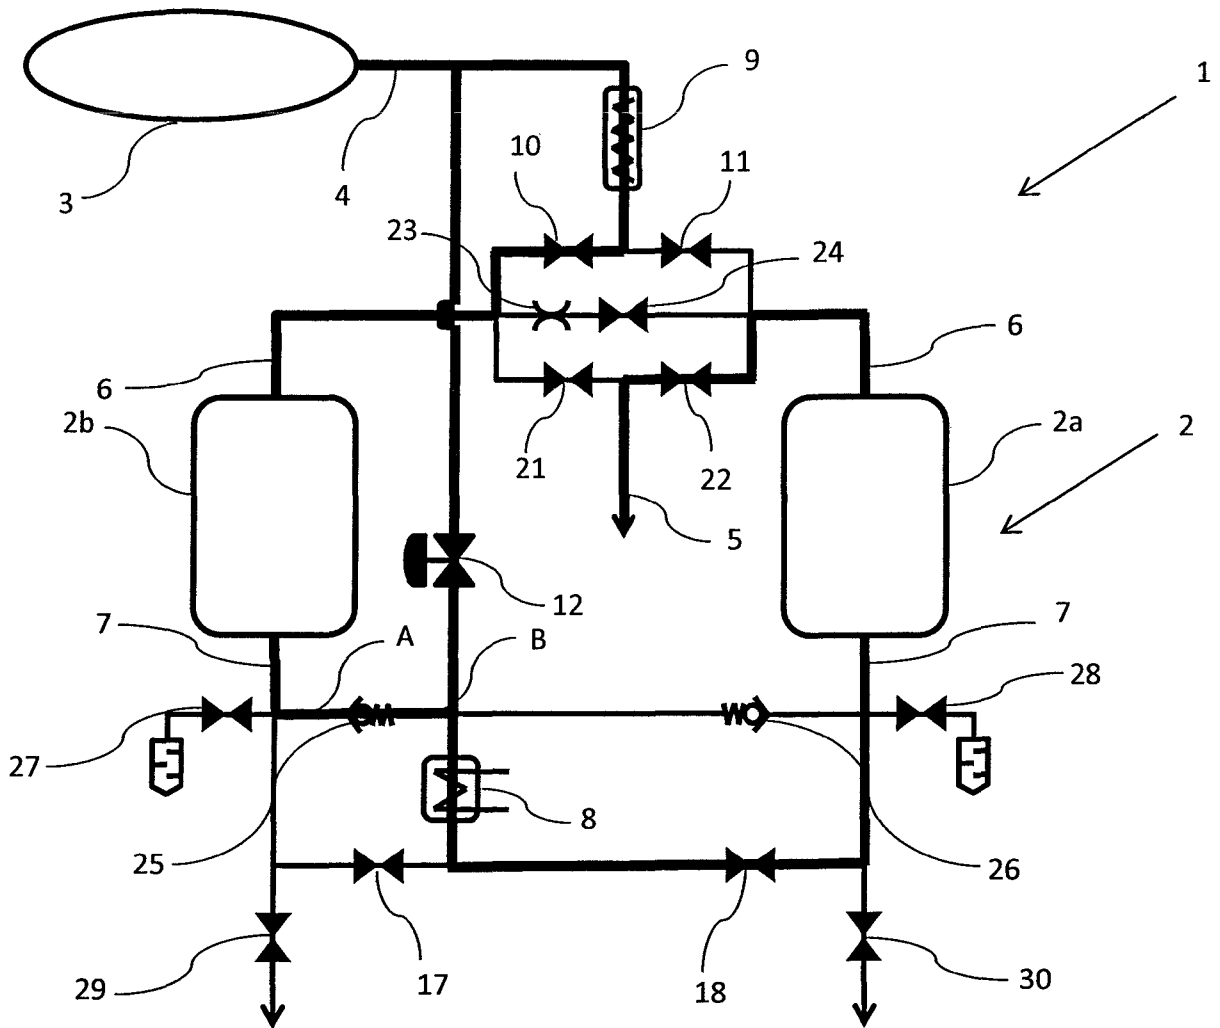


Figure 11

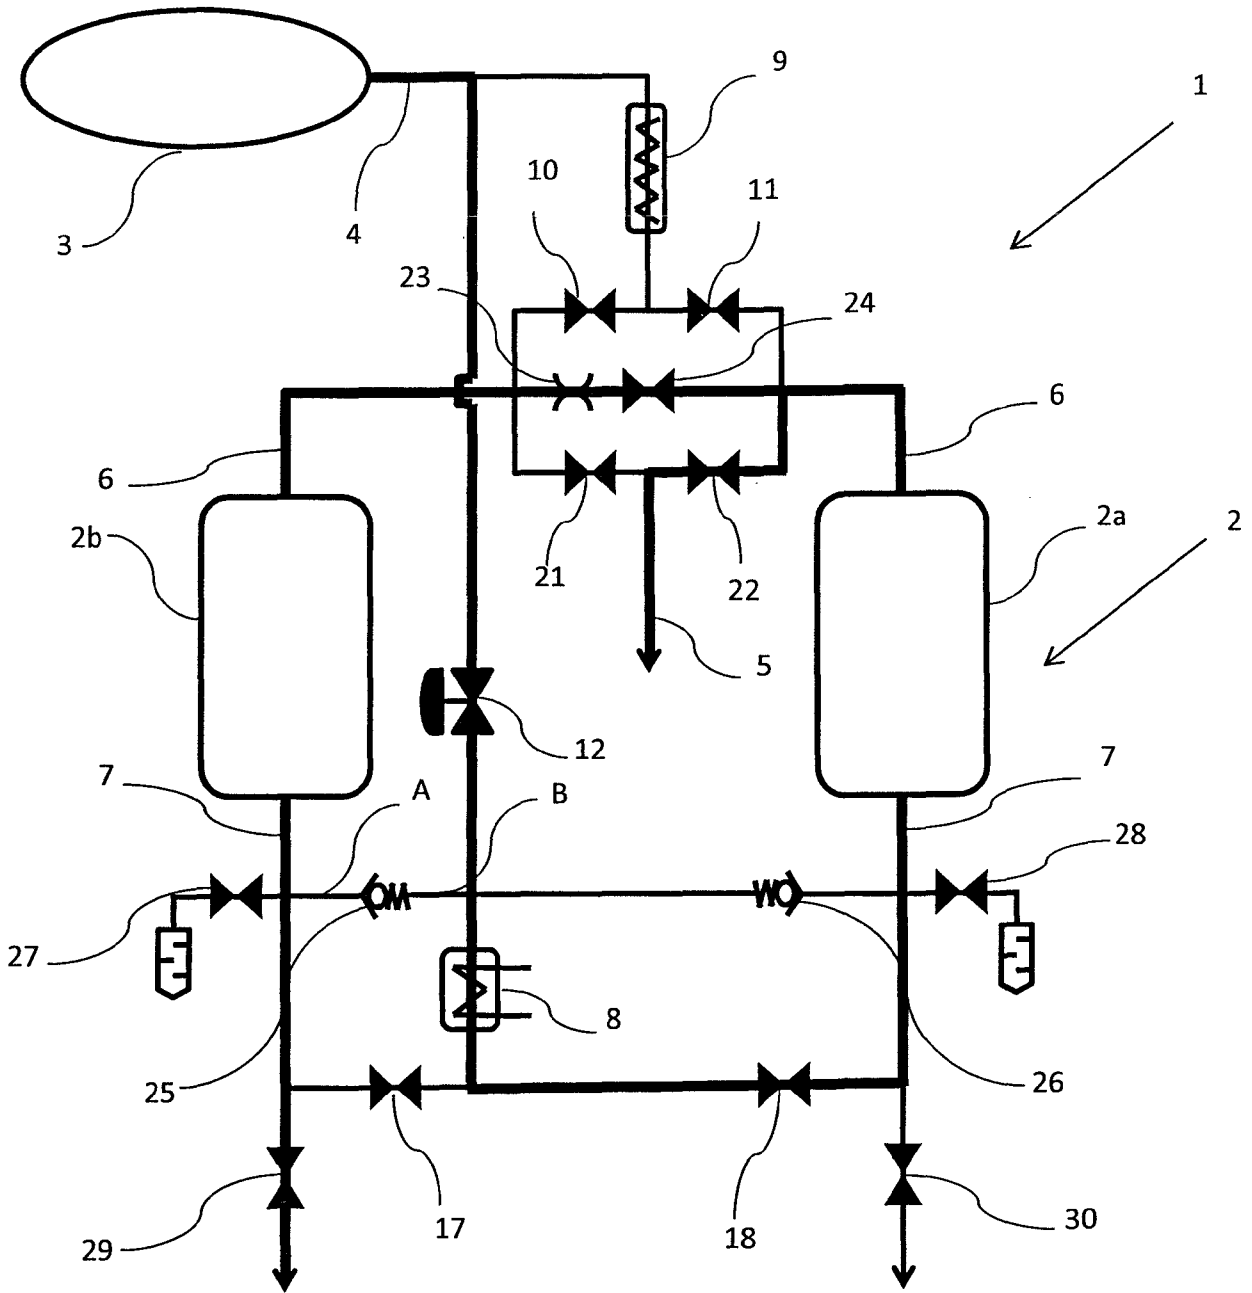


Figure 13

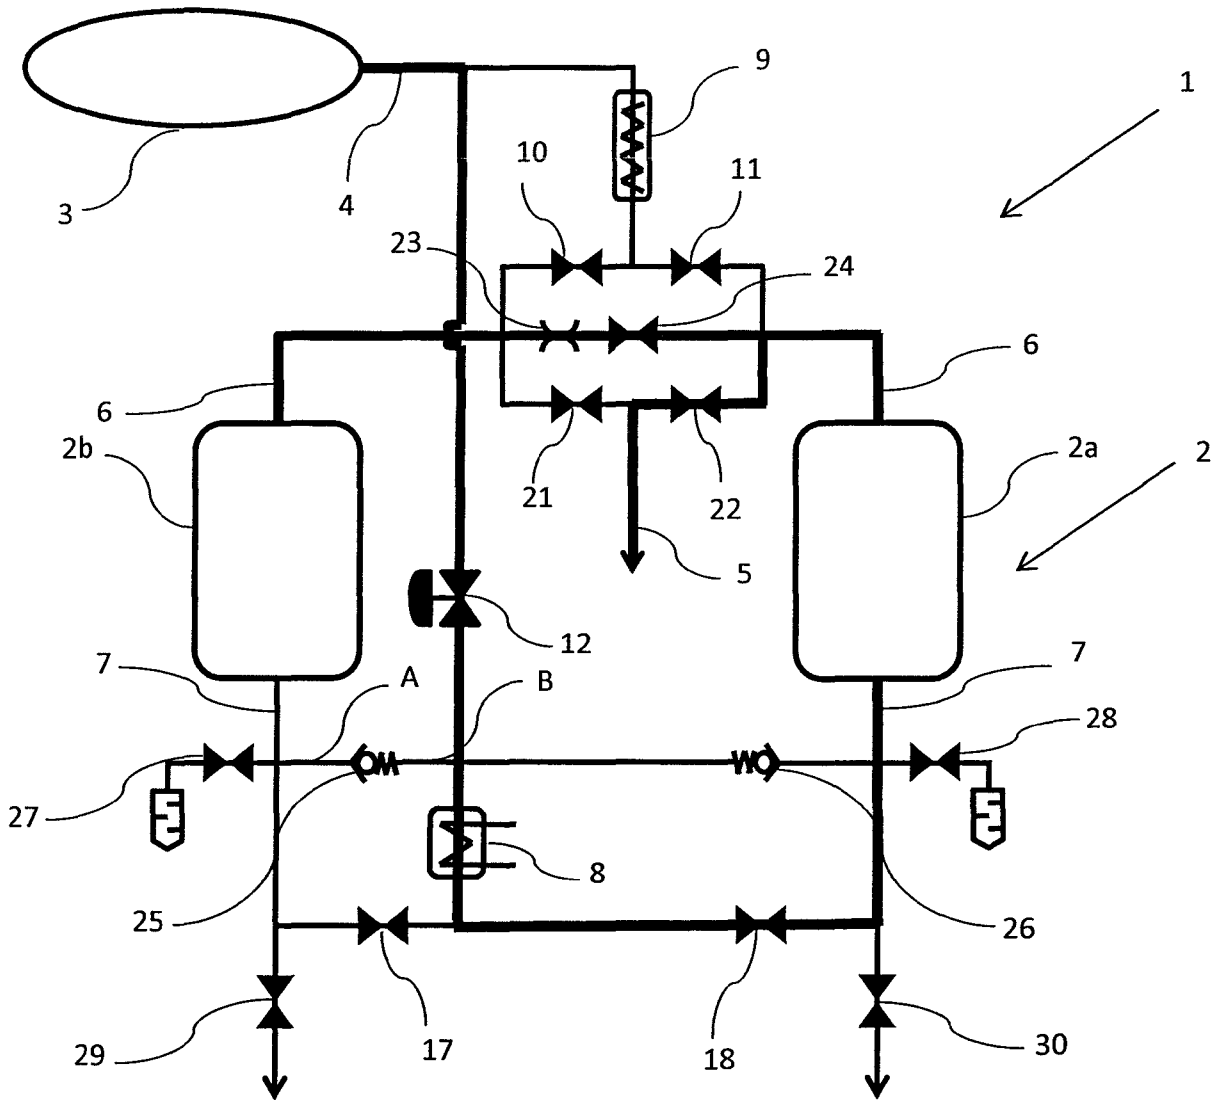


Figure 14

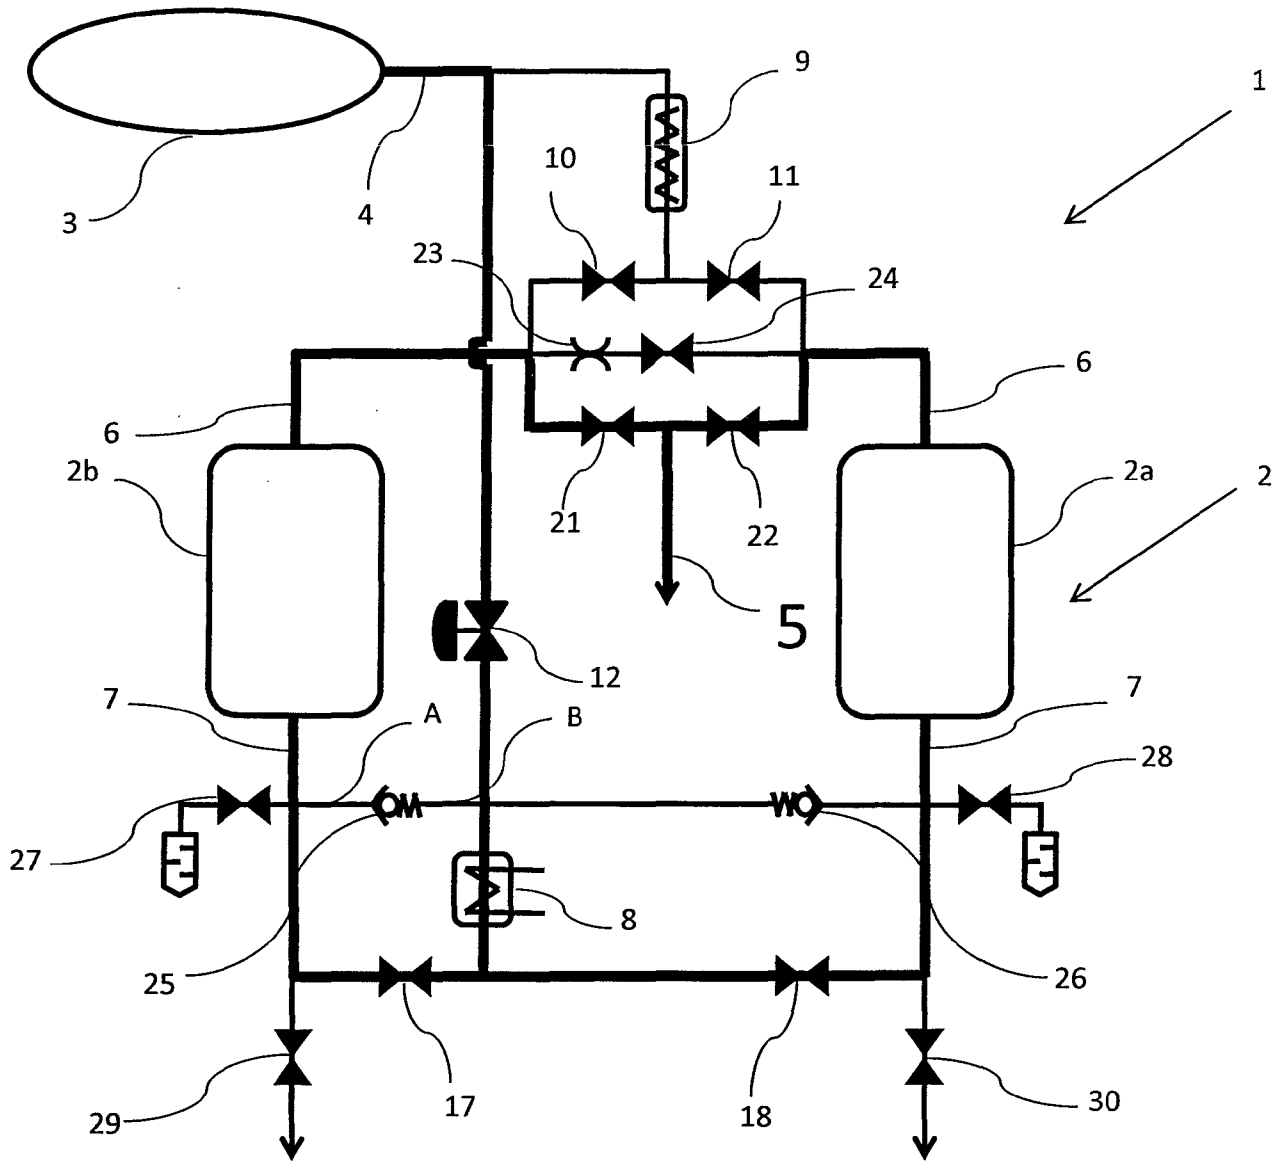


Figure 15

16/23

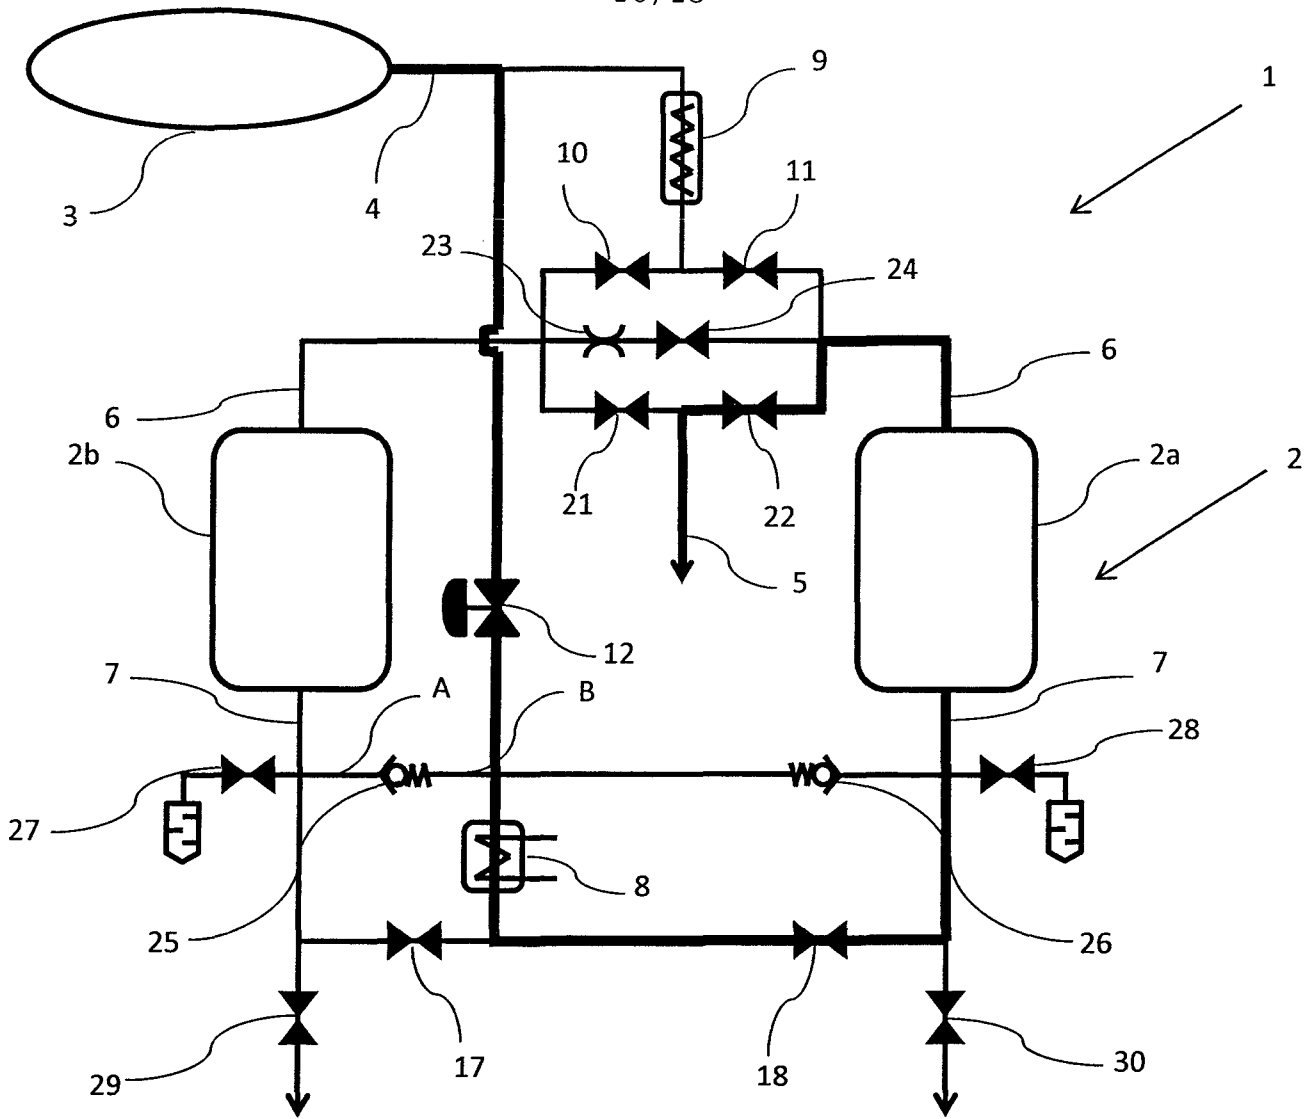


Figure 16

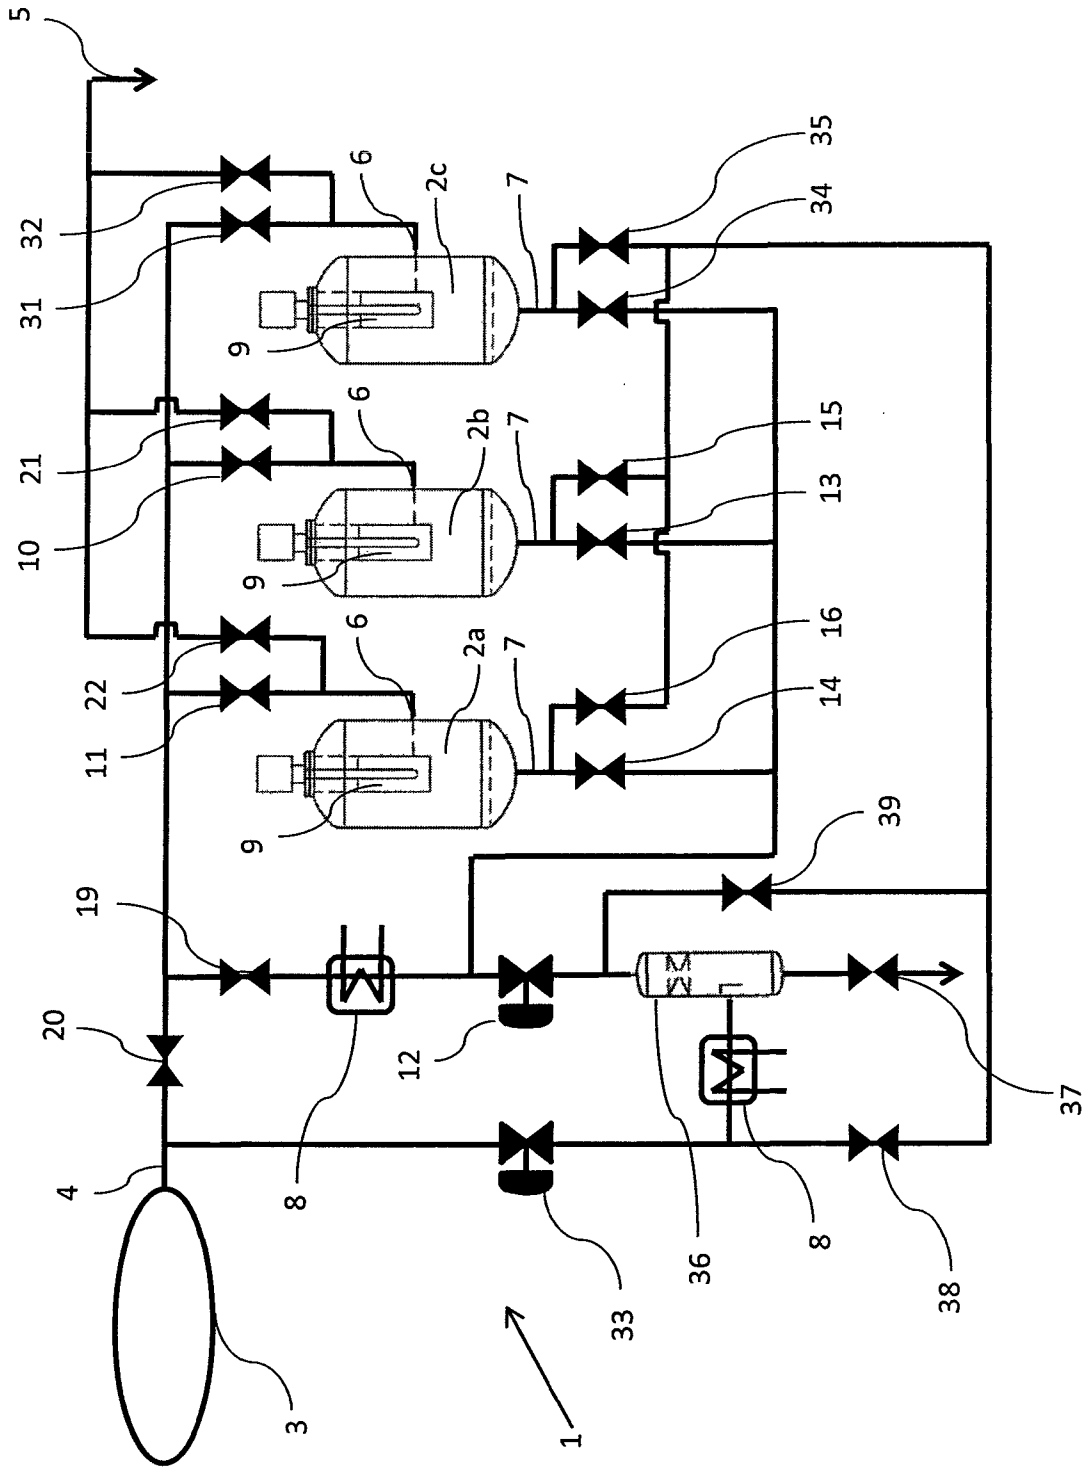


Figure 17

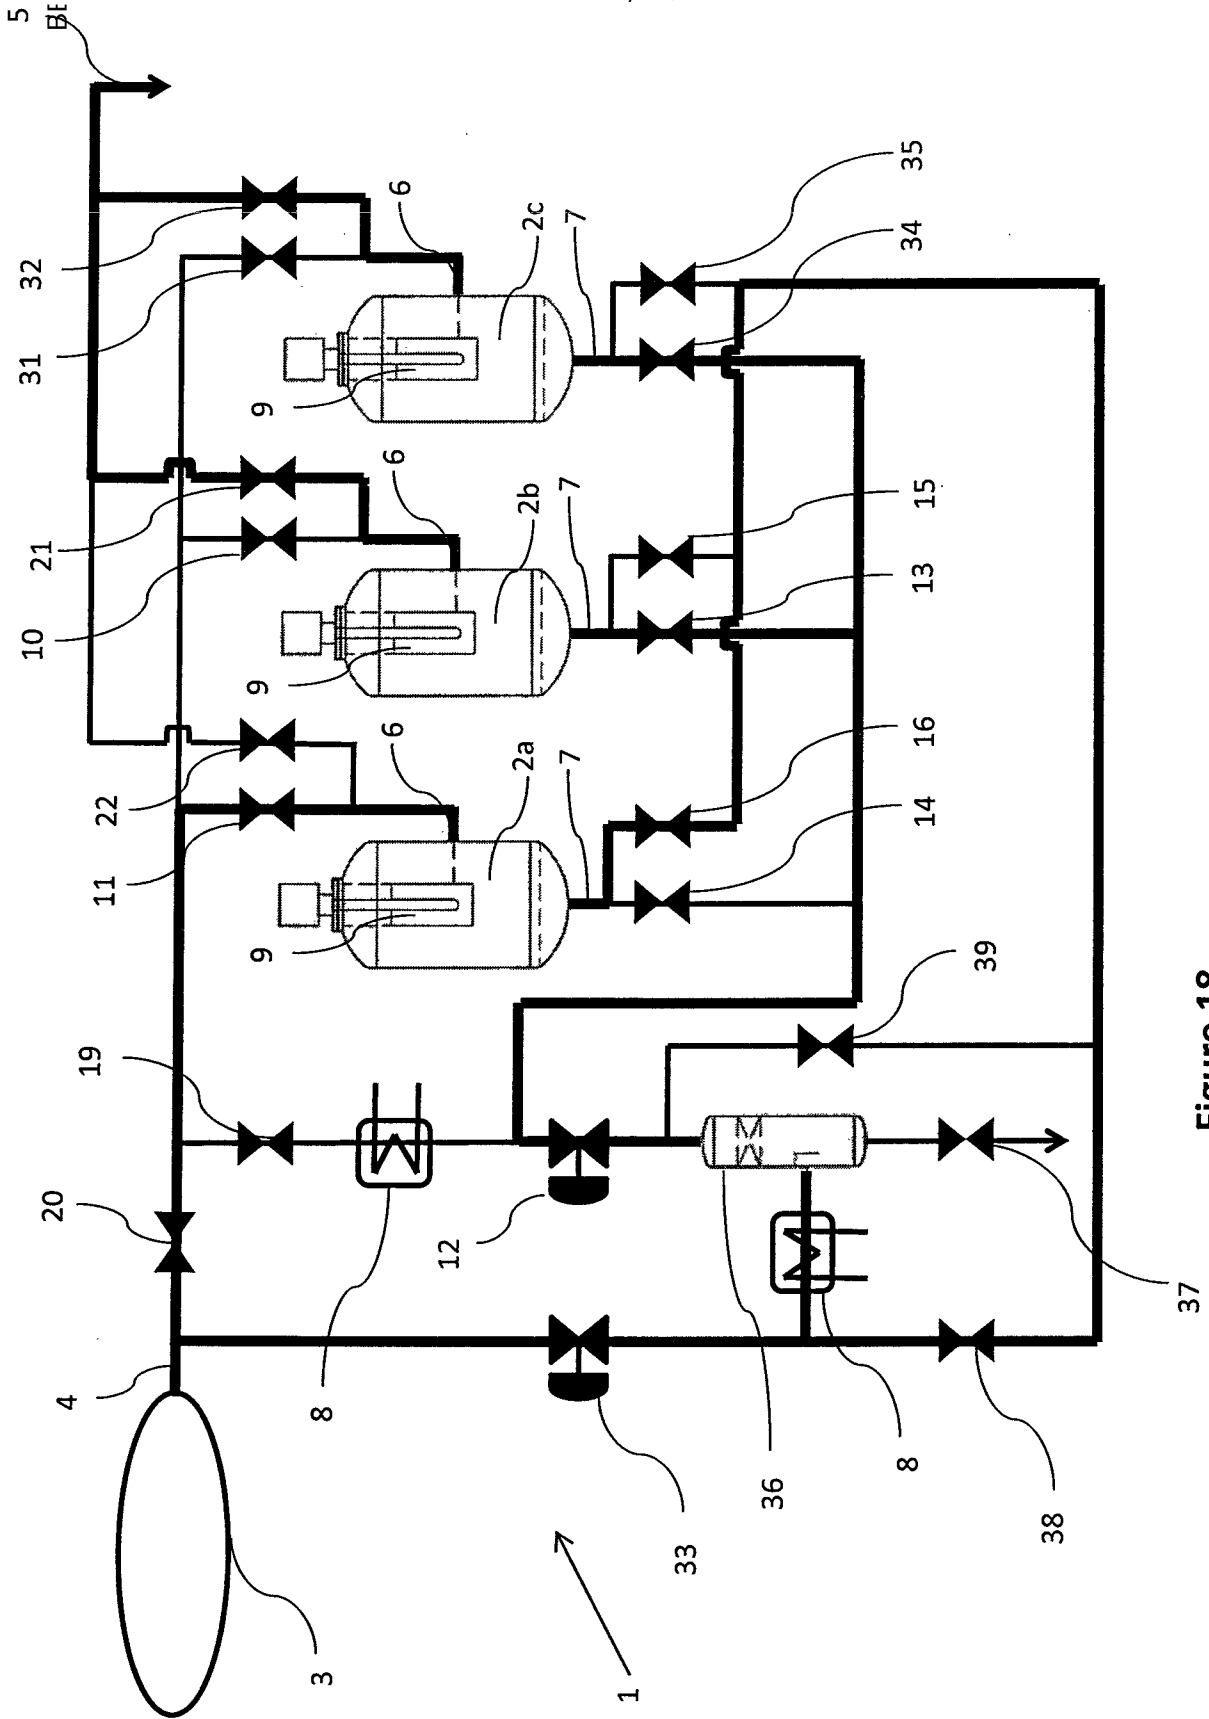


Figure 18

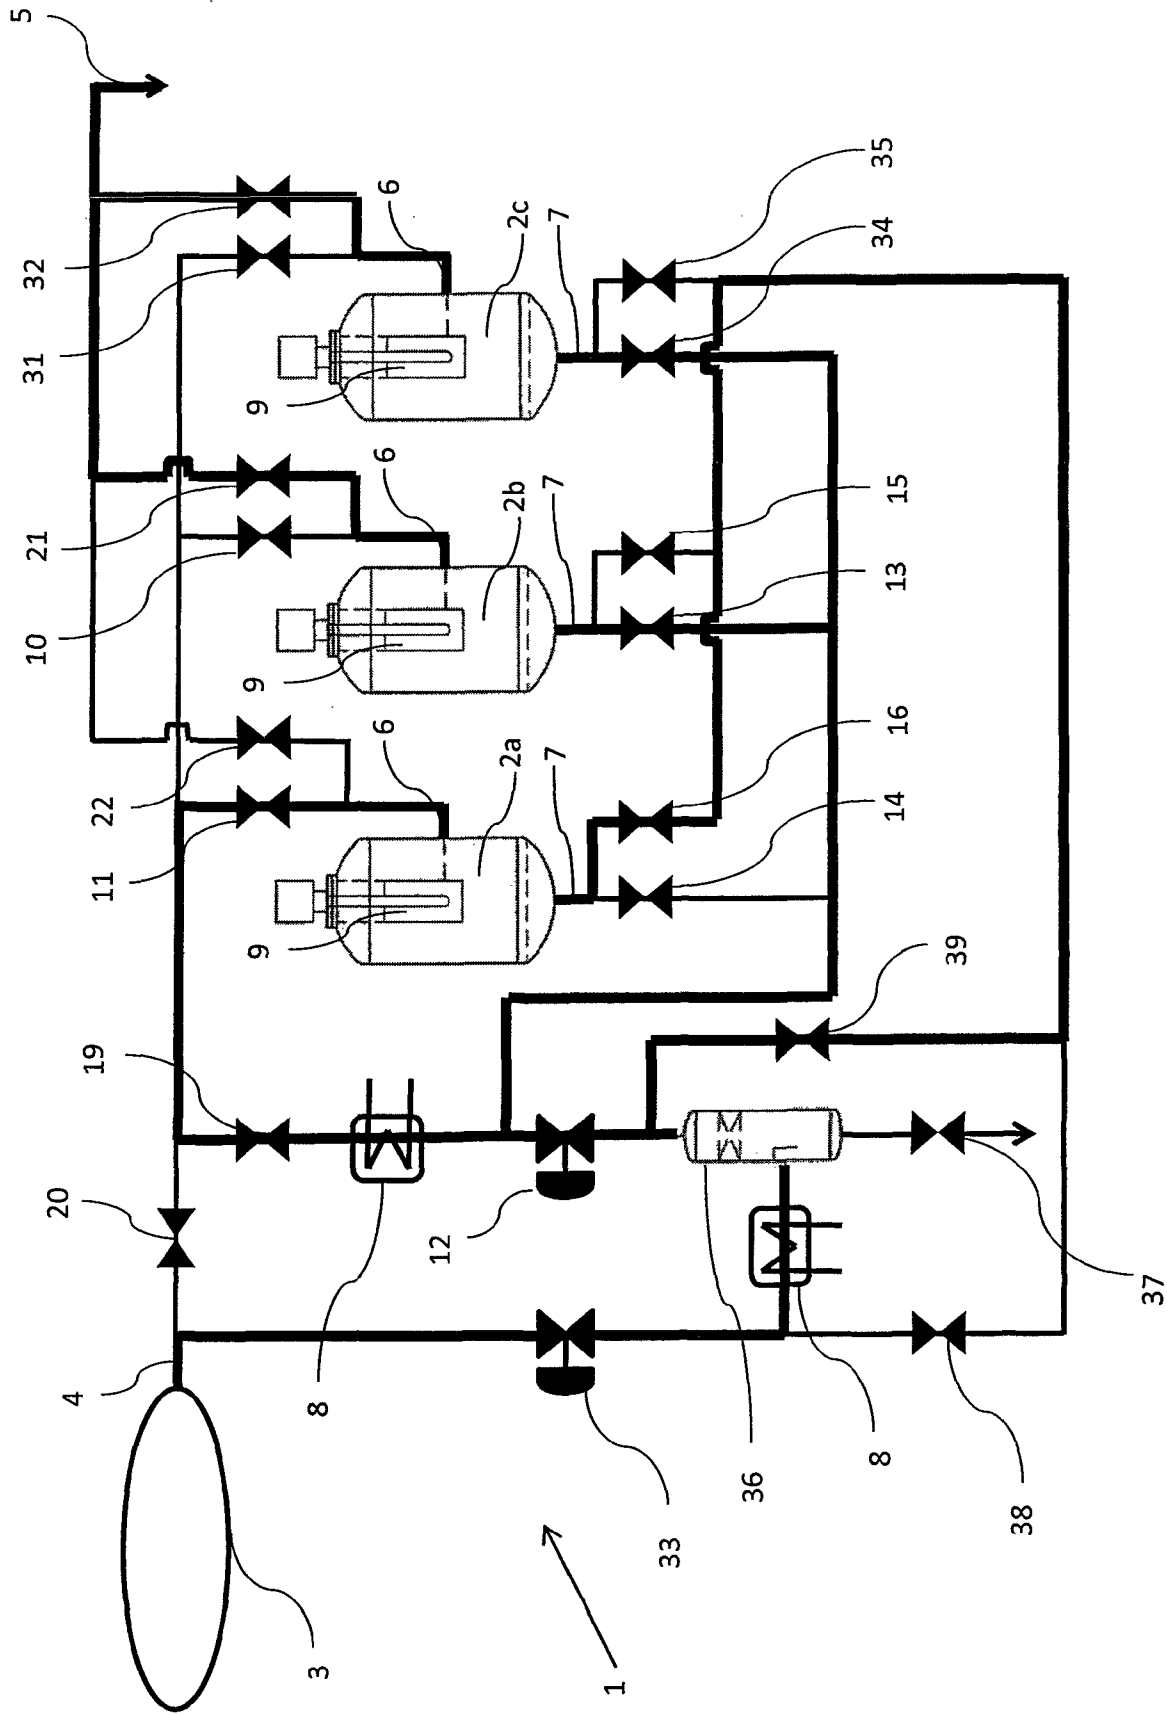


Figure 19

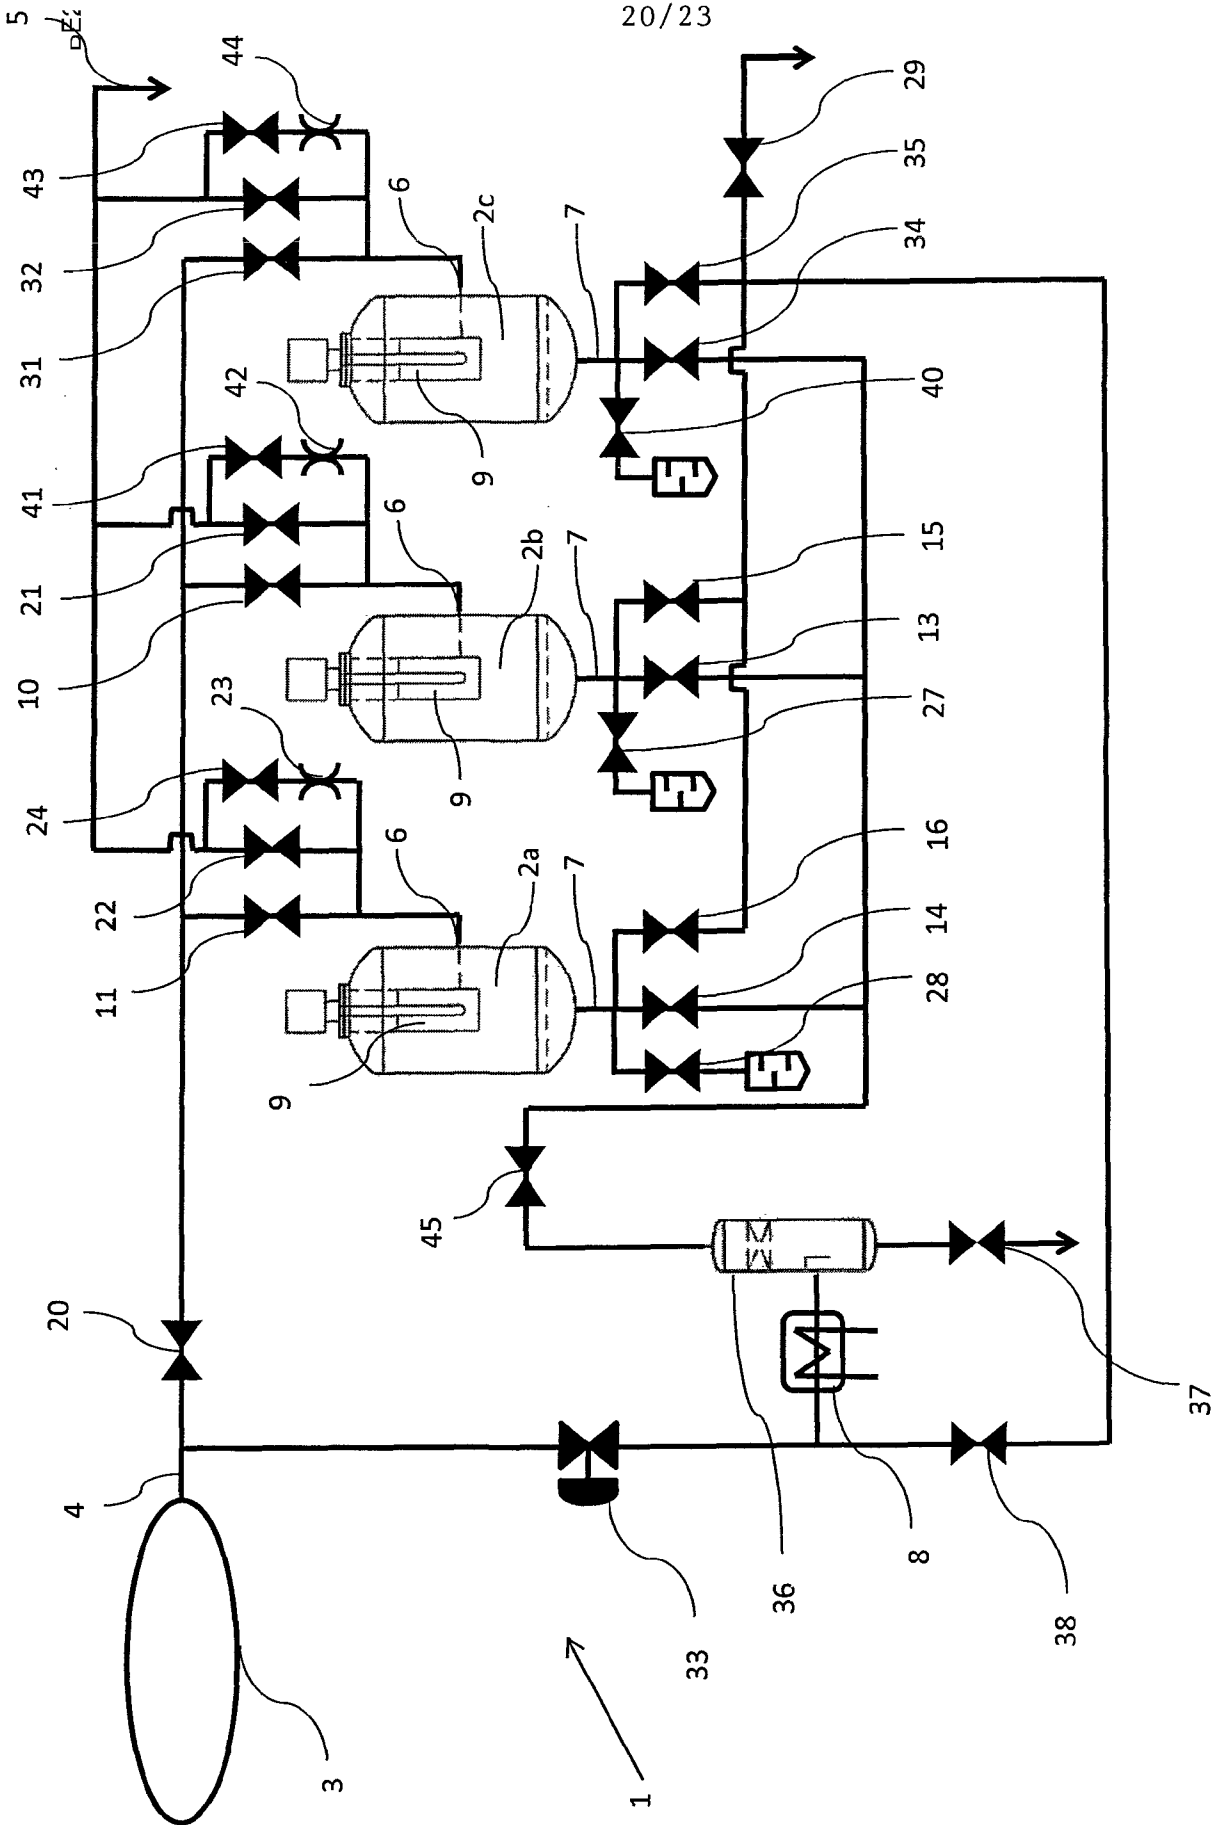


Figure 20

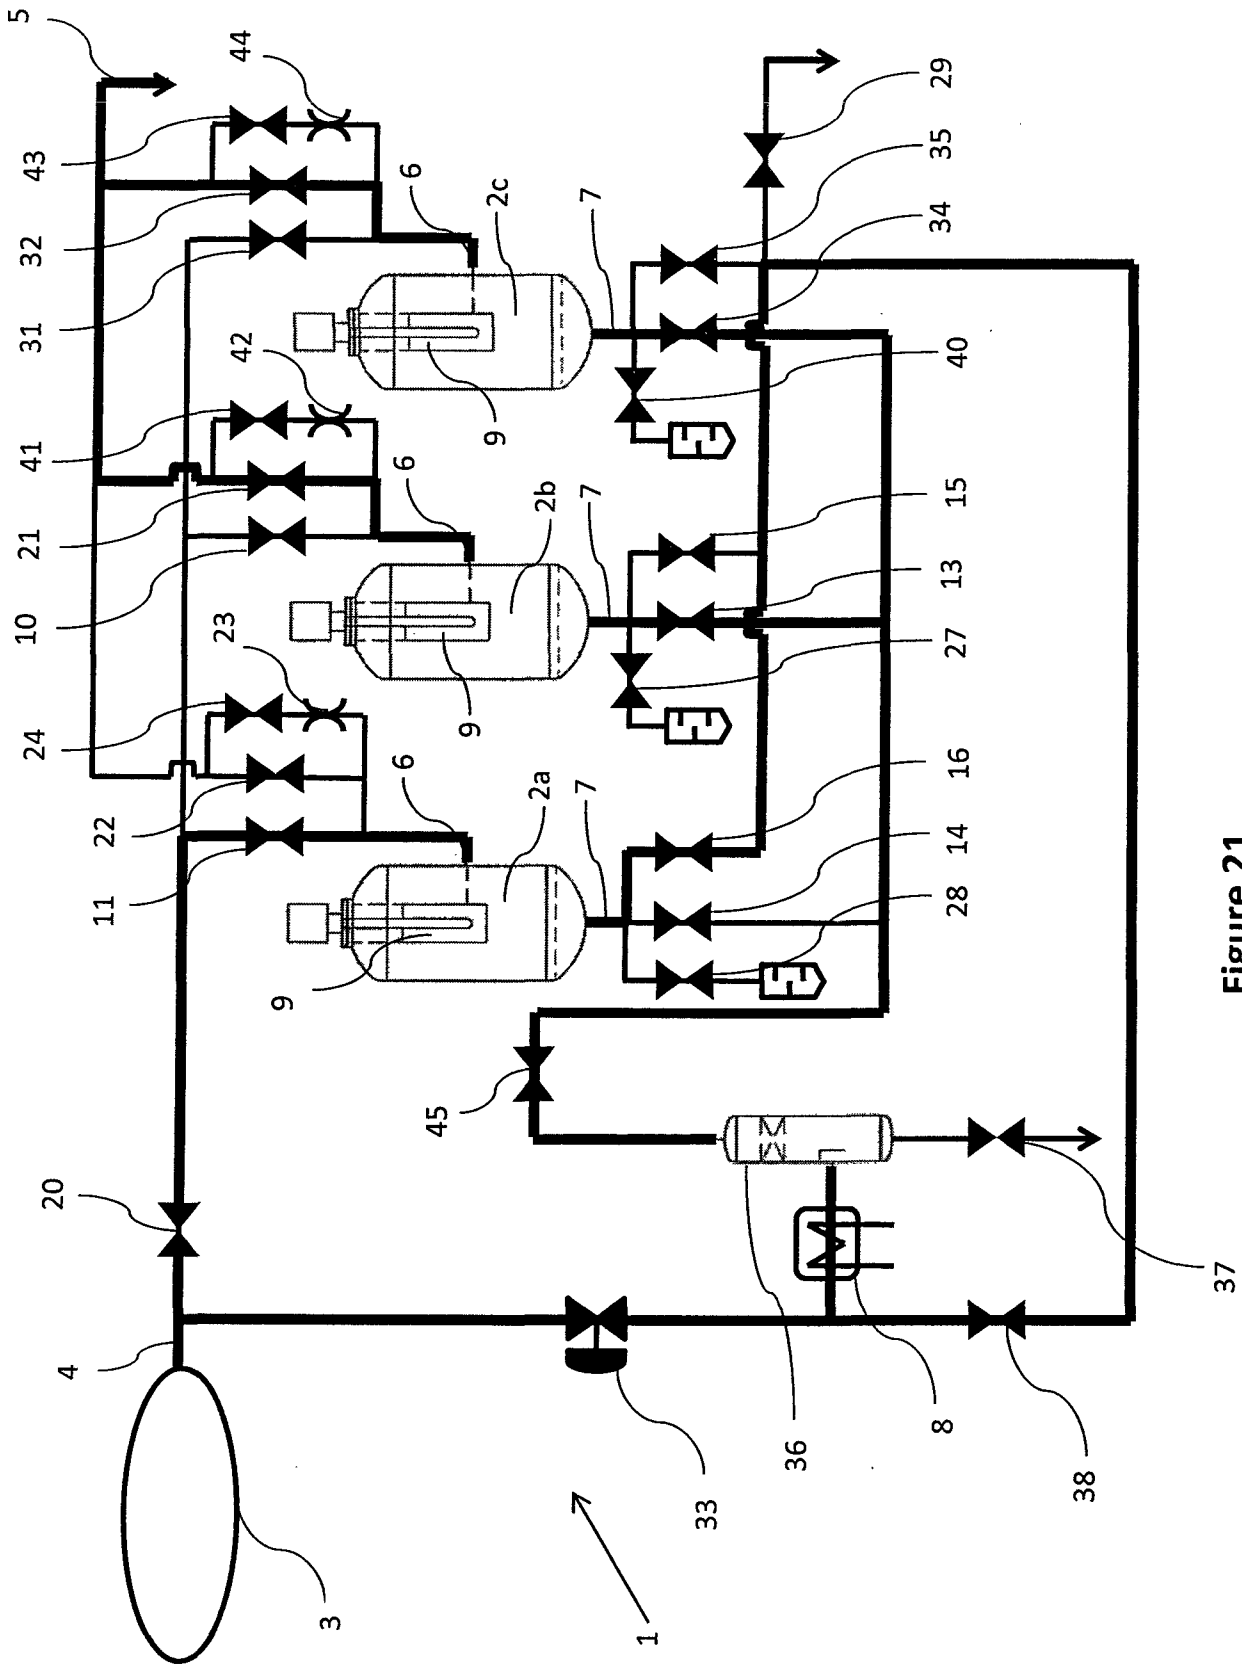


Figure 21

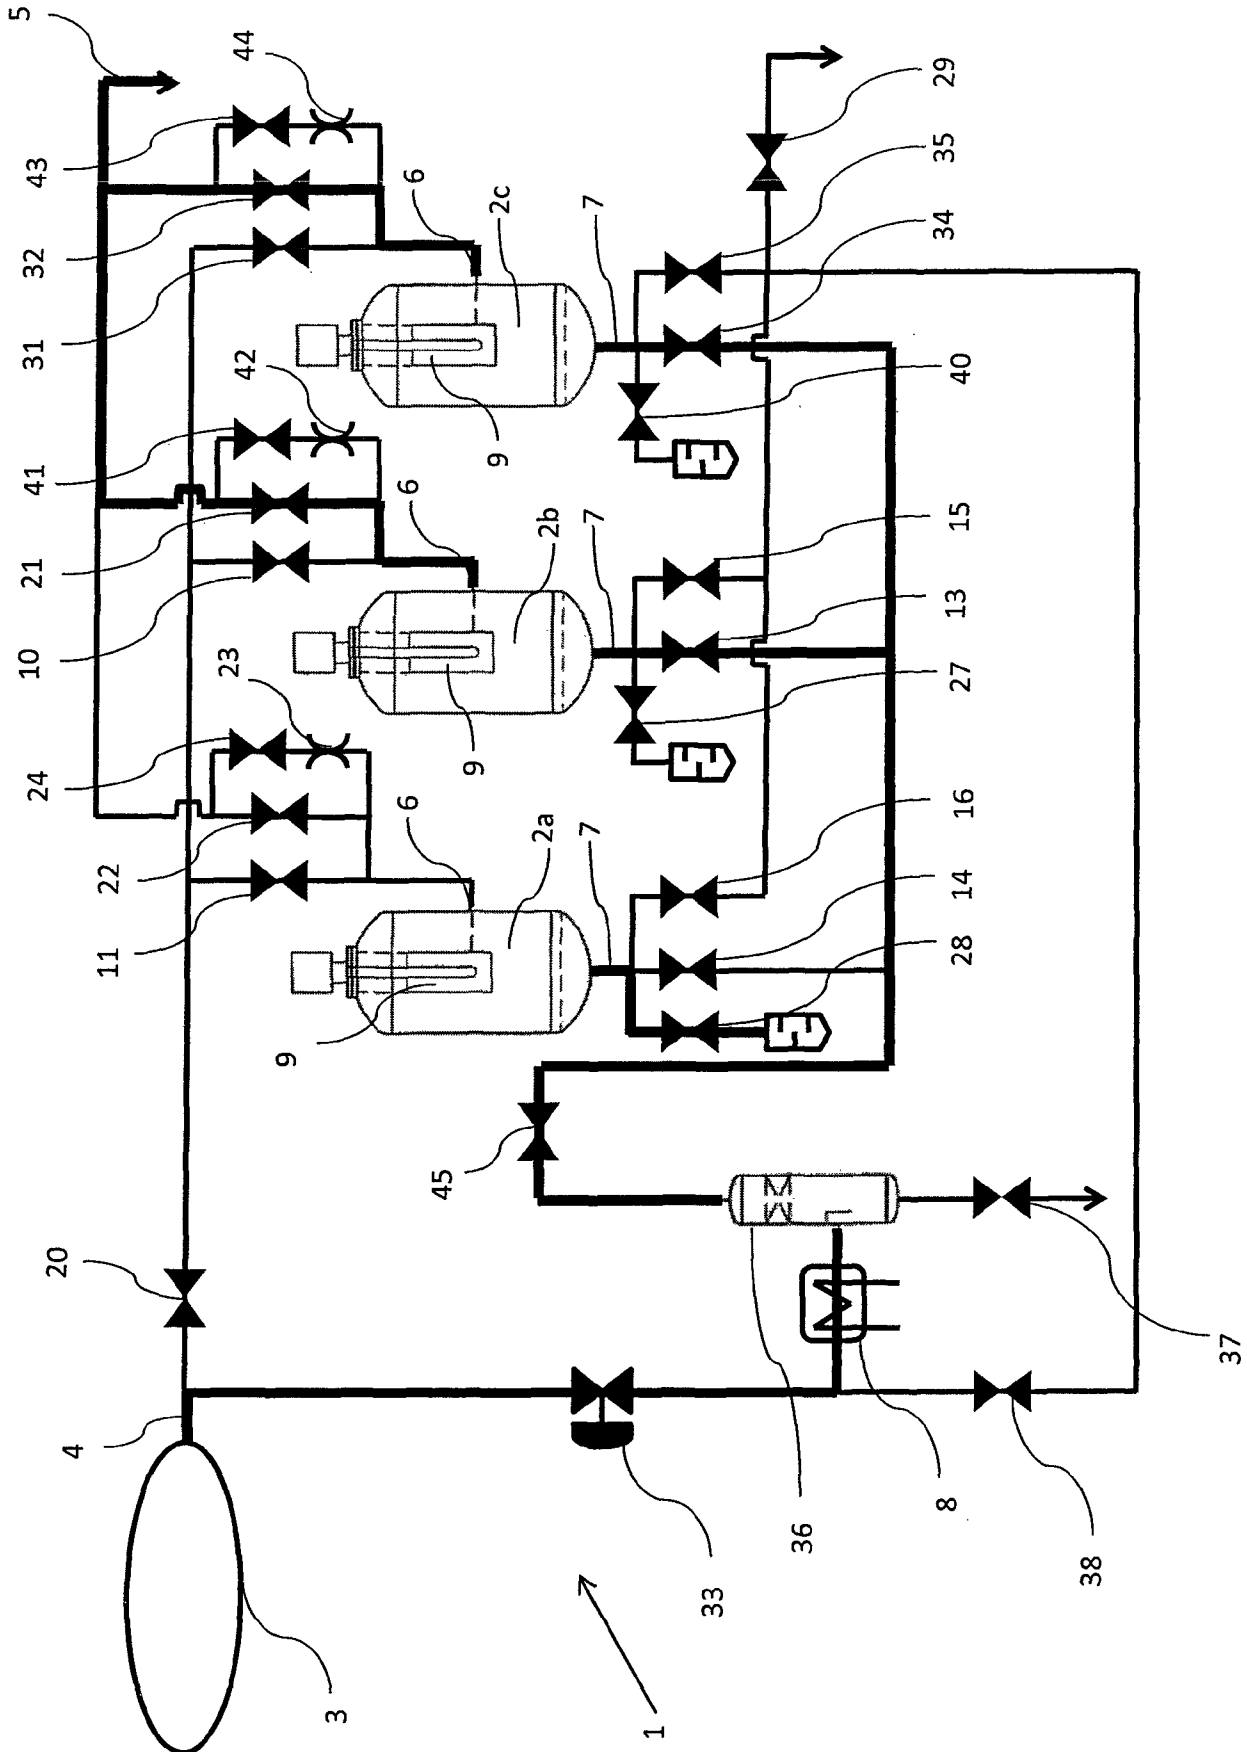


Figure 22

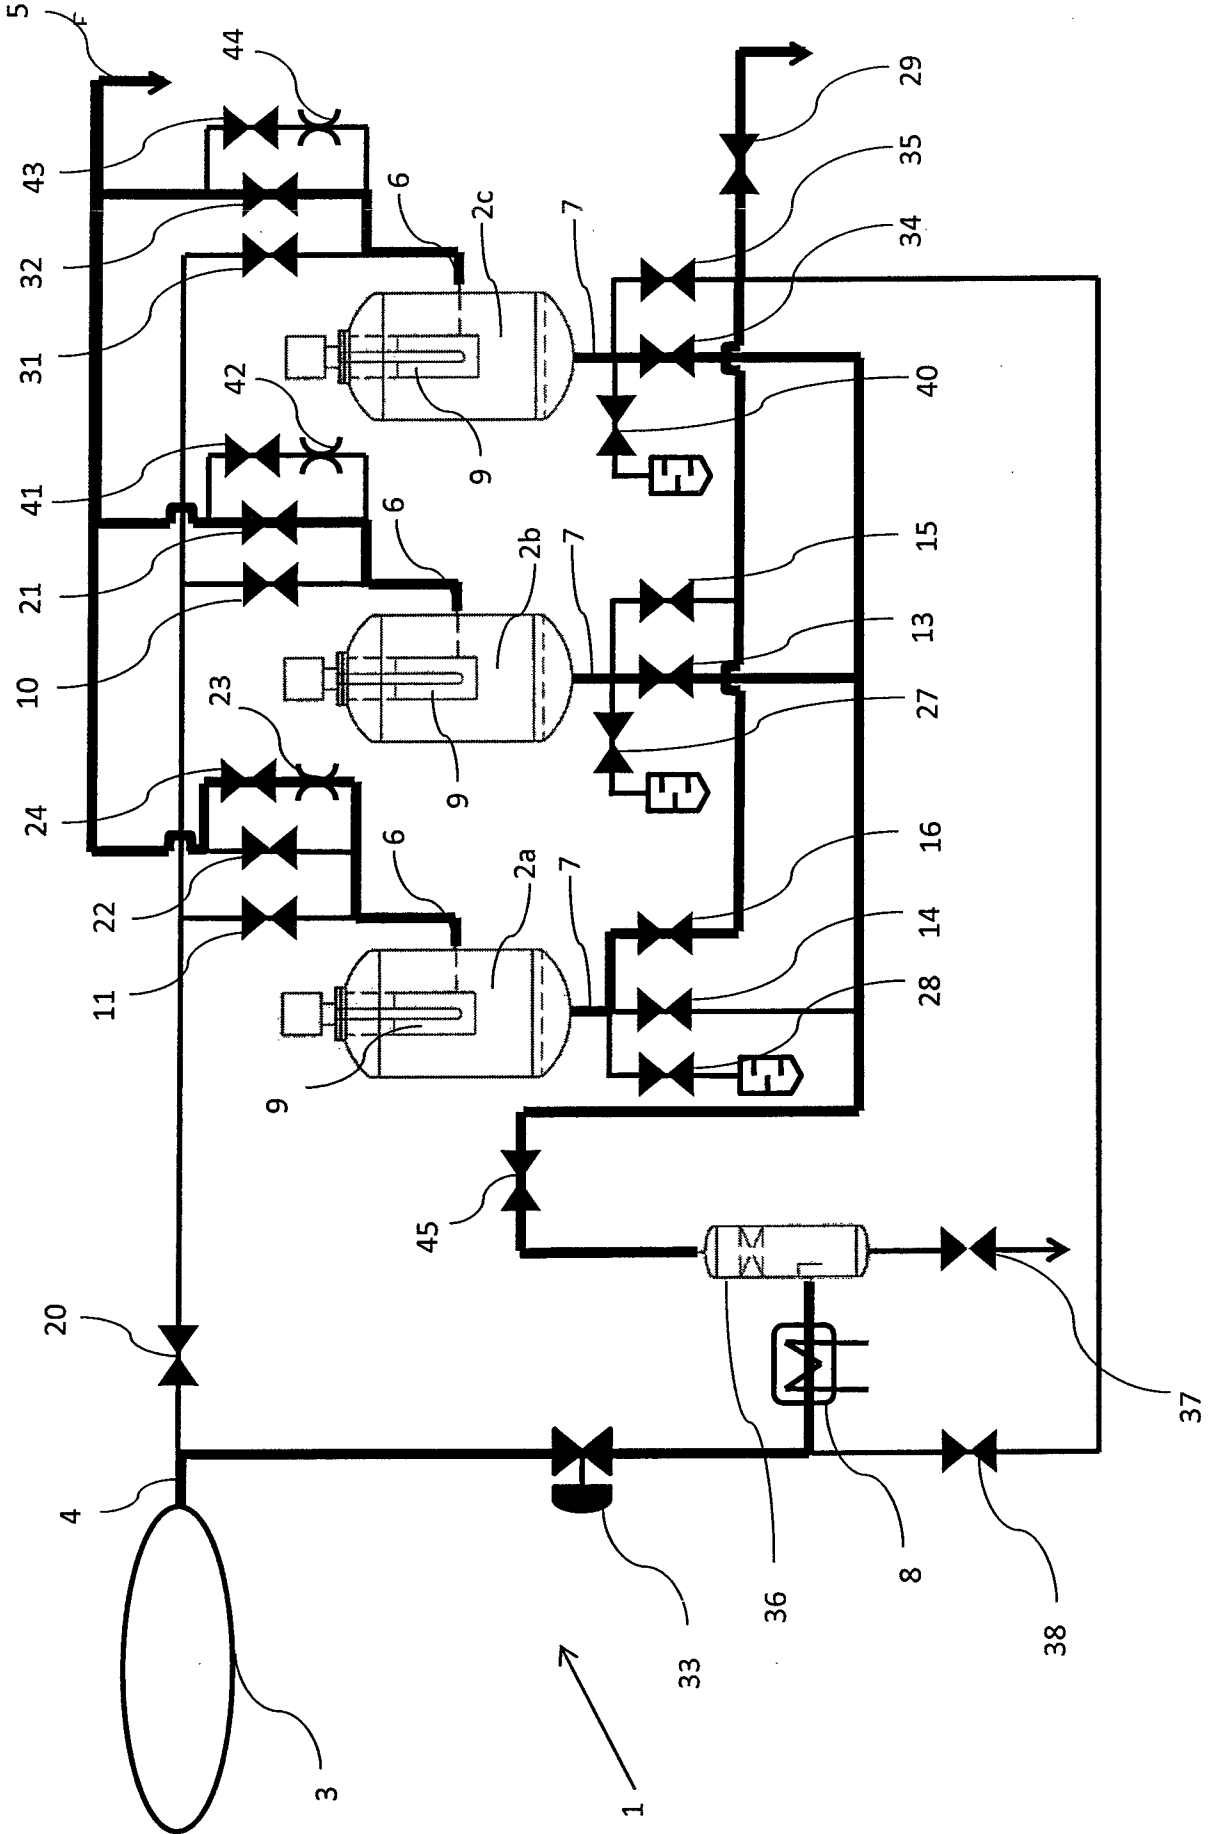


Figure 23

INTERNATIONAL SEARCH REPORT

International application No
PCT/BE2017/000012

A. CLASSIFICATION OF SUBJECT MATTER
INV. B01D53/04 B01D53/26
ADD.
According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED
Minimum documentation searched (classification system followed by classification symbols)
B01D
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)
EPO-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X A	US 4 718 020 A (DUICH MICHEAL B [US] ET AL) 5 January 1988 (1988-01-05) column 6, lines 7-29 column 7, lines 19-32 column 15, line 1 - column 17, line 7 figures 1,2,16,20	15-17,23 1-14, 18-22, 24-35
X A	US 4 023 940 A (SHULTZ GILBERT F) 17 May 1977 (1977-05-17) column 1, line 53 - column 2, line 37 column 3, line 59 - column 4, line 8 column 4, line 56 - column 5, line 49 figure 1	15,17, 18,23 1-14, 19-22, 24-35
A	US 2014/260978 A1 (BLASZKOWIAK DANIEL [US]) 18 September 2014 (2014-09-18) the whole document	15-24
	----- -/--	

Further documents are listed in the continuation of Box C.

See patent family annex.

* Special categories of cited documents :

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier application or patent but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

- "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
- "&" document member of the same patent family

Date of the actual completion of the international search 24 April 2017	Date of mailing of the international search report 03/05/2017
Name and mailing address of the ISA/ European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Fax: (+31-70) 340-3016	Authorized officer Hackenberg, Stefan

INTERNATIONAL SEARCH REPORT

International application No
PCT/BE2017/000012

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	<p>US 5 768 897 A (RAINVILLE DONALD D [US] ET AL) 23 June 1998 (1998-06-23) column 5, line 14 - column 6, line 57 column 9, line 12 - line 33 column 11, line 61 - column 12, line 13 column 13, line 27 - column 14, line 56 figures 1-7</p> <p style="text-align: center;">-----</p>	1-35
A	<p>DE 10 2013 109474 A1 (KNORR BREMSE SYSTEME FÜR SCHIENENFAHRZEUGE GMBH [DE]) 5 March 2015 (2015-03-05) the whole document</p> <p style="text-align: center;">-----</p>	1-35
A	<p>DE 15 44 105 A1 (PALL CORP) 22 October 1970 (1970-10-22) page 47, lines 17-25 page 49, lines 12-22 page 21, line 21 - page 22, line 13 page 30, line 8 - page 33, line 26 figures 2,3, 5</p> <p style="text-align: center;">-----</p>	1-35

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No PCT/BE2017/000012

Patent document cited in search report	Publication date	Publication date	Patent family member(s)	Publication date
US 4718020	A	05-01-1988	NONE	
US 4023940	A	17-05-1977	CA 1069061 A US 4023940 A	31-12-1979 17-05-1977
US 2014260978	A1	18-09-2014	NONE	
US 5768897	A	23-06-1998	NONE	
DE 102013109474	A1	05-03-2015	DE 102013109474 A1 WO 2015028534 A1	05-03-2015 05-03-2015
DE 1544105	A1	22-10-1970	BE 677537 A DE 1544105 A1 GB 1144692 A NL 6603217 A US 3448561 A US 3513631 A	01-08-1966 22-10-1970 05-03-1969 13-09-1966 10-06-1969 26-05-1970