



(51) International Patent Classification:

H01H 25/06 (2006.01) *H01H 3/02* (2006.01)
H01H 19/00 (2006.01)

(21) International Application Number:

PCT/EP2017/059139

(22) International Filing Date:

18 April 2017 (18.04.2017)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

EP16168177.0	03 May 2016 (03.05.2016)	EP
EP16184563.1	17 August 2016 (17.08.2016)	EP

(71) Applicant: **ELECTROLUX APPLIANCES AKTIEBOLAG** [SE/SE]; S:t Göransgatan 143, 105 45 Stockholm (SE).


(72) Inventors: **BRASSEUR, Jérôme**; S:t Göransgatan 143, 105 45 Stockholm (SE). **BARROS NEVES, Alexandre**; S:t Göransgatan 143, 10545 Stockholm (SE). **CHENG, Eddie**; S:t Göransgatan 143, 10545 Stockholm (SE). **FESER, Jürgen**; Bodelschwingenstr. 1, 91541 Rothenburg ob der Tauber (DE). **WINKELMANN, Klaus**; Bodelschwingenstr. 1, 91541 Rothenburg ob der Tauber (DE).

(74) Agent: **BAUMGARTL, Gerhard**; P. O. Box 1036, 90327 Nürnberg (DE).

(81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC,

(54) Title: SWITCHING ELEMENT FOR A CONTROL DEVICE

FIG 2

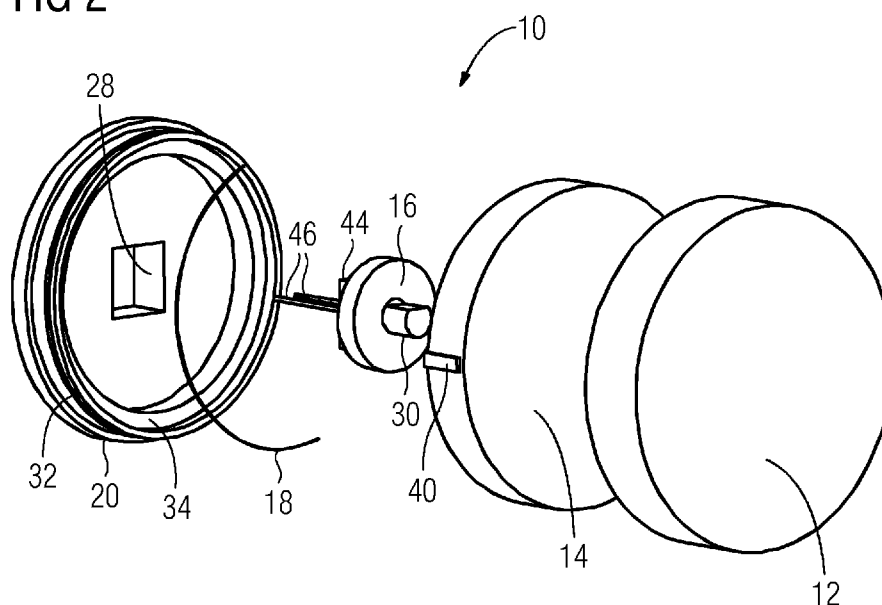

(57) **Abstract:** The present invention relates to a switching element (10) for a control device, in particular of a domestic appliance. The switching element (10) comprises a rotatable and shiftable rim element (14) being rotatable around and shiftable along the same axis. The switching element (10) comprises a stator element (20). The rim element (14) is rotatably and shiftable coupled to the stator element (20). The switching element (10) comprises a micro switch (16) including a stationary part and a movable part (30). The stationary part of the micro switch (16) is coupled to the stator element (20), while the movable part (30) of the micro switch (16) is rotatable around and shiftable along the same axis and coupled to the rim element (14). The micro switch (16) includes an encoder for indicating a rotation left or right and a shifting of the movable part (30) of said micro switch (16). The switching element (10) comprises at least one sensor antenna (18) forming a part of a capacitive touch sensor.

SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR,
TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

— *of inventorship (Rule 4.17(iv))*

Published:

— *with international search report (Art. 21(3))*

DescriptionSwitching element for a control device

5 The present invention relates to a switching element for a control device, in particular of a domestic appliance. Further, the present invention relates to a control device, in particular for a domestic appliance. Moreover, the present invention relates to a domestic appliance including at least one control device.

10

A control device, in particular of a domestic appliance, requires one or more switching elements in order to control the domestic appliance. Usually, an on-off switch or push button is provided for activating and deactivating a component or an operation mode, while a knob control or slide control is provided for adjusting an operation parameter.

15

EP 1 995 753 A1 discloses a switching element for a control device of a domestic appliance. The switching element comprises a central push button and a peripheral disc or control ring. An operation parameter of the domestic appliance may be adjusted by rotating the peripheral disc or control ring around its rotational symmetry axis. The operation parameter of the domestic appliance may be switched by pressing the central push button.

25

However, the switching element according to EP 1 995 753 A1 allows the user to communicate with the control device only by two steps. In a first step, the user moves by rotating the peripheral disc between settings proposed as a fixed catalogue by the control device. In a second step, the user selects and sets one or more of said settings by pushing the push button. It is difficult for a novel user to communicate with the control device in further enhanced ways.

30

It is an object of the present invention to provide a switching element for a control device, which overcomes the problems mentioned above.

5 The object is achieved by the switching element for a control device according to claim 1.

According to the present invention a switching element for a control device, in particular of a domestic appliance, is provided, wherein

- the switching element comprises a rotatable and shiftable rim element,
- said rim element is rotatable around and shiftable along the same axis,
- 15 - the switching element comprises a stator element,
- the rim element is rotatably and shiftable coupled to the stator element,
- the switching element comprises a micro switch including a stationary part and a movable part,
- 20 - the stationary part of the micro switch is coupled to the stator element,
- the movable part of the micro switch is rotatable around and shiftable along the same axis and coupled to the rim element,
- 25 - the micro switch includes an encoder for indicating a rotation left or right and a shifting of the movable part of said micro switch, and
- the switching element comprises at least one sensor antenna forming a part of a capacitive touch sensor.

30

The switching element according to the present invention comprises a rotatable push button including the touch sensor. The sensor antenna is one part of said touch sensor. The sensor antenna detects the hand of a user, if said hand is close to the

rotatable push button or is already grabbing it. The sensor antenna issues an electric or electronic signal, which can be delivered to the control device in order to communicate in advance to the control device that the user is going to interact with the switching element. The user may select or set a parameter of the control device via the rotatable push button. In this way, an alert mode of the control device may be triggered in advance before any parameter is selected or set by the user via the rotatable push button.

For example, the sensor antenna is formed as a ring segment. The sensor antenna is at least partially made of metal.

Preferably, the stator element includes a peripheral groove for receiving the sensor antenna.

Further, the rim element may include a seat element for receiving at least partially the movable part of the micro switch, so that relative rotation and shift between the seat element and said movable part is avoided.

In particular, the movable part of the micro switch is a shaft rotatable around and shiftable along a longitudinal axis of said shaft.

Preferably, the stator element includes a stator protrusion extending rearwards, wherein preferably said stator protrusion is ashlar-formed.

Moreover, the stator element may include a cut-out formed in the stator protrusion of said stator element, wherein preferably electrical leads of or from the micro switch penetrate said cut-out.

According to a preferred embodiment of the present invention the switching element comprises a cover element encasing partially the rim element, wherein preferably the cover element encases a front side and a circumferential side of said rim element. The cover element defines the design of the switching element. Thus, different designs for the switching element are possible by providing the corresponding cover elements.

In particular, the cover element includes at least one nut, while the rim element includes at least one tongue corresponding with said nut, so that a torque proof connection is formed between the cover element and the rim element.

For example, the cover element is at least partially made of metal. The metal cover element may form a part of the capacitive touch sensor.

Preferably, the rim element includes at least one first latch element, while the stator element includes at least one second latch element corresponding with said first latch element, so that the rim element is rotatably and shiftably coupled to the stator element.

Further, the present invention relates to a control device, in particular for a domestic appliance, wherein the control device includes at least one switching element mentioned above.

Preferably, the control device comprises at least one panel for receiving at least one switching element.

Further, the panel may include at least one cut-out for receiving the switching element, wherein preferably said cut-out receives the stator protrusion of the stator element. In particular, the cut-out and the stator protrusion have the same or a

similar cross-section, wherein the cross-section of the cut-out is marginally bigger than the cross-section of the stator protrusion.

5 At last, the present invention relates to a domestic appliance including at least one control device, wherein the domestic appliance includes at least one switching element and/or at least one control device mentioned above.

10 Novel and inventive features of the present invention are set forth in the appended claims.

The present invention will be described in further detail with reference to the drawing, in which

15

FIG 1 illustrates a schematic exploded perspective rear view of a switching element according to a preferred embodiment of the present invention,

20 FIG 2 illustrates a schematic exploded perspective front view of the switching element according to the preferred embodiment of the present invention,

FIG 3 illustrates a schematic sectional side view of the
25 switching element according to the preferred embodiment of the present invention,

FIG 4 illustrates a schematic detailed sectional view of a peripheral portion of the switching element according to
30 the preferred embodiment of the present invention,

FIG 5 illustrates a schematic perspective rear view of a panel with the switching element according to the preferred embodiment of the present invention,

FIG 6 illustrates a schematic sectional side view of the panel with the switching element according to the preferred embodiment of the present invention, and

5

FIG 7 illustrates a schematic detailed perspective rear view of the panel with the switching element according to the preferred embodiment of the present invention.

10 FIG 1 illustrates a schematic exploded perspective rear view of the switching element 10 according to a preferred embodiment of the present invention. The switching element 10 is provided for a control device, in particular for a control device of a domestic appliance.

15

The switching element 10 comprises a cover element 12, a rim element 14, a micro switch 16, a sensor antenna 18 and a stator element 20. The cover element 12, the rim element 14, the micro switch 16 and the stator element 20 are substantially formed rotation-symmetric. The cover element 12, the rim element 14, the micro switch 16 and the stator element 20 are arranged in such a way that their rotation-symmetry axes coincide.

The cover element 12 includes a circular disc and a cylinder barrel. The circular disc is arranged at the front side, while the cylinder barrel extends rearwards from said circular disc. The terms "front" and "front side" relate to that side facing the user. In contrast, the terms "rear", "rear side" and "behind" relate to that side averted from the user. At least one nut 38 is formed at the inner side of the cylinder barrel of the cover element 12. The nut 38 extends parallel to the rotation-symmetry axis of the cover element 12.

30

In this example, the cover element 12 is formed as a single-piece part and has the shape of a cap.

The cover element 12 receives the rim element 14. The inner diameter of the cylinder barrel of the cover element 12 is marginally bigger than the outer diameter of the rim element 14. The circular disc of the cover element 12 is arranged in front of the rim element 14, while the cylinder barrel of the cover element 12 encloses an outer circumferential side of the rim element 14. At least one tongue 40 is formed at the outer circumferential side of the rim element 14. The nut 38 of the cover element 12 and the tongue 40 of the rim element 14 are complementary to each other. The nut 38 and the tongue 40 guarantee that the cover element 12 and the rim element 14 are rotated synchronously. Factually, the cover element 12 and the rim element 14 form a rigid body.

The rim element 14 includes a first latch element 22 formed as an annular protrusion. The first latch element 22 is arranged in the outer portion of the rim element 14 and extends rearwards from said rim element 14. Further, the rim element 14 includes a seat element 24. Said seat element 24 is formed cylinder barrel and extends rearwards from the rim element 14. The seat element 24 is arranged in the outer portion of the rim element 14. A recess enclosed by the seat element 24 has a special non-rotation-symmetric shape.

The stator element 20 is arranged behind the rim element 24. The micro switch 16 is arranged between the rim element 24 and the stator element 20. The stator element 20 includes a peripheral groove 32 formed at the circumferential side of said stator element 20. The peripheral groove 32 receives the sensor antenna 18. The sensor antenna 18 is formed as a ring segment. A stator protrusion 26 is formed at the inner side of the stator element

20. In this example, the stator protrusion 26 is ashlar-formed. Further, a first cut-out 28 is formed within said stator protrusion 26 of the stator element 20. In this example, the first cut-out 28 is rectangular.

5

The micro switch 16 includes a switch protrusion 44. The switch protrusion 44 is arranged at the rear side of said micro switch 16. The switch protrusion 44 of the micro switch 16 is received by the first cut-out 28 formed within the stator protrusion 26 of the stator element 20. The switch protrusion 44 of the micro switch 16 has substantially the same shape as the first cut-out 28 in the stator protrusion 26 of the stator element 20. The switch protrusion 44 of the micro switch 16 is marginally smaller than the first cut-out 28 in the stator protrusion 26 of the stator element 20.

Further, the micro switch 16 includes electric leads 46. Said electric leads 46 extend from the micro switch 16 to the control device and/or to the interior of the domestic appliance. The electric leads 46 penetrate the first cut-out 28 in the stator protrusion 26 of the stator element 20.

FIG 2 illustrates a schematic exploded perspective front view of the switching element 10 according to the preferred embodiment of the present invention.

The cover element 12 receives the rim element 14. The peripheral groove 32 of the stator element 20 receives the sensor antenna 18. The micro switch 16 is arranged between the rim element 24 and the stator element 20.

The micro switch 16 includes a shaft 30 arranged at the front side of said micro switch 16. The longitudinal axis of the shaft 30 extends along the common its rotation-symmetry axis of the

rim element 14 and micro switch 16. The shaft 30 is rotatable around its longitudinal axis. Additionally, the shaft 30 is shiftable along its longitudinal axis. The shaft 30 is received by the seat element 24 of the rim element 14. Thus, the shaft 30 is rotatable and shiftable by rotating and pushing, respectively, the cover element 12 and rim element 14. The recess enclosed by the seat element 24 of the rim element 14 and the shaft 30 of the micro switch 16 have the same or a similar cross-section, wherein the cross-section of said recess is marginally bigger than the cross-section of the shaft 30. The recess and the shaft 30 have such shapes that relative rotation and motion between the recess and the shaft 30 is avoided.

In this example, the recess of the seat element 24 as well as the shaft 30 has a semi-circular cross-section. Said semi-circular cross-sections of the recess of the seat element 24 and of the shaft 30 allow a lock against rotation of the rim element 14 relative to the shaft 16. In general, the cross-sections of the recess of the seat element 24 and of the shaft 30 are asymmetric with respect to the rotation around the longitudinal axis of the shaft 30.

The shaft 30 and the switch protrusion 44 are arranged at opposite sides of the micro switch 16. The shaft 30 is arranged at the front side of the micro switch 16, while the switch protrusion 44 is arranged at the rear side of said micro switch 16.

The electric leads 46 of the micro switch 16 penetrate the first cut-out 28 in the stator protrusion 26 of the stator element 20.

The stator element 20 includes a second latch element 34. The second latch element 34 of the stator element 20 engages with the first latch element 22 of the rim element 14, so that the rim element 14 is rotatable relative to the stator element 20

around their common rotation-symmetry axis. The first latch element 22 and the second latch element 34 provide the mechanical connection between the rim element 14 and the stator element 20.

5 FIG 3 illustrates a schematic sectional side view of the switching element 10 according to the preferred embodiment of the present invention.

The rim element 14 is received by the cover element 12, so that
10 the cover element 12 and the rim element 14 form the rigid body. Further, the rim element 14 is rotatable at the stator element 20 via the first latch element 22 and the second latch element 34. The micro switch 16 is arranged between the rim element 24 and the stator element 20. The shaft 30 of the micro switch 16
15 is received by the seat element 24 of the rim element 14. The sensor antenna 18 is received by the peripheral groove 32 of the stator element 20. The sensor antenna 18 forms a part of a capacitive touch sensor.

20 The shaft 30 of the micro switch 16 is arranged at the front side of said micro switch 16, while the switch protrusion 44 is arranged at the rear side of said micro switch 16. The shaft 30 is rotatable around its longitudinal axis relative to the micro switch 16. Further, the shaft 30 is shiftable along its longitudinal
25 axial axis relative to the micro switch 16. The electric leads 46 of the micro switch 16 penetrate the first cut-out 28 in the stator protrusion 26 of the stator element 20.

FIG 4 illustrates a schematic detailed sectional view of a peripheral
30 portion of the switching element 10 according to the preferred embodiment of the present invention.

The sensor antenna 18 is received by the peripheral groove 32 of the stator element 20. The first latch element 22 of the rim element 14 engages with the second latch element 34 of the stator element 20, so that the rim element 14 and the cover element 12 are rotatable relative to the stator element 20 around their common rotation-symmetry axis.

FIG 5 illustrates a schematic perspective rear view of a panel 36 with the switching element 10 according to the preferred embodiment of the present invention. The panel 36 is a part of the control device.

The panel 36 includes a second cut-out 42 for receiving the switching element 10. In this example, the second cut-out 42 is marginally bigger than the cross-section of the stator protrusion 26 of the stator element 20. The stator protrusion 26 of the stator element 20 penetrates the second cut-out 42 of the panel 36. The stator element 20 is a stationary part of the control device.

FIG 6 illustrates a schematic sectional side view of the panel 36 with the switching element 10 according to the preferred embodiment of the present invention.

The cover element 12 substantially covers the whole switching element. The protrusion 26 of the stator element 20 penetrates the second cut-out 42 of the panel 36. The stator element 20 is arranged stationary at the panel 36. The rim element 14 is rotatable at the stator element 20 via the first latch element 22 and the second latch element 34. The micro switch 16 is arranged between the rim element 24 and the stator element 20. The shaft 30 of the micro switch 16 is received by the seat element 24 of the rim element 14. The shaft 30 of the micro switch 16 is rotatable by rotating the rim element 24 and the cover element 12.

Moreover, the shaft 30 of the micro switch 16 is shiftable by pushing the rim element 24 and the cover element 12. The sensor antenna 18 is received by the peripheral groove 32 of the stator element 20. The first cut-out 28 in the protrusion 26 allows
5 that the electrical leads 46 of or from the micro switch 30 pass through said first cut-out 28 into the interior of the control device or domestic appliance.

The switch protrusion 44 is arranged at the rear side of the micro switch 16, while the shaft 30 of the micro switch 16 is arranged at the front side of said micro switch 16. The shaft 30 is rotatable around its longitudinal axis relative to the micro switch 16. Moreover, the shaft 30 is shiftable along its longitudinal axis relative to the micro switch 16. Furthermore, the
15 electric leads 46 of the micro switch 16 penetrate the first cut-out 28 in the stator protrusion 26 of the stator element 20.

FIG 7 illustrates a schematic detailed perspective rear view of the panel 36 with the switching element 10 according to the preferred embodiment of the present invention.
20

The stator protrusion 26 of the stator element 20 penetrates the second cut-out 42 of the panel 36. The stator element 20 with the stator protrusion 26 and the body of micro switch 16 form
25 the stationary part of the control device, wherein the cover element 12, the rim element 14, the sensor antenna 18 and the shaft 30 of the micro switch 16 form the movable part of the control device.

30 The micro switch 16 allows two different functions. The shaft 30 of the micro switch 16 may be shifted along its longitudinal axis by pushing the rim element 14 and may be rotated around its longitudinal axis by rotating said rim element 14. The micro switch 16 includes an encoder for indicating turning left or

right of the rim element 14 and axial pushing of said rim element 14.

The switch protrusion 44 of the micro switch 16 is arranged at the rear side of said micro switch 16 and received by the first cut-out 28 in the stator protrusion 26 of the stator element 20. The electric leads 46 of the micro switch 16 penetrate the switch protrusion 44 of said micro switch 16 and the first cut-out 28 in the stator protrusion 26 of the stator element 20.

The switching element according to the present invention comprises beside the rotatable and shiftable push button additionally the sensor antenna 18. The sensor antenna 18 forms a part of the capacitive touch sensor. The sensor antenna 18 detects the hand of the user, if said hand is close to the rotatable push button or is already grabbing it. The sensor antenna 18 issues an electric or electronic signal, which can be delivered to the control device in order to communicate in advance to the control device that the user is going to interact with the switching element 10. The user may select or set a parameter of the control device via the rotatable push button. In this way, an alert mode of the control device may be triggered in advance before any parameter is selected or set by the user via the rotatable push button.

The switching element of the present invention is provided for the control device of an arbitrary electric domestic appliance. The switching element is suitable for stationary and mobile domestic appliances. For example, the inventive switching element is provided for a washing machine, a cooking oven, a coffee machine and any other domestic appliance within and without of the kitchen.

Although an illustrative embodiment of the present invention has been described herein with reference to the accompanying drawings, it is to be understood that the present invention is not limited to that precise embodiment, and that various other
5 changes and modifications may be affected therein by one skilled in the art without departing from the scope or spirit of the invention. All such changes and modifications are intended to be included within the scope of the invention as defined by the appended claims.

List of reference numerals

10	switching element
12	cover element
14	rim element
16	micro switch
18	sensor antenna
20	stator element
22	first latch element
24	seat element
26	stator protrusion
28	first cut-out
30	shaft
32	peripheral groove
34	second latch element
36	panel
38	nut
40	tongue
42	second cut-out
44	switch protrusion
46	electric lead

Claims

1. A switching element (10) for a control device, in particular
of a domestic appliance, wherein
 - 5 - the switching element (10) comprises a rotatable and
shiftable rim element (14),
 - said rim element (14) is rotatable around and shiftable
along the same axis,
 - the switching element (10) comprises a stator element
10 (20),
 - the rim element (14) is rotatably and shiftable coupled
to the stator element (20),
 - the switching element (10) comprises a micro switch
(16) including a stationary part and a movable part
15 (30),
 - the stationary part of the micro switch (16) is coupled
to the stator element (20),
 - the movable part (30) of the micro switch (16) is ro-
tatable around and shiftable along the same axis and
20 coupled to the rim element (14),
 - the micro switch (16) includes an encoder for indicat-
ing a rotation left or right and a shifting of the mov-
able part (30) of said micro switch (16), and
 - the switching element (10) comprises at least one sen-
25 sor antenna (18) forming a part of a capacitive touch
sensor.
2. The switching element according to claim 1,
characterised in that
30 the sensor antenna (18) is formed as a ring segment.
3. The switching element according to claim 1 or 2,
characterised in that

the stator element (20) includes a peripheral groove for receiving the sensor antenna (18).

4. The switching element according to any one of the preceding claims,

characterised in that

the rim element (14) includes a seat element (24) for receiving at least partially the movable part (30) of the micro switch (16), so that relative rotation and shift between the seat element (24) and said movable part (30) is avoided.

5. The switching element according to any one of the preceding claims,

characterised in that

the movable part (30) of the micro switch (16) is a shaft (30) rotatable around and shiftable along a longitudinal axis of said shaft (30).

6. The switching element according to any one of the preceding claims,

characterised in that

the stator element (20) includes a stator protrusion (26) extending rearwards, wherein preferably said stator protrusion (26) is ashlar-formed.

7. The switching element according to claim 6, characterised in that

the stator element (20) includes a cut-out (28) formed in the stator protrusion (26) of said stator element (20), wherein preferably electrical leads (46) of or from the micro switch (16) penetrate said cut-out (28).

8. The switching element according to any one of the preceding claims,

characterised in that
the switching element (10) comprises a cover element (12)
encasing partially the rim element (14), wherein preferably
the cover element (12) encases a front side and a circumfer-
ential side of said rim element (14).

5

9. The switching element according to claim 8,
characterised in that
the cover element (12) includes at least one nut (38), while
the rim element (14) includes at least one tongue (40) cor-
responding with said nut (38), so that a torque proof con-
nection is formed between the cover element (12) and the rim
element (14).

10

10. The switching element according to claim 8 or 9,
characterised in that
the cover element (12) is at least partially made of metal.

15

11. The switching element according to any one of the preceding
claims,
characterised in that
the rim element (14) includes at least one first latch ele-
ment (22), while the stator element includes at least one
second latch element (34) corresponding with said first
latch element (22), so that the rim element (14) is rotata-
bly and shiftably coupled to the stator element (20).

20

25

12. A control device, in particular for a domestic appliance,
characterised in that
the control device includes at least one switching element
(10) according to any one of the claims 1 to 11.

30

13. The control device according to claim 12,
characterised in that

the control device comprises at least one panel (36) for receiving at least one switching element (10).

14. The control device according to claim 12 or 13,

5

characterised in that

the panel (36) includes at least one cut-out (42) for receiving the switching element (10), wherein preferably said cut-out (42) receives the stator protrusion (26) of the stator element (20).

10

15. A domestic appliance including at least one control device, characterised in that

the domestic appliance includes at least one switching element (10) according to any one of the claims 1 to 11 and/or

15

at least one control device according to any one of the claims 12 to 14.

FIG 1

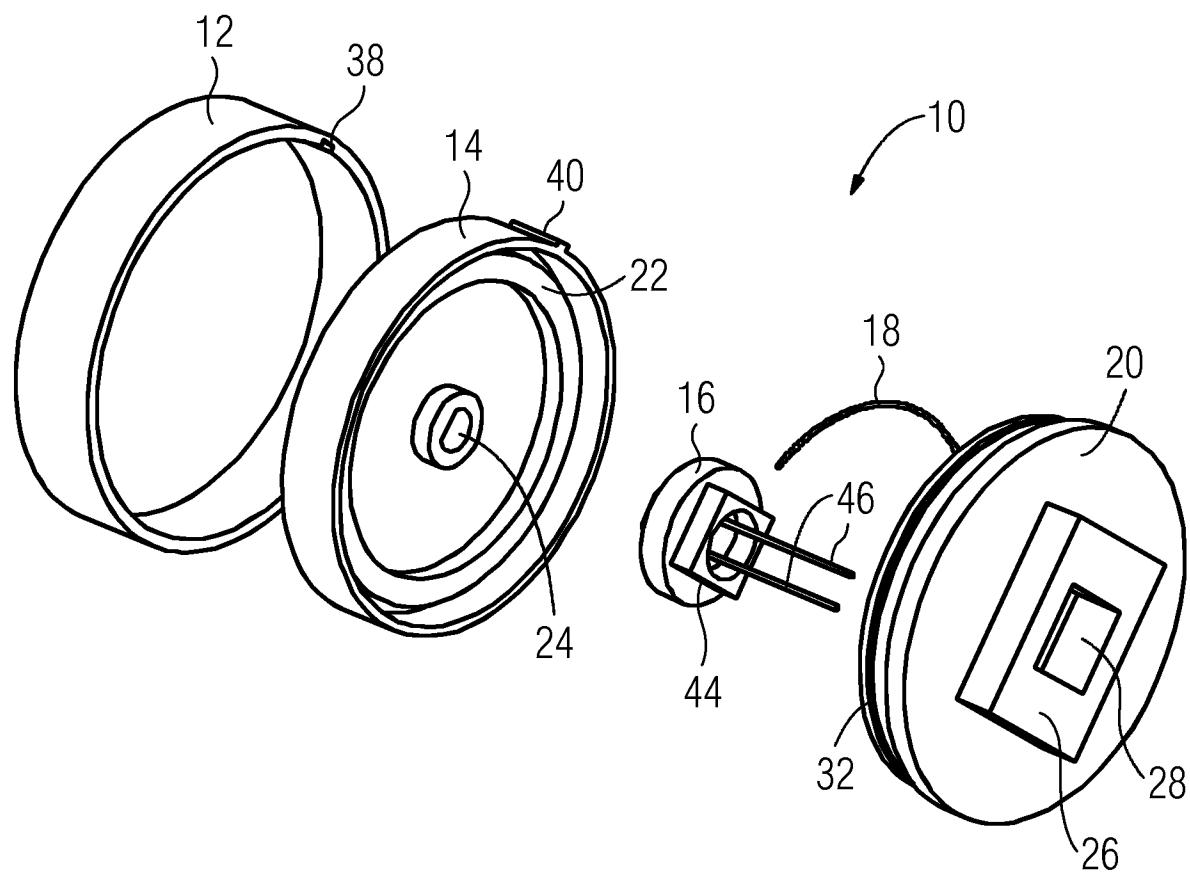


FIG 2

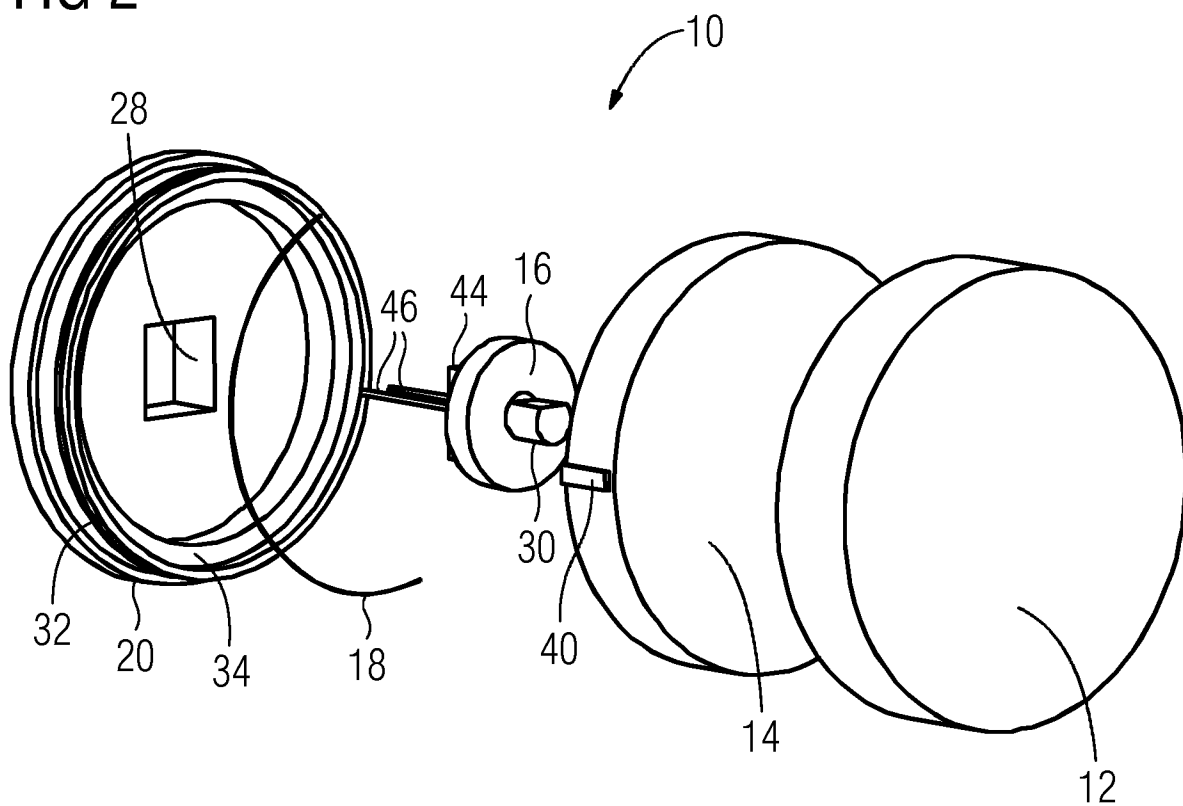


FIG 3


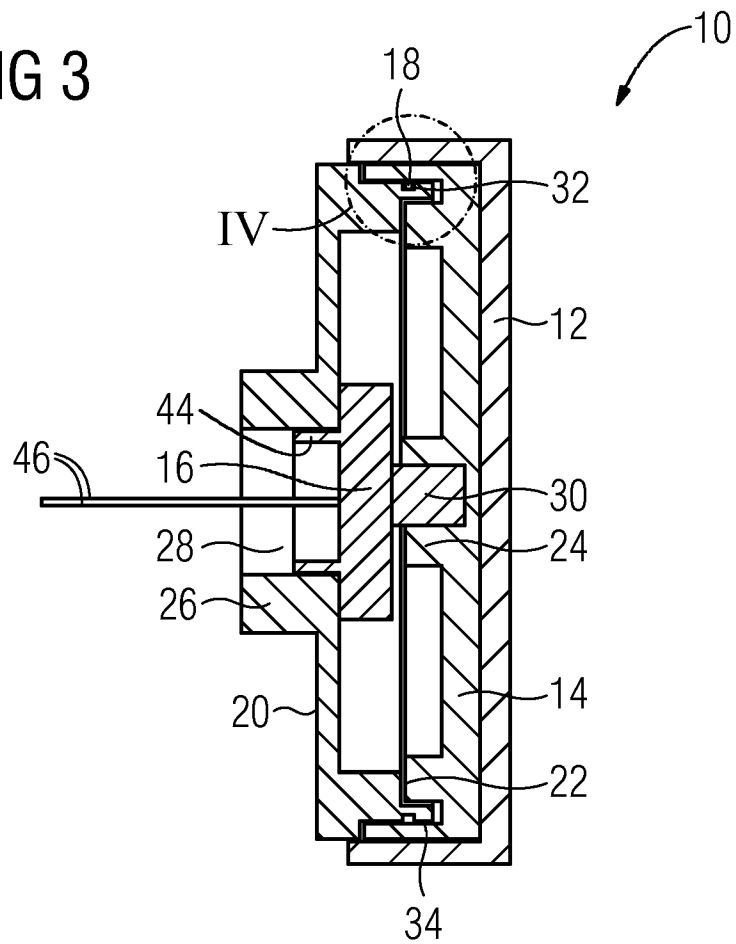


FIG 4

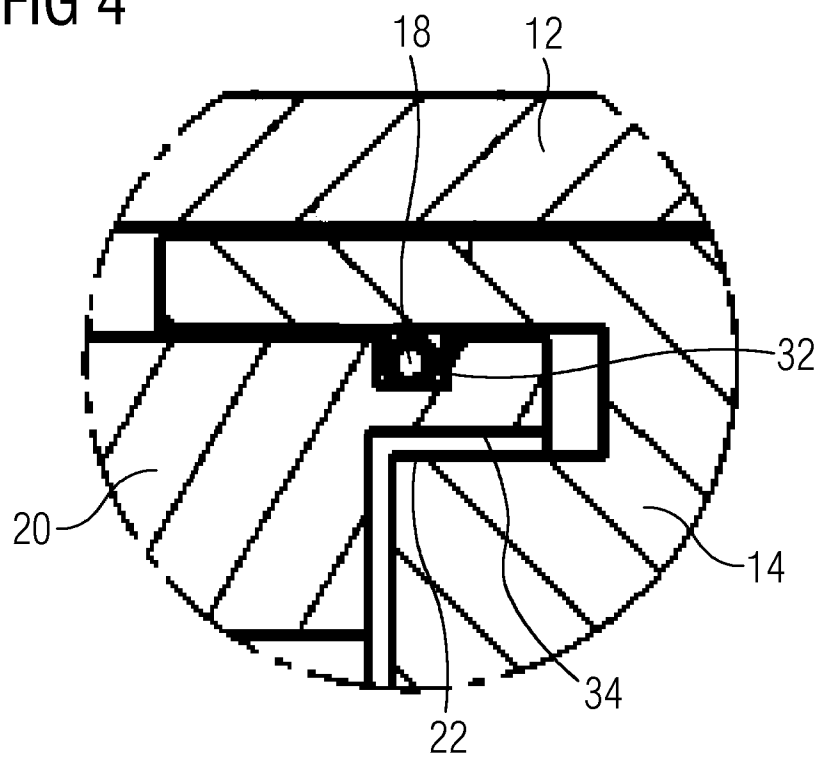

3/4

FIG 5

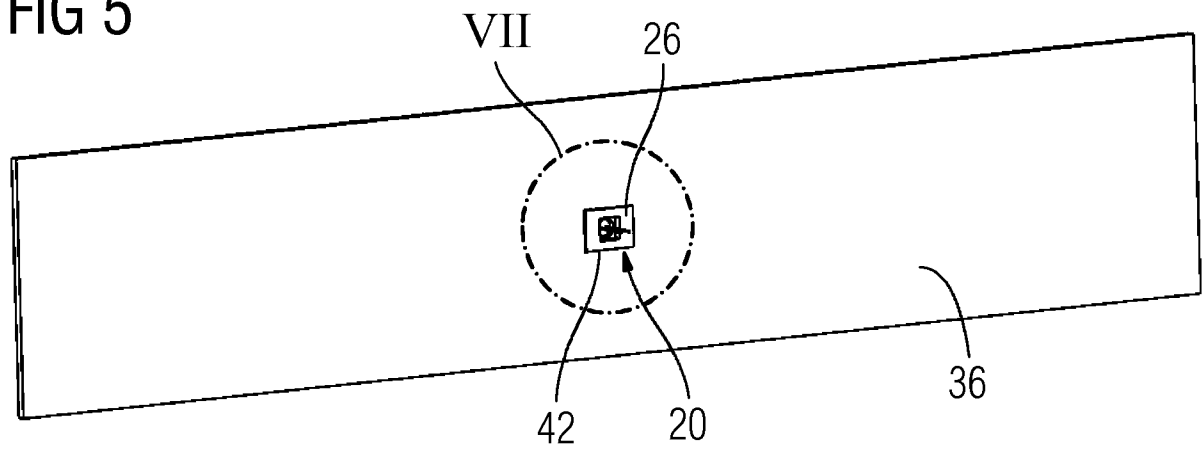


FIG 6


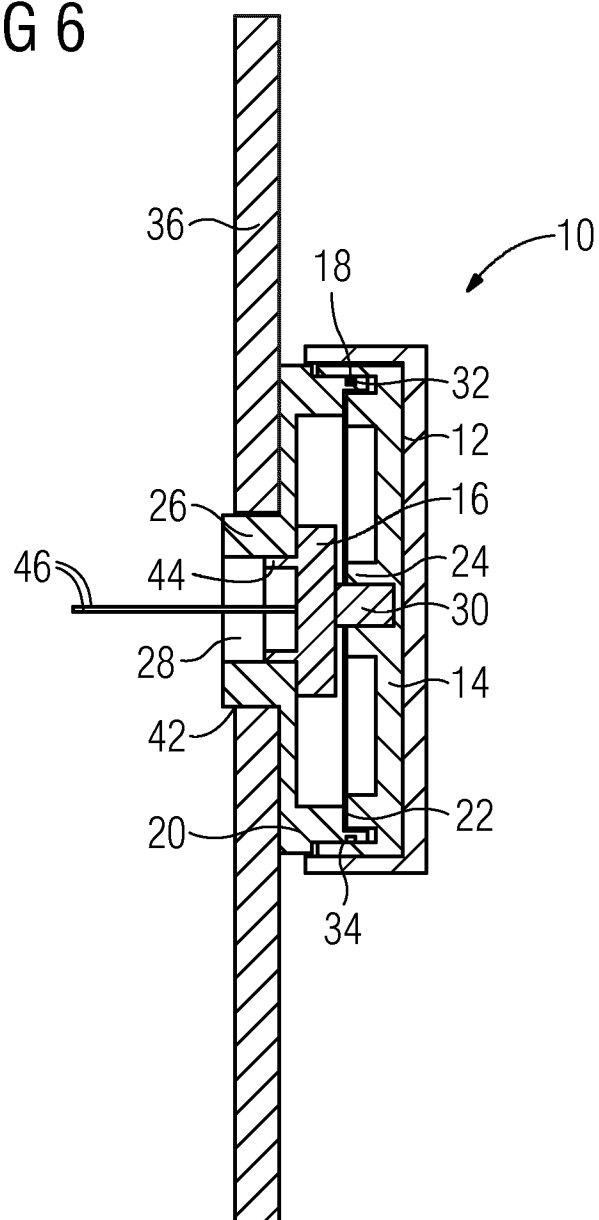


FIG 7

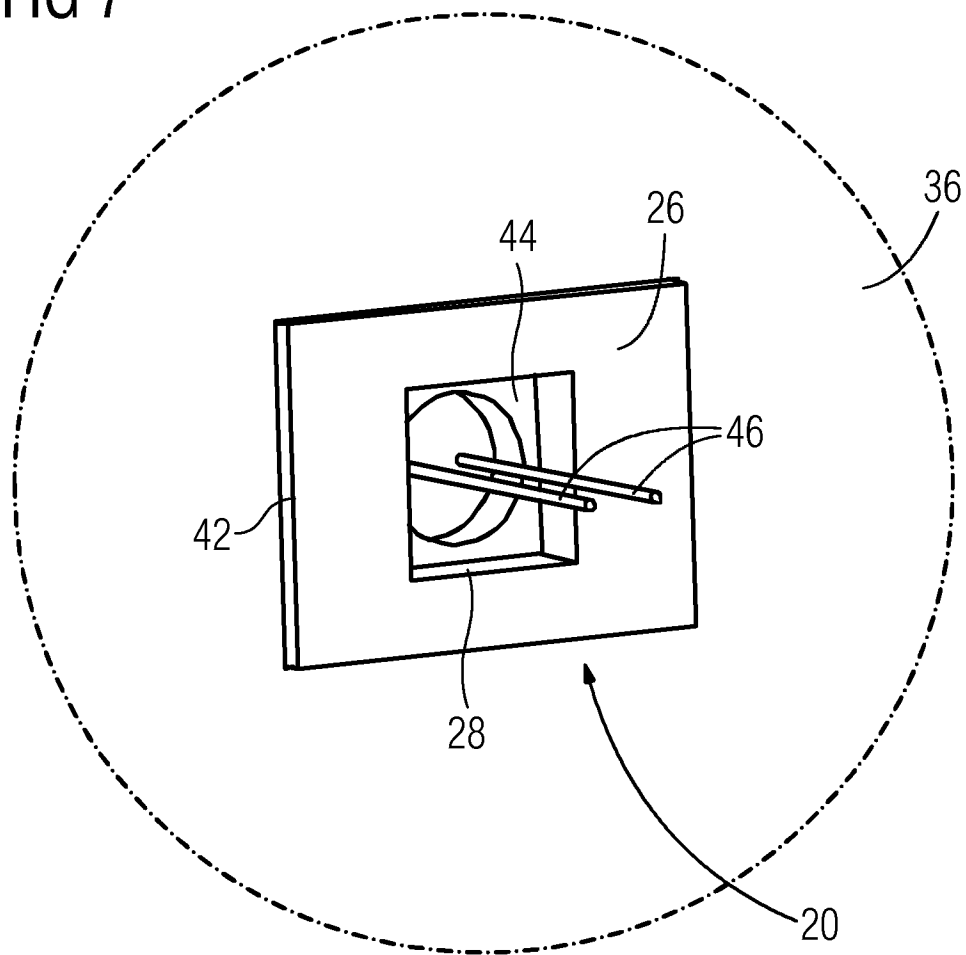

INTERNATIONAL SEARCH REPORT

International application No
PCT/EP2017/059139

A. CLASSIFICATION OF SUBJECT MATTER

INV. H01H25/06

ADD. H01H19/00 H01H3/02

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

H01H H03K

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	WO 2012/136571 A1 (DELPHI TECH INC [US]; ISQUIERDO VINCENT [FR]; CAILLOUX ROBIN [FR]) 11 October 2012 (2012-10-11)	1,4-6, 11-15
A	page 4, lines 15-33 page 5, lines 8-21 page 7, lines 25-30 figures 1,3	2,3,7-10
Y	DE 603 05 276 T2 (DAV [FR]) 3 May 2007 (2007-05-03) paragraphs [0024] - [0029] figures 1-3	1,4-6, 11-15



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

19 May 2017

Date of mailing of the international search report

30/05/2017

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040,
Fax: (+31-70) 340-3016

Authorized officer

Glaman, C

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/EP2017/059139

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 2012136571 A1	11-10-2012	EP 2694318 A1	12-02-2014
		FR 2973931 A1	12-10-2012
		WO 2012136571 A1	11-10-2012

DE 60305276 T2	03-05-2007	AT 326766 T	15-06-2006
		DE 60305276 T2	03-05-2007
		EP 1424710 A1	02-06-2004
		FR 2847712 A1	28-05-2004
