



(51) International Patent Classification:

H04M 1/02 (2006.01) *H01Q 1/44* (2006.01)
H05K 5/04 (2006.01) *H05K 5/02* (2006.01)

(21) International Application Number:

PCT/CN2017/099181

(22) International Filing Date:

25 August 2017 (25.08.2017)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

201620945031.9 25 August 2016 (25.08.2016) CN
201610727662.8 25 August 2016 (25.08.2016) CN

(71) Applicant: **GUANGDONG OPPO MOBILE
TELECOMMUNICATIONS CORP., LTD.** [CN/CN];

NO.18, Haibin Road, Wusha, Chang'an, Dongguan, Guang-
dong 523860 (CN).

(72) Inventors: **ZHANG, Tao**; NO.18, Haibin Road, Wusha,
Chang'an, Dongguan, Guangdong 523860 (CN). **SUN,
Wenfeng**; NO.18, Haibin Road, Wusha, Chang'an, Dong-
guan, Guangdong 523860 (CN).

(74) Agent: **ESSEN PATENT&TRADEMARK AGENCY**;
Hailun Complex Block A, Room 1709-1711, No.6021
Shennan Blvd, Futian District, ShenZhen, Guangdong
518040 (CN).

(81) Designated States (*unless otherwise indicated, for every
kind of national protection available*): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ,
CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO,
DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN,
HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP,
KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME,

(54) Title: MOBILE TERMINAL, HOUSING COMPONENT, AND MANUFACTURING METHOD THEREOF

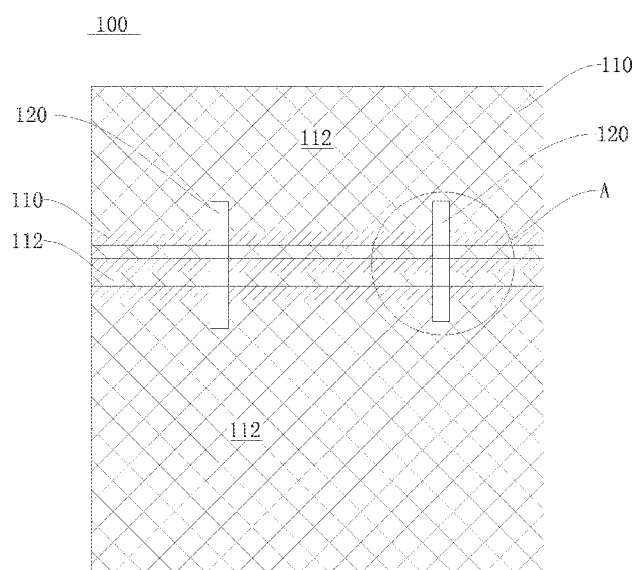


FIG. 1

(57) Abstract: A mobile terminal, a housing component and a manufacturing method thereof are provided. The housing component of the mobile terminal includes a conductive housing and at least one conductive component. The conductive housing is provided with at least one slot. The at least one slot is configured to divide the conductive housing into a plurality of regions, and is filled with an insulating layer. The at least one conductive component is attached to the conductive housing and across the at least one slot, so as to electrically connect the plurality of regions together. The housing component of the mobile terminal realizes grounding and conduction of an antenna through electrically connecting the plurality of regions of the conductive housing using the at least one conductive component.



MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ,
OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA,
SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN,
TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

- (84) Designated States** (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

MOBILE TERMINAL, HOUSING COMPONENT, AND MANUFACTURING METHOD THEREOF

CROSS REFERENCE TO RELATED APPLICATION

[0001] This application claims priority to Chinese Application No.201620945031.9, filed on August 25, 2016 and Chinese Application No. 201610727662.8 filed on August 25, 2016. The entire disclosure of each of the above applications is incorporated herein by reference.

FIELD OF THE DISCLOSURE

[0002] The present disclosure relates to a technical field of electronic apparatuses, and more specifically, the present disclosure relates to a mobile terminal, a housing component, and a manufacturing method thereof.

BACKGROUND OF THE DISCLOSURE

[0003] The frame of a cell phone is generally made of aluminum alloy. In order to ensure the performance of antennas, a metal back cover can be cut off during machining. It is impossible for metal blocks being cut off to achieve electrical connection, thereby affecting grounding and conduction of the antennas. In the related art, a plurality of metal blocks can be connected by reserving some metal during the machining to realize conductive connection. However, the metal connection of some other parts needs to be cut off during machining, which makes the procedure complicated.

SUMMARY OF THE DISCLOSURE

[0004] The present disclosure aims to solve one of the technical problems in the relevant technology at least to some degree. Thus, the present disclosure provides a housing component of a mobile terminal, a mobile terminal, and a manufacturing method of a housing component of a mobile terminal.

[0005] In accordance with an embodiment of the present disclosure, a housing component of a mobile terminal includes a conductive housing, and at least one conductive component. The conductive housing is provided with at least one slot. The at least one slot is configured to divide the conductive housing into a plurality of regions and filled with an insulating layer. The at least one conductive component is attached to the conductive housing and is across the at least one slot, so as to electrically connect the plurality of regions together.

[0006] In accordance with an embodiment of the present disclosure, a mobile terminal includes a housing component. The housing component includes: a conductive housing and at least one conductive component. The conductive housing is provided with at least one slot arranged at intervals in a vertical direction thereof. The at least one slot is configured to extend in a horizontal direction and divide the conductive housing into a plurality of regions, and the at least one slot is filled with an insulating layer. The at least one conductive component intersects with the at least one slot vertically, so as to electrically connect the plurality of regions together.

[0007] In accordance with an embodiment of the present disclosure, a manufacturing method of a housing component of a mobile terminal includes: providing a substrate; forming at least one slot on the substrate at intervals in a vertical direction of the substrate, wherein each of the at least one slot is parallel to each other to define a plurality of regions; filling an insulating material into each of the at least one slot; cutting off an excess portion of the substrate to form a conductive housing having the plurality of regions; and electrically connecting at least one conductive component with the plurality of regions.

DESCRIPTION OF THE DRAWINGS

[0008] FIG. 1 is a schematic rear view of the structure of a housing component of a mobile terminal in accordance with an embodiment of the present disclosure.

[0009] FIG. 2 is a schematic partial enlarged diagram of a portion A in FIG. 1.

[0010] FIG. 3 is a schematic side view of the structure of a housing component of a mobile terminal in accordance with an embodiment of the present disclosure.

[0011] FIG. 4 is a schematic structural diagram of a mobile terminal in accordance with an embodiment of the present disclosure.

[0012] FIG. 5 is a flowchart of a manufacturing method of a housing component of a mobile terminal in accordance with an embodiment of the present disclosure.

DETAILED DESCRIPTION OF THE EMBODIMENTS

[0013] Embodiments of the present disclosure are described in detail below and examples of the embodiments are illustrated in the accompanying drawings. The description of the embodiments with reference to the accompanying drawings below is exemplary, aims at illustrating the present disclosure, and cannot be considered as limitations to the present disclosure.

[0014] In the description of the present disclosure, it is to be appreciated that orientation or location relationships indicated by terms such as “length”, “width”, “thickness”, “upper”, “lower”, “front”, “back”, “left”, “right”, “up”, “down”, “vertical” and “horizontal” are based on orientation or location relationships illustrated in the accompanying drawings. The terms are only used to facilitate the description of the present disclosure and to simplify the description, not used to indicate or imply the relevant device or element must have a particular orientation or must be structured and operate under the particular orientation and therefore cannot be considered as limitations to the present disclosure.

[0015] In addition, the terms “first” and “second” are only used for description purpose, and cannot be considered as indicating or implying relative importance or implicitly pointing out the number of relevant technical features. Thus, features being correspondingly defined as “first” and “second” may each expressly or implicitly include at least one of the features. In the description of

the present disclosure, the meaning of “a plurality of” is at least two, such as two and three, unless otherwise definitely and specifically defined.

[0016] In the present disclosure, unless otherwise definitely specified and defined, the terms “install”, “connected”, “connection”, “fixed” and so on should be considered broadly, for example, as a fixed connection, a detachable connection, an integral connection, a mechanical connection, an electrical connection, or a connection for communicating with each other; as being directly connected, or being indirectly connected through an intervening medium; as an internal connection between two elements, or as an operational relationship between two elements. To those of ordinary skill in the art, the specific meanings of the aforementioned terms in the present disclosure may be appreciated based on corresponding specific situations.

[0017] With reference to FIG. 1 to FIG. 3, a housing component 100 of a mobile terminal 200 (FIG. 4), in accordance with an embodiment of the present disclosure, is described in detail below. It is to be noted that the mobile terminal 200 may be a cell phone, a tablet computer, a laptop computer, and the like. The housing component 100 can also be applied to other terminals according to actual needs. The housing component 100 may be applied to the mobile terminal 200 to protect internal components of the mobile terminal 200.

[0018] As illustrated in FIGS. 1 to 3, the housing component 100 of the mobile terminal 200, in accordance with an embodiment of the present disclosure, includes a conductive housing 110 and at least one conductive component 120. The conductive housing 110 has at least one slot 111 provided thereon. In FIG.2, three slots 111 are illustrated. However, the present disclosure is not limited thereto. The number of the at least one slot 111 can be adjusted according to actual needs. For example, one slot, or two slots can be provided in different scenes. In accordance with an embodiment of the present disclosure, the at least one slot 111 can divide the conductive housing 110 into a plurality of regions 112. As illustrated in FIG.2, four regions 112 can be formed when the three slots 111 are provided. Further, the number of the at least one slot 111 is greater than or equal to two, and the slots 111 are parallel to each other to define the plurality of regions 112. In accordance with an

embodiment of the present disclosure, the at least one slot 111 can be filled with an insulating layer 113. In accordance with an embodiment of the present disclosure, the at least one conductive component 120 is attached to the conductive housing 110 and across the at least one slot 111, so as to electrically connect the plurality of regions 112 together. In accordance with another embodiment of the present disclosure, the at least one conductive component 120 intersects with the at least one slot 111, so as to electrically connect the plurality of regions 112 together. With regard to the number of the at least one conductive component 120, the present disclosure is not particularly limited. For example, as illustrated in FIG. 1, two conductive components 120 are provided.

[0019] In accordance with an embodiment of the present disclosure, the at least one slot 111 of the conductive housing 110 may extend along a horizontal direction of the conductive housing 110 which is a left-right direction as illustrated in FIG. 1. The at least one slot 111 can divide the conductive housing 110 into the plurality of regions 112. The plurality of regions 112 are distributed at intervals along a vertical direction of the conductive housing 110 which is an up-down direction as illustrated in FIG. 1. In accordance with an embodiment of the present disclosure, the at least one conductive component 120 may extend along the vertical direction of the conductive housing 110 across the at least one slot 111, so as to electrically connect the plurality of regions 112 together. In accordance with another embodiment of the present disclosure, the at least one conductive component 120 may extend along the vertical direction of the conductive housing 110 and intersect with the at least one slot 111 vertically, so as to electrically connect the plurality of regions 112 together. In both embodiments, the at least one conductive component 120 is perpendicular to the at least one slot 111.

[0020] It is to be noted that when the mobile terminal 200 has a communication function or a signal transmitting function, the conductive housing 110 may be used as a part of an antenna of the mobile terminal 200. The insulating layer 113 between adjacent two regions of the plurality of regions 112 may be used as a medium for transmitting signals, thereby strengthening signal strength and stability of the mobile terminal 200. In the

related art, in order for a plurality of regions to be electrically connected together, for example, computer numerical control (CNC) machining is adopted. During the machining, some material is reserved to realize electrical connection between the plurality of regions. Such machining method has a long process cycle and is complicated in procedures, and deformation may occur to slots during plastic injection molding because of the reservation of the material during the machining process.

[0021] The housing component 100 of the mobile terminal 200 in accordance with the embodiment of the present disclosure can realize grounding and conduction of an antenna by electrically connecting the plurality of regions 112 of the conductive housing 110 through the at least one conductive component 120. Meanwhile, the CNC machining cycle may be also shortened and deformation of plastic injection molding resulting from material reservation may be reduced.

[0022] In accordance with an embodiment of the present disclosure, each of the at least one conductive component 120 is welded to each of the plurality of regions 112. The welding procedure is simple and easy to operate, thereby further shortening the process cycle of the conductive housing 110. However, the present disclosure is not limited thereto. For example, each of the at least one conductive component 120 may be attached to each of the plurality of regions 112 through a conductive adhesive. When the at least one conductive component 120 is made of aluminum alloy, the conductive adhesive may contain distributed particles that include a composition selected from the group consisting of aluminum-silicon compositions.

[0023] As illustrated in FIG. 1, in accordance with an embodiment of the present disclosure, the number of the at least one conductive component 120 is greater than or equal to two, and the conductive components 120 are distributed at intervals along a length direction of the at least one slot 111. Thus, connection stability between the plurality of regions 112 may be strengthened. For example, as illustrated in FIG. 1, each of the conductive components 120 may have an elongated-slot shape and extends along the vertical direction of the conductive housing 110. The at least one slot 111 can extend along the

horizontal direction of the conductive housing 110. The conductive components 120 are distributed at intervals along the horizontal direction of the conductive housing 110. Further, the number of the at least one conductive component 120 and intervals at which the at least one conductive component 120 is distributed can be determined based on one or more desired operating frequencies of the mobile terminal 200. For example, as illustrated in FIG. 1, there are two conductive components 120 distributed at intervals along the length direction of the at least one slot 111. A first interval between a left vertical edge of the at least one slot 111 and a left conductive component 120, a second interval between the left conductive component 120 and a right conductive component 120, and a third interval between the right conductive component 120 and a right vertical edge of the at least one slot 111 can be determined based on the desired operating frequencies of the antennas corresponding to the first, second and third intervals. When there is only one desired operating frequency of the antennas, the first, second and third intervals can be the same and when there are multiple desired operating frequencies of the antennas, some or all of the first, second and third intervals can be different.

[0024] In accordance with an embodiment of the present disclosure, as illustrated in FIG. 2, a width of each of the at least one slot 111 is $W1$. That is, a width of each of the at least one slot 111 along the vertical direction of the conductive housing 110 is $W1$. $W1$ may satisfy $0.3\text{mm} \leq W1 \leq 0.5\text{mm}$. After being experimentally verified, when the width of each of the at least one slot 111 is $0.3\text{mm} \leq W1 \leq 0.5\text{mm}$, signal strength and stability of the mobile terminal 200 can be strengthened. In accordance with an embodiment of the present disclosure, as illustrated in FIG. 1 to FIG. 3, the number of the at least one slot 111 is greater than or equal to two, and the slots 111 are spaced apart from each other. As illustrated in FIG. 2, the spacing between adjacent two slots 111 is $W2$. That is, the distance between adjacent two slots 111 along the vertical direction of the conductive housing 110 is $W2$. $W2$ may satisfy $0.3\text{mm} \leq W2 \leq 1\text{mm}$. In accordance with another embodiment of the present disclosure, the number of the at least one slot 111 is greater than or equal to two, and the slots 111 are arranged at intervals in the vertical direction of the

conductive housing 110. The interval between any adjacent two slots 111 is $W2$. $W2$ may satisfy $0.3\text{mm} \leq W2 \leq 1\text{mm}$. In accordance with an embodiment of the present disclosure, the number of the at least one slot 111 is N , where N may satisfy $1 \leq N \leq 3$.

[0025] In accordance with an embodiment of the present disclosure, the at least one conductive component 120 may have a material of aluminum alloy. The insulating layer 113 may have a material selected from a group consisting of rubber, plastic, resin, glass, ceramic, paint, and mica. Further, to facilitate the welding of the at least one conductive component 120 to the conductive housing 110, the material of the conductive housing 110 may be the same as that of the at least one conductive component 120. For example, the at least one conductive component 120 may be made of aluminum alloy and the conductive housing 110 may be made of aluminum alloy.

[0026] As illustrated in FIG. 4, a mobile terminal 200, in accordance with an embodiment of the present disclosure, includes any of the aforementioned housing components 100 of the mobile terminal 200.

[0027] The mobile terminal 200 in accordance with the embodiment of the present disclosure can realize grounding and conduction of an antenna by electrically connecting the plurality of regions 112 of the conductive housing 110 with aid of the at least one conductive component 120. Meanwhile, the CNC machining cycle may be also shortened and deformation of plastic injection molding resulting from material reservation may be reduced.

[0028] As illustrated in FIG. 5, a manufacturing method of a housing component 100 of a mobile terminal 200, in accordance with an embodiment of the present disclosure, is provided. The housing component 100 can be any of the aforementioned housing components 100 of the mobile terminal 200. The manufacturing method can include the following operations.

At block 10, a substrate is provided.

At block 20, at least one slot 111 on the substrate is machined. The at least one slot 111 is arranged at intervals in a vertical direction of the substrate. The vertical direction of the substrate is the same as the aforementioned

vertical direction of the conductive housing 110. The at least one slot 111 is formed by machining in a cutting manner on the substrate.

At block 30, an insulating material is filled into each of the at least one slot 111 to form an insulating layer 113. Each of the at least one slot 111 may be completely filled by the insulating material. The insulating material may be selected from a group consisting of rubber, plastic, resin, glass, ceramic, paint, and mica.

At block 40, an excess portion of the substrate is cut off to form a conductive housing 110 having a plurality of regions 112 separated by the at least one slot 111.

At block 50, at least one conductive component 120 is electrically connected with the plurality of regions 112.

[0029] The manufacturing method of the housing component 100 of the mobile terminal 200 in accordance with the embodiment of the present disclosure can realize grounding and conduction of an antenna by electrically connecting the plurality of regions 112 of the conductive housing 110 through the at least one conductive component 120. Meanwhile, the CNC machining cycle may be also shortened and deformation of plastic injection molding resulting from material reservation may be reduced.

[0030] In the description of the present disclosure, terms such as “an embodiment”, “some embodiments”, “an example”, “a specific example”, and “some examples” referred to in the description mean at least one embodiment or example of the present disclosure includes a specific feature, structure, material or characteristic described in combination with an embodiment or example. In the present disclosure, an illustrative expression of the aforementioned terms does not need to be focused on the same embodiment or example. Further, the specific feature, structure, material or characteristic described may be adequately combined in any of or a plurality of embodiments and examples. In addition, in a situation where conflicts between each other do not exist, persons skilled in the art may combine and group different

embodiments and examples with features of different embodiments and examples described in the present disclosure.

[0031] Although the embodiments of the present disclosure have been illustrated and described above, it is to be appreciated that the foregoing embodiments are illustrative and cannot be considered as limitations to the present disclosure. Persons skilled in the art may change, modify, replace and vary the foregoing embodiments within the scope of the present disclosure.

Claims

What is claimed is:

1. A housing component (100) of a mobile terminal (200), comprising:
a conductive housing (110) provided with at least one slot (111), the at least one slot (111) being configured to divide the conductive housing (110) into a plurality of regions (112) and filled with an insulating layer (113); and
at least one conductive component (120) attached to the conductive housing (110) and across the at least one slot (111), so as to electrically connect the plurality of regions (112) together.
2. The housing component (100) of the mobile terminal (200) of Claim 1, characterized in that each of the at least one conductive component (120) is welded to each of the plurality of regions (112).
3. The housing component (100) of the mobile terminal (200) of any one of Claims 1-2, characterized in that the at least one conductive component (120) is arranged at intervals along a length direction of the at least one slot (111).
4. The housing component (100) of the mobile terminal (200) of any one of Claims 1-3, characterized in that the at least one conductive component (120) has a material of aluminum alloy, and the insulating layer (113) has a material selected from a group consisting of rubber, plastic, resin, glass, ceramic, paint, and mica.
5. The housing component (100) of the mobile terminal (200) of any one of Claims 1-4, characterized in that a width of each of the at least one slot (111) is $W1$ and $0.3\text{mm} \leq W1 \leq 0.5\text{mm}$.
6. The housing component (100) of the mobile terminal (200) of any one of Claims 1-5, characterized in that the number of the at least one slot (111) is N and $1 \leq N \leq 3$.
7. The housing component (100) of the mobile terminal (200) of any one of Claims 1-6, characterized in that the number of the at least one slot (111) is greater than or equal to two, the slots (111) are spaced apart from each other, and the spacing between adjacent two slots (111) is $W2$ and $0.3\text{mm} \leq W2 \leq 1\text{mm}$.

8. A mobile terminal (200) comprising a housing component (100), characterized in that the housing component comprises:
a conductive housing (110) provided with at least one slot (111) arranged at intervals in a vertical direction thereof, wherein the at least one slot (111) is configured to extend in a horizontal direction and divide the conductive housing (110) into a plurality of regions (112), and the at least one slot (111) is filled with an insulating layer (113); and
at least one conductive component (120), intersecting with the at least one slot (111) vertically, so as to electrically connect the plurality of regions (112) together.
9. The mobile terminal (200) of Claim 8, characterized in that each of the at least one conductive component (120) is welded to each of the plurality of regions (112).
10. The mobile terminal (200) of any one of Claims 8-9, characterized in that the at least one conductive component (120) is arranged at intervals along a length direction of the at least one slot (111).
11. The mobile terminal (200) of any one of Claims 8-10, characterized in that the at least one conductive component (120) has a material of aluminum alloy, and the insulating layer (113) has a material selected from a group consisting of rubber, plastic, resin, glass, ceramic, paint, and mica.
12. The mobile terminal (200) of any one of Claims 8-11, characterized in that a width of each of the at least one slot (111) is $W1$ and $0.3\text{mm} \leq W1 \leq 0.5\text{mm}$.
13. The mobile terminal (200) of any one of Claims 8-12, characterized in that the number of the at least one slot (111) is N and $1 \leq N \leq 3$.
14. The mobile terminal (200) of any one of Claims 8-13, characterized in that the interval between adjacent two slots (111) is $W2$ and $0.3\text{mm} \leq W2 \leq 1\text{mm}$.
15. A manufacturing method of a housing component (100) of a mobile terminal (200), comprising:
providing a substrate;
forming at least one slot (111) on the substrate at intervals in a vertical direction of the substrate, wherein each of the at least one slot (111) is parallel to each other to define a plurality of regions (112);
filling an insulating material (113) into each of the at least one slot (111);

cutting off an excess portion of the substrate to form a conductive housing (110) having the plurality of regions (112); and electrically connecting at least one conductive component (120) with the plurality of regions (112).

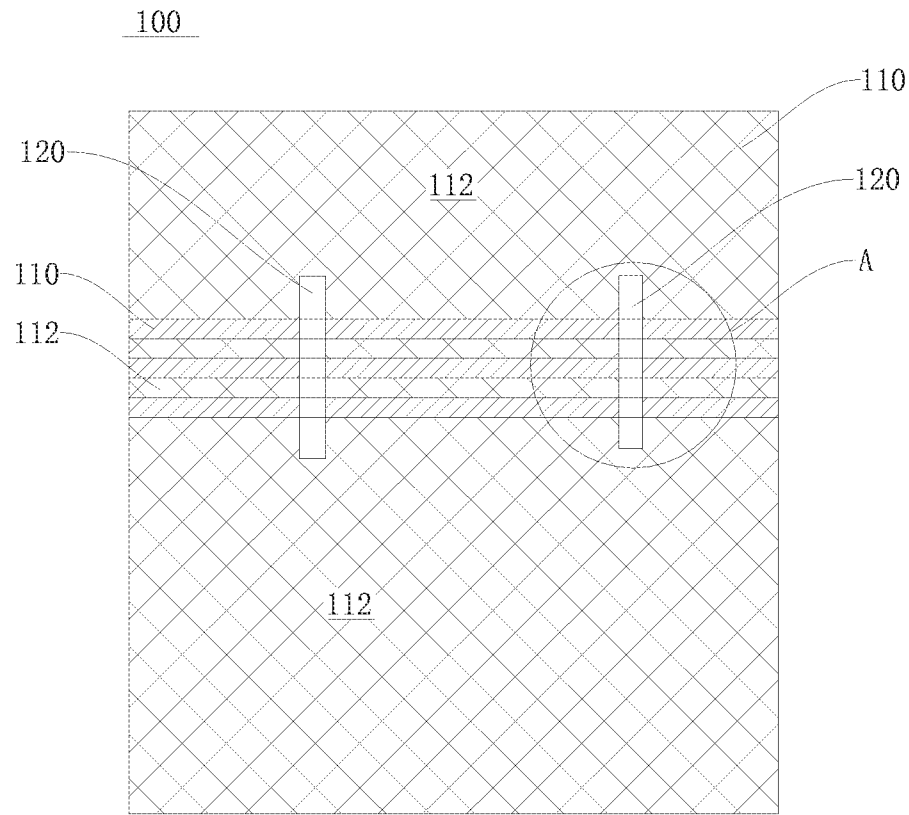


FIG. 1

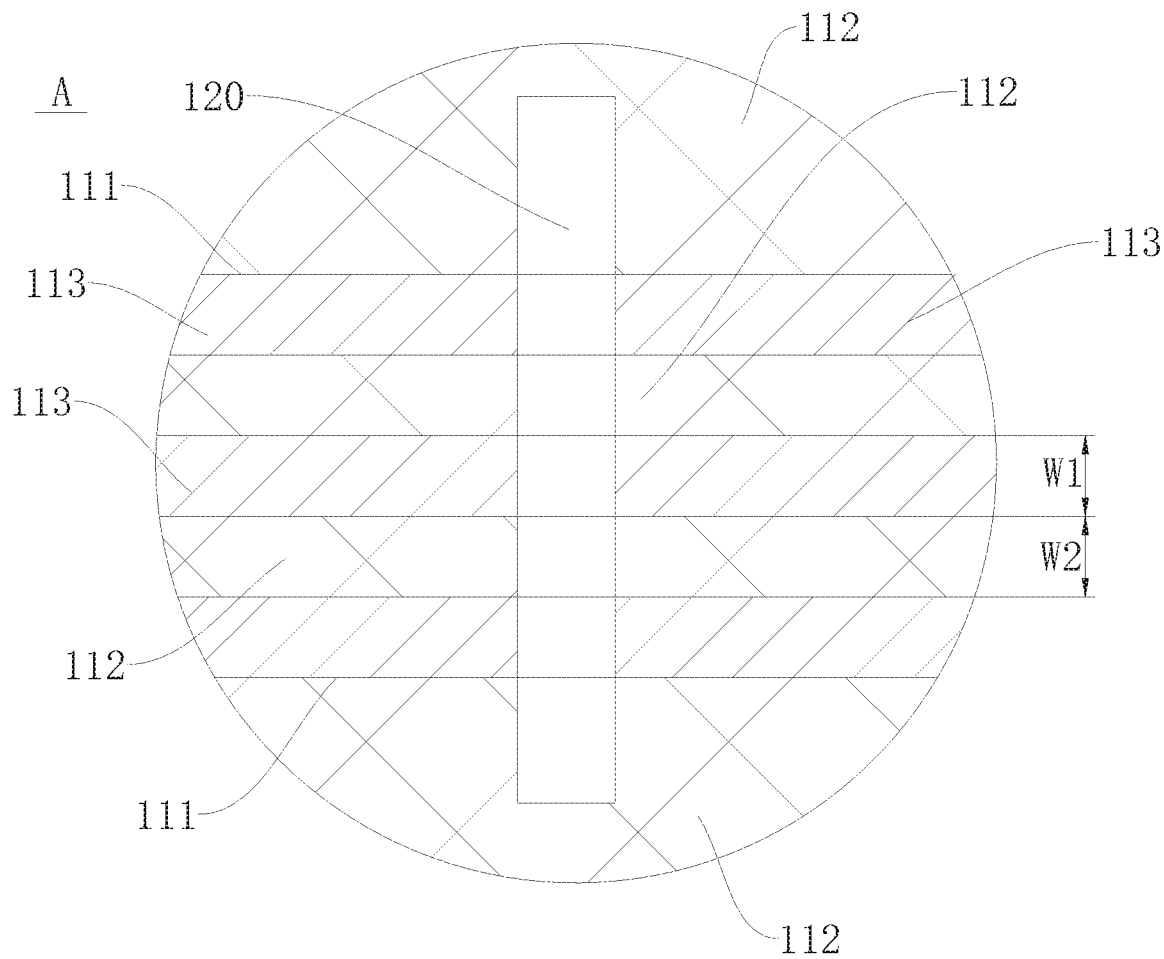


FIG. 2

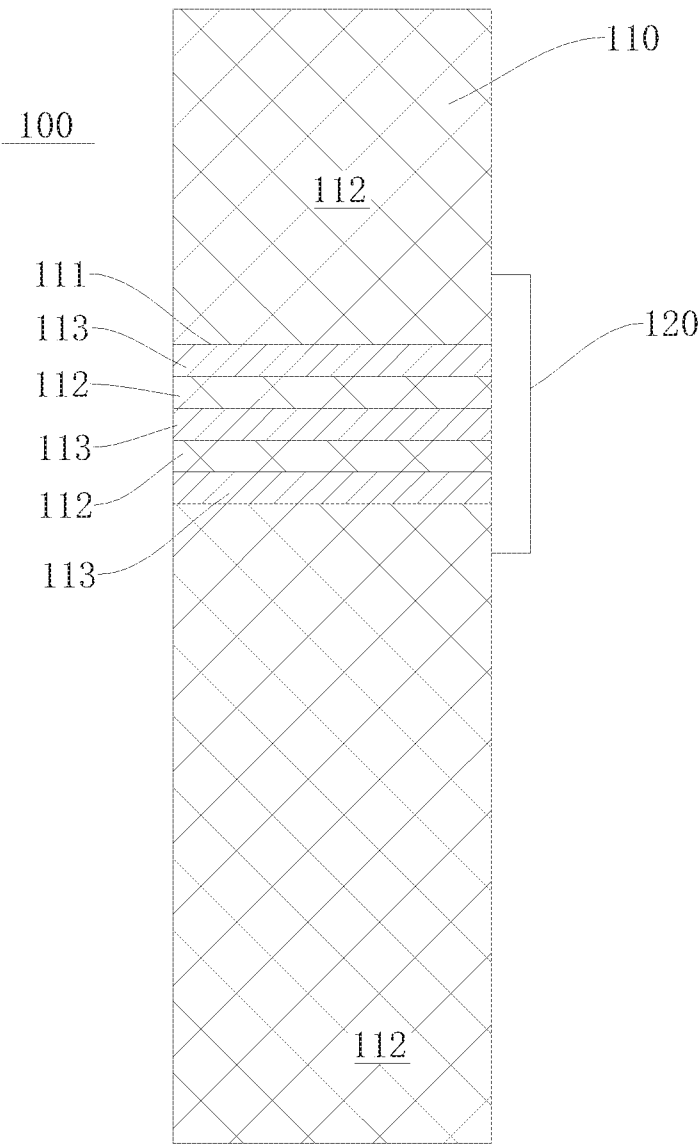


FIG. 3

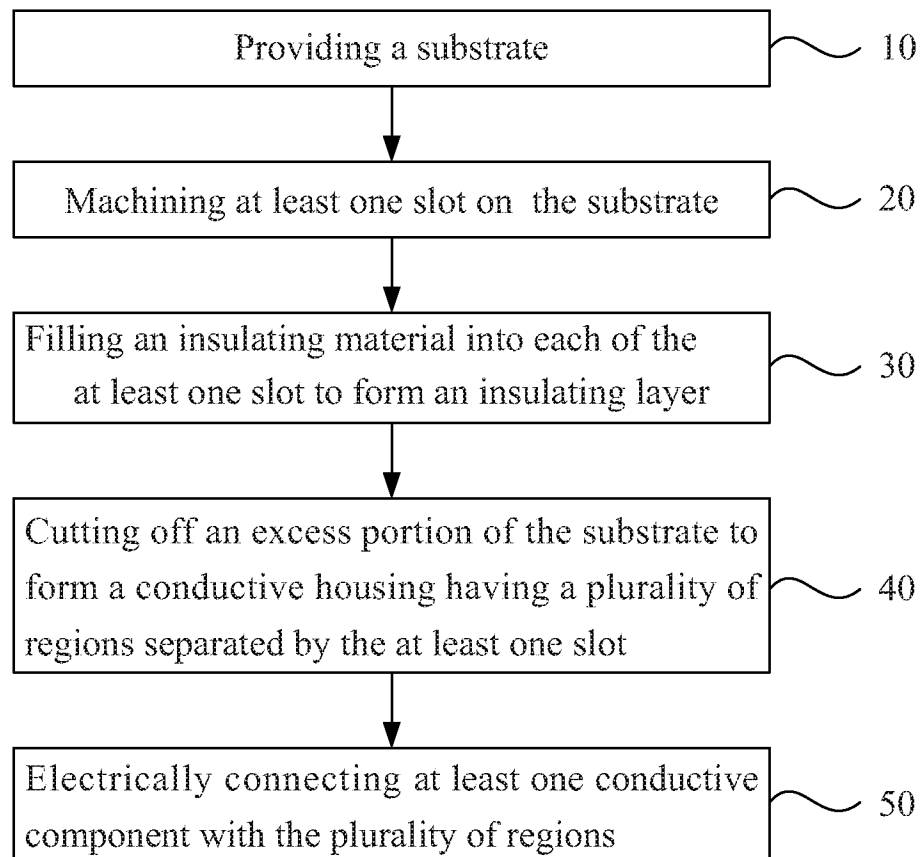
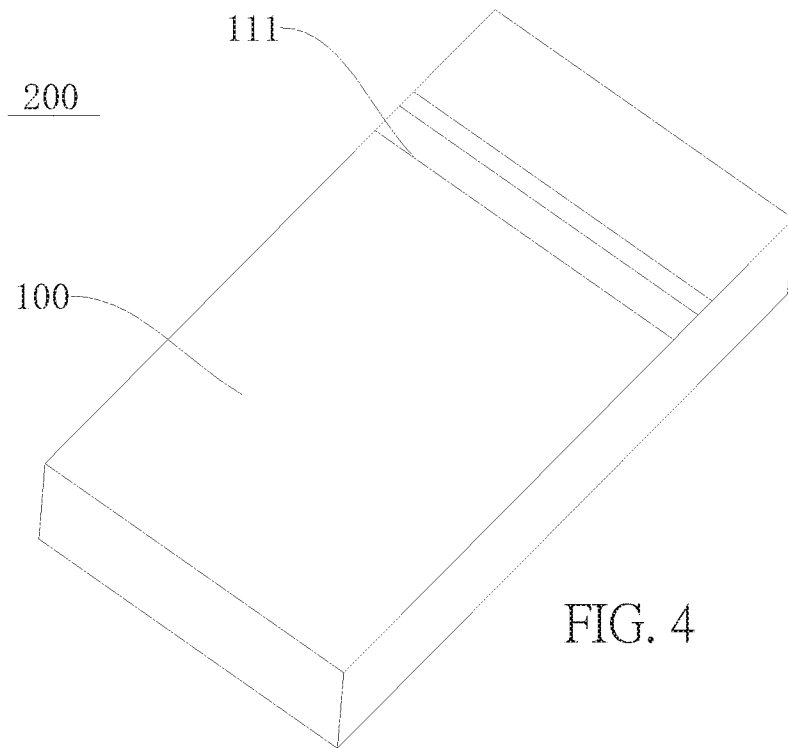


FIG. 5

INTERNATIONAL SEARCH REPORT

International application No.

PCT/CN2017/099181

A. CLASSIFICATION OF SUBJECT MATTER		
H04M 1/02(2006.01)i; H05K 5/04(2006.01)i; H01Q 1/44(2006.01)i; H05K 5/02(2006.01)n		
According to International Patent Classification (IPC) or to both national classification and IPC		
B. FIELDS SEARCHED		
Minimum documentation searched (classification system followed by classification symbols) H04M; H05K; H01Q		
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched		
Electronic data base consulted during the international search (name of data base and, where practicable, search terms used) CNKI, CNABS, CNTXT, VEN: housing, shell, casing, cover, lid, coating, top, shield, canopy, conductive, metal, slot, aperture		
C. DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
PX	CN 205992935 U (GUANGDONG OPPO MOBILE COMMUNICATION CORP., LTD.) 01 March 2017 (2017-03-01) claims 1-10	1-15
PX	CN 106210200 A (GUANGDONG OPPO MOBILE COMMUNICATION CORP., LTD.) 07 December 2016 (2016-12-07) claims 1-10	1-15
PX	CN 106332479 A (GUANGDONG OPPO MOBILE COMMUNICATION CORP., LTD.) 11 January 2017 (2017-01-11) description, paragraphs [0041]-[0061] and figures 1-7	1-6, 8-13, 15
PX	CN 205985326 U (GUANGDONG OPPO MOBILE COMMUNICATION CORP., LTD.) 22 February 2017 (2017-02-22) description, paragraphs [0026]-[0036] and figures 1-4	1-6, 8-13, 15
PX	CN 206364852 U (SAMSUNG GUANGZHOU MOBILE R & D CENT.ET AL.) 28 July 2017 (2017-07-28) description, paragraphs [0023]-[0036] and figures 2-4	1-6, 8-13, 15
PX	CN 106602222 A (QIKU INTERNET TECHNOLOGY SHENZHEN CO., LTD.) 26 April 2017 (2017-04-26) description, paragraphs [0030] and [0031] and figure 3	1-6, 8-13, 15
☒ Further documents are listed in the continuation of Box C. ☒ See patent family annex.		
* Special categories of cited documents: "A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier application or patent but published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art "&" document member of the same patent family		
Date of the actual completion of the international search 28 September 2017		Date of mailing of the international search report 26 October 2017
Name and mailing address of the ISA/CN STATE INTELLECTUAL PROPERTY OFFICE OF THE P.R.CHINA 6, Xitucheng Rd., Jimen Bridge, Haidian District, Beijing 100088 China		Authorized officer LIU,Jing
Facsimile No. (86-10)62019451		Telephone No. (86-10)62089458

INTERNATIONAL SEARCH REPORT

International application No.

PCT/CN2017/099181**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
PX	CN 205583131 U (GUANGDONG OPPO MOBILE COMMUNICATION CORP., LTD.) 14 September 2016 (2016-09-14) description, paragraphs [0025]-[0035] and figures 1-4	1-6, 8-13, 15
X	CN 104823532 A (HUAWEI DEVICE CO., LTD.) 05 August 2015 (2015-08-05) description, paragraphs [0035]-[0045] and figures 1-5	1, 2, 4-6, 8, 9, 11-13, 15
A	WO 2013165441 A1 (APPLE INC., ET AL.) 07 November 2013 (2013-11-07) 全文	1-15

INTERNATIONAL SEARCH REPORT
Information on patent family members

International application No.

PCT/CN2017/099181

Patent document cited in search report			Publication date (day/month/year)	Patent family member(s)			Publication date (day/month/year)
CN	205992935	U	01 March 2017	None			
CN	106210200	A	07 December 2016	None			
CN	106332479	A	11 January 2017	IN	201714029864	A	08 September 2017
CN	205985326	U	22 February 2017	CN	205583131	U	14 September 2016
CN	206364852	U	28 July 2017	None			
CN	106602222	A	26 April 2017	None			
CN	205583131	U	14 September 2016	CN	205985326	U	22 February 2017
CN	104823532	A	05 August 2015	EP	2943049	A4	16 March 2016
				EP	2943049	A1	11 November 2015
				JP	2016516308	A	02 June 2016
				US	2015313045	A1	29 October 2015
				WO	2015135186	A1	17 September 2015
WO	2013165441	A1	07 November 2013	US	2015124401	A1	07 May 2015