(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau

(43) International Publication Date
12 October 2006 (12.10.2006)

PCT

(10) International Publication Number
WO 2006/105594 A1

(51) International Patent Classification:
C22C 23/06 (2006.01)

(21) International Application Number:
PCT/AU2006/000447

(22) International Filing Date: 4 April 2006 (04.04.2006)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
2005901623 4 April 2005 (04.04.2005) AU

(71) Applicant *(for all designated States except US)*: **CAST CENTRE PTY LTD** [AU/AU]; Building 43, Cooper Road, St Lucia, Queensland 4067 (AU).

(72) Inventors; and

(75) Inventors/Applicants *(for US only)*: **BETTLES, Colleen, Joyce** [AU/AU]; 1/5 Salisbury Court, Glen Waverley, Victoria 3150 (AU). **GIBSON, Mark, Antony** [AU/AU]; 1/5 Salisbury Court, Glen Waverley, Victoria 3150 (AU).

(74) Agent: **GRIFFITH HACK**; 167 Eagle Street, Brisbane, Queensland 4000 (AU).

(81) Designated States *(unless otherwise indicated, for every kind of national protection available)*: AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, LY, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States *(unless otherwise indicated, for every kind of regional protection available)*: ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:
— *with international search report*

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: MAGNESIUM ALLOY

(57) Abstract: A magnesium-based alloy consists of 1.5-4.0% by weight rare earth element(s), 0.3-0.8% by weight zinc, 0.02-0.1% by weight aluminium, and 4-25 ppm beryllium. The alloy optionally contains up to 0.2% by weight zirconium, 0.3% by weight manganese, 0.5% by weight yttrium and 0.1% by weight calcium. The remainder of the alloy is magnesium except for incidental impurities.

WO 2006/105594 A1

MAGNESIUM ALLOY

FIELD OF THE INVENTION

The present invention relates to magnesium alloys and, more particularly, to magnesium alloys which can be cast by high pressure die casting (HPDC).

BACKGROUND TO THE INVENTION

With the increasing need to limit fuel consumption and reduce harmful emissions into the atmosphere, automobile manufacturers are seeking to develop more fuel efficient vehicles. Reducing the overall weight of vehicles is a key to achieving this goal. Major contributors to the weight of any vehicle are the engine and other components of the powertrain. The most significant component of the engine is the cylinder block, which makes up 20 - 25% of the total engine weight. In the past significant weight savings were made by introducing aluminium alloy cylinder blocks to replace traditional grey iron blocks, and further weight reductions of the order of 40% could be achieved if a magnesium alloy that could withstand the temperatures and stresses generated during engine operation was used. Development of such an alloy, which combines the desired elevated temperature mechanical properties with a cost effective production process, is necessary before viable magnesium engine block manufacturing can be considered.

HPDC is a highly productive process for mass production of light alloy components. While the casting integrity of sand casting and low pressure/gravity permanent mould castings is generally higher than HPDC, HPDC is a less expensive technology for higher volume mass production. HPDC is gaining popularity among automobile manufacturers in North America and is the predominant process used for casting aluminium alloy engine blocks in Europe and Asia. In recent years, the search for an elevated temperature magnesium alloy has focused primarily

on the HPDC processing route and several alloys have been developed. HPDC is considered to be a good option for achieving high productivity rates and thus reducing the cost of manufacture.

SUMMARY OF THE INVENTION

In a first aspect the invention provides a magnesium-based alloy consisting of, by weight:

1.5-4.0% rare earth element(s),
0.3- 0.8% zinc,
0.02-0.1% aluminium,
4- 25 ppm beryllium,
0-0.2% zirconium,
0-0.3% manganese,
0-0.5% yttrium,
0-0.1% calcium, and
the remainder being magnesium except for incidental impurities.

Throughout this specification the expression "rare earth" is to be understood to mean any element or combination of elements with atomic numbers 57 to 71, ie. lanthanum (La) to lutetium (Lu).

Preferably, alloys according to the present invention contain at least 95.5% magnesium, more preferably 95.5-97% magnesium, and most preferably about 96.1% magnesium.

The neodymium content is preferably 1.0-2.5% by weight. In one embodiment, the neodymium content is 1.4-2.1% by weight. In another embodiment, the neodymium content is greater than 1.7%, more preferably greater than 1.8%, more preferably 1.8-2.0% and most preferably about 1.9%. In another embodiment, the neodymium content is 1.7-1.9% by weight. The neodymium content may be derived from pure neodymium, neodymium contained within a mixture of rare earths such as a misch metal, or a combination thereof.

Preferably, the content of rare earth(s) other

than neodymium is 0.5-1.5%, more preferably 0.8-1.2%, more preferably 0.9-1.2%, such as about 1.1%. Preferably, the rare earth(s) other than neodymium are cerium (Ce), lanthanum (La), or a mixture thereof. Preferably, cerium comprises over half the weight of the rare earth elements other than neodymium, more preferably 60-80%, especially about 70% with lanthanum comprising substantially the balance. The rare earth(s) other than neodymium may be derived from pure rare earths, a mixture of rare earths such as a misch metal or a combination thereof. Preferably, the rare earths other than neodymium are derived from a cerium misch metal containing cerium, lanthanum, optionally neodymium, a modest amount of praseodymium (Pr) and trace amounts of other rare earths.

In a preferred embodiment, the neodymium, cerium and lanthanum contents are 1.7- 2.1%, more preferably 1.7-1.9% by weight; 0.5-0.7%, more preferably 0.55-0.65% by weight; and 0.3-0.5% by weight respectively.

The zinc content is 0.3- 0.8% by weight, preferably 0.4-0.7%, more preferably 0.5-0.6%.

The aluminium content is 0.02-0.1% by weight, preferably 0.03-0.09% by weight, more preferably 0.04-0.08% by weight, such as 0.05-0.07% by weight. Without wishing to be bound by theory, the inclusion of these small amounts of aluminium in the alloys of the present invention is believed to improve the creep properties of the alloys.

The beryllium content is 4- 25 ppm, more preferably 4-20 ppm, more preferably 4-15 ppm, more preferably 6-13 ppm, such as 8-12 ppm. Beryllium would typically be introduced by way of an aluminium-beryllium master alloy, such as an Al-5% Be alloy. Without wishing to be bound by theory, the inclusion of beryllium is believed to improve the die castability of the alloy. Again, without wishing to be bound by theory, the inclusion of beryllium is also believed to improve the retention of the rare earth element(s) in the alloys

against oxidation losses.

Reduction in iron content can be achieved by addition of zirconium which precipitates iron from the molten alloy. Accordingly, the zirconium contents specified herein are residual zirconium contents. However, it is to be noted that zirconium may be incorporated at two different stages. Firstly, on manufacture of the alloy and secondly, following melting of the alloy just prior to casting. Preferably, the zirconium content will be the minimum amount required to achieve satisfactory iron removal. Typically, the zirconium content will be less than 0.1%.

Manganese is an optional component of the alloy. When present, the manganese content will typically be about 0.1%.

Calcium (Ca) is an optional component which may be included, especially in circumstances where adequate melt protection through cover gas atmosphere control is not possible. This is particularly the case when the casting process does not involve a closed system.

Yttrium is an optional component which may be included. Without wishing to be bound by theory, the inclusion of yttrium is believed to beneficial to melt protection, ductility and creep resistance. When present, the yttrium content is preferably 0.1-0.4% by weight, more preferably 0.1-0.3% by weight.

Ideally, the incidental impurity content is zero but it is to be appreciated that this is essentially impossible. Accordingly, it is preferred that the incidental impurity content is less than 0.15%, more preferably less than 0.1%, more preferably less than 0.01%, and still more preferably less than 0.001%.

In a second aspect, the present invention provides a magnesium-based alloy consisting of 1.7- 2.1% by weight neodymium, 0.5-0.7% by weight cerium, 0.3-0.5% by weight lanthanum, 0.03-0.09% by weight aluminium, 4-15 ppm beryllium; the remainder being magnesium except for

incidental impurities and, optionally, trace amounts of rare earth elements other than neodymium, cerium and lanthanum.

In a third aspect, the present invention provides an engine block for an internal combustion engine produced by high pressure die casting an alloy according to the first or second aspects of the present invention.

In a fourth aspect, the present invention provides a component of an internal combustion engine formed from an alloy according to the first or second aspects of the present invention. The component of an internal combustion engine may be the engine block or a portion thereof such as a shroud.

Specific reference is made above to engine blocks but it is to be noted that alloys of the present invention may find use in other elevated temperature applications such as may be found in automotive powertrains as well as in low temperature applications. Specific reference is also made above to HPDC but it is to be noted that alloys of the present invention may be cast by techniques other than HPDC including thixomoulding, thixocasting, permanent moulding and sand casting.

EXAMPLES

Example 1

Three alloys were prepared and chemical analyses of the alloys are set out in Table 1 below. The rare earths other than neodymium were added as a Ce-based misch metal which contained cerium, lanthanum and some neodymium. The extra neodymium and the zinc were added in their elemental forms. The zirconium was added through a proprietary Mg-Zr master alloy known as AM-cast. Aluminium and beryllium were added through an aluminium-beryllium master alloy which contained 5% by weight of beryllium. Standard melt handling procedures were used throughout preparation of the alloys.

Table 1 - Alloys Prepared

Element	Alloy A	Alloy B	Alloy C
Nd (wt%)	1.61	1.86	1.85
Ce (wt%)	0.51	0.71	0.71
La (wt%)	0.49	0.48	0.49
Zn (wt%)	0.48	0.68	0.71
Zr (wt%)	0.1	0.06	0.06
Ca (wt%)	-	<0.01	0.1
Be (ppm)	-	6	9
Al (wt%)	-	0.04	0.04
Mg (wt%)	Balance except for incidental impurities	Balance except for incidental impurities	Balance except for incidental impurities

Alloys A, B and C were high pressure die cast and creep tests were carried out at a constant load of 90MPa and at a temperature of 177°C. An additional creep test at 100MPa and 177°C was carried out for Alloy B. The steady state creep rates are listed in Table 2.

Table 2 - Steady State Creep Rates

	Steady State Creep Rates (s^{-1})	
	90MPa 177°C	100MPa 177°C
Alloy A	2×10^{-9}	-
Alloy B	1×10^{-10}	1×10^{-10}
Alloy C	1×10^{-9}	-

Figure 1 shows the creep results for 177°C and 90MPa for Alloys A, B and C. The creep curve for Alloy B at 177°C and 100MPa is also shown. Both Alloy B and Alloy C are superior to Alloy A. The insert graph in Figure 1 shows the initial primary behaviour of Alloy B at 177°C and stresses of 90MPa and 100MPa. There is a higher initial response observed at 100MPa but the creep curve levels out to show a very similar steady state creep rate to that at the lower stress.

The stress to give a value of 0.1% creep strain after 100 hours is often quoted when comparing various creep resistant magnesium alloys. Neither Alloy B nor Alloy C had creep strains of this order after 100 hours at

177°C and 90MPa, although creep strains in excess of that were reached at much longer test times. At 177°C Alloy B and Alloy C would be acceptable for most automotive powertrain applications in terms of their creep behaviour.

The tensile properties were measured in accordance with ASTM E8 at 20, 100, 150 and 177°C in air using an Instron Universal Testing Machine. Samples were held at temperature for 10 minutes prior to testing. The test specimens had a circular cross section (5.6mm diameter), with a gauge length of 25mm.

Tensile test results for Alloys A, B and C are set out in Table 3 and Figure 2 illustrates typical Stress-Strain curves for the three alloys at room temperature and 177°C.

Table 3 - Tensile Test Data

Alloy	Alloy A			Alloy B			Alloy C		
Test Temperature, °C	0.2% Proof MPa	UTS MPa	% E	0.2% Proof MPa	UTS MPa	% E	0.2% Proof MPa	UTS MPa	% E
21	133 ± 5	151.4 ± 12.0	2.7 ± 1.0	139.8 ± 3.9	161.3 ± 4.2	1.9 ± 0.4	144.8 ± 4.0	165.1 ± 2.3	2.6 ± 0.4
100	-	-	-	140.7 ± 3.0	156.5 ± 5.9	3.4 ± 0.8	147.3 ± 4.2	155.0 ± 3.0	2.6 ± 0.9
150	-	-	-	134.5 ± 2.2	154.9 ± 9.4	4.6 ± 1.4	136.5 ± 3.5	150.0 ± 5.5	3.6 ± 0.5
177	118 ± 5	136 ± 5.3	5.5 ± 1.2	131.2 ± 4.3	149.0 ± 7.3	4.8 ± 1.0	134.1 ± 1.2	152.7 ± 3.3	4.4 ± 0.8

Alloys B and C and commercial alloy AZ91D were die cast in a triangular shaped die which had oil heating/cooling in both the fixed and moving halves of the mould. A thermocouple was present in the centre of the moving half.

The die was designed to provide both diverging and converging flow paths (see Figure 3). This was achieved by having a fan gate that fed metal along the flat fixed half of the die (diverging), then flowed over the top section and then along the back wall (moving half of the die) back towards the gate (converging). This flow pattern gave an effective flow length of 130mm, ie. twice the height of the casting.

Referring to Figure 4, other features of the die are the large rib, that is formed along one side of the cast part, and the boss. The rib provides a very thick section parallel to the flow direction intended to reveal problems of channelling, where metal flows preferentially along a thick section. The boss is typical of many structural castings and is usually difficult to form. The corners where the boss and the rib meet the casting are sharp so as to maximise any hot or shrinkage cracking that may occur.

Finally the die had three strips of varying surface finish parallel to the flow direction. The surface finishes are full polish, semi-matt and full matt (EDM finish). These strips give an indication of the ease with which an alloy will form these surfaces.
Accordingly, the die was designed to rigorously test the performance of any alloy cast in it by HPDC. A part cast from the die is illustrated in Figure 4.

Particulars of the HPDC conditions for the die are set out below.

Gate Dimensions	=	58mm x 1mm
Plunger Diameter.	=	50 mm
High Speed	=	2.25 m/s
Slow Speed	=	0.35 m/s
Gate Velocity	=	$V_{plunger}$ x $A_{plunger}$/ A_{gate}
	=	76 m/s

AZ91D was cast with a molten metal temperature of 700°C and an estimated die temperature of 200°C; whereas, Alloys B and C were cast with a molten metal temperature of 740°C and an estimated die temperature of 250°C.

Castings made with both AZ91D and Alloys B and C had a high quality surface finish although the AZ91D castings did have some surface cold shuts which may indicate that the oil temperature, and hence die temperature, should have been slightly higher. The molten metal temperature for AZ91D was in the upper region for normal HPDC casting of AZ91D. The surface finishes on both sides of the castings from Alloys B and C were good which demonstrated that both alloys can flow reasonable distances.

All alloys cast with equivalent castability although Alloys B and C did have a more rapid reduction in quality at the limit of their operating windows. For example, if insufficient metal was dosed into the shot sleeve, which led to a reduction in the molten metal temperature entering the cavity, then surface quality diminished rapidly.

For all alloys, the holding time in the die was varied so that some idea of the cracking propensity could be determined. The casting has many thick and thin sections with sharp corners at the changes in section thickness, which should have meant that the resultant castings should exhibit cracks. In the castings of Alloys B and C there were no signs of cracking while in the AZ91D castings there were some signs of hot tearing in one section of the large rib.

The die casting trial demonstrated that Alloys B and C have excellent die castability approximately equivalent to AZ91D although the melt temperature and die temperature required for Alloys B and C were higher than that required for AZ91D.

Example 2

A series of alloys were produced and their compositions are listed in Table 4 below. In each of Alloys D-Y, except for any incidental impurities, the balance of the alloy was magnesium.

Table 4 Chemical compositions of Alloys D-Y

Alloy	Nd (wt.%)	Ce (wt.%)	La (wt.%)	Zn (wt.%)	Be (ppm)	Al (wt.%)	Fe (ppm)	Zr (soluble) (wt.%)	Zr (total) (wt.%)
D	1.55	0.50	0.48	0.50	Not Added	<0.01	20	-	0.10
E	1.85	0.71	0.48	0.68	6	0.04	-	-	0.07
F	1.84	0.69	0.49	0.62	<1	<0.01	-	0.09	0.16
G	1.70	0.66	0.49	0.60	<1	0.03	-	0.015	0.05
H	1.38	0.60	0.47	0.61	<1	0.07	-	0.01	0.03
I	1.13	0.46	0.33	0.47	<1	0.03	-	<0.01	0.015
J	1.15	0.46	0.34	0.49	7	0.11	-	0.01	0.03
K	0.82	0.29	1.51	0.59	8	0.09	-	<0.005	0.011
L	0.81	0.29	1.80	0.60	9	0.08	-	<0.005	0.020
M	1.55	0.58	0.34	0.59	7	0.09	<5	0.015	0.026
N	1.41	0.55	0.33	0.60	5	0.05	6	0.014	0.030
O	1.43	0.56	0.33	0.59	13	0.09	5	0.012	0.028
P	1.45	0.56	0.32	0.60	11	0.12	5	0.010	0.028
Q	1.46	0.55	0.32	0.57	13	0.23	<5	<0.005	0.012
R	1.71	0.56	0.31	0.59	11	0.05	67	0.003	0.012
S	2.00	0.54	0.31	0.60	8	0.05	69	0.003	0.009
T	1.90	0.55	0.42	0.60	5	0.05	58	<0.005	0.008
U	1.71	0.66	0.51	0.58	4	0.05	58	<0.005	0.005
V	1.66	0.65	0.50	0.61	6	0.06	62	<0.005	0.006
W	1.61	0.64	0.49	0.59	5	0.07	59	<0.005	0.005
X	1.78	0.65	0.49	0.61	5	0.11	57	<0.005	0.005
Y	1.74	0.56	0.41	0.58	13	0.07	5	0.008	0.036

For the purposes of mechanical property evaluation, test specimens were produced by the high pressure die casting (HPDC) of the alloys on a 250 tonne Toshiba cold chamber machine. Two dies were designed with magnesium alloys in mind to cast tensile/creep specimens and bolt load retention bosses. The alloy properties that were evaluated included casting quality, as-cast microstructure, tensile strength at room temperature and 177°C, creep behaviour at 150°C and 177°C, and bolt load retention (BLR) behaviour at 150°C and 177°C.

A typical example of the microstructure of an alloy according to the present invention (Alloy G) in the as-cast condition, is shown in Figure 5. Due to the nature of HPDC there is a transition from a fine grain structure, close to the surface of the cast specimen (the "skin"), to a coarser grain structure in the central region (the "core"). Both regions consist of primary magnesium-rich grains or dendrites with a Mg-RE intermetallic phase in the inter-granular and interdendritic regions.

A summary of the tensile test data for various of the alloys is given in Table 5 below and it can be seen that the tensile behaviour of alloys according to the present invention is very good at both of the test temperatures considered.

Table 5 Tensile properties of various alloys at room temperature and 177°C.

Alloy	20°C			177°C		
	0.2% Proof, (MPa)	UTS, (MPa)	% Elong.	0.2% Proof, (MPa)	UTS, (MPa)	% Elong.
D	133 ± 5.0	151.4 ± 12.0	2.7 ± 1.0	118 ± 5.0	136 ± 5.3	5.5 ± 1.1
E	139.8 ± 3.9	161.3 ± 4.2	1.9 ± 0.4	131.2 ± 4.3	149.6 ± 7.3	4.8 ± 1.0
F	148.4 ± 4.1	159.1 ± 8.8	2.0 ± 1.0	127.1 ± 1.7	135.5 ± 7.4	3.5 ± 1.3
G	143.8 ± 2.5	166.3 ± 3.5	3.0 ± 0.5	128.1 ± 2.6	145.9 ± 11.3	4.7 ± 1.3
H	130.8 ± 4.2	149.4 ± 12.8	2.0 ± 1.0	115.2 ± 3.1	125.0 ± 6.1	3.9 ± 0.9
I	122.5 ± 2.1	157.4 ± 7.0	4.5 ± 0.6	109.1 ± 1.7	134.3 ± 4.7	7.1 ± 1.8
J	112.7 ± 7.4	141.0 ± 2.1	3.0 ± 0.4	105.8 ± 1.1	125.5 ± 5.4	5.7 ± 1.0
M	129.4 ± 6.8	147.4 ± 6.7	2.3 ± 0.9	109.3 ± 7.7	129.4 ± 3.2	4.1 ± 0.7
N	130.5 ± 1.1	157.3 ± 9.0	3.6 ± 0.8	111.2 ± 6.6	141.2 ± 7.8	6.0 ± 1.2
O	123.9 ± 3.5	150.9 ± 5.2	3.0 ± 0.6	107.8 ± 8.7	137.9 ± 5.5	5.8 ± 1.1
P	125.2 ± 2.8	146.7 ± 5.9	2.8 ± 0.3	113.1 ± 2.1	132.6 ± 8.4	4.5 ± 0.8
Q	124.6 ± 2.4	147.1 ± 3.7	2.7 ± 0.6	108.2 ± 6.8	129.6 ± 1.9	4.3 ± 0.7
R	127.5± 5.0	167.9 ± 6.4	4.3 ± 0.6	117.7 ± 4.1	147.2 ± 2.1	7.0 ± 0.6
S	131.2 ± 4.0	159.2 ± 6.8	3.3 ± 0.7	121.6 ± 1.2	146.2 ± 4.7	5.8 ± 0.6
T	138.7 ± 2.6	166.5 ± 3.5	3.9 ± 0.3	124.4 ± 1.8	150.4 ± 4.0	6.0 ± 0.8
U	136.8 ± 2.9	165.4 ± 6.3	3.7 ± 0.3	124.5 ± 1.6	146.7 ± 3.8	5.3 ± 0.8
V	135.2 ± 1.2	154.3 ± 6.4	2.6 ± 0.8	122.2 ± 2.5	144.9 ± 5.4	5.2 ± 0.7
W	130.0 ± 1.7	154.0 ± 5.7	2.7 ± 0.5	115.9 ± 2.9	138.8 ± 6.0	4.3 ± 0.9
X	134.2 ± 6.2	156.0 ± 4.3	2.6 ± 0.8	116.6 ± 4.5	138.0 ± 3.6	4.1 ± 0.5

A summary of the secondary creep rates under the same conditions of 177°C and 90MPa for various of the alloys are contained in Table 6 below. These test conditions were chosen specifically to provide a stringent test that would identify magnesium alloys with creep properties suitable for demanding automotive powertrain applications.

Table 6 Steady-state creep rates of various alloys.

Alloy	Steady State Creep Rate at 177°C and 90 MPa, (s^{-1})
D	1.9×10^{-9}
E	1.0×10^{-10}
F	1.4×10^{-9}
G	3.0×10^{-11}
H	2.5×10^{-10}
I	1.8×10^{-10}
J	1.2×10^{-9}
N	3.0×10^{-11}
O	6.0×10^{-11}
P	1.0×10^{-9}
Q	6.1×10^{-8}
R	6.4×10^{-10}
S	5.5×10^{-10}
T	3.3×10^{-10}
U	2.2×10^{-10}
V	3.1×10^{-10}
W	6.9×10^{-11}

These results can be divided into three groups depending on the observed creep behaviour and the Al content of the alloy. The first group contains those alloys which have an Al content of less than 0.03 wt.% (Alloys D and F) and it can be seen that these compositions display a relatively high secondary creep rate. The second group contains those alloys which have an Al content of more than 0.02 wt.% and less than 0.11 wt.% (Alloys E, G, H, I, N, O, R, S, T, U, V and W) and it can be seen that these alloys display secondary creep rates that are very low, in the range of 10^{-10}-$10^{-11}s^{-1}$, and therefore these compositions would be classified as very creep resistant under these test conditions. This is illustrated by the comparison of the creep behaviour, at 177°C and 90MPa, of Alloys E and F in Figure 6. The two alloys have very similar base compositions; however, Alloy F with a low Al content (Al <0.01 wt.%) has a vastly inferior creep performance when compared to that of Alloy E (Al 0.04 wt.%). The third group contains those alloys which have an Al content of 0.11 wt.% or greater (Alloys J, P and Q) and it can be seen that these compositions also display relatively high secondary

creep rates, as observed for group one and therefore both groups one and three would be classified as not being sufficiently creep resistant under the imposed test conditions. Therefore, these results suggest that under these extreme test conditions (177°C and 90MPa) there is an optimum Al content within which an alloy composition must remain to achieve a creep performance that is suitable for the most demanding powertrain applications. This is most dramatically illustrated by the comparison of the creep behaviour of Alloys N, O, P and Q tested at 177°C and 90MPa as shown in Figure 8. All of these alloys possess very similar compositions apart from the Al content. The transition in creep behaviour across these four compositions from extremely good for Alloy N to extremely poor for Alloy Q with an increase in Al content from 0.05 wt.% to 0.23 wt.% is clear.

The BLR behaviour for Alloy Y was measured at 150°C and 177°C, with loads of 8 kN and 11 kN. The results are presented in two charts:

- The overall percentage load retained after returning to room temperature (Figure 8), and
- The percentage load retained at the test temperature, being the creep component of the overall behaviour (Figure 9).

Claims

1. A magnesium-based alloy consisting of, by weight:

1.5-4.0% rare earth element(s),
0.3- 0.8% zinc,
0.02-0.1% aluminium,
4- 25 ppm beryllium,
0-0.2% zirconium,
0-0.3% manganese,
0-0.5% yttrium,
0-0.1% calcium, and
the remainder being magnesium except for incidental impurities.

2. An alloy as claimed in claim 1 having a rare earth element(s) content of 2.2-3.3% by weight.

3. An alloy as claimed in claim 1 or claim 2 wherein the rare earth element(s) are selected from neodymium, cerium, lanthanum, praseodymium, or any combination thereof.

4. An alloy as claimed in claim 1 having a neodymium content of 1.0-2.5% by weight.

5. An alloy as claimed in claim 4 having a neodymium content of 1.4-2.1% by weight.

6. An alloy as claimed in claim 4 or claim 5 wherein the content of rare earth element(s) other than neodymium is 0.5-1.5% by weight.

7. An alloy as claimed in claim 6 wherein the content of rare earth element(s) other than neodymium is 0.8-1.2% by weight.

8. An alloy as claimed in any one of the

preceding claims having a zinc content of 0.4-0.7% by weight.

9. An alloy as claimed in any one of the preceding claims containing zirconium in an amount of 0.2% by weight or less.

10. An alloy as claimed in any one of the preceding claims containing yttrium in an amount of 0.5% by weight or less.

11. An alloy as claimed in claim 10 containing 0.1-0.4% by weight yttrium.

12. An alloy as claimed in claim 11 containing 0.1-0.3% by weight yttrium.

13. An alloy as claimed in any one of the preceding claims containing manganese in an amont of 0.3% by weight or less.

14. An alloy as claimed in any one of the preceding claims containing calcium in an amount of 0.1% by weight or less.

15. An alloy as claimed in any one of the preceding claims having an aluminium content of 0.03-0.09% by weight.

16. An alloy as claimed in any one of the preceding claims having an aluminium content of 0.04-0.08% by weight.

17. An alloy as claimed in any one of the preceding claims having an aluminium content of 0.05-0.07% by weight.

18. An alloy as claimed in any one of the

preceding claims having a beryllium content of 4-15 ppm.

19. An alloy as claimed in claim 18 having a beryllium content of 8-12 ppm.

20. A magnesium-based alloy consisting of 1.7-2.1% by weight neodymium, 0.5-0.7% by weight cerium, 0.3-0.5% by weight lanthanum, 0.03-0.09% by weight aluminium, 0.3-0.8% by weight zinc, 4-15 ppm beryllium; the remainder being magnesium except for incidental impurities and, optionally, trace amounts of rare earth elements other than neodymium, cerium and lanthanum.

21. A component of an internal combustion engine or automotive powertrain formed from an alloy as claimed in any one of the preceding claims.

22. An engine block or portion thereof produced by high pressure die casting an alloy as claimed in any one of claims 1-20.

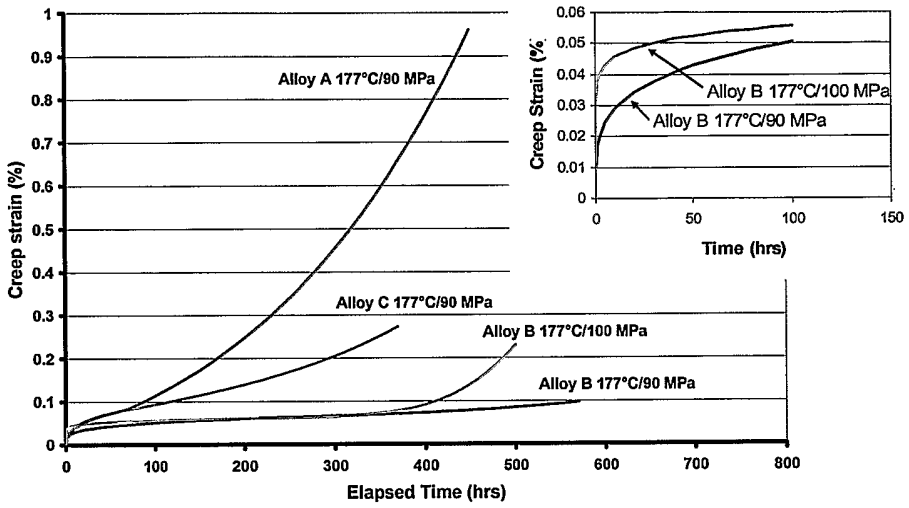


Figure 1 Comparison of the creep response at 177°C and 90 MPa for Alloys A, B and C. A curve for Alloy B at 177°C and 100 MPa is also shown. The insert graph shows the initial primary response for Alloy B at the two stress levels.

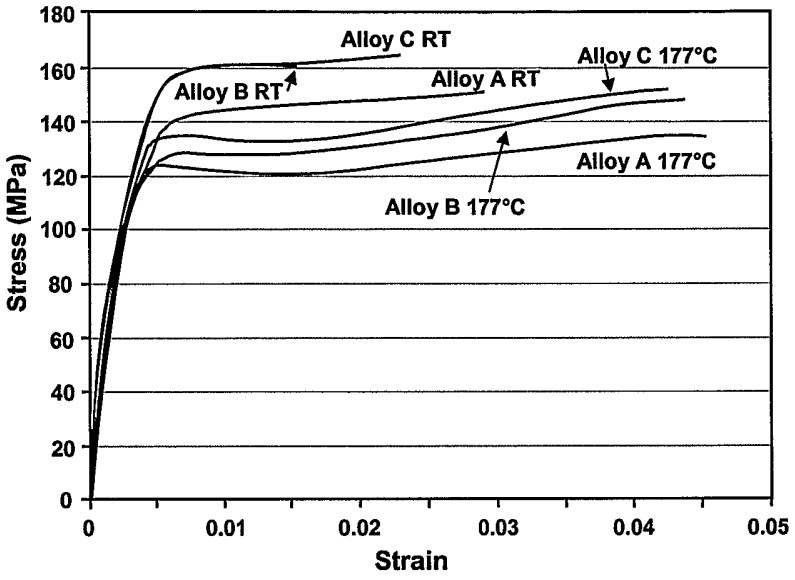


Figure 2 Comparison of the tensile behaviour of Alloys A, b and C at room temperature and 177°C.

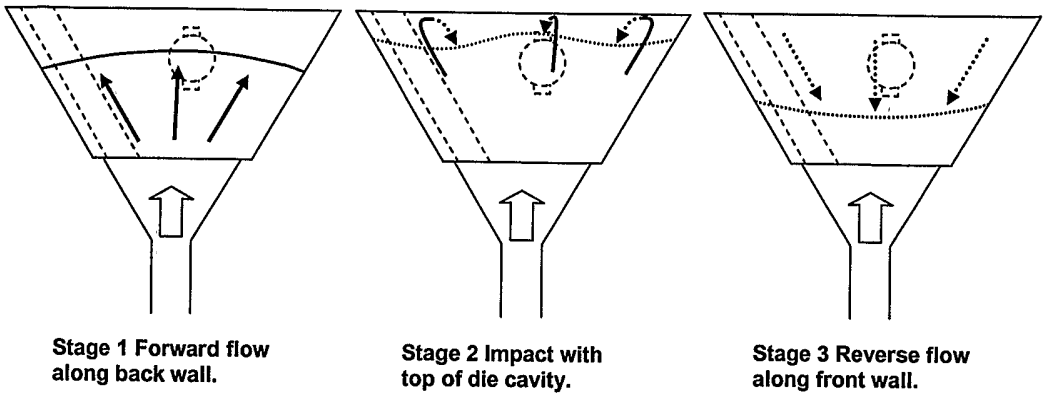


Figure 3 Diagram showing the three stages of flow during filling of the diecastability test die.

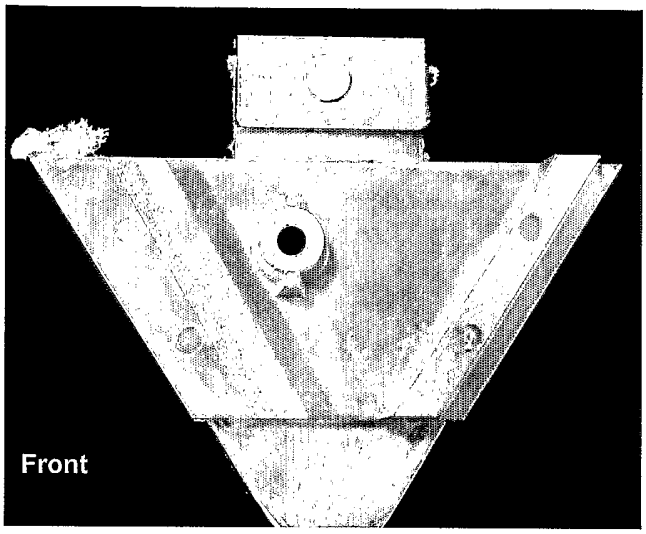


Figure 4 Picture of the top surface of a test piece from the castability die cast from Alloy E.

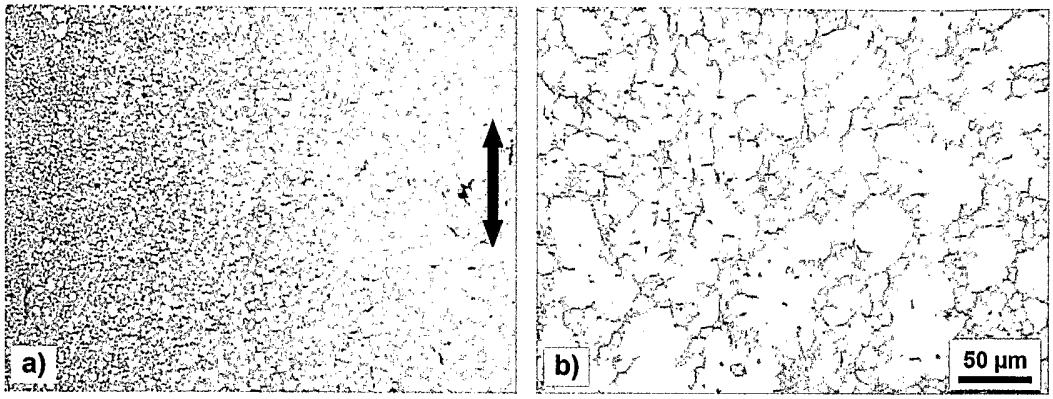


Figure 5 Photomicrographs taken at high magnification of a) the 'skin' region near the surface of the test piece (left-hand side of image is close to the surface) and b) of the 'core' region near the centre of the specimen from the gauge length region of HPDC tensile test piece specimens in the as-cast condition for Alloy G. The double-headed arrow in (a) indicates the long axis of the tensile test piece.

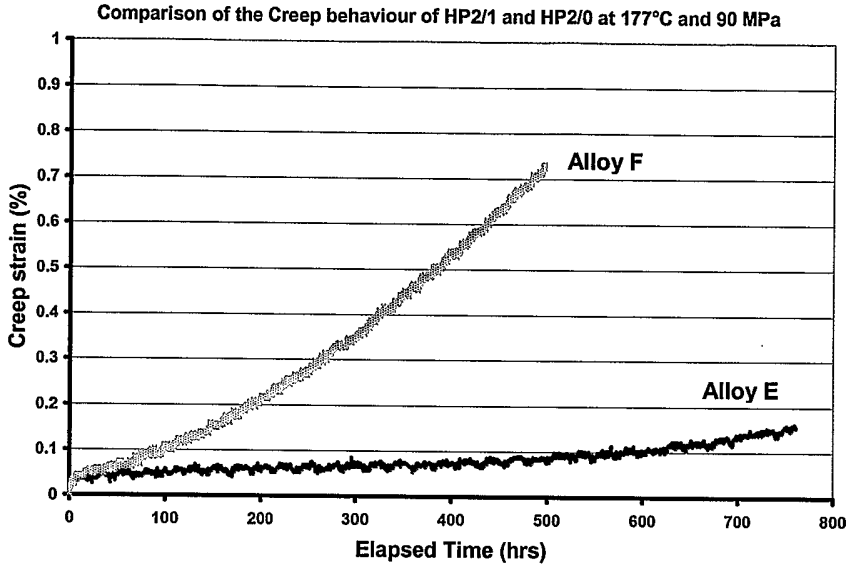


Figure 6 Creep curves at 177°C and 90 MPa comparing the creep behaviour of a composition with less than optimum Al content (Alloy F) with a composition within the optimum Al content composition range (Alloy E).

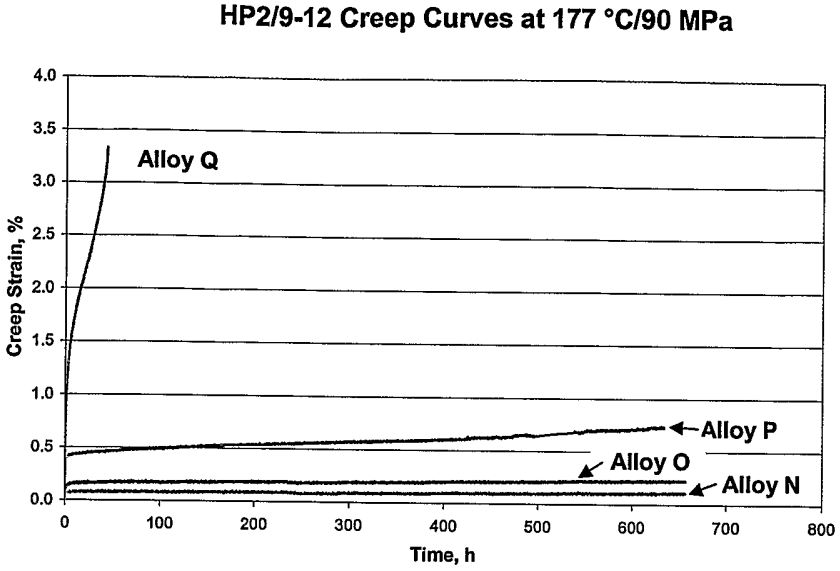


Figure 7 Creep curves at 177°C and 90 MPa showing the influence of increasing Al content (from 0.05 wt.% in Alloy N, to 0.09 wt.% in Alloy O, to 0.12 wt.% in Alloy P, to 0.23 wt.% in Alloy Q) on the creep behaviour.

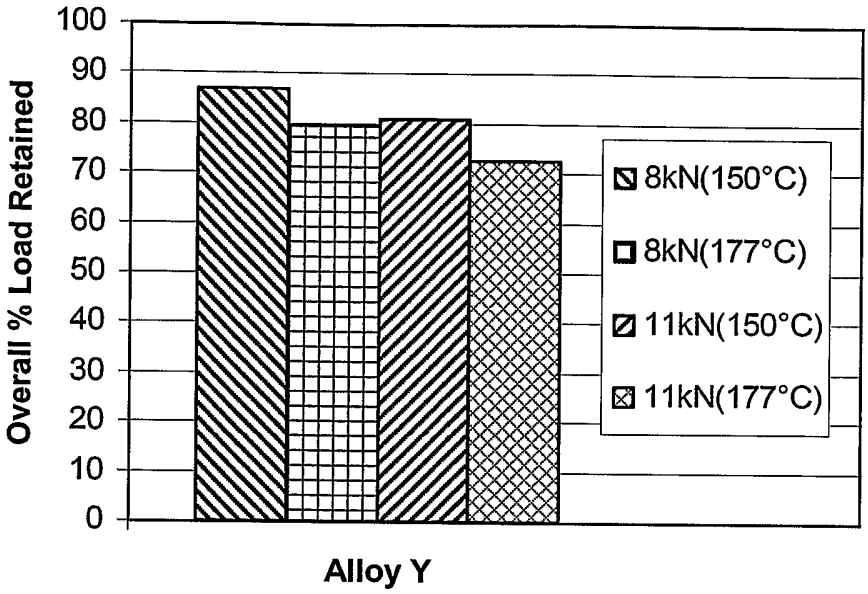


Figure 8: Overall BLR behaviour for Alloy Y.

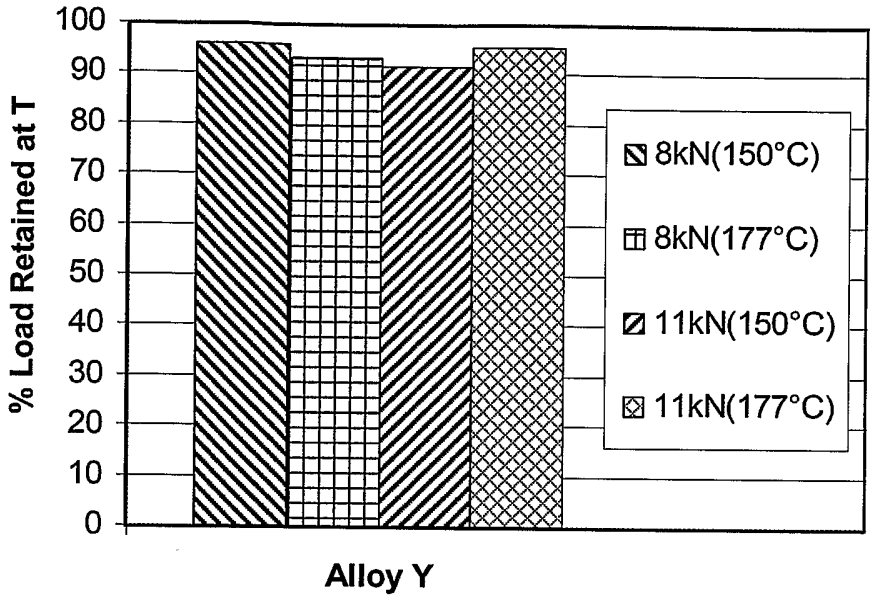


Figure 9: BLR behaviour at temperature for Alloy Y.

INTERNATIONAL SEARCH REPORT

International application No.
PCT/AU2006/000447

A. CLASSIFICATION OF SUBJECT MATTER

Int. Cl.

C22C 23/06 (2006.01)

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)
DWPI & JAPIO: IPC- C22C 23/06; & Keywords - aluminium, aluminum, Al, Zinc, Zn

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO 2004/001087 A (CAST CENTRE PTY LTD) 31 December 2003 Whole document	1-22
A	Derwent Abstract Accession No. 2001-053107/07, Class E36 L03 M26 JP 2000265228 A (TOSHIBA KK) 26 September 2000 Abstract	1-22
A	WO 1996/024701 A (ALCAN INTERNATIONAL LIMITED) 15 August 1996 Whole document	1-22
A	Derwent Abstract Accession No. 92-278054/34, Class Q52 EP 499321 A (KOLBENSCHMIDT AG) 19 August 1992 Abstract	1-22

☐ Further documents are listed in the continuation of Box C ☒ See patent family annex

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search
03 May 2006

Date of mailing of the international search report 10 MAY 2006

Name and mailing address of the ISA/AU

AUSTRALIAN PATENT OFFICE
PO BOX 200, WODEN ACT 2606, AUSTRALIA
E-mail address: pct@ipaustralia.gov.au
Facsimile No. (02) 6285 3929

Authorized officer

Tharu Fernando

Telephone No : (02) 6283 2486

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.
PCT/AU2006/000447

This Annex lists the known "A" publication level patent family members relating to the patent documents cited in the above-mentioned international search report. The Australian Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

Patent Document Cited in Search Report		Patent Family Member					
WO	2004001087	AU	2003232527	CA	2490419	CN	1675395
		EP	1516074	MX	PA05000083	NZ	537741
		RU	2005101317	US	2005002821		
JP	2000265228	NONE					
WO	9624701	AU	46298/96	BR	9607603	CA	2212133
		CZ	9702479	EP	0813616	IN	192898
		NO	973391	US	6193817	ZA	9600914
EP	0499321	DE	4104680	JP	5078764		

Due to data integration issues this family listing may not include 10 digit Australian applications filed since May 2001.

END OF ANNEX