



US 20020155776A1

(19) **United States**

(12) **Patent Application Publication**
Mitchler et al.

(10) **Pub. No.: US 2002/0155776 A1**

(43) **Pub. Date: Oct. 24, 2002**

(54) **PARTICLE-CONTAINING MELTBLOWN
WEBS**

Publication Classification

(76) Inventors: **Patricia Ann Mitchler**, Neenah, WI
(US); **Wilfred Eugene Riddell**,
Neenah, WI (US); **Carmen Ann Baker**,
Sheboygan, WI (US)

(51) **Int. Cl.⁷** **D04H 1/00**; D04H 13/00;
D04H 1/06; D04H 1/56

(52) **U.S. Cl.** **442/327**; 442/400; 442/357;
442/360

Correspondence Address:
KIMBERLY-CLARK WORLDWIDE, INC.
401 NORTH LAKE STREET
NEENAH, WI 54956

(57) **ABSTRACT**


(21) Appl. No.: **10/126,342**

(22) Filed: **Apr. 18, 2002**

Related U.S. Application Data

(62) Division of application No. 09/418,886, filed on Oct.
15, 1999, now Pat. No. 6,417,120.

A meltblown web having meltblown fibers and particles is provided. The particles are embedded in and retained by one or more meltblown fibers as a result of surface penetration of the particles into one or more meltblown fibers. The surface penetration of any particle into one or more meltblown fibers is generally slight thus leaving a substantial amount of the surface area of any particle available for interaction with any medium to which the web is exposed.

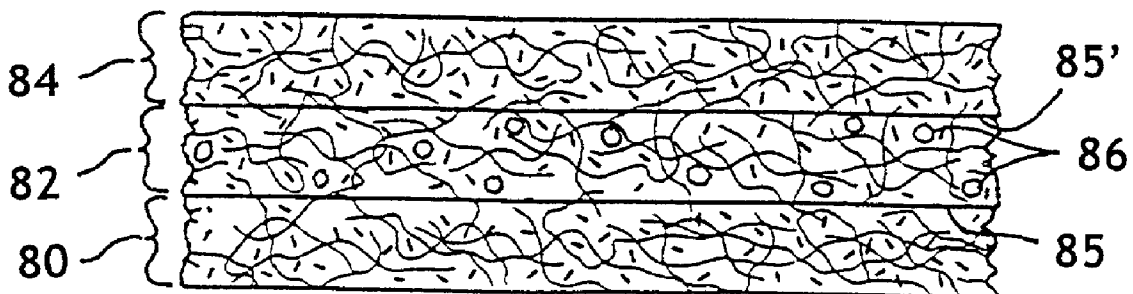

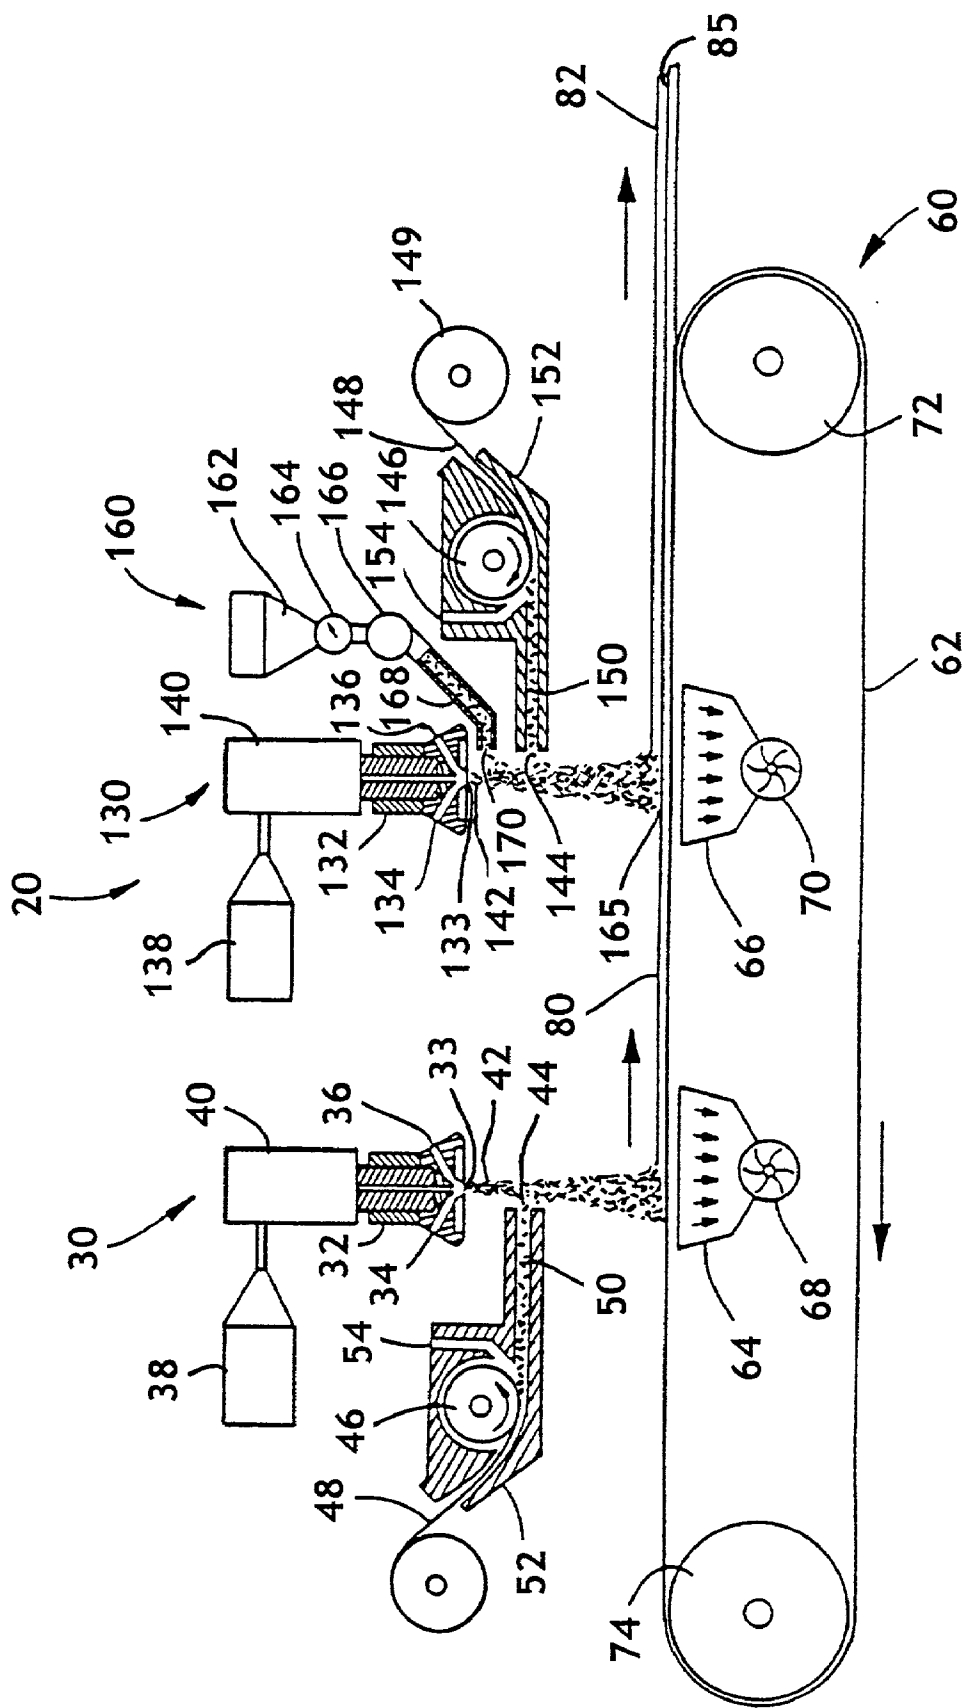


FIG. 1

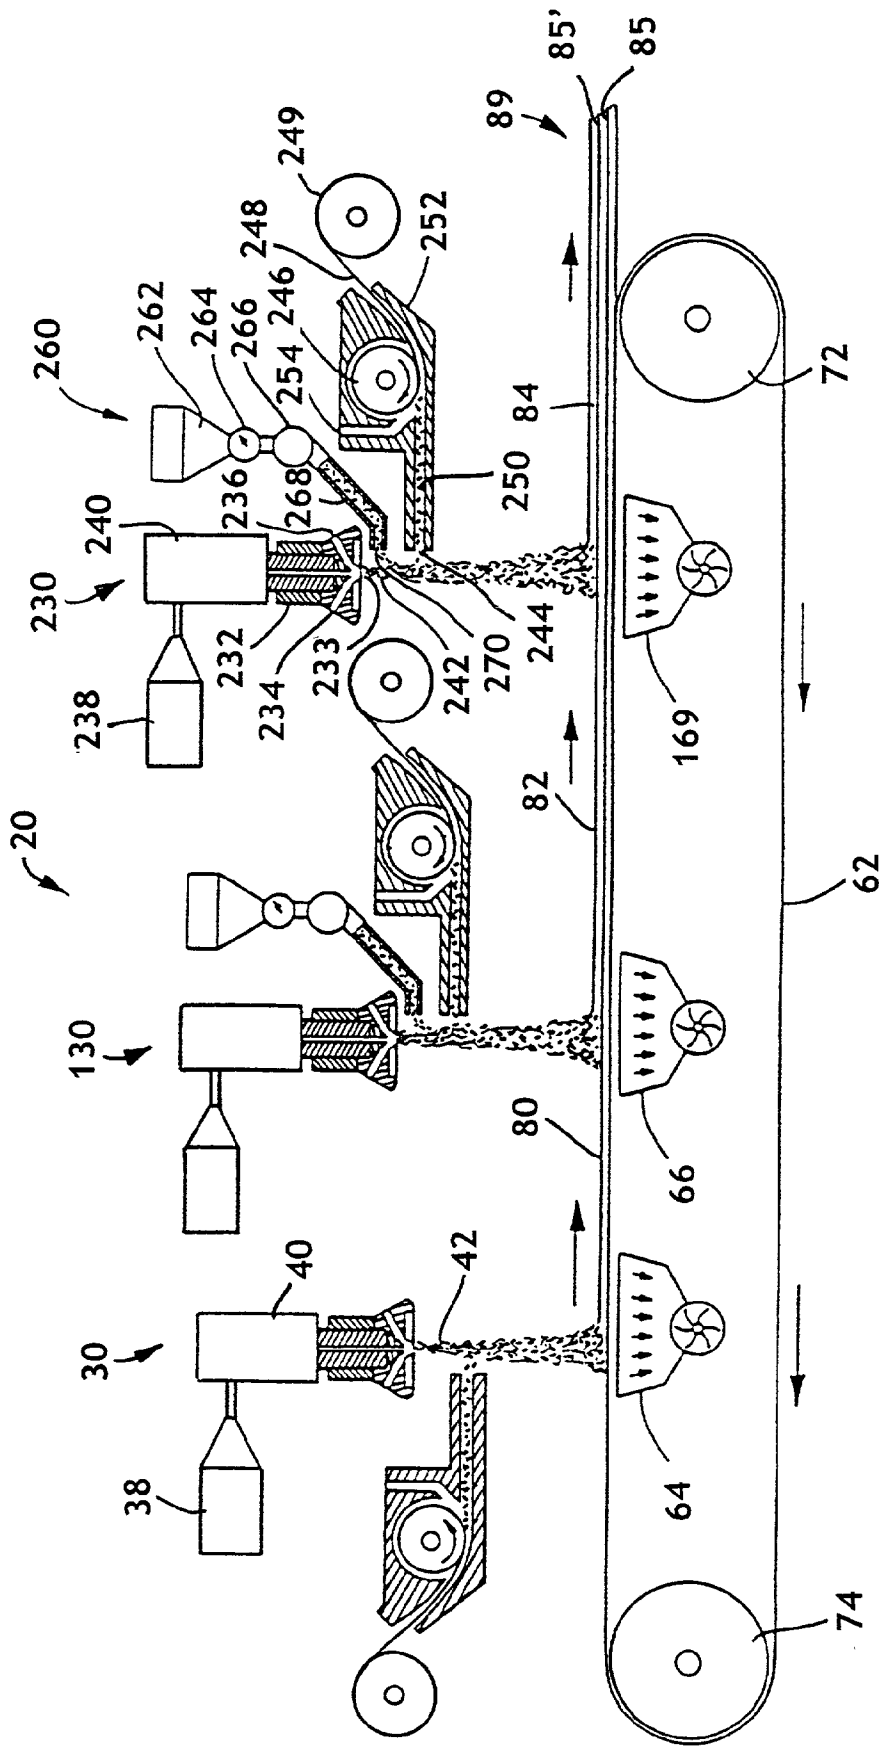


FIG. 2

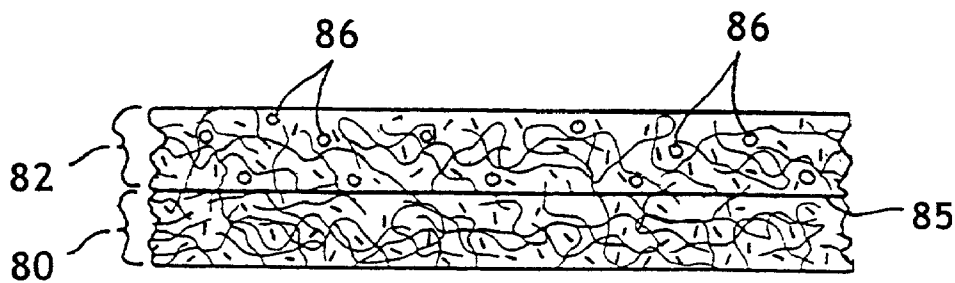


FIG. 3

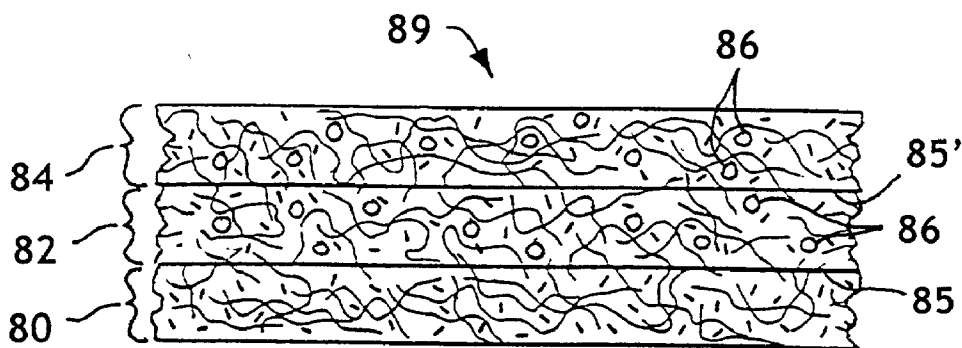


FIG. 4

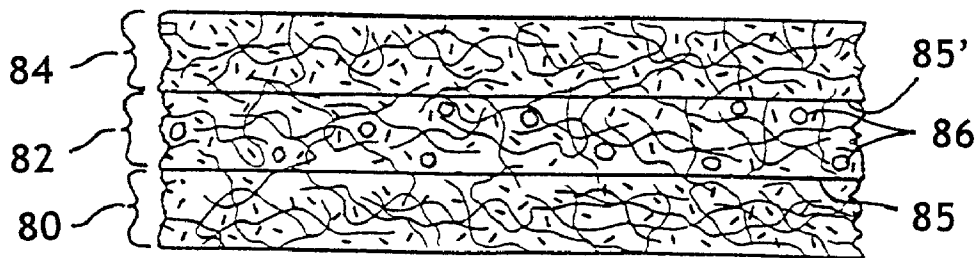


FIG. 5

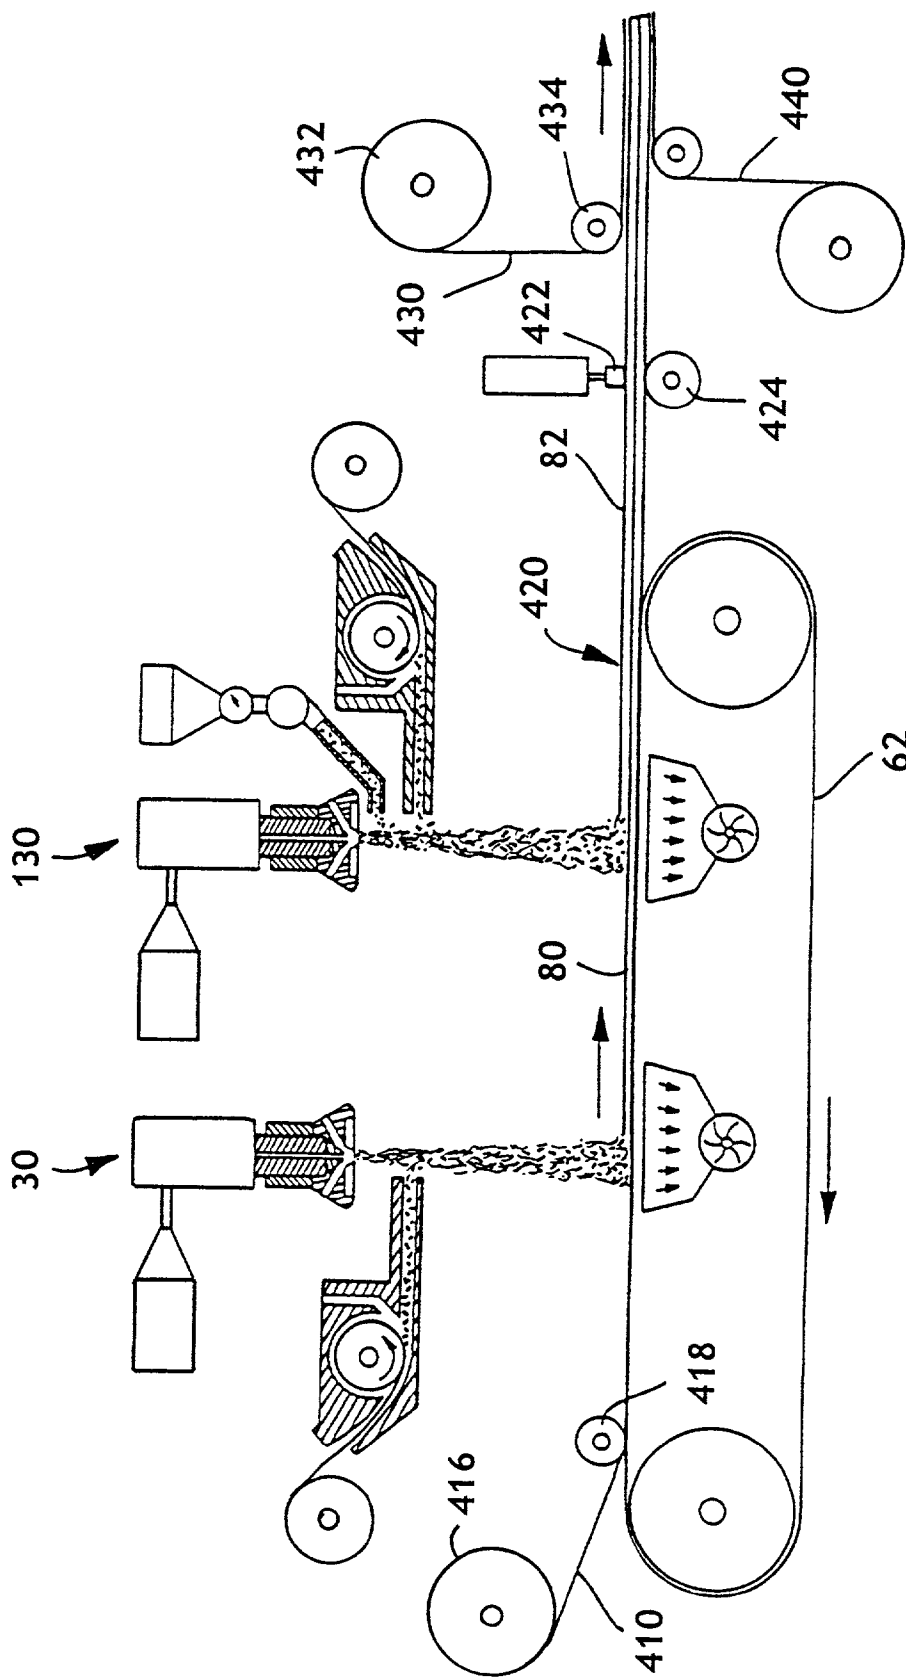


FIG. 6

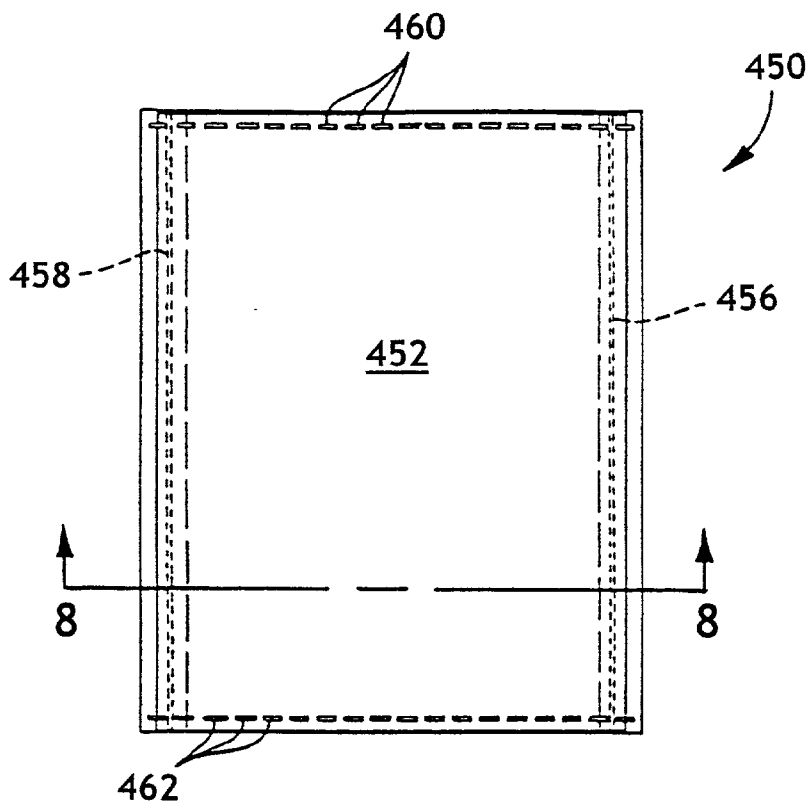


FIG. 7

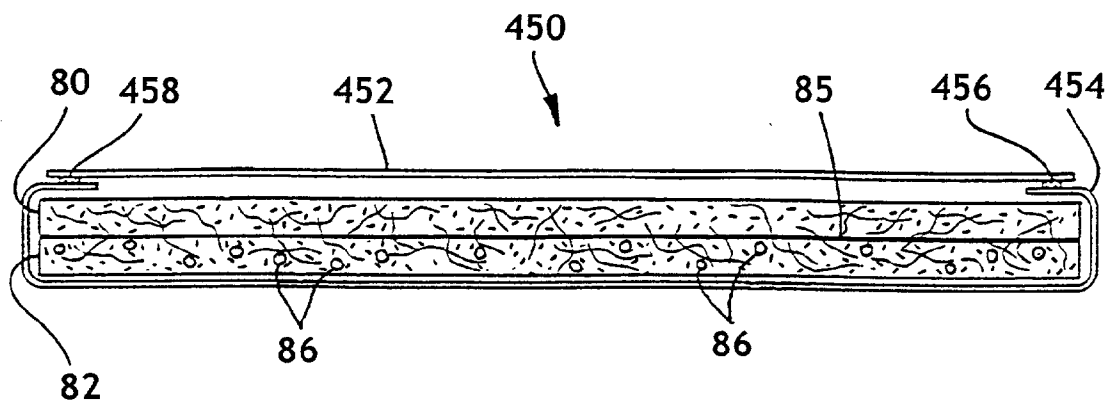
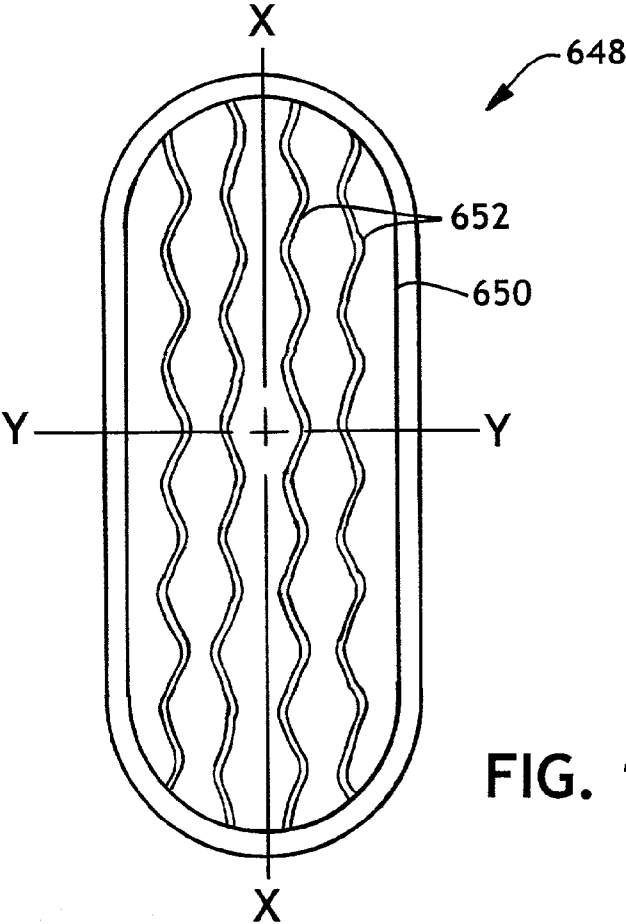
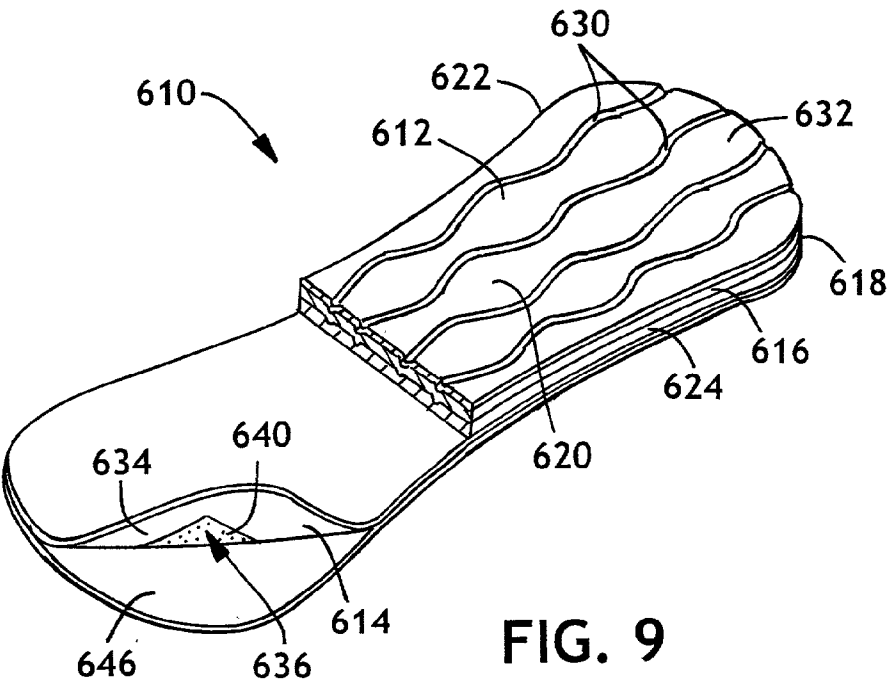


FIG. 8



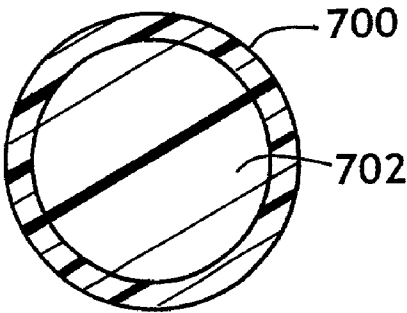


FIG. 11

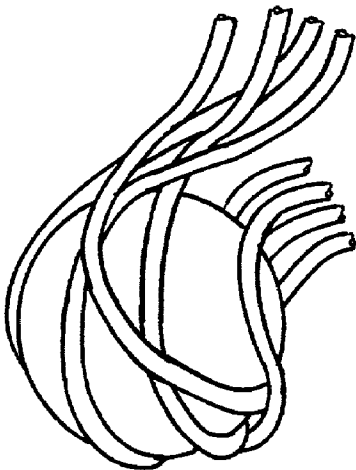


FIG. 12

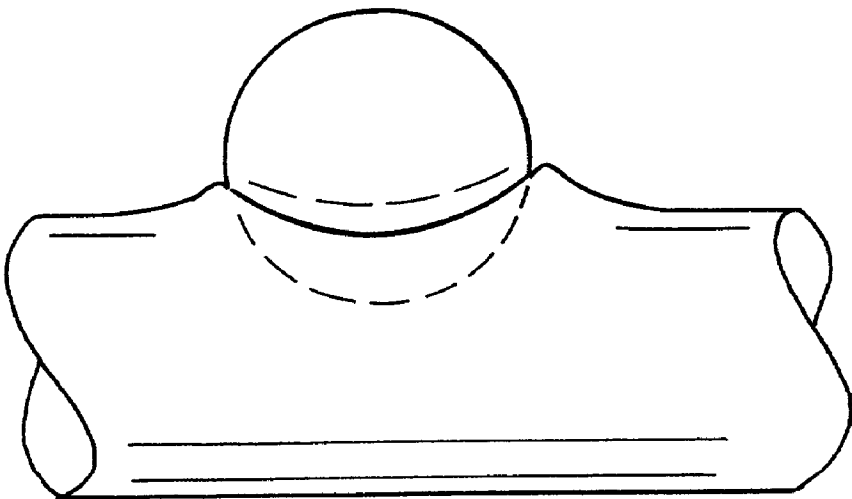


FIG. 13

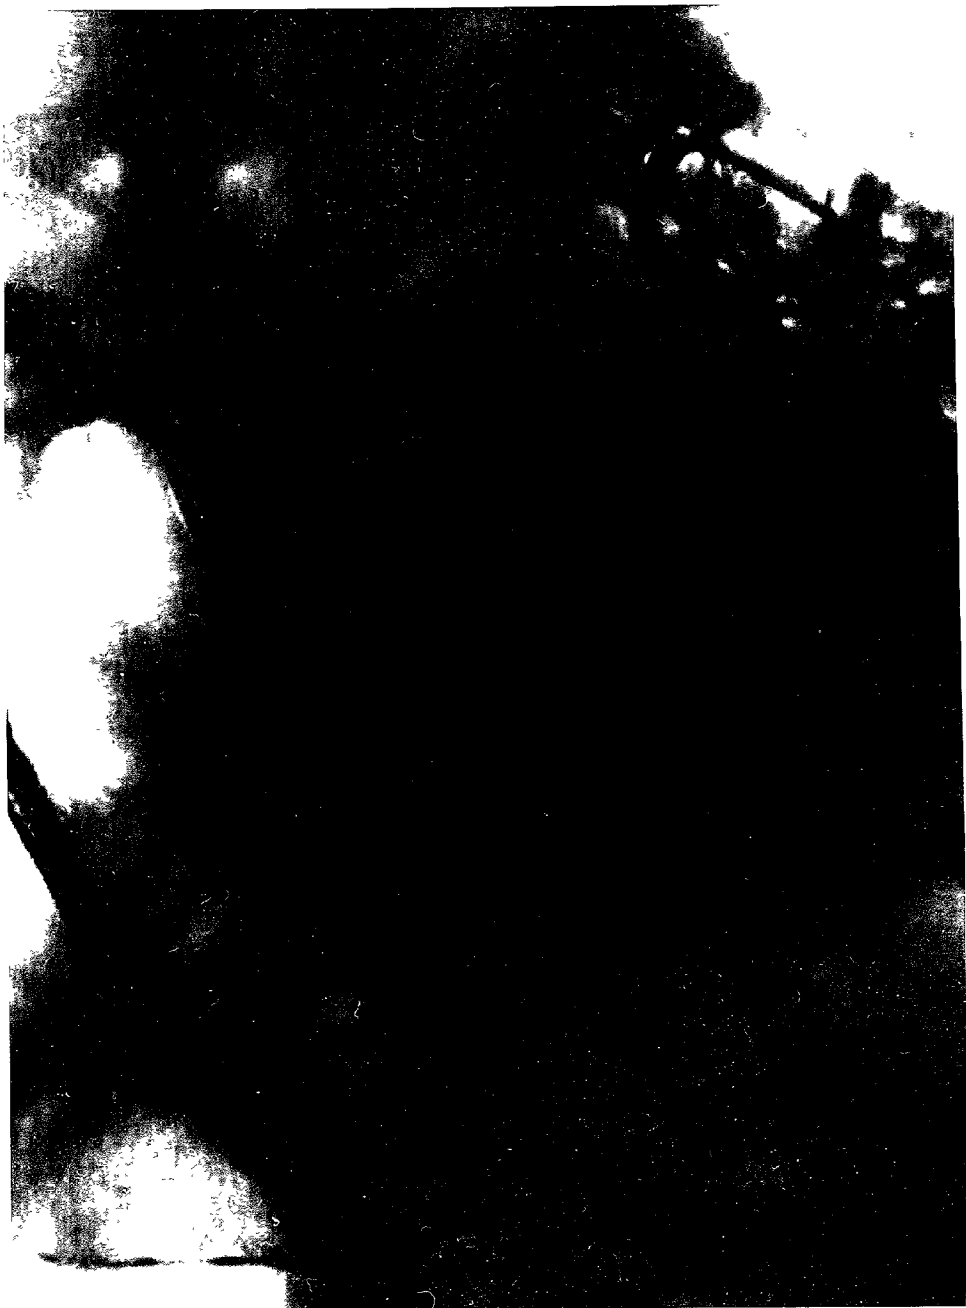


FIG. 14



FIG. 15

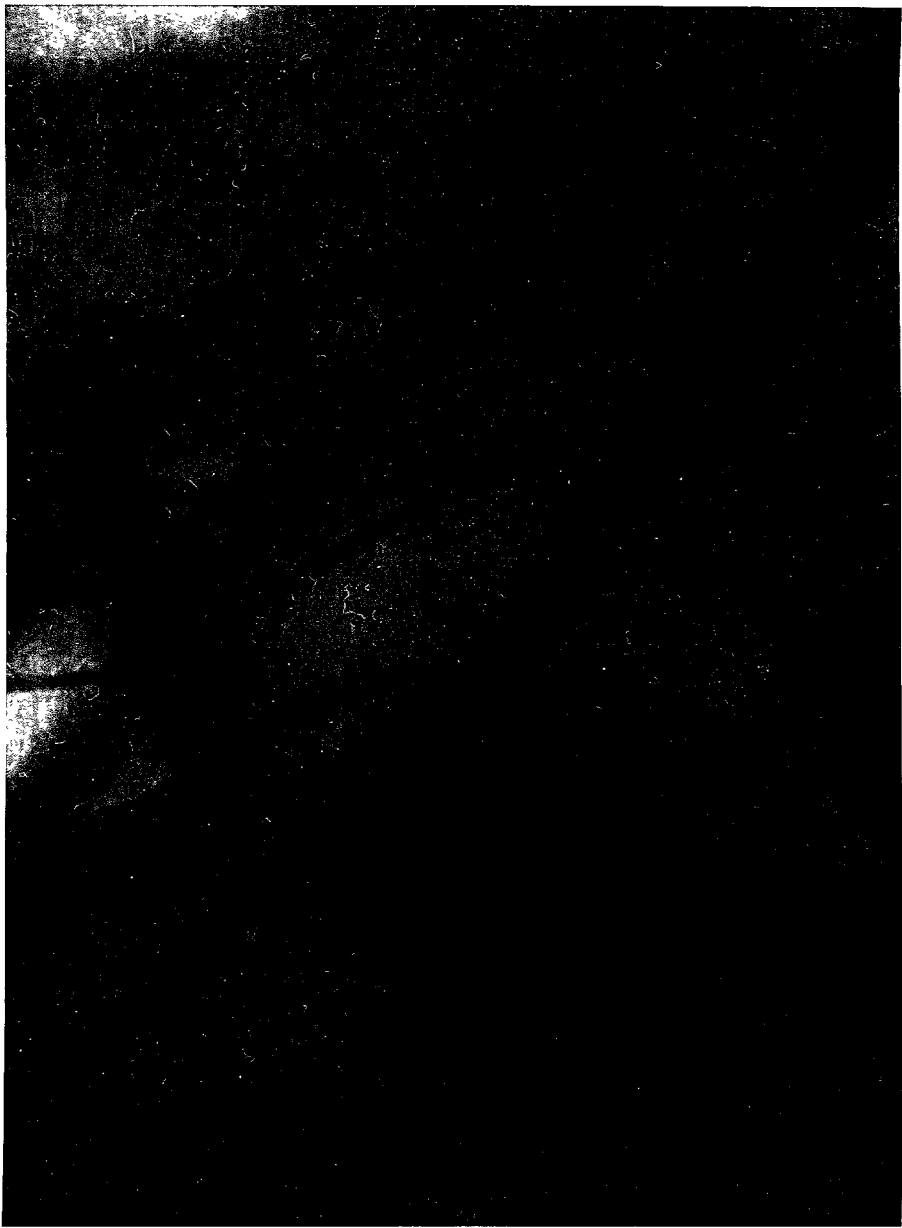


FIG. 16

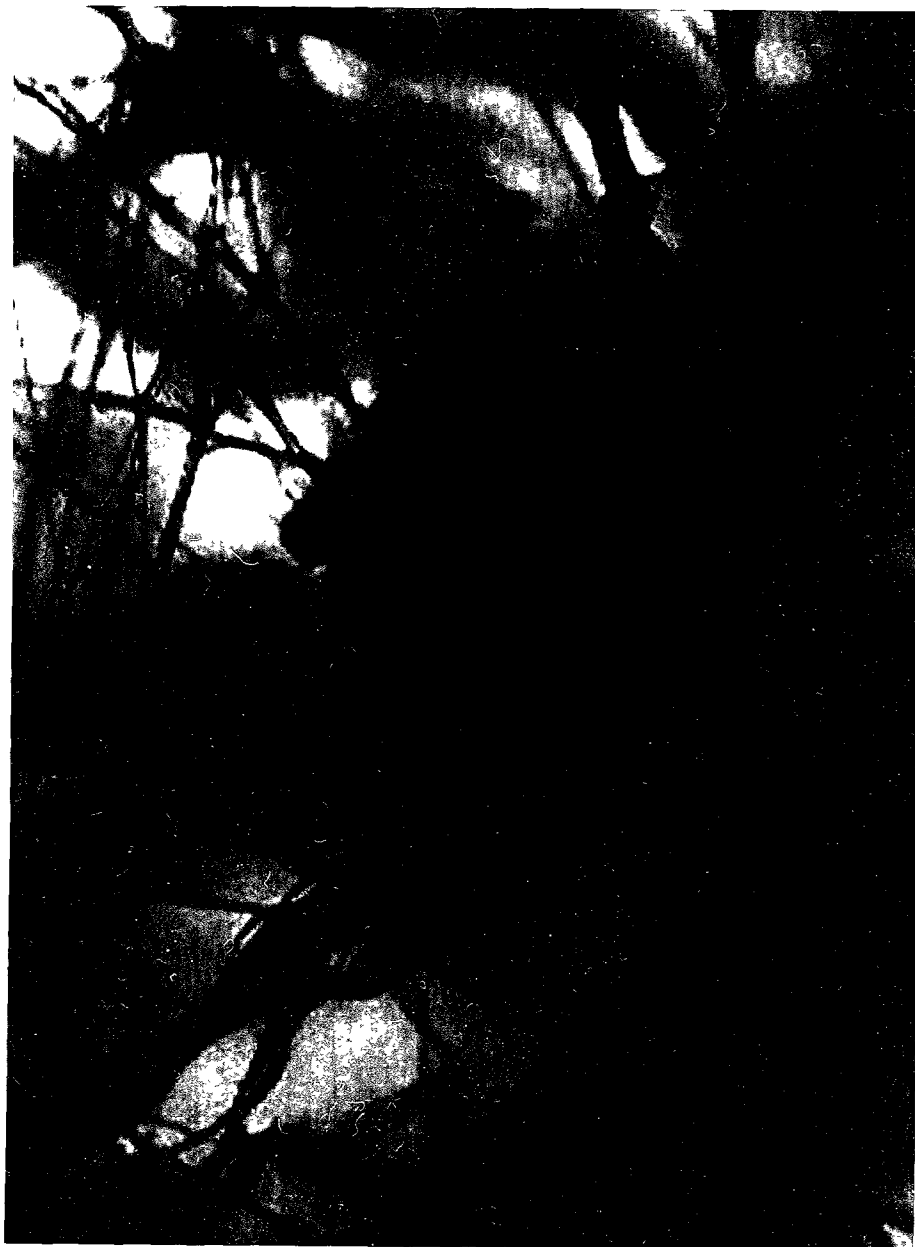


FIG. 17

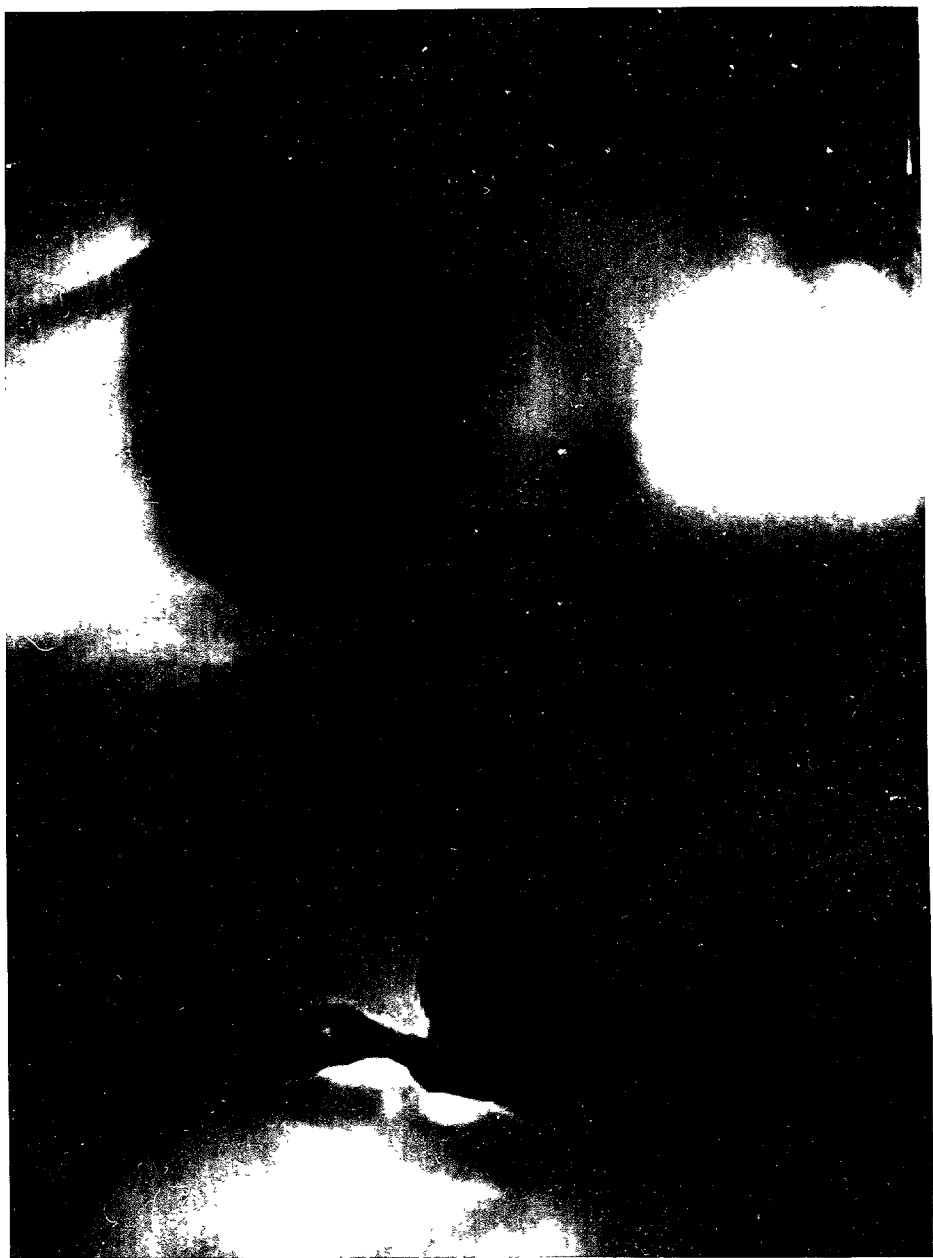


FIG. 18



FIG. 19

PARTICLE-CONTAINING MELTBLOWN WEBS

BACKGROUND OF THE INVENTION

[0001] This invention relates to meltblown webs and in particular to meltblown webs having meltblown fibers and particles.

[0002] It has been desired to provide particle-containing meltblown webs for a variety of purposes, wherein a pre-determined amount of particles is held in the web while minimizing the amount of “dusting” (i.e., particles undesirably dropping out of the web) the web may suffer.

[0003] Various approaches to retaining particles within a web have been proposed. One such approach discloses a self-supporting durable flexible conformable low-pressure-drop porous sheet product that contains a uniform three-dimensional arrangement of discrete particles. The sheet product includes, in addition to the particles, a web of meltblown fibers in which the particles are uniformly dispersed. The particles are physically held, such as by mechanical entanglement, in the web even though there is only point contact between the meltblown fibers and the particles. (“Point contact” occurs when preformed bodies about one another. It is distinguished from “area contact,” such as results when a liquid material is deposited against a substrate, flows over the substrate, and then hardens in place.) Even though the particles are mechanically entangled within the interstices of the web, a portion of the particles still undesirably drop out of the web during handling.

[0004] Another approach discloses using adhesive polymers for forming the meltblown web. In addition to being physically entrapped in the web, the particles of this approach are also adhered to the surfaces of the meltblown fibers. Even though this may be viewed as an improvement over retaining particles within a web by point contact, this approach accomplishes its objective with the use of expensive adhesive polymers.

[0005] For the foregoing reasons, there is a need for improved meltblown webs having particles substantially uniformly and homogeneously dispersed therethrough and retained therein by more than mere point contact or mechanical entanglement, wherein dusting is substantially eliminated.

SUMMARY OF THE INVENTION

[0006] The present invention is directed to improved meltblown webs having particles substantially uniformly and homogeneously dispersed therethrough and that satisfies the need to substantially eliminate dusting.

[0007] In one embodiment of the present invention, a substantially nondusting meltblown web includes at least one air-formed nonparticle-containing layer having meltblown fibers and staple fibers. The staple fibers engage at least some of the meltblown fibers to space the meltblown fibers apart from each other. Also, the staple fibers are retained within the nonparticle-containing layer by entanglement with the meltblown fibers. In addition to including at least one air-formed nonparticle-containing layer, this embodiment of the substantially nondusting web includes at least one air-formed particle-containing layer having meltblown fibers, particles and staple fibers. The particles are retained in the particle-containing layer by surface penetra-

tion into the meltblown fibers. Similar to the nonparticle-containing layer, the staple fibers of the particle-containing layer engage at least some of the meltblown fibers to space the meltblown fibers apart from each other. Also, the staple fibers are retained within the particle-containing layer by entanglement with the meltblown fibers.

[0008] In an alternative embodiment of the present invention, a substantially nondusting meltblown web includes at least one air-formed layer having meltblown fibers and particles. The particles are retained within the layer by surface penetration into the meltblown fibers.

[0009] In yet another embodiment of the present invention, a substantially nondusting meltblown web includes at least one layer having meltblown fibers, particles and staple fibers. The particles are retained within the layer by surface penetration into the meltblown fibers. The staple fibers engage at least some of the meltblown fibers to space the meltblown fibers apart from each other. Also, the staple fibers are retained within the layer by entanglement with the meltblown fibers.

DRAWINGS

[0010] The foregoing and other features, aspects and advantages of the present invention will become better understood with regard to the following description, appended claims and accompanying drawings where:

[0011] **FIG. 1** illustrates a forming apparatus having two units for formation of meltblown fibers with the downstream unit additionally having provision for application of particles.

[0012] **FIG. 2** illustrates a forming apparatus having three units for formation of meltblown fibers with the two downstream units additionally having provision for application of particles.

[0013] **FIG. 3** illustrates a cross-section of a coherent integrated two-layered web of the present invention in which one layer of the web includes particles.

[0014] **FIG. 4** illustrates a cross-section of a coherent integrated three-layered web of the present invention in which two layers of the web include particles.

[0015] **FIG. 5** illustrates a cross-section of a coherent integrated three-layered web of the present invention in which one layer of the web includes particles.

[0016] **FIG. 6** illustrates an alternate embodiment of a forming apparatus in which the web is provided with embossing and combined with a carrier sheet.

[0017] **FIG. 7** illustrates a view of an absorbent article having a web of the invention.

[0018] **FIG. 8** illustrates a cross-section of the absorbent article of **FIG. 7** taken along line 8-8 of **FIG. 7**.

[0019] **FIG. 9** illustrates a perspective partially broken-away view of an alternate absorbent article having a web of the invention.

[0020] **FIG. 10** illustrates a top view of an absorbent article having a web of the invention showing longitudinally-embossed lines and a continuous peripheral seal located inward from the periphery of the absorbent article.

[0021] FIG. 11 illustrates an enlarged cross-sectional view of a solidifying thermoplastic polymeric meltblown fiber.

[0022] FIG. 12 illustrates an enlarged view of a particle retained within a web of the present invention by surface penetration into more than one meltblown fiber.

[0023] FIG. 13 illustrates an enlarged view of a particle retained within a web of the present invention by surface penetration into at least one meltblown fiber.

[0024] FIG. 14 is a scanning electron microscope photograph, at a magnification level of 10 \times , illustrating an example of the surface penetration of a particle, having a diameter of about 20 to about 300 microns, into one or more meltblown fibers of a coform web of the present invention.

[0025] FIG. 15 is a scanning electron microscope photograph, at a magnification level of 10 \times , illustrating an example of the surface penetration of a particle, having a diameter of about 20 to about 300 microns, into one or more meltblown fibers of a coform web of the present invention.

[0026] FIG. 16 is a scanning electron microscope photograph, at a magnification level of 10 \times , illustrating an example of the surface penetration of a particle, having a diameter of about 20 to about 300 microns, into one or more meltblown fibers of a coform web of the present invention.

[0027] FIG. 17 is a scanning electron microscope photograph, at a magnification level of 10 \times , illustrating an example of the surface penetration of a particle, having a diameter of about 20 to about 300 microns, into one or more meltblown fibers of a coform web of the present invention.

[0028] FIG. 18 is a scanning electron microscope photograph, at a magnification level of 10 \times , illustrating an example of the surface penetration of a particle, having a diameter of about 20 to about 300 microns, into one or more meltblown fibers of a coform web of the present invention.

[0029] FIG. 19 is a scanning electron microscope photograph, at a magnification level of 10 \times , illustrating an example of the surface penetration of a particle, having a diameter of about 5 to about 25 microns, into one or more meltblown fibers of a coform web of the present invention.

DESCRIPTION OF THE INVENTION

[0030] The meltblown webs of the present invention generally include at least one layer having meltblown fibers and particles.

[0031] As used herein, the term "meltblown fibers" means fibers formed by extruding a molten thermoplastic material through a plurality of fine, usually circular, die capillaries as molten threads or filaments into a high velocity stream of heated gas, usually air, which attenuates the filaments of molten thermoplastic material to reduce their diameter. Thereafter, the meltblown fibers are carried by the high velocity gas stream and deposited on a collecting surface to form a web of randomly disbursed meltblown fibers. Meltblowing is generally described, for example, in U.S. Pat. No. 3,849,241 to Buntin, U.S. Pat. No. 4,307,143 to Meitner, et al., and U.S. Pat. No. 4,707,398 to Wisneski et al., each of which is incorporated herein by reference.

[0032] In a typical meltblowing process, an extruded filament or fiber generally begins the process of cooling or quenching upon exiting from a forming die. As the indi-

vidual meltblown fiber cools, it thus begins solidifying. The solidification process typically begins at the exterior of the meltblown fiber and moves toward the center of the meltblown fiber. As the meltblown fiber cools, it develops a surface or skin 700, as illustrated in FIG. 11. Although a skin may be present, there usually remains a molten or semi-molten inner core 702 until the core of the meltblown fiber cools and reaches its solidification temperature. Known methods of incorporating particulate material into a meltblown web provide for the introduction of particulate material at about room temperature into a stream of meltblown fibers. Absent adhesive polymers, this room temperature particulate material is maintained in any resulting meltblown web by either point contact or mechanical entanglement with the meltblown fibers. While both point contact and mechanical entanglement are somewhat effective at maintaining a portion of the particulate material in the web, there remains a portion of the particulate material that is neither in sufficient point contact with the meltblown fibers nor sufficiently mechanically entangled in the meltblown fibers and thus either remains fugitive or easily becomes fugitive upon handling of the web. As a result of a portion of the particulate material remaining fugitive or easily becoming fugitive, these webs suffer from the problem of dusting. Alternatively, where adhesive polymers are used, the particulate material added at room temperature is maintained in any web by adhering to the surface of the meltblown fibers. Although the use of adhesive polymers substantially reduces dusting, adhesive polymers are relatively expensive when compared to nonadhesive-containing polymers.

[0033] Unlike situations where the particulate material is maintained within a meltblown web by point contact or mechanical entanglement, the present invention provides for an improved and heretofore unknown method of retaining particles in meltblown webs which substantially eliminates dusting without the use of expensive adhesive polymers. This novel invention provides for using any heat-stable particle that can withstand the force of impact with one or more meltblown fibers and yet substantially maintain its particle integrity. (The term "heat-stable", as used herein, generally refers to any particle whose physical, chemical or other properties remain substantially unchanged as a result of heat encountered by the particle.) While not desiring to be bound by any particular theory, it is believed that by heating the particles to a temperature approximating that of the fibers being extruded from a forming die, a portion of each particle generally impacts and penetrates into the skin of one or more meltblown fibers. As it thus penetrates into one or more solidifying meltblown fibers, that portion of the heated particle becomes embedded in and retained by one or more solidifying meltblown fibers. Although a portion of the particle becomes embedded in and retained by one or more meltblown fibers, such "surface penetration" of the particle into one or more meltblown fibers is generally slight desirably leaving a substantial amount of the surface area of the particle available for interaction with any medium to which a web of this invention may be exposed. FIGS. 12 through 19 illustrate examples of the surface penetration of a variety of one or more particles into one or more meltblown fibers.

[0034] Referring now to FIG. 1, a forming apparatus, generally indicated as 20, is illustrated as including two meltblown units, 30 and 130, and a movable foraminous belt apparatus, generally indicated as 60. The first meltblown unit 30 includes a forming die 32 having a die tip 33 and a

pair of ducts **34** and **36**. A material supply and delivery device **38** delivers polymer to extruder **40** for delivery to the forming die **32**. A first primary stream **42** including meltblown fibers is formed by a known meltblowing technique, such as is described in U.S. Pat. No. 4,100,324, issued Jul. 11, 1978, to Anderson et al., which is incorporated herein by reference. Basically, the method of formation involves extruding a molten polymeric material through the forming die **32** into streams of polymer and attenuating the polymer streams by converging flows of heated gas, usually air, supplied through ducts **34** and **36**.

[0035] A first secondary stream **44** including individualized wood or other staple fibers is formed and merged into the first primary stream **42** including meltblown fibers so as to entangle the individualized wood fibers with the meltblown fibers in a single step. The individualized wood fibers typically have a length of about 0.5 to about 10 millimeters and a length to maximum width ratio of about 10:1 to about 400:1. A typical cross-section of an individualized wood fiber has an irregular width of about 10 microns and a thickness of about 5 microns. In the illustrated forming apparatus, the first secondary stream **44** is formed by a pulp sheet divellicating apparatus **52** of the first meltblown unit **30**. (The pulp sheet divellicating apparatuses described herein are of the type described in U.S. Pat. No. 3,793,678, issued Feb. 26, 1974, to Appel, which is incorporated herein by reference.) The divellicating apparatus **52** includes a conventional picker roll **46** having picking teeth for divellicating wood pulp sheets **48** into individualized wood fibers. The wood pulp sheets **48** are fed radially along a picker roll radius to the picker roll **46**. It is the teeth of the picker roll **46** that divellicate the wood pulp sheets **48** into individualized wood fibers. The resulting individualized wood fibers are conveyed toward the first primary stream **42** through a forming duct **50**. A passageway **54** provides process gas, usually air, to the picker roll **46** in sufficient quantity to serve as a medium for conveying the individualized wood fibers through the forming duct **50** at a velocity approaching that of the picker teeth. The process gas may be supplied by conventional means such as a blower, not shown. It has been found that in order to avoid significant fiber clumping or agglomeration, generally referred to as fiber floccing, the individualized wood fibers should be conveyed through the forming duct **50** at substantially the same velocity at which they leave the picker teeth after separation from the wood pulp sheets **48**. The apparatus described for formation of a web of meltblown fibers having wood fibers entangled therein, such web now referred to as coform, is known and is more fully described in the previously referenced U.S. Pat. No. 4,100,324, issued Jul. 11, 1978, to Anderson et al. The first primary stream **42**, including wood fibers entangled therein from the first secondary stream **44**, is then directed onto a moving forming surface **62** that passes beneath the forming die **32**. The moving forming surface **62** is provided with suction devices **64** and **66** driven by blowers **68** and **70** that withdraw gas from beneath the moving forming surface **62** and provide for uniform laydown of the entangled meltblown fibers and wood fibers onto the moving forming surface. The moving forming surface **62** is desirably a permeable belt. In addition to being supported by a first roll **72**, the moving forming surface **62** is also supported by a second roll **74**. While illustrated with two suction devices, the number and size of the suction devices below the moving forming surface may

be varied in any suitable manner well known in the art. Further, the movable foraminous belt apparatus **60** may be provided with dust collector devices, not shown, to prevent the escape of any particles and fibers to the atmosphere.

[0036] As illustrated in FIG. 1, a first meltblown unit **30** lays down a layer of meltblown fibers having wood or other staple fibers entangled therein as a first layer **80**. This first layer **80** passes beneath a second meltblown unit **130** where a second layer **82** is placed thereon and joined to the first layer **80**. The second layer **82** is formed by the second meltblown unit **130**. The second meltblown unit includes an extruder **140** fed by a material supply and delivery device **138**. The extruder **140** feeds to a forming die **132**, that is generally similar to the forming die **32** of the first meltblown unit **30**, in that the forming die **132** of the second meltblown unit **130** has a die tip **133** and a pair of ducts **134** and **136** through which streams of heated gas, usually air, are supplied to a second primary stream **142**. As the gas streams from the ducts **134** and **136** merge and entrain the extruded fibers in the second primary stream **142**, the extruded fibers are meltblown into meltblown fibers. The second meltblown unit **130**, however, differs from that of the first meltblown unit **30** in that there additionally is provided a source of particles generally indicated as a particle supply unit **160** including a storage hopper **162**, having a feed device **164** leading to a source of high velocity heated gas **166**, usually air, and a feeder duct **168** providing a first tertiary stream **170** of heated particles to merge with the second primary stream **142**. Upon merging with the second primary stream **142**, portions of the heated particles from the first tertiary stream impact and penetrate into the skin of one or more solidifying meltblown fibers and become embedded in and retained by one or more meltblown fibers. The resulting particle-containing meltblown fibers are subsequently entangled with individualized wood fibers supplied by a second secondary stream **144** exiting through a forming duct **150** from a divellicating apparatus **152** of the second meltblown unit **130** and merging with the second primary stream **142**. In the divellicating apparatus **152**, the picker roll **146** rotates and divellicates the wood pulp sheets **148** as they are unrolled from a pulp supply roll **149**. The wood pulp sheets are divellicated and passed through the forming duct **150** and merged with the second primary stream **142**. Process gas, usually air, is supplied through a passageway **154** of the divellicating apparatus **152**. The second primary stream **142**, now having the wood fibers entangled with the particle-containing meltblown fibers, is then directed as a second layer **82** onto the first layer **80** at a laydown point **165**. A suction device **66** aids in laydown. Some of the meltblown fibers and wood fibers of the second layer **82**, when laid down, become somewhat intermingled with meltblown fibers and wood fibers of the first layer **80** along a formation line **85**. This intermingling is such that an integrated coherent two-layered web is formed suitable for processing and use purposes. However, should the first layer **80** and the second layer **82** be pulled apart, they will generally separate on the formation line **85**. After leaving the first roll **72**, the two-layered web may be further processed by known means such as cutters and stackers, not shown. The moving forming surface **62**, in addition to being supported by the first roll **72**, is also supported by the second roll **74**.

[0037] The apparatus of FIG. 2 is a modified embodiment of the apparatus of FIG. 1 in which the first meltblown unit **30** and the second meltblown unit **130** are placed above a

moving forming surface 62. Below the moving forming surface are located at least 3 suction devices 64, 66 and 169. In addition to the first and second meltblown units, there is now a third meltblown unit 230. This third meltblown unit 230 also includes, as the first and second meltblown units do, an extruder 240 fed by a material supply and delivery device 238, leading to a forming die 232. The forming die 232 has therein a die tip 233 and a pair of ducts 234 and 236 through which streams of heated gas, usually air, are supplied to a third primary stream 242. As the gas streams from the ducts 234 and 236 merge and entrain the extruded fibers in the third primary stream 242, the extruded fibers are meltblown into meltblown fibers. Like the second meltblown unit 130, the third meltblown unit 230 differs from that of the first meltblown unit 30 in that there additionally is provided a source of particles generally indicated as a particle supply unit 260 including a storage hopper 262, having a feed device 264 leading to a source of high velocity heated gas 266, usually air, and a feeder duct 268 providing a second tertiary stream 270 of heated particles to merge with the third primary stream 242. Upon merging the second tertiary stream 270 with the third primary stream 242, portions of the heated particles impact and penetrate into the skin of one or more solidifying meltblown fibers and become embedded in and retained by one or more meltblown fibers. The resulting particle-containing meltblown fibers are subsequently entangled with individualized wood fibers supplied by a third secondary stream 244 exiting through a forming duct 250 from a divellicating apparatus 252 of the third meltblown unit 230 and merging with the third primary stream 242. In the divellicating apparatus 252, the picker roll 246 rotates and divellicates the wood pulp sheets 248 as they are unrolled from a pulp supply roll 249. The pulp sheets are divellicated and passed through the forming duct 250 and merged with the third primary stream 242. Process gas, usually air, is supplied through a passageway 254 of the divellicating apparatus 252. In FIG. 2, a first layer 80 is laid down by the first meltblown unit 30. A second layer 82, containing particles, is sourced from the second meltblown unit 130, and a third layer 84, that is sourced from the third meltblown unit 230, are laid down. Some of the meltblown fibers and wood fibers of the second layer 82, when laid down, become somewhat intermingled with the meltblown fibers and wood fibers of the first layer 80 along a formation line 85. Some of the meltblown fibers and wood fibers of the third layer 84, when laid down, become somewhat intermingled with the meltblown fibers and wood fibers of the second layer 82 along a formation line 85'. This intermingling is such that an integrated coherent three-layered web 89 is formed suitable for processing and use purposes. However, should the first layer 80 and the second layer 82 be pulled apart, they will generally separate on the formation line 85. Similarly, should the second layer 82 and the third layer 84 be pulled apart, they will generally separate on the formation line 85'. After leaving the forming apparatus 20, the coherent integrated three-layered web 89 may be treated by conventional means such as cutters and stackers to prepare it for use in an absorbent article. Consequently, the forming apparatus as illustrated in FIG. 2 is capable of forming meltblown webs with particles in either or both of the second and third layers or with only the second layer containing particles if the particle supply unit 260 is not operated.

[0038] Because the meltblown fibers are typically much longer, thinner, limper and more flexible than the wood fibers, the meltblown fibers twist around and entangle the relatively short, thick and stiff wood fibers as soon as the two fiber streams merge. This entanglement interconnects the two different types of fibers with strong, persistent inter-fiber attachments without any significant molecular, adhesive or hydrogen bonds. In the resulting matrix, the meltblown fibers retain a high degree of flexibility, with many of the meltblown fibers being spaced apart by engagement with the comparatively stiff wood fibers. The entangled wood fibers are free to change their orientation when the matrix is subjected to various types of distorting forces, but the elasticity and resiliency of the meltblown fiber network tends to return the wood fibers to their original positions when the distorting forces are removed. A coherent integrated web is formed substantially by the mechanical entanglement and intermingling of the two different fibers.

[0039] This invention has been described with the formation of a two- or three-layered web. However, it is also within the invention to form coform webs having only a single layer as well as coform webs having more than three layers. For example, the forming apparatus as illustrated in FIG. 1 is capable of forming single-layer coform webs containing particles if the first meltblown unit 30 is not operated. Consequently, it is also within the present invention that webs could have a single layer containing particles, or include multiple layers having one or more layers containing particles in a variety of multi-layered configurations.

[0040] FIG. 3 is illustrative of a cross-section through a coherent integrated two-layered web such as formed by the method and apparatus as illustrated by FIG. 1. A first layer 80 includes wood fibers entangled with nonparticle-containing meltblown fibers. A second layer 82 includes wood fibers entangled with particle-containing meltblown fibers. The particles 86 are also illustrated in FIG. 3. A formation line 85 of the first layer 80 and the second layer 82 is somewhat irregular as some of the meltblown fibers and wood fibers from each layer are intermingled.

[0041] FIG. 4 is illustrative of a cross-section through a coherent integrated three-layered web 89 such as may be formed by the method and apparatus of FIG. 2. As illustrated in the cross-section, a first layer 80 includes wood fibers entangled with nonparticle-containing meltblown fibers. A second layer 82 and a third layer 84 each include wood fibers entangled with particle-containing meltblown fibers. The particles 86 are also illustrated in FIG. 4. A formation line 85, between the first layer 80 and the second layer 82, is somewhat irregular as some of the meltblown fibers and wood fibers from the first and second layers are intermingled. Similarly, a formation line 85', between the second layer 82 and the third layer 84, is somewhat irregular as some of the meltblown fibers and wood fibers from the second and third layers are intermingled.

[0042] FIG. 5 illustrates an alternate embodiment of a meltblown web formed in accordance with the invention. In FIG. 5, a coherent integrated web having three layers is illustrated. A first layer 80 and a third layer 84 include wood fibers entangled with nonparticle-containing meltblown fibers. A second layer 82 includes wood fibers entangled with particle-containing meltblown fibers. The particles 86 are also illustrated in FIG. 5. A formation line 85, between

the first layer **80** and the second layer **82**, is somewhat irregular as some of the meltblown fibers and wood fibers from the first and second layers are intermingled. Similarly, a formation line **85'**, between the second layer **82** and the third layer **84**, is somewhat irregular as some of the meltblown fibers and wood fibers from the second and third layers are intermingled. The structure of this web has the advantage that the particles are not exposed on either exterior surface of the web.

[0043] FIG. 6 illustrates a forming apparatus such as previously illustrated in FIG. 1, but having some of the various optional peripheral devices that may be included with a forming apparatus in accordance with embodiments of the present invention. A base sheet **410** may be placed onto a moving forming surface **62** prior to application of a first layer **80** of a layered web **420**. The base sheet **410** ordinarily would be a pervious sheet such as a spunbonded fabric sheet that would not interfere with gas flow through the moving forming surface **62**. The pervious material would be applied from a roll **416** passing under an applicator roll **418** onto the moving forming surface **62**. If it is desired to improve the strength of the layered web **420**, it may be embossed either ultrasonically or at an elevated temperature so that the meltblown fibers are flattened into a film-like structure in the embossed areas. This film-like structure functions to hold the wood fibers more rigidly in place in the embossed areas. Thus, in the illustrative apparatus of FIG. 6, the layered web **420** is passed through an ultrasonic embossing station having an ultrasonic calendering head **422** vibrating against a patterned anvil roll **424**. The embossing conditions (e.g., pressure, speed, power input) as well as the embossing pattern may be selected to provide the desired characteristics to the web. An intermittent pattern is desired with the area of the web occupied by the embossed areas, after passing through the embossing nip, being about 5 to about 50 percent of the surface area of the web, although the particular embossing conditions for any given material will depend on the composition of the material. It is also known to carry on embossing by the use of heated patterned embossing rolls. In addition to improving the strength of the web, the embossing process also improves the appearance of the web. It is further possible to apply a top sheet **430** to the layered web **420**. The top sheet may be either a pervious sheet, an impervious layer, or another absorbent material. The top sheet **430** is applied from a roll **432** under an applicator roll **434**. It also may be desirable to apply a carrier or bottom sheet **440** beneath the layered web **420**. This carrier or bottom sheet may be particularly desirable if a forming sheet is not used as it will aid in handling of the web and then may be discarded. Thus, it can be readily appreciated that the present invention uniquely provides a variety of webs having one or more layers. It can also be readily appreciated that such webs could also have a single layer containing particles or include multiple layers having one or more layers containing particles in a variety of multi-layered configurations.

[0044] The composition of a layer having meltblown fibers and wood fibers, and the composition of a layer having meltblown fibers, wood fibers and particulate material may be varied over a wide range. The gas-forming of meltblown fibers and wood fibers in the manner described herein results in a web commonly called coform. This coform web may vary between about 10 percent meltblown fibers and about 90 percent wood fibers, and about 90 percent meltblown

fibers and about 10 percent wood fibers. Generally, there is also a surfactant that is added to the web to aid in wetting of the polymer.

[0045] A wide variety of thermoplastic fiber-forming polymers are useful in forming the meltblown fibers, so that webs can be fashioned with different physical properties by the appropriate selection of polymers or combinations thereof. Among the many useful thermoplastic fiber-forming polymers, polyolefins such as polypropylene and polyethylene, polyamides, polyesters such as polyethylene terephthalate, and thermoplastic elastomers such as polyurethanes are anticipated to find the most widespread use in the preparation of the webs described herein.

[0046] The staple fiber blown into the coform may be any fiber that improves the absorbency or other property of the coform. Suitable staple fibers include polyester fibers, nylon fibers, cotton fibers and wood fibers. The preferred staple fiber is a wood fiber as the wood fibers formed from pulp are of desired size, low in cost and of high absorbency.

[0047] By "particle," "particles," "particulate," "particulates" and the like, it is meant that the particulate material is generally in the form of discrete units. The particles can comprise granules, pulverulents, powders or spheres. Thus, the particles may have any desired shape that would allow a portion of each heated particle to slightly penetrate into one or more solidifying meltblown fibers in accordance with the present invention. Desired particle shapes include, for example, cubic, rod-like, polyhedral, spherical or semi-spherical, rounded or semi-rounded, angular, irregular, etc. Shapes having a large greatest dimension/smallest dimension ratio, like, needles, fibers and flakes, are also contemplated for use herein. The desired shaped particles may be coated (gel-coated, protein coated and the like having a particulate core, a porous solid core, a solid core, a semi-solid core, a liquid core, a semi-liquid core, a gaseous core, a semi-gaseous core or combinations thereof) or uncoated (porous solid, solid, semi-solid and the like). It should be noted that more than one kind of particle may be used in some webs of the invention, either in mixture or in different layers. The use of "particle" and "particulate" may also describe an agglomeration comprising more than one particle, particulate or the like.

[0048] A wide variety of particles capable of slightly penetrating into one or more solidifying meltblown fibers in accordance with the present invention have utility in a three-dimensional arrangement in which they can interact with (for example, chemically or physically react with, or physically contact and modify or be modified by) a medium to which the particles are exposed. Included among the variety of particles having utility in the present invention are superabsorbents. The superabsorbent material suitable for incorporation in various embodiments of the present invention may be any superabsorbent that will maintain its particle integrity during the meltblowing process and exhibit good storage, handling, and resistance to gel-blocking properties. Typical of such superabsorbent materials are the water-insoluble hydrocolloidal particles derived from starches that will swell, but not dissolve when exposed to water. Also suitable for various embodiments of the invention are those superabsorbents formed from hydrolyzed cross-linked polyacrylamides, polyacrylates, polymers of acrylic polymers, or their copolymers. Such materials, when

lightly cross-linked, are insoluble and, when dry, are solids that may be heated and blown in a gas stream, and maintain their integrity when impacting one or more solidifying meltblown fibers.

[0049] Also included within the scope and spirit of the present invention are particles suitable for use in controlling odor often emanating from absorbent articles used for absorption of body fluids such as menses, blood, urine, and other excrements. Suitable odor-controlling particles include activated charcoal or active carbon, baking soda, chitin, deodorizing materials such as clays, diatomaceous earth, zeolites, and complexes of potassium permanganate with active alumina, used alone or in combination.

[0050] Various embodiments of the present invention also contemplate including particles to control air-borne and vapor-borne odors, as well as including particulate material to slowly release a masking scent. The release of a masking scent can be achieved by using an absorbent material that slowly releases an incorporated scent, similar to the mechanism by which superabsorbers slowly release moisture. As an example, time release fragrances, using a fragrance adsorbed on a particulate silica surface, can be incorporated in the meltblown web. Other deodorants and masking scents, also known in the art, which can be incorporated in particle form in the web, include the malodates, commonly known as chemical masking agents.

[0051] The amount of particles included in the meltblown web can depend on the particular use to be made of the web. In the present invention, particles may be added in any amount from a very minimum to an upper range which would be the amount that would stay in the web without causing the web to lose its integrity or the particles to undesirably drop out of the web during handling. The particles may be about 0.1 to about 80 percent, by weight, of the layer containing the particles. Generally, it is desired that the coform of any particular layer vary between about 90 weight percent wood fibers and about 50 weight percent wood fibers and between about 10 weight percent meltblown fibers and about 50 weight percent meltblown fibers for high absorbency and good handling properties.

[0052] In order to achieve a particular combination of properties in the web, there are a number of variables in both the primary and secondary streams that can be controlled along with the composition and basis weight of the web. Process parameters susceptible to control in a primary stream are the gas temperature, which is desirably in the range of about 600 to about 700° F. (about 315 to about 372° C.) within the ducts of the forming die; the gas volume, which is desirably in the range of about 250 to about 455 cubic feet per minute (about 118,000 to about 215,000 cubic centimeters per second) within the ducts of the forming die; the polymer extrusion rate, which is desirably in the range of about 0.25 grams per hole per minute; the polymer temperature; and the ratio of gas to polymer (mass flow rates) which is desirably in the range of about 10:1 to about 100:1. Variables that can be controlled in a secondary stream are the gas flow rate and the velocity of the picker roll; the gas velocity which is desirably in the range of about 3,000 to about 15,000 feet per minute (about 15 to about 76 meters per second); and the staple fiber size which is typically on the order of about 3 millimeters in length. Variables that can be controlled in a tertiary stream include the gas temperature

which is typically in the range of about 130 to about 390° F. (about 54 to about 200° C.), and desirably about 150 to about 300° F. (about 65 to about 150° C.); the gas volume, which is desirably in the range of about 5 to about 20 cubic feet per minute (about 2,400 to about 95,000 cubic centimeters per second); and the particle size which is typically about 10 to about 350 microns in diameter. To minimize the likelihood of the meltblown fibers breaking upon impact of the particle, it is desired that the impact force (i.e., the velocity and mass of the particle) be no greater than the tensile strength (i.e., the maximum stress that a meltblown fiber can bear before it breaks or pulls apart, measured in force per unit of a cross-sectional area of the original meltblown fiber) of an individual meltblown fiber. If desired, additional streams of gas can be similarly adapted for use with the present invention.

[0053] The relationship between primary and secondary streams can also be controlled, and it is generally desired that the ratio of the gas velocities in primary and secondary streams be in the range of about 5:1 to about 10:1. The angle between primary and secondary streams at their point of merger may also be varied, but it is generally desired to have the two streams come together perpendicular to each other. Similarly, the particular point at which the two streams are merged, relative to the die tip of the forming die in the upstream direction and the moving forming surface in the downstream direction, may be varied.

[0054] The relationship between a primary stream and a tertiary stream can also be controlled, and it is generally desired that the ratio of the gas volumes in a primary stream and a tertiary stream be in the range of about 12:1 to about 90:1, depending, of course, on the size and mass of the particles. The angle between a primary stream and a tertiary stream at their point of merger may also be varied, but it is generally desired to have the two streams come together perpendicular to each other. Similarly, the particular point at which the two streams are merged, relative to the die tip of the forming die in the upstream direction and the moving forming surface in the downstream direction, may be varied.

[0055] A tertiary stream having heated particles can merge into a primary stream having meltblown fibers between the die tip of the forming die and the moving forming surface, provided that the heated particles can penetrate into the skin of one or more solidifying meltblown fibers upon impact. Thus, depending on the polymer, as well as the meltblowing method conditions, the point of merger typically is about 0 to about 2 inches (about 0 millimeters to about 51 millimeters) below the die tip. Desirably, the point of merger is about 0.5 to about 1 inch (about 13 to about 25 millimeters) below the die tip. To minimize the amount of residual heat lost by the particles to the environment upon exit from the feeder duct of a particle supply unit, it is desired that the particles travel a distance of about 0 to about 1 inch (about 0 to about 25 millimeters) upon exiting the feeder duct and merging with a primary stream. It is even more desired that the particles travel a distance of about 0 to about 0.5 inch (about 0 to about 13 millimeters) upon exiting the feeder duct and merging with a primary stream.

[0056] The invention has been described with the formation of coform webs. It is also within the invention to form successive layers of gas-formed meltblown webs, not containing wood fibers or other additional staple fibers, in which

the first layer is without particles while the second or other successive layer does contain particles. In addition, it is also within the present invention to form a single layer gas-formed meltblown web, not containing wood fibers or other additional staple fibers, in which the single layer includes particles. For example, the forming apparatus as illustrated in **FIG. 1** is capable of forming single-layer meltblown webs with particles if both the first meltblown unit **30** and the divellicating apparatus **152** of the second meltblown unit **130** are not operated. The phrases “meltblown layer” and “meltblown sheet”, as used herein, mean a gas-formed meltblown layer of entangled meltblown fibers not containing staple fibers, whereas the term “coform” is a layer, as previously described, that contains staple fibers in addition to meltblown fibers. Typically the gas used in forming the gas-formed meltblown layers is air. Consequently, such a process is sometimes referred to as an air-forming or air-formed process which, in turn, typically produces one or more air-formed layers.

[0057] In an alternative embodiment, a layered web could be formed by the illustrated apparatus of the drawings of **FIGS. 1, 2** and **6** by not operating the pulp sheet divellicating apparatus. In another alternative embodiment, a structure of one or more coform layers in coherent integral combination with one or more meltblown layers is also possible. Coform layers are desired over meltblown layers for most purposes as coform layers are higher in absorbency. The formation of various combinations of meltblown layers and coform layers is within the invention as is the placement of particles in either a meltblown layer or a coform layer.

[0058] A particle-containing web of the present invention finds uses in a variety of fields, depending, of course, on the particles employed. The web is particularly suitable for use in absorbent articles such as perineal shields and undergarments for the incontinent, bedpads, diapers, feminine hygiene products, and for body dressings such as those for wounds.

[0059] The novel method of the present invention renders the web substantially nondusting. As a result of rendering the web substantially nondusting, the web of the present invention advantageously may be economically die-cut into a variety of articles having predetermined shapes with substantially no particles undesirably dropping out of the sides of either the web or the die-cut article. The ability to die-cut the web enables the manufacturer to produce an absorbent article more efficiently and economically, resulting in lower production costs which could be passed on to the consumer. A further advantage of rendering the web substantially nondusting is that the die-cut absorbent articles need not be subjected to the additional step and expense of adding a peripheral seal to maintain the particles in the die-cut articles. In addition, certain embodiments of the web of the present invention have the advantage that the particles will not be presented to a body surface.

[0060] As previously noted, depending on the type of particles incorporated therein, the web of the present invention has a variety of uses. For example, the material can be used in absorbent articles. **FIGS. 7** and **8** depict one embodiment of such an absorbent article. The absorbent article **450** of **FIGS. 7** and **8** is formed with the absorbent material of **FIG. 3**. The absorbent article **450** has an impervious polymer wrapping **454** and a body-side pervious

member **452**. The impervious wrapping is adhered to the pervious liner by glue lines at **456** and **458**. The ends of the absorbent article may be ultrasonically sealed at **460** and **462**. The coform material of layer **80** that does not have particulate material is exposed to the body of the wearer. The absorbent article **450** may be utilized for absorption of any body exudate. Depending on the type of particulate material used, typical uses of the absorbent article would include as incontinent devices, catamenial devices, diapers, or wound dressings.

[0061] Referring now to **FIG. 9**, another embodiment of an absorbent article is depicted. In **FIG. 9**, an absorbent article **610** is shown which is designed to be worn by a woman to absorb body fluids such as menses, blood, urine, and other excrements. The absorbent article **610** can be a sanitary napkin, a panty liner, a panty shield, an incontinent garment, or the like. A sanitary napkin is designed to absorb a greater quantity of fluid than a panty liner or panty shield. A sanitary napkin is usually longer, wider, and thicker than a panty liner and may contain a superabsorbent or other type of material, such as peat moss, which can increase its absorbent capacity. Sanitary napkins can have a length of about 6 to about 13 inches (about 152 to about 330 millimeters), a width of about 2 to about 5 inches (about 51 to about 127 millimeters), and a thickness of about 0.25 to about 25 millimeters. The sanitary napkin can have a variety of shapes including rectangular, hourglass, oval, or race-track.

[0062] Panty liners, on the other hand, are relatively thin and small and can, but usually do not, contain a superabsorbent. A panty liner can have a length of about 5 to about 10 inches (about 127 to about 254 millimeters), a width of about 2 to about 3 inches (about 51 to about 76 millimeters), and a thickness of about 1.3 to about 3.6 millimeters.

[0063] Incontinent garments are usually equal to or larger than sanitary napkins. Incontinent garments can have a length of about 6 to about 33 inches (about 152 to about 838 millimeters), a width of about 2.5 to about 30 inches (about 64 to about 762 millimeters), and a thickness of about 19 to about 76 millimeters. Incontinent garments commonly have a rectangular or an hourglass shape.

[0064] The absorbent article **610** can include a liquid-permeable cover **612**, a liquid-impermeable baffle **614**, and an absorbent **616** positioned therebetween. The cover **612** can be formed of a nonwoven material, such as spunbond. The baffle **614** can be formed from a thin polyethylene film. The cover **612** and the baffle **614** can be eliminated, and the function of these two layers can be performed by other means. For example, the top surface of the absorbent **616** can serve as the cover, and an adhesive coating or a foam layer can replace the baffle.

[0065] The absorbent **616** has a body-facing surface and a garment-facing surface. The absorbent **616** can be a hydrophilic material formed from various types of natural or synthetic fibers including cellulose fibers, surfactant treated meltblown fibers, wood fibers, regenerated cellulose or cotton fibers, or a blend of pulp and other fibers. A desired absorbent material is the particle-containing coform material described herein and formed with the forming apparatus of **FIG. 1**. A coform mixture of about 70 weight percent wood fibers with about 30 weight percent polypropylene meltblown fibers generally works well.

[0066] The absorbent can also contain thermoplastic polymers which can be permanently deformed by the application of heat and pressure. Such materials include polypropylene, nylon, polyethylene, polyesters, etc. Typical of such materials are bonded carded webs, meltblown and spunbond fabrics.

[0067] The cover **612**, baffle **614**, and absorbent **616** are sandwiched together to form a pad **618**. The pad **618** includes a central portion **620** with longitudinally-extending sides **622** and **624**. The sides **622** and **624** can be either linear or non-linear so that the pad **618** can have various configurations. For example, the pad **618** can have a rectangular, a racetrack, an hourglass, or an oval-shaped configuration.

[0068] It should be noted that the pad **618** has a uniform thickness throughout. This enables the pad **618** to be die-cut during manufacture from a large sheet of laminated material. In addition, the pad **618** could optionally have tabs as disclosed in U.S. Pat. No. 5,429,630, issued Jul. 4, 1995, to Beal et al., which is incorporated herein by reference.

[0069] The pad **618** can contain a plurality of embossed areas **630**. In **FIG. 9**, the embossed areas **630** are shown as sinusoidal lines formed parallel to the longitudinal axis of the absorbent article **610**. The embossed areas can add integrity to the absorbent article **610** by securing the cover to the absorbent **616**. The use of embossed lines gives an indication of ripples, or waves, which some consumers tend to associate with fluid absorption. The embossed areas **630** can be evenly spaced throughout the width of the absorbent article **610**. The embossed areas **630** can also be in the form of dots, flowers, or the like.

[0070] The embossed lines **630** can be formed by running a laminate material through the nip of two rolls, the bottom roll being a pressure roll and the top roll being an embossing roll. The embossment will cause the cover **612** to be pinched down into the absorbent **616** and thereby assist the absorbent article **610** in being held together.

[0071] The pad **618** is formed out of a large sheet of laminate material which includes a cover **612**, baffle **614**, and absorbent **616**. The pad **618** can be die-cut from this sheet of material and will have a body-facing surface **632** and a garment-facing surface **634**. The body-facing surface **632** can be formed by the liquid-permeable cover **612**, and the garment-facing surface **634** can be formed by the liquid-impermeable baffle **614**.

[0072] Referring to **FIG. 9**, the absorbent article **610** further includes attachment means **636** secured to the garment-facing surface **634**. The attachment means **636** can be a garment-attachment adhesive which provides a means for removably securing the pad **618** to the crotch portion of an undergarment, not shown. A garment attachment adhesive which works well is adhesive NS34-5516 which is commercially available from National Starch Company located at 10 Finderne Ave., Bridgewater, N.J. 08807. The attachment means **636** can include an adhesive **640** located on the central portion **620**. The particular design and configuration of the attachment means **636** can vary.

[0073] Referring again to **FIG. 9**, the absorbent article **610** further includes at least one piece of release paper **646** covering the attachment means **636**. The release paper **646** and the pad **618** can have coterminous exterior peripheries thereby facilitating a die-cut operation during manufacture.

It is also possible to cut the release paper such that it covers all of the adhesive but has a configuration which lies within the outer periphery of at least a portion of the pad **618**. For example, the release paper could run the length of the absorbent article **610**, but be narrower than the overall width of the absorbent article **610**. The release paper could also be cut larger than the pad **618**, for example, having an outlying portion at one end so that the consumer could grasp the release paper and easily remove it from the pad **618**.

[0074] The absorbent article **610** is designed to be die-cut from a sheet of laminate material including the cover **612**, the baffle **614**, the absorbent **616**, the attachment means **636**, and the release paper **646**. The die-cutting operation enables the manufacturer to produce the absorbent article **610** efficiently and economically. Lower production costs could be passed on to the consumer.

[0075] Referring to **FIG. 10**, an absorbent article **648**, such as a sanitary napkin or panty liner is shown. The absorbent article **648** is similar in construction to that discussed in **FIG. 9**, except that it includes a continuous embossed line **650** formed about $\frac{1}{64}$ to about $\frac{1}{2}$ inch (about 0.4 to about 13 millimeters) inward from the exterior periphery of the absorbent article **648**. The embossed line **650** provides integrity between the cover and the absorbent and is advantageous in holding the article together when it is being removed from the crotch portion of an undergarment. The absorbent article **648** has a racetrack configuration with a longitudinal axis designated X-X and a transverse axis designated Y-Y. The absorbent article **648** also contains a plurality of sinusoidal embossed lines **652** which extend lengthwise across the absorbent article **648** with respect to the longitudinal axis X-X. The embossed lines **652** may extend beyond the peripheral embossed line **650**. When the absorbent article **648** is a sanitary napkin, it can have a surface area of less than about 30 square inches (about 194 square centimeters). Desirably, when the absorbent article **648** is a sanitary napkin, it has a surface area of less than about 25 square inches (about 161 square centimeters). When the absorbent article **648** is a panty liner, the surface area can be less than about 20 square inches (about 129 square centimeters).

[0076] When the absorbent article is a sanitary napkin, it can have a basis weight of less than about 400 grams per square meter, desirably less than about 300 grams per square meter, and most desirably less than about 250 grams per square meter. For a panty liner, the basis weight can be less than about 200 grams per square meter. Desirably, when the absorbent article is a panty liner, it has a basis weight of less than about 190 grams per square meter; more desirably, a basis weight of less than about 170 grams per square meter; and most desirably, a basis weight of less than about 150 grams per square meter. For a panty liner containing particulate material, the particulates can be incorporated in the meltblown web in amounts ranging from about 0.5 to about 30 grams per square meter, while the non-woven absorbent has a basis weight ranging from about 40 to about 350 grams per square meter.

EXAMPLES

[0077] The following Examples describe various embodiments of the invention. Other embodiments within the scope of the claims herein will be apparent to one skilled in the art

from consideration of the specification or practice of the invention as disclosed herein. It is intended that the specification, together with the Examples, be considered exemplary only, with the scope and spirit of the invention being indicated by the claims which follow the Examples. Parts, percentages and ratios are by weight unless otherwise indicated.

Example 1

[0078] Meltblowing Method Conditions:

[0079] Polymer Conditions:

[0080] Polymer: ESCORENE Polypropylene (granular resin), Grade PD 3505G, commercially available from Exxon Chemical Company, 13501 Katy Freeway, Houston, Tex. 77079-1398, USA

[0081] Temperature of Polymer at the Die Tip: approximately 521° F. (approximately 272° C.)

[0082] Die Tip Pressure: approximately 83 psig

[0083] Air Gap in the Ducts of the Forming Die: 18 to 20 thousandths of an inch

[0084] Average Temperature of Air in the Ducts of the Forming Die: approximately 570° F. (approximately 299° C.)

[0085] Particle Conditions:

[0086] Particles: Baking Soda. The particles had a size range of about 5 to about 350 microns in diameter.

[0087] Exit Temperature of Tertiary Stream: approximately 165° F. (approximately 74° C.)

[0088] Gas Volume of Tertiary Stream: approximately 20 cubic feet per minute (approximately 95,000 cubic centimeters per second)

[0089] Pulp/Polymer Ratio: 70/30

[0090] Coform Only: 170 grams per square meter

[0091] The method described above resulted in the particles being incorporated in the meltblown web in a predetermined amount of about 2 to about 3 grams per square meter.

Example 2

[0092] Example 1 utilized the same Meltblowing Method Conditions as Example 4, except that the only particles present were ABSCENTS® 5000. The particles had a size range of about 20 to about 300 microns in diameter. The method described herein resulted in the particles being incorporated in the meltblown web in a predetermined amount of about 2 to about 3 grams per square meter.

Example 3

[0093] Meltblowing Method Conditions:

[0094] Polymer Conditions:

[0095] Polymer: PRO-FAX® Polypropylene (polypropylene homopolymer, homopolymer pellets), Grade PF-015, commercially available

from Himont Incorporated, Hercules Plaza, Wilmington, Del. 19894, USA

[0096] Temperature of Polymer at the Die Tip: approximately 510° F. (approximately 265° C.)

[0097] Die Tip Pressure: approximately 86 psig

[0098] Air Gap in the Ducts of the Forming Die: 18 to 20 thousandths of an inch

[0099] Average Temperature of Air in the Ducts of the Forming Die: approximately 565° F. (approximately 296° C.)

[0100] Particle Conditions:

[0101] Particles: 85% Baking Soda and 15% ABSCENTS® 5000 (ABSCENTS® 5000 is an odor-controlling particle commercially available from UOP LLC, 25 East Algonquin Road, P.O. Box 5017, Des Plaines, Ill. 60017, USA). The particles had a size range of about 5 to about 300 microns in diameter.

[0102] Exit Temperature of Tertiary Stream: approximately 155° F. (approximately 68° C.)

[0103] Gas Volume of Tertiary Stream: approximately 20 cubic feet per minute (approximately 95,000 cubic centimeters per second)

[0104] Pulp/Polymer Ratio: 70/30

[0105] Coform Only: 170 grams per square meter

[0106] The method described above resulted in the ABSCENTS® 5000 particles being incorporated in the meltblown web in a predetermined amount of about 2 to about 3 grams per square meter.

Example 4

[0107] Example 4 utilized the same Meltblowing Method Conditions as Example 3, except that the only particles present were ABSCENTS® 5000. The particles had a size range of about 20 to about 300 microns in diameter. The method described herein resulted in the particles being incorporated in the meltblown web in a predetermined amount of about 2 to about 3 grams per square meter.

Example 5

[0108] Example 5 utilized the same Meltblowing Method Conditions as Example 3, except that the only particles present were ABSCENTS® 3000, an odor-controlling particulate, commercially available from UOP LLC. The particles had a size range of about 5 to about 25 microns in diameter. The method described herein resulted in the particles being incorporated in the meltblown web in a predetermined amount of about 2 to about 3 grams per square meter.

Example 6

[0109] Meltblowing Method Conditions:

[0110] Polymer Conditions:

[0111] Polymer: Polypropylene (granules), Grade PD 3485, commercially available from Exxon Chemical Company

[0112] Temperature of Polymer at the Die Tip: approximately 519° F. (approximately 271° C.)

[0113] Die Tip Pressure: approximately 85 psig

[0114] Air Gap in the Ducts of the Forming Die: 18 to 20 thousandths of an inch

[0115] Average Temperature of Air in the Ducts of the Forming Die: approximately 571° F. (approximately 299° C.)

[0116] Particle Conditions:

[0117] Particles: 85% Baking Soda and 15% ABSCENTS® 5000. The particles had a size range of about 5 to about 300 microns in diameter.

[0118] Exit Temperature of Tertiary Stream: approximately 155° F. (approximately 68° C.)

[0119] Gas Volume of Tertiary Stream: approximately 20 cubic feet per minute (approximately 95,000 cubic centimeters per second)

[0120] Pulp/Polymer Ratio: 70/30

[0121] Coform Only: 170 grams per square meter

[0122] The method described above resulted in the ABSCENTS® 5000 particles being incorporated in the meltblown web in a predetermined amount of about 2 to about 3 grams per square meter.

Example 7

[0123] Example 7 utilized the same Meltblowing Method Conditions as Example 6, except that the only particles present were ABSCENTS® 5000. The particles had a size range of about 20 to about 300 microns in diameter. The method described herein resulted in the particles being incorporated in the meltblown web in a predetermined amount of about 2 to about 3 grams per square meter.

Example 8

[0124] Example 8 utilized the same Meltblowing Method Conditions as Example 6, except that the only particles present were ABSCENTS® 3000 from UOP LLC. The particles had a size range of about 5 to about 25 microns in diameter. The method described herein resulted in the particles being incorporated in the meltblown web in a predetermined amount of about 2 to about 3 grams per square meter.

[0125] In view of the foregoing, it will be seen that the several advantages of the invention are achieved and other advantageous results attained.

[0126] As various changes could be made in the above methods and meltblown webs without departing from the scope of the invention, it is intended that all matter contained in the foregoing description and shown in the accompanying drawings shall be interpreted as illustrative and not in a limiting sense.

We claim:

1. A substantially nondusting meltblown web, comprising:

(a) at least one air-formed nonparticle-containing layer comprising meltblown fibers and staple fibers, the staple fibers engaging at least some of the meltblown fibers to space the meltblown fibers apart from each other, and the staple fibers being retained within the nonparticle-containing layer by entanglement with the meltblown fibers; and

(b) at least one air-formed particle-containing layer comprising meltblown fibers, particles and staple fibers, the particles being retained in the particle-containing layer by surface penetration into the meltblown fibers, the staple fibers engaging at least some of the meltblown fibers to space the meltblown fibers apart from each other, and the staple fibers being retained within the particle-containing layer by entanglement with the meltblown fibers.

2. The web of claim 1, wherein the particle-containing layer comprises about 0.1 to about 80%, by weight, particles.

3. The web of claim 1, wherein the particles are heat-stable particles.

4. The web of claim 1, wherein the staple fibers are wood fibers.

5. The web of claim 1 being die-cuttable.

6. The web of claim 1, further comprising at least one particle-containing layer between at least two nonparticle-containing layers.

7. The web of claim 6, wherein the particles are heat-stable particles.

8. The web of claim 6, wherein the staple fibers are wood fibers.

9. The web of claim 6 being die-cuttable.

10. A substantially nondusting meltblown web, comprising at least one air-formed layer comprising meltblown fibers and particles, the particles being retained within the layer by surface penetration into the meltblown fibers.

11. The web of claim 10, wherein the particles are heat-stable particles.

12. The web of claim 10 being die-cuttable.

13. A substantially nondusting meltblown web, comprising at least one layer comprising meltblown fibers, particles and staple fibers, the particles being retained within the layer by surface penetration into the meltblown fibers, the staple fibers engaging at least some of the meltblown fibers to space the meltblown fibers apart from each other, and the staple fibers being retained within the layer by entanglement with the meltblown fibers.

14. The web of claim 13, wherein the particle containing layer comprises about 0.1 to about 80%, by weight, particles.

15. The web of claim 13, wherein the particles are heat-stable particles.

16. The web of claim 13, where the staple fibers are wood fibers.

17. The web of claim 13 being die-cuttable.