

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
7 September 2007 (07.09.2007)

PCT

(10) International Publication Number
WO 2007/099439 A2

(51) International Patent Classification: Not classified

(21) International Application Number:
PCT/IB2007/000482

(22) International Filing Date:
28 February 2007 (28.02.2007)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
11/366,365 1 March 2006 (01.03.2006) US

(71) Applicant (for all designated States except US): **MEDINOL, LTD.** [IL/IL]; P.o. Box 58165, Kiryat Atidim, Building 7, 61581 Tel Aviv (IL).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **RICHTER, Jacob** [IL/IL]; 8 Anafa Street, 47226 Ramat Hasharon (IL).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM,

AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LV, LY, MA, MD, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.


(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— without international search report and to be republished upon receipt of that report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: STENT WITH VARIABLE FEATURES TO OPTIMIZE SUPPORT AND METHOD OF MAKING SUCH STENT

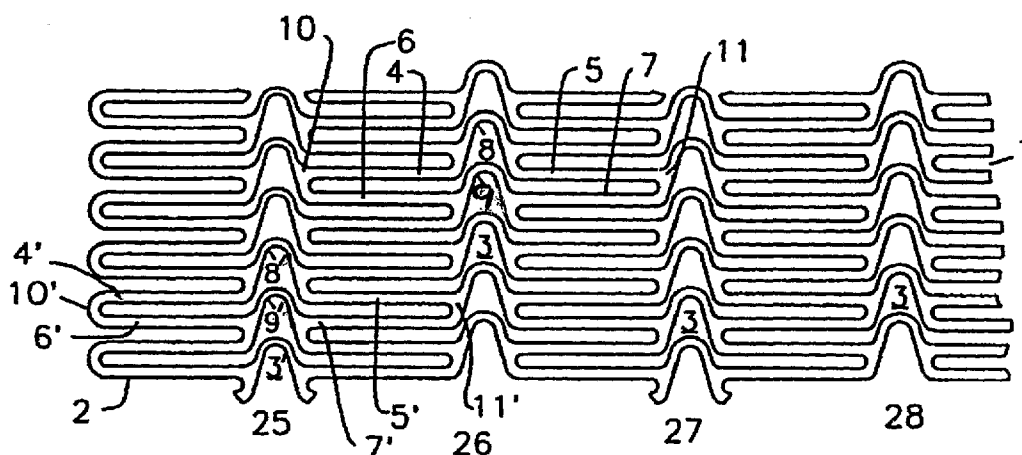

(57) Abstract: An intravascular stent especially suited for implanting in lumens having variable characteristics such as curvatures, changing diameters as found in ostial regions or variable wall compliance during systolic cycles. The stent can include an end region which is fabricated to have a greater radial strength than the remaining axial length of the stent. Such a stent is particularly suited for use in ostial regions, which require greater support near the end of the stent. The stent alternatively can include sections adjacent the end of the stent with greater bending flexibility than the remaining axial length of the stent. Such a stent is particularly suited for use in curved arteries. The stent can be constructed with an end that has greater radial strength and sections adjacent the end with greater bending flexibility. Such a stent prevents flaring of the stent end during insertion. The stent can also be constructed to have increased longitudinal flexibility when expanded such that it flexes with the vessel wall during systolic cycles.



WO 2007/099439 A2

STENT WITH VARIABLE FEATURES TO OPTIMIZE
SUPPORT AND METHOD OF MAKING SUCH STENT

CROSS-REFERENCE TO RELATED APPLICATIONS

[0001] This application is a continuation-in-part of Serial No. 09/599,158 filed June 21, 2000, which is a continuation of Serial No. 09/040,145 filed March 17, 1998 (now U.S. Patent No. 6,676,697), which is a division of Serial No. 08/716,039 filed September 16, 1996 (now U.S. Patent No. 5,807,404).

BACKGROUND OF THE INVENTION

1. Field of the Invention

[0002] The present invention relates generally to stents for implanting into vessels of a living body. In particular, the present invention relates to intraluminal stents which provide radial support, stability and coverage of the vessel wall when expanded and which may be especially suited for implanting in a variety of lumens having variable characteristics, such as variable curvature, variable diameter, e.g. as found in ostia, and variable wall compliance during systolic cycles.

2. Description of the Prior Art

[0003] It is well known to use a stent to expand and impart support to different bodily conduits, such as blood vessels, by expanding a tube-like structure inside the vessel requiring support against collapse or closure. U.S. Pat. No. 5,449,373 shows a stent preferably used for vascular implantation as part of a balloon angioplasty procedure. The stent of U.S. Pat. No. 5,449,373 may be delivered through, or implanted in, a curved vessel. One shortcoming of conventional stents is that they may have deficiencies due to "end effects" where the ends of the stent tend to "flare out" during insertion or after expansion or have a decreased radial force at the ends after expansion. Still another shortcoming of conventional stents is they do not have variable properties (e.g., flexibility and rigidity) to accommodate any different characteristics of the vessel (e.g., curvature, diameter and shape) or to comply with the vessel's natural flexing during systolic cycles.

SUMMARY AND OBJECTS OF THE INVENTION

[0004] The present invention provides for various embodiments of an intraluminal stent which includes varied or different mechanical properties along the axial length of the stent in order to improve stent end effects, to accommodate variable vessel features or to comply with the vessel's natural flexing during systolic cycles. As a result, the various embodiments of the present invention allow for variable properties such as flexibility or radial support between axial regions of the stent. These varied properties can be accomplished in a number of different ways, including decreasing or increasing the thickness or width of elements of one or more of the sections relative to other sections and/or increasing or decreasing the axial length of one or more of the sections and/or changing the cell shape and size and/or changing material properties (e.g., strength, elasticity, etc.) of the material in one section relative to other sections.

[0005] The various embodiments of the stents of the present invention may be adapted to provide more flexibility at the ends to allow the stent to accommodate the curvature of a vessel in which the stent is implanted. The degree of flexibility and the distance from the end of the stent to which the extra flexibility is imparted may be varied as specific applications dictate. This flexibility at the ends reduces the chance of a potential trauma point being created in the vessel by the stent tip pressing on the wall outside of the curve if the stent is not flexible enough along its longitudinal axis. In one embodiment of the present invention, flexibility of the stent ends is increased by reducing the gauge of the material used in a section or sections at the stent ends. In another embodiment the flexibility of the stent ends is increased by changing the dimensions of a section or sections at the stent ends. In yet another embodiment of the invention, the flexibility of the stent ends is increased by changing both the dimensions and the gauge of the material used in a section or sections at the stent ends.

[0006] The various embodiments of the stents of the present invention may also be adapted to insure increased radial strength at the ends. Radial strength is the resistance of a section of the stent, in an expanded state, to radial contraction. Increasing the radial strength of a stent at the ends is particularly advantageous for stents supporting ostia. Because lesions at an ostium tend to be more calcified or hardened, and therefore require more support, the section of the stent supporting the ostium must be relatively strong. It is also the case that a stent with uniform characteristics has a decreased radial force at the end due to the "end effect" whereby the last row has no support on one side. In one embodiment of the present invention, the strength of the stent at the end supporting, e.g., the ostium, is increased by reducing the length of some sections at the stent end.

[0007] The various embodiments of the stent of the present invention also reduce the chance of "flare" at the end of the stent while the stent is being fed into a vessel. During insertion of the catheter delivery system into a curved vessel, the delivery system, including the stent crimped on it, bend along the curvature of the vessel. This bending of the stent can cause a "flaring out" of the leading edge of the stent. This flaring could cause the stent to catch on the surface of the vessel which could result in trauma to the vessel, could inhibit further insertion and proper positioning in the target area, and could cause plaque to break off, which could embolize and clog the vessel. In one embodiment of the present invention, flare is minimized by making the section at the stent end stronger by reducing its length, and by making sections adjacent to the stent end more flexible by reducing their widths, thus, decreasing the bending strength of those sections. Bending strength is the resistance of a section of the stent to axial bending. As a result, the end of the stent remains tightly crimped on the balloon, and the bending moment is taken up by the deformation of the more flexible sections. Upon expansion, the reduced bending strength allows the end of the stent to curve and fit better the curvature of the vessel, thereby, reducing the pressure of the tip of the stent on the internal wall of the vessel being treated.

[0008] It is an object of this invention to provide a stent which does not have sharp points or protrusions at its end concentrating pressure on the vessel's wall upon expansion of the stent in a curved portion of a vessel.

[0009] It is another object of this invention to provide a stent having a radial force at its distal end that is greater than the radial force in the portion of the stent proximal to the distal end.

[0010] It is yet another object of this invention to provide an expandable stent, comprising: a plurality of interconnected flexible cells defining a stent having a proximal end and a distal end and a longitudinal axis, the cells arranged in a plurality of interconnected flexible rows disposed along the longitudinal axis of the stent with a distal row disposed at the distal end of the stent and a proximal row disposed at the proximal end of the stent, wherein the cells disposed in the distal row of the stent are adapted to exert greater radial force and are further adapted to be more flexible than the cells disposed in the rows disposed between the distal row and the proximal end of the stent.

[0011] It is still another object of this invention to provide an expandable stent, comprising: a plurality of interconnected flexible cells defining a stent having a proximal end and a distal end and a longitudinal axis, the cells arranged in a plurality of interconnected flexible rows disposed along the longitudinal axis of the stent with a distal row disposed at the distal end of said stent and a proximal row disposed at the proximal end of the stent, wherein the cells in the distal row of the stent and the cells disposed in the proximal row of the stent are adapted to exert greater radial force and are further adapted to be more flexible than the cells disposed in the rows disposed between the distal row and the proximal row.

[0012] It is another object of this invention to provide an expandable stent, comprising: a) a plurality of interconnected flexible cells defining a stent having a proximal end and a distal end and a longitudinal axis, the cells arranged in a plurality of interconnected flexible rows disposed along the longitudinal axis of the stent with a distal row disposed at

the distal end of the stent and a proximal row disposed at the proximal end of the stent, each of the flexible cells comprising a first member, a second member, a third member, and a fourth member; b) a first C-shaped loop disposed between the first member and the third member; c) a second C-shaped loop disposed between the second member and the fourth member; d) a first flexible connector disposed between the first member and the second member; and e) a second flexible connector disposed between the third member and the fourth member, wherein the cells of the distal row are provided with first and third members that are shorter than the second and fourth members in the distal row, and wherein the distal row is provided with first and second flexible connectors that are more flexible than the flexible connectors in the cells in the other rows of the stent.

[0013] It is yet another object of this invention to provide an expandable stent, comprising: a) a plurality of interconnected flexible cells defining a longitudinal stent having a proximal end and a distal end and a longitudinal axis, the cells arranged in a plurality of interconnected flexible rows disposed along the longitudinal axis of the stent with a distal row disposed at the distal end of the stent and a proximal row disposed at the proximal end of the stent, each of the flexible cells comprising a first member, a second member, a third member, and a fourth member; b) a first C-shaped loop disposed between the first member and the third member; c) a second C-shaped loop disposed between the second member and the fourth member; d) a first flexible connector disposed between the first member and the second member; and e) a second flexible connector disposed between the third member and the fourth member, wherein the cells of the distal row are provided with first and third members that are shorter than the second and fourth members in the distal row, and wherein the distal row, and the row proximal to the distal row, are provided with first and second flexible connectors that are more flexible than the flexible connectors in the other rows of the stent.

[0014] It is a further aspect of this invention to provide an expandable stent comprising: a) a plurality of flexible cells defining a stent having a proximal end and a distal end and a longitudinal axis, the cells arranged in a plurality of flexible rows along the longitudinal axis with a distal row disposed at the distal end of the stent and a proximal row disposed at the proximal end of the stent, each of the flexible cells comprising a first member, a second member, a third member, and a fourth member; b) a first C-shaped loop disposed between the first member and the third member; c) a second C-shaped loop disposed between the second member and the fourth member; d) a first flexible connector disposed between the first member and the second member; and e) a second flexible connector disposed between the third member and the fourth member, wherein the cells of the distal row are provided with first and third members that are shorter than the second and fourth members in the distal row, and wherein the cells of the proximal row are provided with second and fourth members that are shorter than the first and third members in the proximal row, and wherein the distal row, and the row proximal to the distal row, and the proximal row and the row distal to the proximal row are provided with first and second flexible connectors that are more flexible than the flexible connectors in the other rows of the stent.

[0015] It is yet another object of this invention to provide an expandable stent, comprising: a plurality of flexible cells defining a stent having a proximal end and a distal end, the stent provided with means for imparting a radial force at its distal end that is greater than the radial force in the portion of the stent proximal to the distal end.

[0016] It is yet a further object of this invention to provide an expandable stent, comprising: a plurality of flexible cells defining a stent having a proximal end and a distal end, the stent provided with means for imparting a radial force at its proximal and distal ends that is greater than the radial force of that portion of the stent disposed between the proximal and distal ends.

[0017] It is another object of this invention to provide an expandable stent for treating a lumen having a unique characteristic along a portion of the lumen, comprising: a plurality of interconnected flexible cells, the cells arranged in a plurality of interconnected flexible rows defining a stent having a proximal end and a distal end and a longitudinal axis, wherein at least one of the rows is adapted to accommodate the unique characteristic of that portion of the lumen in contact with the adapted row or rows.

[0018] It is yet another object of this invention to provide a single flexible stent with a unibody or one-piece construction which is capable of imparting support to a lumen or vessel along the entire length of the stent and in which portions of the stent are adapted or modified so as to have characteristics, e.g., bending strength or radial strength, that are different than the characteristics or features in the rest of the stent along its longitudinal axis or about its circumference. The change in stent features will either accommodate non-uniformity in the treated lumen or may create different environmental conditions in different areas in the lumen. Non-uniformity in a treated vessel can be of many different types such as an ostium, change in diameter, change in curvature, non-continuous cross-section such as triangular or square, or non-uniformity in surface nature, etc. To accommodate such non-uniformity, portions of the stent may be adapted to provide changing dimension, flexibility, rigidity, size of cells, shape of cells, and response to pressure as dictated by specific applications. Specific applications may dictate, e.g., a desired higher radial force at one end while the other portions of the stent provide a substantially continuous support to the vessel wall with the gaps in the stent sized small enough to reduce the likelihood of tissue prolapse. Other applications may dictate a desired degree of stiffness in the center to reduce the likelihood of breakage and impart the desired degree of softness at the end to allow for the best fit with the anatomy of the target area. Other applications may dictate that one or more of the rows be provided with cells that are sized larger than the cells in the remaining rows of the stent so as to provide access to a side branch in the lumen, e.g., for introducing a second stent through one of the

larger sized cells so as to permit construction of a bifurcated stent within the lumen. Still another application may dictate that one or more of the rows be provided with cells which are adapted or modified so that upon expansion of the stent the portion of the stent defined by the adapted or modified row or rows has a diameter that is either larger or smaller than the remaining portions of the stent to accommodate lumens with non-uniform diameters. One or more rows of cells may also be adapted or modified so as to have varying radial force, or varying longitudinal flexibility, or to correct for a change in properties at the end of the stent.

[0019] It is yet another object of this invention to provide an expandable stent having interconnected flexible cells which provide good radial support, stability and coverage of the vessel wall when it is expanded and implanted in the vessel and which flexes with the vessel during the systolic cycles.

BRIEF DESCRIPTION OF THE DRAWINGS

[0020] FIG. 1 shows an illustration of the basic pattern of an embodiment of the stent of the present invention, shown in an unexpanded state;

[0021] FIG. 2 shows an illustration of the pattern of the stent of FIG. 1, in a partially expanded state;

[0022] FIG. 3 is a side view showing a conventional stent and a stent manufactured in accordance with one embodiment of the invention;

[0023] FIG. 4 shows the stents of FIG. 3 crimped on a balloon catheter and bent prior to expansion;

[0024] FIG. 5 shows the stents of FIG. 4 after they have been expanded in a curve;

[0025] FIG. 6 shows the stents of FIG. 3 partially expanded on a substantially straight balloon catheter;

[0026] FIG. 7 shows an alternative embodiment of the invention provided with a shortened C-shaped loop and in which two rows of cells are provided with thinner gauge U-shaped loops;

[0027] FIG. 8 shows the stent of FIG. 7 partially expanded on a substantially straight balloon catheter;

[0028] FIG. 9 shows the stent of FIG. 7 after it has been expanded on a curved catheter as it would be when inserted around a bend in a vessel;

[0029] FIG. 10 shows an alternative embodiment of a stent constructed in accordance with the invention;

[0030] FIG. 11 shows the "S" or "Z" shaped loops constructed in accordance with the invention;

[0031] FIG. 12 shows an alternative embodiment of a stent constructed in accordance with the invention;

[0032] FIG 12a shows a stent pattern of the alternative embodiment illustrated in FIG. 12; and

[0033] FIG. 13 shows an alternative embodiment of a stent constructed in accordance with the invention.

DETAILED DESCRIPTION OF THE INVENTION

[0034] FIG. 1 shows the general configuration of one embodiment of a stent 1 fabricated in accordance with the present invention. The stent 1 may be fabricated of bio-compatible materials such as stainless steel 316L, gold, tantalum, nitinol or other materials well known to those skilled in the art as suitable for this purpose. The dimensions and gauge of material utilized may be varied as specific applications dictate. The stents of the present invention generally may be constructed in a manner in accordance with the stent described in U.S. patent application Ser. No. 08/457,354, filed Jun. 1, 1995, the disclosure of which is incorporated herein by reference.

[0035] FIG. 1 is a side view of the distal end 2 of stent 1 of the present invention, showing the general pattern of the stent. As shown in FIGS. 1 and 2 the pattern may be described as a plurality of cells 3 and 3'. Each cell 3 is provided with a first member 4, a

second member 5, a third member 6, and a fourth member 7. A first C-shaped loop 10 is disposed between the first member 4 and the third member 6 and a second C-shaped loop 11 is disposed between the second member 5 and the fourth member 7. In each of the cells 3, first member 4, second member 5, third member 6, and fourth member 7 are substantially equal. Thus, first C-shaped loop 10 is displaced a distance D1 and second C-shaped loop 11 is displaced a distance D2 from the center of cell 3. In a preferred embodiment, D1 is substantially equal to D2. A first flexible connector 8 is disposed between the first member 4 and the second member 5 and a second flexible connector 9 is disposed between third member 6 and fourth member 7. The flexible connectors 8 and 9 may be made in a variety of shapes, e.g., an "S" or a "Z" shape as shown in FIG. 11. In a preferred embodiment, a "U" shape is utilized as shown in FIGS. 1 to 10.

[0036] FIG. 1 shows the pattern of stent 1 in an unexpanded state, i.e., that state in which the stent 1 is first inserted in a particular vessel in which a balloon angioplasty procedure is to be performed, but before balloon inflation. FIG. 2 shows the pattern of stent 1 in a partially expanded state, i.e., that state after the balloon has been expanded, e.g. by a balloon, and the state in which the stent 1 remains in the vessel which it supports. The plurality of interconnected cells 3 and 3' form a plurality of interconnected rows 25, 26, 27, and 28 of cells disposed along the longitudinal axis of the stent 1. FIGS. 1 and 2 show a distal row 25 disposed at the distal end 2, a row 26 adjacent to and proximal to distal row 25, a row 27 adjacent to and proximal to row 26, and a row 28 adjacent to and proximal to row 27. It will be appreciated that the number of rows, and the number of cells per row, and the shape of each cell, may be varied as specific applications require.

[0037] As shown in FIGS. 1 and 2, the cells 3' in distal row 25 differ from the cells 3 in rows 26, 27, and 28. The first member 4' and the third member 6' of the cells 3' in row 25 are shorter than the first member 4 and the third member 6 of the cells 3 in rows 26, 27 and 28. In cell 3', first member 4' is substantially equal to third member 6', however, first member

4' and third member 6' are shorter than second member 5' and fourth member 7'. The shorter members 4' and 6' result in a first C-shaped loop 10' that is not disposed as far away from the center of the cell 3' as second C-shaped loop 11'. Thus, first C-shaped loop 10' may be thought of as being "shorter" than second C-shaped loop 11'. As shown in FIG. 2, first C-shaped loop 10' is disposed a distance D1' that is less than the distance D2' that second C-shaped loop 11' is disposed from the center of the cell 3'. In an especially preferred embodiment, D1' is about 15% less than D2'.

[0038] FIGS. 1 and 2 also show that the distal row 25 of the stent 1 is provided with a first U-shaped loop 8' and a second U-shaped loop 9' that are more flexible than the first U-shaped loop 8 and second U-shaped loop 9 of cells 3 in rows 26, 27, and 28 of the stent 1. This greater flexibility in the U-shaped loops 8' and 9' may be accomplished in a variety of ways, for example, by utilizing a different material, by treating the material e.g., by utilizing stainless steel annealing to impart selective degrees of hardness to the different portions of the stent. Alternatively, if, e.g., NiTi (Nitinol) is utilized, selected portions of the stent may be selectively thermo-mechanically treated so that portions of the stent, e.g., the U-shaped members, will remain in a martensitic phase while other portions of the stent will be transformed into austenitic phase in this section to yield different properties. Greater flexibility may also be achieved by changing the shape of the "U", for example to a "Z" or an "S" (as shown in FIG. 11), or by reducing the amount of material utilized to make the U-shaped loops 8' and 9'. In the embodiment shown in FIGS. 1 and 2, the U-shaped loops 8' and 9' of row 25 are provided with the same thickness of material as the U-shaped loops 8 and 9 of the cells 3 in rows 26, 27, and 28, however, U-shaped loops 8' and 9' are not as wide. As shown in FIGS. 1 and 2, U-shaped loops 8' and 9' have a width W1 that is less than the width W2 of U-shaped loops 8 and 9 in the cells 3 of rows 26, 27, and 28. In a preferred embodiment, W1 is about 50% narrower than W2. In an especially preferred embodiment, W1 is about 40% narrower than W2.

[0039] FIG. 3 is a side-by-side comparison of two stent sections and shows a conventional stent 12 compared to the stent 1, shown in FIGS. 1 and 2. FIG. 4 shows stents 1 and 12 shown in FIG. 3 as they appear when they are crimped on a balloon and bent as they would be during insertion around a curve in a vessel. As shown in FIG. 4, conventional stent 12 flares at its leading edge 13 in contrast to stent 1 which does not. FIG. 5 shows the stents of FIG. 4 after the stents have been expanded in a curve. The tip of conventional stent 12 produces a protrusion or sharp point 13 which could cause local pressure and possible trauma to the vessel wall. In contrast, the stent 1 constructed in accordance with the invention bends gently at its end 2 without forming a protrusion or sharp point because the deformation of the of U-shaped loops 8' and 9' in distal row 25 make the end 2 softer.

[0040] FIG. 6 shows the stents 1 and 12 of FIG. 3 at partial expansion (before reaching maximum pressure) disposed on a substantially straight catheter. As shown, although the two stents 1 and 12 are subjected to the same outward force, the end 2 of stent 1 is less expanded than the end 13 of conventional stent 12 demonstrating the increased radial force of the end 2 of stent 1 constructed in accordance with the invention. At full pressure the radii of the stents 1 and 12 will be equal, however, the end 2 of stent 1 will have greater radial resistance to collapse than the end 13 of stent 12.

[0041] FIG. 7 shows an alternative embodiment of the invention. As shown in FIG. 7, the cells 3' in row 25 are provided with a first member 4' and third member 6' that are shorter than second member 5' and fourth member 7'. The cells 3' in row 25 are provided with a first U-shaped loop 8' and a second U-shaped loop 9' that are thinner than the U-shaped loops 8 and 9 in the cells 3 in rows 27 and 28. The cells 3" in row 26 are provided with first U-shaped loops 8" and second U-shaped loops 9" that are narrower than the U-shaped loops 8 and 9 in the cells 3 in rows 27 and 28.

[0042] FIG. 8 shows the stent 20 of FIG. 7 during partial expansion of the stent showing the decreased expansion of row 25 at partial expansion because of the higher radial

force of the end 2 of the stent which results from construction with shorter C-shaped loops 10' in row 25, construction with narrower, i.e., more flexible, U-shaped loops 8' and 9' in row 25, and 8'' and 9'' in row 26.

[0043] FIG. 9 shows the stent 20 of FIGS. 7 and 8 after it has been expanded in a curved vessel and shows the bends of the U-shaped loops 8' and 9' in row 25 and 8'' and 9'' in row 26 which allows the end portion 2 of the stent 20 to more readily conform to the curve of the vessel, creating smooth ends with no sharp points or projections projecting into the vessel wall.

[0044] The changes can be made on one side only or on both sides of the stent as specific applications dictate. Additionally, different combinations of embodiments of the invention may be mixed such as using thinner U-shaped loops, longer U-shaped loops or different shaped loops, e.g., "Z" or "S".

[0045] One example of how this may be achieved is shown in FIG. 10. FIG. 10 shows how the stent shown in FIG. 7 may be modified, if additional flexibility is desired. As shown in FIG. 10, the distal row 25, and the proximal row 29 of stent 30 are provided with first and second U-shaped loops that are more flexible than the U-shaped loops in the other rows of the stent disposed between the distal and proximal rows 25 and 29. In the embodiment of the invention shown in FIG. 10, the distal row 25 is provided with shortened members 4' and 6' and more flexible U-shaped loops 8' and 9', as previously discussed, and the proximal row 29 is provided with shortened second and fourth members 5'' and 7'' and more flexible U-shaped loops 8'' and 9''. This arrangement imparts greater radial strength and greater flexibility to both ends of the stent.

[0046] If even greater flexibility at the ends of the stent is desired, the stent shown in FIG. 10 may be modified by replacing the U-shaped loops in rows 26 and 28 with more flexible loops. Thus, the distal row, the row proximal to the distal row, the proximal row, and

the row distal to the proximal row are provided with U-shaped loops that are more flexible than the U-shaped loops in the cells in the remaining rows of the stent.

[0047] FIG. 12 shows an alternative embodiment of the invention. In this embodiment, the stent is adapted to provide radial support and uniform coverage of the vessel wall when expanded and implanted into the vessel wall, as well as increased flexibility to comply with changes in the vessel wall, particularly during systolic cycles.

[0048] FIG. 12 shows a stent pattern having a plurality of circumferential rows 115, 116, 117, 118, 119 and 120 of alternating interconnected cells 103 and 103' disposed along the longitudinal axis of the stent. As shown in FIG. 12, cells 103 and 103' are provided with a first C-shaped loop 110 having a first end 121 and a second end 122 and a second C-shaped loop 111 having a first end 123 and a second end 124. Cells 103 and 103' further include a first flexible connector 108 disposed between the first end 121 of first C-shaped loop 110 and the first end of second C-shaped loop 111 and a second flexible connector 109 disposed between the second end 122 of first C-shaped loop 110 and the second end 124 of second C-shaped loop 111.

[0049] To increase the flexibility of the stent while maintaining good radial support, stability and coverage when the stent is expanded, cells 103 and 103' are provided with second C-shaped loops 111, first flexible connectors 108 and second flexible connectors 109 that are more flexible than first C-shaped loops 110. The increased flexibility of second C-shaped loops 111, first flexible connectors 108 and second flexible connectors 109 may be achieved in a variety of ways, including reducing the gauge of the material used in these sections of the stent. In the embodiment shown in FIG. 12, the entire stent has the same radial thickness, however, the second C-shaped loops 111, first flexible connectors 108 and second flexible connectors 109 are not as wide as the first C-shaped loops 110. As shown in FIG. 12, second C-shaped loop 111 and first and second flexible connectors 108, 109 have a width W1 that is less than the width W2 of first C-shaped loop 110. In a preferred

embodiment, W1 is about 50% less than W2. In a particularly preferred embodiment, W1 is about 40% less than W2. It will also be understood that the gauge of the material used to form the second C-shaped loop 111 and first and second flexible connectors 108 and 109 relative to that of the first C-shaped loop can be varied by reducing the thickness of the material. Alternatively, the increased flexibility in the second C-shaped loops 111, first flexible connectors 108 and second flexible connectors 109 may be accomplished by using a more flexible material or altering the properties of the material to make it more flexible than the material of the first C-shaped loops.

[0050] As shown in FIG. 12, the first and second flexible connectors 108, 109 are generally U-shaped loops. These U-shaped loops can be described as having two generally straight portions having an area of inflection therebetween. It will be understood that the increased flexibility of the first and second flexible connectors 108, 109 may also be achieved by changing the shape, for example, to a "Z" or an "S" (as shown in FIG. 11) or by varying the lengths of the generally straight portions of the loops. It will be further understood that the closed ends of the U-shaped flexible connectors may extend downwardly in a circumferential direction as shown in FIG. 12, extend upwardly in a circumferential direction or be alternately oriented in upward and downward circumferential directions along the longitudinal axis of the stent.

[0051] As further shown in FIG. 12, adjacent circumferential rows of interconnected flexible cells 103 and 103' share either the same first C-shaped loop 110 or second C-shaped loop 111. For example, the cells 103 in circumferential row 115 share the same second C-shaped loop 111 as cells 103' in circumferential row 116. Similarly, cells 103' in circumferential row 116 share the same first C-shaped loops 110 as cells 103 in circumferential row 117.

[0052] Referring now to FIG. 12a, the stent pattern of the embodiment shown in FIG. 12 can also be described as having alternating even and odd circumferential bands of loops

131e and 131o which are 180° out of phase. The stent pattern further includes a plurality of longitudinal bands of loops 132 that are coupled to the loops of adjacent even and odd circumferential bands of loops 131e and 131o. As shown in FIG. 12a, the even and odd circumferential bands of loops 131e and 131o are interconnected with the longitudinal bands of loops 132 to form a stent comprising a plurality of cells 103 and 103' defining a uniform cellular structure. Further, at least one loop 133 of the longitudinal bands of loops 132 is disposed between each adjacent even and odd circumferential bands of loops 131e and 131o to provide a stent which minimally shrinks in the longitudinal direction during expansion.

[0053] As further shown in FIG. 12a, each cell 103 and 103' includes a loop 142 of the even circumferential band of loops 131e having a first end 143 and a second end 144, a loop 145 of the odd circumferential band of loops 131o having a first end 146 and a second end 147. A first flexible connector 134 having a first end 135 and a second end 136 is disposed between loops 142 and 145 with the first end 135 of the first flexible connector 134 coupled to the first end 143 of loop 142 and the second end 136 of the first flexible connector 134 coupled to the first end 146 of loop 145. A second flexible connector 137 having a first end 138 and a second end 139 is also disposed between loops 142 and 145 with the first end 138 of the second flexible connector 137 coupled to the second end 144 of loop 142 and the second end 139 of the second flexible connector 137 coupled to the second end 147 of loop 145. As shown in FIG. 12a, loop 145 of the odd circumferential bands of loops 131o and flexible connectors 134 and 137 are provided with widths that are smaller than the width of loop 142 of the even circumferential bands of loops 131e.

[0054] The particular embodiment shown in FIG. 12a includes alternating even and odd circumferential bands of loops 131e and 131o where each odd circumferential band of loops 131o has a smaller width than the even circumferential bands of loops 131e. Depending on the embodiment, other patterns of circumferential bands of loops having smaller widths may be utilized. For example, the stent design according to the present

invention may have two or more consecutive circumferential bands of loops having smaller widths or longer lengths at the ends of the stents to provide for flexibility at the ends of the stent. Also depending on the embodiment, the stent may have two or more circumferential bands of loops having greater widths or shorter lengths at the ends of the stent for increased rigidity or radial support. It will be understood that the present invention is not limited to any specific stent design and can be utilized in any stent design that includes contiguous cell structures having loops and flexible connectors.

[0055] FIG. 13 illustrates another embodiment of the present invention having one kind of circumferential bands of loops 162 which are generally in phase with each other, rather than being 180° out of phase like the even and odd circumferential bands of loops 131e, 131o as in FIGS. 12 and 12a.

[0056] FIG. 13 shows a stent pattern having a plurality of interconnected cells 160. Each cell 160 includes a loop 164 of one of the circumferential bands of loops 162 having a first end 165 and a second end 166, a loop 167 of a neighboring circumferential band of loops 162 having a first end 168 and a second end 169, a first flexible connector 170 having a first loop 171 with a first end 172 and a second end 173, a generally straight member 177 and a second loop 174 with a first end 175 and a second end 176, and a second flexible connector 180 having a first loop 181 with a first end 182 and a second end 183, a generally straight member 187 and a second loop 184 with a first end 185 and a second end 186. The first flexible connector 170 is disposed between loops 164 and 167 such that first end 172 of first loop 171 is coupled to the first end 165 of loop 164 and second end 176 of second loop 174 is coupled to the first end 166 of loop 165. The second flexible connector 180 is also disposed between loops 164 and 167 such that the first end 182 of first loop 181 is coupled to the second end 166 of loop 164 and the second end 186 of second loop 184 is coupled to the second end 169 of loop 167.

[0057] As further shown in FIG. 13, the first flexible connector 170 and the second flexible connector 180 are provided with widths smaller than the widths of loops 164 and 167 of the adjacent circumferential bands of loops 162. It will be understood that the flexibility of the first and second flexible connectors 170, 180 can be increased or decreased by varying the lengths of the generally straight members 177, 187 and the lengths of the generally straight portions of the loops 171, 174, 181 and 184. It will be further understood that the first and second flexible connectors may include additional alternating loops and generally straight members. For example, the flexible connectors may comprise three loops and two generally straight members forming a loop/straight member/loop/straight member/loop configuration or three generally straight members and two loops forming a straight member/loop/straight member/loop/straight member configuration. In addition, the orientation of the loops may also be varied such that each of the closed ends of the loops extend downwardly in a circumferential direction as shown in FIG. 13, extend upwardly in a circumferential direction or be alternately oriented in upward and downward circumferential directions.

[0058] The stent pattern shown in FIG. 13 can also be described as a plurality of circumferential bands of loops 162 coupled by a plurality of flexible connectors 170 and 180. As shown in FIG. 13, the circumferential bands of loops 162 are in phase with each other and the flexible connectors 170 and 180 connect neighboring loops of adjacent circumferential bands of loops 162. Because the circumferential bands of loops 162 are in phase, the flexible connectors 170 and 180 are offset from the longitudinal direction such that they couple apices of closed ends of the loops in the adjacent circumferential bands of loops 162.

[0059] The stent shown in FIG. 13 can also be described as a modified version of the stent shown in FIGS. 12 and 12a. As can be seen from comparison of FIGS. 12, 12a and 13, the stent of FIG. 13 is generally the same as the stent of FIGS. 12 and 12a with exception that every second generally straight portion of each odd circumferential band of loops 131o has

been removed. This provides further flexibility along the longitudinal axis of the stent. Further, cells 160 of the stent shown in FIG. 13 are larger than the cells 130, 103' of the stent shown in FIGS. 12 and 12a. The increased cell size in the embodiment shown in FIG. 13 may be beneficial for side branch accessing.

[0060] The present invention contemplates a number of different variations and changes in different properties to achieve other non uniform features such as, but not limited to, cell size, cell shape, radio-opacity, etc. on the above-described preferred embodiments. The specified changes are brought only as an example for the application of the general concept, which is the basis for the present invention that stents with varying mechanical properties between sections along the stent may correct undesired effects at singular points such as stent ends and provide for a better fit to a vessel with properties changing along its axis. It is to be understood that the above description is only of one preferred embodiment, and that the scope of the invention is to be measured by the claims as set forth below.

What is claimed is:

1. An expandable stent, comprising:
 - a) a plurality of first circumferential bands of loops;
 - b) a plurality of second circumferential bands of loops, wherein the first circumferential bands of loops are 180° out of phase with the second circumferential bands of loops, and the first circumferential bands of loops and the second circumferential bands of loops are alternately arranged along the longitudinal axis of the stent;
 - c) a plurality of longitudinal bands of loops, wherein the longitudinal bands of loops are intertwined with the first and second loop circumferential bands of loops to form a generally uniform distributed structure; and
 - d) the first and second circumferential bands of loops are coupled to the longitudinal bands of loops such that at least one loop of each of the longitudinal bands of loops is disposed between each adjacent first and second circumferential band of loops, wherein the second circumferential bands of loops and the at least one loop of the longitudinal bands of loops disposed between adjacent first and second circumferential band of loops are more flexible than the first circumferential bands of loops.
2. The expandable stent according to claim 1, wherein the second circumferential bands of loops and the at least one loop of the longitudinal bands of loops disposed between adjacent first and second circumferential bands of loops have a smaller width than the width of the first circumferential bands of loops.
3. The expandable stent according to claim 1, wherein the second circumferential bands of loops and the at least one loop of the longitudinal bands of loops disposed between adjacent first and second circumferential bands of loops have a smaller thickness than the thickness of the first circumferential bands of loops.

4. The expandable stent according to claim 1, wherein the gauge of the material that forms the second circumferential bands of loops and the at least one loop of the longitudinal bands of loops disposed between adjacent first and second circumferential bands of loops is less than the gauge of the material that forms the first circumferential bands of loops.
5. The expandable stent according to claim 1, wherein the at least one loop of the longitudinal bands of loops disposed between adjacent first and second circumferential bands of loops comprises a U-shaped loop.
6. The expandable stent according to claim 1, wherein the at least one loop of the longitudinal bands of loops disposed between adjacent first and second loop containing sections comprises two loops forming an S-shape.
7. The expandable stent according to claim 1, wherein the at least one loop of the longitudinal bands of loops disposed between adjacent first and second circumferential bands of loops comprises two loops forming an Z-shape.
8. The expandable stent according to claim 1, wherein the at least one loop of the longitudinal bands of loops disposed between adjacent first and second loop circumferential bands of loops comprises at least two generally straight portions with an area of inflection therebetween.
9. An expandable stent, comprising:
 - a) a plurality of first circumferential bands of loops;
 - b) a plurality of second circumferential bands of loops, wherein the first circumferential bands of loops are 180° out of phase with the second circumferential bands of loops, and the first circumferential bands of loops and the second circumferential bands of loops are alternately arranged along the longitudinal axis of the stent;
 - c) a plurality of flexible connectors having at least one loop disposed between each adjacent first and second circumferential bands of loops, each flexible connector

having a first end coupled to a loop of a first circumferential band of loops and a second end coupled to a loop of a second circumferential band of loops, wherein the plurality of flexible connectors and the second circumferential bands of loops are more flexible than the first circumferential bands of loops.

10. The expandable stent of claim 9, wherein the plurality of flexible connectors and the second circumferential bands of loops have a smaller width than the width of the first circumferential bands of loops.
11. The expandable stent of claim 9, wherein the plurality of flexible connectors and the second circumferential bands of loops have a smaller thickness than the thickness of the first circumferential bands of loops.
12. The expandable stent according to claim 9, wherein the gauge of the material that forms the plurality of flexible connectors and the second circumferential bands of loops is less than the gauge of the material that forms the first circumferential bands of loops.
13. The expandable stent according to claim 9, wherein each flexible connector comprises a U-shaped loop disposed between adjacent first and second circumferential bands of loops.
14. The expandable stent according to claim 9, wherein each flexible connector comprises two loops disposed between adjacent first and second circumferential bands of loops.
15. The expandable stent according to claim 14, wherein the two loops of each flexible connector form an S-shape.
16. The expandable stent according to claim 14, wherein the two loops of each flexible connector form a Z-shape.
17. The expandable stent according to claim 9, wherein each flexible connector comprises at least two generally straight portions with an area of inflection therebetween.
18. An expandable stent, comprising:
 - a) a plurality of interconnected flexible cells defining a stent having a proximal end and a distal end and a longitudinal axis, the cells arranged in a plurality of

interconnected flexible rows disposed along the longitudinal axis of the stent, each of the cells comprising one pair of longitudinally facing loops, each longitudinally facing loop having a generally curved apex and having portions with a substantial longitudinal component extending from the apex, the portions forming walls of the cells, wherein at least some of the portions are also walls of longitudinally adjacent cells, the pair of longitudinally facing loops generally opposite to and facing one another, each of the facing loops adapted to open further upon radial expansion of the stent which tends to foreshorten the stent longitudinally;

b) each of the cells further comprising a pair of curved flexible connectors, which are disposed between the adjacent pair of facing loops and integral therewith to complete each of the cells, each of the pair of curved flexible connectors adapted to open further upon radial expansion of the stent to substantially offset foreshortening along the longitudinal axis, wherein one of the longitudinally facing loops and the pair of curved flexible connectors are more flexible than the other longitudinally facing loop.

19. The expandable stent according to claim 18, wherein the pair of curved flexible connectors and one of the longitudinally facing loops have a smaller width than the width of the other longitudinally facing loop of each cell.

20. The expandable stent according to claim 18, wherein the pair of curved flexible connectors and one of the longitudinally facing loops have a smaller thickness than the thickness of the other longitudinally facing loop of each cell.

21. The expandable stent according to claim 18, wherein the gauge of the material that forms the pair of curved flexible connectors and one of the longitudinal facing loops is less than the gauge of the material that forms the other longitudinally facing loop of each cell.

22. The expandable stent of claim 18, wherein each of the curved flexible connectors is generally U-shaped.

23. The expandable stent according to claim 18, wherein each of the curved flexible connectors is generally S-shaped.
24. The expandable stent according to claim 18, wherein each of the curved flexible connectors is generally Z-shaped.
25. The expandable stent according to claim 18, wherein each of the curved flexible connectors comprises at least two generally straight portions with an area of inflection therebetween.
26. An expandable stent having a proximal end, a distal end and a longitudinal axis, comprising:
- a) a plurality of circumferential bands of loops arranged along the longitudinal axis of the stent, wherein the plurality of circumferential bands of loops are generally in phase with each other;
 - b) a plurality of flexible connectors having at least one loop disposed between each adjacent pair of circumferential bands, each flexible connector having a first end coupled to a loop of a circumferential band of loops and a second end coupled to a loop of an adjacent circumferential band of loops, wherein the plurality of flexible connectors are more flexible than the plurality of circumferential bands of loops.
27. The expandable stent of claim 26, wherein the flexible connectors have a smaller width than the width of the circumferential bands of loops.
28. The expandable stent of claim 26, wherein the flexible connectors have a smaller thickness than the thickness of the circumferential bands of loops.
29. The expandable stent according to claim 26, wherein the gauge of the material that forms the flexible connectors is less than the gauge of the material that forms the circumferential bands of loops.
30. The expandable stent according to claim 26, wherein the flexible connectors comprise two loops disposed between each adjacent pair of circumferential bands.

31. The expandable stent according to claim 30, wherein the flexible connectors further comprise a generally straight portion disposed between each of the two loops disposed between each adjacent pair of circumferential bands.
32. The expandable stent according to claim 31, wherein each of the two loops of each flexible connector is a generally U-shaped loop.
33. The expandable stent according to claim 32, wherein the two generally U-shaped loops of each flexible connector have open ends facing in generally the same circumferential direction.
34. An expandable stent, comprising:
- a) a plurality of interconnected flexible cells defining a stent having a proximal end and a distal end, a circumferential axis and a longitudinal axis, the cells arranged in a plurality of interconnected flexible rows disposed along the longitudinal axis of the stent, each of the cells comprising one pair of longitudinally facing loops generally offset from each other along the circumferential axis, each longitudinally facing loop having a generally curved apex and having portions with a substantial longitudinal component extending from the apex, the portions forming walls of the cells, wherein at least some of the portions are also walls of longitudinally adjacent cells, the pair of longitudinally facing loops facing one another, each of the facing loops adapted to open further upon radial expansion of the stent which tends to foreshorten the stent longitudinally;
 - b) each of the cells further comprising a pair of flexible connectors, which are disposed between the adjacent pair of facing loops and integral therewith to complete foreshortening along the longitudinal axis, wherein one of the longitudinally facing

each of the cells, each of the pair of flexible connectors having at least one loop adapted to open further upon radial expansion of the stent to substantially offset loops and the pair of flexible connectors of a cell is more flexible than the other longitudinally facing loop of the cell.

35. The expandable stent of claim 34, wherein one of the longitudinally facing loops and the pair of flexible connectors of a cell have a smaller width than the width of the other longitudinally facing loop of the cell.

36. The expandable stent of claim 34, wherein one of the longitudinally facing loops and the pair of flexible connectors of a cell have a smaller thickness than the thickness of the other longitudinally facing loop of the cell.

37. The expandable stent according to claim 34, wherein the gauge of the material that forms one of the longitudinally facing loops and the pair of flexible connectors of a cell is less than the gauge of the material that forms the other longitudinally facing loop of the cell.

38. The expandable stent according to claim 34, wherein each of the flexible connectors comprises two loops.

39. The expandable stent according to claim 38, wherein each of the flexible connectors further comprises a generally straight portion disposed between each of the two loops.

40. The expandable stent according to claim 39, wherein each of the two loops of each flexible connectors is a generally U-shaped loop.

41. The expandable stent according to claim 40, wherein the two U-shaped loops of each flexible connectors have open ends facing in generally the same circumferential direction.

42. A method of increasing the flexibility of an expandable stent having a plurality of circumferential bands of loops arranged along a longitudinal axis of the stent and a plurality of flexible connectors disposed between adjacent circumferential bands of loops, the method comprising:

- (a) narrowing the width of every second circumferential band of loops arranged along the longitudinal axis of the stent; and
- (b) narrowing the width of each of the plurality of flexible connectors.

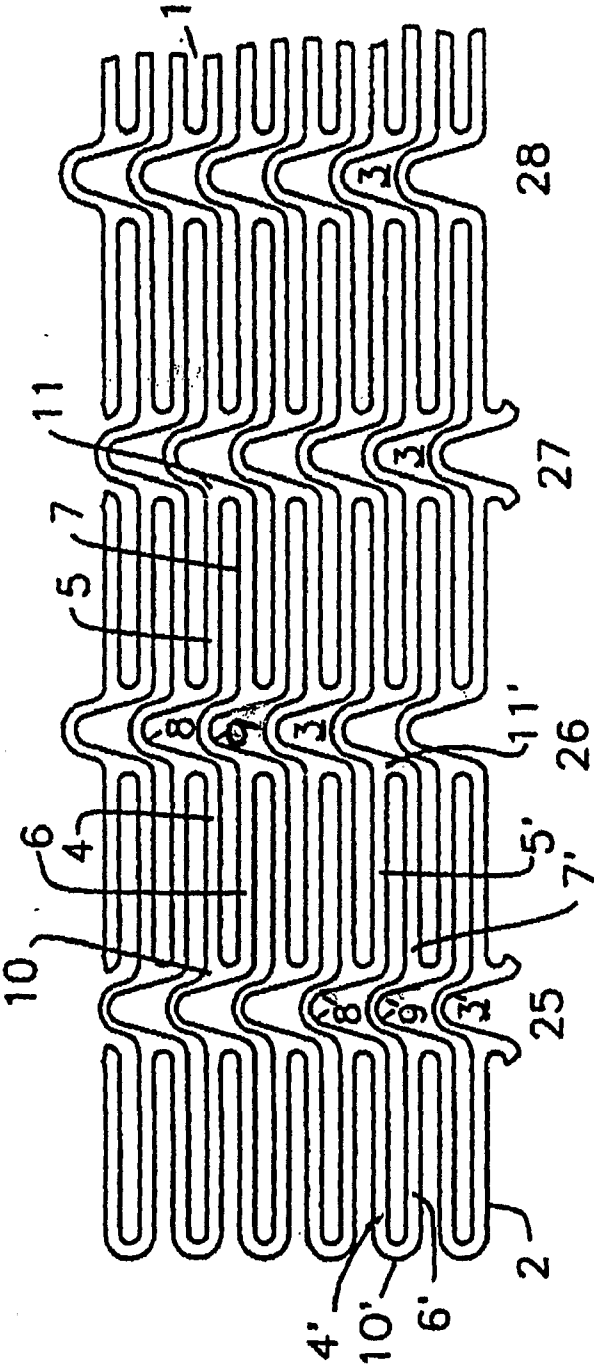


FIG. 1

2/10

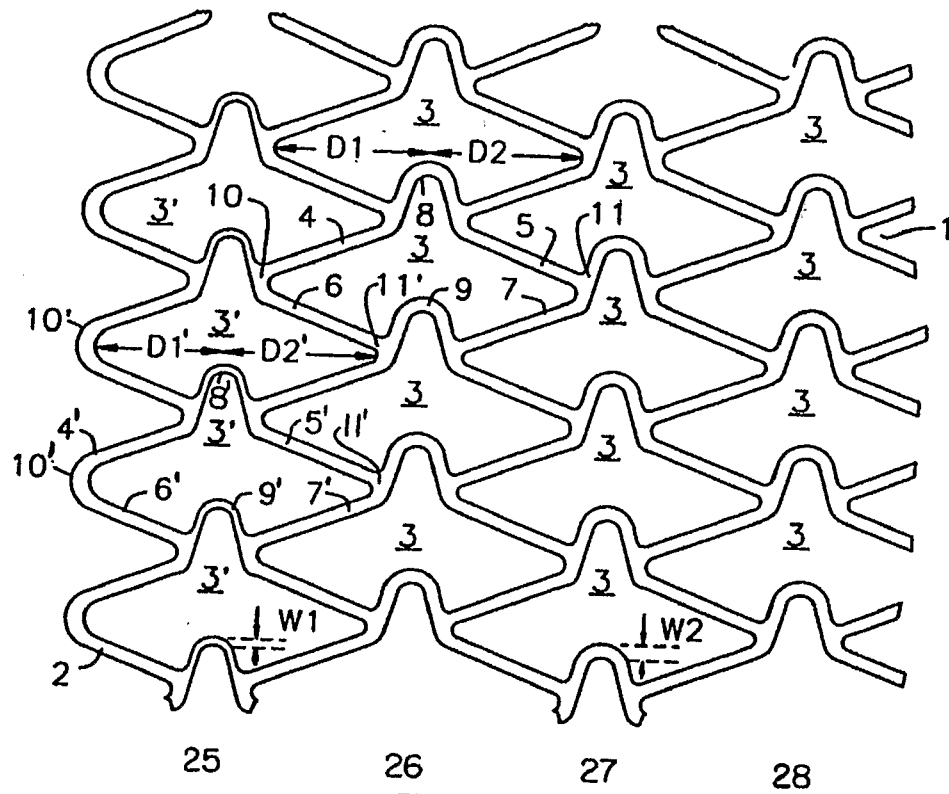


FIG. 2

3/10

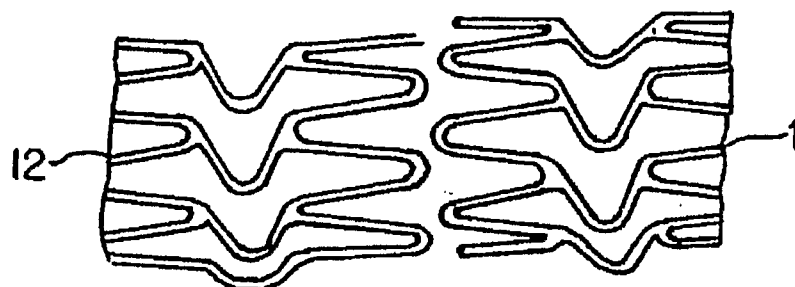


FIG. 3

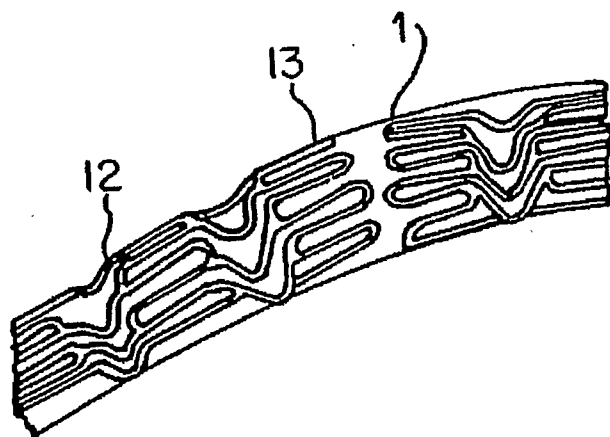


FIG. 4

4/10

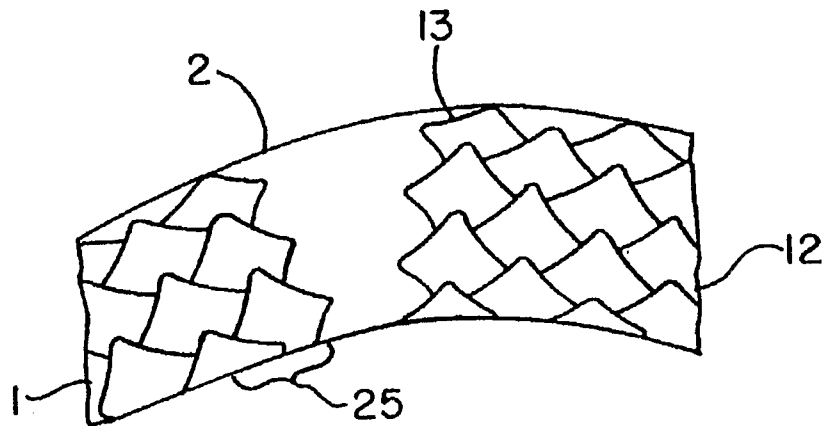


FIG. 5

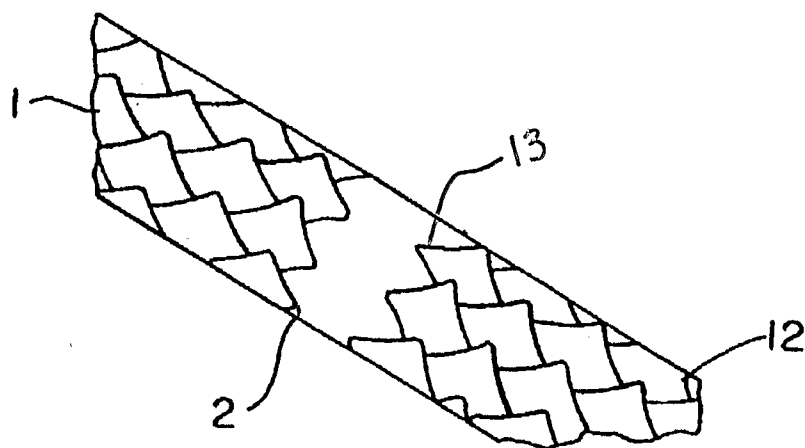


FIG. 6

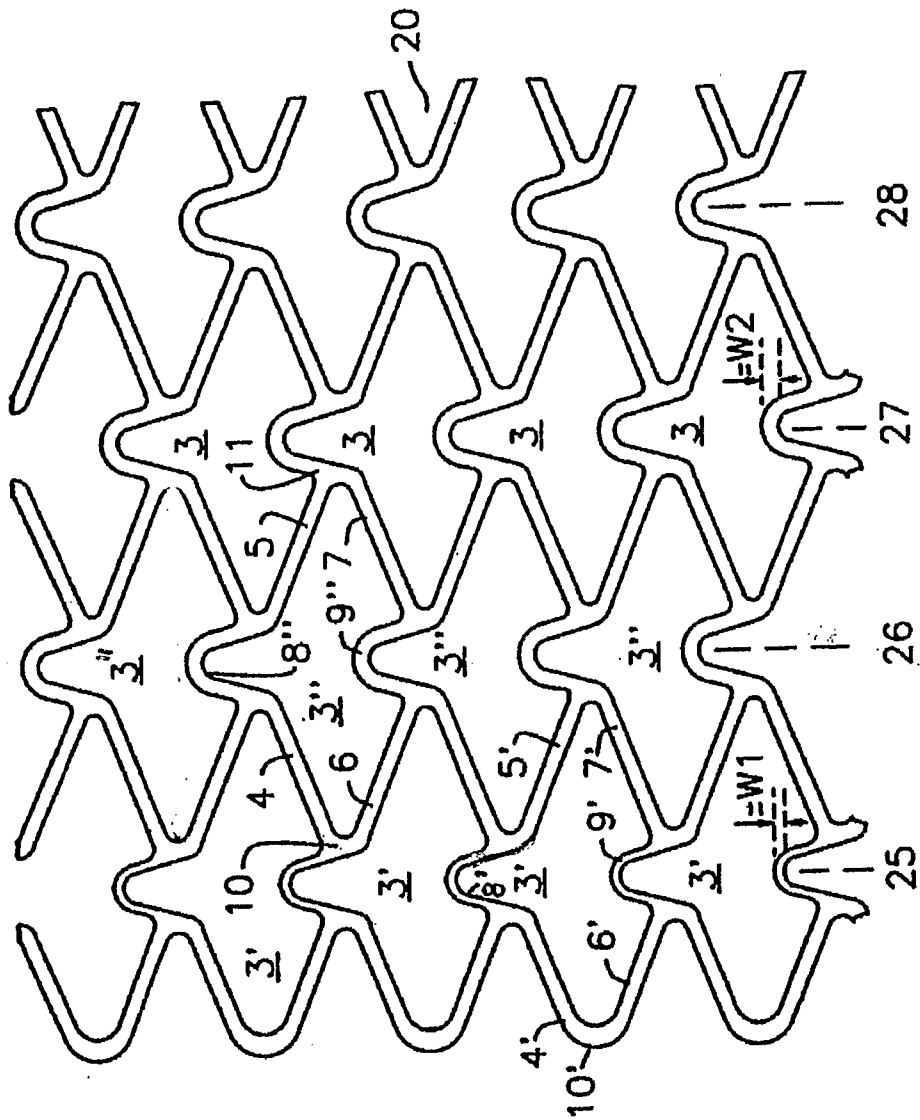


FIG. 7

6/10

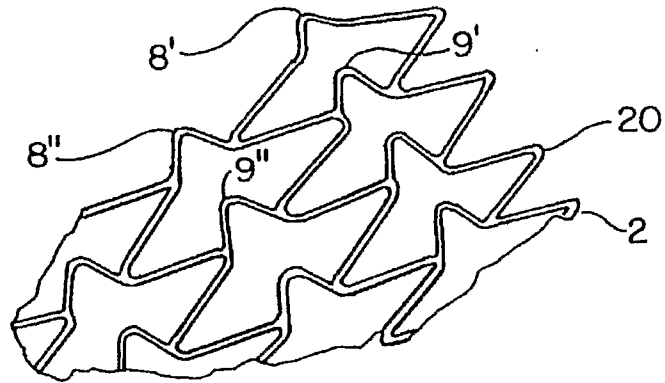


FIG. 8

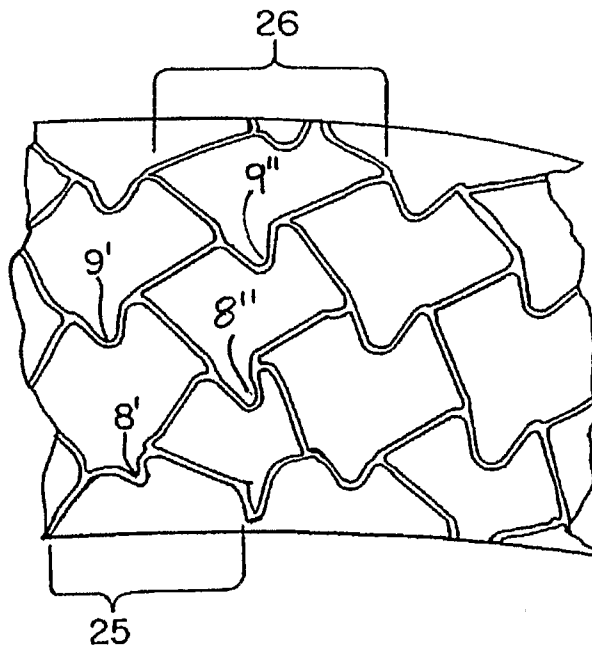


FIG. 9

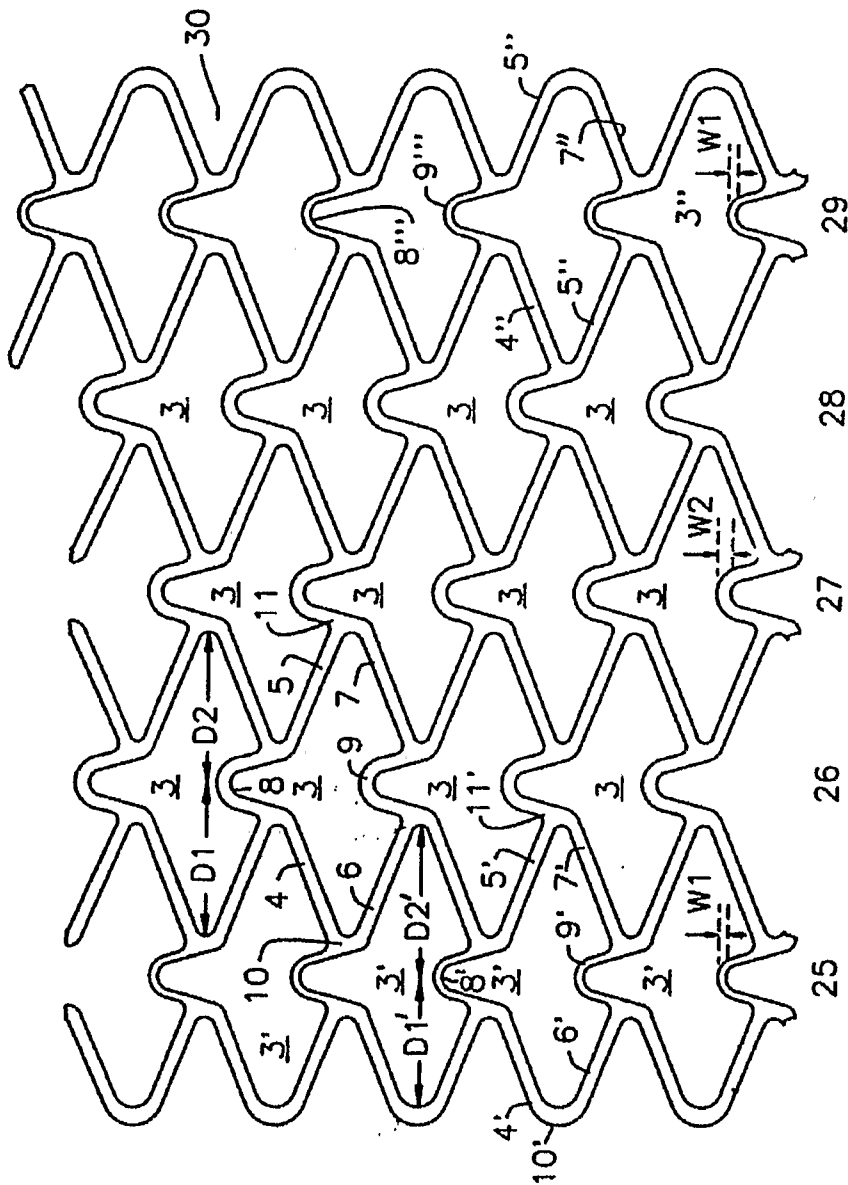


FIG. 10


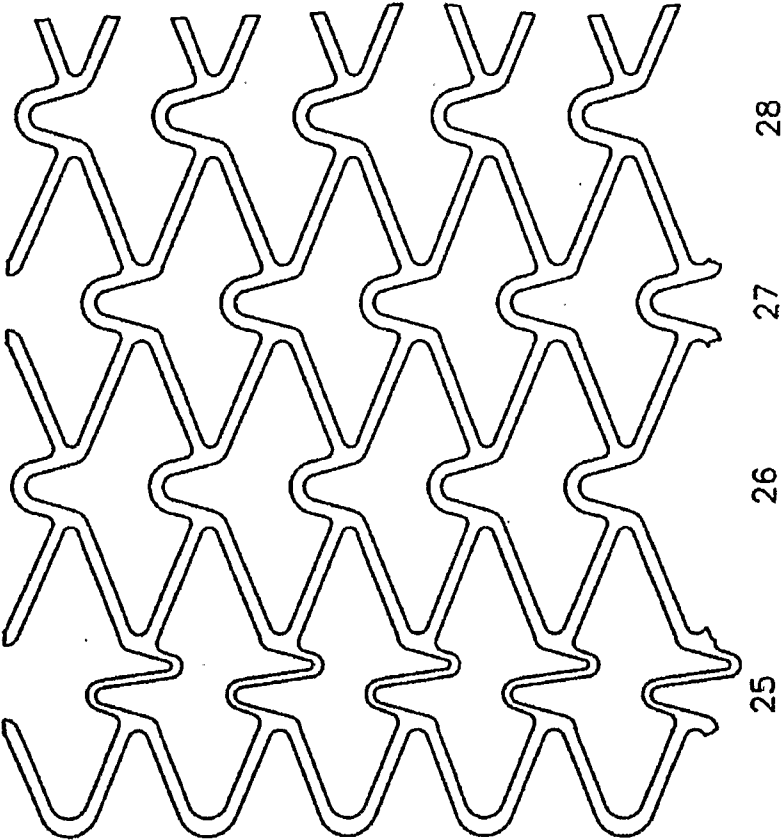


FIG. 11

9/10

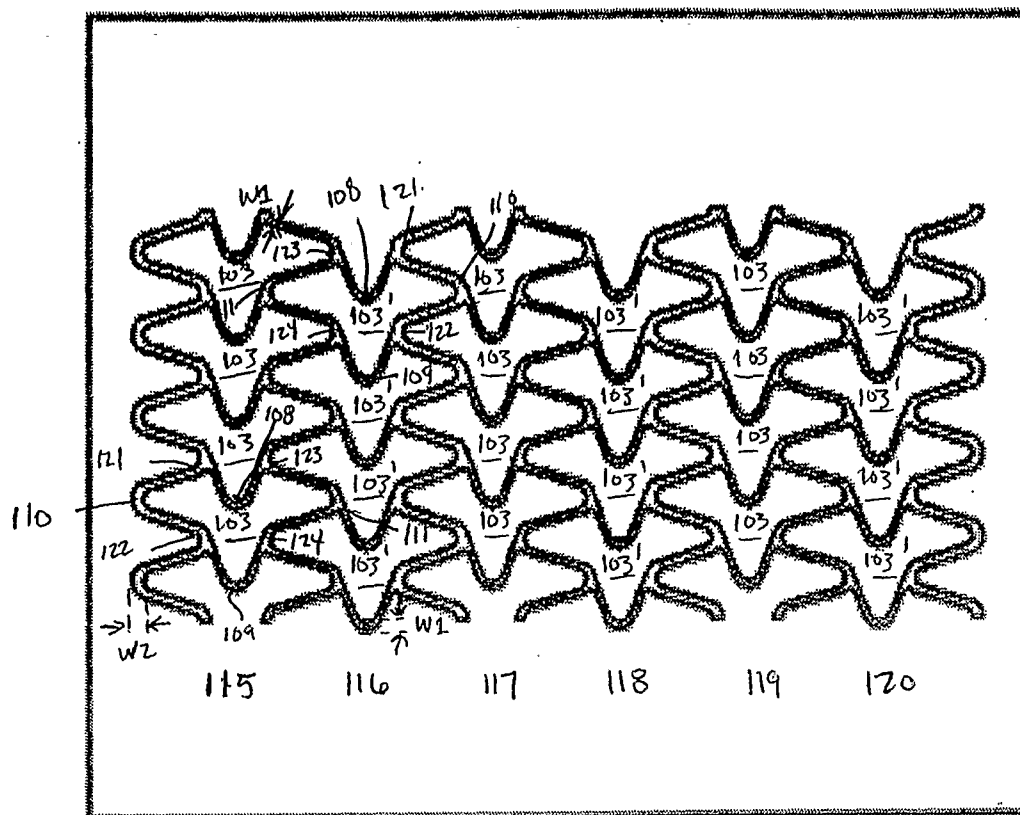

10/10

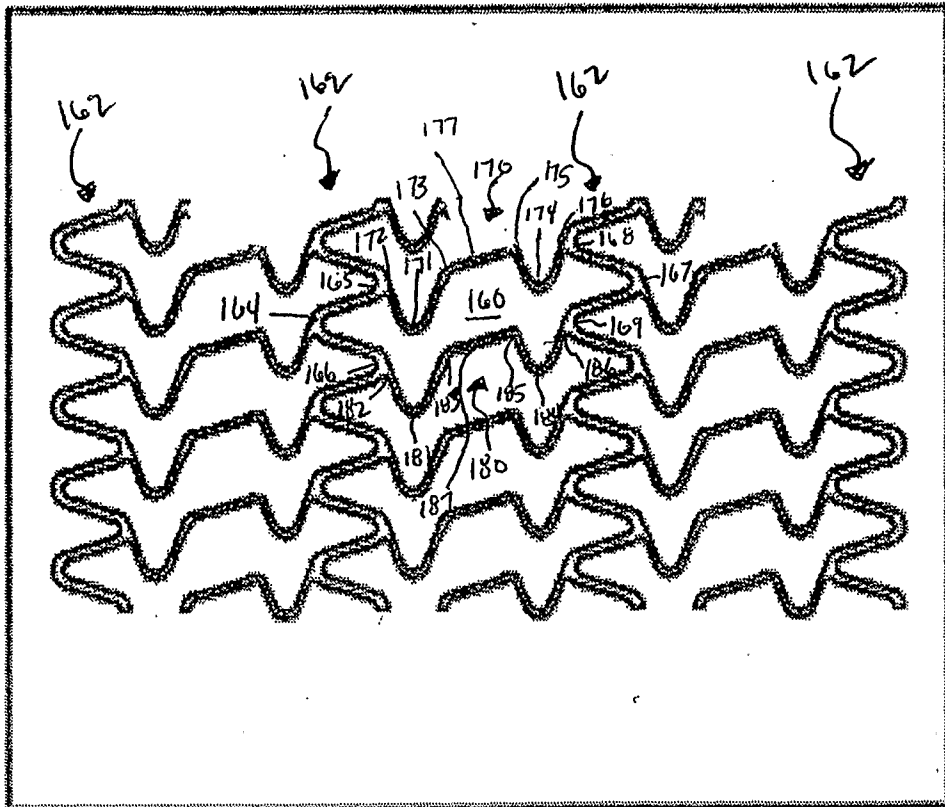


FIG. 13