

J. S. SCHOFIELD.

Horse-Power.

No. 163,534.

Patented May 18, 1875.

Fig. 1.


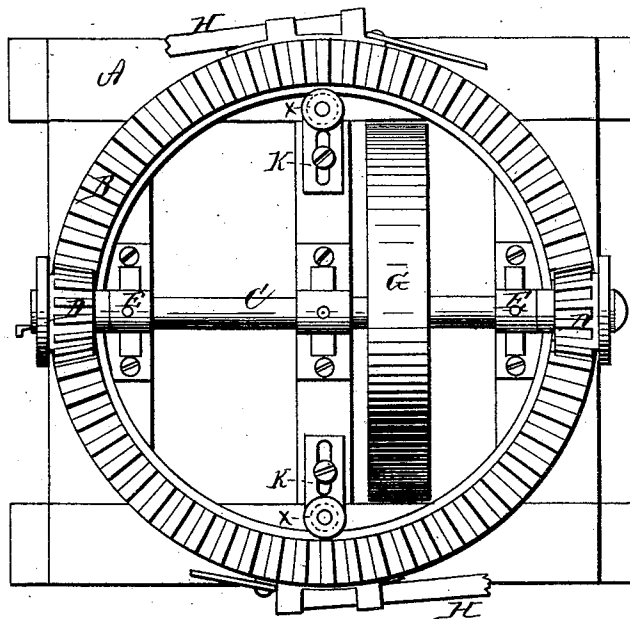


Fig. 2.

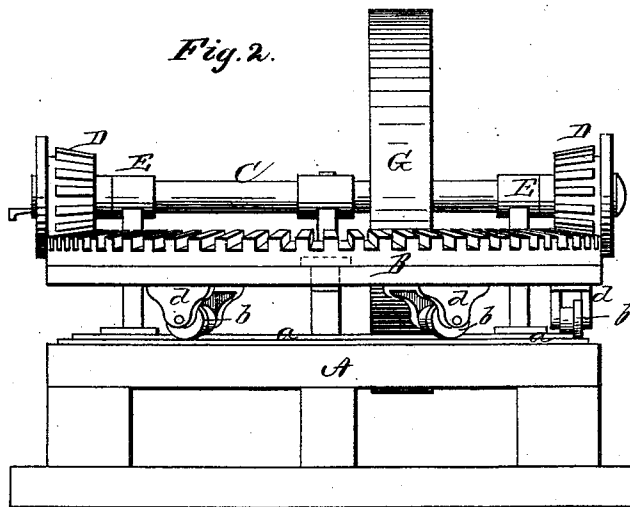

WITNESSES

Henry N. Miller
C. L. Ewert.

INVENTOR

J. S. Schofield.
Alexander M. Mator
ATTORNEYS

UNITED STATES PATENT OFFICE.

JOHN S. SCHOFIELD, OF MACON, GEORGIA.

IMPROVEMENT IN HORSE-POWERS.

Specification forming part of Letters Patent No. **163,534**, dated May 18, 1875; application filed February 15, 1875.

To all whom it may concern:

Be it known that I, JOHN S. SCHOFIELD, of Macon, in the county of Bibb and in the State of Georgia, have invented certain new and useful Improvements in Horse-Powers; and do hereby declare that the following is a full, clear, and exact description thereof, reference being had to the accompanying drawings, and to the letters of reference marked thereon, making a part of this specification.

On the 15th day of September, 1874, Letters Patent No. 155,111 were granted to me for certain improvements in horse-powers, which Letters Patent have been reissued. In the invention there patented a large armless master-wheel is used, which has a groove on its under side, into which are placed rollers that are attached to castings rigidly secured to the bed-frame. In such invention the rollers simply revolve in their castings, and are not carried around with the master-wheel. The present application is intended as an improvement upon such patented device in the particular hereinafter described and claimed. My invention, therefore, relates to that class of horse-powers in which an armless wheel is made to revolve and transmit power to a band or other wheel within the same; and the nature of my invention consists in a circular railway-track made stationary on the base, and a series of strands containing small flanged car-wheels bolted securely to the under side of the master-wheel, as will be hereinafter more fully set forth.

In order to enable others skilled in the art to which my invention appertains to make and use the same, I will now proceed to describe its construction and operation, referring to the annexed drawing, in which—

Figure 1 is a plan view of a horse-power embodying my invention. Fig. 2 is a side elevation of the same.

A represents the base of my horse-power, and B is the armless master-wheel. On the base A is secured a circular railway-track, *a*, upon which run a series of small flanged car-wheels, *b b*, each of said wheels being suitably journaled in a stand, *d*, secured to the under side of the master-wheel B. C is a central shaft held above the master-wheel B in suit-

able standards E E secured to the base. On the ends of the shaft C are the flanged pinions D D gearing with the master-wheel, one of said pinions being loose on the shaft and the other fast thereon. On the shaft C, within the master-wheel B, is further secured the band or gear wheel G, from which motion is communicated to the machine to be driven. H H are the levers attached to the master-wheel, and to which the horses are to be hitched.

K K are slotted castings secured to the frame and carrying-rollers *x x*, which latter bear against the inner periphery of the master-wheel. These rollers, together with the flanged rollers *b b*, which rest on the track *a*, act as guides to keep the master-wheel in proper position on the frame and allow it to freely revolve.

I am aware that railroad turn-tables have been provided with under-projecting rollers, which run upon a track; hence I do not broadly claim such as my invention.

My main object has been to reduce the draft in horse-powers, and especially in the invention as previously patented to us.

It will be understood that in the device as previously patented the master-wheel B is provided with a circumferential groove in its bottom; and the friction-rollers are attached to castings rigidly secured to the bed-frame. In such case it was found difficult to have the groove perfectly circular and perfectly smooth, and oftentimes the friction-rollers by wear would twist and catch in this groove, and have a tendency to retard the free movement of the master-wheel.

In my present invention I dispense with the groove in the master-wheel, and provide a track on the bed-frame. This not only lessens the draft of the machine, but obviates the difficulties experienced in the other invention.

I am also enabled, with the construction of the present machine, to dispense with the flanges on the pinions which gear into the upper surface of the master-wheel, inasmuch as the friction-rollers have flanges and rotate with the master-wheel.

Having thus fully described my invention,

what I claim as new, and desire to secure by Letters Patent, is—

The combination, in a horse-power, of a frame, A, having circular track *a*, and the master-wheel B, having castings *d d*, carrying the flange-rollers *b b*, all substantially as set forth.

In testimony that I claim the foregoing I have hereunto set my hand this 31st day of December, 1874.

JOHN S. SCHOFIELD.

Witnesses:

W. T. CLARKE,
A. C. OLIETT.