



(22) Date de dépôt/Filing Date: 2016/10/27

(41) Mise à la disp. pub./Open to Public Insp.: 2017/04/28

(45) Date de délivrance/Issue Date: 2018/05/01

(30) Priorité/Priority: 2015/10/28 (US62/285,398)

(51) Cl.Int./Int.Cl. *A23L 2/54* (2006.01),
B01F 3/04 (2006.01)


(72) Inventeur/Inventor:
TIPTON, GUY, CA

(73) Propriétaire/Owner:
TIPTON, GUY, CA

(74) Agent: THERIAULT, MARIO D., P. ENG.

(54) Titre : APPAREIL DE CARBONATATION DE BOISSON ET METHODE

(54) Title: BEVERAGE CARBONATION SYSTEM AND METHOD

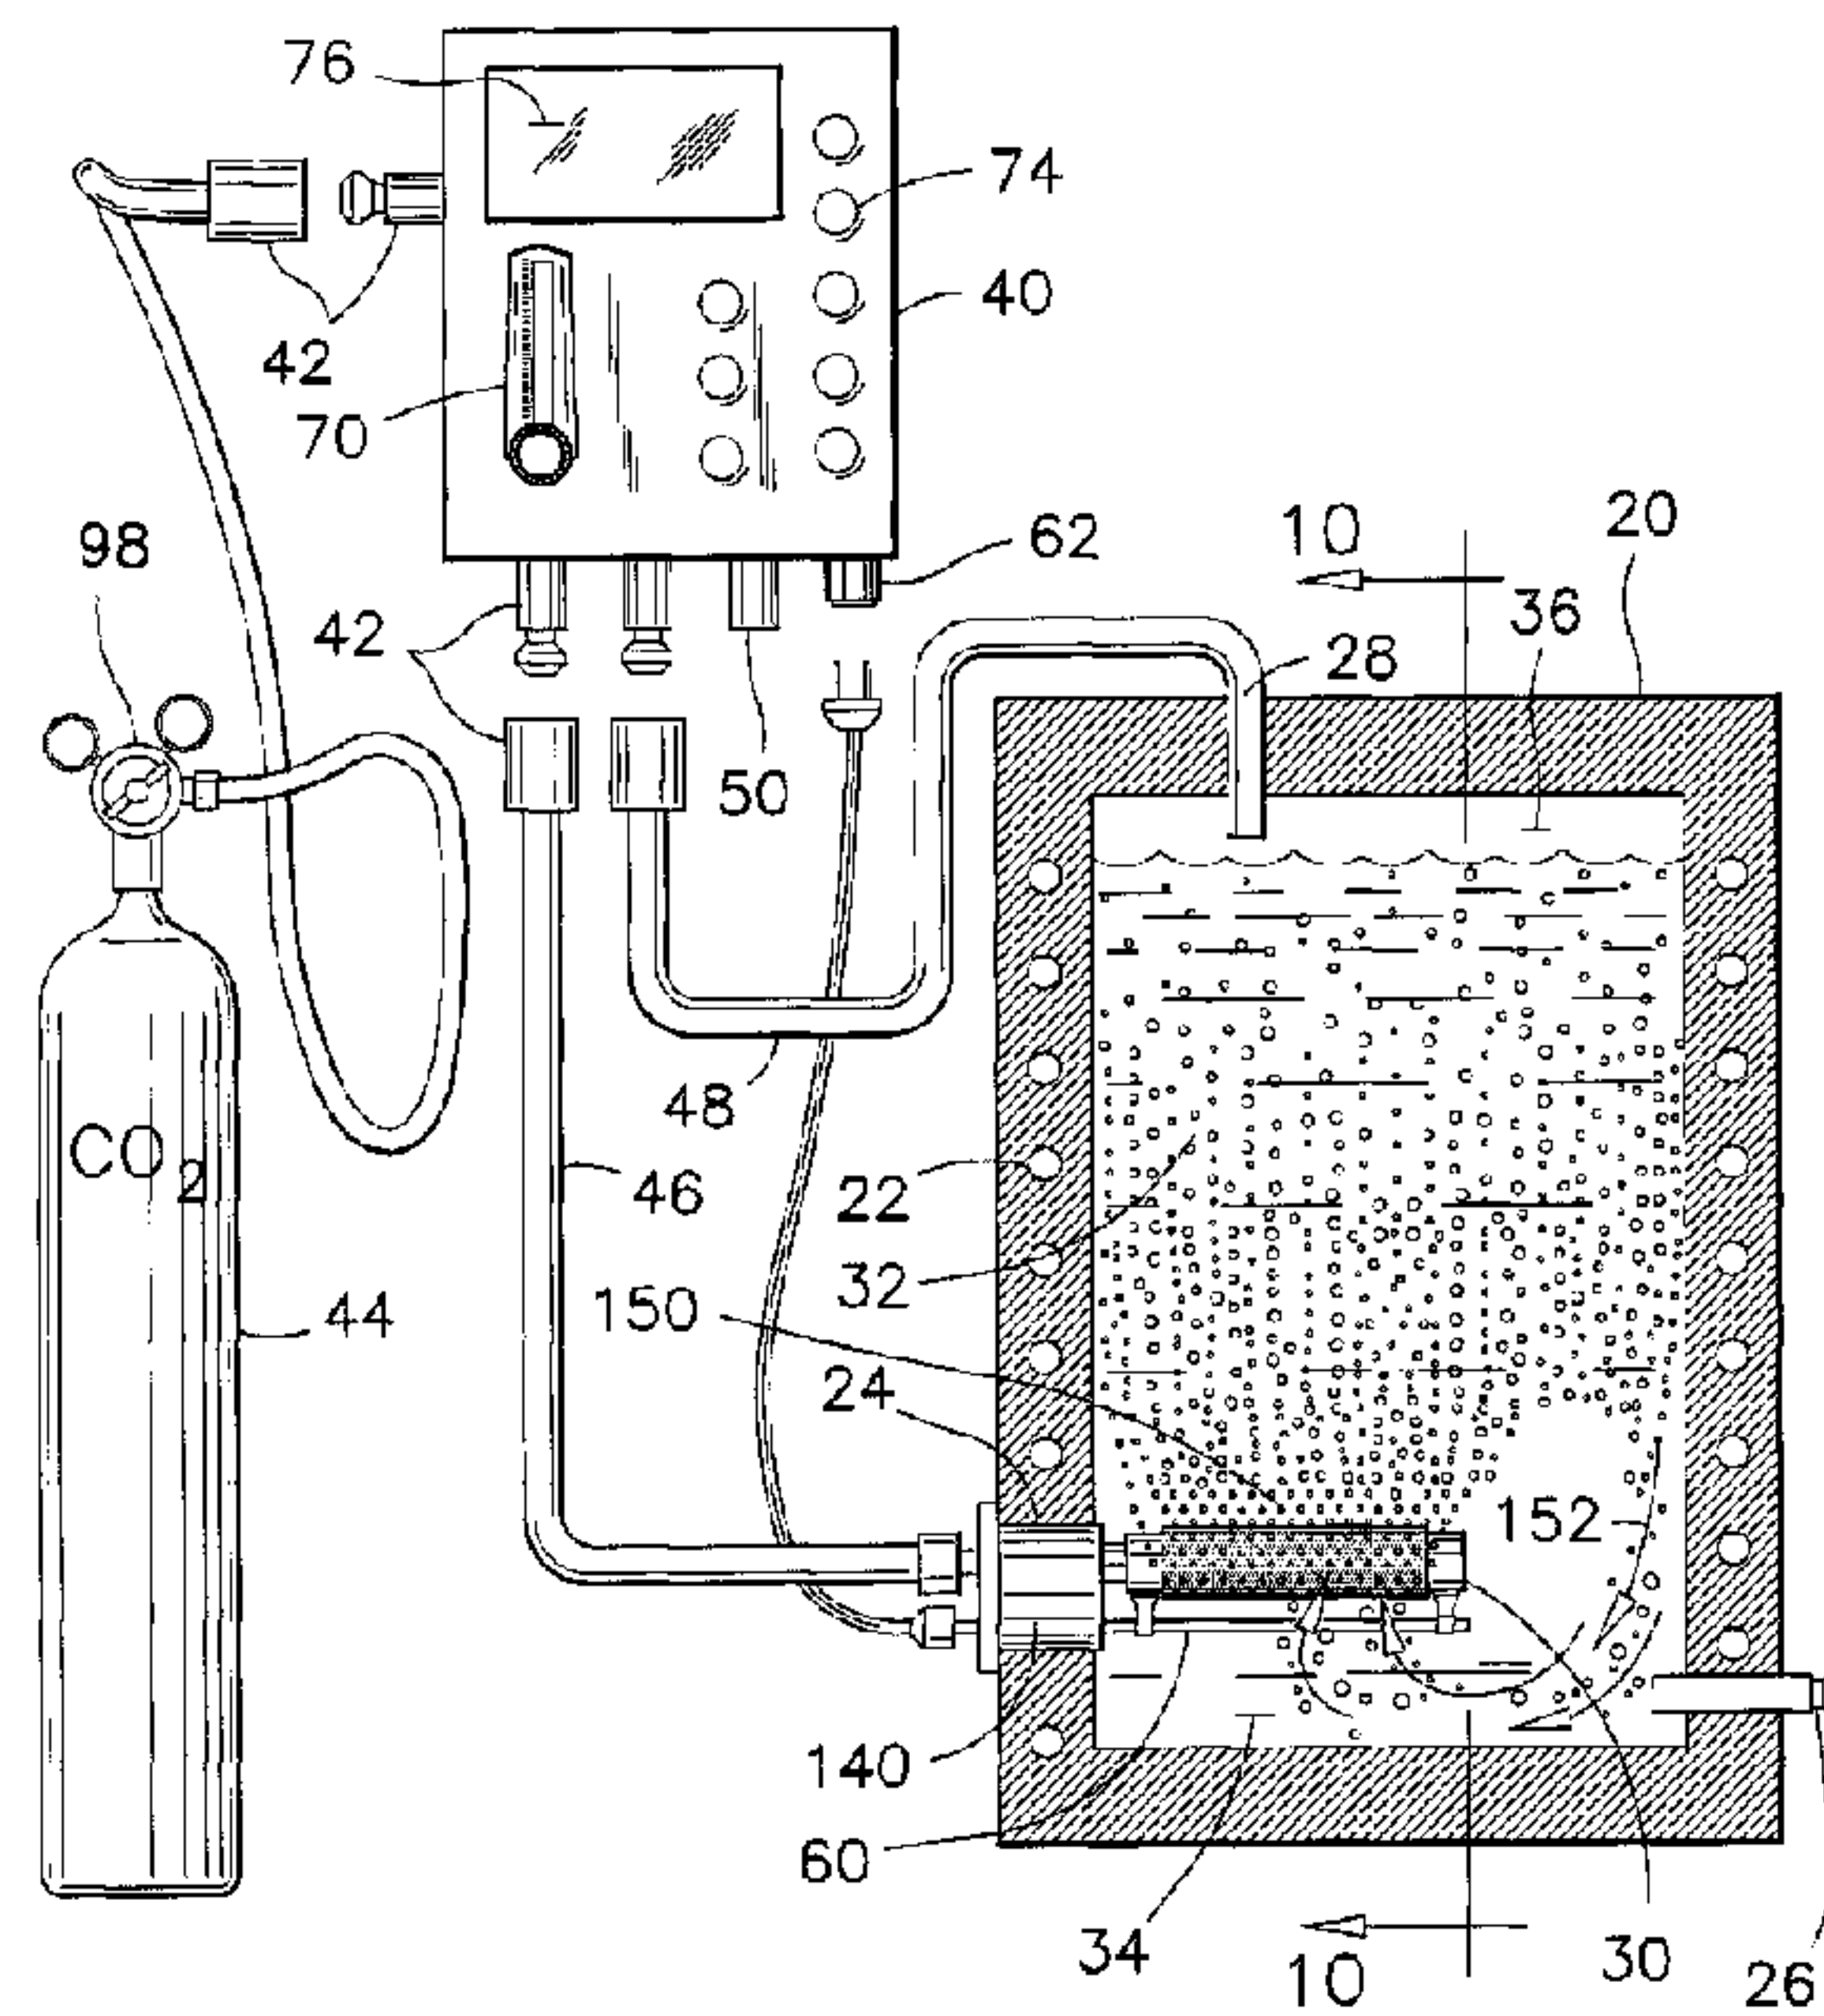

(57) Abrégé/Abstract:

In a method of carbonating a beverage using a carbon dioxide diffusing stone, temperature is measured in a flow of that beverage immediately before the flow changes from laminar to effervescent, thereby obtaining a true temperature at which carbon dioxide is diffused into the beverage. In another aspect of the present invention, there is provided a portable controller having connectors joinable to a gas pressure regulator of a gas cylinder and to any one of several beverage carbonation containers. The portable controller has instruments therein for controlling a flow of carbon dioxide gas to the beverage in any one of the containers and for controlling a pressure gradient of the carbon dioxide gas in the beverage over a period of time. There is also provided an elongated carbon dioxide diffusing stone assembly having an elongated temperature probe well extending parallel to and immediately below a diffusing stone.

ABSTRACT OF THE DISCLOSURE

In a method of carbonating a beverage using a carbon dioxide diffusing stone, temperature is measured in a flow of that beverage immediately before the flow changes from laminar to effervescent, thereby obtaining a true temperature at which carbon dioxide is diffused into the beverage. In another aspect of the present invention, there is provided a portable controller having connectors joinable to a gas pressure regulator of a gas cylinder and to any one of several beverage carbonation containers. The portable controller has instruments therein for controlling a flow of carbon dioxide gas to the beverage in any one of the containers and for controlling a pressure gradient of the carbon dioxide gas in the beverage over a period of time. There is also provided an elongated carbon dioxide diffusing stone assembly having an elongated temperature probe well extending parallel to and immediately below a diffusing stone.

TITLE: BEVERAGE CARBONATION SYSTEM AND METHOD**FIELD OF THE INVENTION**

5 This invention pertains to beverage carbonation, and more particularly it pertains to a system and a method for precisely controlling a pressure/temperature gradient in a beer carbonation process.

BACKGROUND OF THE INVENTION

10

The process of adding carbonic acid to a freshly fermented beer has been known since at least 1892. In **US Patent 475,853**, issued to C. Feigenspan on May 31, 1892, there is described therein a method for carbonating beer. The document describes a process where a volume of
15 freshly fermented beer in a closed cask is circulated by a pump along a pipe circuit. A carbonic acid injector is mounted in the pipe circuit for injecting carbonic acid in the beer. The purpose of adding carbonic acid to beer was to produce a superior quality beer. Complete saturation of the beer in the cask with carbonic acid was obtained in a period of two
20 hours or less, thereby establishing a “time factor” in a beer carbonation recipe. The pressure inside the cask at the saturation level reached ten to twelve pounds per square inch, thereby establishing a “finish pressure factor” in a beer carbonation recipe.

25 It has been until 1946 before beer makers recognized that temperature was also a critical factor in the carbonation of beer. **US Patent 2,408,439** issued to R. Muehlhofer on October 01, 1946, teaches that the beer temperature for carbonation is best between 36 to 38⁰F. A cooling coil in the lower portion of the beer tank and a thermostat valve were
30 provided for maintaining beer at that temperature.

A few years later, **US Patent 2,514,463** issued to G.W. Bayers, Jr., on July 11, 1950, disclosed that a carbonation process is best carried out when the beer temperature is at 34°F. A number of additional publications have emphasized the use of temperature sensors and cooling systems to maintain the beverage at a low temperature during a carbonation process. The following documents disclose different systems using either a temperature monitoring or controlling devices or both during a beverage carbonation process.

US Patent 3,780,198 issued to L.F. Pahl et al., on December 18, 1973;

US Patent 4,022,119 issued to F.A. Karr on May 10, 1977;

US Patent 5,124,088 issued to W. C. Stumphauzer, on June 23, 1992;

US Patent 5,704,276 issued to Y. Osajima et al., on January 06, 1998.

As understood from the above documents, the prior art before 1971 have taught of three critical factors in a beer carbonation process: “process duration”; “finish pressure” and “a cool temperature”. A fourth and fifth critical factors have been taught in **US Patent 3,578,295** issued to J.L. Hudson, on May 11, 1971. Hudson teaches that “there are four principle factors in carbonating water: (1) agitation or the mixing of water and gas by stirring the water in the gas atmosphere; (2) the pressure of the gas within the receptacle; (3) the temperature of the liquid, such as water, to be saturated with gas, since cold water has a strong affinity for absorbing carbon dioxide gas; and (4) the length of time during which carbonation is carried out”. Hudson also used a carbonation ratio of 3 to 4 volumes of gas to one volume of beverage.

A few years later, it has been recognized that a relation between the pressure of CO₂ entering the carbonation receptacle and the temperature of the beverage to be carbonated is also an important factor in a beer carbonating process. In that respect, both publications listed below

recognized that a pressure/temperature relation must be precisely controlled to obtain repeatability in beer taste and quality. These publications are:

- US Patent 5,178,799** issued to J. Brown et al., on January 12, 1993; and
 5 **US Publication 2003/0000971** by T.L Nielson on January 02, 2003.

A number of additional documents have been found in the prior art describing different advances in processes and equipment for carbonating beverages. These documents are listed below for reference
 10 purposes to demonstrate the evolution and the state of the art in the field of beverage carbonation.

- US Patent 608,744**, issued to J.L. Alberger on August 9, 1899;
US Patent 1,261,294, issued to M.V. Ritchey on April 02, 1918;
US Patent 1,945,489 issued to J.R. Manley on January 30, 1934;
 15 **US Patent 2,580,516** issued to W.L. Chappelow on January 01, 1952;
US Patent 2,926,087 issued to F.O. Rickers on February 23, 1960;
US Patent 3,687,684 issued to R.L. Wentworth et al., on Aug. 29, 1972;
US Patent 3,992,493 issued to D.D. Whyte et al., on Nov. 16, 1976;
US Patent 4,265,376 issued to S.S. Skidell on May 5, 1981;
 20 **US Patent 4,999,140** issued to A.J. Sutherland et al., on Mar. 12, 1991;
US Patent 5,231,851 issued to B. Adolfsson on August 03, 1993;
US Patent 5,518,666 issued to G. Plester et al., on May 21, 1996;
US Patent 5,531,254 issued to A. Rosenbach on July 02, 1996;
US Patent 9,107,448 issued to N. Giardino et al., on August 18, 2015;
 25 **US Patent 9,107,449** issued to D.K. Njaastad et al., on August 18, 2015;
DE Patent 10 2008 056 795 issued to A. Hofmann on May 27, 2010.

In short, the prior art teaches or mentions the following important factors to be considered in a beverage carbonation process:

- 30 (1) the agitation or the mixing of water and gas;

- (2) the pressure of the gas within the carbonation receptacle;
- (3) the temperature of the liquid to be saturated with gas;
- (4) the length of time, or the inflow of gas during the carbonation phase;
- (5) the pressure gradient during the carbonation phase;
- 5 (6) the volume ratio between volume of CO₂/volume of liquid;
- (7) the pressure/temperature ratio during the carbonation phase;
- (8) the finish pressure of the carbonated beverage.

Based on the above factors, beer brewers have developed a general
10 carbonation guide for different type of beers, as illustrated in the
accompanying **FIG. 1**. This guide provides a volume of gas to be
absorbed by a volume of beer at a specific temperature and pressure, to
obtain a specific style of beer. Although this general carbonation guide
is well known, individual brewers have developed their own recipes to
15 produce and reproduce particular brands of beer and different flavors
within each brand. Each flavor is distinguishable by the basic cereal
with which it is produced. Each flavor is also distinguishable by its CO₂
content and by the way the carbonating process is being carried out.

20 Referring to **FIG. 2** in the attached drawings, each beer flavor is
distinguishable by a CO₂ pressure/flow gradient during the carbonating
phase and by the final or finish pressure of the beer of a specific flavor.
These flavor recipe curves are developed by brewers and are normally
kept as trade secrets.

25

It will be appreciated that these flavor recipe curves are indirectly
dependent on temperature, as a pressure/temperature relation is perhaps
the most important factor in the affinity of a beer for absorbing carbon
dioxide gas.

30

In the prior art, the temperature sensors have been mounted inside the beverage tank, near the top of the tank; near the wall of the tank, or outside the tank in a beverage recirculating pipe. Because the temperature of a fluid varies substantially within a same container, the methods to measure temperature as taught in the prior art are not considered sufficiently accurate, given that this measurement is detrimental to the success and repeatability of a beer flavor recipe. The placement of a temperature probe near the top of a tank, for example, is done with the assumption that the entire content of the tank is at a same temperature.

Beer temperature inside a carbonation tank can vary a few degrees, whether the sensor is placed at the top, the middle or at the bottom of the tank. Beer temperature also varies from near the wall of the tank to a region near the point of entry of the CO₂ into the tank and the point of mixing of CO₂ into the beverage. Beer temperature is also depending upon many factors such as heat transfer through the tank wall, the heat generated by pumping equipment, heat transfer through pipe insulation, etc.

20

As it is mentioned in **US Patent 5,178,799** issued to Brown et al., on January 12, 1993, when beverage temperature increases, the pressure in the CO₂ supply line must also be increased to maintain the same carbonation level. Beverage temperature varies due to daily, seasonal, or geographic trends, and can cause excessive levels of carbonation resulting in excess carbonation, high foaming levels and wastage during bottling. Similarly, the under-carbonation of a volume of beer causes product returns due to shortfalls in client's expectations.

25

While the measurement and control of flow, time and pressure can be easily done precisely with modern instruments, temperature remains elusive within a same volume of beverage. In order to maintain a volume of beverage at an exact temperature for a period of time, the beverage container and the cooling equipment needs to be operated for an extended period of time after filling, to ensure that all components of that system are at a same temperature. Furthermore, the beverage itself needs to be acclimated to the reservoir and circulated entirely for an extended period of time to ensure an homogenous temperature throughout the beverage.

Furthermore, the maintaining of a volume of beverage at the same temperature also requires that the CO₂ dispersed into the beverage be dissipated at the same temperature as the beverage to be treated. Such a procedure requires sophisticated equipment and a complex installation. Such a procedure lengthens the carbonation process. This equipment and installation are not always suitable to a micro-brewery where profit margins are modest.

Therefore, it is believed that there is a need in the craft brewing industry for a better system and a better method for precisely and economically monitoring beer temperature during a beer carbonation process. There is a need in the micro-brewery field for an economical system and method to precisely control a pressure/temperature ratio so that beer flavor is accurately repeatable and beer quality is as good as the product of large breweries.

In another aspect of beer carbonation, it is generally known that micro-breweries prefer to operate their processes at low pressure of less than 15 psi. A low pressure system is not subject to stringent regulations,

worker qualification and re-qualification and frequent safety inspections and audits. Therefore, it is also believed that there is a need in this field for a carbonation process that can be carried out at low pressure.

5 SUMMARY OF THE PRESENT INVENTION

In the present invention, there is provided a system for monitoring beverage temperature with a high precision, so that the repeatability of a specific beverage flavor can be better obtained and repeated. The
10 beverage carbonation system and method according to the present invention is carried out at low gas pressure.

In a first aspect of the present invention, there is provided a method of carbonating a beverage. This method comprises the steps of:

- 15 - creating an upward laminar flow in the beverage;
- during a period of time, forcing carbon dioxide gas bubbles into the upward laminar flow of the beverage, thereby changing the upward laminar flow to an upward effervescent flow;
- using the carbon dioxide gas, applying a pressure gradient on the
20 beverage during the period of time;
- measuring a temperature of the beverage immediately before the upward laminar flow changes to the upward effervescent flow, and
- adjusting the pressure gradient according to the temperature measured.

25 The temperature probe being mounted at a location where the flow changes from laminar to effervescent provides a true reading of the temperature of the beverage at the point of mixing CO₂ into the beverage. The temperature probe mounted at that location provides an immediate reading of the true temperature, thereby eliminating any
30 buffer period or delay in the adjustment of pressure in the tank.

In another aspect of the present invention, there is provided a system comprising: a first and second containers of beverage each having a carbon dioxide diffusing stone mounted therein; a temperature probe mounted immediately below the carbon dioxide diffusing stone, and a
5 fill pipe therein. The first and second containers each having respective connections there through to their respective carbon dioxide diffusing stone, temperature probe, head space and fill pipe. The preferred system also comprises a tank of carbon dioxide gas under pressure having a gas pressure regulator mounted thereto. The present system also comprises
10 a portable controller having a first set of connectors joinable to the gas pressure regulator and to the respective connections of either the first or second containers. The portable controller has instruments mounted therein for controlling a flow of the carbon dioxide gas to the beverage and a pressure gradient of the carbon dioxide gas in the beverage in one
15 of the first and second containers over a period of time.

At the end of the carbonation of the beverage in the first container, the portable controller can be disconnected from the first container and connected to the second container, while the fill pipe of the first
20 container is connected to a bottling installation, for example. A single portable controller can be used to operate a multi-tank brewery.

In yet another aspect of the present invention, there is provided a carbon dioxide diffusing stone assembly comprising: a first gas-porous stone
25 mounted to an elongated tubular holder. An elongated temperature probe well extends parallel to and below the elongated tubular holder and the first stone. The carbon dioxide diffusing stone assembly also comprises a bunghole plug having a first and second parallel holes there through, wherein the elongated tubular holder extends through the first
30 hole and the temperature probe well extends through the second hole.

When the carbon dioxide diffusing stone assembly is mounted in the
bunghole of a beverage container, the temperature probe is located
immediately before the flow of beverage in a tank changes from laminar
to effervescent.

5

This brief summary has been provided so that the nature of the invention
may be understood quickly. A more complete understanding of the
invention can be obtained by reference to the following detailed
description of the preferred embodiment thereof in connection with the
attached drawings.

10

BRIEF DESCRIPTION OF THE DRAWINGS

A preferred embodiment of the beverage carbonation system and method
according to the present invention is described herein with the aid of the
accompanying drawings in which like numerals denote like parts
throughout the several views:

15

FIG. 1 is a low-pressure carbonation guide used by many breweries for
the carbonation of different styles of beer;

20

FIG. 2 shows different flavor recipe curves used in a beer carbonation
process;

25

FIG. 3 illustrates the elements included in the beverage carbonation
system according to the preferred embodiment of the present invention;

FIG. 4 is graph showing a beverage carbonation process being carried
out according to a flavor recipe curve, using the instruments according
to the preferred embodiment of the present invention;

30

FIG. 5 is a block diagram of the circuit board in the preferred beverage carbonation system;

FIG. 6 is a block diagram of the elements and function of the preferred
5 beverage carbonation system;

FIG. 7 is a plan view of the elements inside the housing of the portable controller in the beverage carbonation system according to the preferred embodiment of the present invention;

10

FIG. 8 is perspective view of a first model of CO₂ diffusing stone assembly in the beverage carbonation system according to the preferred embodiment of the present invention; and

15 **FIG. 9** is perspective view of a second model of CO₂ diffusing stone assembly in the beverage carbonation system according to the preferred embodiment of the present invention.

FIG. 10 is a partial cross-section view of the reservoir in **FIG. 3**, as seen
20 along **line 10-10** in **FIG. 3**;

The drawings presented herein are presented for convenience to explain the functions of all the elements included in the beverage carbonation system according to the preferred embodiment of the present invention.
25 Elements and details that are obvious to the person skilled in the art may not have been illustrated. Conceptual sketches have been used to illustrate elements that would be readily understood in the light of the present disclosure. These drawings are not fabrication drawings and should not be scaled. Similarly, the word “beverage” is used herein to

designate beer, water or other beverages or fluids capable of being carbonated.

DESCRIPTION OF THE PREFERRED EMBODIMENT

5

Referring firstly to **FIG. 3** there is presented therein a complete assembly of the beverage carbonation system according to the preferred embodiment of the present invention. Specifically, the preferred carbonation system comprises a tank **20** or container including a cooling jacket **22** there-around. The tank has a bung hole **24** on one side, a fill pipe **26** on the other side, and a vent pipe **28** at the top. In use, a CO₂ diffusing stone assembly **30** is mounted in the bung hole **24** for mixing bubbles **32** of CO₂ into the beverage **34** in the tank **20**.

15 During a carbonation process, the tank **20** is filled with a beverage, freshly fermented beer for example, almost to maximum capacity, leaving only a small head space **36** at the top. The rate and pressure of CO₂ absorption into the beverage **34** of the tank is controlled by a portable programmable instrument, referred to herein as the portable controller **40**.

The portable controller **40** has quick disconnect-reconnect connections **42** for coupling a supply bottle **44** of CO₂ to the supply line **46** to the diffusing stone assembly **30**, and for coupling the line **48** of the vent pipe **28** to a vent nozzle **50**. A temperature probe well **60** is mounted to the diffusing stone assembly **30**. A temperature probe (not shown) inside the temperature probe well **60** is electrically connected to a receptacle **62** on the side of the portable controller **40**.

The portable controller **40** also has an adjustable CO₂ flow valve **70** therein for adjusting the inflow of CO₂ to the diffusing stone assembly **30**. Programming buttons **74** and a display screen **76** are also provided in the front face of the portable controller **40** to facilitate the
5 programming of different flavor recipe curves.

Referring to **FIG. 4**, there is illustrated therein a flavor recipe curve showing a carbonation time along the x-axis, a pressure gradient **80** and a finish pressure **82**. It will be appreciated that the actual production of
10 this recipe tends to follow the pressure gradient curve **80** as accurately as possible, with pressure variations **84** that are as small as possible. In order to achieve a tight-fit match of a flavor recipe curve, the portable controller **40** controls the flow of CO₂ in an on-off mode as seen in line **86**. The portable controller **40** also controls the pressure in the CO₂
15 supply line **46**.

In order to control the pressure in the CO₂ supply line **46**, the portable controller **40** interrupts the flow of CO₂ through the flow control valve **70**; it circulates CO₂ from the head space **36**, to a vent nozzle **50** or into
20 the supply line **46** of the dissipating stone assembly **30**.

The selection of the three options, a) flow valve **70** on-off; b) head space **36** to vent nozzle **50**; and c) head space **36** to CO₂ supply line **46**, are programmable in the portable controller **40**. The selection of one option
25 or the other generally depends on the rate of pressure increase or decrease in the head space **36**, the pressure in the CO₂ supply line **46** during the immediate past time period, or upon the location of the process along the flavor recipe curve **80**.

The rate of flow of CO₂ , the duration of a process, the finish pressure and the mode of pressure control, all contribute to obtaining a tight-fit match of a favor recipe curve. Therefore these data are kept by a brewer as a trade secret.

5

Referring now to **FIGS. 5-7**, there is illustrated therein three diagrams of the portable controller **40**. The portable controller **40** includes a circuit board **90** inside a housing **92**. The housing **92** has the aforesaid display screen **76** and programming buttons **74**.

10

The circuit board **90** has an Internet/telephone/network logging equipment **96** such that it can be programmed from a remote location, or it can communicate to a remote receiver. The circuit board **90** also has a programmable computer incorporated therein capable of storing one or more flavor recipe curves **80**.

15

Referring particularly to **FIGS. 3, 6 and 7**, the CO₂ pressure is set at the regulator **98** on the CO₂ tank **44**. The tank **44** is connected to a quick disconnect-reconnect connection **42** and to the elements inside the portable controller **40**. The CO₂ supply line from the tank **44** is serially connected to a one-way check valve **100**, to a first pressure sensor **102** and then to a first solenoid valve **103**. The first solenoid valve **103** feeds the flow controller **70**. The flow of CO₂ from the controller **70** is optionally passed through a sterilizing UV light unit **106** and then fed to the supply line **46** of the dissipating stone assembly **30**.

20

25

The pressure of CO₂ gas accumulating at the head **36** of the reservoir **20** is read by a second pressure sensor **110**. This excess CO₂ gas can be directed through a second solenoid valve **112** and to the first pressure

sensor **102** to be fed back to the supply line **46**, or directed to a third solenoid valve **114** and exhausted to the vent nozzle **50**.

Referring to **FIG. 7**, the circuit board has a I/O terminal strip **120** to connect the elements of the portable controller **40** to the computer of the circuit board **90**.

A first diffusing stone assembly **30** is best illustrated in **FIG. 8**. The diffusing stone assembly **30** comprises one porous cylindrical stone **130** through which CO_2 is pumped, causing tiny bubbles of CO_2 to be dispersed from the stone **130**. The stone **130** is mounted to an elongated tubular holder **132**. A series of brackets **134** extend downward from the tubular holder **132** and support a temperature probe well **60**, in which a temperature probe **136** can be inserted. Both the temperature probe well **60** and the tubular holder **132** extend through a single bung hole plug **140**. The bung hole plug **140** is sealable into the bung hole opening **24** of the tank **20** by means of compressing screws **142** for example, or otherwise.

The diffusing stone assembly **30** can comprise two or more stones **130** as illustrated in **FIG. 9**. The structural arrangement of the diffusing stone assembly **30** and its mounting through a single bung hole plug **140** make it appropriate to satisfy many different installations. The number of stones **130** is selected according to the size of beverage reservoir in which the stones are mounted, basically, and the choice of the designer.

Referring now to **FIGS. 3** and **10**, it will be appreciated that the CO_2 being forced through the diffusing stone assembly **30** cause a region of effervescence **150** around and above the stones **130**. This region of effervescence **150** causes the beverage in the center of the tank to rise,

thereby creating a vertical upward flow at the center of the tank, and a vertically downward flow along the walls of the tank **20** substantially as indicated by the arrows **152** in **FIGS. 3** and **10**. The cooler walls of the tank also contribute to this downward flow near the walls of the tank.

5

As can be understood, the downward flow **152** entrains the beverage content from the bottom of the tank to rise passed the diffusing stone assembly **30**. The beverage at the top is then forced downward as mentioned above, and to rise again passed the diffusing stone **130**. The location of the diffusing stone assembly **30** in a lower central region of the reservoir **20** is preferred as the stone at this location creates the agitation factor that is required in a carbonation process.

10

By the arrangement of the diffusing stone assembly **30**, the temperature probe **136** is located in a laminar fluid flow immediately before this fluid flow changes from a laminar mode to an effervescent mode. The measurement of temperature at that location provides a true value of the temperature at which CO₂ is introduced into the beverage.

15

It is believed that better results are obtained in controlling the pressure of CO₂ being dispersed in the beverage according to a pressure/temperature ratio that corresponds to the temperature measured immediately before effervescence starts to occur. The measurement of temperature at that location eliminates any possible errors in controlling the pressure/temperature ratio of a flavor recipe curve. The measurement of temperature at that location eliminates adverse heat loss or heat transfer influences that could introduce false values in this P/T factor.

20

25

In the system according to the preferred embodiment, temperature is measured with a precision of 0.1°C (0.18°F), and the pressure/temperature ratio as well as the finish pressure are calculated accordingly.

5

As can be seen in **FIGS. 3** and **10**, an advantage in producing small CO_2 bubbles is that some of these bubbles are kept in suspension and entrained in the laminar flow **152** mentioned above. Therefore, it should be appreciated that the laminar and effervescent flows mentioned herein are referred to the beverage flow below and above the dissipating stone assembly **30**, respectively.

10

The preferred diffusing stone **30** is referred to as a 0.2 micron pore size stone. The preferred diffusing stone **130** is mounted on a tubular holder **132** and can be taken apart from the holder **132** by means of lockring (not shown) or otherwise. Therefore, the diffusing stone **130** can be cleaned periodically and maintained free of pore obstructions.

15

The quick disconnect-reconnect couplings **42** used in the preferred system are advantageous to the small breweries in that a single portable controller **40** can be used with several carbonation tanks. The quick disconnect-reconnect couplings **42** used in the preferred system are also advantageous to the small breweries in the calibration of the flow of the CO_2 through the diffusing stone assembly **30**.

20

25

In a preferred method of calibration, the CO_2 diffusing stone assembly **30** is placed in a bath of water. Its CO_2 supply line **46** is connected to the portable controller **40** and to a tank **44** of CO_2 . The pressure setting on the regulator **98** of the CO_2 tank **44** is set to overcome the head pressure of the fluid in the tank **20**, the pressure losses through the

30

diffusing stone **30** and to maintain a pressure that is inside the ranges of the carbonation guide as illustrated in **FIG. 1**. At all times, the pressure inside the supply line **46** and inside the tank **20** is kept under 15 psi.

5 With the stone in a bath of water, the flow of CO₂ to the CO₂ diffusing stone assembly **30** is then increased by adjustment of the adjustable flow control valve **70**, until a desired flow of CO₂ bubbles is obtained. The size and density of bubbles are selected visually and subjectively. However, a brewer quickly develops a good judgement by this method
10 to obtain an optimum flow of CO₂ from a particular type of diffusing stone.

More specifically, the preferred flow of CO₂ from the stone **30** is increased until the bubbles exiting the stone form a uniform layer with
15 an uniform density across the entire surface of the stone. This becomes the maximum flow for that stone.

Operating the carbonation system at this maximum flow ensures that the bubble sizes are small. Small CO₂ bubbles have low buoyancy, ensuring
20 a long residence time in suspension in the beverage, with less opportunity for the bubbles to reach the head space **36**. Keeping the bubble size small also has the advantage of relatively increasing the pressure differential of the CO₂ gas inside the bubbles over ambient pressure outside each bubble. This phenomenon is explained by the
25 LaPlace pressure equation, which teaches in a simplified version that $\Delta P = (\text{surface tension}) \times (2/\text{bubble radius})$. Furthermore, because of the geometry of spherical bubbles, a surface to volume ratio is larger with smaller bubbles. Thus, smaller CO₂ bubbles improve solubility, dissipation and carbonation efficiency.

30

The portable controller **40** having quick disconnect-reconnect fittings **42**, **62** is advantageous to the craft brewing industry in that a first volume of beer can be carbonated in a first tank **20** while a second volume of beer in a second tank is being pumped out and bottled, for example. A number of tanks, each having a CO₂ diffusing stone assembly **30** and appropriate fittings, can be alternatively connected to the same portable controller **40** using different flavor recipe for producing small batches of different flavors of beer. Instrumentation cost to a small brewer is thereby reduced.

When carbonation has been completed in one tank **20**, the portable controller **40** can also be used to maintain or to increase CO₂ pressure in the head space **36** of that tank **20**, to assist in emptying the tank **20**, or bottling the beverage inside the tank **20**.

Another advantage of the portable controller **40** is that it can be used to efficiently purge undesirable gases out of a tank of beer. The beverage carbonation system according to the present invention is used to pump CO₂ gas into the tank to an amount of at least one volume of beer in the tank. Undesirable gases such as Oxygen, Hydrogen and Sulfuric gases, are cause to rise and to accumulate in the head space **36** of the tank. These undesirable gases are vented out of the tank, and a carbonation process can be started.

While one embodiment of the present invention has been illustrated in the accompanying drawings and described herein above, it will be appreciated by those skilled in the art that various modifications, alternate constructions and equivalents may be employed. Therefore, the above description and illustrations should not be construed as

limiting the scope of the invention, which is defined in the appended claims.

CLAIMS

What is claimed is:

1. A method of carbonating a beverage, comprising the steps of:
creating an upward laminar flow in said beverage;
during a period of time, periodically forcing carbon dioxide gas bubbles into said beverage, in said upward laminar flow of said beverage, thereby changing said upward laminar flow to an effervescent flow;
using said carbon dioxide gas, applying a pressure gradient on said beverage during said period of time;
measuring a temperature of said beverage immediately before said upward laminar flow changes to said effervescent flow, and
adjusting said pressure gradient according to a pressure/temperature ratio dependent on said temperature.
2. The method as claimed in **claim 1**, wherein said steps of measuring a temperature and adjusting said pressure gradient are repeated periodically.
3. The method as claimed in **claim 1** wherein said beverage is contained in a container and said step of changing said upward laminar flow to an effervescent flow is effected in a central lower portion of said container.
4. The method as claimed in **claim 2**, wherein said step of measuring a temperature is effected with a precision of 0.1 °C (0.18°F).

5. The method as claimed in **claim 1**, further including the step of maintaining a majority of said carbon dioxide gas bubbles relatively small.
6. The method as claimed in **claim 1**, wherein said step of adjusting a pressure gradient is effected by one of the following steps:
momentarily interrupting said step of periodically forcing carbon dioxide gas bubbles into said beverage;
venting a portion of said carbon dioxide gas outside said container; and
venting a portion of said carbon dioxide gas outside said container and forcing said portion of said carbon dioxide gas back into said beverage.
7. The method as claimed in **claim 1**, wherein said steps of applying a pressure gradient and adjusting said pressure gradient are effected at a pressure of less than 15 psi.
8. The method as claimed in **claim 1**, further including the step of selecting a maximum flow of said carbon dioxide gas bubbles in said step of periodically forcing carbon dioxide gas bubbles into said beverage.
9. The method as claimed in **claim 8**, wherein said step of selecting a maximum flow comprises the step of:
forcing said carbon dioxide gas through a carbonation stone and
selecting said maximum flow of said gas bubbles when said gas bubbles exit said stone and form an uniform layer of bubbles with an uniform density, from an entire surface of said stone.

10. The method as claimed in **claim 1**, further comprising the steps of increasing a carbon dioxide gas pressure inside said container and emptying said container by force of said carbon dioxide gas pressure.
11. A system for carbonating a beverage, comprising:
 - a first and second containers of beverage;
 - said first and second containers of beverage each having a carbon dioxide diffusing stone mounted therein; a temperature probe mounted immediately below said carbon dioxide diffusing stone, a head space above a liquid level of said beverage in each of said first and second containers, and a fill pipe therein;
 - said first and second containers each having respective connections there through to said carbon dioxide diffusing stone, said temperature probe, said head space and said fill pipe;
 - a tank of carbon dioxide gas under pressure; said tank having a gas pressure regulator mounted thereto;
 - a portable controller having a first set of connectors joinable to said gas pressure regulator and to said respective connections of each of said first and second containers, and instruments mounted therein for controlling a flow of said carbon dioxide gas to said beverage in one of said first and second containers and a pressure gradient of said carbon dioxide gas in said beverage in said one of said first and second containers over a period of time.

12. The system as claimed in **claim 11**, further including a bottling installation having a second set of connectors joinable to said fill pipes of said first and second containers.
13. The system as claimed in **claim 12**, wherein said first set of connectors of said portable controller being connected to said carbon dioxide diffusing stone, said temperature probe, said head space of said one of said first and second containers, and said second set of connectors of said bottling installation being connected to said fill pipe of another of said first and second containers.
14. The system as claimed in **claim 13**, wherein said first set of connectors of said portable controller and said second set of connectors and said respective connections are quick connect-disconnect couplings.
15. A carbon dioxide diffusing stone assembly comprising:
a first gas-porous stone mounted to an elongated tubular holder;
an elongated temperature probe well extending parallel to said elongated tubular holder and said first stone;
a bunghole plug having a first and second parallel holes there through;
said elongated tubular holder extending through said first hole and said temperature probe well extending through said second hole.
16. The carbon dioxide diffusing stone assembly as claimed in **claim 15**, further including a second gas-porous stone mounted to said elongated tubular holder, inline with said first stone.

17. The carbon dioxide diffusing stone assembly as claimed in **claim 15**, wherein said parallel holes are vertically spaced, and said temperature probe well is mounted directly under said first stone.
18. The carbon dioxide diffusing stone assembly as claimed in **claim 15**, further comprising a quick disconnect-reconnect coupling along said tubular holder.
19. The carbon dioxide diffusing stone assembly as claimed in **claim 15**, wherein said first stone has a cylindrical shape.
20. The carbon dioxide diffusing stone assembly as claimed in **claim 15**, wherein said first stone is a 0.2 micron stone.

Carbonation Guide

C°	°F	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	PSI
-1.1	30	1.82	1.92	2.03	2.14	2.23	2.36	2.48	2.6	2.7	2.82	2.93	3.02	3.13	3.24	3.35	
-0.6	31	1.78	1.88	2	2.1	2.2	2.31	2.42	2.54	2.65	2.76	2.86	2.96	3.07	3.17	2.28	
0.0	32	1.75	1.85	1.95	2.05	2.15	2.27	2.38	2.48	2.59	2.7	2.8	2.9	3	3.11	3.21	
0.6	33	1.71	1.81	1.91	2.01	2.1	2.23	2.33	2.43	2.53	2.63	2.74	2.84	2.96	3.06	3.15	
1.1	34	1.68	1.78	1.86	1.97	2.06	2.18	2.28	2.38	2.48	2.58	2.69	2.79	2.9	3	3.09	
1.7	35	1.63	1.73	1.83	1.93	2.02	2.14	2.24	2.34	2.43	2.52	2.63	2.73	2.83	2.93	3.02	
2.2	36	1.6	1.69	1.79	1.88	1.98	2.09	2.19	2.29	2.38	2.47	2.57	2.67	2.77	2.86	2.96	
2.8	37	1.55	1.65	1.74	1.84	1.94	2.04	2.14	2.24	2.33	2.42	2.52	2.62	2.71	2.8	2.9	
3.3	38	1.52	1.61	1.71	1.8	1.9	2	2.1	2.2	2.29	2.38	2.48	2.57	2.66	2.75	2.85	
3.9	39	1.49	1.58	1.67	1.77	1.86	1.96	2.06	2.15	2.25	2.34	2.43	2.52	2.61	2.7	2.8	
4.4	40	1.47	1.56	1.65	1.74	1.83	1.92	2.01	2.1	2.2	2.3	2.39	2.47	2.56	2.65	2.75	
5.0	41	1.43	1.52	1.61	1.7	1.79	1.88	1.97	2.06	2.16	2.25	2.34	2.43	2.52	2.6	2.7	
5.6	42	1.39	1.48	1.57	1.66	1.75	1.85	1.94	2.02	2.12	2.21	2.3	2.39	2.48	2.56	2.65	
6.1	43	1.37	1.46	1.54	1.63	1.72	1.81	1.9	1.99	2.08	2.17	2.26	2.34	2.43	2.52	2.61	
6.7	44	1.35	1.43	1.52	1.6	1.69	1.78	1.87	1.95	2.04	2.13	2.22	2.3	2.39	2.47	2.56	
7.2	45	1.32	1.41	1.49	1.58	1.66	1.75	1.84	1.91	2	2.08	2.17	2.26	2.34	2.42	2.51	
7.8	46	1.28	1.37	1.45	1.54	1.62	1.71	1.8	1.88	1.96	2.04	2.13	2.22	2.3	2.38	2.47	

Volumes

Style	Volumes
Under Carbonated	0 to 1.4
Stouts, Porters	1.5 to 2.2
Lagers, Ales, Ambers, Most Beers	2.2 to 2.6
Highly Carbonated Ales, Wheat, Lambics	2.6+

FIG. 1
PRIOR ART

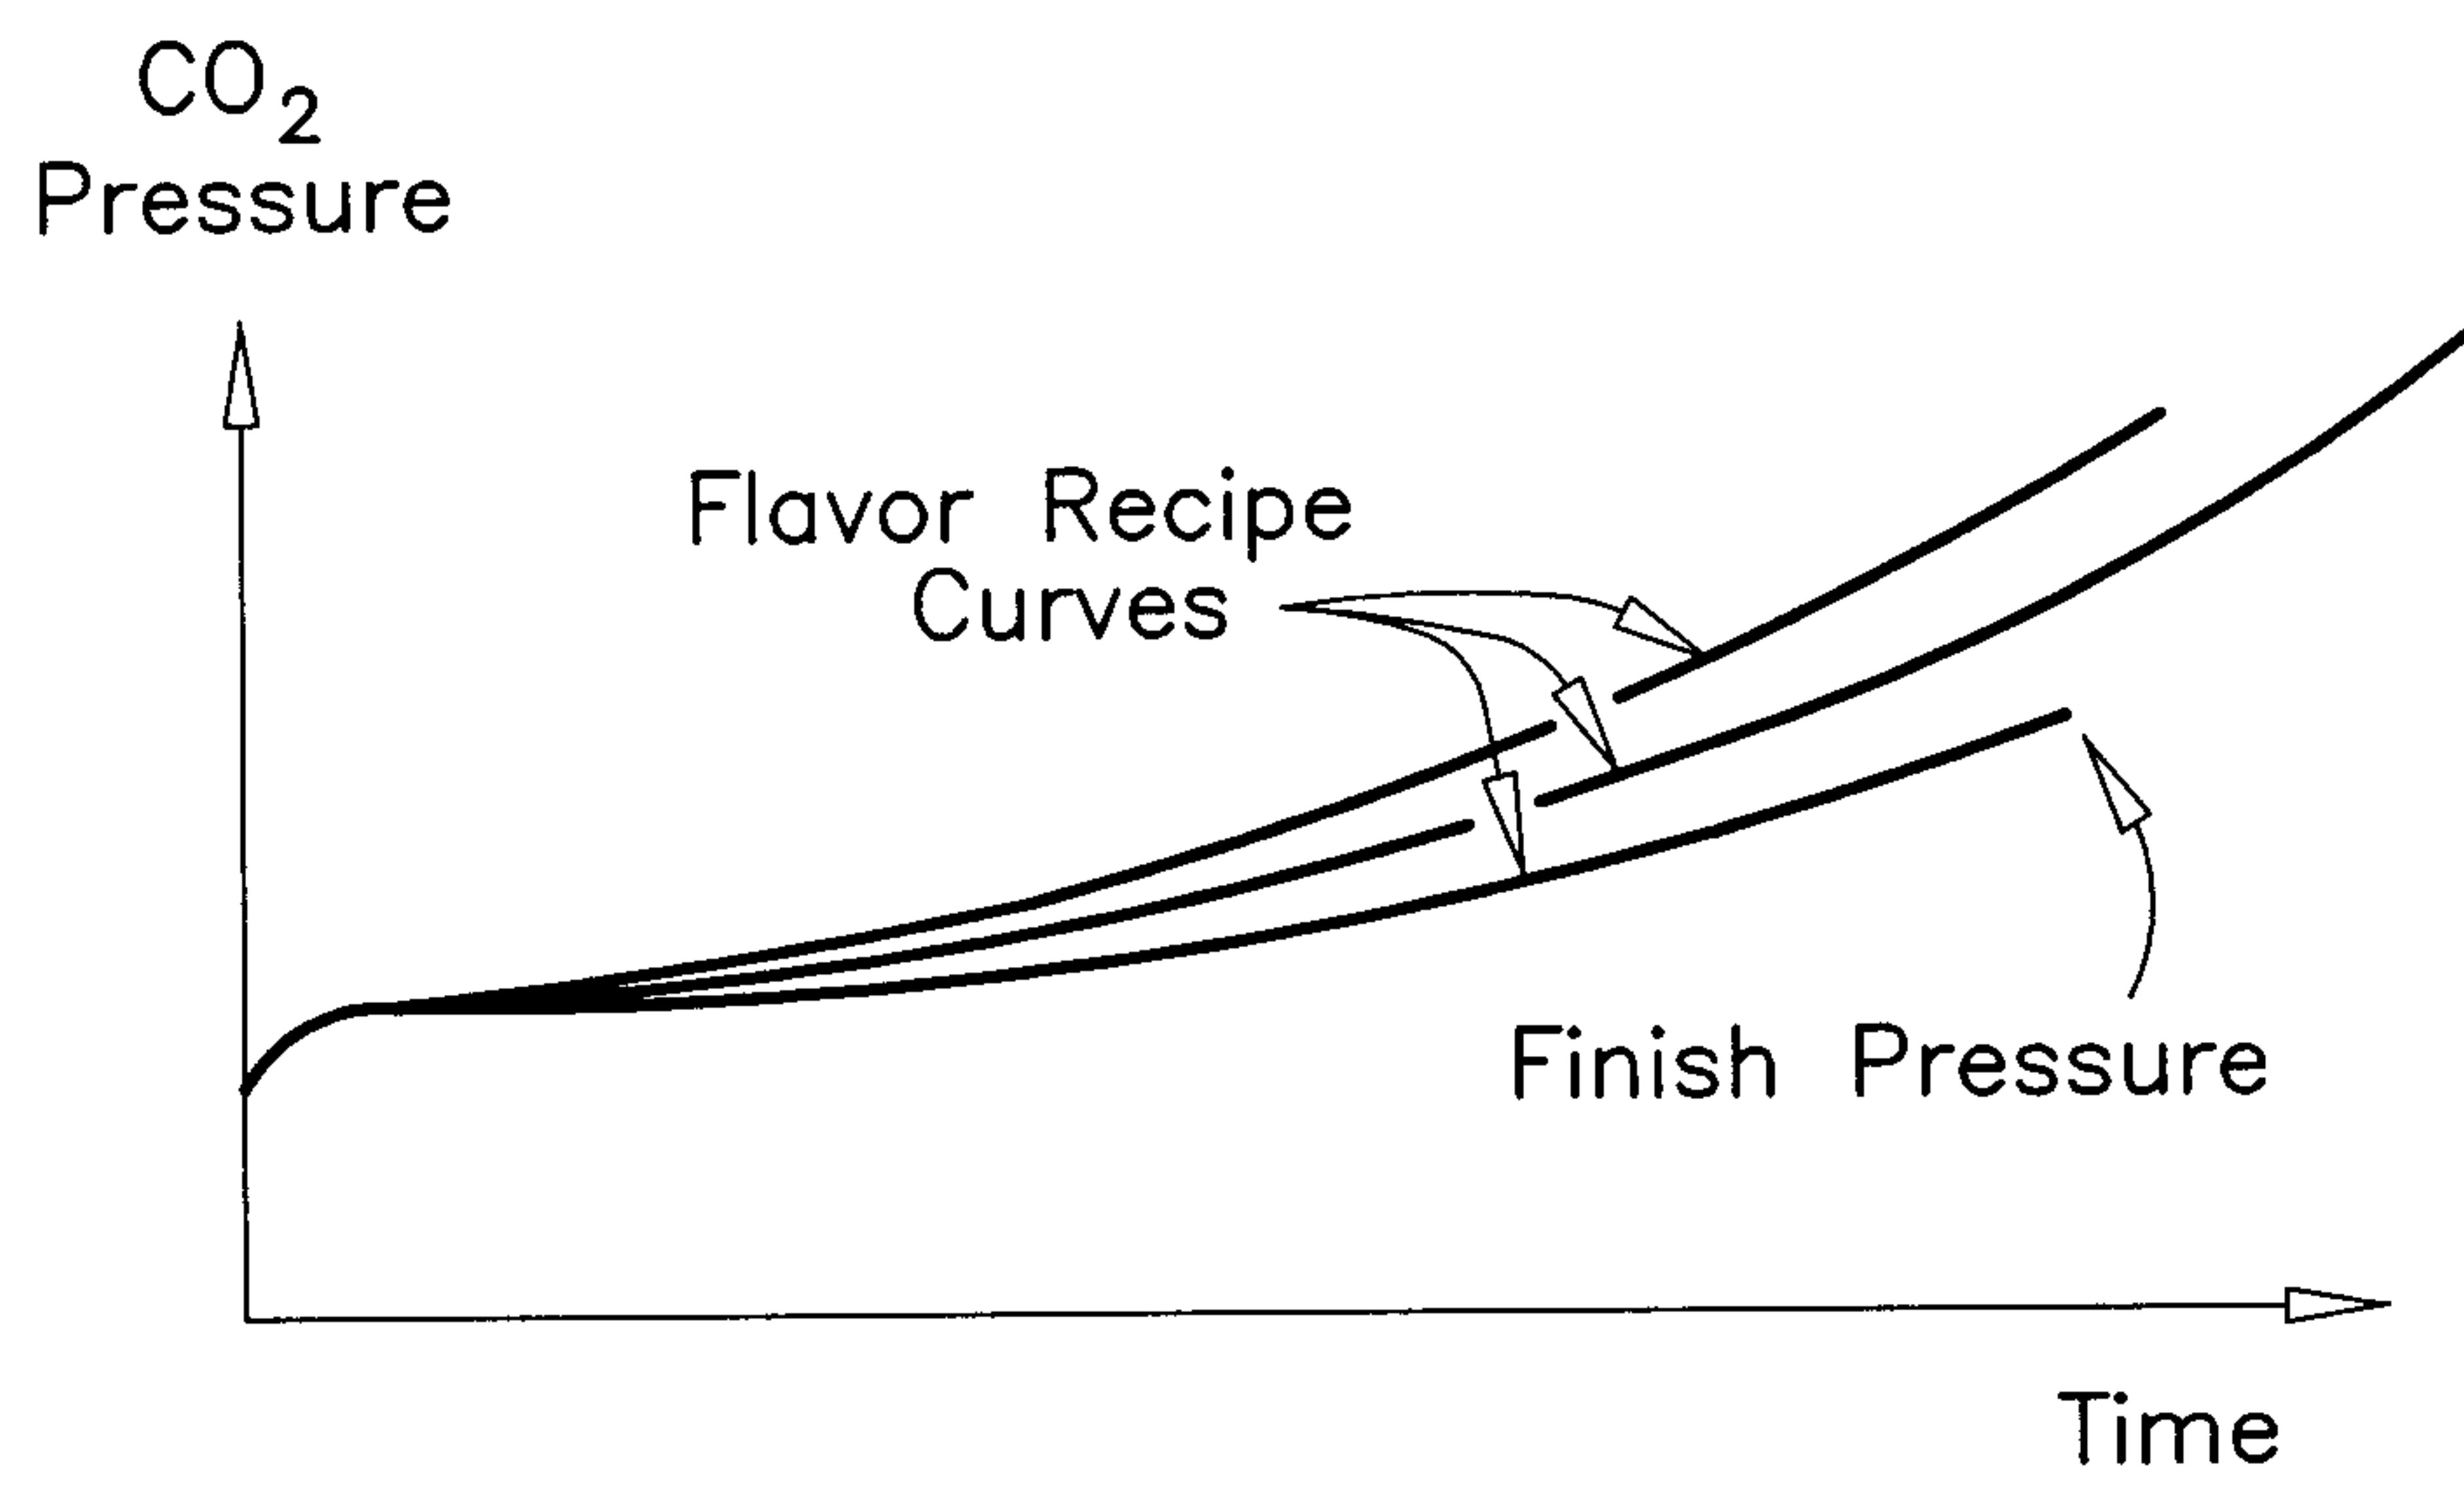
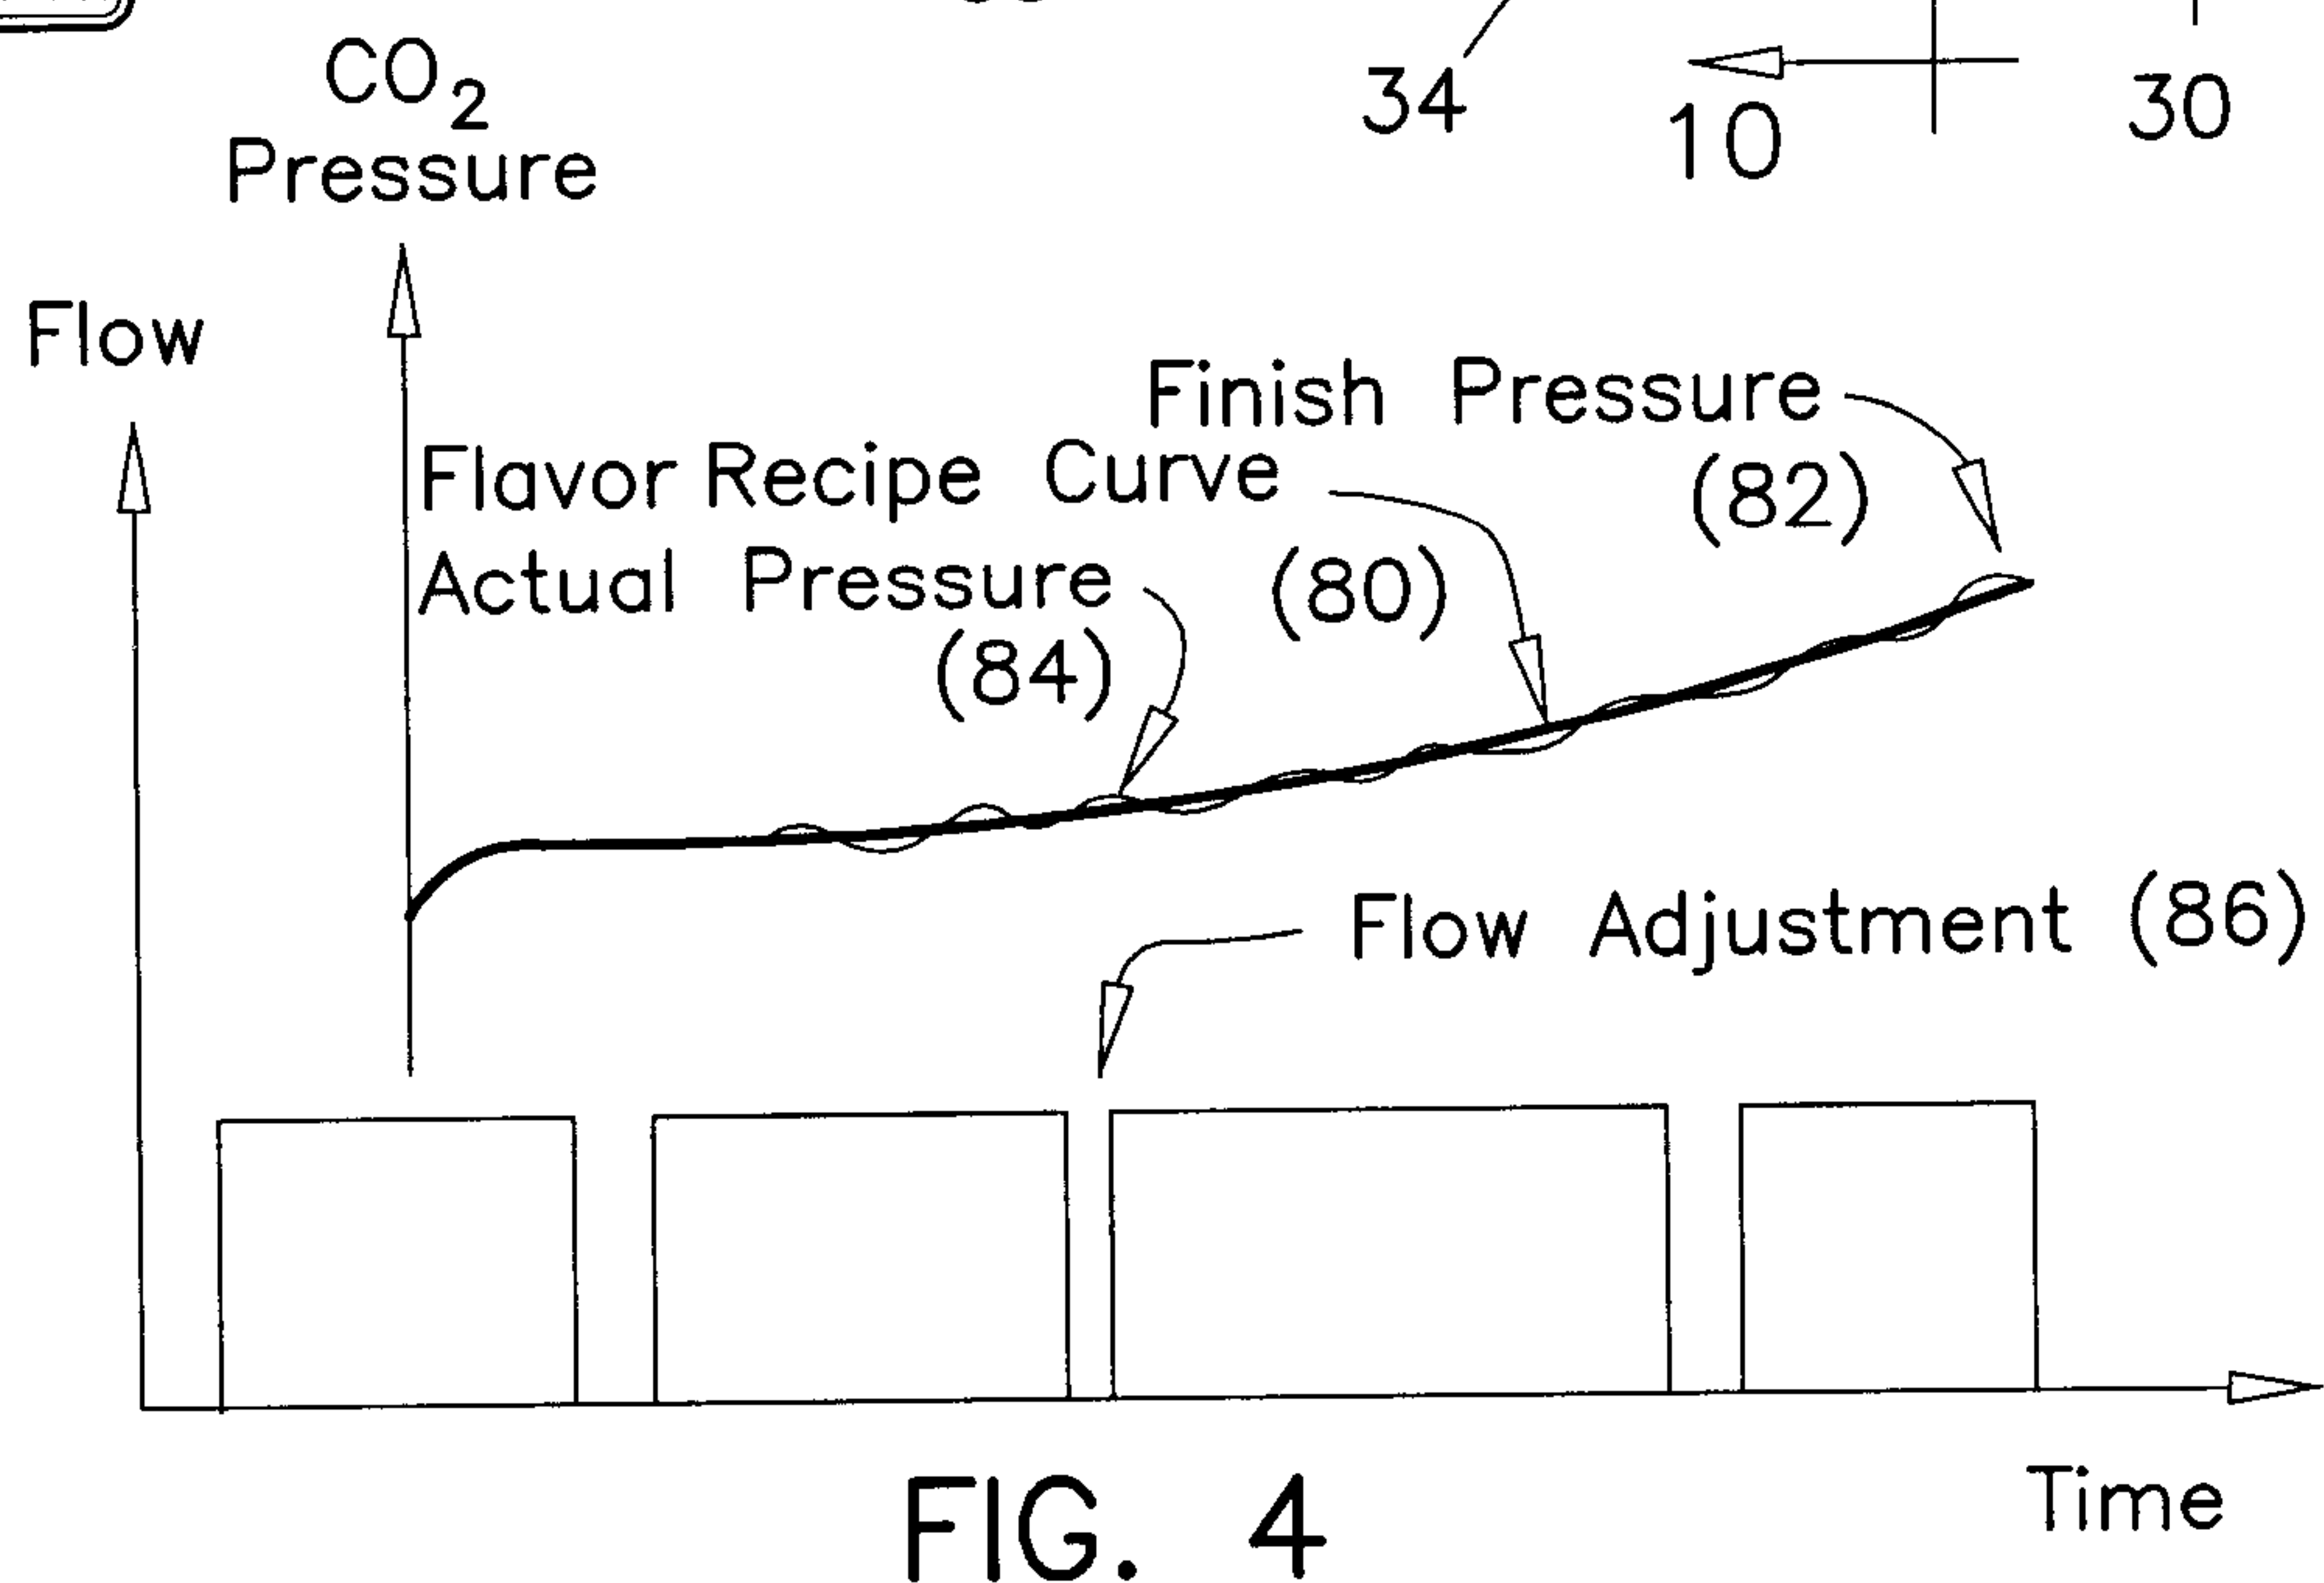
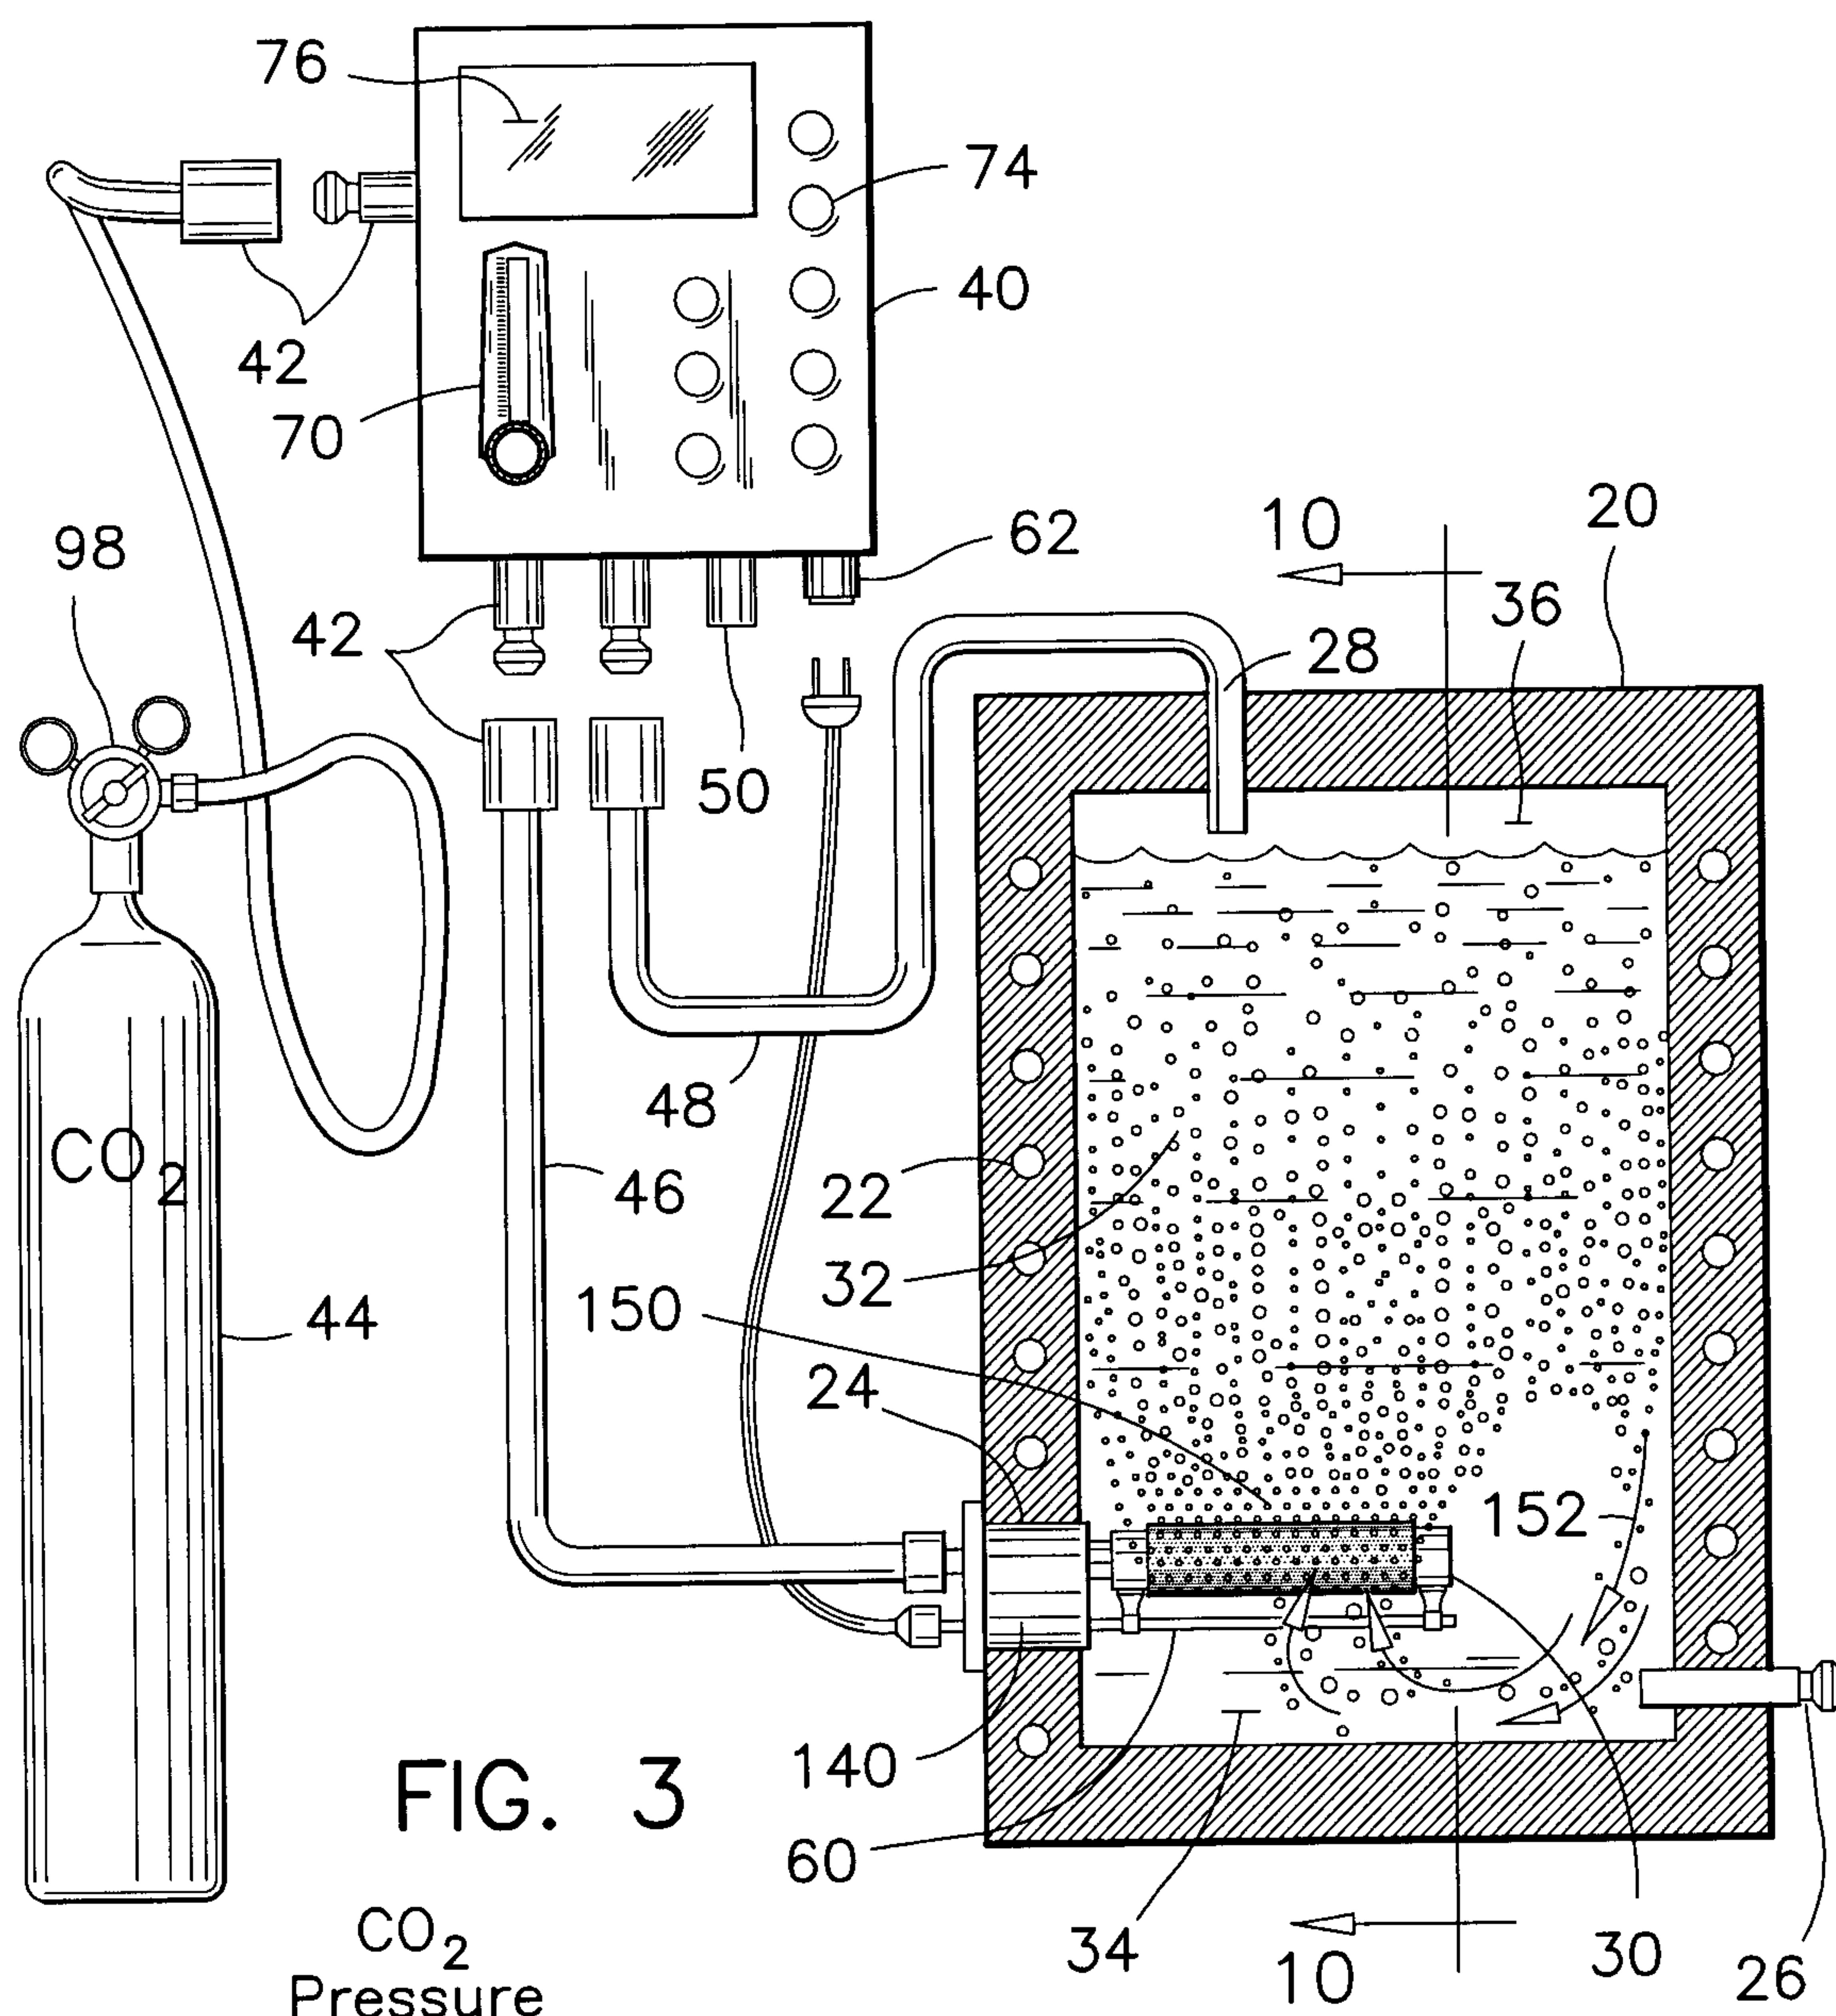


FIG. 2
PRIOR ART



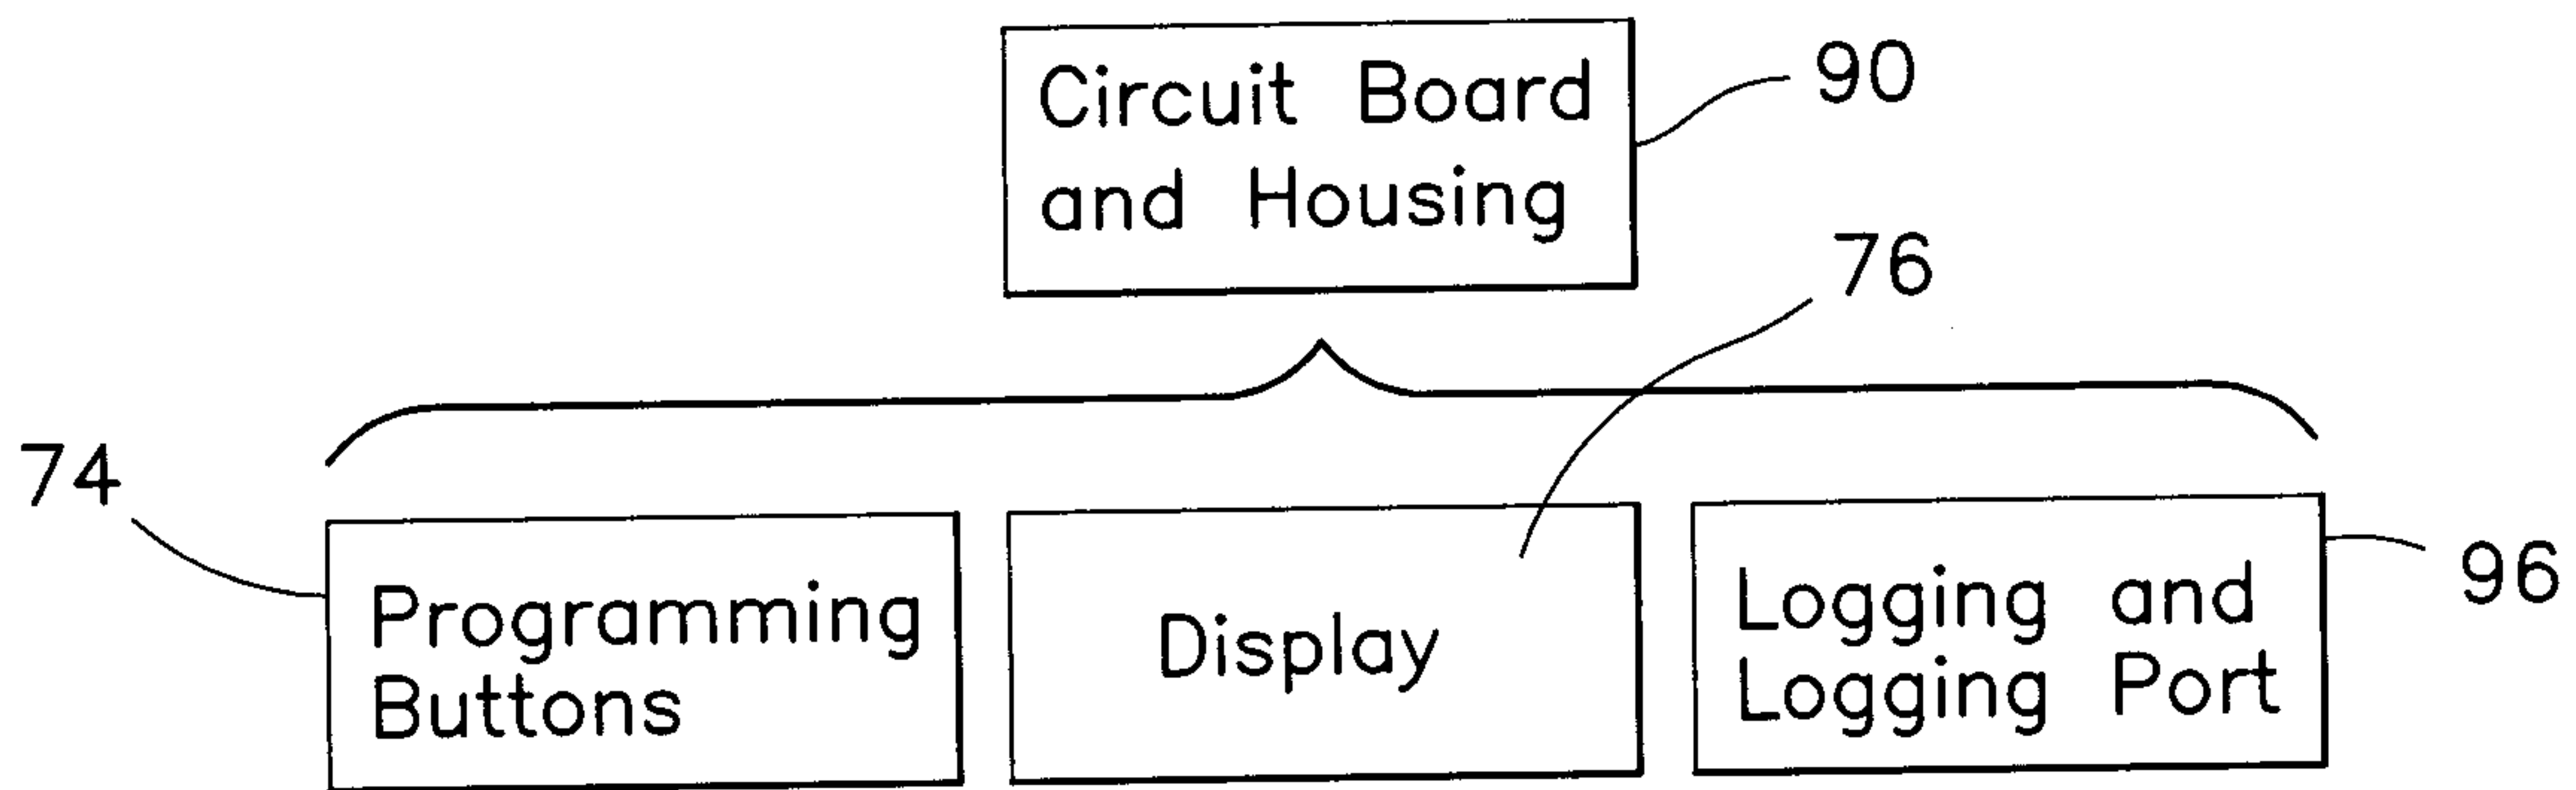
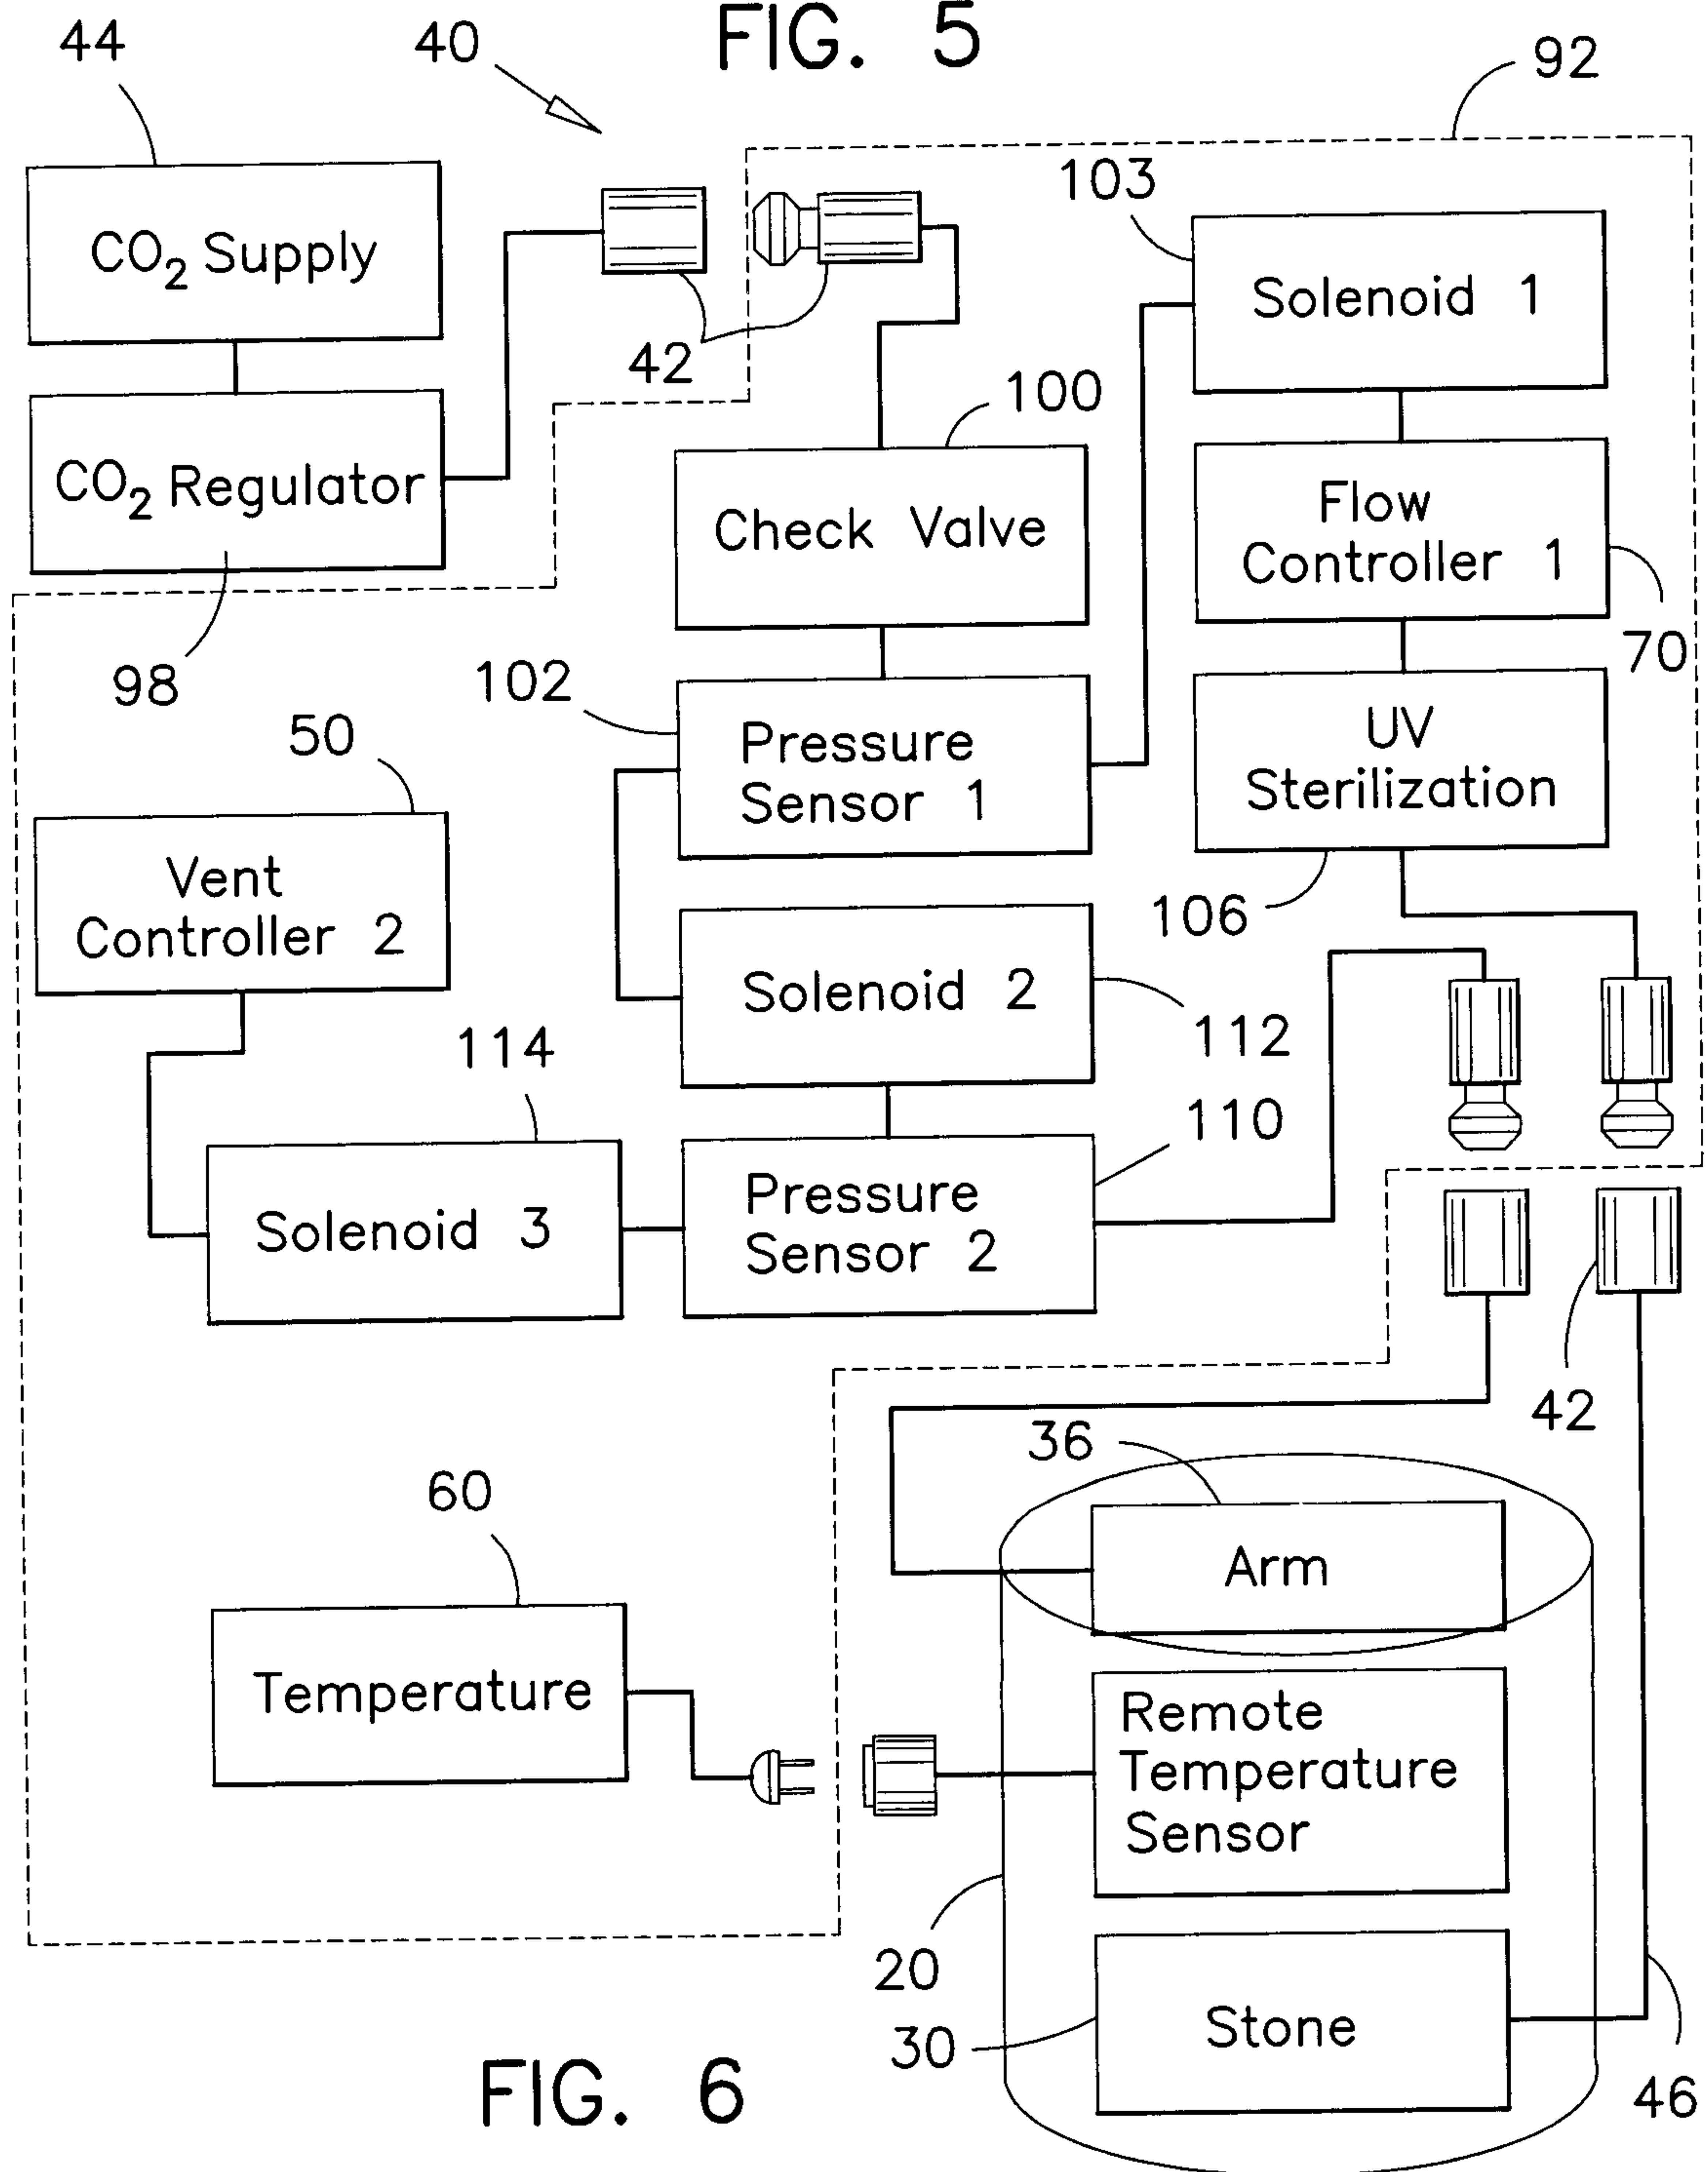


FIG. 5



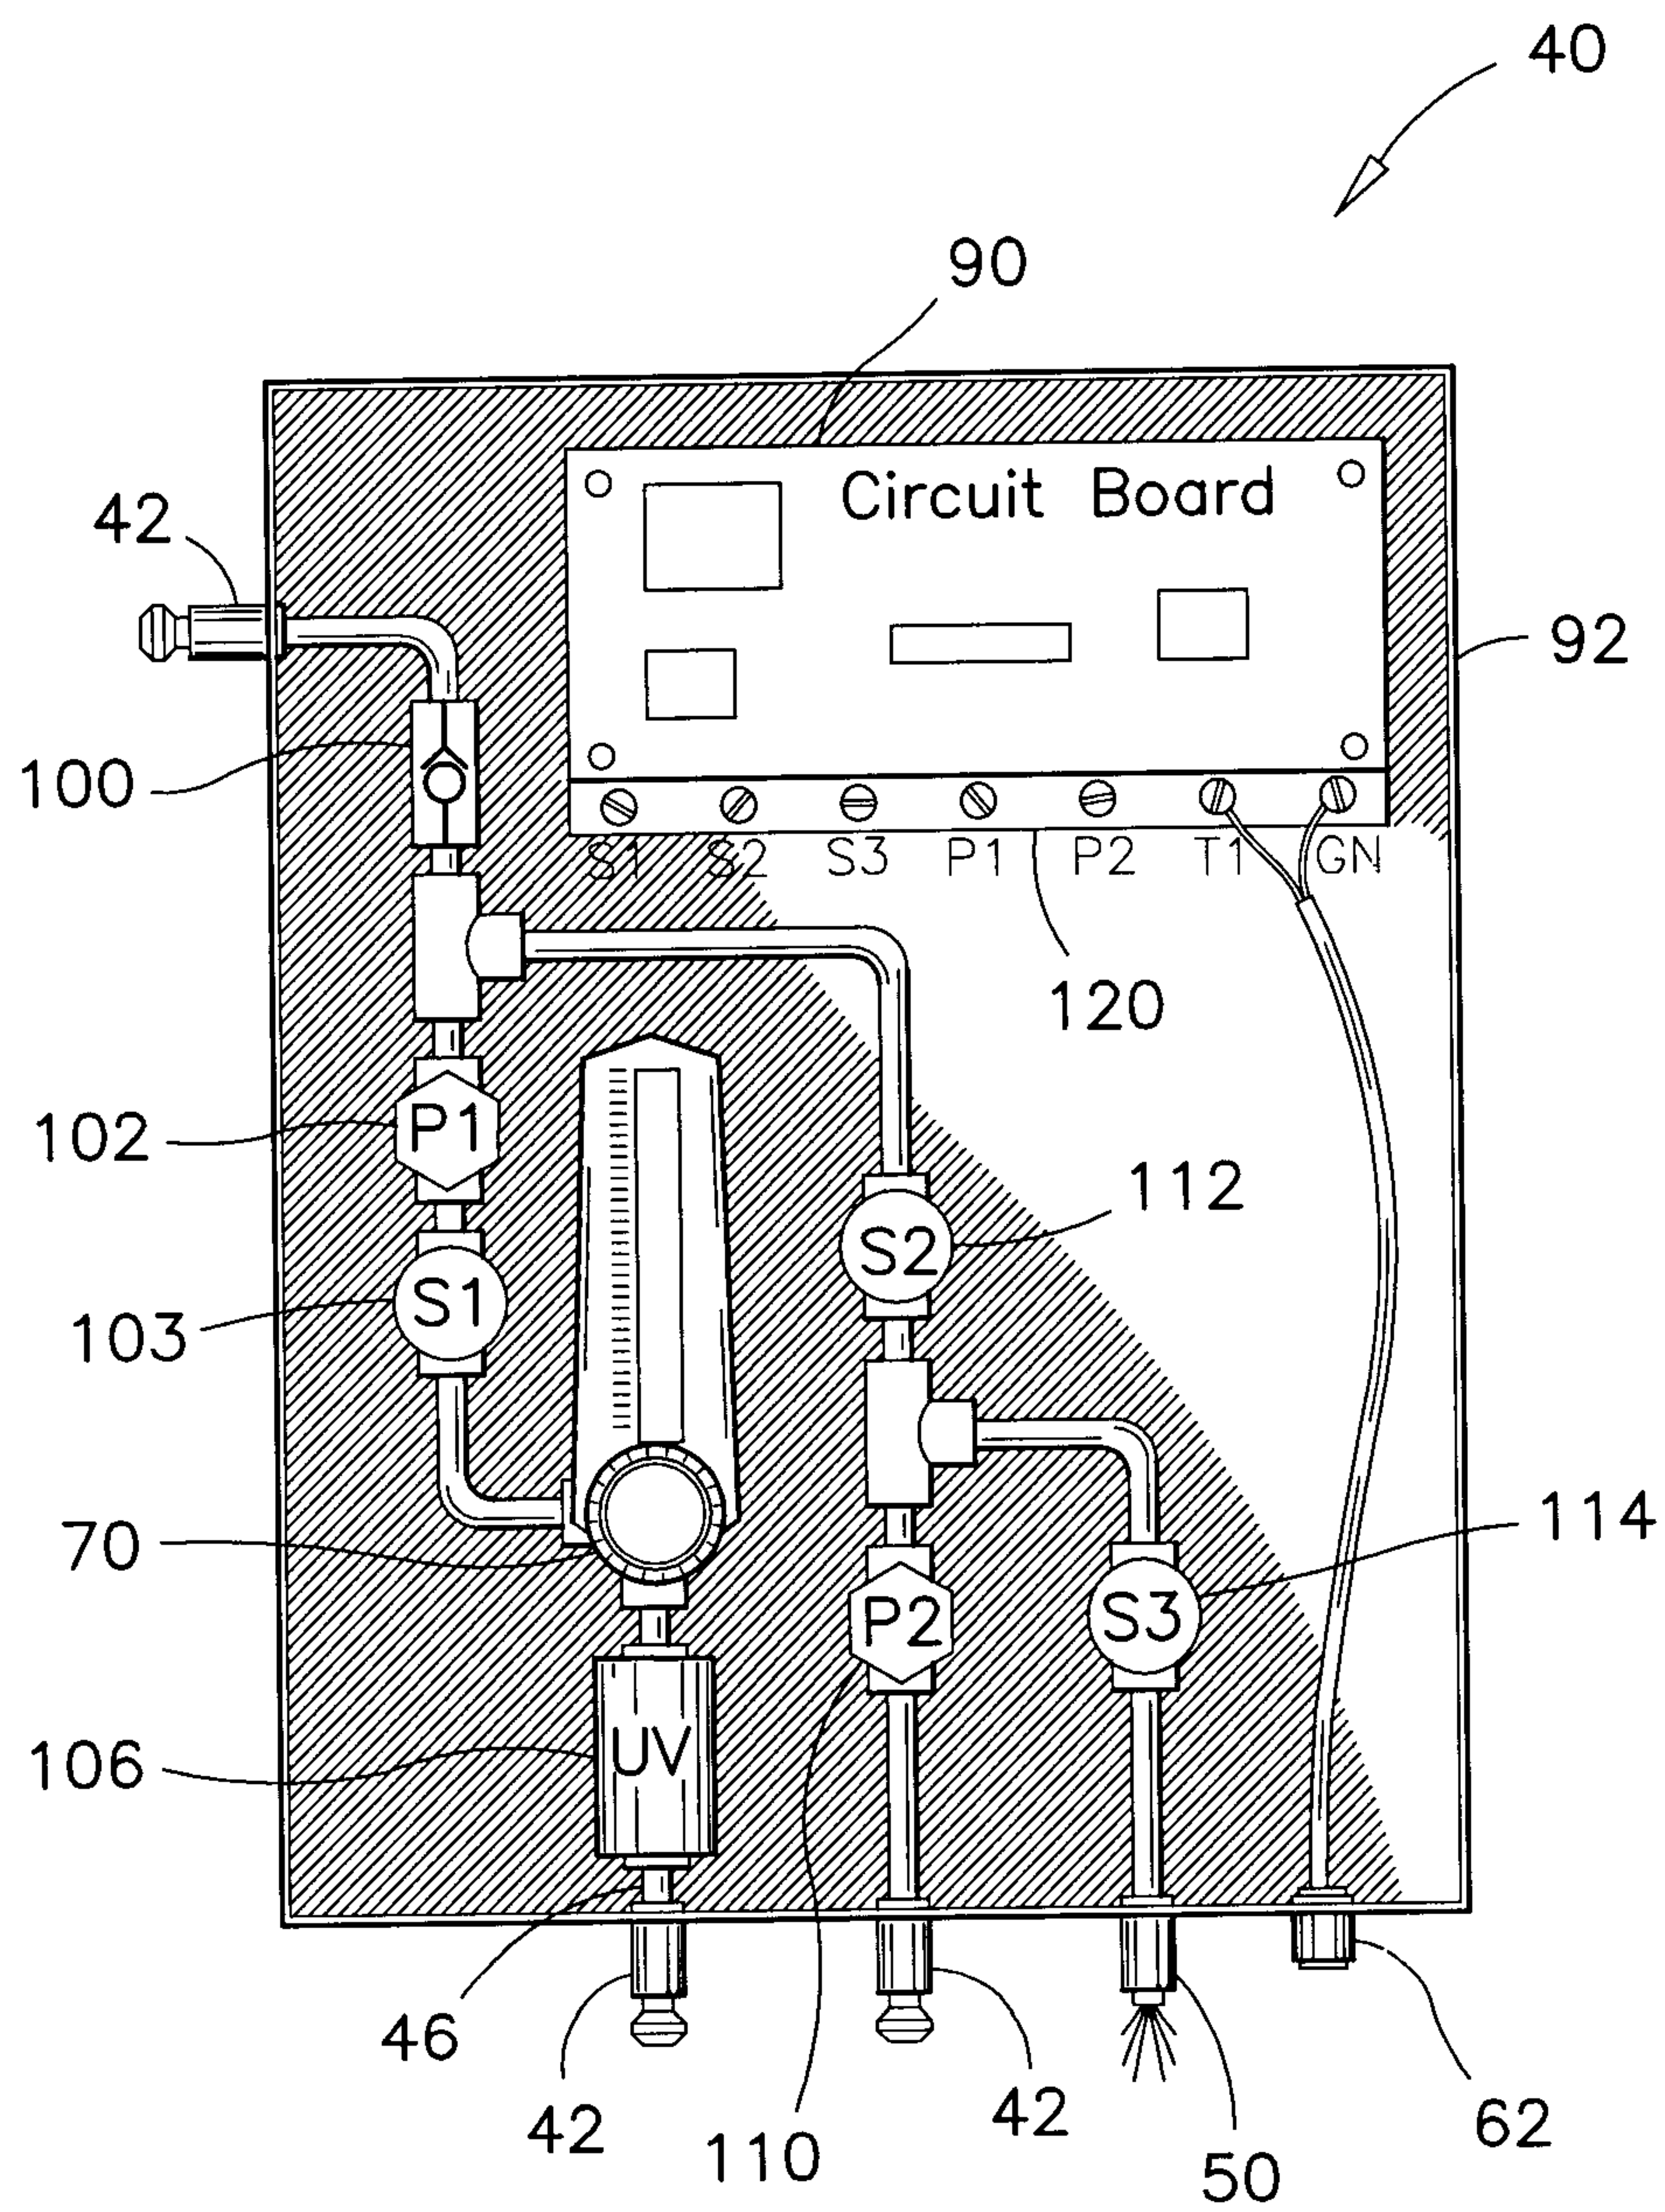


FIG. 7

