



(51) International Patent Classification:

H04M 1/725 (2006.01) *G06F 3/0488* (2013.01)

(21) International Application Number:

PCT/CN2019/074245

(22) International Filing Date:

31 January 2019 (31.01.2019)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

201810353206.0 19 April 2018 (19.04.2018) CN

(71) Applicant: **GUANGDONG OPPO MOBILE TELECOMMUNICATIONS CORP., LTD.** [CN/CN]; No. 18, Haibin Road, Wusha, Chang'an, Dongguan, Guangdong 523860 (CN).

(72) Inventors: **FU, Liangjing**; c/o Guangdong Oppo Mobile Telecommunications Corp., Ltd., No. 18 Haibin Road, Wusha, Chang'an, Dongguan, Guangdong 523860 (CN). **LI, Tongxi**; c/o Guangdong Oppo Mobile Telecommunications Corp., Ltd., No. 18 Haibin Road, Wusha, Chang'an, Dongguan, Guangdong 523860 (CN). **CAO, Dan**; c/o Guangdong Oppo Mobile Telecommunications Corp., Ltd., No. 18 Haibin Road, Wusha, Chang'an, Dongguan, Guangdong 523860 (CN). **LIN, Zhiyong**; c/o Guangdong Oppo Mobile Telecommunications Corp., Ltd., No. 18 Haib-

in Road, Wusha, Chang'an, Dongguan, Guangdong 523860 (CN).

(74) Agent: **SHENZHEN LUNGTIN LIANDING INTELLECTUAL PROPERTY AGENT LTD.**; 4A, Shangtian Bldg., Nanyuan Rd., Futian District, Shenzhen, Guangdong 518000 (CN).

(81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,

(54) Title: METHOD, APPARATUS, STORAGE MEDIUM, AND ELECTRONIC DEVICE OF PROCESSING SPLIT SCREEN DISPLAY

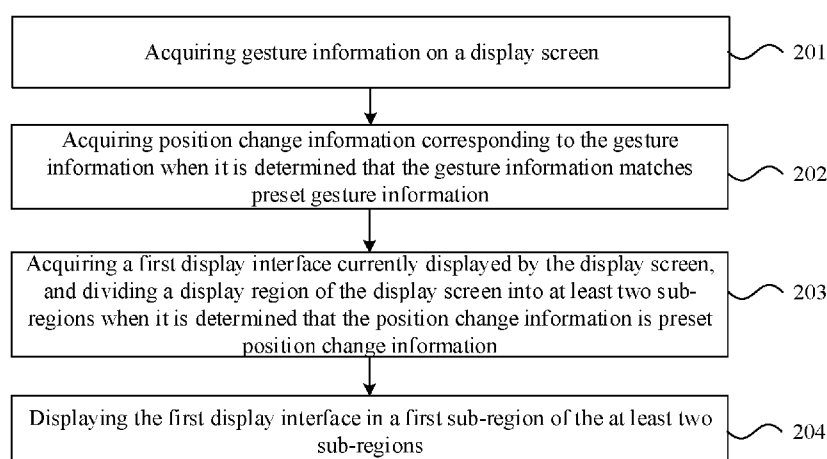


FIG. 1

(57) Abstract: A method, an apparatus, a storage medium, and an electronic device of processing split screen display are disclosed. Gesture information on a display screen is acquired. Position change information corresponding to the gesture information is acquired when it is determined that the gesture information matches preset gesture information. A display region of the display screen is divided into at least two sub-regions when it is determined that the position change information matches preset position change information. A currently displayed first display interface is displayed in a first sub-region of the at least two sub-regions.



TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
KM, ML, MR, NE, SN, TD, TG).

Published:

— *with international search report (Art. 21(3))*

**METHOD, APPARATUS, STORAGE MEDIUM, AND ELECTRONIC DEVICE OF PROCESSING
SPLIT SCREEN DISPLAY**

CROSS REFERENCE

[0001] This application is based upon and claims priority to Chinese Patent Application No. 201810353206.0, filed on April 19, 2018, and the entire contents thereof are incorporated herein by reference.

TECHNICAL FIELD

[0002] The present disclosure relates to the field of electronic device technologies, and in particular, to a method, an apparatus, a storage medium, and an electronic device of processing split screen display.

BACKGROUND

[0003] As functions of electronic devices become more powerful, more and more applications can be operated on electronic devices, such as mobile phones. In many scenarios, the mobile phone may need to use a plurality of applications at the same time, and also need to display a plurality of applications on the display simultaneously. Therefore, a split screen function is required, to run a plurality of applications on a plurality of display regions on the display screen simultaneously.

[0004] At present, the mobile phone can provide a button that can trigger the split screen function. The user may trigger the split screen function by manually switching to a designated display interface and pressing the button that triggers the split screen function.

[0005] It should be noted that, information disclosed in the above background portion is provided only for better understanding of the background of the present disclosure, and thus it may contain information that does not form the prior art known by those ordinary skilled in

the art.

SUMMARY

[0006] The embodiment of the present disclosure provides a method, an apparatus, a storage medium, and an electronic device of processing split screen display.

[0007] In a first aspect, there provides a method of processing split screen display, applicable in an electronic device, and including:

[0008] acquiring gesture information on a display screen;

[0009] acquiring position change information corresponding to the gesture information when the gesture information matches preset gesture information;

[0010] dividing a display region of the display screen into at least two sub-regions when the position change information matches preset position change information; and

[0011] displaying a currently displayed first display interface in a first sub-region of the at least two sub-regions.

[0012] In a second aspect, there provides an apparatus of processing split screen display, including:

[0013] a first acquiring unit, configured to acquire gesture information on a display screen;

[0014] a second acquiring unit, configured to acquire position change information corresponding to the gesture information when the gesture information matches preset gesture information;

[0015] a dividing unit, configured to acquire a first display interface currently displayed by the display screen when the position change information matches preset position change information, and divide a display region of the display screen into at least two sub-regions; and

[0016] a display unit, configured to display the first display interface in a first sub-region of the at least two sub-regions.

[0017] In a third aspect, there provides a storage medium having a computer program stored thereon, when the computer program is run on a computer, the computer is configured to perform the method of any embodiment of the present disclosure.

[0018] In a fourth aspect, there provides an electronic device, including a processor and a memory, the memory having a computer program, wherein the processor is configured to execute the method of any embodiment of the present disclosure by invoking the computer program.

[0019] In the embodiment of the present disclosure, gesture information on a display screen is acquired; position change information corresponding to the gesture information is acquired when it is determined that the gesture information matches preset gesture information; a first display interface currently displayed by the display screen is acquired, and a display region of the display screen is divided into at least two sub-regions when it is determined that the position change information matches preset position change information; and the first display interface is displayed in a first sub-region of the at least two sub-regions. In this way, a user can coordinate a gesture position change with a specific gesture, and quickly realize a split screen display function of a display screen, which greatly improves a processing efficiency of the split screen display.

[0020] It is to be understood that both the foregoing general description and the following detailed description are exemplary and explanatory only and are not restrictive of the present disclosure.

[0021] This section provides a summary of various implementations or examples of the technology described in the disclosure, and is not a comprehensive disclosure of the full scope or all features of the disclosed technology.

BRIEF DESCRIPTION OF THE DRAWINGS

[0022] In order to more clearly illustrate the technical solutions in the embodiments of the present disclosure, the drawings used in the description of the embodiments will be briefly described below. It is obvious that the drawings in the following description are only some embodiments of the present disclosure. Other drawings can also be obtained based on these drawings by those skilled in the art without paying any creative effort.

[0023] FIG. 1 illustrates a flow chart of a method of processing split screen display provided by an embodiment of the present disclosure.

[0024] FIG. 2 illustrates another flow chart of a method of processing split screen display provided by an embodiment of the present disclosure.

[0025] FIG. 3a illustrates a diagram of a scenario of split screen processing according to an embodiment of the present disclosure.

[0026] FIG. 3b illustrates another diagram of a scenario of split screen processing according to an embodiment of the present disclosure.

[0027] FIG. 4 illustrates a block diagram of an apparatus of an embodiment of the present disclosure.

[0028] FIG. 5 is another block diagram of an apparatus of an embodiment of the present disclosure.

[0029] FIG. 6 illustrates a block diagram of an electronic device according to an embodiment of the present disclosure.

[0030] FIG. 7 illustrates another block diagram of an electronic device according to an embodiment of the present disclosure.

DETAILED DESCRIPTION

[0031] Referring to the drawings, like reference numerals represent like components, principles of the present disclosure are illustrated by the implementation in a suitable computing environment. The following description is based on specific embodiments of the present disclosure as illustrated, and should not be construed as limiting the specific embodiments that are not described herein.

[0032] In the following description, specific embodiments of the present disclosure will be described with reference to the steps and symbols executed by one or more computers, unless otherwise stated. Thus, throughout the description, these steps and operations will be described as being executed by a computer for several times. The computer execution referred to herein includes the operation of a computer processing unit that represents an electronic signal in data in a structured version. This operation converts the data or maintains it at a position in a memory system of the computer, which can be reconfigured or otherwise altered in a manner well known to those skilled in the art to change operation of the computer. The data structure maintained by the data is a physical position of the memory, which has specific characteristics defined by the data format. However, the principles of the present disclosure are described in the above wording, which is not intended to be a limitation. Those skilled in the art will appreciate that various steps and operations described below can also be implemented in hardware.

[0033] The term "module" as used herein may be taken to mean a software object executed on the computing system. The different components, modules, engines, and services described herein can be considered as implementation objects on the computing system. The apparatus and method described herein may be implemented in software, and may of course be implemented in hardware, all of which are within the scope of the present disclosure.

[0034] The embodiment of the present disclosure provides a method of processing the split screen display, and the executor of the method of processing the split screen display may

be an apparatus of processing split screen display provided by the embodiment of the present disclosure, or an electronic device integrated with the apparatus of processing split screen display. The apparatus of processing split screen display can be implemented by hardware or software. The electronic device may be a device such as a smart phone, a tablet computer, a palmtop computer, a notebook computer, a desktop computer, or the like.

[0035] Please refer to FIG. 1, which is a flow chart of a method of processing split screen display provided by an embodiment of the present disclosure. The specific process of the method of processing split screen display provided by the embodiment of the present disclosure may be as follows.

[0036] In block 201, gesture information on a display screen is acquired.

[0037] The display screen can be a capacitive touch screen, and the capacitive touch screen technology is operated by utilizing the current sensing of the human body. The capacitive touch screen is a four-layer composite glass screen. Each of an inner surface and interlayer of the glass screen is coated with a layer of indium tin oxide (ITO), and the outermost layer thereof is a thin layer of silicon glass protective layer. The interlayered ITO coating is served as a working surface, and four electrodes are led out at four corners, and the inner layer of ITO is a shielding layer to ensure a good working environment. A coupling capacitor is formed between the user and the surface of the touch screen due to the electric field of the human body when a finger touches the metal layer. As for high-frequency current, the capacitor is a direct conductor, and thus the finger sucks a small current from the contact point. This current flows out from the electrodes on the four corners of the touch screen, and the current flowing through the four electrodes is proportional to a distance from the finger to the four corners. The controller accurately calculates the ratio of the four currents, to obtain the position of the touch point.

[0038] In an embodiment, the capacitive touch screen can implement multi-touch,

specifically by increasing electrodes of mutual capacitance. In short, the screen is divided into blocks, and each set of mutual capacitance modules is independently operated in each region. Therefore, the capacitive screen can independently detect the touch situation of each region, and multi-touch is simply implemented after processing.

[0039] Further, the gesture information of the user may be acquired through the capacitive touch screen. The user can perform any gesture operation on the capacitive touch screen, for example, a single-finger click operation, a two-finger click operation, a three-finger click operation, and the like. The capacitive touch screen can acquire data generated when the user's finger clicks the touch screen through the electrode, to generate gesture information.

[0040] In some embodiments, acquiring gesture information on the display screen may include:

[0041] (1) acquiring a click touch operation of a user on the display screen through the display screen;

[0042] (2) analyzing the click touch operation to determine point touch data corresponding to the click touch operation; and

[0043] (3) generating gesture information according to the touch data.

[0044] The display screen may acquire the click touch operation of the user on the display through the electrode. The click touch operation can be a single touch operation, a two-touch operation or a three-touch operation, or the like. It should be noted that a single-point touch operation is generated when the user clicks with a single finger; a two-point touch operation is generated when the user clicks with two fingers; and a three-point touch operation is generated when the user clicks with three fingers, and so on.

[0045] Further, a specific current magnitude of each point of the click touch operation is analyzed, position coordinate information of each point of the click touch operation is

determined, the point touch data is determined, and the gesture information is generated according to the point touch data, when the display screen acquires the click touch operation through the electrode.

[0046] In block 202, position change information corresponding to the gesture information is acquired when it is determined that the gesture information matches preset gesture information.

[0047] It indicates that the gesture input by the user is a preset gesture when it is determined that the gesture information matches the preset gesture information. For example, if the gesture information indicates a three-touch operation, and the preset gesture information also indicates a three-touch operation, then it is determined that the gesture information matches the preset gesture information, and position change information corresponding to the gesture information is obtained through the display screen.

[0048] It should be noted that, the user can also perform a sliding touch operation on the display screen in addition to performing the click touch operation on the display screen. When the user slides on the display screen with a certain gesture, a position coordinate of the gesture acquired by the electrode on the display screen will change accordingly. The electronic device generates position change information according to the change, and can determine a sliding direction of the gesture according to the position change information. For example, the sliding motion is an upward sliding motion, a downward sliding motion, a leftward sliding motion, and a rightward sliding motion.

[0049] In some implementations, acquiring position change information corresponding to the gesture information may include:

[0050] (1) acquiring a sliding touch operation of a user on the display screen through the display screen;

[0051] (2) analyzing the sliding touch operation to determine sliding touch data

corresponding to the sliding touch operation; and

[0052] (3) generating position change information according to the sliding touch data.

[0053] The sliding touch operation of the user on the display screen is obtained by the electrode on the display screen. When the user's finger slides on the display screen, the position coordinates of the finger obtained by the electrode change correspondingly, and the electronic device determines corresponding sliding touch data according to the position coordinates, and generates position change information according to the sliding touch data.

[0054] In block 203, a first display interface currently displayed by the display screen is acquired, and a display region of the display screen is divided into at least two sub-regions, when it is determined that the position change information matches preset position change information.

[0055] It indicates that the gesture input by the user matches a preset gesture when it is determined that the gesture information matches the preset gesture information. For example, if the gesture information indicates a three-touch operation, and the preset gesture information also indicates a three-touch operation, then it is determined that the gesture information matches the preset gesture information, and position change information corresponding to the gesture information is obtained through the display screen. It indicates that the sliding motion input by the user based on the gesture is a preset sliding motion when it is determined that the position change information matches also the preset position change information. If the position change information is indicated as the upward sliding motion and the preset position change information is also indicated as the upward sliding motion, it is determined that the position change information matches the preset position change information.

[0056] The display region of the existing electronic device is generally a whole region of the display screen. Although the electronic device can run a plurality of applications at the

same time, only one application can be displayed on the entire region at a particular time. If other applications are needed, switching must be performed, and the process is complicated.

[0057] Further, the electronic device obtains the currently displayed first display interface. The first display interface may be a desktop display interface of the electronic device, or may be a display interface of a specific application, such as a video display interface of a video application, or a chat display interface of a chat application. At the same time, the display region of the display screen is divided into at least two sub-regions, and contents of the at least two sub-regions can be simultaneously operated. The user can select any one of the sub-regions as the focus region to operate as needed.

[0058] In block 204, the first display interface is displayed in a first sub-region of the at least two sub-regions.

[0059] The electronic device may display the content of the first display interface in the first sub-region of the at least two sub-regions. In an embodiment, the first sub-region is a sub-region near the top of the display screen. At the same time, the electronic device acquires an icon of another application, and displays the icon in the second sub-region. The user can select an application therein as needed. When the user confirms an icon, the electronic device acquires the display interface of the application corresponding to the icon, and displays the display interface in the second sub-region. By analogy, when there is further a third sub-region, the split screen processing is performed in the above manner.

[0060] In some embodiments, displaying the first display interface in a first sub-region of the at least two sub-regions may include:

[0061] (1) displaying the first display interface in the first sub-region;

[0062] (2) displaying an icon of at least one application according to a usage frequency in an order from high to low; and

[0063] (3) displaying a second display interface of the application corresponding to the

selected icon in a second sub-region of the at least two sub-regions when a selection instruction of the icon by the user is received.

[0064] The electronic device displays the first display interface in the first sub-region, and simultaneously acquires a plurality of applications on the electronic device. The plurality of applications is arranged in the second sub-region according to the commonly used frequency or the split screen processing frequency from high to low. The user can select according to the icons of the arranged applications. When the selection instruction for the icon from the user is received, the second display interface of the application corresponding to the selected icon is displayed in the second sub-region, and so on. When there is a third sub-region, the split screen processing is performed in the above manner.

[0065] In an embodiment, the first display interface is displayed in the first sub-region, and thumbnails of the plurality of applications may be displayed in the second sub-region according to the usage frequency in an order from high to low. The user may select a thumbnail and displays a program interface of the application corresponding to the thumbnail on the second sub-region.

[0066] It can be seen that, In the embodiment of the present disclosure, gesture information on a display screen is acquired; position change information corresponding to the gesture information is acquired when it is determined that the gesture information matches preset gesture information; a first display interface currently displayed by the display screen is acquired, and a display region of the display screen is divided into at least two sub-regions; and the first display interface is displayed in a first sub-region of the at least two sub-regions, when it is determined that the position change information matches preset position change information. In this way, a user can quickly realize a split screen display function of a display screen by coordinating a gesture position change with a specific gesture, which greatly improves a processing efficiency of the split screen display.

[0067] The display method of the present disclosure will be further described below based on the method described in the above embodiments. Referring to FIG. 2, the method of processing the split screen display may include following.

[0068] In block 301, a click touch operation of a user on the display screen is acquired through the display screen.

[0069] The display screen can be a capacitive touch screen, so the electronic device can obtain the click touch operation of the user on the display through the display screen. For example, when the user touches on the display screen with a single finger, it is a single-point touch. When the user touches on the display with two fingers, it is a two-point touch operation. When the user touches on the display with three fingers, it is a three-point touch operation, and the like.

[0070] As shown in FIG. 3a, a middle finger and a ring finger, the display screen can sense and acquire the click touch operation when the user performs a click touch operation on the display screen of the electronic device 10 through an index finger.

[0071] In block 302, the click touch operation is analyzed to determine point touch data corresponding to the click touch operation.

[0072] The display screen senses the click touch operation of the user through the current change on the electrode, and determines a position coordinate corresponding to each touch point, and determines point touch data corresponding to the click touch operation according to the position coordinate corresponding to each touch point.

[0073] In block 303, gesture information is generated according to the touch data.

[0074] The electronic device generates gesture information according to the determined point touch data. The gesture information may indicate the user to click the touch position information and the touch point information corresponding to the click touch operation on the display screen.

[0075] In block 304, it is determined whether point touch indicated by the point touch data in the gesture information matches three-point touch.

[0076] Block 305 is performed when it is determined that the point touch indicated by the point touch data in the gesture information matches three-point touch; the first-step verification condition is not satisfied, and the process returns to block 301 to retrieve the click touch operation of the user on the display screen through the display screen when it is determined that the point touch indicated by the point touch data in the gesture information does not match three-point touch.

[0077] In block 305, a sliding touch operation of a user on the display screen is acquired through the display screen.

[0078] It indicates that the gesture motion input by the user is a three-finger touch motion, and the first-step verification condition is met When it is determined that the point touch indicated by the point touch data in the gesture information matches a three-point touch. The electronic device acquires the sliding touch operation of the user on the display screen through the display screen. For example, when the user slides up on the display screen with the above gesture motion, it is an upward sliding motion. When the user slides down on the display screen with the above gesture motion, it is a downward sliding motion. When the user performs left sliding on the display screen with the above gesture motion, it is a leftward sliding motion. When the user performs right slide on the display screen with the above gesture motion, it is a rightward sliding motion.

[0079] As shown in FIG. 3a, after performing a click touch operation on the display screen of the electronic device 10 through the index finger, the middle finger, and the ring finger at the same time, the user slides upward toward the upper end of the electronic device 10, and the display screen can sense and acquire the upward sliding touch operation.

[0080] In block 306, the sliding touch operation is analyzed to determine sliding touch

data corresponding to the sliding touch operation.

[0081] The display screen can sense the sliding touch operation of the user through the current change on the electrode, and can sense the position coordinate change data corresponding to the touch point according to a trend of the current change, and determine sliding touch data corresponding to the sliding touch operation according to the position coordinate change data.

[0082] In block 307, position change information is generated according to the sliding touch data.

[0083] The electronic device generates position change information according to the determined sliding touch data. The position change information may indicate position coordinate change information of the corresponding touch point and a sliding direction of the gesture motion of the user on the display screen.

[0084] In block 308, it is determined whether a sliding motion indicated by the sliding touch data in the position change information matches an upward sliding motion.

[0085] Block 309 is performed when it is determined that the sliding motion indicated by the sliding touch data in the position change information matches an upward sliding motion; the second-step verification condition is not met, the process returns to block 301 to retrieve the click touch operation of the user on the display screen through the display screen when it is determined that the sliding motion indicated by the sliding touch data in the position change information does not match an upward sliding motion.

[0086] In block 309, a first display interface currently displayed by the display screen is acquired, and a display region of the display screen is divided into at least two sub-regions.

[0087] It indicates that the sliding motion input by the user is an upward sliding motion, and the second-step verification condition is satisfied, when it is determined that the sliding motion indicated by the sliding touch data in the position change information matches an

upward sliding motion. That is, through the double verification of the three-finger click and upward sliding motion, the split screen mode is enabled. The electronic device correspondingly obtains the first display interface currently displayed on the display screen, and divides the display region of the display screen into at least two sub-regions. The contents of the at least two sub-regions can be simultaneously run, the user can select any of the sub-regions as the focus region to operate according to needs.

[0088] As shown in FIG. 3a, the electronic device 10 acquires an application display interface of the application 1 currently displayed on the display screen when the electronic device 10 determines that the sliding motion indicated by the sliding touch data in the position change information matches an upward sliding motion. Continuing to refer to FIG. 3b, the electronic device 10 divides the display region of the display screen into the first sub-region 11 and the second sub-region 12.

[0089] In block 310, the first display interface is displayed in the first sub-region.

[0090] The electronic device displays the acquired first display interface in the first sub-region. In an embodiment, the first sub-region is a sub-region near the top of the electronic device.

[0091] As shown in FIG. 3b, the electronic device 10 displays the acquired application display interface of the currently displayed application 1 on the first sub-region 11, and the user can manipulate the application 1 on the first sub-region 11.

[0092] In block 311, an icon of at least one application is displayed according to a usage frequency in an order from high to low.

[0093] The icon of the application on the electronic device can be acquired, and the usage frequency of each application is acquired at the same time, and the icons of the applications are ranked and displayed according to the usage frequency in the order from high to low.

[0094] As shown in FIG. 3b, the electronic device acquires the application 2, the application 3, the application 4, and the application 5, and simultaneously acquires the usage frequency of each application, and ranks the application 2, the application 3, and the application 4 and the application 5 according to the usage frequency in the order from high to low and displays the same in the second sub-region 12.

[0095] In block 312, a second display interface of the application corresponding to the selected icon is displayed in a second sub-region of the at least two sub-regions when a selection instruction of the icon by the user is received.

[0096] The user can select the displayed icons according to the split screen requirement. The electronic device displays the second display interface of the application corresponding to the selected icon in the second sub-region of the at least two sub-regions when the selection instruction of the icon by the user is received.

[0097] In an embodiment, the current display interface of the application may be directly displayed in the second sub-region of the at least two sub-regions from the background when the application corresponding to the selected icon is already running in the background. The application is directly launched, and the display interface of the launched application is displayed in at least two sub-regions, when the application corresponding to the selected icon is not running in the background.

[0098] As shown in FIG. 3b, the user selects the application 5 according to the split screen requirement, and the electronic device 10 displays the display interface corresponding to the selected application 5 in the second sub-region 12.

[0099] As can be seen from the above, in the embodiment of the present disclosure, a click touch operation of a user on the display screen is acquired through the display screen and verification is performed. The display screen acquires the sliding touch operation of the user on the display screen to perform verification when the click touch operation is verified

as a three-finger touch operation. When the sliding touch operation is verified as the upward sliding motion, the display region of the display screen is divided into at least two sub-regions, and the first display interface currently displayed on the display screen is displayed in the first sub-region of the at least two sub-regions, and the second display interface corresponding to the application selected by the user is displayed in the second sub-region of the at least two sub-regions. In this way, the user can quickly achieve the split screen display function of the display screen by coordinating a specific number of finger clicks and a specific sliding direction, thereby greatly improving the processing efficiency of the split screen display.

[00100] In an embodiment, an apparatus of processing split screen display is further provided. Please refer to FIG. 4, which is a block diagram of an apparatus of an embodiment of the present disclosure. The apparatus of processing split screen display is applied to an electronic device and includes a first acquiring unit 401, a second acquiring unit 402, a dividing unit 403, and a display unit 404.

[00101] The first acquiring unit 401 is configured to acquire gesture information on a display screen.

[00102] The first acquiring unit 401 can acquire the gesture information of the user through the capacitive touch screen. The user can perform any gesture operation on the capacitive touch screen, for example, a single-finger click operation, a two-finger click operation, a three-finger click operation, and the like. The capacitive touch screen can acquire data generated when the user's finger clicks the touch screen through the electrode, to generate gesture information.

[00103] The second acquiring unit 402 is configured to configured to, acquire position change information corresponding to the gesture information when it is determined that the gesture information matches preset gesture information.

[00104] It indicates that the gesture input by the user is a preset gesture when the second acquisition unit 402 determines that the gesture information matches the preset gesture information. For example, if the gesture information indicates a three-touch operation, and the preset gesture information also indicates a three-touch operation, then it is determined that the gesture information matches the preset gesture information, and position change information corresponding to the gesture information is obtained through the display screen.

[00105] The dividing unit 403 is configured to, acquire a first display interface currently displayed by the display screen, and divide a display region of the display screen into at least two sub-regions, when it is determined that the position change information matches preset position change information.

[00106] It indicates that the gesture input by the user is a preset gesture when the second acquiring unit 402 determines that the gesture information matches the preset gesture information. For example, if the gesture information indicates a three-touch operation, and the preset gesture information also indicates a three-touch operation, then it is determined that the gesture information matches the preset gesture information, and position change information corresponding to the gesture information is obtained through the display screen. It indicates that the sliding motion input by the user based on the gesture is a preset sliding motion when dividing unit 403 determines that the position change information matches also the preset position change information. If the position change information is indicated as the upward sliding motion and the preset position change information is also indicated as the upward sliding motion, it is determined that the position change information matches the preset position change information.

[00107] Further, the dividing unit 403 obtains the currently displayed first display interface. The first display interface may be a desktop display interface of the electronic device, or may be a display interface of a specific application, such as a video display

interface of a video application, or a chat display interface of the chat application. At the same time, the display region of the display screen is divided into at least two sub-regions, and contents of the at least two sub-regions can be simultaneously operated. The user can select any one of the sub-regions as the focus region to operate as needed.

[00108]The display unit 404 is configured to display the first display interface in a first sub-region of the at least two sub-regions.

[00109]The display unit 404 may display the content of the first display interface in the first sub-region of the at least two sub-regions. In an embodiment, the first sub-region is a sub-region near the top of the display screen. At the same time, the electronic device acquires an icon of another application, and displays the icon in the second sub-region. The user can select an application therein as needed. When the user determines an icon, the electronic device acquires the display interface of the application corresponding to the icon, and displays the display interface in the second sub-region. By analogy, when there is further a third sub-region, the split screen processing is performed in the above manner.

[00110]In an embodiment, referring to FIG. 5, the first acquiring unit 401 may include:

[00111]a click acquiring sub-unit 4011, configured to acquire a click touch operation of a user on the display screen through the display screen;

[00112]a determining sub-unit 4012, configured to analyze the click touch operation to determine point touch data corresponding to the click touch operation; and

[00113]a generating sub-unit 4013, configured to generate gesture information according to the touch data.

[00114]In an embodiment, referring to FIG. 5, the apparatus of processing the split screen display may further include:

[00115]a determining unit 405, configured to determine whether point touch indicated by the point touch data in the gesture information matches three-point touch;

[00116]the second acquiring unit 402, specifically further configured to, determine that the gesture information matches the preset gesture information and perform acquiring position change information corresponding to the gesture information when it is determined that the point touch indicated by the point touch data in the gesture information matches the three-point touch.

[00117]The steps performed by the units in the apparatus of processing the split screen display may refer to the method steps described in the foregoing method embodiments. The apparatus of processing the split screen display can be integrated in an electronic device, such as a mobile phone, a tablet computer, or the like.

[00118]In the specific implementation, the foregoing various units may be implemented as an independent entity, and may be implemented in any combination, and may be implemented as the same entity or a plurality of entities. The specific implementation of the foregoing units may refer to the foregoing embodiments, and details are not described herein again.

[00119]It can be seen that in the apparatus of processing split screen display, the first acquiring unit 401 is configured to acquire gesture information on a display screen; position change information corresponding to the gesture information is acquired when the second acquiring unit 402 determines that the gesture information matches preset gesture information; a first display interface currently displayed by the display screen is acquired, and a display region of the display screen is divided into at least two sub-regions, when the dividing unit 403 determines that the position change information matches preset position change information; and the display unit 404 is configured to display the first display interface in a first sub-region of the at least two sub-regions. In this way, a user can coordinate a gesture position change with a specific gesture, and quickly realize a split screen display function of a display screen, which greatly improves a processing efficiency of the split screen display.

[00120]An embodiment of the present disclosure further provides an electronic device. Referring to FIG. 6, the electronic device 500 includes a processor 501 and a memory 502. The processor 501 is electrically connected to the memory 502.

[00121]The processor 500 is a control center of the electronic device 500, which connects various parts of the entire electronic device using various interfaces and circuits. The processor 500 executes various functions of the electronic device 500 and processes of the data by running or loading computer programs stored in the memory 502 and invoking data stored in the memory 502, to perform overall monitoring of the electronic device 500.

[00122]The memory 502 can be used to store software programs and modules, and the processor 501 executes various functional applications and data processing by running computer programs and modules stored in the memory 502. The memory 502 can mainly include a storage program area and a storage data area, wherein the storage program area can store an operating system, a computer program required for at least one function (such as a sound playing function, an image playing function, etc.), and the like; the storage data area can store data created according to the use of electronic devices, etc. Moreover, memory 502 can include high speed random access memory, and can also include non-volatile memory, such as at least one magnetic disk storage device, flash memory device, or other volatile solid state storage device. Accordingly, memory 502 can also include a memory controller, to provide access to memory 502 by the processor 501.

[00123]In the embodiment of the present disclosure, the processor 501 in the electronic device 500 loads instructions corresponding to processes of one or more computer programs into the memory 502 according to the followings, and runs computer programs stored in the memory 502, to achieve various functions, as follows:

[00124]acquiring gesture information on a display screen;

[00125]acquiring position change information corresponding to the gesture information

when it is determined that the gesture information matches preset gesture information;

[00126]acquiring a first display interface currently displayed by the display screen, and dividing a display region of the display screen into at least two sub-regions when it is determined that the position change information matches preset position change information; and

[00127]displaying the first display interface in a first sub-region of the at least two sub-regions.

[00128]In some embodiments, the processor 501 may specifically perform the followings when gesture information on the display screen is acquired:

[00129]acquiring a click touch operation of a user on the display screen through the display screen;

[00130]analyzing the click touch operation to determine point touch data corresponding to the click touch operation; and

[00131]generating gesture information according to the touch data.

[00132]In some embodiments, before acquiring position change information corresponding to the gesture information, the processor 501 may further perform the followings:

[00133]determining whether point touch indicated by the point touch data in the gesture information matches three-point touch; and

[00134]determining that the gesture information matches the preset gesture information and performing acquiring position change information corresponding to the gesture information when it is determined that the point touch indicated by the point touch data in the gesture information matches the three-point touch.

[00135]In some embodiments, the processor 501 may specifically perform the followings when position change information corresponding to the gesture information is

acquired:

[00136]acquiring a sliding touch operation of a user on the display screen through the display screen;

[00137]analyzing the sliding touch operation to determine sliding touch data corresponding to the sliding touch operation; and

[00138]generating position change information according to the sliding touch data.

[00139]In some embodiments, before acquiring the first display interface currently displayed by the display screen, the processor 501 may further perform the followings:

[00140]determining whether a sliding motion indicated by the sliding touch data in the position change information matches an upward sliding motion; and

[00141]determining that the position change information matches the preset position change information and performing acquiring a first display interface currently displayed by the display screen when it is determined that the sliding motion indicated by the sliding touch data in the position change information matches the upward sliding motion.

[00142]In some embodiments, the processor 501 may specifically perform the followings when the first display interface is displayed in a first sub-region of the at least two sub-regions:

[00143]displaying the first display interface in the first sub-region;

[00144]displaying an icon of at least one application according to a usage frequency in an order from high to low; and

[00145]displaying a second display interface of the application corresponding to the selected icon in a second sub-region of the at least two sub-regions when a selection instruction of the icon by the user is received.

[00146]As seen from above, in the electronic device of the embodiment of the present disclosure, gesture information on a display screen is acquired; position change information

corresponding to the gesture information is acquired when it is determined that the gesture information matches preset gesture information; a first display interface currently displayed by the display screen is acquired, and a display region of the display screen is divided into at least two sub-regions when it is determined that the position change information matches preset position change information; and the first display interface is displayed in a first sub-region of the at least two sub-regions. In this way, a user can coordinate a gesture position change with a specific gesture, and quickly realize a split screen display function of a display screen, which greatly improves a processing efficiency of the split screen display.

[00147]Referring to FIG. 7 together, in some embodiments, the electronic device 500 may further include: a display 503, a radio frequency circuit 504, an audio circuit 505, and a power source 506. The display 503, the radio frequency circuit 504, the audio circuit 505, and the power source 506 are electrically connected to the processor 501, respectively.

[00148]The display 503 can be used to display information input by a user or information provided to a user, as well as various graphical user interfaces. These graphical user interfaces can be composed of graphics, text, icons, video, and any combination thereof. The display 503 can include a display panel. In some embodiments, the display panel can be configured in the form of a liquid crystal display (LCD), or an organic light-emitting diode (OLED).

[00149]The radio frequency circuit 504 can be used to transmit and receive radio frequency signals, to establish wireless communication with network devices or other electronic devices through wireless communication, and to transmit and receive signals with network devices or other electronic devices.

[00150]The audio circuit 505 can be used to provide an audio interface between the user and the electronic device through a speaker or a microphone.

[00151]The power source 506 can be used to power various components of the

electronic device 500. In some embodiments, the power supply 506 can be logically coupled to the processor 501 through a power management system, to achieve functions such as managing charging, discharging, and power management through the power management system.

[00152] Although not shown in FIG. 7, the electronic device 500 may further include a camera, a Bluetooth module, and the like, and details are not described herein.

[00153] The embodiment of the present disclosure further provides a storage medium, where the computer program stores a computer program, and the computer is caused to execute a method of processing split screen display in any of above embodiments when the computer program runs on the computer, for example: acquiring gesture information on a display screen; acquiring position change information corresponding to the gesture information when it is determined that the gesture information matches preset gesture information; acquiring a first display interface currently displayed by the display screen when it is determined that the position change information matches preset position change information, and dividing a display region of the display screen into at least two sub-regions; and displaying the first display interface in a first sub-region of the at least two sub-regions.

[00154] In the embodiment of the present disclosure, the storage medium may be a magnetic disk, an optical disk, a read only memory (ROM), or a random access memory (RAM), or the like.

[00155] In the above embodiments, the descriptions of the various embodiments are all focused on their own emphases, and the parts that are not detailed in a certain embodiment can be referred to the related descriptions of other embodiments.

[00156] It should be noted that, in the method of processing split screen display of the embodiment of the present disclosure, those skilled in the art can understand all or part of the processes of implementing the method of processing split screen display of the embodiment

of the present disclosure, which can be implemented by a computer program controlling related hardware. The computer program may be stored in a computer readable storage medium, such as in a memory of the electronic device, and executed by at least one processor in the electronic device, during execution, it may include a process of an embodiment of a method of processing split screen display. The storage medium may be a magnetic disk, an optical disk, a read only memory, a random access memory, or the like.

[00157] As for the apparatus of processing split screen display of the embodiment of the present disclosure, each functional module may be integrated into one processing chip, or each module may be physically separated, or two or more modules may be integrated into one module. The above integrated modules can be implemented in the form of hardware or in the form of software functional modules. The integrated module, if implemented in the form of a software functional module and sold or used as an individual product, may also be stored in a computer readable storage medium, such as a read only memory, a magnetic disk or an optical disk, etc.

CLAIMS:

1. A method of processing split screen display, applicable in an electronic device, comprising:

acquiring (201) gesture information on a display screen;

acquiring (202) position change information corresponding to the gesture information when the gesture information matches preset gesture information;

dividing (203) a display region of the display screen into at least two sub-regions when the position change information matches preset position change information; and

displaying (204) a currently displayed first display interface in a first sub-region of the at least two sub-regions.

2. The method of claim 1, wherein acquiring (201) gesture information on a display screen comprises:

acquiring (301) a click touch operation of a user on the display screen;

analyzing (302) the click touch operation to determine point touch data corresponding to the click touch operation; and

generating (303) the gesture information based on the point touch data.

3. The method of claim 2, wherein acquiring (301) a click touch operation of a user on the display screen comprises:

acquiring the click touch operation of the user on the display screen;

analyzing a current magnitude of each point of the click touch operation; and

determining position coordinate information of the each point.

4. The method of claim 2, wherein analyzing (302) the click touch operation to determine point touch data corresponding to the click touch operation comprises:

determining point touch data corresponding to the click touch operation based on the position coordinate information.

5. The method of claim 2, wherein the preset gesture information matches a three-point touch.

6. The method of claim 1, wherein acquiring position change information corresponding to the gesture information comprises:

acquiring (305) a sliding touch operation of a user on the display screen;

analyzing (306) the sliding touch operation to determine sliding touch data corresponding to the sliding touch operation; and

generating (307) the position change information based on the sliding touch data.

7. The method of claim 1, wherein dividing (203) a display region of the display screen into at least two sub-regions comprises:

determining (308) whether a sliding motion indicated by the sliding touch data in the position change information matches an upward sliding motion; and

determining that the position change information matches the preset position change information and dividing (203) a display region of the display screen into at least two sub-regions, in response to determining that the sliding motion matches the upward sliding motion.

8. The method of claim 7, wherein displaying (204) a currently displayed first display interface in a first sub-region of the at least two sub-regions comprises:

displaying (310) the first display interface in the first sub-region;

displaying (311) an icon or a thumbnail of at least one application based on a usage frequency in an order from high to low; and

displaying (312) a second display interface of the application corresponding to the selected icon in a second sub-region of the at least two sub-regions when a selection instruction of the icon by the user is received.

9. An apparatus of processing split screen display, comprising:

a first acquiring unit (401), configured to acquire gesture information on the display screen;

a second acquiring unit (402), configured to acquire position change information corresponding to the gesture information when the gesture information matches preset gesture information;

a dividing unit (403), configured to divide a display region of the display screen into at least two sub-regions when the position change information matches preset position change information; and

a display unit (404), configured to display a currently displayed first display interface in a first sub-region of the at least two sub-regions.

10. The apparatus of claim 9, wherein the first acquiring unit (401) comprises:

a click acquiring sub unit (4011), configured to acquire a click touch operation of a user on the display screen;

a determining sub unit (4012), configured to analyze the click touch operation to determine point touch data corresponding to the click touch operation; and

a generating sub unit (4013), configured to generate the gesture information based on the point touch data.

11. The apparatus of claim 10, wherein the click acquiring sub unit (4011) is further configured to:

analyze a current magnitude of each point of the click touch operation and determine position coordinate information of the each point when the display screen acquires the click touch operation through the electrode.

12. The apparatus of claim 10, wherein the determining sub unit (4012) is further configured to:

determine point touch data corresponding to the click touch operation based on the

position coordinate information.

13. The apparatus of claim 9, wherein the second acquiring unit (402) is further configured to:

acquire a sliding touch operation of a user on the display screen;

analyze the sliding touch operation to determine sliding touch data corresponding to the sliding touch operation; and

generate the position change information based on the sliding touch data.

14. The apparatus of claim 9, wherein the dividing unit (403) is further configured to:

determine whether a sliding motion indicated by the sliding touch data in the position change information matches an upward sliding motion; and

determine that the position change information matches the preset position change information when the sliding motion indicated by the sliding touch data in the position change information matches the upward sliding motion, and dividing a display region of the display screen into at least two sub-regions.

15. A computer readable storage medium having a computer program stored thereon, wherein the program is executed by a processor to implement the method of any one of claims 1-8.

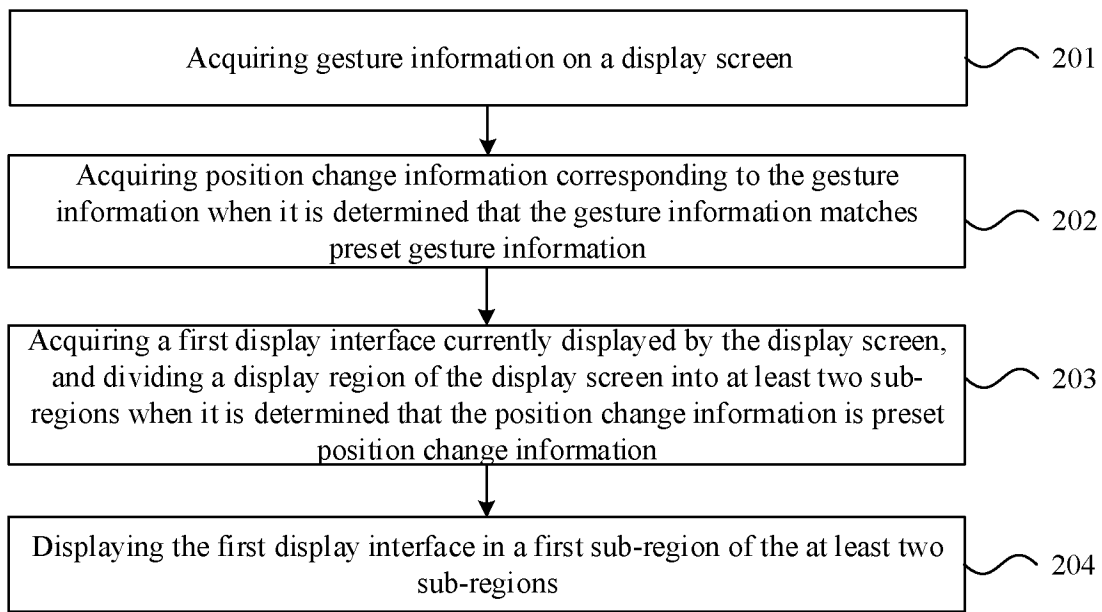


FIG. 1

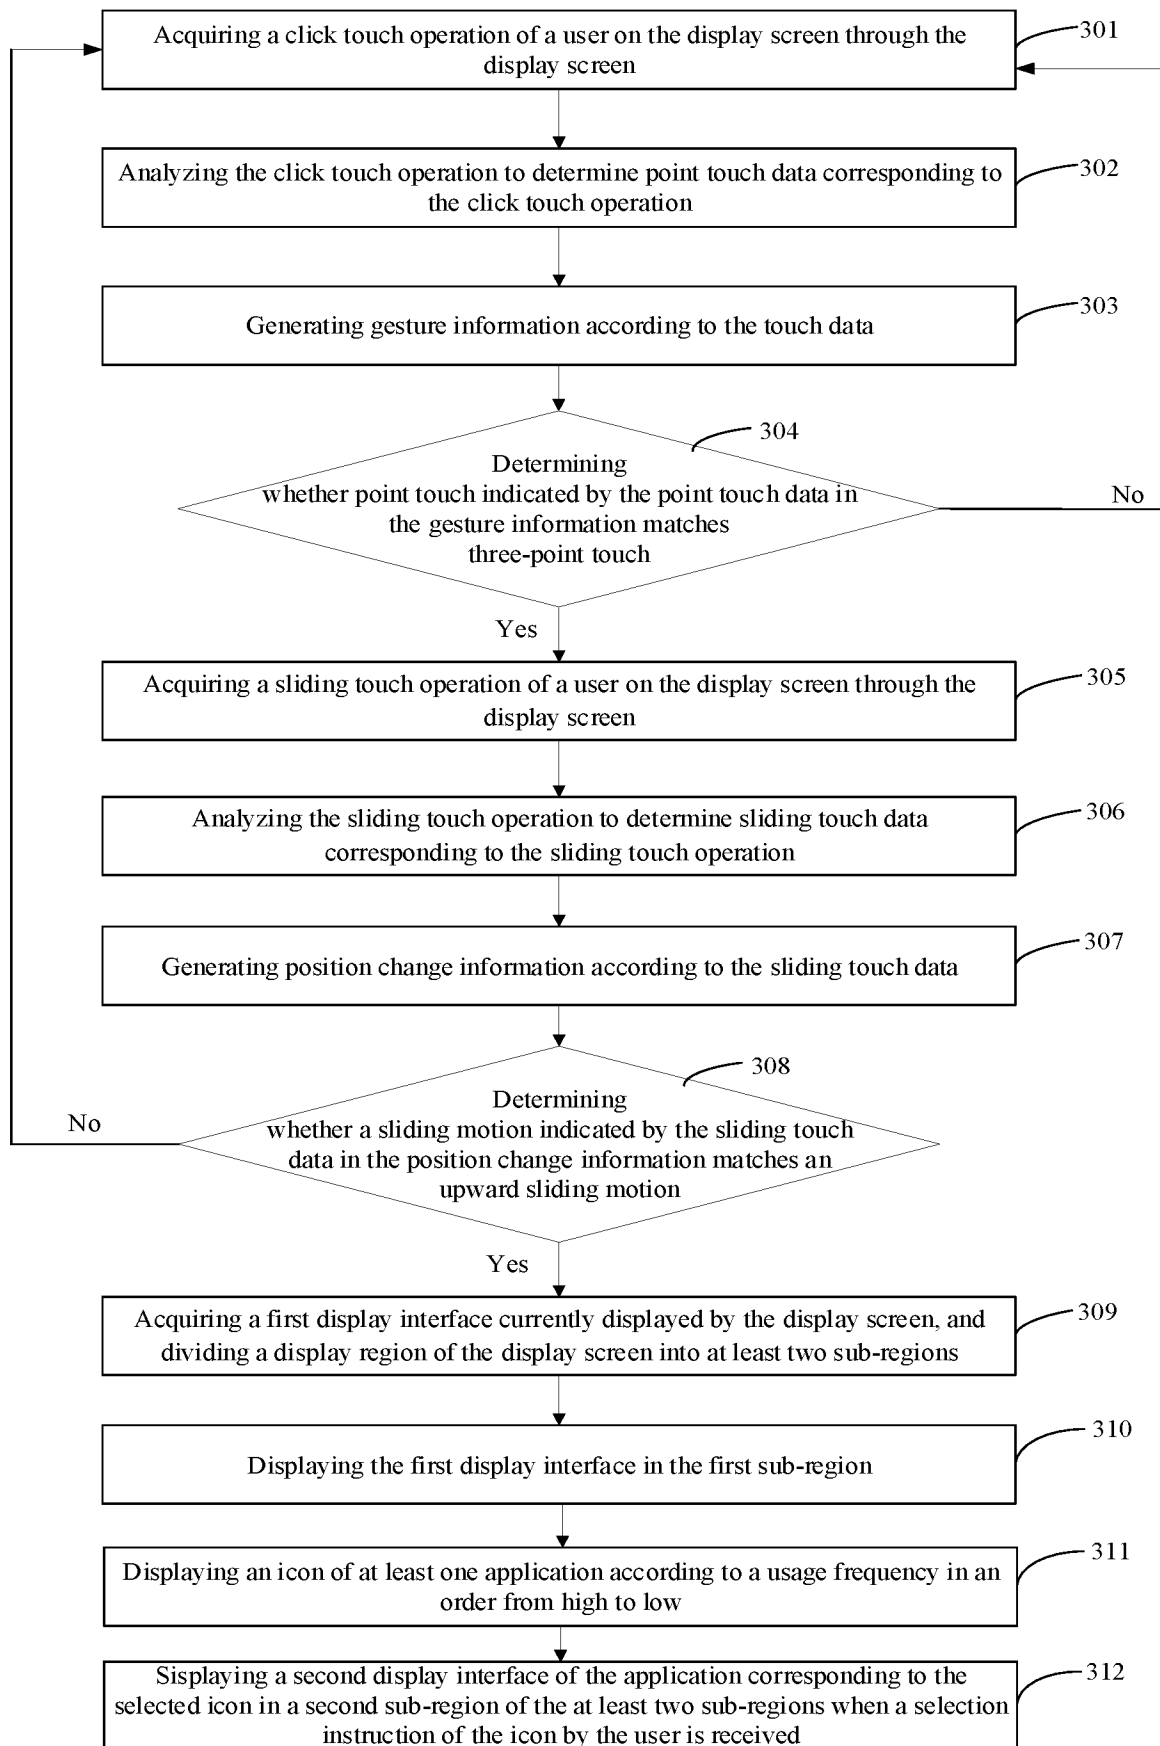


FIG. 2

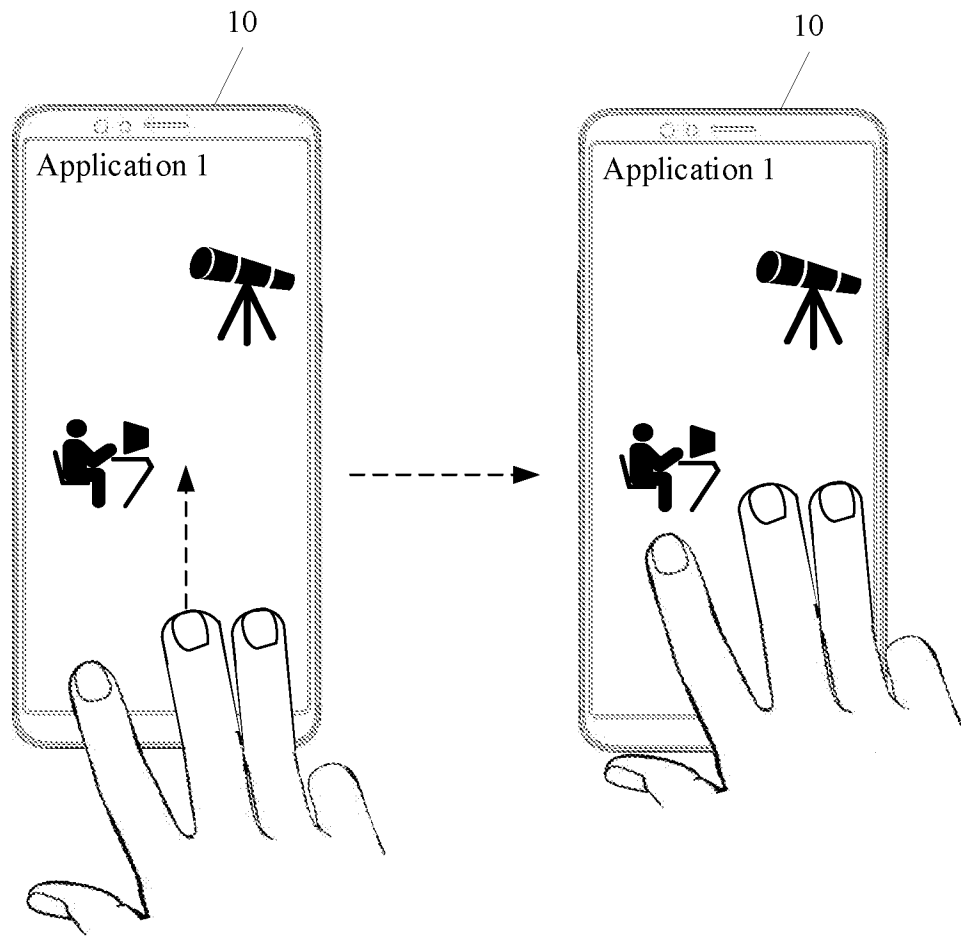


FIG. 3a

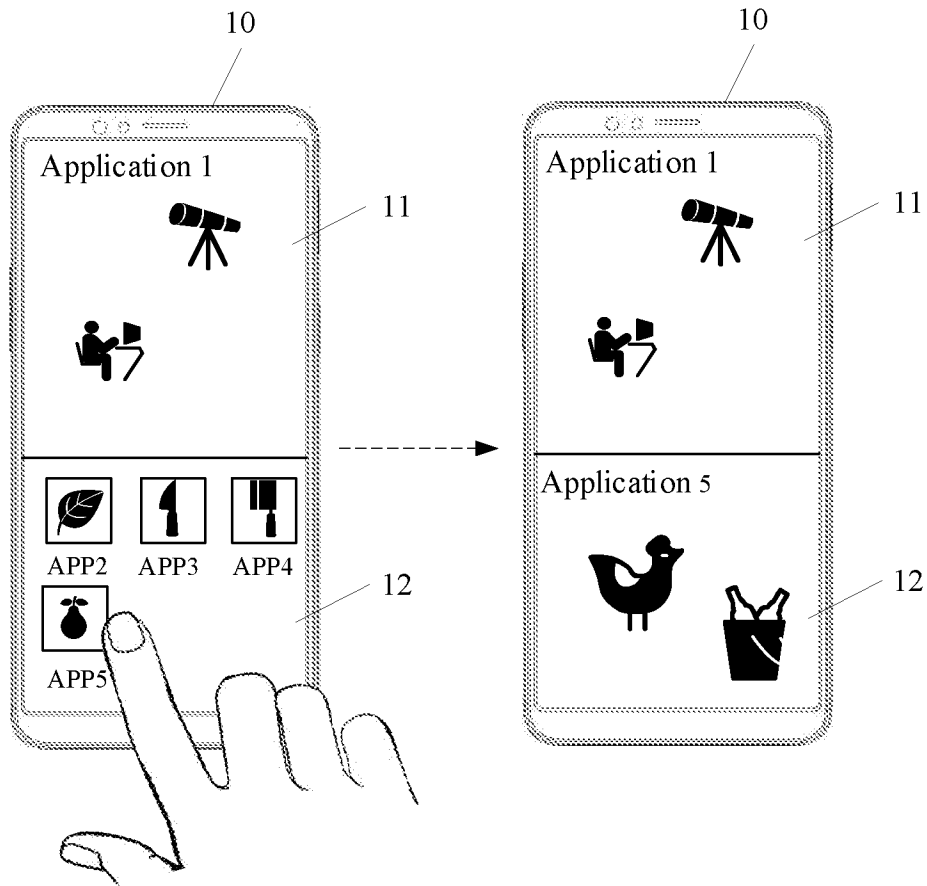


FIG. 3b

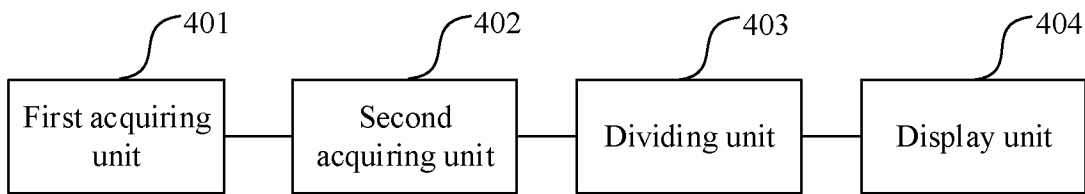


FIG. 4

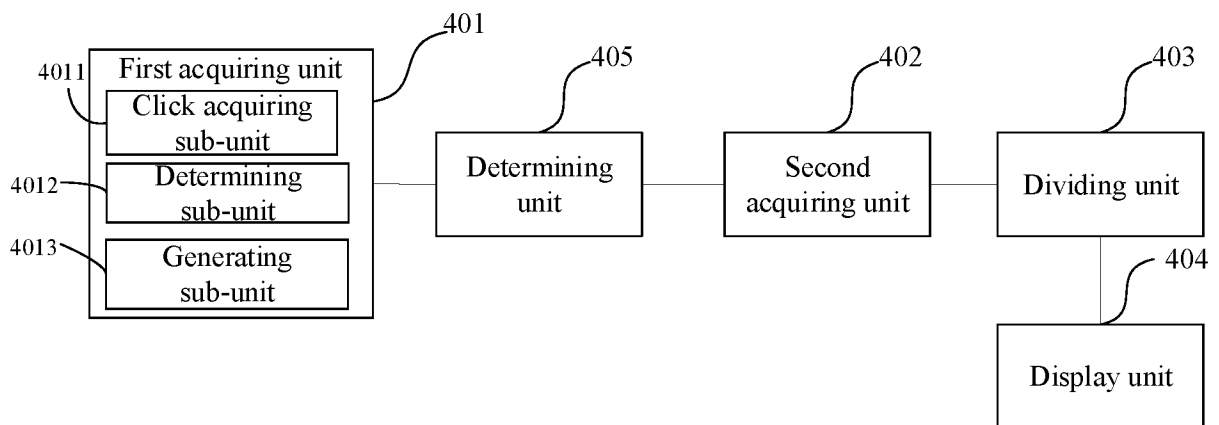


FIG. 5

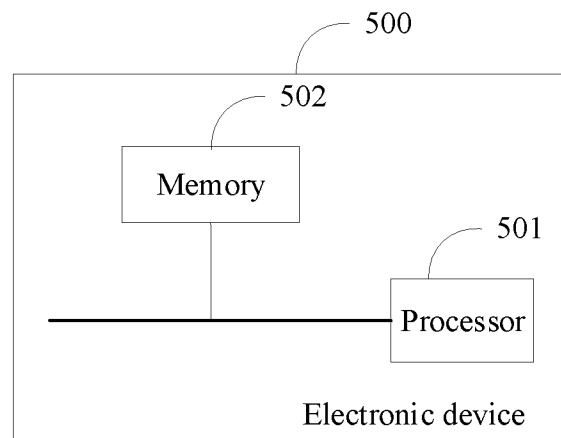


FIG. 6

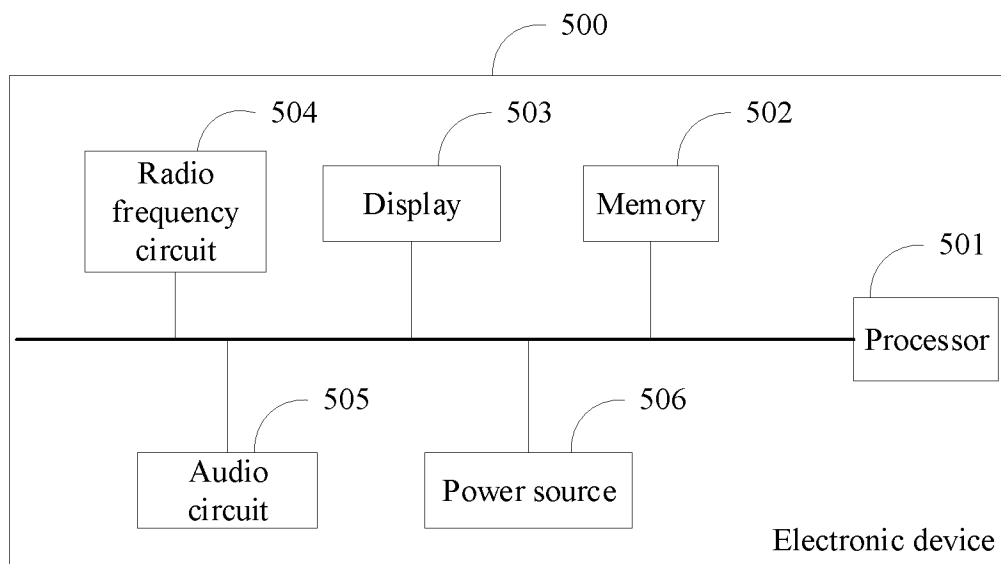


FIG. 7

INTERNATIONAL SEARCH REPORT

International application No.

PCT/CN2019/074245

A. CLASSIFICATION OF SUBJECT MATTER

H04M 1/725(2006.01)i; G06F 3/0488(2013.01)i

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

H04M,G06F

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

CNABS;CNTXT;CNKI;VEN;USTXT;EPTXT;WOTXT:gesture, divide?, slid??. touch+, click, press+, streng+, display, screen, position, chang+, region, oppo

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
PX	CN 108632462 A (OPPO GUANGDONG MOBILE COMMUNICATION CO., LTD.) 09 October 2018 (2018-10-09) claims 1-11, description paragraphs [0043] to [0070]	1-15
X	CN 106775313 A (BEIJING QIHOO SCI & TECHNOLOGY CO., LTD.) 31 May 2017 (2017-05-31) description paragraphs [0050]-[0140], figures 1-4	1-15
A	CN 106527944 A (NUBIA TECHNOLOGY CO., LTD.) 22 March 2017 (2017-03-22) the whole document	1-15
A	CN 106101423 A (NUBIA TECHNOLOGY CO., LTD.) 09 November 2016 (2016-11-09) the whole document	1-15
A	CN 106681641 A (ZHUHAI MEIZU TECHNOLOGY CO., LTD.) 17 May 2017 (2017-05-17) the whole document	1-15
A	CN 106502526 A (NUBIA TECHNOLOGY CO., LTD.) 15 March 2017 (2017-03-15) the whole document	1-15

☐ Further documents are listed in the continuation of Box C.☒ See patent family annex.

* Special categories of cited documents:

“A” document defining the general state of the art which is not considered to be of particular relevance

“E” earlier application or patent but published on or after the international filing date

“L” document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

“O” document referring to an oral disclosure, use, exhibition or other means

“P” document published prior to the international filing date but later than the priority date claimed

“T” later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

“X” document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

“Y” document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

“&” document member of the same patent family

Date of the actual completion of the international search

03 April 2019

Date of mailing of the international search report

18 April 2019

Name and mailing address of the ISA/CN

National Intellectual Property Administration, PRC
6, Xitucheng Rd., Jimen Bridge, Haidian District, Beijing
100088
China

Authorized officer

LIU,Jia

Facsimile No. (86-10)62019451

Telephone No. 86- (010) -62089378

INTERNATIONAL SEARCH REPORT
Information on patent family members

International application No.

PCT/CN2019/074245

Patent document cited in search report			Publication date (day/month/year)	Patent family member(s)	Publication date (day/month/year)
CN	108632462	A	09 October 2018	None	
CN	106775313	A	31 May 2017	None	
CN	106527944	A	22 March 2017	None	
CN	106101423	A	09 November 2016	None	
CN	106681641	A	17 May 2017	None	
CN	106502526	A	15 March 2017	None	