

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
12 August 2004 (12.08.2004)

PCT

(10) International Publication Number
WO 2004/068027 A1

(51) International Patent Classification⁷: **F17C 13/04**,
B65D 47/02

CLAUDE [FR/FR]; 75, quai d'Orsay, F-75321 Paris Cedex
07 (FR).

(21) International Application Number:
PCT/IB2004/000134

(72) Inventor: **BAKER, George, E.**; 1756 Travers Wharf
Road, Cambridge, MD 21613 (US).

(22) International Filing Date: 16 January 2004 (16.01.2004)

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,
KG, KP, KR, KZ, LC, LK, LR, LS, IT, LU, LV, MA, MD,
MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG,
PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM,
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM,
ZW.

(25) Filing Language: English

(26) Publication Language: English


(30) Priority Data:
60/443,059 28 January 2003 (28.01.2003) US
10/405,930 3 April 2003 (03.04.2003) US

(71) Applicant (for all designated States except US): **L'AIR
LIQUIDE - SOCIETE ANONYME A DIRECTOIRE
ET CONSEIL DE SURVEILLANCE POUR L'ETUDE
ET L'EXPLOITATION DES PROCEDES GEORGES**

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),
Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), Euro-
pean (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR,

[Continued on next page]

(54) Title: NON-REFILLABLE VALVE DEVICE

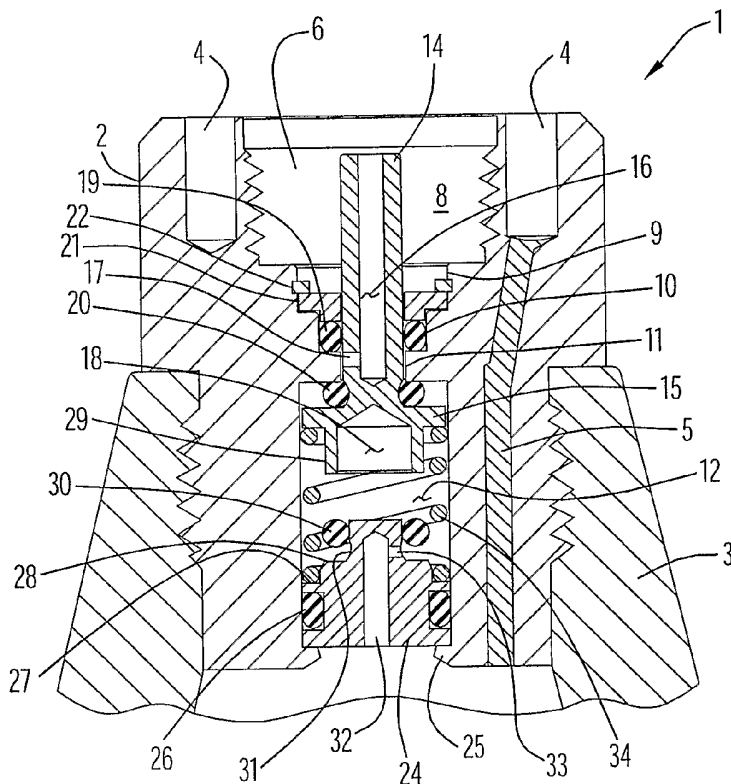

(57) Abstract: A non-refillable valve device includes a housing with an axially extending internal cavity, where the internal cavity includes a chamber extending to an end of the housing. The housing is securable to a container to facilitate fluid communication between the container and the housing chamber. A plug member is secured within the housing chamber to provide a fluid flow passage between the container and the housing chamber when the housing is secured to the container, and an elastic sealing member is also disposed within the chamber. The sealing member is displaceable from a first position to a second position within the chamber, where the sealing member in the first position permits fluid flowing into the valve device to flow through the fluid flow passage and into the container, and the sealing member in the second position substantially prevents fluid flow through the fluid flow passage and into the container. A valve stem is preferably secured and axially displaceable within the internal cavity of the housing to effect movement of the sealing member from the first position to the second position.



GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declaration under Rule 4.17:

- as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii)) for the following designations AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VC, VN, YU, ZA,

ZM, ZW, ARIPO patent (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG)

Published:

- with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

NON-REFILLABLE VALVE DEVICE

BACKGROUND OF THE INVENTION

Technical Field

5 The present invention pertains to valve devices. In particular, the present invention relates to valve devices that prevent refilling of fluids into containers.

Discussion of the Related Art

Many cylinders or containers that store releasable fluids are designed for a single-fill use. In particular, such containers may be required by government regulation to
10 include a refill prevention valve so as to ensure single-fill use of the container.

Various valve devices are presently known that prevent refilling of a container with a fluid. Many of these refill prevention valve devices are initially operable to permit filling of the container, and then a check valve mechanism is activated within the valve device that permits release of fluid within the container but prevents refilling of the
15 container. Exemplary valve devices with refill prevention check valve mechanisms are described in U.S. Patent Nos. 5,018,552, 5,295,502, 5,383,487, 5,467,798 and 5,657,790, the disclosures of which are incorporated herein by reference in their entireties.

Conventional refill prevention valves are typically complex mechanical devices that require several components to effect the deployment of a check valve mechanism after
20 initial filling of the container to which the valve device is secured.

A refill prevention valve device is desirable that is simple in design and requires few working components to effect deployment of a check valve mechanism of the valve device.

25 OBJECTS AND SUMMARY OF THE INVENTION

Accordingly, it is an object of the present invention to provide a valve device that permits a single filling of a container and prevents subsequent refilling of the container.

It is another object of the present invention to provide a non-refillable valve device
30 that is simple and requires a minimal number of operating components to effect

deployment of a check valve mechanism within the device and thus a non-refillable valve function.

The aforesaid objects are achieved individually and/or in combination, and it is not intended that the present invention be construed as requiring two or more of the objects to
5 be combined unless expressly required by the claims attached hereto.

According to the present invention, a non-refillable valve device includes a housing with an axially extending internal cavity, where the internal cavity includes a chamber extending to an end of the housing. The housing is securable to a container to facilitate fluid communication between the container and the housing chamber. A plug
10 member is secured within the housing chamber to provide a fluid flow passage between the container and the housing chamber when the housing is secured to the container, and an elastic sealing member is also disposed within the chamber. The sealing member is displaceable from a first position to a second position within the chamber, where the
15 sealing member in the first position permits fluid flowing into the valve device to flow through the fluid flow passage and into the container, and the sealing member in the second position substantially prevents fluid flow through the fluid flow passage and into the container. A valve stem is preferably secured and axially displaceable within the internal cavity of the housing to effect movement of the sealing member from the first position to the second position.

20 Thus, a check valve mechanism is effectively achieved by coupling the sealing member with the plug member after filling of the container so as to permit flow of fluid from the container through the valve while preventing fluid flow from the housing chamber into the container and thus refilling of the valve. The sealing member preferably expands or compresses radially to permit fluid flow from the container to the housing
25 chamber and through the valve when the sealing device is in the second position.

The above and still further objects, features and advantages of the present invention will become apparent upon consideration of the following detailed description of specific embodiments thereof, particularly when taken in conjunction with the accompanying drawings wherein like reference numerals in the various figures are utilized
30 to designate like components.

BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a cross-sectional view of a non-refillable valve device in accordance with the present invention.

5 Fig. 1a is a cross-sectional view of the valve device of Fig. 1 including a rotating handle to effect axial movement of a valve stem of the device in accordance with the present invention.

Fig. 2 is a cross-sectional view of the valve device of Fig. 1 with the valve stem axially displaced to a position that permits filling of a fluid into a container connected with
10 the valve device in accordance with the present invention.

Fig. 3 is a cross-sectional view of the valve device of Fig. 1 with the valve stem axially displaced to a position that activates a check valve mechanism of the valve device in accordance with the present invention.

Fig. 4 is an enlarged view in cross-section of a portion of the valve device of Fig. 1
15 with the check valve activated and the valve stem displaced to a position that permits one-way flow of fluid from the container through the valve device.

Fig. 5 is a cross-sectional view of another embodiment of a non-refillable valve device in accordance with the present invention.

Fig. 6 is a cross-sectional view of the valve device of Fig. 5 with a valve stem of
20 the device axially displaced to a position that permits filling of a fluid into a container connected with the valve device in accordance with the present invention.

Fig. 7 is a cross-sectional view of the valve device of Fig. 5 with the valve stem axially displaced to a position that activates a check valve mechanism of the valve device in accordance with the present invention.

25 Fig. 8 is an enlarged view in cross-section of a portion of the valve device of Fig. 5 with the check valve mechanism activated and the valve stem displaced to a position that permits one-way flow of fluid from the container through the valve device.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

30 A non-refillable valve device is provided that includes a single elastic sealing member that serves as a check valve mechanism for the valve device. As used herein, the term check valve mechanism refers to a valve mechanism of the valve device that permits fluid flow through the valve device in only a single direction. In particular, when the

check valve mechanism is activated for the valve device of the present invention, the valve device permits fluid to flow from a container to which the valve device is connected and through the valve device to a desired destination but prohibits fluid from flowing from the valve device into the container. Activation of the check valve mechanism is accomplished by moving the sealing member from a first position to a second position within the valve to effect a sealing closure about a valve port and/or passage that communicates with the container opening. The sealing member preferably expands or compresses radially to effect at least partial opening of the valve port and/or passage and permit fluid to escape from the container during valve operation as described below.

Referring to Fig. 1, a valve device 1 includes a housing 2 having a generally T-shaped longitudinal cross-sectional geometry that is defined by an upper housing portion and a lower housing portion. A central cavity 6 extends axially within the housing between its longitudinal ends and receives and retains valve components as described below. The valve housing and other valve components may be constructed of any conventional or other materials (e.g., metal, plastics and/or polymers) that meet valve specifications for a particular application. In addition, any type or types of fluids (e.g., gases and/or liquids) may be utilized with the valve device of the present invention.

The lower housing portion includes external screw threads to facilitate threaded and fluid tight sealing engagement within a threaded opening of container 3.

Alternatively, it is noted that any other suitable fluid tight sealing engagement (e.g., welding, bonding, etc.) may be provided to secure the valve device with the opening of the container. Shallow wells 4 extend longitudinally into a top surface of housing 2 between the central cavity and the outer periphery of the housing. At least one well 4 includes a channel 5 that further extends from the well to a bottom surface of the valve housing, thus defining a passage between the longitudinal ends of the housing. Each channel 5 provided on the valve housing is filled with a low melting alloy or other suitable material to establish a safety relief plug for the valve device in the event of an excessive pressure (e.g., caused by heating) within the container to which the valve device is secured.

Central cavity 6 of the valve housing includes an upper cavity section 8 that extends from the valve housing top surface to an intermediate cavity section. The intermediate cavity section is reduced in dimension by a series of three radially extending internal shoulders 9, 10 and 11. The internal shoulders increase in radial dimension in a stepped manner toward the lower portion of the valve housing, with shoulder 11 defining

the narrowest radial dimension or gap of the intermediate cavity section at its lower end. The lower cavity section forms a chamber 12 that extends between internal shoulder 11 of the intermediate cavity section and an opening at the valve housing bottom surface.

A valve stem 14 is positioned within central cavity 6 and includes a generally
5 cylindrical upper portion extending through the intermediate cavity section and into upper cavity section 8 and a lower portion extending into chamber 12. The radial gap or cavity space at shoulder 11 is slightly larger than the diameter of the valve stem upper portion to permit limited axial movement of the valve stem within cavity 6 as described below. The lower portion of the valve stem includes a radially extending flange 15 that is larger in
10 radial dimension than the cavity space at internal shoulder 11 yet slightly smaller than the transverse cross-sectional dimension of chamber 12 to permit the flow of fluid within the chamber and around the flange during operation of the valve device.

A central passage 16 extends axially within the valve stem upper portion from an opening at a top surface of valve stem 14 to a terminal point within the valve stem near the
15 location of flange 15. A port 17 extends transversely from passage 16 near its terminal point through an outer peripheral wall section of the valve stem to facilitate fluid communication between passage 16 and chamber 12 when the valve stem is axially displaced in a manner as described below. The lower portion of the valve stem below flange 15 has a transverse cross-sectional dimension that is larger than the diameter of the
20 valve stem upper portion and includes a central hollow portion 18 that extends axially from the valve stem bottom surface to a terminal location within the valve stem that is located near but not reaching the terminal point of central passage 16. Thus, hollow portion 18 and central passage 16 do not communicate with each other.

A fluid tight seal is established between valve stem 14 and portions of cavity 6 by
25 providing resilient sealing members, such as O-rings, that surround outer peripheral portions of the valve stem. In particular, a first sealing member 19 is secured around the periphery of the valve stem upper portion within the intermediate cavity section at the radial gap or cavity space formed by shoulder 10. The first sealing member is further pressed against a top surface of shoulder 11 by a retaining ring 21 and a circlip 22 which
30 are also secured within the intermediate cavity section at shoulders 9 and 10. Retaining ring 21 includes a central opening that is similar in dimension to the radial gap formed at shoulder 11 and is slightly larger in diameter than the diameter of the valve stem upper portion to permit limited axial movement of the valve stem within cavity 6. Sealing

member 19 is suitably dimensioned to frictionally engage the outer peripheral surface of the valve stem upper portion so as to provide a fluid tight seal while permitting axial movement of the valve stem. A second sealing member 20 is secured about a groove extending around the outer periphery of valve stem 14 located between flange 15 and port 17. The second sealing member is further disposed within chamber 12 and has an outer diameter that is larger than the radial gap at annular shoulder 11 to prevent sealing member 20 from passing from chamber 12 into the intermediate cavity section. When the valve stem is axially displaced within cavity 6 to a position where second sealing member 20 abuts a bottom surface of shoulder portion 11, as illustrated in Fig. 1, fluid communication between chamber 12 and port 17 of the valve stem is effectively prevented as a result of port 17 being located within the intermediate portion of cavity 6 as well as a fluid tight seal being provided by the second sealing member as it engages shoulder 11.

The check valve mechanism for valve device 1 includes a plug member 24 secured in chamber 12 at the lower portion of the valve housing and engaging an internally extending annular ridge or lip 25 provided at the opening defined at the valve housing bottom surface. The lower portion of plug member 24 (i.e., the portion that engages annular lip 25) is sufficiently dimensioned to frictionally engage the internal housing walls defining chamber 12 so as to prevent axial movement of the plug member within chamber 12 as well as provide a fluid tight seal between the peripheral walls of the plug member lower portion and the engaging wall portions of chamber 12. Optionally, the plug member may be bonded, welded or secured in any other suitable manner within the chamber to prevent its movement and maintain an effective seal during operation of the valve device. An elastic and resilient sealing member 26 (e.g., an O-ring) is provided within a groove extending around an outer peripheral section of the plug member lower portion to ensure a fluid tight seal is maintained at the interface between the plug member lower portion and chamber 12.

The plug member tapers from the lower portion to an intermediate portion, thus forming a shoulder 27 between the lower and intermediate portions, and further tapers from the intermediate portion to an upper portion, thus forming a shoulder 28 between the intermediate and upper portions. Disposed about a shallow groove extending around the outer periphery of the plug member upper portion near its top surface is a resilient and elastic sealing member 30 (e.g., an O-ring). The upper portion of the plug member further includes a retaining groove 31 extending around the outer periphery of the plug member

upper portion and disposed between the shallow groove and shoulder 28. Retaining groove 31 has a greater depth than the shallow groove in which sealing member 30 is disposed and is configured to receive and retain sealing member 30 once the check valve mechanism has been activated as described below.

5 The upper portion of the plug member is sufficiently dimensioned to be at least partially received within hollow portion 18 of valve stem 14 when the valve stem is displaced toward plug member 24 as described below (e.g., see Fig. 3). Sealing member 30 is too large to fit within hollow portion 18, and is instead pushed by an annular wall section 29 of the valve stem when the valve stem is brought in contact with sealing
10 member 30 during its downward descent. Specifically, sealing member 30 is forced by annular wall section 29 from its shallow groove to move along the outer periphery of the plug member upper portion and into retaining groove 31. The intermediate portion of plug member 24 is sufficiently dimensioned to provide a stop for both sealing member 30 and annular wall section 29 at shoulder 28, thus preventing further axial displacement of the
15 valve stem toward the plug member. At this stop point, sealing member 30 is secured within retaining groove 31.

 A central passage 32 extends axially into plug member from its bottom surface to a terminal location within the plug member upper portion that is removed from the plug member top surface (i.e., passage 32 does not extend to the plug member top surface). A
20 port 33 extends transversely from central passage 32 and emerges at the outer periphery of the plug member within retaining groove 31. As can be seen in Fig. 1, passage 32 is in fluid communication with the interior of container 3 and facilitates the flow of fluid, via port 33, between chamber 12 of valve cavity 6 and the container.

 A resilient biasing member is provided within chamber 12 to bias the valve stem
25 toward cavity shoulder 11 in a resting position for the valve device (Fig. 1). In particular, a biasing member 34 is provided in the form of a coil spring, with the coil diameter of the biasing member being sufficiently dimensioned to extend around the intermediate and upper portions of plug member 24 as well as annular wall section 29 of valve stem 14 so as to engage, at its opposing ends, with valve stem flange 15 and plug member shoulder
30 27.

 A number of conventional or other types of valve actuation devices may be employed, during operation of the valve device, to axially displace valve stem 14 from its resting position (Fig. 1) to a position where the valve stem is brought closer to the plug

member. A sufficient amount of the upper portion of the valve stem extends into upper cavity section 8 to permit coupling of the valve stem to a valve actuation device in order to effect axial movement of the valve stem by the actuation device. In an exemplary embodiment depicted in Fig. 1a, a rotating handle 40 is coupled to valve stem 14 and housing 2 in a conventional manner, with external threads on handle 40 engaging with internal threads in the upper cavity section to facilitate axial movement of the valve stem in a desired direction with corresponding rotations of the handle. A central passage 41 is provided in handle 40 that communicates with valve stem passage 16, and a resilient member 42 (e.g., an O-ring) is disposed to provide a fluid tight seal at the interface between the handle and the valve. It is to be understood that the valve device of the present invention is also readily adaptable for use with a variety of other valve actuation devices (e.g., pump type, aerosol or other spray type, tire valve type, etc.), where the actuation device includes a fluid passage that communicates with the valve stem passage.

Operation of valve device 1 is described with reference to Figs. 1-4. Prior to valve actuation, valve stem 14 is biased in the resting position illustrated in Fig. 1. In particular, the valve stem is biased by resilient biasing member 34 to a position removed from plug member 24 such that port 17 is disposed within the intermediate portion of valve cavity 6 and is not in fluid communication with chamber 12. Sealing member 20 engages the bottom surface of cavity shoulder 11, ensuring a fluid tight seal between port 17 and chamber 12. In addition, prior to an initial filling of container 3, sealing member 30 is disposed along the shallow groove of the plug member upper portion and port 33 of the plug member is readily exposed and in fluid communication with chamber 12.

To fill the container, valve stem 14 is displaced by applying a force to the top surface of the valve stem by a valve actuation device (e.g., the actuation device depicted in Fig. 1a) to overcome the biasing force of biasing member 34. The actuation device displaces the valve stem a selected distance toward plug member 24, as depicted in Fig. 2, such that port 17 is exposed within and in fluid communication with chamber 12. In this position, container 3 may be filled with fluid by directing fluid through a passage in the actuation device to valve stem passage 16, through the valve stem passage and port 17 and into chamber 12. The fluid flows in chamber 12 to exposed port 33 on the plug member, into passage 32 and then into container 3. As indicated in Fig. 2, biasing member 34 is compressed during axial displacement of the valve stem, and release of the force applied

to the valve stem by the actuation device will result in the valve stem resuming its biased position as set forth in Fig. 1.

One or more pressure and/or other suitable sensors may be provided at suitable locations (e.g., within the container and/or fluid supply source, etc.) to provide an indication that filling of the container is complete. Once the container has been completely filled, the check valve mechanism is activated by displacing valve stem 14 further toward plug member 24, as depicted in Fig. 3, so as to push sealing member 30 from the shallow groove along the peripheral surface of the plug member upper portion and into retaining groove 31. Filling of the container as well as activation of the check valve mechanism may be manual or automated. In an automated embodiment, the valve stem is automatically displaced toward the plug member by the valve actuation device (e.g., to a position as depicted in Fig. 2), utilizing appropriate processors or controllers, to effect filling of the container. When a threshold pressure and/or other sensed condition is achieved, the valve stem is further displaced by the valve actuation device to engage the sealing member and force it to move along the plug member and into the retaining groove. The force applied to the valve stem is then released, resulting in the valve stem being displaced by the biasing member back to its original, resting position (Fig. 1).

After activation of the check valve mechanism and bringing the valve stem back to its resting position, valve device 1 prevents fluid within the container from being released through the valve stem due to port 17 being disposed within the intermediate cavity section of housing 2 and sealing member 20 providing an effective seal at cavity shoulder 11 (i.e., the lower boundary of the intermediate cavity section). Further, the displacement of sealing member 30 to retaining groove 31 on plug member 24 effects a sealing closure of port 33 that prevents any refilling of container 3. For example, if valve stem 14 is displaced to a position in which valve stem port 17 is in fluid communication with chamber 12 (Fig. 2), any fluid injected through valve stem passage 16 and into chamber 12 is prevented from entering plug member port 33, and thus into container 3, due to sealing member 30 covering and providing an effective seal at port 33. Attempts at forcing fluid from chamber 12 into container 3 are ineffective because such fluid force maintains a fluid tight seal by sealing member 30 against port 30 to prevent the fluid from entering this port.

However, fluid may be easily released from container 3, to the ambient environment or other desired destination outside of the container which is at a lower pressure than the pressure within the container, by displacing valve stem 14 to the position

where valve stem port 17 is in fluid communication with chamber 12 (see Fig. 4). In particular, when container 3 contains a sufficient amount of fluid, the fluid pressure within container 3 effects a slight radial expansion of sealing member 30 away from retaining groove 31, releasing the fluid tight seal and creating a small passage for fluid to escape
5 from container 3 into passage 32, through plug member port 33 and into chamber 12 (indicated generally by arrows 36 in Fig. 4). Fluid within chamber 12 then travels into valve stem port 17, and through valve stem passage 16 and the corresponding passage in the valve actuation device to the desired delivery destination for the fluid. Upon displacement of the valve stem back to its resting position (Fig. 1), fluid is prevented from
10 leaving chamber 12 as a result of valve stem port 17 no longer being in fluid communication with chamber 12. Thus, fluid may be removed from the container in any selected amount (e.g., continuously, in discrete plug volumes, etc.) depending upon when and how often the valve stem is displaced to a position that facilitates fluid communication between valve stem port 17 and chamber 12.

15 The elasticity and resiliency of the sealing member for the check valve mechanism may be selected (e.g., by sealing member design, choice of elastomers and/or other materials of construction for the sealing member, etc.) based upon a number of factors including, without limitation, valve design and dimensions, container design and dimensions, selected threshold pressures necessary to achieve a desired radial expansion
20 and/or compression of the sealing member, etc. Preferably, the sealing member is suitably constructed to permit a selected majority of fluid within the container to be released before the container pressure becomes ineffective to force expansion (or compression) of the sealing member away from a sealing contact with the plug member to achieve fluid communication between the container and the valve chamber.

25 An alternative embodiment of a valve device is illustrated in Figs. 5-8. In this embodiment, the check valve mechanism facilitates one-way fluid flow from the container through the valve device by radial compression, rather than expansion, of a resilient elastic sealing member as described below. Referring to Fig. 5, valve device 100 includes a housing 102 that is substantially similar to the housing described above for the previous
30 embodiment illustrated in Fig. 1. Housing 102 includes a central cavity 106 extending axially between the housing longitudinal ends, with an upper cavity section 108, an intermediate cavity section and a lower cavity section forming a chamber 112. The upper and intermediate cavity sections are substantially similar to the same cavity sections for

the previous embodiment, with a sealing member 119 secured in the intermediate section by a retaining ring 121 and circlip 122. Valve housing 102 is secured within an opening in container 103 in a substantially similar manner as described in the previous embodiment, with external threads disposed on the housing lower section engaging with internal threads on the container opening.

Chamber 112 includes an upper chamber section extending from the bottom surface of annular shoulder 111 to a lower chamber section. The lower chamber section is larger in dimension than the upper chamber section and extends to the bottom surface of housing 102, with the transverse cross-sectional dimension (e.g., diameter) of the lower chamber section being greater at the housing bottom surface than at the interface with the upper chamber section. In particular, the transverse cross-sectional dimension of the lower chamber section remains relatively constant as the lower chamber section extends longitudinally from the upper chamber section to a ridge point 140 within the lower chamber section. At the ridge point, the lower chamber section begins to gradually increase in transverse cross-sectional dimension toward the housing bottom surface, defining a peripheral sloping wall for the lower chamber section that extends at an acute angle from an imaginary vertical line projected from the ridge point which is collinear with the lower chamber peripheral wall disposed above the ridge point.

Valve stem 114 is substantially similar to the valve stem described above for the previous embodiment and includes a cylindrical upper portion extending through the intermediate cavity section and into upper cavity section 108, with a central passage 116 and valve stem port 117 being disposed in valve stem 114 to permit fluid flow into and out of chamber 112. The lower portion of valve stem 114 is larger in transverse cross-sectional dimension than the upper portion as well as the radial gap or cavity space defined by annular shoulder 111. In addition, a resilient sealing member 120 is disposed in chamber 112 and secured about an outer peripheral groove of the valve stem located between valve stem port 117 and the valve stem lower portion. Sealing member 120 provides a fluid tight seal at the interface between chamber 112 and the intermediate cavity section and valve stem port 117 (i.e., in a substantially similar manner as described above for the previous embodiment) when the valve stem is axially biased in a resting position as depicted in Fig. 5. The lower portion of the valve stem further includes a central hollow portion 118 that extends axially into the valve stem from the valve stem bottom surface and terminates before reaching central passage 116.

The check valve mechanism of valve device 100 includes a plug member 124 that is secured within the lower section of chamber 112. Plug member 124 is held within the lower chamber section by securing lower portions of the plug member to selected peripheral wall sections of the lower chamber section (e.g., by welding). However, other lower portions of the plug member remain unattached and removed from other peripheral wall sections of the chamber lower section so as to establish one or more fluid communication paths 141 extending between chamber 112 and the opening at the housing bottom surface. A hollow portion 142 extends axially from a top surface of plug member 124 to a selected terminal location within the plug member. The hollow portion of the plug member is axially aligned within chamber 112 with hollow portion 118 of valve stem 114, and a resilient biasing member 134 extends into each of these hollow portions to contact the valve stem and the plug member so as to bias the valve stem toward the intermediate cavity section as depicted in Fig. 5. In this biased position, sealing member 120 is forced against the bottom surface of annular shoulder 111 to effect a fluid tight seal between chamber 112 and valve stem port 117. The valve stem lower portion and the upper portion of the plug member are further suitably dimensioned such that, upon axial displacement the valve stem toward the plug member, annular wall 129 of the valve stem (which defines valve stem hollow portion 118) engages annular wall 145 of the plug member (which defines plug member hollow portion 142) to prevent further movement of the valve stem beyond the plug member.

The external transverse cross-sectional dimension (e.g., outer diameter) of plug member 124 gradually increases in a direction from the plug member top surface to a selected location proximate the plug member bottom surface. This increasing transverse cross-sectional dimension defines an outer peripheral sloping wall for the plug member that, combined with the sloping wall of the lower chamber section, establishes an annular space or gap 146 between the upper portion of the plug member and the lower chamber section that narrows in transverse cross-sectional dimension from the plug member top surface toward the plug member bottom surface.

An elastic resilient sealing member 130 is provided in the form of an O-ring in chamber 112 and is disposed at or above ridge point 140 within the lower chamber section prior to activation of the check valve mechanism. Sealing member 130 is sufficiently dimensioned such that, at or above ridge point 140, the sealing member is radially compressed within chamber 112. When valve stem 114 is axially displaced toward plug

member 124 and reaches sealing member 130, annular wall 129 of the valve stem contacts and forces sealing member 130 to move along the peripheral sloping wall of the lower chamber section, eventually forcing the sealing member into annular gap 146 as described below.

5 Operation of valve device 100 is described with reference to Figs. 5-8. Prior to actuation, valve stem 114 is biased by biasing member 134 to the resting position illustrated in Fig. 5, with sealing member 120 engaging the bottom surface of cavity shoulder 111 to prevent any fluid communication between valve stem port 117 and chamber 112. To fill the container, valve stem 114 is axially displaced a selected distance
10 into chamber 112 by a suitable valve actuation device, thus compressing biasing member 134, to establish fluid communication between valve stem port 117 and chamber 112 (Fig. 6). It is noted that, at this axially displaced position, annular wall 129 of the valve stem either does not contact sealing member 130 or, alternatively, contacts and pushes the sealing member a short distance toward and/or into annular gap 146 while maintaining
15 fluid communication with the interior of container 103. The container is filled by directing fluid through a passage in the actuation device and into valve stem passage 116, through valve stem port 117 and into chamber 112. From chamber 112, fluid flows past sealing member 130, through annular gap 146 and fluid communication paths 141 and into container 103.

20 Once the container has been filled, valve stem 114 is further axially displaced toward plug member 124 so as to activate the check valve mechanism by pushing sealing member 130 from ridge point 140 downward along the peripheral sloping wall of the lower chamber section and into annular gap 146. Sealing member 130 radially expands within the increasing transverse cross-sectional dimension of the lower chamber section as
25 it moves downward along the peripheral sloping chamber wall, substantially maintaining contact with the chamber wall. The valve stem continues to push sealing member 130 into annular gap 146 until annular wall 129 of the valve stem contacts annular wall 145 of the plug member (Fig. 7). At this point, sealing member 130 is sufficiently wedged between the lower chamber section wall and the plug member to provide an effective fluid tight
30 seal that prevents fluid flow from chamber 112 into container 3. The valve stem is axially biased back to its original position (Fig. 5), as a result of the valve actuation device releasing the applied force to the valve stem and the biasing member biasing the valve

stem away from the plug member, and a fluid tight seal between chamber 112 and valve stem port 117 is reestablished to prevent fluid from escaping the container.

Release of fluid from container 103 and through valve device 100 is established when valve stem 114 is axially displaced by the valve actuation device to a position where
5 valve stem port 117 is in fluid communication with chamber 112 (Fig. 8). At this position, the pressure of fluid within the container forces sealing member 130 slightly upward within annular gap 146 along the peripheral sloping wall of the lower chamber section, causing the sealing member to become slightly radially compressed and to move away from and lose its fluid tight sealing contact with the outer peripheral sloping wall of plug
10 member 124. Fluid escapes from the container, flows through fluid communication paths 141 and into annular gap 146, where the fluid then passes between sealing member 130 and plug member 124 (as generally indicated by arrows 150 in Fig. 8) and continues through chamber 112 to valve stem port 117. Fluid entering the valve stem port flows through valve stem passage 116 and the corresponding passage of the valve actuation
15 device to the desired delivery destination for the fluid.

In contrast, once sealing member 130 is disposed within annular gap 146, refilling of container 103 is effectively prevented. Any fluid forced into chamber 112 presses against sealing member 130 to further wedge the sealing member into the annular gap, resulting in the sealing member radially expanding and pressing tightly against both the
20 peripheral sloping wall of the lower chamber section and the peripheral sloping wall of the plug member.

Thus, the valve devices described above provide a simple check valve mechanism to prevent refilling of a container that requires fewer valve components to effect operability of the valve device. The check valve mechanism employs an elastic sealing
25 member that is either radially compressed or expanded to effect one way flow of fluid from the container through the valve. As previously noted, any suitable types of fluids (e.g., gas or liquid) may be delivered to and from a container utilizing the valve device of the present invention. Further, any conventional or other suitable type of valve actuation device may be employed to effect operation of the valve device to delivery fluid from the
30 container in any suitable manner.

Having described novel non-refillable valve devices and methods of using such valve devices, it is believed that other modifications, variations and changes will be suggested to those skilled in the art in view of the teachings set forth herein. It is therefore

to be understood that all such variations, modifications and changes are believed to fall within the scope of the present invention as defined by the appended claims.

CLAIMS:

1 1. A non-refillable valve device comprising:
2 a housing including an axially extending internal cavity, the internal cavity
3 including a chamber extending to an end of the housing, the housing being securable to a
4 container to facilitate fluid communication between the container and the housing
5 chamber;
6 a plug member secured within the housing chamber to provide a fluid flow passage
7 between the container and the housing chamber when the housing is secured to the
8 container; and
9 an elastic sealing member disposed within the chamber, the sealing member being
10 displaceable from a first position to a second position within the chamber;
11 wherein the sealing member in the first position permits fluid flowing into the
12 valve device to flow through the fluid flow passage and into the container, and the sealing
13 member in the second position substantially prevents fluid flow through the fluid flow
14 passage and into the container.

1 2. The valve device of claim 1, wherein the sealing member comprises an O-
2 ring.

1 3. The valve device of claim 2, wherein the sealing member in the second
2 position permits fluid flowing from the container to flow through the fluid flow passage
3 and into the housing chamber.

1 4. The valve device of claim 3, wherein fluid pressure exerted on the sealing
2 member in the second position causes the sealing member to expand to permit fluid flow
3 through the fluid passage from the container to the housing chamber.

1 5. The valve device of claim 3, wherein fluid pressure exerted on the sealing
2 member in the second position causes the sealing member to compress to permit fluid flow
3 through the fluid passage from the container to the housing chamber.

1

2

2 6. The valve device of claim 1, further comprising:
3 a valve stem secured and axially displaceable within the internal cavity of the
4 housing, wherein the valve stem moves the sealing member from the first position to the
5 second position.

1 7. The valve device of claim 6, further comprising:
2 a biasing member to bias the valve stem within the internal cavity in a direction
3 away from the plug member.

1 8. The valve device of claim 6, wherein the sealing member extends around
2 an outer peripheral section of the plug member and is displaceable along the plug member
3 between the first and second positions, the fluid flow passage includes a port disposed on
4 the outer peripheral section of the plug member and extending to a passage defined within
5 the plug member, and the sealing member covers the port in the second position.

1 9. The valve device of claim 6, wherein the fluid flow passage includes an
2 annular gap defined between the plug member and a peripheral wall section of the housing
3 chamber that surrounds the plug member, and the sealing member is movable by the valve
4 stem into the annular gap to achieve the second position.

1 10. A method of filling and releasing fluid from a container utilizing a non-
2 refillable valve device, the valve device including an axially extending internal cavity with
3 a chamber extending to an end of the housing, a sealing member disposed within the
4 chamber, and a plug member disposed within the housing chamber and configured to
5 define a fluid flow path from the housing end into the housing chamber, the method
6 comprising:

7 (a) securing the valve device to the container such that container is in fluid
8 communication with the housing chamber via the fluid flow path;

9 (b) filling the container by delivering fluid through the internal cavity of the
10 housing to the housing chamber, past the sealing member and through the fluid flow path;
11 and

12 (c) preventing refilling of the container by moving the sealing member from a
13 first position within the housing chamber to a second position that substantially prevents
14 fluid flow through the fluid flow passage and into the container.

- 1 11. The method of claim 10, wherein the sealing member comprises an O-ring.
- 1 12. The method of claim 10, further comprising:
- 2 (d) releasing fluid from the container and through the fluid flow passage into
- 3 the housing chamber when the sealing member is in the second position.
- 1 13. The method of claim 12, wherein (d) includes:
- 2 (d.1) expanding the sealing member to permit fluid flow through the fluid flow
- 3 passage from the container to the housing chamber.
- 1 14. The method of claim 12, wherein (d) includes:
- 2 (d.1) compressing the sealing member to permit fluid flow through the fluid flow
- 3 passage from the container to the housing chamber.
- 1 15. The method of claim 10, wherein the valve device further includes a valve
- 2 stem secured within the internal cavity of the housing, and (c) includes:
- 3 (c.1) axially displacing the valve stem within the internal cavity to move the
- 4 sealing member from the first position to the second position.
- 1 16. The method of claim 15, further comprising:
- 2 (d) biasing the valve stem within the internal cavity in a direction away from
- 3 the plug member.
- 1 17. The method of claim 15, wherein the sealing member extends around an
- 2 outer peripheral section of the plug member, the fluid flow passage includes a port
- 3 disposed on the outer peripheral section of the plug member and extending to a passage
- 4 defined within the plug member, and (c.1) includes:
- 5 (c.1.1) moving the sealing member, via the valve stem, along the plug member
- 6 from the first position to the second position, wherein the sealing member covers the port
- 7 in the second position.

1 18. The method of claim 15, wherein the fluid flow passage includes an annular
2 gap defined between the plug member and the chamber periphery surrounding the plug
3 member, and (c.1) includes:

4 (c.1.1) moving the sealing member, via the valve stem, into the annular gap to
5 achieve the second position.

1 19. A non-refillable valve device comprising:

2 a housing including an axially extending internal cavity, the internal cavity
3 including a chamber extending to an end of the housing, the housing being securable to a
4 container to facilitate fluid communication between the container and the housing
5 chamber;

6 a means for plugging the housing chamber to provide a fluid flow passage between
7 the container and the housing chamber when the housing is secured to the container; and

8 a means for sealing the fluid flow passage to prevent fluid from flowing from the
9 housing chamber to the container, the means for sealing being displaceable from a first
10 position to a second position within the chamber;

11 wherein the means for sealing in the first position permits fluid flowing into the
12 valve device to flow through the fluid flow passage and into the container, and the means
13 for sealing in the second position substantially prevents fluid flow through the fluid flow
14 passage and into the container but permits fluid flow from the container to the housing
15 chamber by contracting or expanding when in the second position as a result of fluid
16 pressure from the container being applied to the means for sealing.

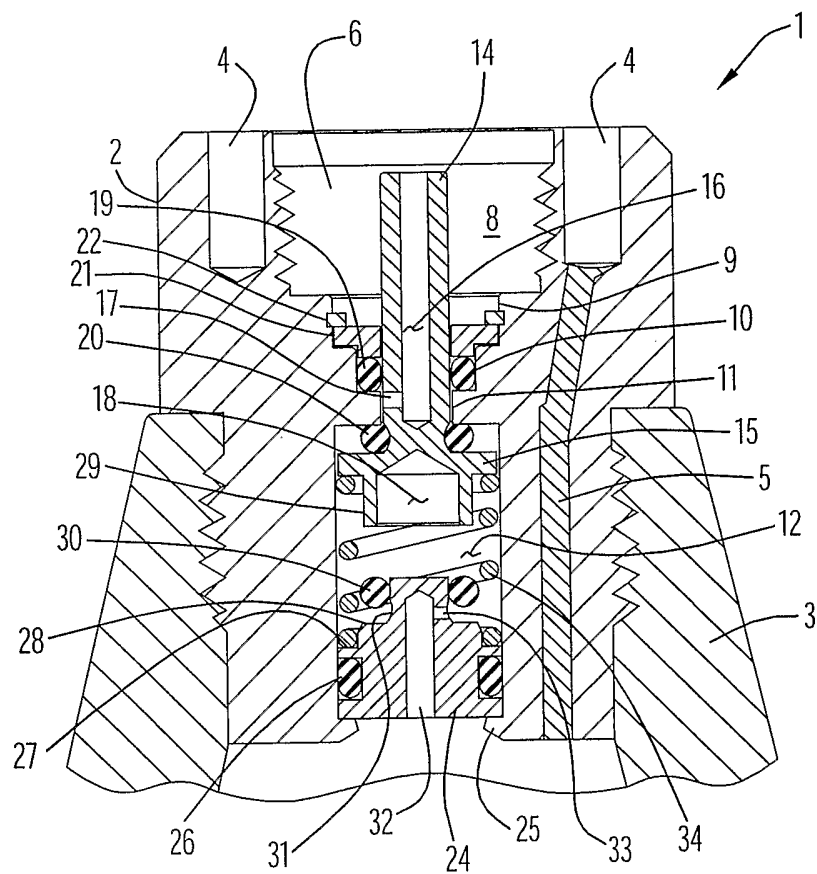


FIG.1

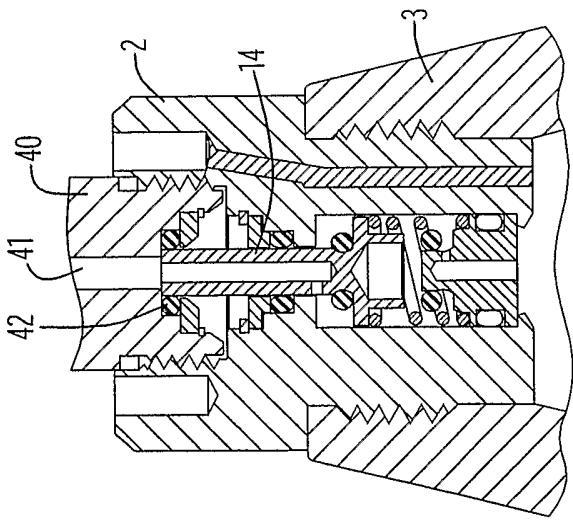


FIG. 1A

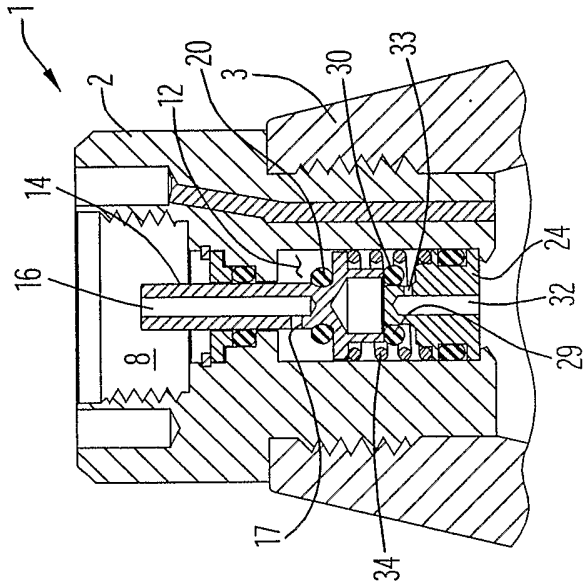


FIG. 2

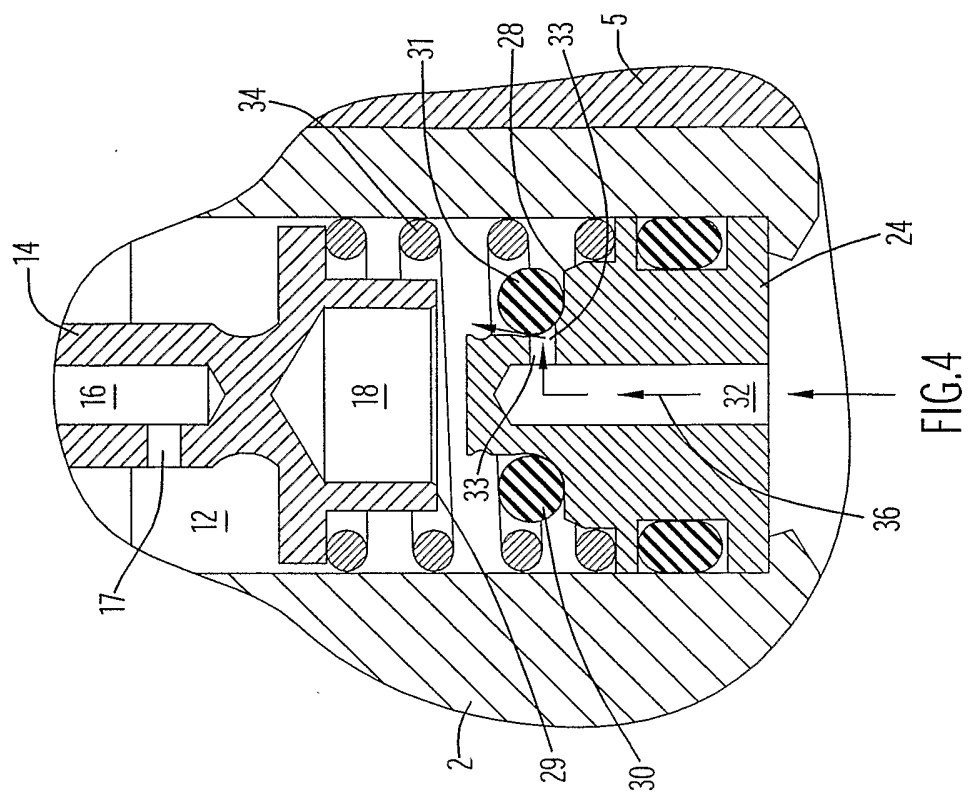


FIG. 4

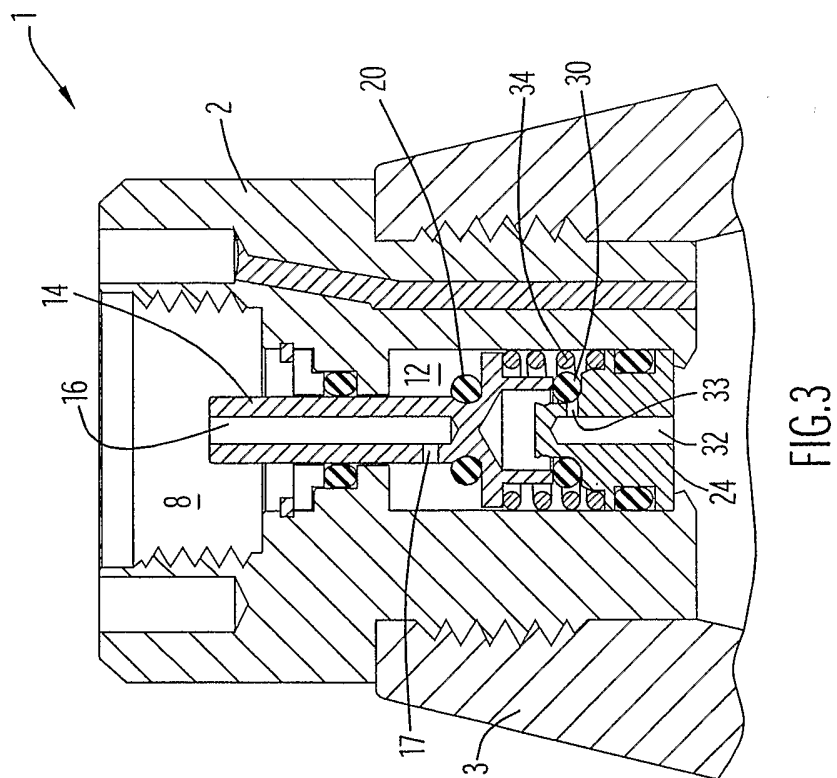


FIG. 3

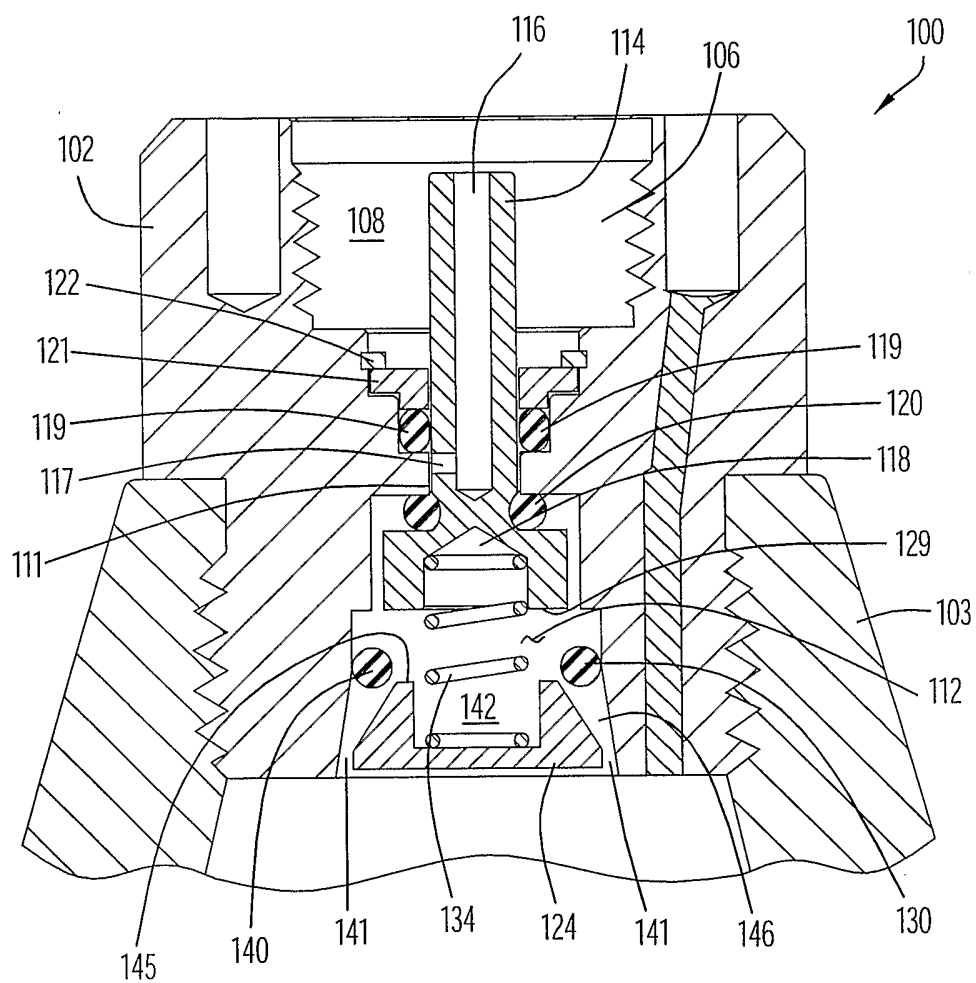


FIG.5

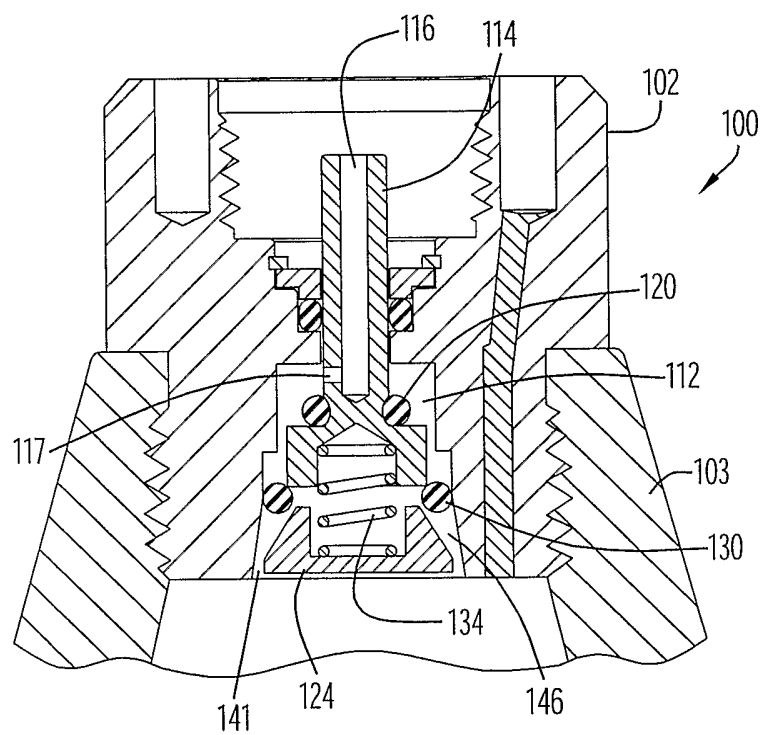


FIG.6

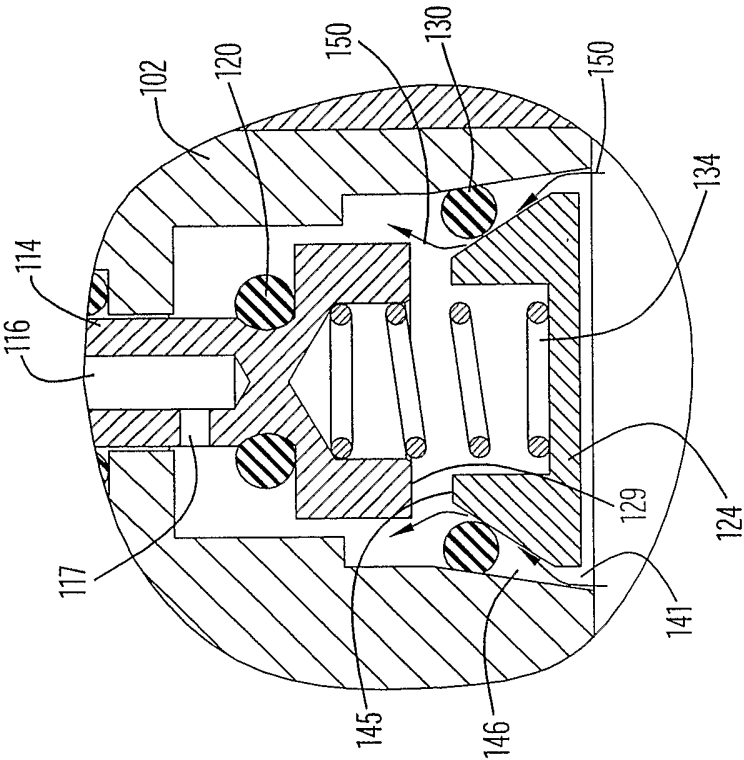


FIG. 8

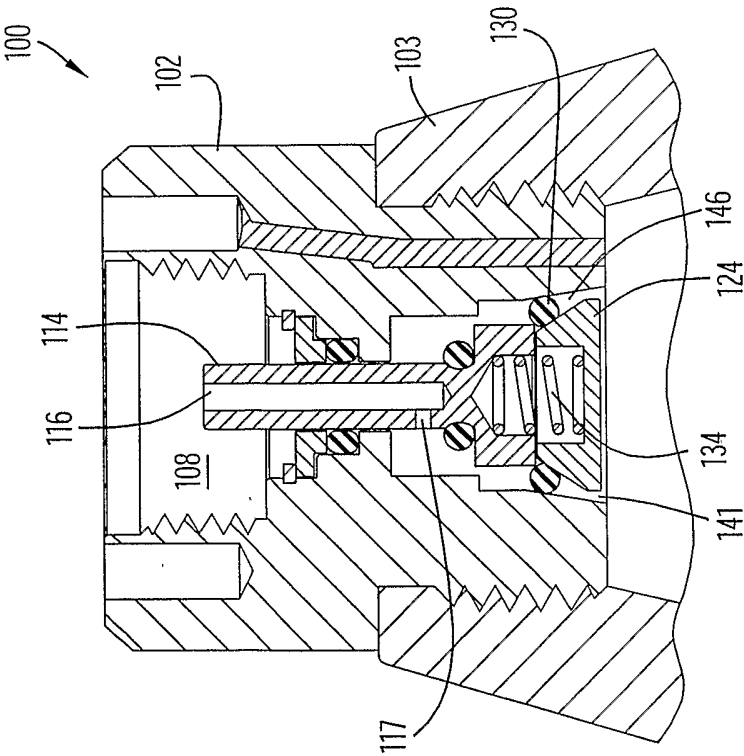


FIG. 7

INTERNATIONAL SEARCH REPORT

International Application No
PCT/IB2004/000134

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 F17C13/04 B65D47/02

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
IPC 7 F17C B65D

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 5 018 552 A (POLITI JEAN-MARIE ET AL) 28 May 1991 (1991-05-28) column 2, lines 14--59 column 3, lines 15-58 figure 1 figure 5	1-3, 5-7, 10-12, 14-16, 19
X	FR 2 655 955 A (ALFAX AB) 21 June 1991 (1991-06-21) page 2, lines 29-36; figures 1-3 pages 3-4	1-3, 5-7, 10-12, 14-16, 19
X	GB 2 329 703 A (BEDFONT SCIENT LTD) 31 March 1999 (1999-03-31) figures 1-5	1-3, 5, 10-12, 14, 19

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents:

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *&* document member of the same patent family

Date of the actual completion of the international search

12 May 2004

Date of mailing of the international search report

19/05/2004

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Ott, T

INTERNATIONAL SEARCH REPORT

International Application No
PCT/IB2004/000134

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 3 552 432 A (WAGNER WILLIAM) 5 January 1971 (1971-01-05) column 2, lines 53-75; figures 7-9 column 3, lines 1-42 -----	1-3, 5, 10-12, 14, 19
A	US 5 467 798 A (BAKER GEORGE D ET AL) 21 November 1995 (1995-11-21) abstract; figure 1 -----	1-19

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No
PCT/IB2004/000134

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 5018552	A	28-05-1991	FR 2647521 A1	30-11-1990
			FR 2655955 A1	21-06-1991
			AT 94834 T	15-10-1993
			CA 2017566 A1	29-11-1990
			DE 69003453 D1	28-10-1993
			DE 69003453 T2	20-01-1994
			DK 401072 T3	17-01-1994
			EP 0401072 A1	05-12-1990
			ES 2044466 T3	01-01-1994
			JP 2032398 C	19-03-1996
			JP 3111288 A	13-05-1991
			JP 7064377 B	12-07-1995
FR 2655955	A	21-06-1991	FR 2655955 A1	21-06-1991
			AT 94834 T	15-10-1993
			DE 69003453 D1	28-10-1993
			DE 69003453 T2	20-01-1994
			DK 401072 T3	17-01-1994
			EP 0401072 A1	05-12-1990
			ES 2044466 T3	01-01-1994
			JP 2032398 C	19-03-1996
			JP 3111288 A	13-05-1991
			JP 7064377 B	12-07-1995
			US 5018552 A	28-05-1991
GB 2329703	A	31-03-1999	NONE	
US 3552432	A	05-01-1971	NONE	
US 5467798	A	21-11-1995	CA 2102926 A1	18-05-1994
			DE 69304658 D1	17-10-1996
			DE 69304658 T2	23-01-1997
			EP 0598640 A1	25-05-1994
			JP 6201099 A	19-07-1994