



(51) International Patent Classification:

H01L 29/778 (2006.01) H01L 29/80 (2006.01)
H01L 29/66 (2006.01) H01L 29/12 (2006.01)

(21) International Application Number:

PCT/US2016/036317

(22) International Filing Date:

08 June 2016 (08.06.2016)

(25) Filing Language:

English

(26) Publication Language:

English

(71) Applicant: INTEL CORPORATION [US/US]; 2200 Mission College Boulevard, Santa Clara, California 95054-1549 (US).

(72) Inventors: ROBERTS, Jeanette M.; 17898 NW Pumpkin Ridge Road, North Plains, Oregon 97133 (US). PIL-LARISSETTY, Ravi; 1330 SW 3rd Avenue, Apt. 1103, Portland, Oregon 97201 (US). MICHALAK, David J.; 1511 SW Park Avenue, Apt 811, Portland, Oregon 97201 (US). YOSCOVITS, Zachary R.; 16145 NW Schendel Avenue, Unit 21B, Beaverton, Oregon 97006 (US).

CLARKE, James S.; 5676 NW 204th Place, Portland, Oregon 97229 (US).

(74) Agent: ZAGER, Laura A.; Patent Capital Group, 2816 Lago Vista Lane, Rockwall, TX 75032 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,

(54) Title: QUANTUM DOT DEVICES WITH DOPED REGIONS

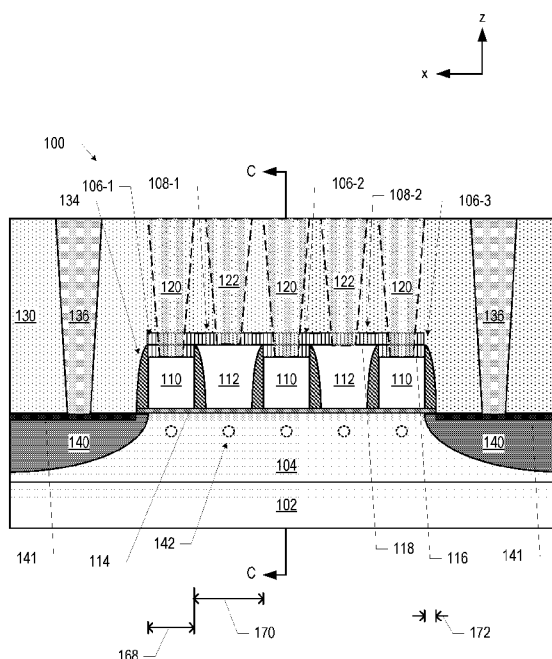


FIG. 2

(57) Abstract: Disclosed herein are quantum dot devices, as well as related computing devices and methods. For example, in some embodiments, a quantum dot device may include: a base; a fin extending away from the base, wherein the fin includes a quantum well layer; a plurality of gates disposed on the fin; and doped regions in the fin, wherein the doped regions are at least partially disposed outside a footprint of the plurality of gates.

MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
KM, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

- *as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))*
- *of inventorship (Rule 4.17(iv))*

Published:

- *with international search report (Art. 21(3))*

QUANTUM DOT DEVICES WITH DOPED REGIONSBackground

[0001] Quantum computing refers to the field of research related to computation systems that use quantum mechanical phenomena to manipulate data. These quantum mechanical phenomena, such as superposition (in which a quantum variable can simultaneously exist in multiple different states) and entanglement (in which multiple quantum variables have related states irrespective of the distance between them in space or time), do not have analogs in the world of classical computing, and thus cannot be implemented with classical computing devices.

Brief Description of the Drawings

[0002] Embodiments will be readily understood by the following detailed description in conjunction with the accompanying drawings. To facilitate this description, like reference numerals designate like structural elements. Embodiments are illustrated by way of example, and not by way of limitation, in the figures of the accompanying drawings.

[0003] FIGS. 1-3 are cross-sectional views of a quantum dot device, in accordance with various embodiments.

[0004] FIGS. 4-25 illustrate various example stages in the manufacture of a quantum dot device, in accordance with various embodiments.

[0005] FIGS. 26-28 are cross-sectional views of various examples of quantum well stacks that may be used in a quantum dot device, in accordance with various embodiments.

[0006] FIGS. 29-35 illustrate example base/fin arrangements that may be used in a quantum dot device, in accordance with various embodiments.

[0007] FIGS. 36-38 illustrate various example stages in the manufacture of alternative gate arrangements that may be included in a quantum dot device, in accordance with various embodiments.

[0008] FIG. 39 illustrates an embodiment of a quantum dot device having multiple groups of gates on a single fin, in accordance with various embodiments.

[0009] FIGS. 40-44 illustrate various alternative stages in the manufacture of a quantum dot device, in accordance with various embodiments.

[0010] FIG. 45 illustrates an example alternative stage in the manufacture of a quantum dot device, in accordance with various embodiments.

[0011] FIGS. 46-47 illustrate detail views of various embodiments of a doped region in a quantum dot device.

[0012] FIG. 48 illustrates an example alternative stage in the manufacture of a quantum dot device including multiple doped subregions, in accordance with various embodiments.

[0013] FIG. 49 illustrates an alternative gate arrangement that may be included in a quantum dot device, in accordance with various embodiments.

[0014] FIG. 50 illustrates an alternative spacer arrangement that may be included in a quantum dot device, in accordance with various embodiments.

[0015] FIGS. 51-56 illustrate various example stages in the manufacture of the quantum dot device discussed with reference to FIG. 50, in accordance with various embodiments.

[0016] FIG. 57 is a flow diagram of an illustrative method of manufacturing a quantum dot device, in accordance with various embodiments.

[0017] FIGS. 58-59 are flow diagrams of illustrative methods of operating a quantum dot device, in accordance with various embodiments.

[0018] FIG. 60 is a block diagram of an example quantum computing device that may include any of the quantum dot devices disclosed herein, in accordance with various embodiments.

Detailed Description

[0019] Disclosed herein are quantum dot devices, as well as related computing devices and methods. For example, in some embodiments, a quantum dot device may include: a base; a fin extending away from the base, wherein the fin includes a quantum well layer; a plurality of gates disposed on the fin; and doped regions in the fin, wherein the doped regions are at least partially disposed outside a footprint of the plurality of gates. A quantum dot formed in such a device may be constrained in the x-direction by the one or more gates, in the y-direction by the fin, and in the z-direction by the quantum well layer, as discussed in detail herein. In some embodiments of a quantum dot device, the one or more gates may include first, second, and third gates. Spacers may be disposed on the sides of the first and second gates, such that a first spacer is disposed on a side of the first gate proximate to the second gate, and a second spacer, physically separate from the first spacer, is disposed on a side of the second gate proximate to the first gate. The third gate may be disposed on the fin between the first and second gates and extend between the first and second spacers.

[0020] The quantum dot devices disclosed herein may enable the formation of quantum dots to serve as quantum bits ("qubits") in a quantum computing device, as well as the control of these quantum dots to perform quantum logic operations. Unlike previous approaches to quantum dot formation and manipulation, various embodiments of the quantum dot devices disclosed herein provide strong spatial localization of the quantum dots (and therefore good control over quantum dot interactions and manipulation), good scalability in the number of quantum dots included in the device, and/or design flexibility in making electrical connections to the quantum dot devices to integrate the quantum dot devices in larger computing devices.

[0021] In the following detailed description, reference is made to the accompanying drawings that form a part hereof, and in which is shown, by way of illustration, embodiments that may be practiced. It is to be understood that other embodiments may be utilized and structural or logical changes may be made without departing from the scope of the present disclosure. Therefore, the following detailed description is not to be taken in a limiting sense.

[0022] Various operations may be described as multiple discrete actions or operations in turn in a manner that is most helpful in understanding the claimed subject matter. However, the order of description should not be construed as to imply that these operations are necessarily order dependent. In particular, these operations may not be performed in the order of presentation. Operations described may be performed in a different order from the described embodiment. Various additional operations may be performed, and/or described operations may be omitted in additional embodiments.

[0023] For the purposes of the present disclosure, the phrase "A and/or B" means (A), (B), or (A and B). For the purposes of the present disclosure, the phrase "A, B, and/or C" means (A), (B), (C), (A and B), (A and C), (B and C), or (A, B, and C). The term "between," when used with reference to measurement ranges, is inclusive of the ends of the measurement ranges. As used herein, the notation "A/B/C" means (A), (B), and/or (C).

[0024] The description uses the phrases "in an embodiment" or "in embodiments," which may each refer to one or more of the same or different embodiments. Furthermore, the terms "comprising," "including," "having," and the like, as used with respect to embodiments of the present disclosure, are synonymous. The disclosure may use perspective-based descriptions such as "above," "below," "top," "bottom," and "side"; such descriptions are used to facilitate the discussion and are not intended to restrict the application of disclosed embodiments. The accompanying drawings are not necessarily drawn to scale. As used herein, a "high-k dielectric" refers to a material having a higher dielectric constant than silicon oxide.

[0025] FIGS. 1-3 are cross-sectional views of a quantum dot device 100, in accordance with various embodiments. In particular, FIG. 2 illustrates the quantum dot device 100 taken along the section A-A of FIG. 1 (while FIG. 1 illustrates the quantum dot device 100 taken along the section C-C of FIG. 2), and FIG. 3 illustrates the quantum dot device 100 taken along the section B-B of FIG. 1 with a number of components not shown to more readily illustrate how the gates 106/108 may be patterned (while FIG. 1 illustrates a quantum dot device 100 taken along the section D-D of FIG. 3). Although FIG. 1 indicates that the cross-section illustrated in FIG. 2 is taken through the fin 104-1, an analogous cross section taken through the fin 104-2 may be identical, and thus the discussion of FIG. 2 refers generally to the "fin 104."

[0026] The quantum dot device 100 may include a base 102 and multiple fins 104 extending away from the base 102. The base 102 and the fins 104 may include a substrate and a quantum well stack (not shown in FIGS. 1-3, but discussed below with reference to the substrate 144 and the quantum well stack 146), distributed in any of a number of ways between the base 102 and the fins 104. The base 102 may include at least some of the substrate, and the fins 104 may each include a quantum well layer of the quantum well stack (discussed below with reference to the quantum well layer 152). Examples of base/fin arrangements are discussed below with reference to the base fin arrangements 158 of FIGS. 29-35.

[0027] Although only two fins, 104-1 and 104-2, are shown in FIGS. 1-3, this is simply for ease of illustration, and more than two fins 104 may be included in the quantum dot device 100. In some embodiments, the total number of fins 104 included in the quantum dot device 100 is an even number, with the fins 104 organized into pairs including one active fin 104 and one read fin 104, as discussed in detail below. When the quantum dot device 100 includes more than two fins 104, the fins 104 may be arranged in pairs in a line (e.g., $2N$ fins total may be arranged in a $1 \times 2N$ line, or a $2 \times N$ line) or in pairs in a larger array (e.g., $2N$ fins total may be arranged as a $4 \times N/2$ array, a $6 \times N/3$ array, etc.). The discussion herein will largely focus on a single pair of fins 104 for ease of illustration, but all the teachings of the present disclosure apply to quantum dot devices 100 with more fins 104.

[0028] As noted above, each of the fins 104 may include a quantum well layer (not shown in FIGS. 1-3, but discussed below with reference to the quantum well layer 152). The quantum well layer included in the fins 104 may be arranged normal to the z-direction, and may provide a layer in which a two-dimensional electron gas (2DEG) may form to enable the generation of a quantum dot during operation of the quantum dot device 100, as discussed in further detail below. The quantum well layer itself may provide a geometric constraint on the z-location of quantum dots in the fins 104, and the limited extent of the fins 104 (and therefore the quantum well layer) in the y-direction may provide a geometric constraint on the y-location of quantum dots in the fins 104. To control the x-location of quantum dots in the fins 104, voltages may be applied to gates disposed on the fins 104 to adjust the energy profile along the fins 104 in the x-direction and thereby constrain the x-location of quantum dots within quantum wells (discussed in detail below with reference to the gates 106/108). The dimensions of the fins 104 may take any suitable values. For example, in some embodiments, the fins 104 may each have a width 162 between 10 and 30 nanometers. In some embodiments, the fins 104 may each have a height 164 between 200 and 400 nanometers (e.g., between 250 and 350 nanometers, or equal to 300 nanometers).

[0029] The fins 104 may be arranged in parallel, as illustrated in FIGS. 1 and 3, and may be spaced apart by an insulating material 128, which may be disposed on opposite faces of the fins 104. The

insulating material 128 may be a dielectric material, such as silicon oxide. For example, in some embodiments, the fins 104 may be spaced apart by a distance 160 between 100 and 250 microns.

[0030] Multiple gates may be disposed on each of the fins 104. In the embodiment illustrated in FIG. 2, three gates 106 and two gates 108 are shown as distributed on the top of the fin 104. This particular number of gates is simply illustrative, and any suitable number of gates may be used. Additionally, as discussed below with reference to FIG. 39, multiple groups of gates (like the gates illustrated in FIG. 2) may be disposed on the fin 104.

[0031] As shown in FIG. 2, the gate 108-1 may be disposed between the gates 106-1 and 106-2, and the gate 108-2 may be disposed between the gates 106-2 and 106-3. Each of the gates 106/108 may include a gate dielectric 114; in the embodiment illustrated in FIG. 2, the gate dielectric 114 for all of the gates 106/108 is provided by a common layer of gate dielectric material. In other embodiments, the gate dielectric 114 for each of the gates 106/108 may be provided by separate portions of gate dielectric 114 (e.g., as discussed below with reference to FIGS. 40-44). In some embodiments, the gate dielectric 114 may be a multilayer gate dielectric (e.g., with multiple materials used to improve the interface between the fin 104 and the corresponding gate metal). The gate dielectric 114 may be, for example, silicon oxide, aluminum oxide, or a high-k dielectric, such as hafnium oxide. More generally, the gate dielectric 114 may include elements such as hafnium, silicon, oxygen, titanium, tantalum, lanthanum, aluminum, zirconium, barium, strontium, yttrium, lead, scandium, niobium, and zinc. Examples of materials that may be used in the gate dielectric 114 may include, but are not limited to, hafnium oxide, hafnium silicon oxide, lanthanum oxide, lanthanum aluminum oxide, zirconium oxide, zirconium silicon oxide, tantalum oxide, titanium oxide, barium strontium titanium oxide, barium titanium oxide, strontium titanium oxide, yttrium oxide, aluminum oxide, tantalum oxide, tantalum silicon oxide, lead scandium tantalum oxide, and lead zinc niobate. In some embodiments, an annealing process may be carried out on the gate dielectric 114 to improve the quality of the gate dielectric 114.

[0032] Each of the gates 106 may include a gate metal 110 and a hardmask 116. The hardmask 116 may be formed of silicon nitride, silicon carbide, or another suitable material. The gate metal 110 may be disposed between the hardmask 116 and the gate dielectric 114, and the gate dielectric 114 may be disposed between the gate metal 110 and the fin 104. Only one portion of the hardmask 116 is labeled in FIG. 2 for ease of illustration. In some embodiments, the gate metal 110 may be a superconductor, such as aluminum, titanium nitride (e.g., deposited via atomic layer deposition), or niobium titanium nitride. In some embodiments, the hardmask 116 may not be present in the quantum dot device 100 (e.g., a hardmask like the hardmask 116 may be removed during processing, as discussed below). The sides of the gate metal 110 may be substantially parallel, as

shown in FIG. 2, and insulating spacers 134 may be disposed on the sides of the gate metal 110 and the hardmask 116. As illustrated in FIG. 2, the spacers 134 may be thicker closer to the fin 104 and thinner farther away from the fin 104. In some embodiments, the spacers 134 may have a convex shape. The spacers 134 may be formed of any suitable material, such as a carbon-doped oxide, silicon nitride, silicon oxide, or other carbides or nitrides (e.g., silicon carbide, silicon nitride doped with carbon, and silicon oxynitride). The gate metal 110 may be any suitable metal, such as titanium nitride.

[0033] Each of the gates 108 may include a gate metal 112 and a hardmask 118. The hardmask 118 may be formed of silicon nitride, silicon carbide, or another suitable material. The gate metal 112 may be disposed between the hardmask 118 and the gate dielectric 114, and the gate dielectric 114 may be disposed between the gate metal 112 and the fin 104. In the embodiment illustrated in FIG. 2, the hardmask 118 may extend over the hardmask 116 (and over the gate metal 110 of the gates 106), while in other embodiments, the hardmask 118 may not extend over the gate metal 110 (e.g., as discussed below with reference to FIG. 45). In some embodiments, the gate metal 112 may be a different metal from the gate metal 110; in other embodiments, the gate metal 112 and the gate metal 110 may have the same material composition. In some embodiments, the gate metal 112 may be a superconductor, such as aluminum, titanium nitride (e.g., deposited via atomic layer deposition), or niobium titanium nitride. In some embodiments, the hardmask 118 may not be present in the quantum dot device 100 (e.g., a hardmask like the hardmask 118 may be removed during processing, as discussed below).

[0034] The gate 108-1 may extend between the proximate spacers 134 on the sides of the gate 106-1 and the gate 106-2, as shown in FIG. 2. In some embodiments, the gate metal 112 of the gate 108-1 may extend between the spacers 134 on the sides of the gate 106-1 and the gate 106-2. Thus, the gate metal 112 of the gate 108-1 may have a shape that is substantially complementary to the shape of the spacers 134, as shown. Similarly, the gate 108-2 may extend between the proximate spacers 134 on the sides of the gate 106-2 and the gate 106-3. In some embodiments in which the gate dielectric 114 is not a layer shared commonly between the gates 108 and 106, but instead is separately deposited on the fin 104 between the spacers 134 (e.g., as discussed below with reference to FIGS. 40-44), the gate dielectric 114 may extend at least partially up the sides of the spacers 134, and the gate metal 112 may extend between the portions of gate dielectric 114 on the spacers 134. The gate metal 112, like the gate metal 110, may be any suitable metal, such as titanium nitride.

[0035] The dimensions of the gates 106/108 may take any suitable values. For example, in some embodiments, the z-height 166 of the gate metal 110 may be between 40 and 75 nanometers (e.g.,

approximately 50 nanometers); the z-height of the gate metal 112 may be in the same range. In embodiments like the ones illustrated in FIGS. 2, 38, and 45, the z-height of the gate metal 112 may be greater than the z-height of the gate metal 110. In some embodiments, the length 168 of the gate metal 110 (i.e., in the x-direction) may be between 20 and 40 nanometers (e.g., 30 nanometers). In some embodiments, the distance 170 between adjacent ones of the gates 106 (e.g., as measured from the gate metal 110 of one gate 106 to the gate metal 110 of an adjacent gate 106 in the x-direction, as illustrated in FIG. 2) may be between 40 and 60 nanometers (e.g., 50 nanometers). In some embodiments, the thickness 172 of the spacers 134 may be between 1 and 10 nanometers (e.g., between 3 and 5 nanometers, between 4 and 6 nanometers, or between 4 and 7 nanometers). The length of the gate metal 112 (i.e., in the x-direction) may depend on the dimensions of the gates 106 and the spacers 134, as illustrated in FIG. 2. As indicated in FIG. 1, the gates 106/108 on one fin 104 may extend over the insulating material 128 beyond their respective fins 104 and towards the other fin 104, but may be isolated from their counterpart gates by the intervening insulating material 130 and spacers 134.

[0036] As shown in FIG. 2, the gates 106 and 108 may be alternately arranged along the fin 104 in the x-direction. During operation of the quantum dot device 100, voltages may be applied to the gates 106/108 to adjust the potential energy in the quantum well layer (not shown) in the fin 104 to create quantum wells of varying depths in which quantum dots 142 may form. Only one quantum dot 142 is labeled with a reference numeral in FIGS. 2 and 3 for ease of illustration, but five are indicated as dotted circles in each fin 104. The location of the quantum dots 142 in FIG. 2 is not intended to indicate a particular geometric positioning of the quantum dots 142. The spacers 134 may themselves provide "passive" barriers between quantum wells under the gates 106/108 in the quantum well layer, and the voltages applied to different ones of the gates 106/108 may adjust the potential energy under the gates 106/108 in the quantum well layer; decreasing the potential energy may form quantum wells, while increasing the potential energy may form quantum barriers.

[0037] The fins 104 may include doped regions 140 that may serve as a reservoir of charge carriers for the quantum dot device 100. For example, an n-type doped region 140 may supply electrons for electron-type quantum dots 142, and a p-type doped region 140 may supply holes for hole-type quantum dots 142. In some embodiments, an interface material 141 may be disposed at a surface of a doped region 140, as shown. The interface material 141 may facilitate electrical coupling between a conductive contact (e.g., a conductive via 136, as discussed below) and the doped region 140. The interface material 141 may be any suitable metal-semiconductor ohmic contact material; for example, in embodiments in which the doped region 140 includes silicon, the interface material 141 may include nickel silicide, aluminum silicide, titanium silicide, molybdenum silicide, cobalt silicide,

tungsten silicide, or platinum silicide (e.g., as discussed below with reference to FIGS. 22-23). In some embodiments, the interface material 141 may be a non-silicide compound, such as titanium nitride. In some embodiments, the interface material 141 may be a metal (e.g., aluminum, tungsten, or indium).

[0038] The quantum dot devices 100 disclosed herein may be used to form electron-type or hole-type quantum dots 142. Note that the polarity of the voltages applied to the gates 106/108 to form quantum wells/barriers depend on the charge carriers used in the quantum dot device 100. In embodiments in which the charge carriers are electrons (and thus the quantum dots 142 are electron-type quantum dots), apply negative voltages applied to a gate 106/108 may increase the potential barrier under the gate 106/108, and apply positive voltages applied to a gate 106/108 may decrease the potential barrier under the gate 106/108 (thereby forming a potential well in which an electron-type quantum dot 142 may form). In embodiments in which the charge carriers are holes (and thus the quantum dots 142 are hole-type quantum dots), apply positive voltages applied to a gate 106/108 may increase the potential barrier under the gate 106/108, and apply negative voltages applied to a gate 106 and 108 may decrease the potential barrier under the gate 106/108 (thereby forming a potential well in which a hole-type quantum dot 142 may form). The quantum dot devices 100 disclosed herein may be used to form electron-type or hole-type quantum dots.

[0039] Voltages may be applied to each of the gates 106 and 108 separately to adjust the potential energy in the quantum well layer under the gates 106 and 108, and thereby control the formation of quantum dots 142 under each of the gates 106 and 108. Additionally, the relative potential energy profiles under different ones of the gates 106 and 108 allow the quantum dot device 100 to tune the potential interaction between quantum dots 142 under adjacent gates. For example, if two adjacent quantum dots 142 (e.g., one quantum dot 142 under a gate 106 and another quantum dot 142 under a gate 108) are separated by only a short potential barrier, the two quantum dots 142 may interact more strongly than if they were separated by a taller potential barrier. Since the depth of the potential wells/height of the potential barriers under each gate 106/108 may be adjusted by adjusting the voltages on the respective gates 106/108, the differences in potential between adjacent gates 106/108 may be adjusted, and thus the interaction tuned.

[0040] In some applications, the gates 108 may be used as plunger gates to enable the formation of quantum dots 142 under the gates 108, while the gates 106 may be used as barrier gates to adjust the potential barrier between quantum dots 142 formed under adjacent gates 108. In other applications, the gates 108 may be used as barrier gates, while the gates 106 are used as plunger gates. In other applications, quantum dots 142 may be formed under all of the gates 106 and 108, or under any desired subset of the gates 106 and 108.

[0041] Conductive vias and lines may make contact with the gates 106/108, and to the doped regions 140, to enable electrical connection to the gates 106/108 and the doped regions 140 to be made in desired locations. As shown in FIGS. 1-3, the gates 106 may extend away from the fins 104, and conductive vias 120 may contact the gates 106 (and are drawn in dashed lines in FIG. 2 to indicate their location behind the plane of the drawing). The conductive vias 120 may extend through the hardmask 116 and the hardmask 118 to contact the gate metal 110 of the gates 106. The gates 108 may extend away from the fins 104, and conductive vias 122 may contact the gates 108 (also drawn in dashed lines in FIG. 2 to indicate their location behind the plane of the drawing). The conductive vias 122 may extend through the hardmask 118 to contact the gate metal 112 of the gates 108. Conductive vias 136 may contact the interface material 141 and may thereby make electrical contact with the doped regions 140. The quantum dot device 100 may include further conductive vias and/or lines (not shown) to make electrical contact to the gates 106/108 and/or the doped regions 140, as desired. The conductive vias and lines included in a quantum dot device 100 may include any suitable materials, such as copper, tungsten (deposited, e.g., by CVD), or a superconductor (e.g., aluminum, tin, titanium nitride, niobium titanium nitride, tantalum, niobium, or other niobium compounds such as niobium tin and niobium germanium).

[0042] During operation, a bias voltage may be applied to the doped regions 140 (e.g., via the conductive vias 136 and the interface material 141) to cause current to flow through the doped regions 140. When the doped regions 140 are doped with an n-type material, this voltage may be positive; when the doped regions 140 are doped with a p-type material, this voltage may be negative. The magnitude of this bias voltage may take any suitable value (e.g., between 0.25 volts and 2 volts).

[0043] The conductive vias 120, 122, and 136 may be electrically isolated from each other by an insulating material 130. The insulating material 130 may be any suitable material, such as an interlayer dielectric (ILD). Examples of the insulating material 130 may include silicon oxide, silicon nitride, aluminum oxide, carbon-doped oxide, and/or silicon oxynitride. As known in the art of integrated circuit manufacturing, conductive vias and lines may be formed in an iterative process in which layers of structures are formed on top of each other. In some embodiments, the conductive vias 120/122/136 may have a width that is 20 nanometers or greater at their widest point (e.g., 30 nanometers), and a pitch of 80 nanometers or greater (e.g., 100 nanometers). In some embodiments, conductive lines (not shown) included in the quantum dot device 100 may have a width that is 100 nanometers or greater, and a pitch of 100 nanometers or greater. The particular arrangement of conductive vias shown in FIGS. 1-3 is simply illustrative, and any electrical routing arrangement may be implemented.

[0044] As discussed above, the structure of the fin 104-1 may be the same as the structure of the fin 104-2; similarly, the construction of gates 106/108 on the fin 104-1 may be the same as the construction of gates 106/108 on the fin 104-2. The gates 106/108 on the fin 104-1 may be mirrored by corresponding gates 106/108 on the parallel fin 104-2, and the insulating material 130 may separate the gates 106/108 on the different fins 104-1 and 104-2. In particular, quantum dots 142 formed in the fin 104-1 (under the gates 106/108) may have counterpart quantum dots 142 in the fin 104-2 (under the corresponding gates 106/108). In some embodiments, the quantum dots 142 in the fin 104-1 may be used as "active" quantum dots in the sense that these quantum dots 142 act as qubits and are controlled (e.g., by voltages applied to the gates 106/108 of the fin 104-1) to perform quantum computations. The quantum dots 142 in the fin 104-2 may be used as "read" quantum dots in the sense that these quantum dots 142 may sense the quantum state of the quantum dots 142 in the fin 104-1 by detecting the electric field generated by the charge in the quantum dots 142 in the fin 104-1, and may convert the quantum state of the quantum dots 142 in the fin 104-1 into electrical signals that may be detected by the gates 106/108 on the fin 104-2. Each quantum dot 142 in the fin 104-1 may be read by its corresponding quantum dot 142 in the fin 104-2. Thus, the quantum dot device 100 enables both quantum computation and the ability to read the results of a quantum computation.

[0045] The quantum dot devices 100 disclosed herein may be manufactured using any suitable techniques. FIGS. 4-25 illustrate various example stages in the manufacture of the quantum dot device 100 of FIGS. 1-3, in accordance with various embodiments. Although the particular manufacturing operations discussed below with reference to FIGS. 4-25 are illustrated as manufacturing a particular embodiment of the quantum dot device 100, these operations may be applied to manufacture many different embodiments of the quantum dot device 100, as discussed herein. Any of the elements discussed below with reference to FIGS. 4-25 may take the form of any of the embodiments of those elements discussed above (or otherwise disclosed herein).

[0046] FIG. 4 illustrates a cross-sectional view of an assembly 200 including a substrate 144. The substrate 144 may include any suitable material or materials. In some embodiments, the substrate 144 may include a semiconductor material. For example, the substrate 144 may include silicon (e.g., may be formed from a silicon wafer).

[0047] FIG. 5 illustrates a cross-sectional view of an assembly 202 subsequent to providing a quantum well stack 146 on the substrate 144 of the assembly 200 (FIG. 4). The quantum well stack 146 may include a quantum well layer (not shown) in which a 2DEG may form during operation of the quantum dot device 100. Various embodiments of the quantum well stack 146 are discussed below with reference to FIGS. 26-28.

[0048] FIG. 6 illustrates a cross-sectional view of an assembly 204 subsequent to forming fins 104 in the assembly 202 (FIG. 5). The fins 104 may extend from a base 102, and may be formed in the assembly 202 by patterning and then etching the assembly 202, as known in the art. For example, a combination of dry and wet etch chemistry may be used to form the fins 104, and the appropriate chemistry may depend on the materials included in the assembly 202, as known in the art. At least some of the substrate 144 may be included in the base 102, and at least some of the quantum well stack 146 may be included in the fins 104. In particular, the quantum well layer (not shown) of the quantum well stack 146 may be included in the fins 104. Example arrangements in which the quantum well stack 146 and the substrate 144 are differently included in the base 102 and the fins 104 are discussed below with reference to FIGS. 29-35.

[0049] FIG. 7 illustrates a cross-sectional view of an assembly 206 subsequent to providing an insulating material 128 to the assembly 204 (FIG. 6). Any suitable material may be used as the insulating material 128 to electrically insulate the fins 104 from each other. As noted above, in some embodiments, the insulating material 128 may be a dielectric material, such as silicon oxide.

[0050] FIG. 8 illustrates a cross-sectional view of an assembly 208 subsequent to planarizing the assembly 206 (FIG. 7) to remove the insulating material 128 above the fins 104. In some embodiments, the assembly 206 may be planarized using a chemical mechanical polishing (CMP) technique.

[0051] FIG. 9 is a perspective view of at least a portion of the assembly 208, showing the fins 104 extending from the base 102 and separated by the insulating material 128. The cross-sectional views of FIGS. 4-8 are taken parallel to the plane of the page of the perspective view of FIG. 9. FIG. 10 is another cross-sectional view of the assembly 208, taken along the dashed line along the fin 104-1 in FIG. 9. The cross-sectional views illustrated in FIGS. 11-25 are taken along the same cross-section as FIG. 10.

[0052] FIG. 11 is a cross-sectional view of an assembly 210 subsequent to forming a gate stack 174 on the fins 104 of the assembly 208 (FIGS. 8-10). The gate stack 174 may include the gate dielectric 114, the gate metal 110, and a hardmask 116. The hardmask 116 may be formed of an electrically insulating material, such as silicon nitride or carbon-doped nitride.

[0053] FIG. 12 is a cross-sectional view of an assembly 212 subsequent to patterning the hardmask 116 of the assembly 210 (FIG. 11). The pattern applied to the hardmask 116 may correspond to the locations for the gates 106, as discussed below. The hardmask 116 may be patterned by applying a resist, patterning the resist using lithography, and then etching the hardmask (using dry etching or any appropriate technique).

[0054] FIG. 13 is a cross-sectional view of an assembly 214 subsequent to etching the assembly 212 (FIG. 12) to remove the gate metal 110 that is not protected by the patterned hardmask 116 to form the gates 106. In some embodiments, as illustrated in FIG. 13, the gate dielectric 114 may remain after the gate metal 110 is etched away; in other embodiments, the gate dielectric 114 may also be etched during the etching of the gate metal 110. Examples of such embodiments are discussed below with reference to FIGS. 40-44.

[0055] FIG. 14 is a cross-sectional view of an assembly 216 subsequent to providing spacer material 132 on the assembly 214 (FIG. 13). The spacer material 132 may include any of the materials discussed above with reference to the spacers 134, for example, and may be deposited using any suitable technique. For example, the spacer material 132 may be a nitride material (e.g., silicon nitride) deposited by sputtering.

[0056] FIG. 15 is a cross-sectional view of an assembly 218 subsequent to etching the spacer material 132 of the assembly 216 (FIG. 14), leaving spacers 134 formed of the spacer material 132 on the sides of the gates 106 (e.g., on the sides of the hardmask 116 and the gate metal 110). The etching of the spacer material 132 may be an anisotropic etch, etching the spacer material 132 "downward" to remove the spacer material 132 on top of the gates 106 and in some of the area between the gates 106, while leaving the spacers 134 on the sides of the gates 106. In some embodiments, the anisotropic etch may be a dry etch.

[0057] FIG. 16 is a cross-sectional view of an assembly 220 subsequent to providing the gate metal 112 on the assembly 218 (FIG. 15). The gate metal 112 may fill the areas between adjacent ones of the gates 106, and may extend over the tops of the gates 106.

[0058] FIG. 17 is a cross-sectional view of an assembly 222 subsequent to planarizing the assembly 220 (FIG. 16) to remove the gate metal 112 above the gates 106. In some embodiments, the assembly 220 may be planarized using a CMP technique. Some of the remaining gate metal 112 may fill the areas between adjacent ones of the gates 106, while other portions 150 of the remaining gate metal 112 may be located "outside" of the gates 106.

[0059] FIG. 18 is a cross-sectional view of an assembly 224 subsequent to providing a hardmask 118 on the planarized surface of the assembly 222 (FIG. 17). The hardmask 118 may be formed of any of the materials discussed above with reference to the hardmask 116, for example.

[0060] FIG. 19 is a cross-sectional view of an assembly 226 subsequent to patterning the hardmask 118 of the assembly 224 (FIG. 18). The pattern applied to the hardmask 118 may extend over the hardmask 116 (and over the gate metal 110 of the gates 106, as well as over the locations for the gates 108 (as illustrated in FIG. 2). The hardmask 118 may be non-coplanar with the hardmask 116, as illustrated in FIG. 19. The hardmask 118 illustrated in FIG. 19 may thus be a common, continuous

portion of hardmask 118 that extends over all of the hardmask 116. Examples of embodiments in which the hardmask 118 is not disposed over the entirety of the hardmask 116 are discussed below with reference to FIGS. 36-38 and 45. The hardmask 118 may be patterned using any of the techniques discussed above with reference to the patterning of the hardmask 116, for example.

[0061] FIG. 20 is a cross-sectional view of an assembly 228 subsequent to etching the assembly 226 (FIG. 19) to remove the portions 150 that are not protected by the patterned hardmask 118 to form the gates 108. Portions of the hardmask 118 may remain on top of the hardmask 116, as shown. The operations performed on the assembly 226 may include removing any gate dielectric 114 that is "exposed" on the fin 104, as shown. The excess gate dielectric 114 may be removed using any suitable technique, such as chemical etching or silicon bombardment.

[0062] FIG. 21 is a cross-sectional view of an assembly 230 subsequent to doping the fins 104 of the assembly 228 (FIG. 20) to form doped regions 140 in the portions of the fins 104 "outside" of the gates 106/108. The type of dopant used to form the doped regions 140 may depend on the type of quantum dot desired, as discussed above. In some embodiments, the doping may be performed by ion implantation. For example, when the quantum dot 142 is to be an electron-type quantum dot 142, the doped regions 140 may be formed by ion implantation of phosphorous, arsenic, or another n-type material. When the quantum dot 142 is to be a hole-type quantum dot 142, the doped regions 140 may be formed by ion implantation of boron or another p-type material. An annealing process that activates the dopants and causes them to diffuse farther into the fins 104 may follow the ion implantation process. The depth of the doped regions 140 may take any suitable value. In some embodiments, the doped regions 140 may extend into the fin 104 to a depth 115 between 500 and 1000 Angstroms. When the quantum well stack 146 takes the form illustrated in FIG. 28 (and discussed below), for example, the doped region 140 may extend into the barrier layer 154-1.

[0063] The outer spacers 134 on the outer gates 106 may provide a doping boundary, limiting diffusion of the dopant from the doped regions 140 into the area under the gates 106/108. The outer gates 106 may serve as a mask for approximate self-alignment of the doped regions 140. As shown, the doped regions 140 may extend under the adjacent outer spacers 134. In some embodiments, the doped regions 140 may extend past the outer spacers 134 and under the gate metal 110 of the outer gates 106, may extend only to the boundary between the outer spacers 134 and the adjacent gate metal 110, or may terminate under the outer spacers 134 and not reach the boundary between the outer spacers 134 and the adjacent gate metal 110. Examples of such embodiments are discussed below with reference to FIGS. 46 and 47. The doping concentration of the doped regions 140 may, in some embodiments, be between $10^{17}/\text{cm}^3$ and $10^{20}/\text{cm}^3$.

[0064] FIG. 22 is a cross-sectional side view of an assembly 232 subsequent to providing a layer of nickel or other material 143 over the assembly 230 (FIG. 21). The nickel or other material 143 may be deposited on the assembly 230 using any suitable technique (e.g., a plating technique, chemical vapor deposition, or atomic layer deposition).

[0065] FIG. 23 is a cross-sectional side view of an assembly 234 subsequent to annealing the assembly 232 (FIG. 22) to cause the material 143 to interact with the doped regions 140 to form the interface material 141, then removing the unreacted material 143. When the doped regions 140 include silicon and the material 143 includes nickel, for example, the interface material 141 may be nickel silicide. Materials other than nickel may be deposited in the operations discussed above with reference to FIG. 22 in order to form other interface materials 141, including titanium, aluminum, molybdenum, cobalt, tungsten, or platinum, for example. More generally, the interface material 141 of the assembly 234 may include any of the materials discussed herein with reference to the interface material 141.

[0066] FIG. 24 is a cross-sectional view of an assembly 236 subsequent to providing an insulating material 130 on the assembly 234 (FIG. 23). The insulating material 130 may take any of the forms discussed above. For example, the insulating material 130 may be a dielectric material, such as silicon oxide. The insulating material 130 may be provided on the assembly 234 using any suitable technique, such as spin coating, chemical vapor deposition (CVD), or plasma-enhanced CVD (PECVD). In some embodiments, the insulating material 130 may be polished back after deposition, and before further processing.

[0067] FIG. 25 is a cross-sectional view of an assembly 238 subsequent to forming, in the assembly 236 (FIG. 24), conductive vias 120 through the insulating material 130 (and the hardmasks 116 and 118) to contact the gate metal 110 of the gates 106, conductive vias 122 through the insulating material 130 (and the hardmask 118) to contact the gate metal 112 of the gates 108, and conductive vias 136 through the insulating material 130 to contact the interface material 141 of the doped regions 140. Further conductive vias and/or lines may be formed on the assembly 238 using conventional interconnect techniques, if desired. The resulting assembly 238 may take the form of the quantum dot device 100 discussed above with reference to FIGS. 1-3. In some embodiments, the assembly 236 may be planarized to remove the hardmasks 116 and 118, then additional insulating material 130 may be provided on the planarized surface before forming the conductive vias 120, 122, and 136; in such an embodiment, the hardmasks 116 and 118 would not be present in the quantum dot device 100.

[0068] As discussed above, the base 102 and the fin 104 of a quantum dot device 100 may be formed from a substrate 144 and a quantum well stack 146 disposed on the substrate 144. The

quantum well stack 146 may include a quantum well layer in which a 2DEG may form during operation of the quantum dot device 100. The quantum well stack 146 may take any of a number of forms, several of which are illustrated in FIGS. 26-28. The various layers in the quantum well stacks 146 discussed below may be grown on the substrate 144 (e.g., using epitaxial processes).

[0069] FIG. 26 is a cross-sectional view of a quantum well stack 146 including only a quantum well layer 152. The quantum well layer 152 may be disposed on the substrate 144 (e.g., as discussed above with reference to FIG. 5), and may be formed of a material such that, during operation of the quantum dot device 100, a 2DEG may form in the quantum well layer 152 proximate to the upper surface of the quantum well layer 152. The gate dielectric 114 of the gates 106/108 may be disposed on the upper surface of the quantum well layer 152 (e.g., as discussed above with reference to FIG. 11). In some embodiments, the quantum well layer 152 of FIG. 26 may be formed of intrinsic silicon, and the gate dielectric 114 may be formed of silicon oxide; in such an arrangement, during use of the quantum dot device 100, a 2DEG may form in the intrinsic silicon at the interface between the intrinsic silicon and the silicon oxide. Embodiments in which the quantum well layer 152 of FIG. 26 is formed of intrinsic silicon may be particularly advantageous for electron-type quantum dot devices 100. In some embodiments, the quantum well layer 152 of FIG. 26 may be formed of intrinsic germanium, and the gate dielectric 114 may be formed of germanium oxide; in such an arrangement, during use of the quantum dot device 100, a 2DEG may form in the intrinsic germanium at the interface between the intrinsic germanium and the germanium oxide. Such embodiments may be particularly advantageous for hole-type quantum dot devices 100. In some embodiments, the quantum well layer 152 may be strained, while in other embodiments, the quantum well layer 152 may not be strained.

[0070] The thicknesses (i.e., z-heights) of the layers in the quantum well stack 146 of FIG. 26 may take any suitable values. For example, in some embodiments, the thickness of the quantum well layer 152 (e.g., intrinsic silicon) may be between 0.8 and 1.2 microns.

[0071] FIG. 27 is a cross-sectional view of a quantum well stack 146 including a quantum well layer 152 and a barrier layer 154. The quantum well stack 146 may be disposed on a substrate 144 (e.g., as discussed above with reference to FIG. 5) such that the barrier layer 154 is disposed between the quantum well layer 152 and the substrate 144. The barrier layer 154 may provide a potential barrier between the quantum well layer 152 and the substrate 144. As discussed above with reference to FIG. 26, the quantum well layer 152 of FIG. 27 may be formed of a material such that, during operation of the quantum dot device 100, a 2DEG may form in the quantum well layer 152 proximate to the upper surface of the quantum well layer 152. For example, in some embodiments in which the substrate 144 is formed of silicon, the quantum well layer 152 of FIG. 27 may be formed

of silicon, and the barrier layer 154 may be formed of silicon germanium. The germanium content of this silicon germanium may be 20-80% (e.g., 30%). In some embodiments in which the quantum well layer 152 is formed of germanium, the barrier layer 154 may be formed of silicon germanium (with a germanium content of 20-80% (e.g., 70%)). The thicknesses (i.e., z-heights) of the layers in the quantum well stack 146 of FIG. 27 may take any suitable values. For example, in some embodiments, the thickness of the barrier layer 154 (e.g., silicon germanium) may be between 0 and 400 nanometers. In some embodiments, the thickness of the quantum well layer 152 (e.g., silicon or germanium) may be between 5 and 30 nanometers.

[0072] FIG. 28 is a cross-sectional view of a quantum well stack 146 including a quantum well layer 152 and a barrier layer 154-1, as well as a buffer layer 176 and an additional barrier layer 154-2. The quantum well stack 146 may be disposed on the substrate 144 (e.g., as discussed above with reference to FIG. 5) such that the buffer layer 176 is disposed between the barrier layer 154-1 and the substrate 144. The buffer layer 176 may be formed of the same material as the barrier layer 154, and may be present to trap defects that form in this material as it is grown on the substrate 144. In some embodiments, the buffer layer 176 may be grown under different conditions (e.g., deposition temperature or growth rate) from the barrier layer 154-1. In particular, the barrier layer 154-1 may be grown under conditions that achieve fewer defects than the buffer layer 176. In some embodiments in which the buffer layer 176 includes silicon germanium, the silicon germanium of the buffer layer 176 may have a germanium content that varies from the substrate 144 to the barrier layer 154-1; for example, the silicon germanium of the buffer layer 176 may have a germanium content that varies from zero percent at the silicon substrate 144 to a nonzero percent (e.g., 30%) at the barrier layer 154-1. The thicknesses (i.e., z-heights) of the layers in the quantum well stack 146 of FIG. 28 may take any suitable values. For example, in some embodiments, the thickness of the buffer layer 176 (e.g., silicon germanium) may be between 0.3 and 4 microns (e.g., 0.3-2 microns, or 0.5 microns). In some embodiments, the thickness of the barrier layer 154-1 (e.g., silicon germanium) may be between 0 and 400 nanometers. In some embodiments, the thickness of the quantum well layer 152 (e.g., silicon or germanium) may be between 5 and 30 nanometers (e.g., 10 nanometers). The barrier layer 154-2, like the barrier layer 154-1, may provide a potential energy barrier around the quantum well layer 152, and may take the form of any of the embodiments of the barrier layer 154-1. In some embodiments, the thickness of the barrier layer 154-2 (e.g., silicon germanium) may be between 25 and 75 nanometers (e.g., 32 nanometers).

[0073] As discussed above with reference to FIG. 27, the quantum well layer 152 of FIG. 28 may be formed of a material such that, during operation of the quantum dot device 100, a 2DEG may form in the quantum well layer 152 proximate to the upper surface of the quantum well layer 152. For

example, in some embodiments in which the substrate 144 is formed of silicon, the quantum well layer 152 of FIG. 28 may be formed of silicon, and the barrier layer 154-1 and the buffer layer 176 may be formed of silicon germanium. In some such embodiments, the silicon germanium of the buffer layer 176 may have a germanium content that varies from the substrate 144 to the barrier layer 154-1; for example, the silicon germanium of the buffer layer 176 may have a germanium content that varies from zero percent at the silicon substrate 144 to a nonzero percent (e.g., 30%) at the barrier layer 154-1. The barrier layer 154-1 may in turn have a germanium content equal to the nonzero percent. In other embodiments, the buffer layer 176 may have a germanium content equal to the germanium content of the barrier layer 154-1 but may be thicker than the barrier layer 154-1 so as to absorb the defects that arise during growth.

[0074] In some embodiments, the quantum well layer 152 of FIG. 28 may be formed of germanium, and the buffer layer 176 and the barrier layer 154-1 may be formed of silicon germanium. In some such embodiments, the silicon germanium of the buffer layer 176 may have a germanium content that varies from the substrate 144 to the barrier layer 154-1; for example, the silicon germanium of the buffer layer 176 may have a germanium content that varies from zero percent at the substrate 144 to a nonzero percent (e.g., 70%) at the barrier layer 154-1. The barrier layer 154-1 may in turn have a germanium content equal to the nonzero percent. In other embodiments, the buffer layer 176 may have a germanium content equal to the germanium content of the barrier layer 154-1 but may be thicker than the barrier layer 154-1 so as to absorb the defects that arise during growth. In some embodiments of the quantum well stack 146 of FIG. 28, the buffer layer 176 and/or the barrier layer 154-2 may be omitted.

[0075] The substrate 144 and the quantum well stack 146 may be distributed between the base 102 and the fins 104 of the quantum dot device 100, as discussed above. This distribution may occur in any of a number of ways. For example, FIGS. 29-35 illustrate example base/fin arrangements 158 that may be used in a quantum dot device 100, in accordance with various embodiments.

[0076] In the base/fin arrangement 158 of FIG. 29, the quantum well stack 146 may be included in the fins 104, but not in the base 102. The substrate 144 may be included in the base 102, but not in the fins 104. When the base/fin arrangement 158 of FIG. 29 is used in the manufacturing operations discussed with reference to FIGS. 5-6, the fin etching may etch through the quantum well stack 146, and stop when the substrate 144 is reached.

[0077] In the base/fin arrangement 158 of FIG. 30, the quantum well stack 146 may be included in the fins 104, as well as in a portion of the base 102. A substrate 144 may be included in the base 102 as well, but not in the fins 104. When the base/fin arrangement 158 of FIG. 30 is used in the manufacturing operations discussed with reference to FIGS. 5-6, the fin etching may etch partially

through the quantum well stack 146, and stop before the substrate 144 is reached. FIG. 31 illustrates a particular embodiment of the base/fin arrangement 158 of FIG. 30. In the embodiment of FIG. 31, the quantum well stack 146 of FIG. 28 is used; the fins 104 include the barrier layer 154-1, the quantum well layer 152, and the barrier layer 154-2, while the base 102 includes the buffer layer 176 and the substrate 144.

[0078] In the base/fin arrangement 158 of FIG. 32, the quantum well stack 146 may be included in the fins 104, but not the base 102. The substrate 144 may be partially included in the fins 104, as well as in the base 102. When the base/fin arrangement 158 of FIG. 32 is used in the manufacturing operations discussed with reference to FIGS. 5-6, the fin etching may etch through the quantum well stack 146 and into the substrate 144 before stopping. FIG. 33 illustrates a particular embodiment of the base/fin arrangement 158 of FIG. 32. In the embodiment of FIG. 33, the quantum well stack 146 of FIG. 28 is used; the fins 104 include the quantum well stack 146 and a portion of the substrate 144, while the base 102 includes the remainder of the substrate 144.

[0079] Although the fins 104 have been illustrated in many of the preceding figures as substantially rectangular with parallel sidewalls, this is simply for ease of illustration, and the fins 104 may have any suitable shape (e.g., shape appropriate to the manufacturing processes used to form the fins 104). For example, as illustrated in the base/fin arrangement 158 of FIG. 34, in some embodiments, the fins 104 may be tapered. In some embodiments, the fins 104 may taper by 3-10 nanometers in x-width for every 100 nanometers in z-height (e.g., 5 nanometers in x-width for every 100 nanometers in z-height). When the fins 104 are tapered, the wider end of the fins 104 may be the end closest to the base 102, as illustrated in FIG. 34. FIG. 35 illustrates a particular embodiment of the base/fin arrangement 158 of FIG. 34. In FIG. 35, the quantum well stack 146 is included in the tapered fins 104 while a portion of the substrate 144 is included in the tapered fins and a portion of the substrate 144 provides the base 102.

[0080] In the embodiment of the quantum dot device 100 illustrated in FIG. 2, the z-height of the gate metal 112 of the gates 108 may be approximately equal to the sum of the z-height of the gate metal 110 and the z-height of the hardmask 116, as shown. Also in the embodiment of FIG. 2, the gate metal 112 of the gates 108 may not extend in the x-direction beyond the adjacent spacers 134. In other embodiments, the z-height of the gate metal 112 of the gates 108 may be greater than the sum of the z-height of the gate metal 110 and the z-height of the hardmask 116, and in some such embodiments, the gate metal 112 of the gates may extend beyond the spacers 134 in the x-direction. FIGS. 36-38 illustrate various example stages in the manufacture of alternative gate arrangements that may be included in a quantum dot device 100, in accordance with various embodiments.

[0081] FIG. 36 illustrates an assembly 242 subsequent to providing the gate metal 112 and a hardmask 118 on the assembly 218 (FIG. 15). The assembly 242 may be similar to the assembly 224 of FIG. 18 (and may be formed using any of the techniques discussed above with reference to FIGS. 16-18), but may include additional gate metal 112 between the hardmask 116 and the hardmask 118, of any desired thickness. In some embodiments, the gate metal 112 may be planarized prior to provision of the hardmask 118, but the hardmask 118 may still be spaced away from the hardmask 116 in the z-direction by the gate metal 112, as shown in FIG. 36.

[0082] FIG. 37 illustrates an assembly 244 subsequent to patterning the hardmask 118 of the assembly 242 (FIG. 36). The pattern applied to the hardmask 118 may include the locations for the gates 108, as discussed below. The hardmask 118 may be non-coplanar with the hardmask 116, as illustrated in FIG. 36, and may extend "over" at least a portion of the hardmask 116 (and thus over the gate metal 110 of the gates 106).

[0083] FIG. 38 illustrates an assembly 246 subsequent to etching the assembly 244 (FIG. 37) to remove the portions 150 that are not protected by the patterned hardmask 118 to form the gates 108. The gate metal 112 of the gates 106 may extend "over" the hardmask 116 of the gates 108, and may be electrically insulated from the gate metal 110 by the hardmask 116. In the embodiment illustrated in FIG. 38, the z-height of the gate metal 112 of the gates 108 may be greater than the sum of the z-height of the gate metal 110 and the z-height of the hardmask 116 of the gates 106. Additionally, the gate metal 112 of the gates 108 may extend beyond the spacers 134 in the x-direction, as shown. Further manufacturing operations may be performed on the assembly 246, as discussed above with reference to FIGS. 21-25.

[0084] As noted above, a single fin 104 may include multiple groups of gates 106/108, spaced apart along the fin by a doped region 140. FIG. 39 is a cross-sectional view of an example of such a quantum dot device 100 having multiple groups of gates 180 on a single fin 104, in accordance with various embodiments. Each of the groups 180 may include gates 106/108 (not labeled in FIG. 39 for ease of illustration) that may take the form of any of the embodiments of the gates 106/108 discussed herein. A doped region 140 (and its interface material 141) may be disposed between two adjacent groups 180 (labeled in FIG. 39 as groups 180-1 and 180-2), and may provide a common reservoir for both groups 180. In some embodiments, this "common" doped region 140 may be electrically contacted by a single conductive via 136. The particular number of gates 106/108 illustrated in FIG. 39, and the particular number of groups 180, is simply illustrative, and a fin 104 may include any suitable number of gates 106/108 arranged in any suitable number of groups 180.

[0085] As discussed above with reference to FIGS. 1-3, in some embodiments in which the gate dielectric 114 is not a layer shared commonly between the gates 108 and 106, but instead is

separately deposited on the fin 104 between the spacers 134, the gate dielectric 114 may extend at least partially up the sides of the spacers 134, and the gate metal 112 may extend between the portions of gate dielectric 114 on the spacers 134. FIGS. 40-44 illustrate various alternative stages in the manufacture of such an embodiment of a quantum dot device 100, in accordance with various embodiments. In particular, the operations illustrated in FIGS. 40-44 may take the place of the operations illustrated in FIGS. 13-15.

[0086] FIG. 40 is a cross-sectional view of an assembly 248 subsequent to etching the assembly 212 (FIG. 12) to remove the gate metal 110, and the gate dielectric 114 that is not protected by the patterned hardmask 116, to form the gates 106.

[0087] FIG. 41 is a cross-sectional view of an assembly 250 subsequent to providing spacer material 132 on the assembly 248 (FIG. 40). The deposition of the spacer material 132 may take any of the forms discussed above with reference to FIG. 14, for example.

[0088] FIG. 42 is a cross-sectional view of an assembly 252 subsequent to etching the spacer material 132 of the assembly 250 (FIG. 41), leaving spacers 134 formed of the spacer material 132 on the sides of the gates 106 (e.g., on the sides of the hardmask 116, the gate metal 110, and the gate dielectric 114). The etching of the spacer material 132 may take any of the forms discussed above with reference to FIG. 15, for example.

[0089] FIG. 43 is a cross-sectional view of an assembly 254 subsequent to providing a gate dielectric 114 on the fin 104 between the gates 106 of the assembly 252 (FIG. 42). In some embodiments, the gate dielectric 114 provided between the gates 106 of the assembly 252 may be formed by atomic layer deposition (ALD) and, as illustrated in FIG. 43, may cover the exposed fin 104 between the gates 106, and may extend onto the adjacent spacers 134.

[0090] FIG. 44 is a cross-sectional view of an assembly 256 subsequent to providing the gate metal 112 on the assembly 254 (FIG. 43). The gate metal 112 may fill the areas between adjacent ones of the gates 106, and may extend over the tops of the gates 106, as shown. The provision of the gate metal 112 may take any of the forms discussed above with reference to FIG. 16, for example. The assembly 256 may be further processed as discussed above with reference to FIGS. 17-25.

[0091] As discussed above with reference to FIG. 19, in some embodiments, the pattern applied to the hardmask 118 (used for patterning the gates 108) may not result in a common, continuous portion of hardmask 118 that extends over all of the hardmask 116. One such example was discussed above with reference to FIGS. 36-38, and another example of such an embodiment is illustrated in FIG. 45. In particular, FIG. 45 is a cross-sectional view of an assembly 258 in which the hardmask 118 of the assembly 224 (FIG. 18) is not patterned to extend over the gates 106, but instead is patterned so as not to extend over the gate metal 110. The assembly 258 may be further

processed as discussed above with reference to FIGS. 20-25 (e.g., etching away the excess portions 150, etc.). In some embodiments, the hardmasks 116 and 118 may remain in the quantum dot device 100 as part of the gates 106/108, while in other embodiments, the hardmasks 116 and 118 may be removed.

[0092] As discussed above with reference to FIGS. 2 and 21, the outer spacers 134 on the outer gates 106 may provide a doping boundary, limiting diffusion of the dopant from the doped regions 140 into the area under the gates 106/108. In some embodiments, the doped regions 140 may extend past the outer spacers 134 and under the outer gates 106. For example, as illustrated in FIG. 46, the doped region 140 may extend past the outer spacers 134 and under the outer gates 106 by a distance 182 between 0 and 10 nanometers. In some embodiments, the doped regions 140 may not extend past the outer spacers 134 toward the outer gates 106, but may instead "terminate" under the outer spacers 134. For example, as illustrated in FIG. 47, the doped regions 140 may be spaced away from the interface between the outer spacers 134 and the outer gates 106 by a distance 184 between 0 and 10 nanometers. The interface material 141 is omitted from FIGS. 46 and 47 for ease of illustration.

[0093] In some of the embodiments discussed above with reference to FIG. 21, the doped regions 140 may be provided in a single doping operation. In other embodiments, the doped regions 140 may include multiple subregions formed in multiple doping operations. For example, FIG. 48 illustrates an assembly 260 subsequent to performing two doping operations on the assembly 228 (FIG. 20) to form doped regions 140 with two subregions: a shallow doped subregion 140A and a deeper doped subregion 140B. In some embodiments, the shallow doped subregion 140A may provide a "gentler" carrier gradient closer to the gates 106/108, and may reduce the disruption of the potential energy landscape under the gates 106/108 (caused by the presence of the doped regions 140) relative to embodiments in which a deep, heavily doped region 140 is located very close to the gates 106/108.

[0094] The shallow doped subregion 140A may be referred to as a "tip," and may have a lower doping concentration than the deeper doped subregion 140B. The deeper doped subregion 140B may be referred to as a "bulk" doped region. In some embodiments, the shallow doped subregions 140A may extend into the fin 104 to a depth 115A between 100 and 200 Angstroms. In some embodiments, the deeper doped subregions 140B may extend into the fin 104 to a depth 115B between 500 and 1000 Angstroms. In some embodiments, the doping concentration of the shallow doped subregion 140A may be between $10^{17}/\text{cm}^3$ and $10^{20}/\text{cm}^3$. In some embodiments, the doping concentration of the deeper doped subregion 140B may be between $10^{18}/\text{cm}^3$ and greater than $10^{20}/\text{cm}^3$ (e.g., $5 \times 10^{20}/\text{cm}^3$). In some embodiments, the shallow doped subregions 140A may extend

under the outer spacers 134, and may take any of the forms discussed above with reference to FIGS. 46 and 47 (e.g., including the distances 182 and 184). The materials used in the doped subregions 140A and 140B may include any of the materials discussed herein with reference to the doped regions 140. Further processing may be performed on the assembly 260 as discussed above with reference to FIGS. 22-25 (or any other suitable embodiments disclosed herein, such as those discussed with reference to FIGS. 40-44).

[0095] Although two doped subregions 140A and 140B are illustrated in FIG. 48, more than two doped subregions may be included in various ones of the embodiments disclosed herein. For example, three or more doped subregions 140 may be used, with each doped subregion representing a deeper doping than a previous subregion (and/or a higher doping concentration than a previous subregion) to achieve any desired doping gradient. Additionally, any of the embodiments discussed herein with reference to the doped region 140 may include a doped region 140 with multiple subregions (even if a single doped region 140 is illustrated in the accompanying figures).

[0096] The embodiment illustrated in FIGS. 1-3 and 13-25 depicts all of the gates 106 as having substantially the same length 168 along the fin 104. This need not be the case, and in some embodiments, different ones of the gates 106 may have different lengths along the fin 104. In some such embodiments, the outer gates 106 in an array of gates 106/108 may be wider than the inner gates 106 in the array. For example, FIG. 49 illustrates an assembly 262 in which a single inner gate 106 has a length 168 (which may take any of the forms discussed above) and the outer gates 106 may have a length 111 greater than the length 168. The doped regions 140 may be disposed at least in part outside the footprint of the gates 106/108. The greater length of the outer gates 106 relative to the inner gates 106 (and, in some embodiments, the gates 108) may help to reduce the disruption to the potential energy landscape under the gates 106/108 caused by the doped regions 140 by spatially separating the doped regions 140 from the areas under the gates 106/108 in which quantum dots may form. In some embodiments, the length 168 may take any of the forms discussed above (e.g., between 20 and 40 nanometers), and the length 111 may be between 100 nanometers and 10 microns (e.g., between 0.5 microns and 1 micron). The assembly 262 of FIG. 49 may be formed using the techniques discussed above with reference to FIGS. 4-21, but the hardmask 116 may be patterned (discussed above with reference to the assembly 212 of FIG. 12) so that the outer portions of the gate metal 110 are wider than the inner portions of the gate metal 110, and thus that the outer gates 106 are wider than the inner gates 106. Further processing may be performed on the assembly 262 as discussed above with reference to FIGS. 22-25 (or any other suitable embodiments disclosed herein, such as those discussed with reference to FIGS. 40-44).

[0097] The embodiment illustrated in FIGS. 1-3 and 13-25 depicts all of the spacers 134 as having substantially the same thickness 172 along the fin 104. This need not be the case, and in some embodiments, different ones of the spacers 134 may have different thicknesses along the fin 104. In some such embodiments, the outer spacers 134 in and around an array of gates 106/108 may be wider than the inner spacers 134 (e.g., the spacers between adjacent ones of the gates 106 and 108). For example, FIG. 50 illustrates an assembly 264 in which the inner spacers 134 have thicknesses 172 (which may take any of the forms discussed above) and the outer spacers 134 may have thicknesses 135 greater than the thickness 172. The doped regions 140 may be disposed at least in part outside the footprint of the gates 106/108, and may extend under the outer spacers 134. The greater thickness of the outer spacers 134 relative to the inner spacers 134 may help to reduce the disruption to the potential energy landscape under the gates 106/108 caused by the doped regions 140 by spatially separating the doped regions 140 from the areas under the gates 106/108 in which quantum dots may form. In some embodiments, the thickness 172 may take any of the forms discussed above (e.g., between 1 and 10 nanometers), and the thickness 135 may be between 5 and 50 nanometers (e.g., between 30 and 40 nanometers).

[0098] The assembly 264 of FIG. 50 may be formed using any suitable techniques. FIGS. 51-56 illustrate various alternative stages in the manufacture of such an embodiment of a quantum dot device 100, in accordance with various embodiments. In particular, the operations illustrated in FIGS. 51-56 may take the place of the operations illustrated in FIGS. 12-15.

[0099] In particular, FIG. 51 is a cross-sectional view of an assembly 266 subsequent to patterning the hardmask 116 and etching the gate metal 110 of the assembly 210 (FIG. 11). The patterning of the hardmask 116 and the removal of the excess gate metal 110 may be performed using any of the techniques discussed above with reference to FIGS. 12 and 13, for example. Instead of patterning the gate metal 110 into different ones of the gates 106 (as discussed above with reference to FIGS. 12 and 13), in the assembly 266, the gate metal 110 is patterned to define the outer edges of the gate metal 110. In some embodiments, as illustrated in FIG. 51, the gate dielectric 114 may remain after the gate metal 110 is etched away; in other embodiments, the gate dielectric 114 may also be etched during the etching of the gate metal 110 (e.g., as discussed above with reference to FIGS. 40-44).

[0100] FIG. 52 is a cross-sectional view of an assembly 268 subsequent to providing spacer material 132 on the assembly 266 (FIG. 51). The provision of the spacer material 132 may be performed using any of the techniques discussed above with reference to FIG. 14, for example. In some embodiments, the thickness of the spacer material 132 in the assembly 268 may be greater than the thickness of the spacer material 132 discussed above with reference to the assembly 216 (FIG. 14).

[0101] FIG. 53 is a cross-sectional view of an assembly 270 subsequent to etching the spacer material 132 of the assembly 268 (FIG. 52), leaving spacer material 132 on the outer sides of the hardmask 116 and the gate metal 110. The etching of the spacer material 132 may be performed in accordance with any of the techniques discussed above with reference to FIG. 15, for example.

[0102] FIG. 54 is a cross-sectional view of an assembly 272 subsequent to patterning the hardmask 116 and etching the gate metal 110 of the assembly 270 (FIG. 53). In the manufacturing process discussed with reference to FIGS. 51-56, the hardmask 116 and the gate metal 110 may thus be patterned twice: once as discussed above with reference to the assembly 266 (FIG. 51) and once as discussed with reference to the assembly 272 (FIG. 54). The patterning of the hardmask 116 and the removal of the excess gate metal 110 may be performed using any of the techniques discussed above with reference to FIGS. 12 and 13, for example. The pattern applied to the hardmask 116 may correspond to the locations for the gates 106, as discussed above.

[0103] FIG. 55 is a cross-sectional view of an assembly 274 subsequent to providing additional spacer material 132 on the assembly 272 (FIG. 54). The additional spacer material 132 may be provided on the hardmask 116, the exposed sides of the gate metal 110, the exposed gate dielectric 114, and the previously deposited spacer material 132. The provision of the spacer material 132 may be performed using any of the techniques discussed above with reference to FIG. 14, for example. In some embodiments, the thickness of the spacer material 132 in the assembly 274 may be less than the thickness of the spacer material 132 discussed above with reference to the assembly 268 (FIG. 52).

[0104] FIG. 56 is a cross-sectional view of an assembly 276 subsequent to etching the spacer material 132 of the assembly 274 (FIG. 55), leaving spacers 134 formed of the spacer material 132 on the sides of the gates 106 (e.g., on the sides of the hardmask 116 and the gate metal 110). As shown in FIG. 56, the outer spacers 134 are thicker than the inner spacers 134; the dimensions of these spacers 134 may take the form of any of the embodiments discussed above with reference to FIG. 50, for example. The etching of the spacer material 132 may be performed in accordance with any of the techniques discussed above with reference to FIG. 15, for example. Further processing may be performed on the assembly 276 as discussed above with reference to FIGS. 22-25 (or any other suitable embodiments disclosed herein, such as those discussed with reference to FIGS. 40-44) to form the assembly 264 (FIG. 50) or another embodiment.

[0105] As noted above, any suitable techniques may be used to manufacture the quantum dot devices 100 disclosed herein. FIG. 57 is a flow diagram of an illustrative method 1000 of manufacturing a quantum dot device, in accordance with various embodiments. Although the operations discussed below with reference to the method 1000 are illustrated in a particular order

and depicted once each, these operations may be repeated or performed in a different order (e.g., in parallel), as suitable. Additionally, various operations may be omitted, as suitable. Various operations of the method 1000 may be illustrated with reference to one or more of the embodiments discussed above, but the method 1000 may be used to manufacture any suitable quantum dot device (including any suitable ones of the embodiments disclosed herein).

[0106] At 1002, fins may be formed. The fins may have a quantum well stack disposed therein, and the quantum well stack may include a quantum well layer. For example, fins 104 may be formed that include a quantum well stack 146 with a quantum well layer 152 (e.g., as discussed above with reference to FIGS. 4-6 and 26-35).

[0107] At 1004, an insulating material may be provided between the fins. For example, the insulating material 128 may be provided between the fins 104 (e.g., as discussed above with reference to FIG. 7).

[0108] At 1006, gates may be formed on the fins. For example, multiple gates 106 may be formed on the fins 104 (e.g., as discussed above with reference to FIGS. 11-13 and 40).

[0109] At 1008, the fins may be doped to form doped regions. For example, the fins 104 may be doped to form the doped regions 140 (e.g., as discussed above with reference to FIGS. 21 and 46-50).

[0110] A number of techniques are disclosed herein for operating a quantum dot device 100. FIGS. 58-59 are flow diagrams of particular illustrative methods 1020 and 1040, respectively, of operating a quantum dot device, in accordance with various embodiments. Although the operations discussed below with reference to the methods 1020 and 1040 are illustrated in a particular order and depicted once each, these operations may be repeated or performed in a different order (e.g., in parallel), as suitable. Additionally, various operations may be omitted, as suitable. Various operations of the methods 1020 and 1040 may be illustrated with reference to one or more of the embodiments discussed above, but the methods 1020 and 1040 may be used to operate any suitable quantum dot device (including any suitable ones of the embodiments disclosed herein).

[0111] Turning to the method 1020 of FIG. 58, at 1022, one or more voltages may be applied to one or more gates on a first fin to cause a first quantum dot to form in the first fin. The first fin may extend away from a base, and may include a doped region to provide carriers for quantum dot formation. For example, one or more voltages may be applied to the gates 106/108 on a fin 104-1 (extending away from the base 102) to cause at least one quantum dot 142 to form in the fin 104-1. A doped region 140 may be included in the fin 104 to provide carriers for formation of the quantum dot 142.

[0112] At 1024, one or more voltages may be applied to one or more gates on a second fin to cause a second quantum dot to form in the second fin. The second fin may extend away from the base, and may include a doped region to provide carriers for quantum dot formation. An insulating material may be disposed between the first and second fins. For example, one or more voltages may be applied to the gates 106/108 on a fin 104-2 (extending away from the base 102 and spaced apart from the fin 104-1 by the insulating material 128) to cause at least one quantum dot 142 to form in the fin 104-2.

[0113] At 1026, a quantum state of the first quantum dot may be sensed with the second quantum dot. For example, a quantum dot 142 in the fin 104-2 (the "read" fin) may sense the quantum state of a quantum dot 142 in the fin 104-1 (the "active" fin).

[0114] Turning to the method 1040 of FIG. 59, at 1042, a voltage may be applied to a first gate disposed on a fin to cause a first quantum dot to form in a first quantum well in the fin under the first gate. The fin may extend away from a base, and an insulating material may be disposed on side faces of the fin. The fin may include a doped region to provide carriers for quantum dot formation. For example, a voltage may be applied to the gate 108-1 disposed on a fin 104 to cause a first quantum dot 142 to form in the quantum well layer 152 in the fin 104 under the gate 108-1. The fin 104 may extend away from the base 102, the fin 104 may include a doped region 140, and the insulating material 128 may be disposed on side faces of the fin 104.

[0115] At 1044, a voltage may be applied to a second gate disposed on the fin to cause a second quantum dot to form in a second quantum well in the fin under the second gate. For example, a voltage may be applied to the gate 108-2 disposed on the fin 104 to cause a second quantum dot 142 to form in the quantum well layer 152 in the fin 104 under the gate 108-2.

[0116] At 1046, a voltage may be applied to a third gate disposed on the fin to (1) cause a third quantum dot to form in a third quantum well in the fin under the third gate or (2) provide a potential barrier between the first quantum well and the second quantum well. For example, a voltage may be applied to the gate 106-2 to (1) cause a third quantum dot 142 to form in the quantum well layer 152 in the fin 104 (e.g., when the gate 106-2 acts as a "plunger" gate) or (2) provide a potential barrier between the first quantum well (under the gate 108-1) and the second quantum well (under the gate 108-2) (e.g., when the gate 106-2 acts as a "barrier" gate).

[0117] FIG. 60 is a block diagram of an example quantum computing device 2000 that may include any of the quantum dot devices disclosed herein. A number of components are illustrated in FIG. 60 as included in the quantum computing device 2000, but any one or more of these components may be omitted or duplicated, as suitable for the application. In some embodiments, some or all of the components included in the quantum computing device 2000 may be attached to one or more

printed circuit boards (e.g., a motherboard). In some embodiments, various ones of these components may be fabricated onto a single system-on-a-chip (SoC) die. Additionally, in various embodiments, the quantum computing device 2000 may not include one or more of the components illustrated in FIG. 60, but the quantum computing device 2000 may include interface circuitry for coupling to the one or more components. For example, the quantum computing device 2000 may not include a display device 2006, but may include display device interface circuitry (e.g., a connector and driver circuitry) to which a display device 2006 may be coupled. In another set of examples, the quantum computing device 2000 may not include an audio input device 2024 or an audio output device 2008, but may include audio input or output device interface circuitry (e.g., connectors and supporting circuitry) to which an audio input device 2024 or audio output device 2008 may be coupled.

[0118] The quantum computing device 2000 may include a processing device 2002 (e.g., one or more processing devices). As used herein, the term "processing device" or "processor" may refer to any device or portion of a device that processes electronic data from registers and/or memory to transform that electronic data into other electronic data that may be stored in registers and/or memory. The processing device 2002 may include a quantum processing device 2026 (e.g., one or more quantum processing devices), and a non-quantum processing device 2028 (e.g., one or more non-quantum processing devices). The quantum processing device 2026 may include one or more of the quantum dot devices 100 disclosed herein, and may perform data processing by performing operations on the quantum dots that may be generated in the quantum dot devices 100, and monitoring the result of those operations. For example, as discussed above, different quantum dots may be allowed to interact, the quantum states of different quantum dots may be set or transformed, and the quantum states of quantum dots may be read (e.g., by another quantum dot). The quantum processing device 2026 may be a universal quantum processor, or specialized quantum processor configured to run one or more particular quantum algorithms. In some embodiments, the quantum processing device 2026 may execute algorithms that are particularly suitable for quantum computers, such as cryptographic algorithms that utilize prime factorization, encryption/decryption, algorithms to optimize chemical reactions, algorithms to model protein folding, etc. The quantum processing device 2026 may also include support circuitry to support the processing capability of the quantum processing device 2026, such as input/output channels, multiplexers, signal mixers, quantum amplifiers, and analog-to-digital converters.

[0119] As noted above, the processing device 2002 may include a non-quantum processing device 2028. In some embodiments, the non-quantum processing device 2028 may provide peripheral logic to support the operation of the quantum processing device 2026. For example, the non-quantum

processing device 2028 may control the performance of a read operation, control the performance of a write operation, control the clearing of quantum bits, etc. The non-quantum processing device 2028 may also perform conventional computing functions to supplement the computing functions provided by the quantum processing device 2026. For example, the non-quantum processing device 2028 may interface with one or more of the other components of the quantum computing device 2000 (e.g., the communication chip 2012 discussed below, the display device 2006 discussed below, etc.) in a conventional manner, and may serve as an interface between the quantum processing device 2026 and conventional components. The non-quantum processing device 2028 may include one or more digital signal processors (DSPs), application-specific integrated circuits (ASICs), central processing units (CPUs), graphics processing units (GPUs), cryptoprocessors (specialized processors that execute cryptographic algorithms within hardware), server processors, or any other suitable processing devices.

[0120] The quantum computing device 2000 may include a memory 2004, which may itself include one or more memory devices such as volatile memory (e.g., dynamic random access memory (DRAM)), nonvolatile memory (e.g., read-only memory (ROM)), flash memory, solid state memory, and/or a hard drive. In some embodiments, the states of qubits in the quantum processing device 2026 may be read and stored in the memory 2004. In some embodiments, the memory 2004 may include memory that shares a die with the non-quantum processing device 2028. This memory may be used as cache memory and may include embedded dynamic random access memory (eDRAM) or spin transfer torque magnetic random-access memory (STT-MRAM).

[0121] The quantum computing device 2000 may include a cooling apparatus 2030. The cooling apparatus 2030 may maintain the quantum processing device 2026 at a predetermined low temperature during operation to reduce the effects of scattering in the quantum processing device 2026. This predetermined low temperature may vary depending on the setting; in some embodiments, the temperature may be 5 degrees Kelvin or less. In some embodiments, the non-quantum processing device 2028 (and various other components of the quantum computing device 2000) may not be cooled by the cooling apparatus 2030, and may instead operate at room temperature. The cooling apparatus 2030 may be, for example, a dilution refrigerator, a helium-3 refrigerator, or a liquid helium refrigerator.

[0122] In some embodiments, the quantum computing device 2000 may include a communication chip 2012 (e.g., one or more communication chips). For example, the communication chip 2012 may be configured for managing wireless communications for the transfer of data to and from the quantum computing device 2000. The term "wireless" and its derivatives may be used to describe circuits, devices, systems, methods, techniques, communications channels, etc., that may

communicate data through the use of modulated electromagnetic radiation through a nonsolid medium. The term does not imply that the associated devices do not contain any wires, although in some embodiments they might not.

[0123] The communication chip 2012 may implement any of a number of wireless standards or protocols, including but not limited to Institute for Electrical and Electronic Engineers (IEEE) standards including Wi-Fi (IEEE 1402.11 family), IEEE 1402.16 standards (e.g., IEEE 1402.16-2005 Amendment), Long-Term Evolution (LTE) project along with any amendments, updates, and/or revisions (e.g., advanced LTE project, ultramobile broadband (UMB) project (also referred to as "3GPP2"), etc.). IEEE 1402.16 compatible Broadband Wireless Access (BWA) networks are generally referred to as WiMAX networks, an acronym that stands for Worldwide Interoperability for Microwave Access, which is a certification mark for products that pass conformity and interoperability tests for the IEEE 1402.16 standards. The communication chip 2012 may operate in accordance with a Global System for Mobile Communication (GSM), General Packet Radio Service (GPRS), Universal Mobile Telecommunications System (UMTS), High Speed Packet Access (HSPA), Evolved HSPA (E-HSPA), or LTE network. The communication chip 2012 may operate in accordance with Enhanced Data for GSM Evolution (EDGE), GSM EDGE Radio Access Network (GERAN), Universal Terrestrial Radio Access Network (UTRAN), or Evolved UTRAN (E-UTRAN). The communication chip 2012 may operate in accordance with Code Division Multiple Access (CDMA), Time Division Multiple Access (TDMA), Digital Enhanced Cordless Telecommunications (DECT), Evolution-Data Optimized (EV-DO), and derivatives thereof, as well as any other wireless protocols that are designated as 3G, 4G, 5G, and beyond. The communication chip 2012 may operate in accordance with other wireless protocols in other embodiments. The quantum computing device 2000 may include an antenna 2022 to facilitate wireless communications and/or to receive other wireless communications (such as AM or FM radio transmissions).

[0124] In some embodiments, the communication chip 2012 may manage wired communications, such as electrical, optical, or any other suitable communication protocols (e.g., the Ethernet). As noted above, the communication chip 2012 may include multiple communication chips. For instance, a first communication chip 2012 may be dedicated to shorter-range wireless communications such as Wi-Fi or Bluetooth, and a second communication chip 2012 may be dedicated to longer-range wireless communications such as GPS, EDGE, GPRS, CDMA, WiMAX, LTE, EV-DO, or others. In some embodiments, a first communication chip 2012 may be dedicated to wireless communications, and a second communication chip 2012 may be dedicated to wired communications.

[0125] The quantum computing device 2000 may include battery/power circuitry 2014. The battery/power circuitry 2014 may include one or more energy storage devices (e.g., batteries or capacitors) and/or circuitry for coupling components of the quantum computing device 2000 to an energy source separate from the quantum computing device 2000 (e.g., AC line power).

[0126] The quantum computing device 2000 may include a display device 2006 (or corresponding interface circuitry, as discussed above). The display device 2006 may include any visual indicators, such as a heads-up display, a computer monitor, a projector, a touchscreen display, a liquid crystal display (LCD), a light-emitting diode display, or a flat panel display, for example.

[0127] The quantum computing device 2000 may include an audio output device 2008 (or corresponding interface circuitry, as discussed above). The audio output device 2008 may include any device that generates an audible indicator, such as speakers, headsets, or earbuds, for example.

[0128] The quantum computing device 2000 may include an audio input device 2024 (or corresponding interface circuitry, as discussed above). The audio input device 2024 may include any device that generates a signal representative of a sound, such as microphones, microphone arrays, or digital instruments (e.g., instruments having a musical instrument digital interface (MIDI) output).

[0129] The quantum computing device 2000 may include a global positioning system (GPS) device 2018 (or corresponding interface circuitry, as discussed above). The GPS device 2018 may be in communication with a satellite-based system and may receive a location of the quantum computing device 2000, as known in the art.

[0130] The quantum computing device 2000 may include an other output device 2010 (or corresponding interface circuitry, as discussed above). Examples of the other output device 2010 may include an audio codec, a video codec, a printer, a wired or wireless transmitter for providing information to other devices, or an additional storage device.

[0131] The quantum computing device 2000 may include an other input device 2020 (or corresponding interface circuitry, as discussed above). Examples of the other input device 2020 may include an accelerometer, a gyroscope, a compass, an image capture device, a keyboard, a cursor control device such as a mouse, a stylus, a touchpad, a bar code reader, a Quick Response (QR) code reader, any sensor, or a radio frequency identification (RFID) reader.

[0132] The quantum computing device 2000, or a subset of its components, may have any appropriate form factor, such as a hand-held or mobile computing device (e.g., a cell phone, a smart phone, a mobile internet device, a music player, a tablet computer, a laptop computer, a netbook computer, an ultrabook computer, a personal digital assistant (PDA), an ultramobile personal computer, etc.), a desktop computing device, a server or other networked computing component, a

printer, a scanner, a monitor, a set-top box, an entertainment control unit, a vehicle control unit, a digital camera, a digital video recorder, or a wearable computing device.

[0133] The following paragraphs provide various examples of the embodiments disclosed herein.

[0134] Example 1 is a quantum dot device, including: a base; a fin extending away from the base, wherein the fin includes a quantum well layer; a plurality of gates disposed on the fin; and doped regions in the fin, wherein the doped regions are at least partially disposed outside a footprint of the plurality of gates.

[0135] Example 2 may include the subject matter of Example 1, and may further specify that a doped region includes a tip region and a bulk region.

[0136] Example 3 may include the subject matter of Example 2, and may further specify that the tip region has a depth between 100 and 200 Angstroms.

[0137] Example 4 may include the subject matter of any of Examples 2-3, and may further specify that the bulk region has a depth between 50 and 1,000 Angstroms.

[0138] Example 5 may include the subject matter of any of Examples 2-4, and may further specify that the tip region has a doping concentration that is lower than a doping concentration of the bulk region.

[0139] Example 6 may include the subject matter of Example 5, and may further specify that the tip region has a doping concentration between $10^{17}/\text{cm}^3$ and $10^{20}/\text{cm}^3$.

[0140] Example 7 may include the subject matter of any of Examples 5-6, and may further specify that the bulk region has a doping concentration greater than $10^{18}/\text{cm}^3$.

[0141] Example 8 may include the subject matter of any of Examples 1-7, and may further specify that the plurality of gates includes two outer gates and at least one inner gate, and wherein a maximum length of the outer gates, along the fin, is greater than a maximum length, along the fin, of at least one inner gate.

[0142] Example 9 may include the subject matter of Example 8, and may further specify that the maximum length of the at least one inner gate is between 20 and 40 nanometers.

[0143] Example 10 may include the subject matter of any of Examples 8-9, and may further specify that the maximum length of the outer gates is between 100 nanometers and 1 micron.

[0144] Example 11 may include the subject matter of any of Examples 1-10, and may further include: inner spacers disposed between the gates; and outer spacers disposed in contact with outer ones of the plurality of gates and outside the footprint of the plurality of gates.

[0145] Example 12 may include the subject matter of Example 11, and may further specify that a maximum thickness of the outer spacers, along the fin, is greater than a maximum thickness, along the fin, of the inner spacers.

[0146] Example 13 may include the subject matter of Example 12, and may further specify that the maximum thickness of the inner spacers is between 1 and 10 nanometers.

[0147] Example 14 may include the subject matter of any of Examples 12-13, and may further specify that the maximum thickness of the outer spacers is between 5 and 50 nanometers.

[0148] Example 15 may include the subject matter of any of Examples 1-14, and may further specify that the fin is a first fin, the plurality of gates is a first plurality of gates, and the quantum dot device further includes: a second fin extending away from the base, wherein the second fin includes a quantum well layer; and a second plurality of gates disposed on the second fin.

[0149] Example 16 may include the subject matter of Example 15, and may further include an insulating material disposed between the first and second fins.

[0150] Example 17 may include the subject matter of any of Examples 1-15, and may further specify that the fin has a tapered shape that is widest proximate to the base.

[0151] Example 18 is a method of operating a quantum dot device, including: applying one or more voltages to one or more gates on a first fin to cause a first quantum dot to form in the first fin, wherein the first fin extends away from a base and the first fin includes a doped region to provide carriers for quantum dot formation; applying one or more voltages to one or more gates on a second fin to cause a second quantum dot to form in the second fin, wherein the second fin extends away from the base and the second fin includes a doped region to provide carriers for quantum dot formation; and sensing a quantum state of the first quantum dot with the second quantum dot.

[0152] Example 19 may include the subject matter of Example 18, and may further specify that applying the one or more voltages to the one or more gates on the first fin comprises applying a voltage to a first gate of the one or more gates to cause the first quantum dot to form in the first fin under the first gate.

[0153] Example 20 may include the subject matter of any of Examples 18-19, and may further include: applying the one or more voltages to the one or more gates on the first fin to cause a third quantum dot to form in the first fin; and prior to sensing the quantum state of the first quantum dot with the second quantum dot, allowing the first and third quantum dots to interact.

[0154] Example 21 may include the subject matter of Example 20, and may further specify that allowing the first and third quantum dots to interact comprises applying the one or more voltages to the one or more gates on the first fin to control interaction between the first and third quantum dots.

[0155] Example 22 is a method of manufacturing a quantum dot device, including: forming fins having a quantum well stack disposed therein, wherein the quantum well stack includes a quantum

well layer; providing an insulating material between the fins; forming gates on the fins; and doping the fins to form doped regions.

[0156] Example 23 may include the subject matter of Example 22, and may further specify that doping the fins includes performing ion implantation.

[0157] Example 24 may include the subject matter of any of Examples 22-23, and may further specify that doping the fins includes providing an n-type dopant.

[0158] Example 25 may include the subject matter of any of Examples 22-24, and may further specify that doping the fins includes: performing a first round of doping to form a shallow doped region; and performing a second round of doping to form a deeper doped region.

[0159] Example 26 may include the subject matter of any of Examples 22-25, and may further specify that forming the gates on the fins includes forming two outer gates and at least one inner gate, wherein the outer gates have a minimum length, along the fin, greater than a minimum length, along the fin, of the at least one inner gate.

[0160] Example 27 may include the subject matter of any of Examples 22-26, and may further specify that forming the gates on the fins includes: forming two outer gates and at least one inner gate; providing first spacer material between the gates; and providing second spacer material on outside faces of the outer gates; wherein the second spacer material has a thickness, along the fin, greater than a thickness of the first spacer material.

[0161] Example 28 is a quantum computing device, including: a quantum processing device, wherein the quantum processing device includes a first fin in parallel with a second fin, an insulating material disposed between the first fin and the second fin, an active quantum well layer in the first fin, and a read quantum well layer in the second fin, wherein each fin includes a doped region to provide carriers to the quantum well layers; a non-quantum processing device, coupled to the quantum processing device, to control voltages applied to gates on the first and second fin; and a memory device to store data generated by the read quantum well layer during operation of the quantum processing device.

[0162] Example 29 may include the subject matter of Example 28 and may further include a cooling apparatus to maintain a temperature of the quantum processing device below 5 degrees Kelvin.

[0163] Example 30 may include the subject matter of any of Examples 28-29, and may further specify that the memory device is to store instructions for a quantum computing algorithm to be executed by the quantum processing device.

Claims:

1. A quantum dot device, comprising:
a base;
a fin extending away from the base, wherein the fin includes a quantum well layer;
a plurality of gates disposed on the fin; and
doped regions in the fin, wherein the doped regions are at least partially disposed outside a footprint of the plurality of gates.
2. The quantum dot device of claim 1, wherein a doped region includes a tip region and a bulk region.
3. The quantum dot device of claim 2, wherein the tip region has a depth between 100 and 200 Angstroms.
4. The quantum dot device of claim 2, wherein the bulk region has a depth between 50 and 1,000 Angstroms.
5. The quantum dot device of claim 2, wherein the tip region has a doping concentration that is lower than a doping concentration of the bulk region.
6. The quantum dot device of claim 5, wherein the tip region has a doping concentration between $10^{17}/\text{cm}^3$ and $10^{20}/\text{cm}^3$.
7. The quantum dot device of claim 5, wherein the bulk region has a doping concentration greater than $10^{18}/\text{cm}^3$.
8. The quantum dot device of any of claims 1-7, wherein the plurality of gates includes two outer gates and at least one inner gate, and wherein a maximum length of the outer gates, along the fin, is greater than a maximum length, along the fin, of at least one inner gate.
9. The quantum dot device of claim 8, wherein the maximum length of the outer gates is between 100 nanometers and 1 micron.
10. The quantum dot device of any of claims 1-7, further comprising:
inner spacers disposed between the gates; and
outer spacers disposed in contact with outer ones of the plurality of gates and outside the footprint of the plurality of gates.
11. The quantum dot device of claim 10, wherein a maximum thickness of the outer spacers, along the fin, is greater than a maximum thickness, along the fin, of the inner spacers.
12. The quantum dot device of any of claims 1-7, wherein the fin is a first fin, the plurality of gates is a first plurality of gates, and the quantum dot device further comprises:
a second fin extending away from the base, wherein the second fin includes a quantum well layer;
and

a second plurality of gates disposed on the second fin.

13. The quantum dot device of claim 12, further comprising:

an insulating material disposed between the first and second fins.

14. The quantum dot device of any of claims 1-7, wherein the fin has a tapered shape that is widest proximate to the base.

15. A method of operating a quantum dot device, comprising:

applying one or more voltages to one or more gates on a first fin to cause a first quantum dot to form in the first fin, wherein the first fin extends away from a base and the first fin includes a doped region to provide carriers for quantum dot formation;

applying one or more voltages to one or more gates on a second fin to cause a second quantum dot to form in the second fin, wherein the second fin extends away from the base and the second fin includes a doped region to provide carriers for quantum dot formation; and

sensing a quantum state of the first quantum dot with the second quantum dot.

16. The method of claim 15, wherein applying the one or more voltages to the one or more gates on the first fin comprises applying a voltage to a first gate of the one or more gates to cause the first quantum dot to form in the first fin under the first gate.

17. The method of any of claims 15-16, further comprising:

applying the one or more voltages to the one or more gates on the first fin to cause a third quantum dot to form in the first fin; and

prior to sensing the quantum state of the first quantum dot with the second quantum dot, allowing the first and third quantum dots to interact.

18. A method of manufacturing a quantum dot device, comprising:

forming fins having a quantum well stack disposed therein, wherein the quantum well stack includes a quantum well layer;

providing an insulating material between the fins;

forming gates on the fins; and

doping the fins to form doped regions.

19. The method of claim 18, wherein doping the fins includes performing ion implantation.

20. The method of claim 18, wherein doping the fins includes providing an n-type dopant.

21. The method of claim 18, wherein doping the fins includes:

performing a first round of doping to form a shallow doped region; and

performing a second round of doping to form a deeper doped region.

22. The method of any of claims 18-21, wherein forming the gates on the fins includes forming two outer gates and at least one inner gate, wherein the outer gates have a minimum length, along the fin, greater than a minimum length, along the fin, of the at least one inner gate.

23. The method of any of claims 18-21, wherein forming the gates on the fins includes:

forming two outer gates and at least one inner gate;

providing first spacer material between the gates; and

providing second spacer material on outside faces of the outer gates;

wherein the second spacer material has a thickness, along the fin, greater than a thickness of the first spacer material.

24. A quantum computing device, comprising:

a quantum processing device, wherein the quantum processing device includes a first fin in parallel with a second fin, an insulating material disposed between the first fin and the second fin, an active quantum well layer in the first fin, and a read quantum well layer in the second fin, wherein each fin includes a doped region to provide carriers to the quantum well layers;

a non-quantum processing device, coupled to the quantum processing device, to control voltages applied to gates on the first and second fin; and

a memory device to store data generated by the read quantum well layer during operation of the quantum processing device.

25. The quantum computing device of claim 24, further comprising:

a cooling apparatus to maintain a temperature of the quantum processing device below 5 degrees Kelvin.

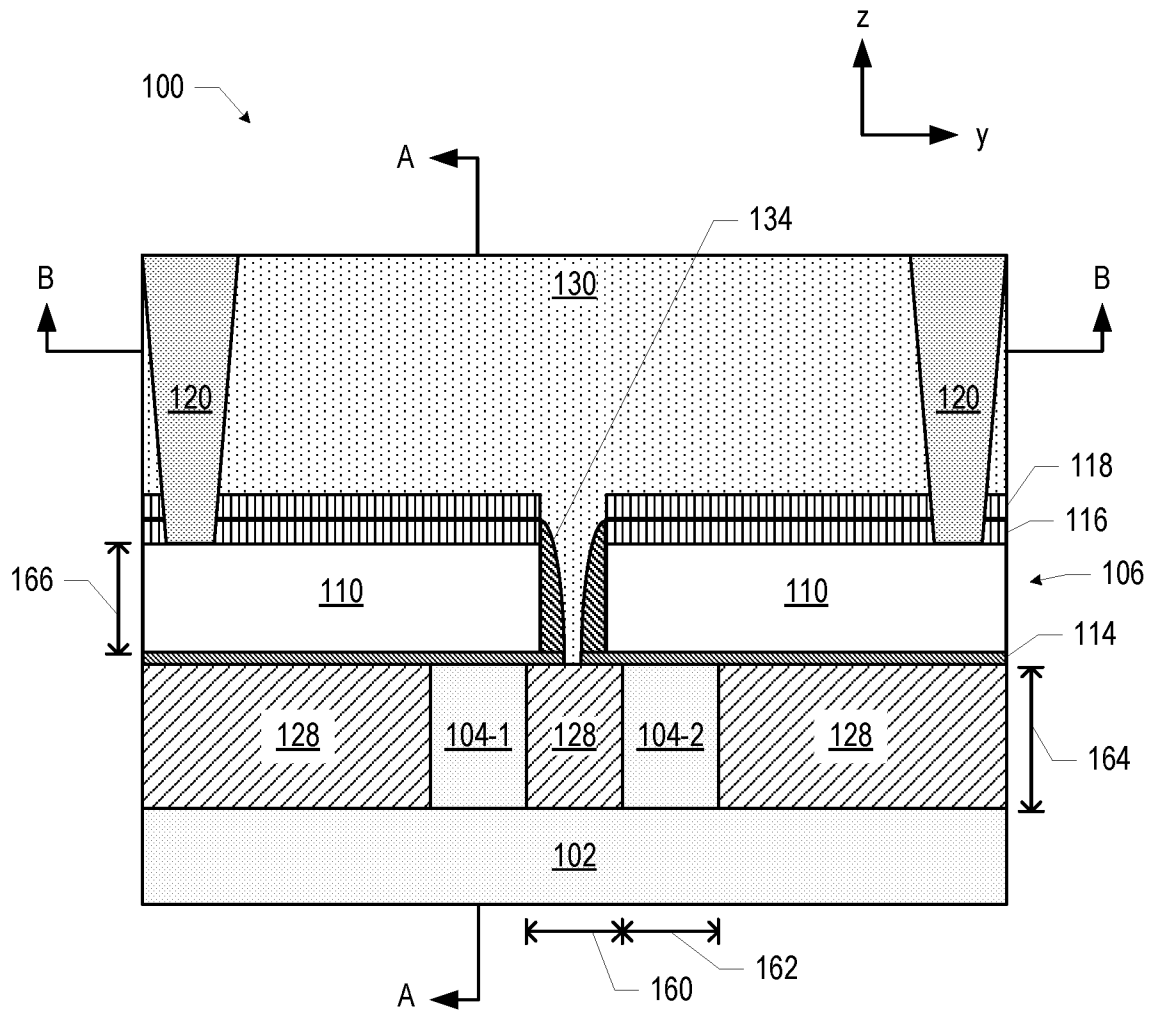


FIG. 1

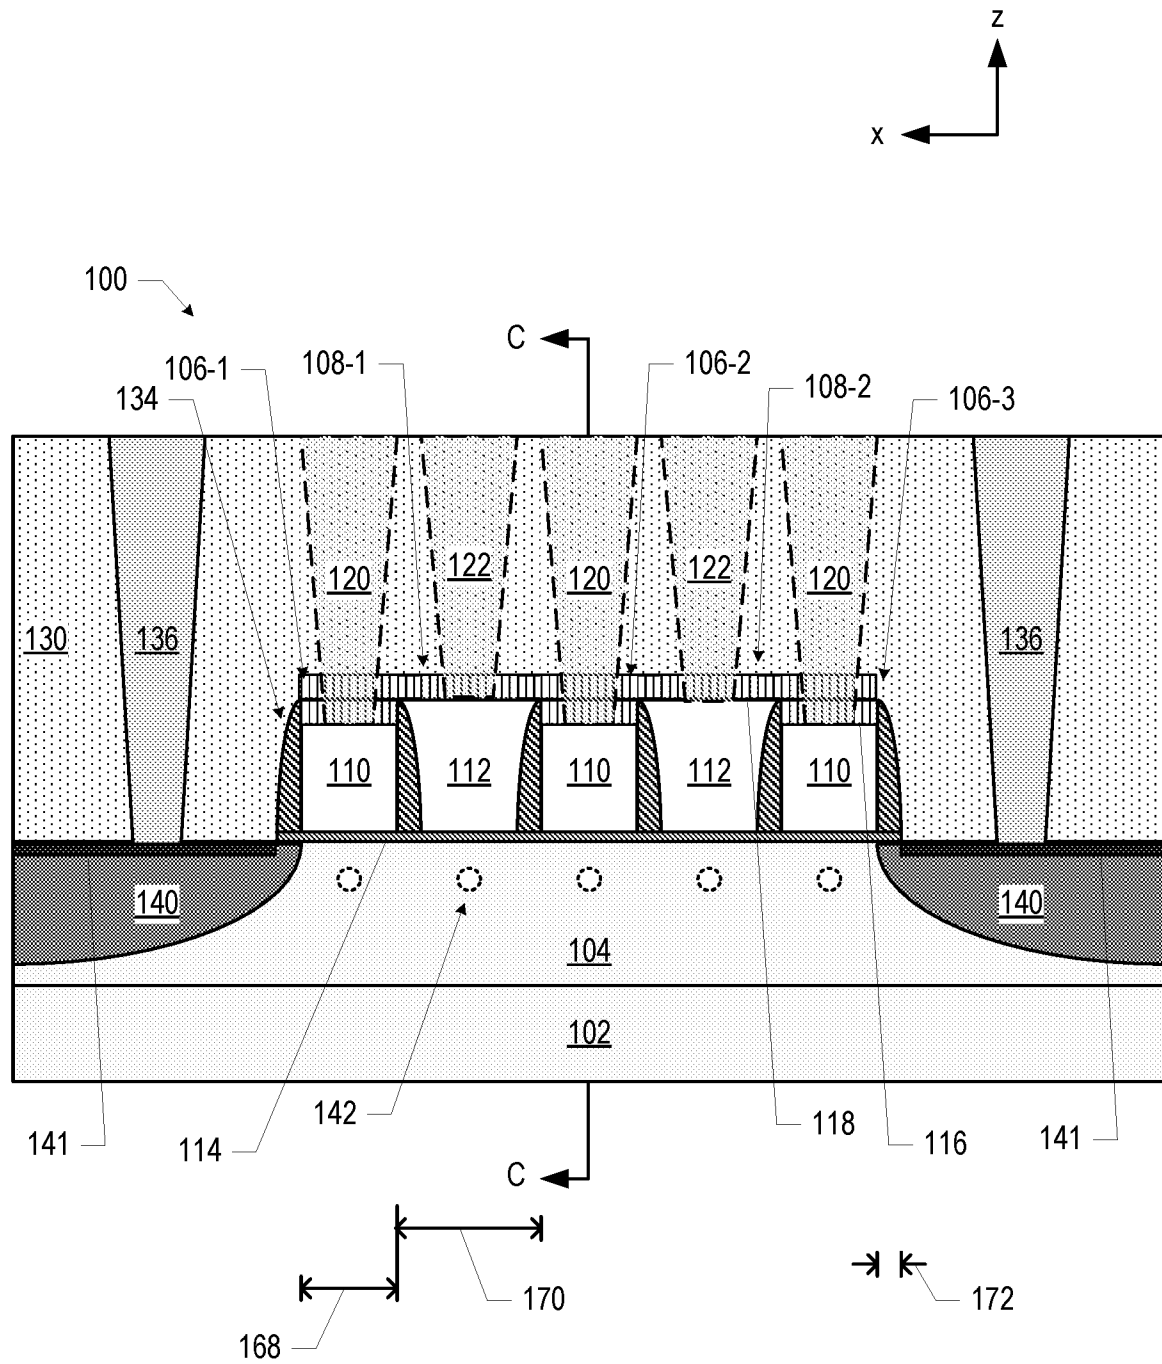


FIG. 2

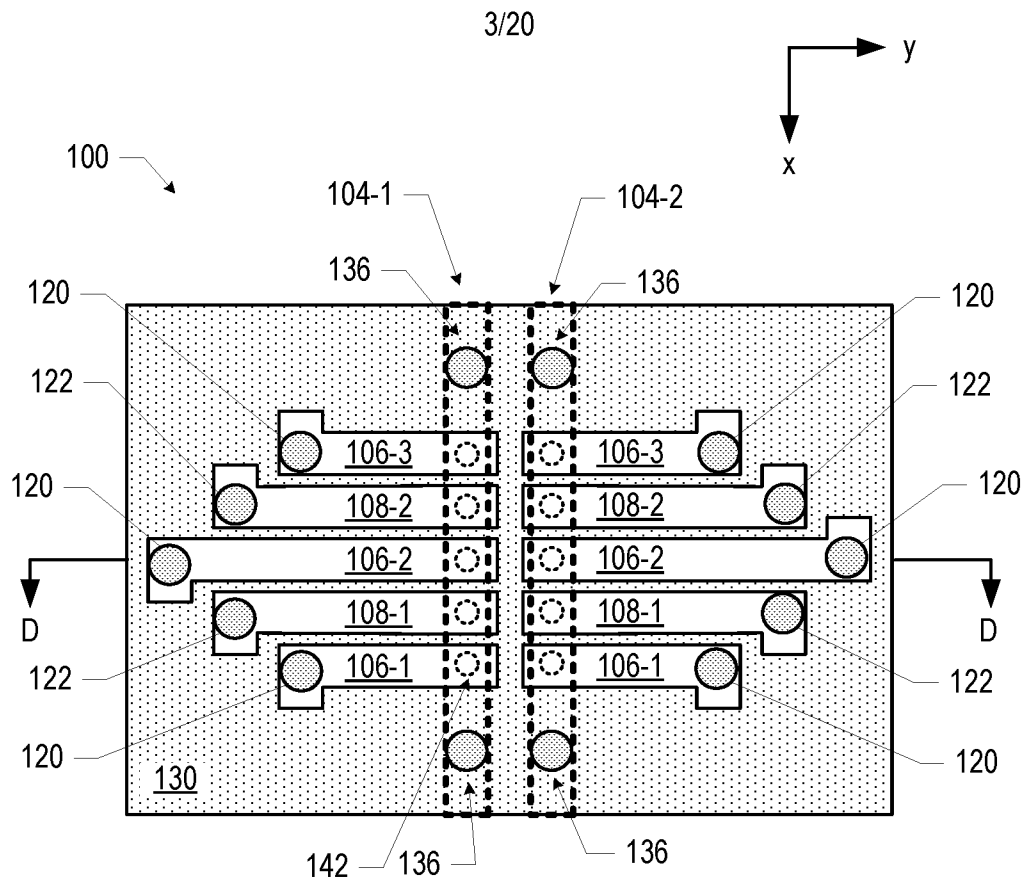


FIG. 3

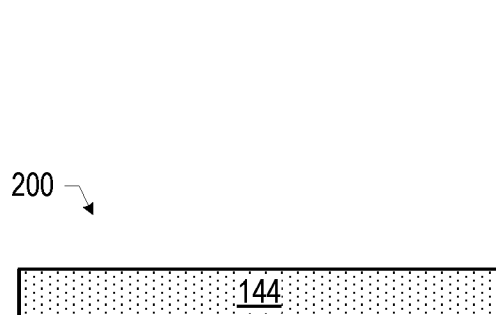


FIG. 4

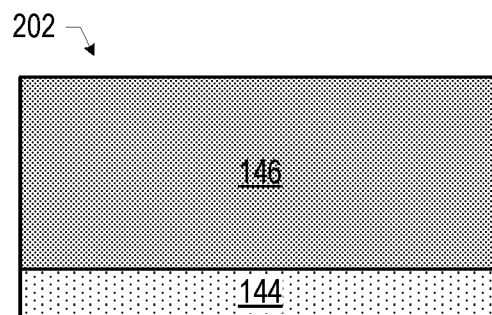


FIG. 5

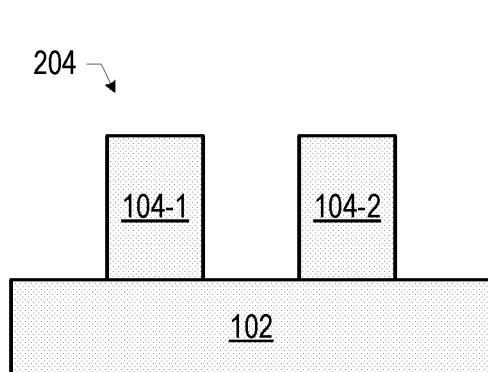


FIG. 6

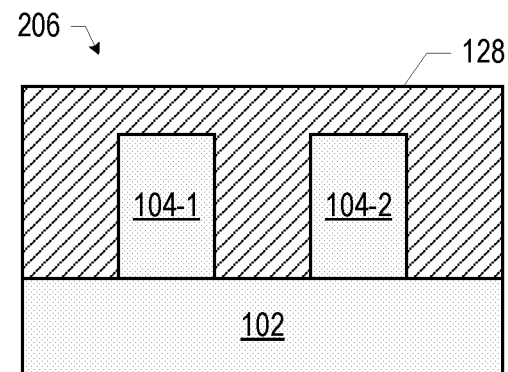


FIG. 7

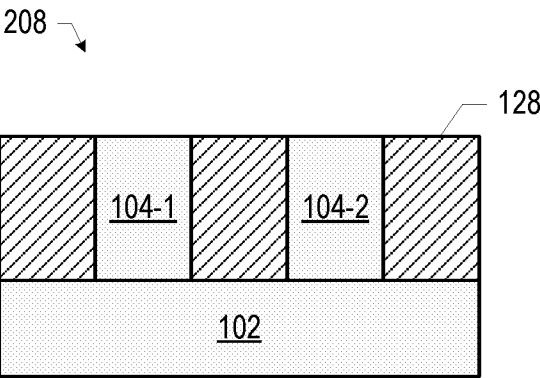


FIG. 8

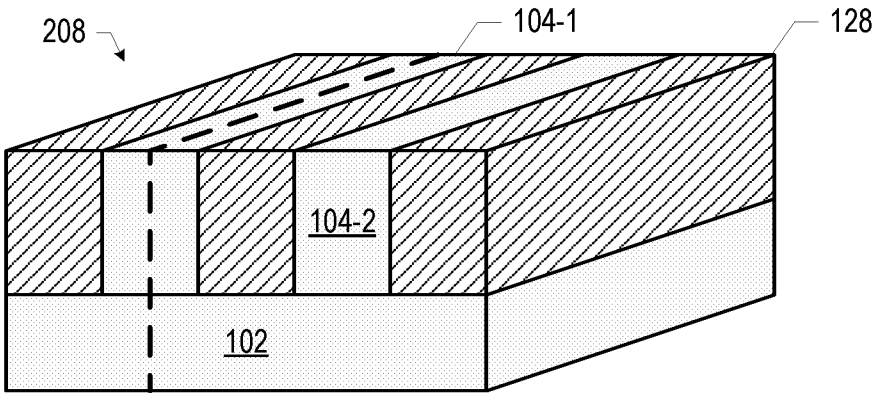


FIG. 9

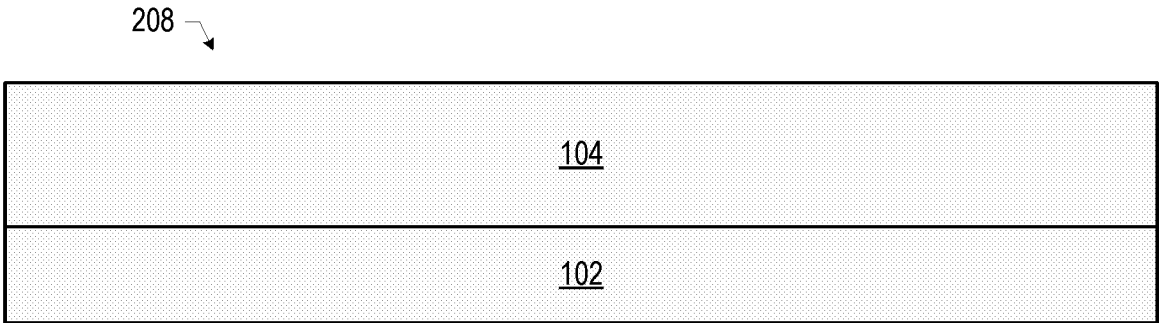


FIG. 10

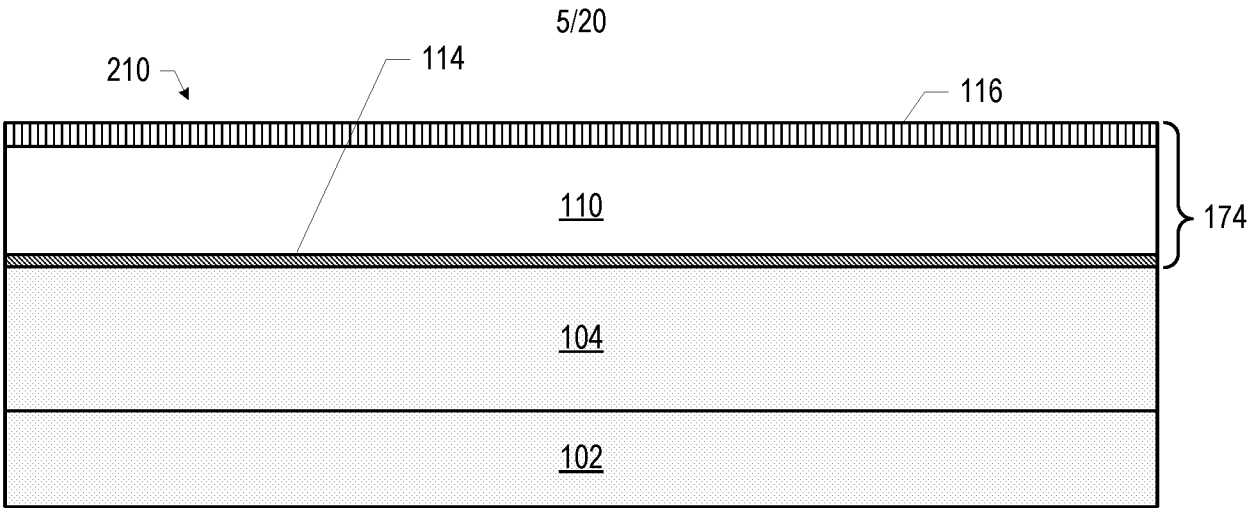


FIG. 11

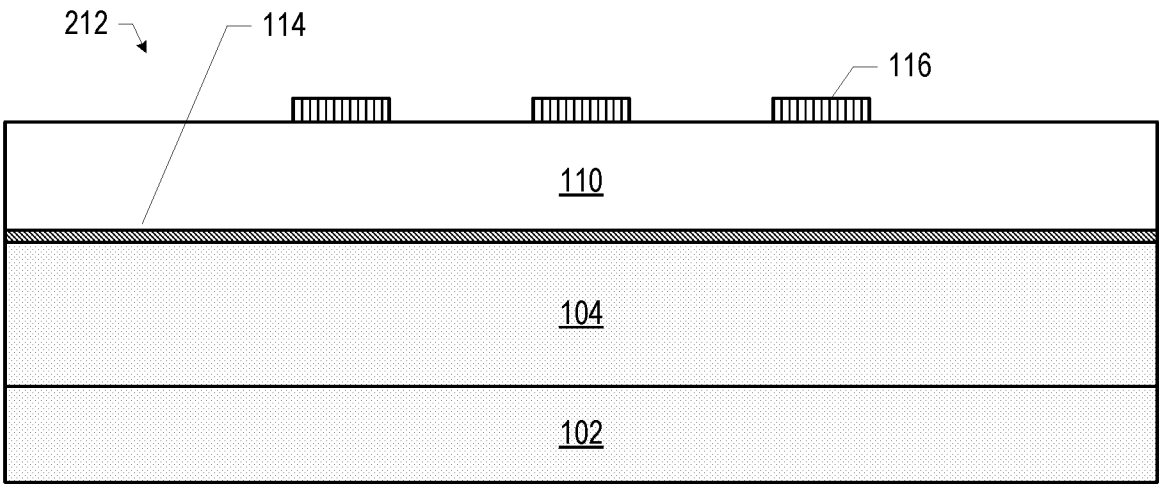


FIG. 12

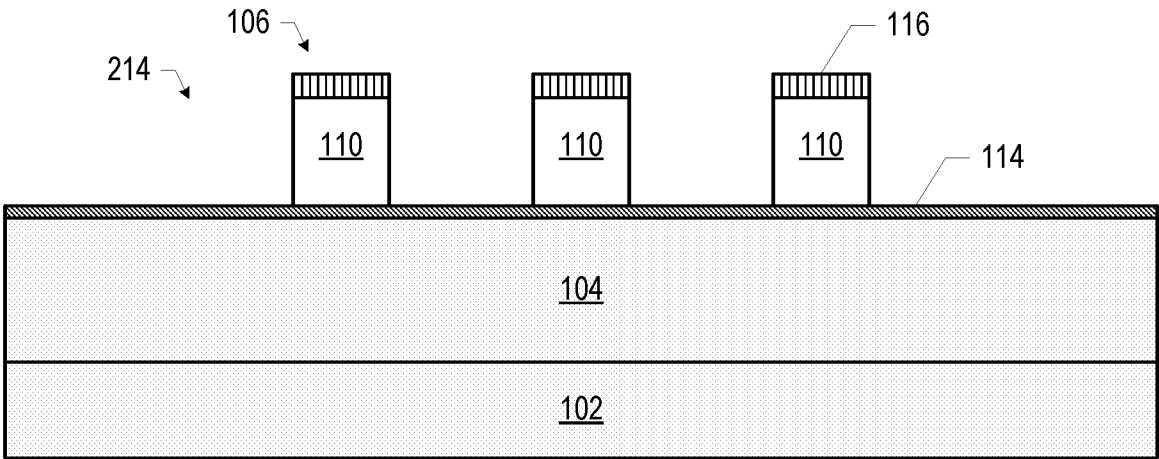


FIG. 13

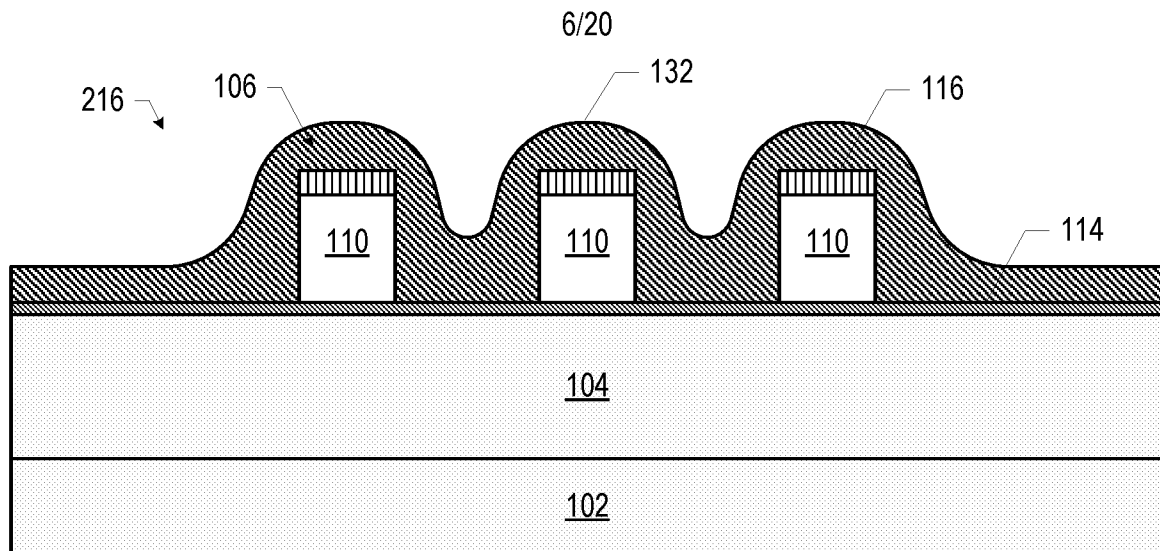


FIG. 14

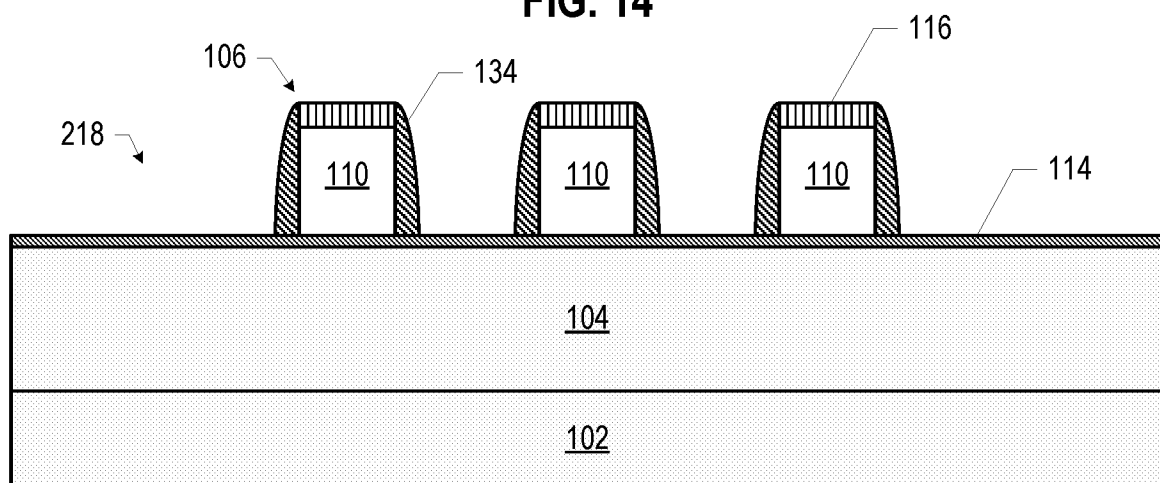


FIG. 15

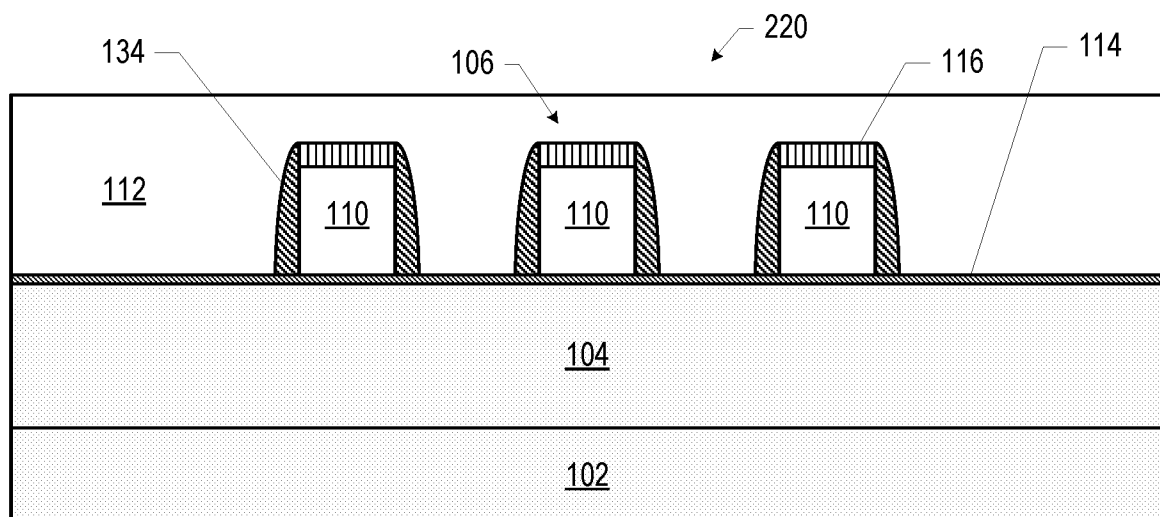


FIG. 16

7/20

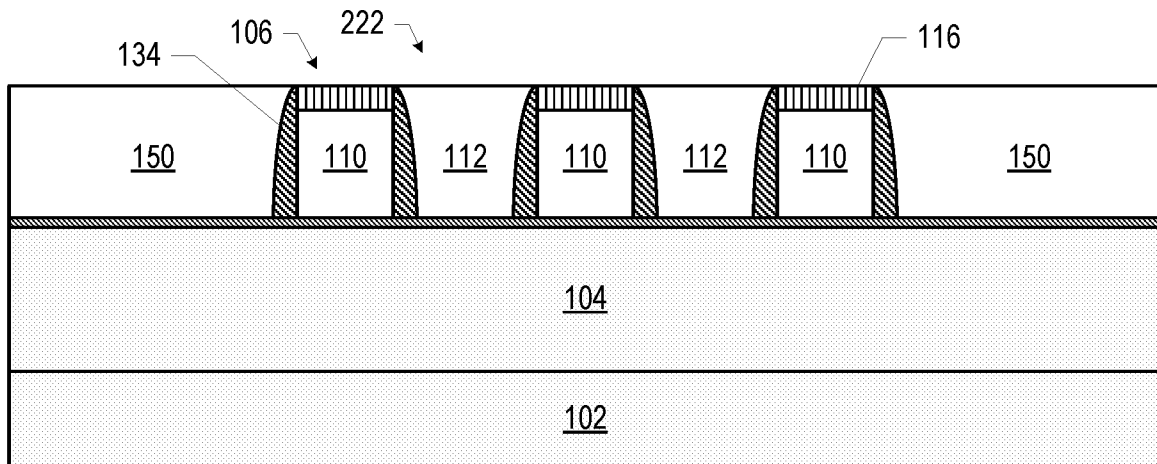


FIG. 17

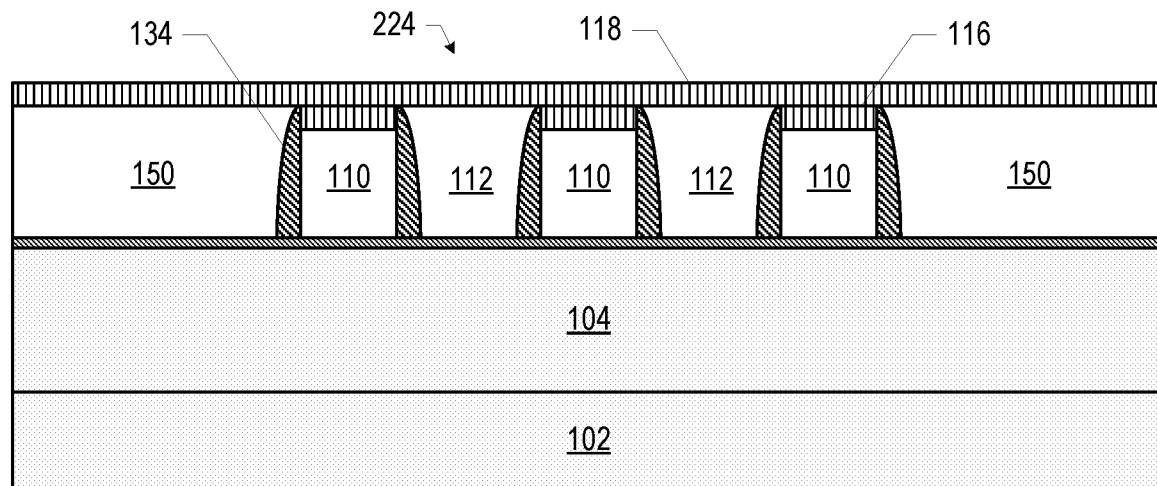


FIG. 18

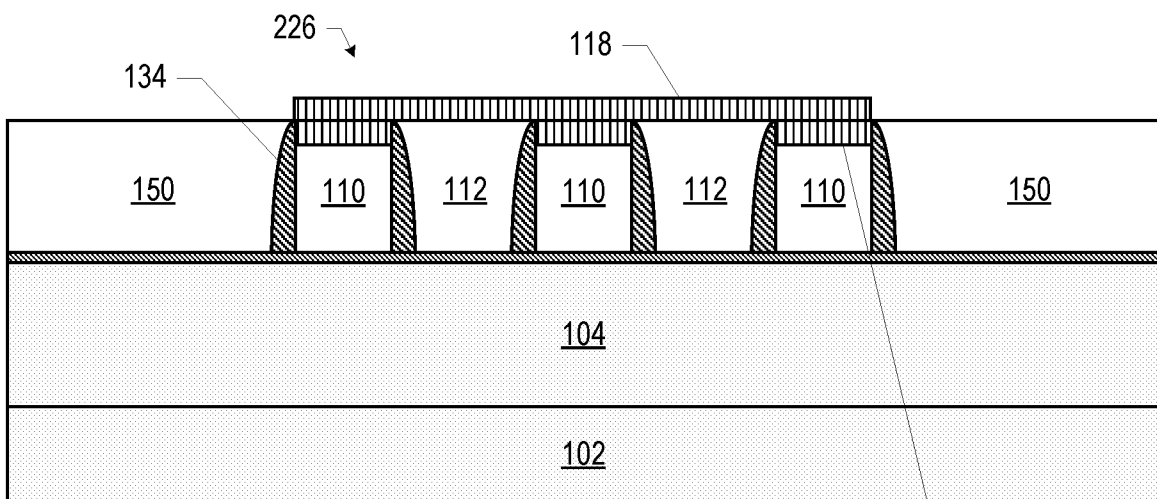


FIG. 19

8/20

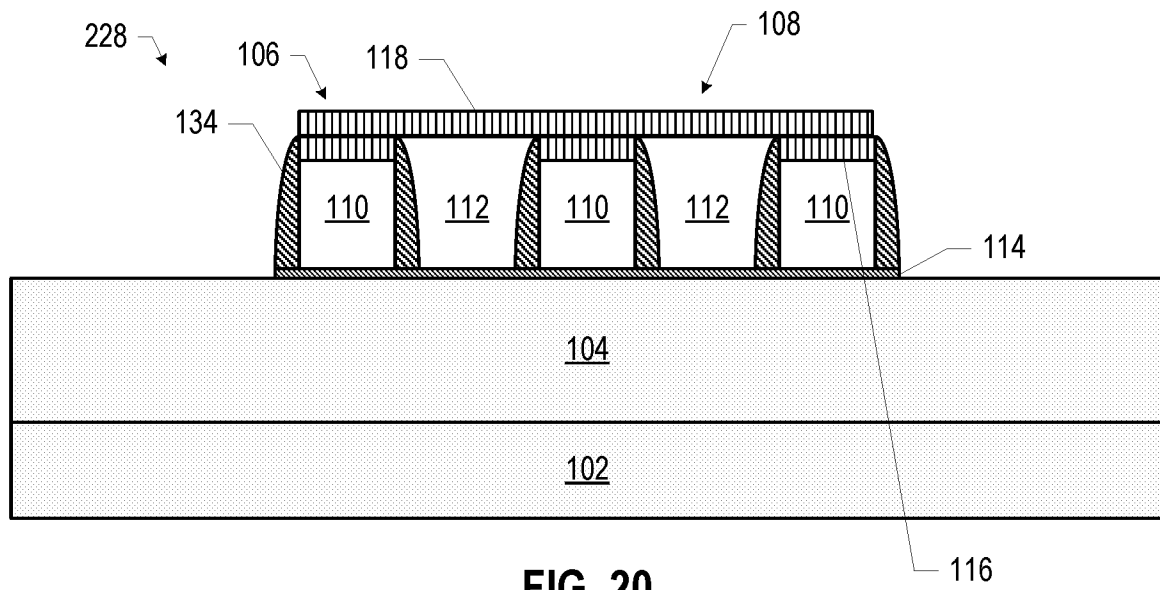


FIG. 20





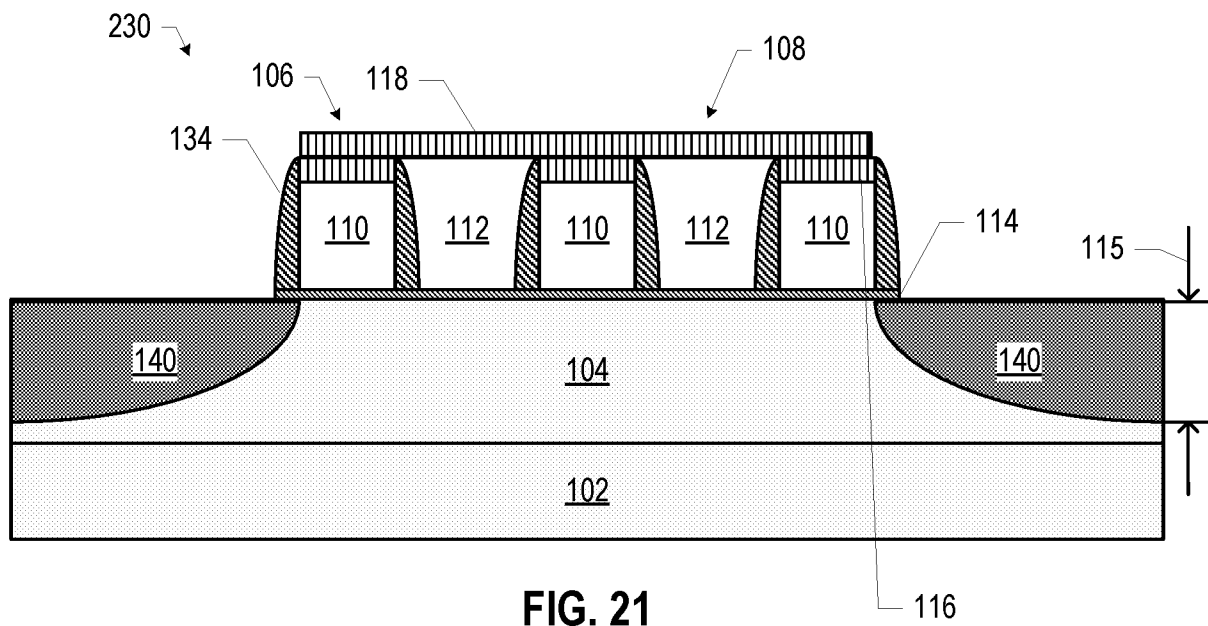


FIG. 21

9/20

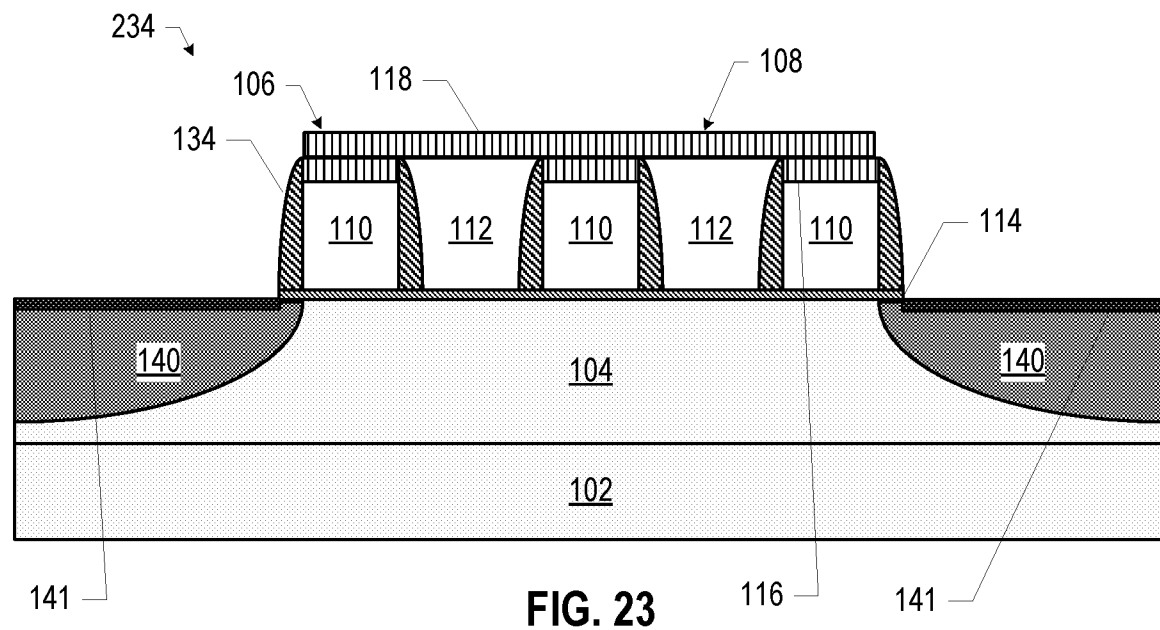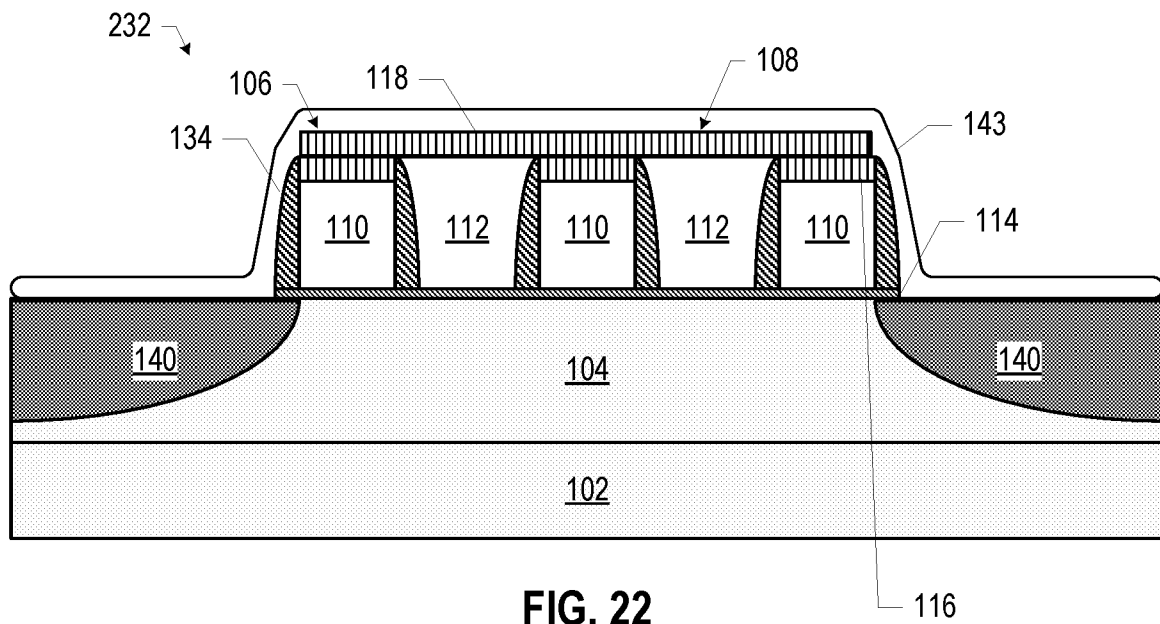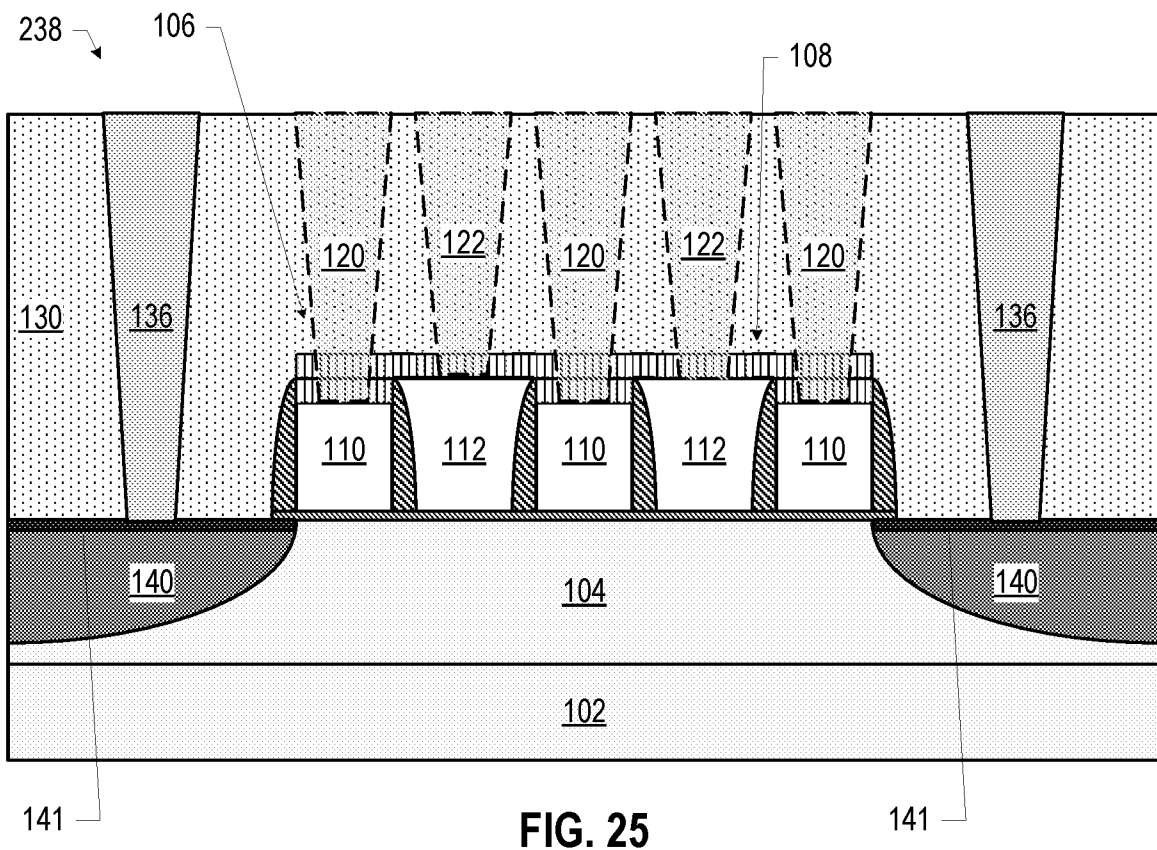

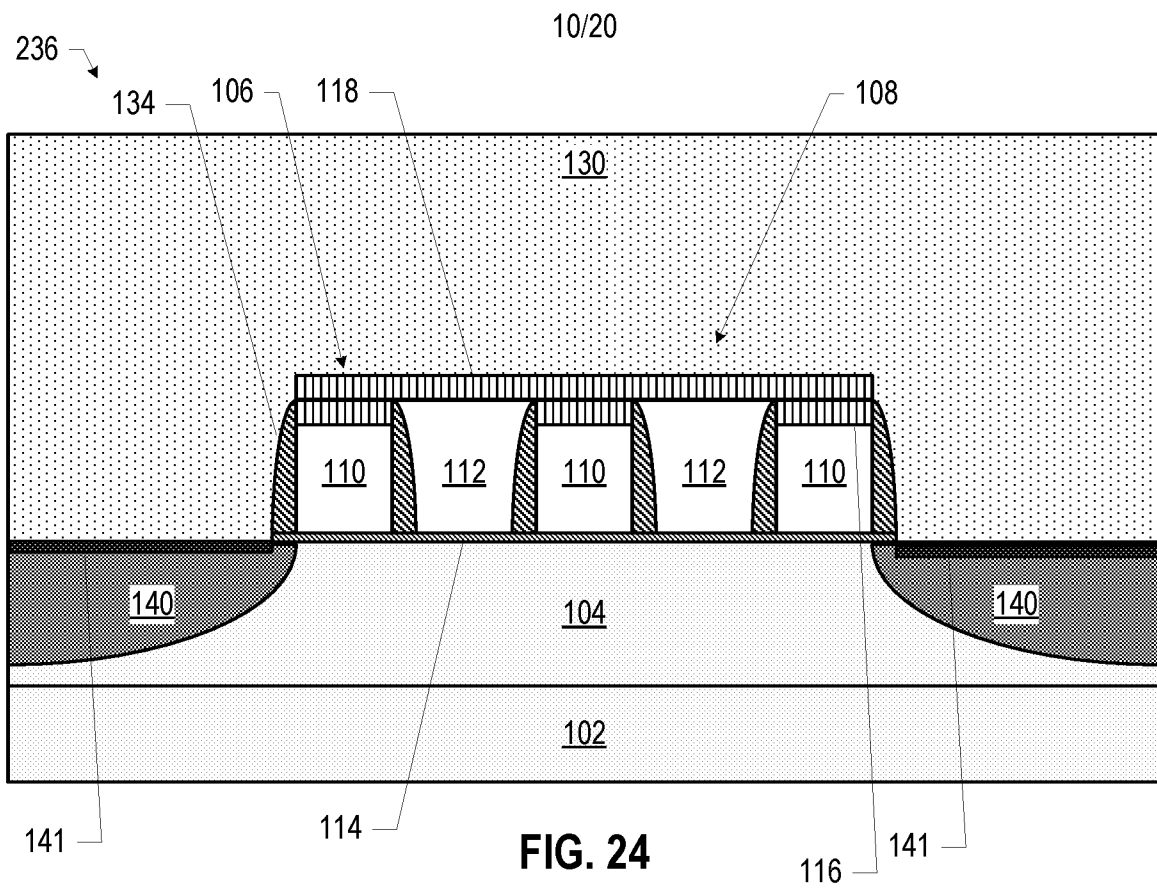

11/20

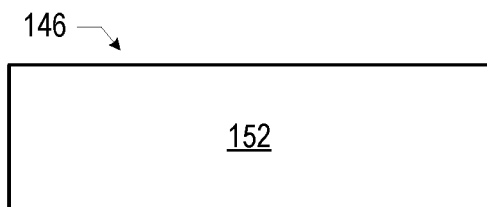


FIG. 26

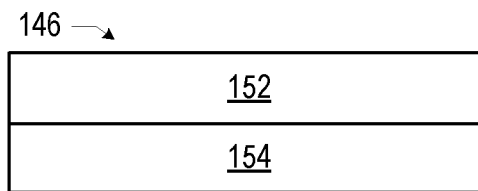


FIG. 27

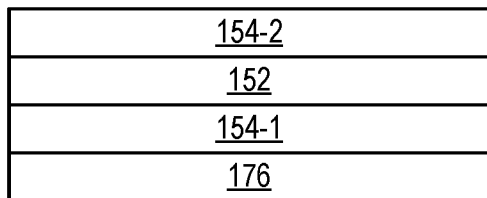


FIG. 28

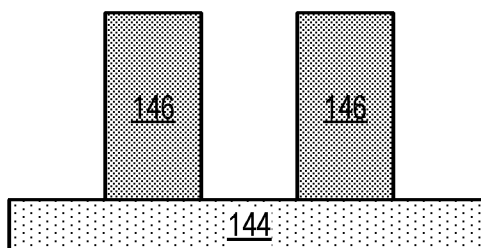


FIG. 29

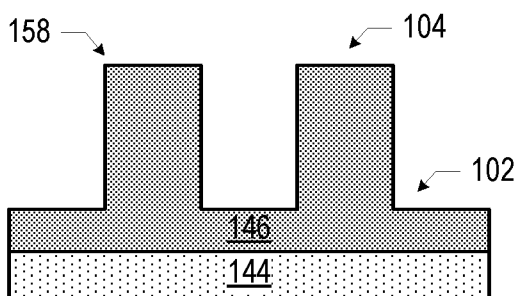


FIG. 30

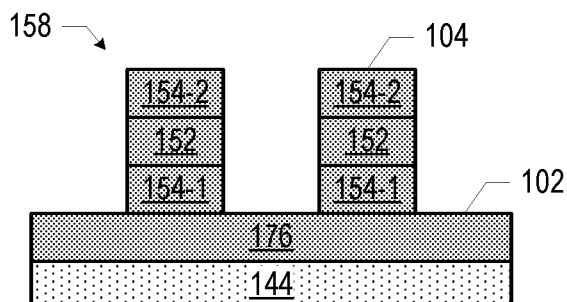


FIG. 31

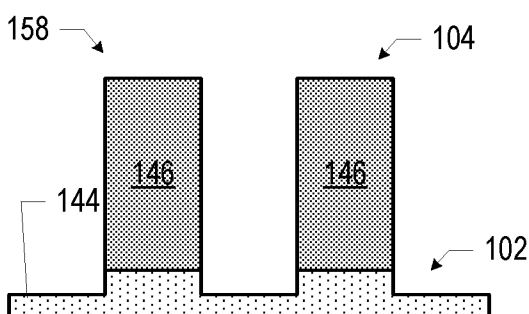


FIG. 32

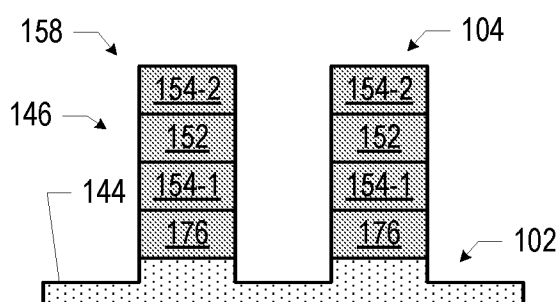


FIG. 33

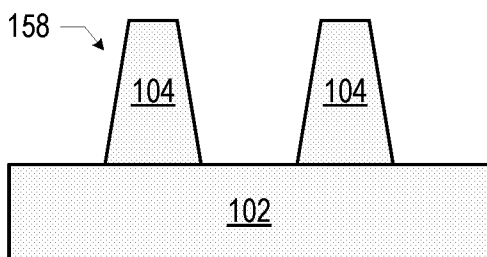


FIG. 34

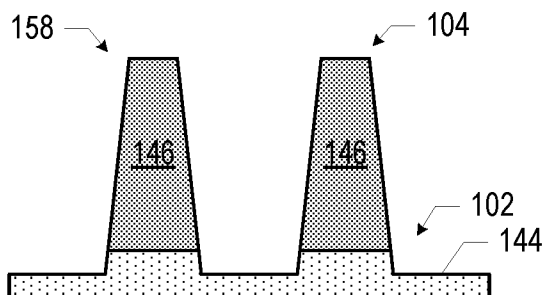


FIG. 35

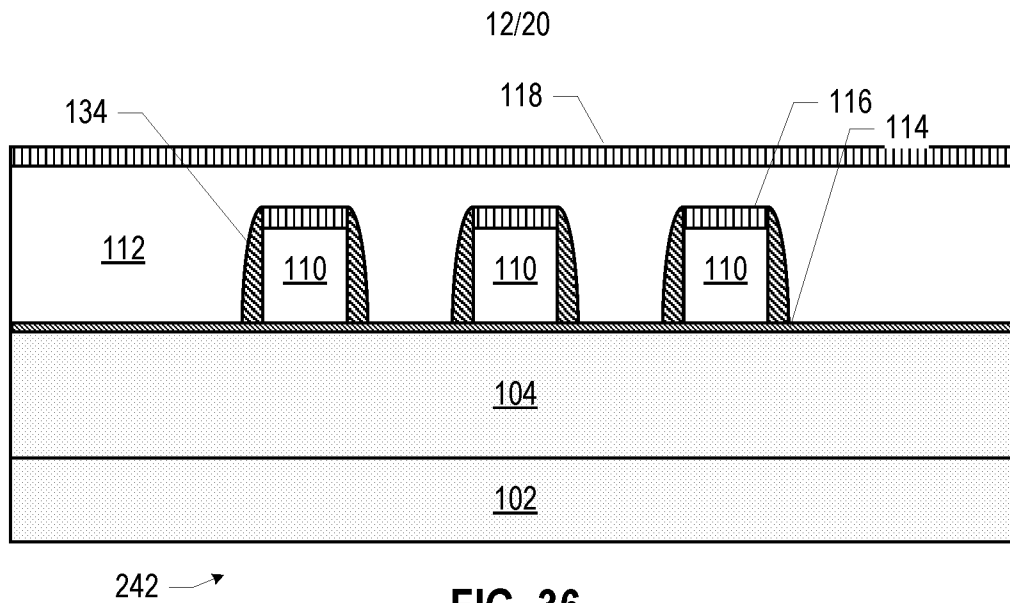


FIG. 36

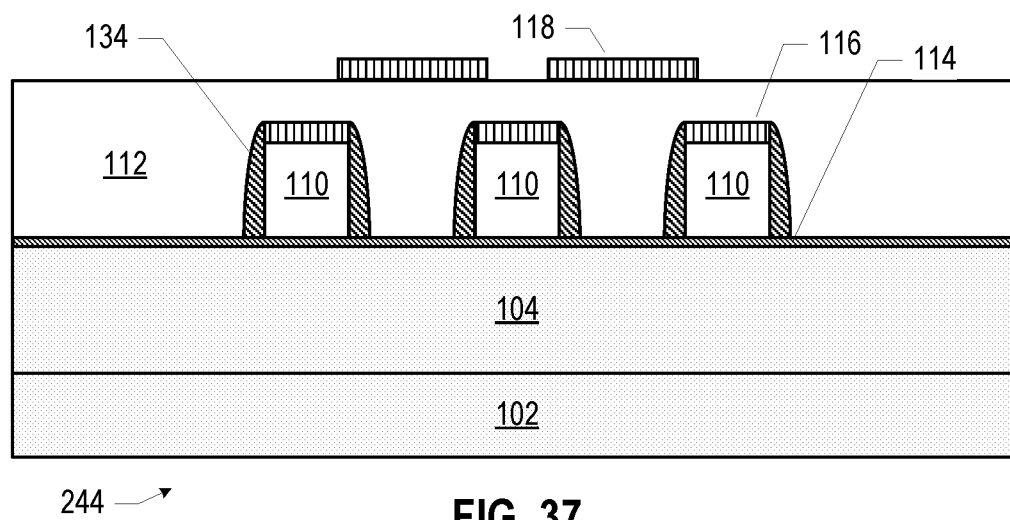


FIG. 37

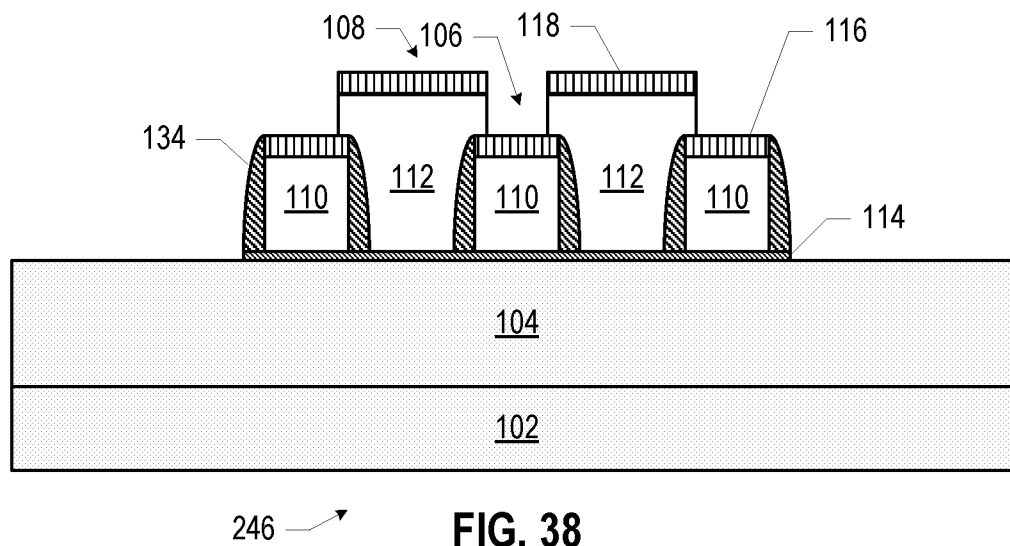


FIG. 38

13/20

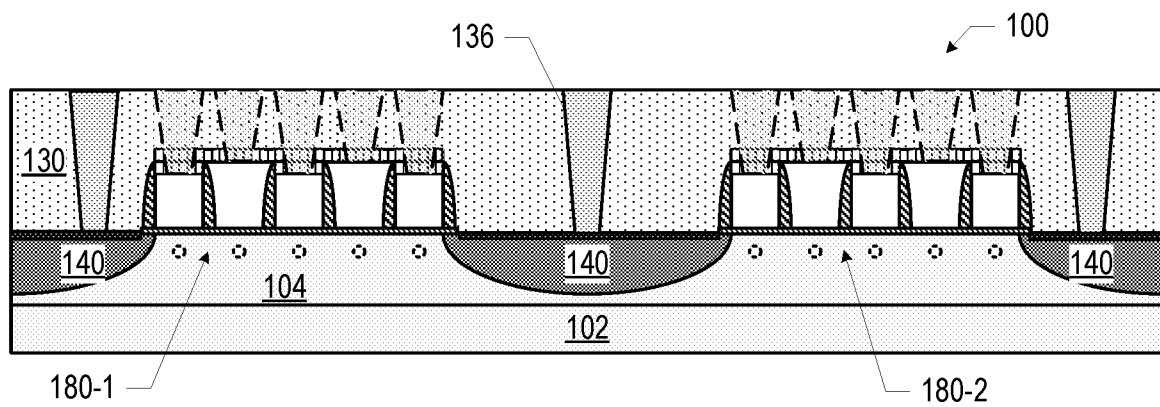


FIG. 39

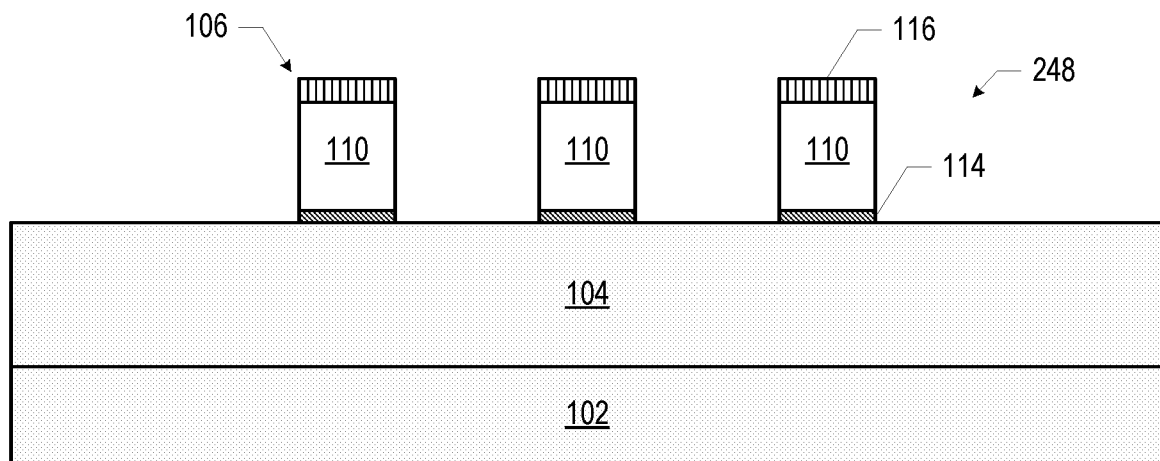


FIG. 40

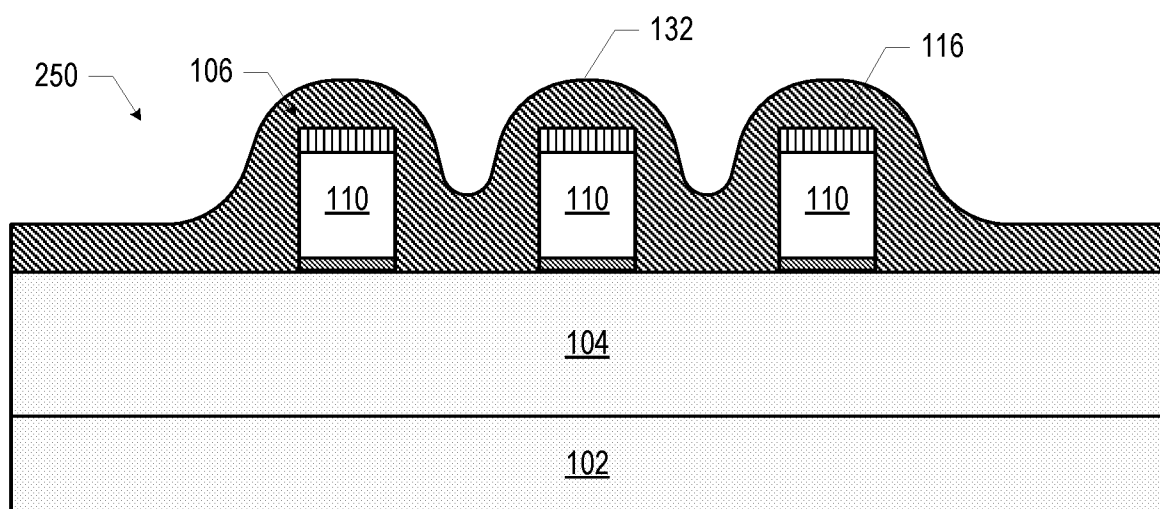


FIG. 41

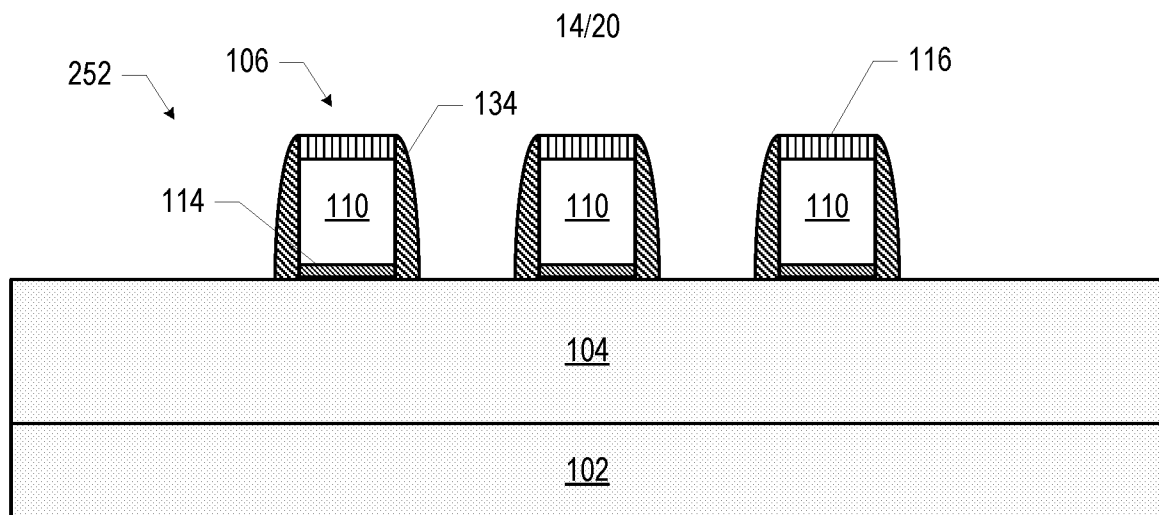


FIG. 42

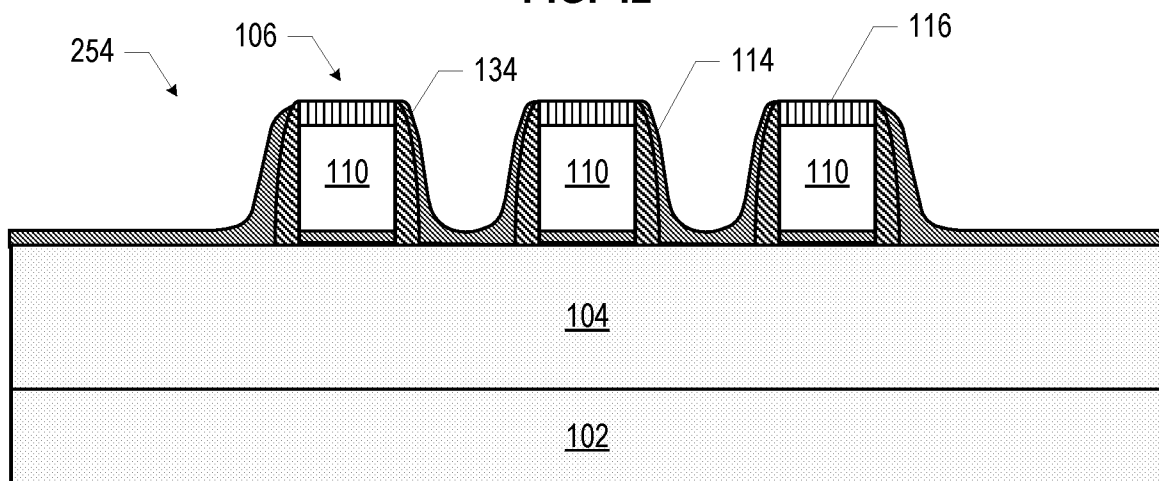


FIG. 43

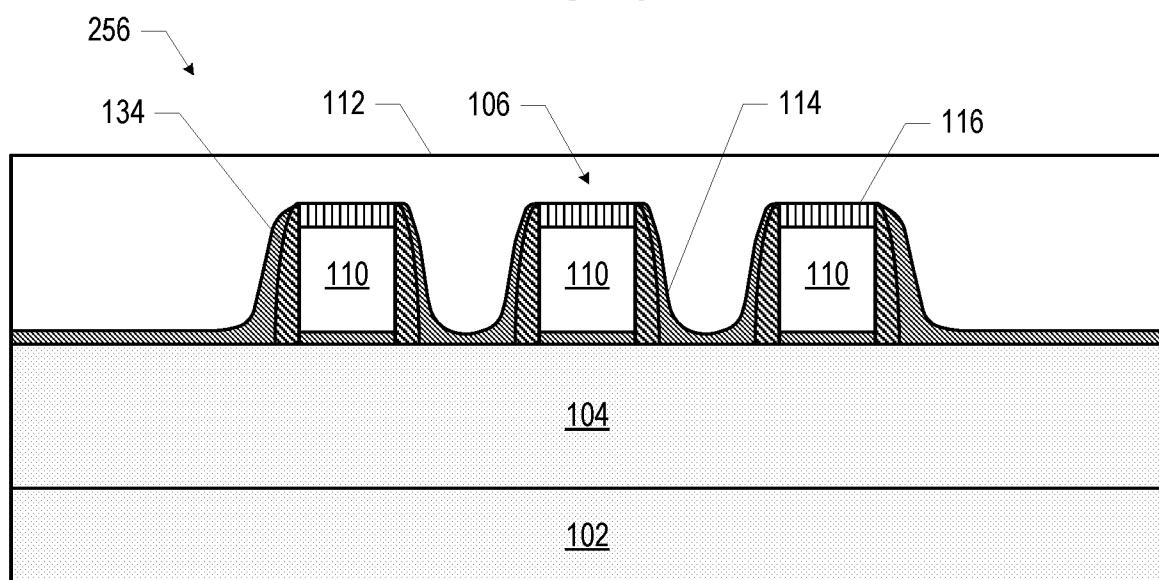


FIG. 44

15/20

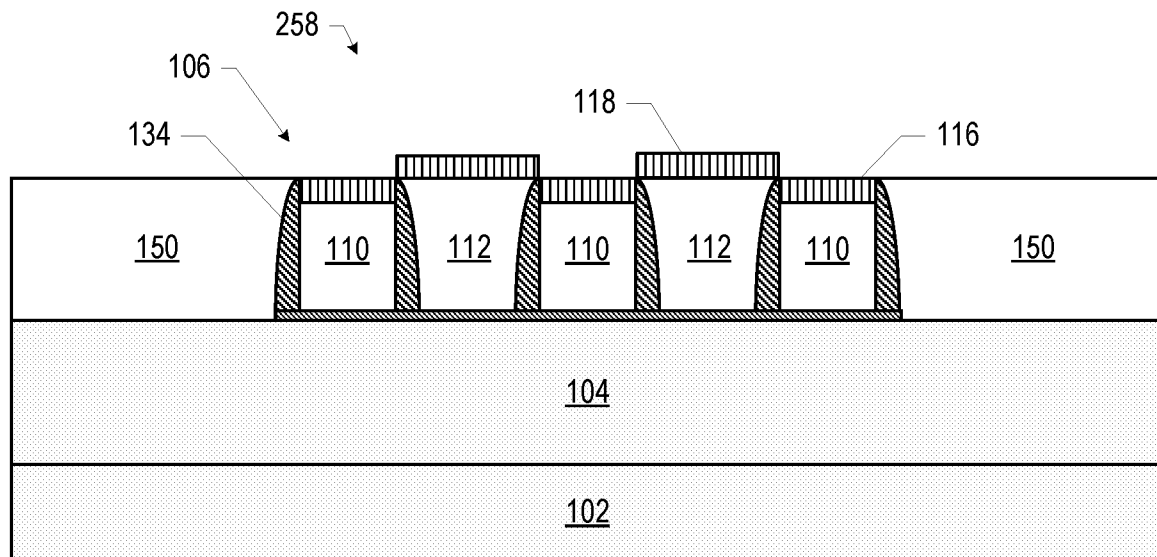


FIG. 45

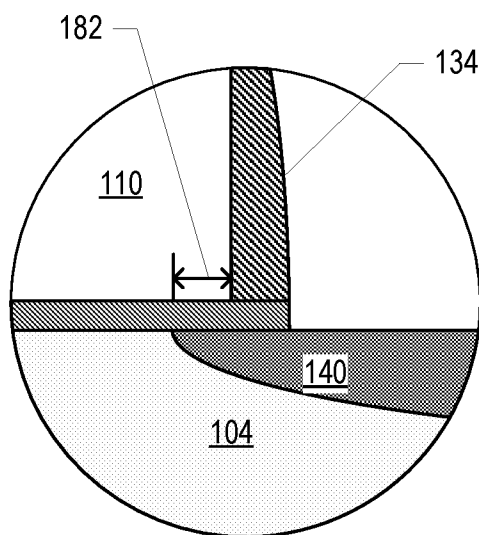


FIG. 46

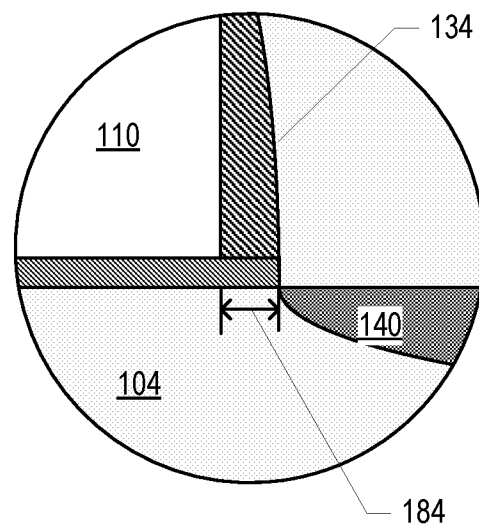


FIG. 47

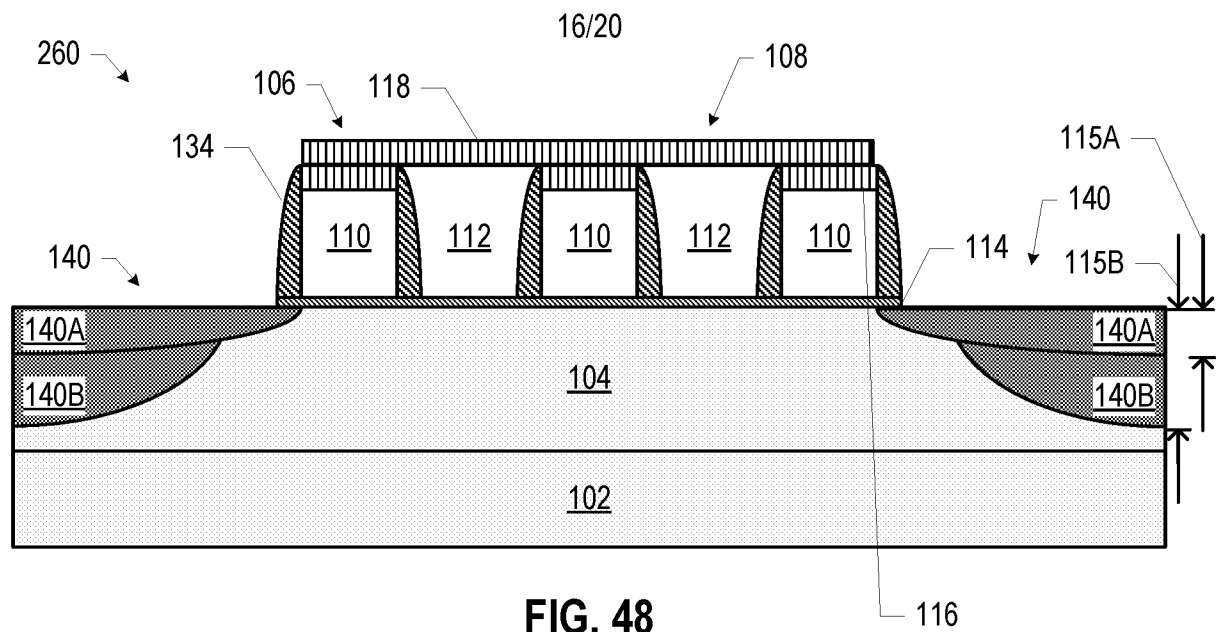


FIG. 48

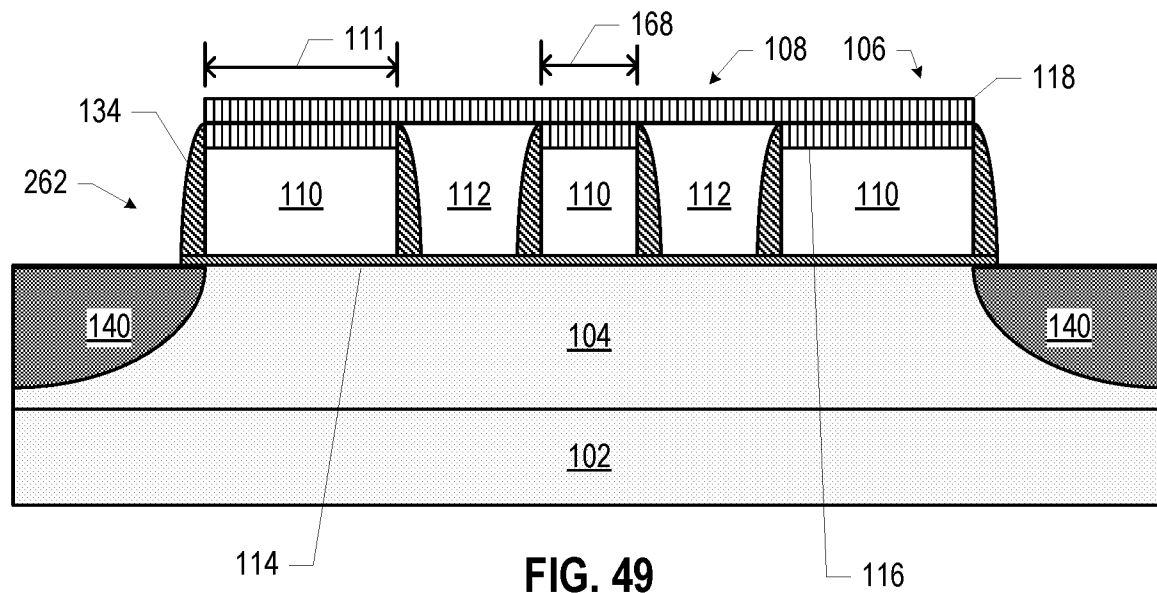


FIG. 49

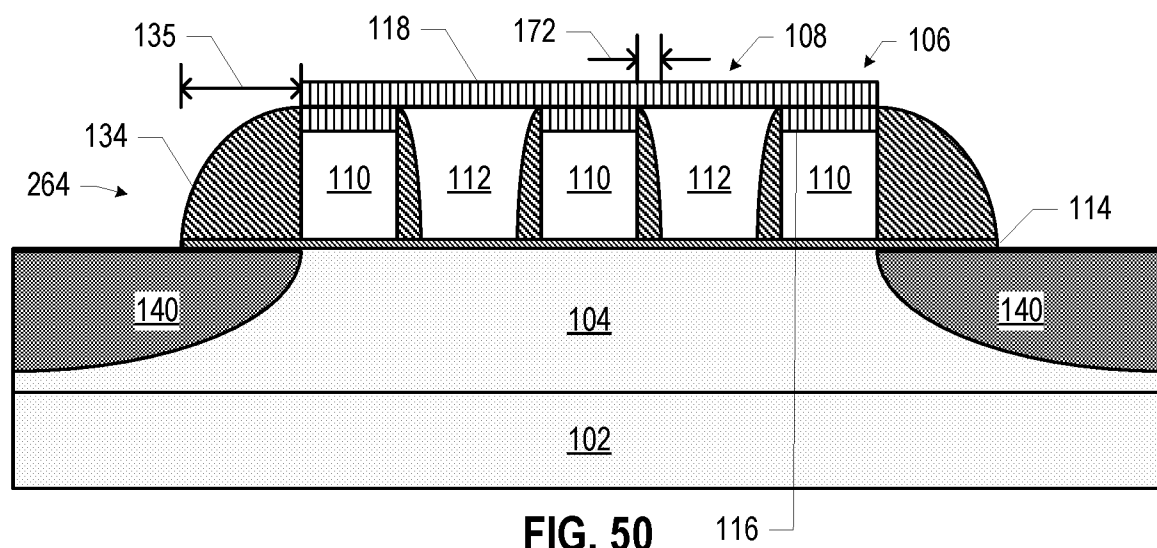


FIG. 50

17/20

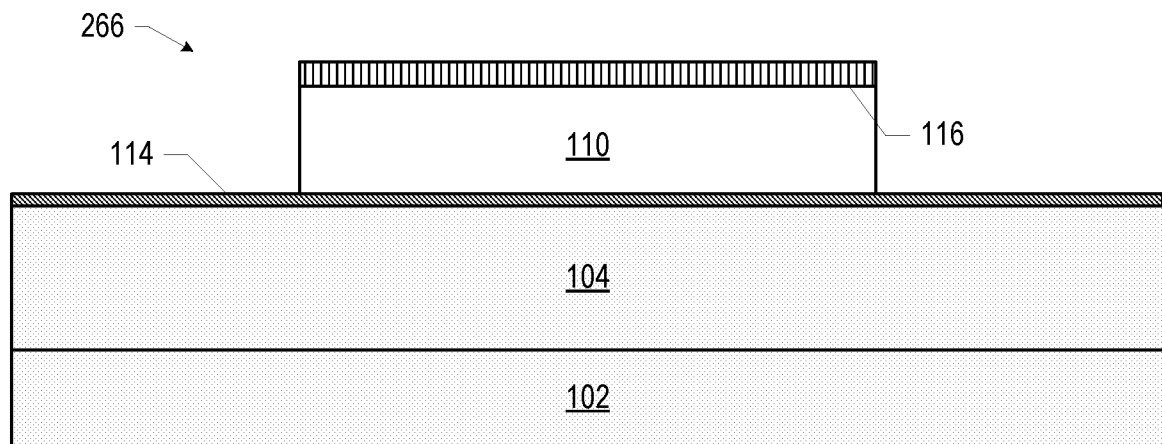


FIG. 51

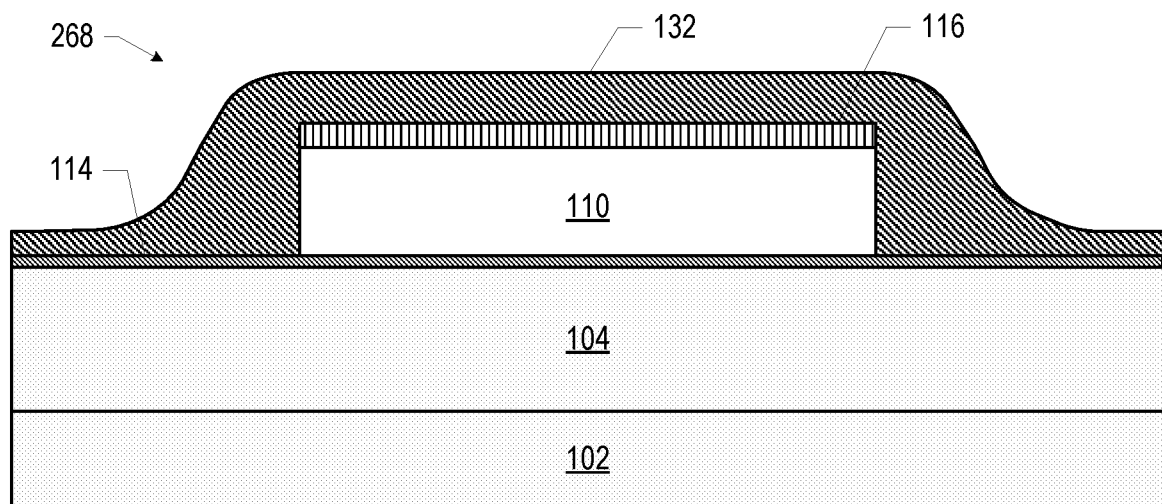


FIG. 52

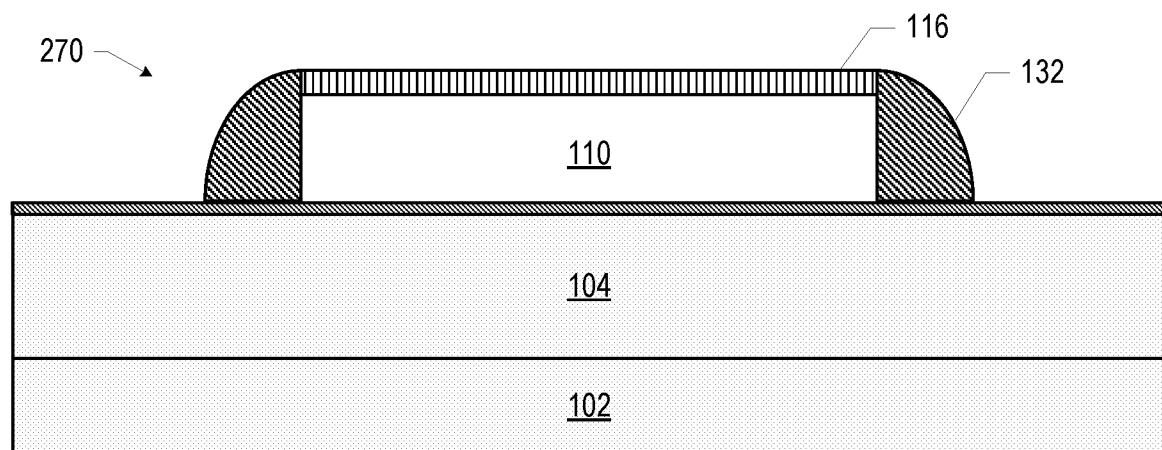


FIG. 53

18/20

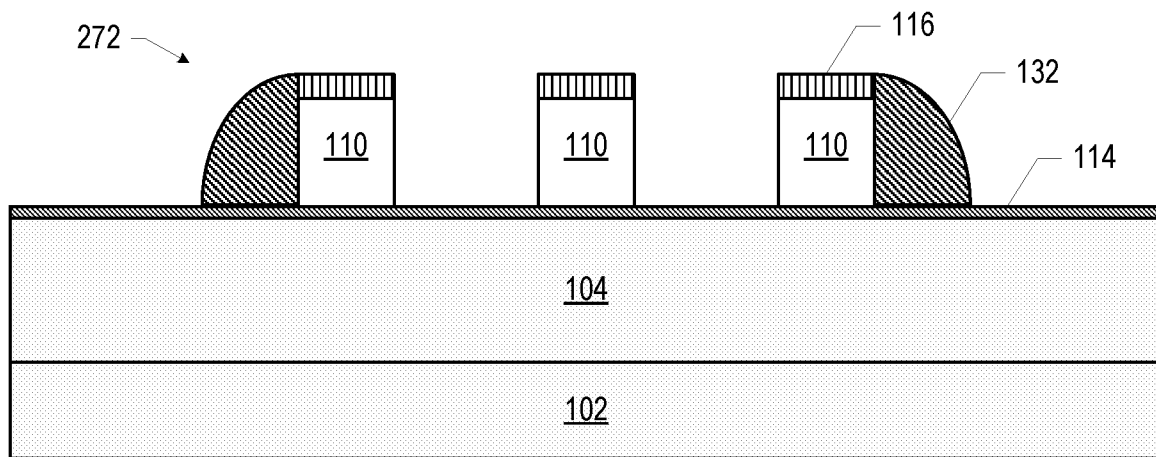


FIG. 54

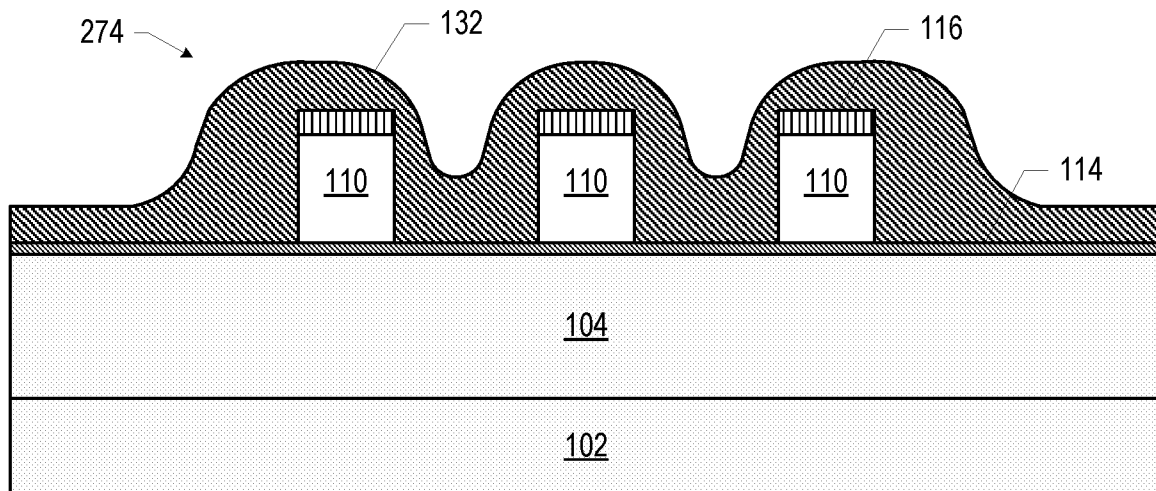


FIG. 55

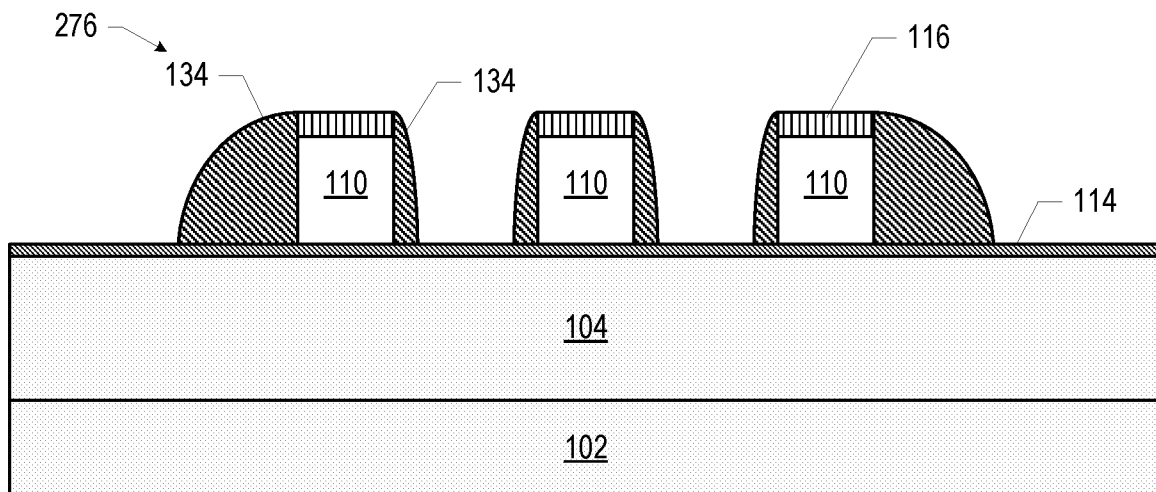
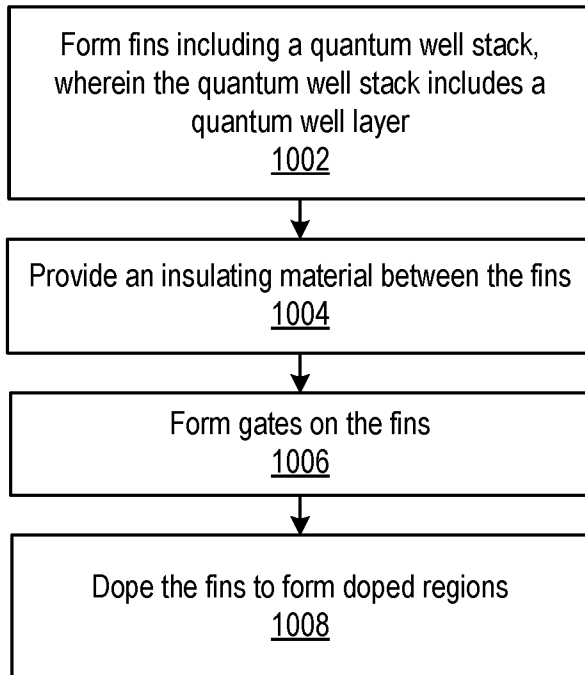



FIG. 56

19/20


1000

**FIG. 57**

1020

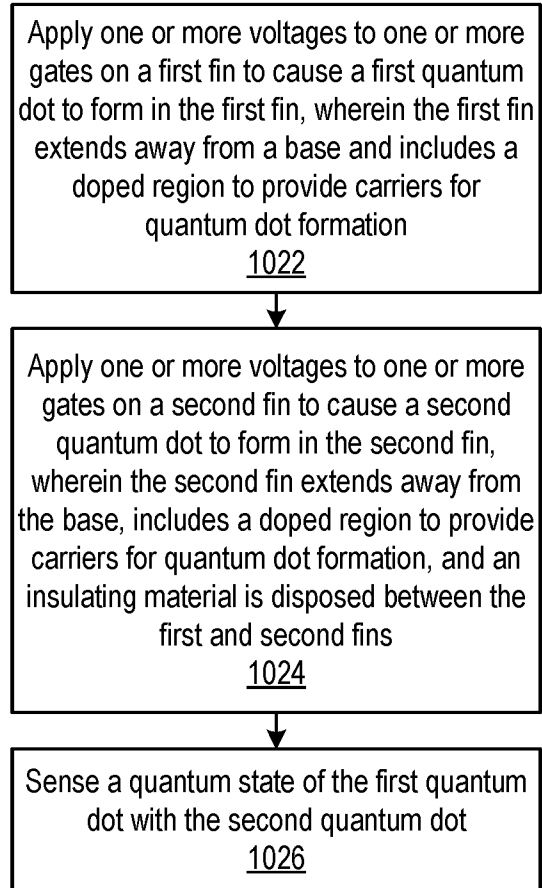**FIG. 58**

1040

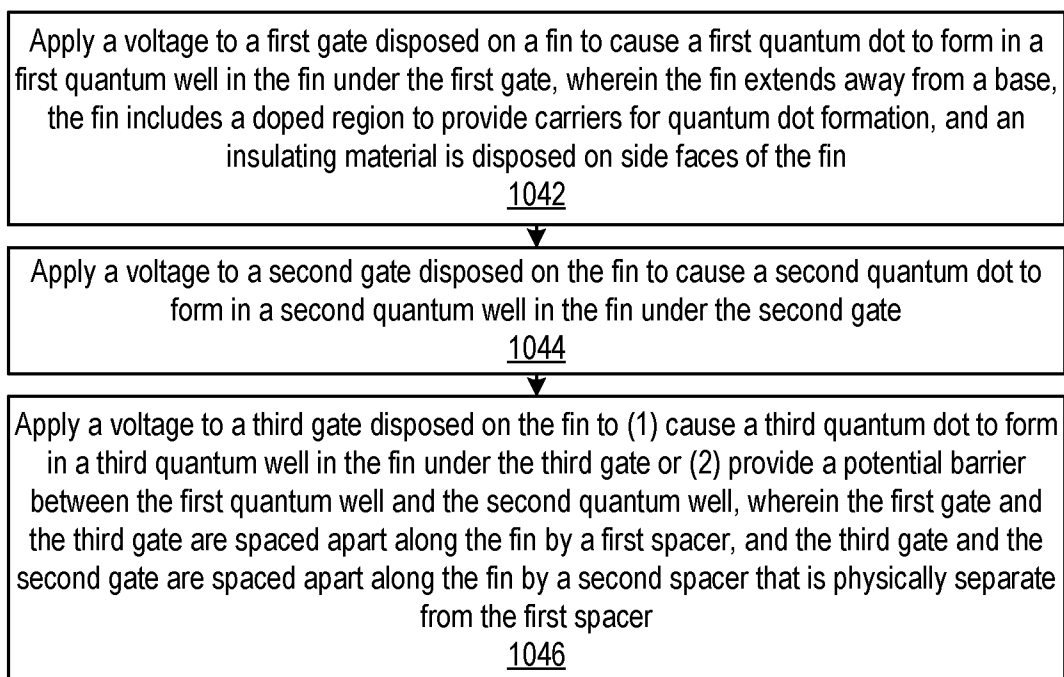**FIG. 59**

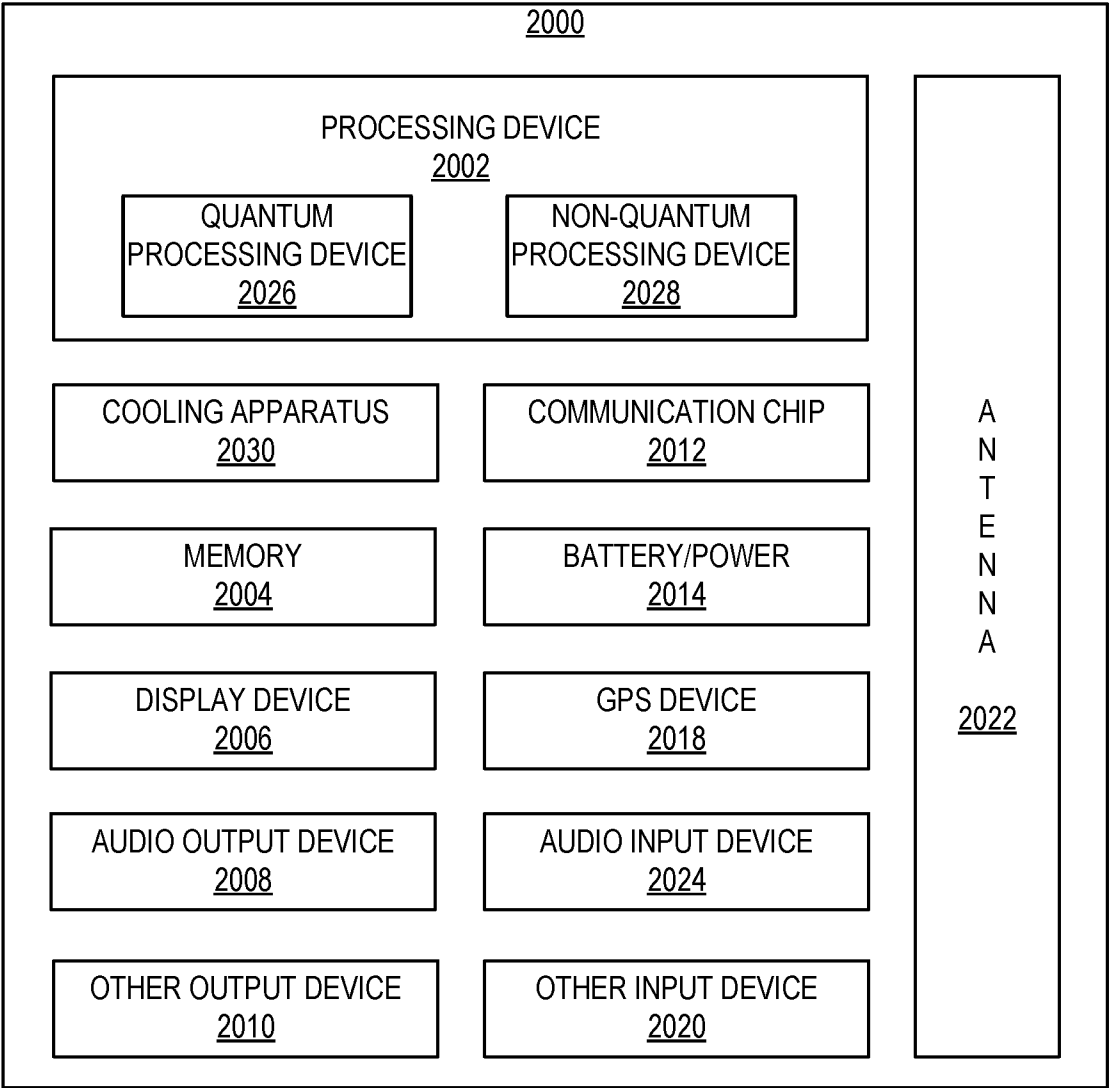


FIG. 60

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US2016/036317**A. CLASSIFICATION OF SUBJECT MATTER****H01L 29/778(2006.01)i, H01L 29/66(2006.01)i, H01L 29/80(2006.01)i, H01L 29/12(2006.01)i**

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

H01L 29/778; H01L 21/336; H01L 21/28; H01L 29/94; H01L 21/338; H01L 29/772; H01L 29/78; H01L 31/119; H01L 29/06; H01L 29/66; H01L 29/80; H01L 29/12

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Korean utility models and applications for utility models

Japanese utility models and applications for utility models

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

eKOMPASS(KIPO internal) & keywords: quantum dot, fin, FET, gate, voltage

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 2004-0175881 A1 (LEONARD FORBES et al.) 09 September 2004 See paragraphs [0037]-[0041], claim 16 and figures 1A-1D.	1-11, 14
A		12-13, 15-25
Y	US 2011-0147711 A1 (RAVI PILLARISETTY et al.) 23 June 2011 See paragraphs [0019]-[0032], claim 1 and figures 1-7.	1-11, 14
Y	US 2001-0013628 A1 (SUNIT TYAGI et al.) 16 August 2001 See paragraphs [0029]-[0034] and figures 6, 10.	2-7
Y	WO 2010-053720 A2 (MICRON TECHNOLOGY, INC. et al.) 14 May 2010 See paragraph [0023] and figure 2.	8-9
Y	US 2014-0235043 A1 (UNITED MICROELECTRONICS CORP.) 21 August 2014 See paragraph [0036] and figure 10.	14



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

06 March 2017 (06.03.2017)

Date of mailing of the international search report

06 March 2017 (06.03.2017)

Name and mailing address of the ISA/KR

International Application Division

Korean Intellectual Property Office

189 Cheongsa-ro, Seo-gu, Daejeon, 35208, Republic of Korea



Facsimile No. +82-42-481-8578

Authorized officer

Lee, Eun Kyu

Telephone No. +82-42-481-3580



INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/US2016/036317

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2004-0175881 A1	09/09/2004	US 6744082 B1 US 6991988 B2	01/06/2004 31/01/2006
US 2011-0147711 A1	23/06/2011	CN 102656699 A CN 102656699 B CN 104900693 A CN 105870168 A EP 2517256 A1 EP 2517256 A4 EP 2996154 A2 EP 2996154 A3 JP 2013-513250 A JP 2016-028447 A KR 10-1378661 B1 KR 10-2012-0085929 A US 2013-032783 A1 US 2014-054548 A1 US 2014-103397 A1 US 2016-172472 A1 US 8283653 B2 US 8575596 B2 US 9153671 B2 US 9263557 B2 WO 2011-087570 A1	05/09/2012 04/05/2016 09/09/2015 17/08/2016 31/10/2012 11/03/2015 16/03/2016 20/04/2016 18/04/2013 25/02/2016 26/03/2014 01/08/2012 07/02/2013 27/02/2014 17/04/2014 16/06/2016 09/10/2012 05/11/2013 06/10/2015 16/02/2016 21/07/2011
US 2001-0013628 A1	16/08/2001	US 6297104 B1 US 6384457 B2	02/10/2001 07/05/2002
WO 2010-053720 A2	14/05/2010	CN 102203923 A CN 102203923 B EP 2342740 A2 EP 2342740 A4 EP 2342740 B1 JP 2012-507865 A JP 5333977 B2 KR 10-1173799 B1 KR 10-2011-0084221 A SG 177975 A1 SG 177976 A1 TW 201027673 A TW I397975 B US 2010-0112808 A1 US 2011-0039404 A1 US 2012-0021594 A1 US 7824986 B2 US 8034687 B2 US 8524561 B2 WO 2010-053720 A3	28/09/2011 03/09/2014 13/07/2011 19/12/2012 02/04/2014 29/03/2012 06/11/2013 16/08/2012 21/07/2011 28/02/2012 28/02/2012 16/07/2010 01/06/2013 06/05/2010 17/02/2011 26/01/2012 02/11/2010 11/10/2011 03/09/2013 08/07/2010

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/US2016/036317Patent document
cited in search reportPublication
datePatent family
member(s)Publication
date

US 2014-0235043 A1

21/08/2014

US 9076870 B2

07/07/2015