



## (51) International Patent Classification:

*A61J 1/20* (2006.01) *A61M 39/24* (2006.01)  
*A61J 1/10* (2006.01) *B01D 61/28* (2006.01)  
*A61M 1/28* (2006.01) *B01D 61/30* (2006.01)  
*A61M 39/00* (2006.01) *B65D 30/24* (2006.01)  
*A61M 39/10* (2006.01)

## (72) Inventors; and

(71) Applicants : **LO, Richard W.C.** [CA/CA]; 1750 The Queensway, Unit #448, Etobicoke, Ontario M9C 5H5 (CA). **WU, George** [CA/CA]; 11 May Street, Toronto, Ontario M4W 2X9 (CA). **TAM, Paul** [CA/CA]; 3 Gerald Street, Toronto, Ontario M2L 2M4 (CA).

## (21) International Application Number:

PCT/CA2012/000611

(74) Agents: **SINDEN, Kitt** et al.; Sim & McBurney, 330 University Avenue 6th Floor, Toronto, Ontario M5G 1R7 (CA).

## (22) International Filing Date:

22 June 2012 (22.06.2012)

## (25) Filing Language:

English

## (26) Publication Language:

English

## (30) Priority Data:

61/500,927 24 June 2011 (24.06.2011) US

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME,

[Continued on next page]

## (54) Title: MULTI-CONTAINER SYSTEMS AND USES THEREOF

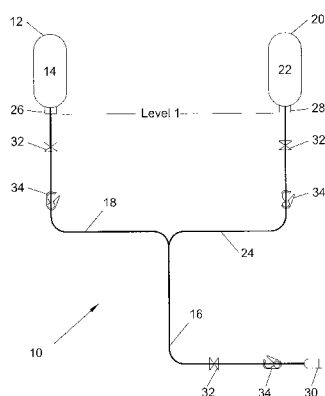


FIG. 1a

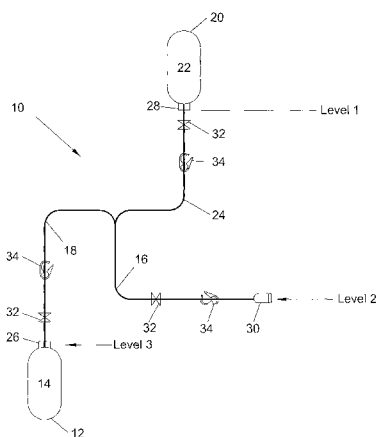


FIG. 1b

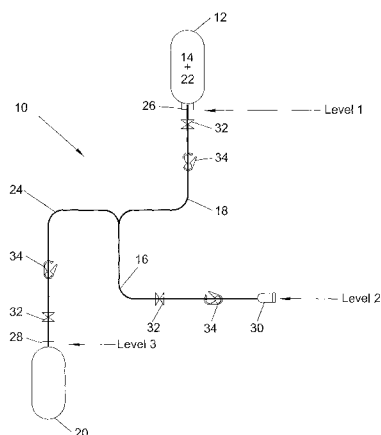


FIG. 1c

(57) Abstract: A multi-container system apparatus comprising at least two independent containers, each container of said at least two containers for containing at least one component of the final formulation of a medium; a connector; a connecting tubing line connected to the connector; at least two output tubing lines, the first and second output tubing lines of said at least two output tubing lines connecting the first and second containers of said at least two containers, respectively, to the connecting tubing line.



MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

**(84) Designated States** (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ,

**Published:**

— *with international search report (Art. 21(3))*

## Multi-Container Systems and Uses Thereof

### Field of the Invention

The present invention relates to multi-container systems and uses thereof.

- 5 More particularly, the present invention relates to multi-container systems for storing, mixing and/or dispensing desired media and uses thereof.

### Background of the Invention

- Kidney dialysis covers both extra-corporeal (hemodialysis etc.) and intra-  
10 corporeal (peritoneal dialysis) modalities. Peritoneal dialysis is a well-established medical procedure for correcting end stage renal failure (ESRF). The principles of operation of peritoneal dialysis start with initial drain, followed by fill, dwell and drain, known as a cycle. Classification of peritoneal dialysis therapy are based on the number of cycles (fill, dwell and drain), the fill volume of dialysis fluid used per cycle,  
15 the time of treatment and whether the operation is done manually or with a machine.

Machine or automatic operations are done mostly at night using cyclers, also known as automated peritoneal dialysis (APD) machines. APD machines normally utilize 3, 5 or 15-liter pre-sterilized fluid containers (bags).

- The majority of peritoneal dialysis patients are using manual peritoneal dialysis  
20 therapy, termed continuous ambulatory peritoneal dialysis (CAPD). CAPD is performed during the day and utilizes pre-sterilized 2 liters or less, fluid bags. Application of CAPD requires instillation of about two liters of prepackaged fresh sterile dialysate into the peritoneal cavity every 4 to 6 hours during 24 hours of treatment, 7 days per week.

- 25 Associated disposable peritoneal dialysis sets and the operational techniques for APD and CAPD modalities are significantly different. The sets for CAPD are very simple for manual manipulations. However, sets for APD machines are functionally complex in design and operation.

- Due to the increased utilization of peritoneal dialysis for treating patients with  
30 ESRF, there is a need to provide better products to advance this medical treatment. Because of the low annual operating cost of peritoneal dialysis, coupled with initial

clinical benefits, peritoneal dialysis is becoming the first choice of dialysis therapy in the developing world.

There is an urgent need to provide biocompatible peritoneal dialysis fluids and efficient techniques that could prolong the viability of the peritoneal membrane. The current art formulates media as a completed product in a single storage container. The conventional peritoneal dialysis solutions are known to be bio-incompatible because of low pH (acidic), lactate, glucose degradation products (high concentrations), and osmolality (glucose based). In addition, poor connectors, poor tubing sets and open operational systems result in frequent and/or higher peritonitis (infection) rates.

During the past decade, products have been introduced to reduce peritoneal infection rates from one episode in nine months to the current lower rate of one episode in two years or more. For example, see International Publication Nos. WO80/02706, WO 2006/001962 and WO 2010/096657; U.S. Patent Nos. 4,326,526, 4,902,282, 7,736,328, 7,208,479, 7,243,893, 7,311,886, 7,122,210, 7,169,303, 7,175,606, 7,198,611, 6,919,326, 6,986,872, 7,011,855, 7,053,059 and 5,053,003; and U.S. Patent Application Publication Nos. 2005/0020507, 2006/0172954, 2008/0125693 and 2010/0069817,

One of the main focuses has been on the peritoneal dialysis set itself. The major contributing products are the disinfectant caps for capping the tubing, the "Y" set™ and the double bag system, to name a few. The "Y" set™ includes an empty bag and connected tubes shaped like a "Y" dictating the flow of dialysis solution. Additionally, a bag filled with peritoneal dialysis solution is connected to this system. First of all, the used dialysis solution is drained into the empty bag, carrying possible bacteria from the catheter connector. Then fresh dialysis solution is flushed through the tubes and into the bag for about three seconds. The connection to the abdominal cavity remains closed during this procedure. When the tubes have been flushed, the patient's catheter connector is opened and fresh peritoneal dialysis solution is introduced into the cavity (flush-before-fill principle). Depending on the system, the flow of peritoneal dialysis solution (drainage, flush, filling) is controlled with clamps or a disc. The current double bag system uses a single container filled with dialysate and a second empty container (often of an inferior quality) used as a drain container.

These products have helped to extend the effective lifetime of the peritoneal membrane and thus have prolonged peritoneal dialysis modality for the average patient. These products have also reduced the medical complications, hospitalizations and the annual treatment cost per patient. However, the search to perfect peritoneal dialysis treatment still continues. A significant number of the new dialysate packages have been targeted to CAPD patients but because CAPD is a manual operation, some of the regulatory bodies have not accepted the operational safety of the proposed new packages. Improvements to the current art teach formulation separations and/or specific partitions of dialysate. They all use different compartments in a single bag to house the separated parts that are later admixed to produce the final dialysate. For example, United States Patent No. 7,243,893 relates to a compartmentalized single bag. Manufacturing processes are complex and hence the final products cost almost twice as much as the standard dialysate bags. Significantly, none of the prior art teaches any novel methods for administering additives.

Another main focus that has been, and is still undergoing extensive studies, is dialysate. It is also one of the highest costs, but essential parts, of the therapy. Dialysate may be considered as media made of multiple compositions. Commercial dialysate are formulated into a single bag, manufactured in individual container sizes, distributed and stocked until usage. However, the compounds in these commercially finished prepackaged compositions are not chemically and physically stable. It is well known in the art that some of the compounds in dialysate are catalysts that may speed up the breakdown of their companion compounds. Under certain conditions, some compounds may also induce undesirable precipitations of some of the other compounds in the dialysate. Examples of unstable compounds are glucose which undergoes caramelization and/or breakdown and bicarbonate, which precipitates. Undesirable by-products produced by caramelization of glucose (as stated previously above) during sterilization and storage; produce harmful effects on the peritoneal membrane.

In order to stabilize glucose in dialysate, hydrochloric acid, acetic acid and lactic acid are added to the solution to lower the pH of the composite dialysate (calcium, sodium, potassium, chloride etc.), to a pH of 5.3. It is known that current acidic dialysate causes infusion pain and gradually destroys the peritoneal membrane.

And, even at this acidic level, glucose still undergoes caramelization during sterilization and continues to undergo gradual degradation and breakdown during storage, thus producing harmful aldehyde by-products such as, for example, formaldehyde, acetaldehyde, methylglyoxal etc. Thus, when these commercially prepared dialysate are introduced into the peritoneum of patients, these undesirable by-products and the acidity degrade the peritoneal membrane. It is relevant to note that an average peritoneal dialysis patient is infused with more than 3,000 liters of these non-biocompatible dialysis solutions per year.

Membrane damage reduces dialysis efficiency and most importantly, the length of time patients could be supported with peritoneal dialysis treatment. Patients who fail peritoneal dialysis treatment are transferred to hemodialysis. The annual cost of hemodialysis treatment may be twice as much as peritoneal dialysis. The end-stage renal disease cost containment is a major issue always at the table of the funding boards.

Clinical and animal research has identified the importance of replacing the current peritoneal dialysate with desirable alternatives that have normal pH, or higher pH near 7.2. Using current manufacturing methodologies, industries are having difficulties in re-producing desirable/beneficial dialysate that have been identified and clinically tested and proven effective over these recent years. And the selected few new dialysate that are available are priced beyond the budget of the clinics and the patients.

Thus, there is a need for a ready-to-use pre-fabricated bicarbonate dialysate, that is clinically more favorable than a glucose base solution and that is not subject to precipitation. Because of this problem desirable bicarbonate dialysate is commercially available in limited quantities and being sold at very high price.

Thus, it is an object of the present invention to overcome the deficiencies of the prior art.

Further and other objects of the invention will become apparent to those skilled in the art from reading the following summary of the invention and the preferred embodiments described and illustrated herein.

#### Summary of the Invention

In accordance with an aspect of the present invention, there is provided a multi-container system apparatus comprising: (a) at least two supply containers capable of housing at least one substance; (b) a connector; (c) a connecting tube connected to the connector; and (d) at least two supply tubes, the first supply tube  
5 connecting the first supply container with the connecting tube and the second supply tube connecting the second supply container with the connecting tube.

In an embodiment of the present invention, at least one of the at least two supply containers comprises at least one port for the introduction and removal of the at least one substance.

10 In an embodiment of the present invention, the at least two supply containers are selected from the group consisting of bags, bottles, syringes, cartridges, pumps and tubing.

In an embodiment of the present invention, the apparatus comprises at least three clamps for selectively clamping any one of the supply and connecting tubes.

15 In an embodiment of the present invention, the at least three clamps are manually operated.

In an embodiment of the present invention, at least one of the supply and connecting tubes carries a valve.

20 In an embodiment of the present invention, each of the supply and connecting tubes carry a valve.

In an embodiment of the present invention, the valve is a check valve.

In an embodiment of the present invention, at least one of the supply and connecting tubes carry a locking connector.

25 In an embodiment of the present invention, each of the supply and connecting tubes carry a locking connector.

In an embodiment of the present invention, at least one of the supply and connecting tubes carry a filter.

In an embodiment of the present invention, each of the supply and connecting tubes carry a filter.

30 In an embodiment of the present invention, the filter is a micron filter.

In an embodiment of the present invention, at least one of the at least two supply containers comprises a housing diaphragm.

In an embodiment of the present invention, each of the at least two supply containers comprises a housing diaphragm.

In an embodiment of the present invention, the housing diaphragm is a breakable seal.

5 In an embodiment of the present invention, at least one of the supply containers contains at least one substance.

In an embodiment of the present invention, the first supply container contains at least one substance and the second supply container is empty.

10 In an embodiment of the present invention, the first and second supply containers contain at least one substance.

In an embodiment of the present invention, the at least one substance of the second supply container is the same as the at least one substance of the first supply container.

15 In an embodiment of the present invention, the at least one substance of the second supply container is different from the at least one substance of the first supply container.

In an embodiment of the present invention, the at least one substance is selected from the group consisting of a gas, a liquid, a semi-solid and a solid.

20 In an embodiment of the present invention, the at least one substance is in the form of a salt.

In an embodiment of the present invention, the solid is in a form selected from the group consisting of a powder, a crystal, a granule and a particle.

25 In an embodiment of the present invention, the at least one substance of the first supply container is at least one component of the final composition of a medium and the at least one substance of the second supply container is at least another component of the final composition of the medium.

30 In an embodiment of the present invention, the second supply container is configured such that the contents contained therein can flow into the first supply container to mix the contents of the second supply container with the contents of the first supply container to reconstitute a medium.



In an embodiment of the present invention, the first and second supply containers are configured such that the medium can flow back and forth at least one time between the first and second supply containers.

5 In an embodiment of the present invention, the first and second supply containers are configured such that the medium can flow back and forth a plurality of times between the first and second supply containers.

10 In an embodiment of the present invention, one of the at least two supply containers, when the contents contained therein have been transferred partially or completely out therefrom, is configured such that it can be used as a drain or a sampling container.

In an embodiment of the present invention, the second container, when the contents contained therein have been transferred partially or completely out therefrom, is configured such that it can be used as a drain or a sampling container.

15 In an embodiment of the present invention, the apparatus comprises three supply containers and three supply tubes, the first supply tube connecting the first supply container with the connecting tube, the second supply tube connecting the second supply container with the connecting tube, and the third supply tube for connecting the third supply container with the connecting tube.

20 In an embodiment of the present invention, the apparatus comprises three supply containers and three supply tubes, the first supply tube connecting the first supply container with the connecting tube, the second supply tube connecting the second supply container with the connecting tube, and third supply tube connecting the third supply container with the connecting tube.

25 In an embodiment of the present invention, the apparatus comprises three supply containers and three supply tubes, the first supply tube connecting the first supply container with the connecting tube, the second supply tube connecting the second supply container with the connecting tube, and third supply tube connecting the third supply container with the first supply tube.

30 In an embodiment of the present invention, the apparatus comprises three supply containers and three supply tubes, the first supply tube connecting the first supply container with the third supply container, the third supply tube connecting the

third supply container with the connecting tube and the second supply tube connecting the second supply container with the connecting tube.

In an embodiment of the present invention, the apparatus comprises three supply containers, three supply tubes, a drain container and a drain tube, the first  
5 supply tube connecting the first supply container with the third supply container, the third supply tube connecting the third supply container with the second supply container and the second supply tube connecting the second supply container with the connecting tube, and the drain tube connecting the drain container with the connecting tube.

10 In an embodiment of the present invention, the apparatus comprises three supply containers, three supply tubes, a drain container and a drain tube, the first supply tube for connecting the first supply container with either the second or third supply container, the third supply tube for connecting the third supply container with the second supply container and the second supply tube connecting the second supply  
15 container with the connecting tube, and the drain tube connecting the drain container with the connecting tube.

In an embodiment of the present invention, the apparatus comprises three supply containers, three supply tubes, a drain container, and a drain tube, the first supply tube connecting the first supply container with the connecting tube, the  
20 second supply tube connecting the second supply container with the connecting tube, the third supply tube connecting the third supply container with the connecting tube, and the drain tube connecting the drain container with the connecting tube.

In an embodiment of the present invention, the apparatus comprises three supply containers and four supply tubes, the first supply tube connecting the first  
25 supply container with the connecting tube, the second supply tube connecting the second supply container with the connecting tube, the third supply tube connecting the third supply container with the connecting tube, and the fifth supply tube connecting the second supply tube with the second and third supply containers.

In an embodiment of the present invention, the apparatus comprises four  
30 supply containers and four supply tubes, the first supply tube connecting the first supply container with the connecting tube, the second supply tube connecting the second supply container with the connecting tube, and third supply tube connecting

the third supply container with the first supply tube, and the fourth supply tube connecting the fourth container with the connecting tube.

In an embodiment of the present invention, the apparatus comprises four supply containers and five supply tubes, the first supply tube connecting the first  
5 supply container with the connecting tube, the second supply tube connecting the second supply container with the connecting tube, the third supply tube connecting the third supply container with the connecting tube, the fourth supply tube connecting the fourth supply container with the connecting tube, and the fifth supply tube connecting the first supply tube with the third and fourth supply containers.

10 In accordance with another aspect of the present invention, there is provided a multi-container system apparatus comprising: first, second and third supply containers; a connector; a connecting tube connected to the connector; first, second and third supply tubes; a drain container; and a drain tube, wherein the first, second and third supply containers are connected in series such that the first supply tube  
15 connects the first supply container with the second supply container, the second supply tube connects the second supply container with the third supply container, the third supply tube connects the third supply container with the connecting tube, and the drain tube connects the drain container with the connecting tube.

In an embodiment of the present invention, the apparatus further comprises  
20 fourth and fifth supply tubes connected with the second supply container, each of the first, second, fourth and fifth supply tubes terminating with a locking connector, wherein the second supply container is detached from the serial connection, the fourth supply tube for connecting the second supply container with the first supply tube via mating locking connectors and the fifth supply tube for connecting the  
25 second supply container with the second supply tube via mating locking connectors, the second supply tube carrying a filter between the locking connector and the third supply container, the locking connectors providing a desired option for reconnecting the second supply container in series with the first and third supply containers at any time.

30 In an embodiment of the present invention, the second supply container is detachable and the first supply tube communicates with the third supply container via the locking connector in line with the filter, the second supply container comprising a

compatible third locking connector, the third locking connector permitting the second supply container to be inserted between the first supply container and the filter when desired and the first supply container, when emptied, may be relocated to a fourth locking connector in the fifth tubing line, to serve as a drain container or a sample container.

In an embodiment of the present invention, the third and fourth supply containers are connected in parallel with their respective supply tubes with the supply tubes of the first and second supply containers.

In an embodiment of the present invention, the supply tube of the third and/or fourth supply containers house locking connectors.

In an embodiment of the present invention, the locking connectors accommodate multiple supply containers that have compatible locking connectors.

In an embodiment of the present invention, a drain tube with a locking connector is attached to the fourth supply tube and a drain container is attached to the locking connector.

In an embodiment of the present invention, at least one of the supply containers is used as a drain container.

In an embodiment of the present invention, at least one of the supply containers is used as a sample container.

In an embodiment of the present invention, the supply tubes carry locking connectors comprising filters.

In an embodiment of the present invention, said second supply container is connected to the second supply tube via a second locking connector and another auxiliary supply container with an independent medium is attached to the port of the second supply container.

In an embodiment of the present invention, the second supply container is detachable at a second locking connector.

In an embodiment of the present invention, the second supply container that is detachable at a second locking connector comprises a filter after the second locking connector.

In an embodiment of the present invention, the second supply container is connected to the second locking connector at the start.

In an embodiment of the present invention, the second supply container has an auxiliary supply container attached to its side.

In an embodiment of the present invention, the at least one detachable second supply container comprises more than one detachable supply container which are attached in sequence to discharge their respective contents into the attached first supply container, and one of the at least one second supply containers is used as a drain container or sample container accordingly.

In an embodiment of the present invention, a third supply container is placed in the first supply tube and the third supply container houses a medium to be transferred into the first supply container, and the second supply container when emptied partially or completely, is used as a drain or a sampling container, transforming the apparatus into a double bag system.

In an embodiment of the present invention, the first supply container is connected to the first supply tube via a first locking connector that accepts different sizes of the first supply containers with same or different contents and where a filter is placed after the first locking connector.

In an embodiment of the present invention, either the first supply container or the second supply container, when their respective contents are emptied partially or completely, are utilized as the drain container of a double bag system accordingly.

In an embodiment of the present invention, the apparatus further comprises an additional two supply containers arranged in parallel with their inputs joined together and communicating with the second supply tube and the outputs of the two additional supply containers joined to the third supply tube such that the contents of the second supply container may flow through said two additional supply containers.

In an embodiment of the present invention, the first supply container and the first supply tube are removed and the contents of the second supply container could be made to flow or circulate through the two additional supply containers.

In accordance with another aspect of the present invention, there is provided a peritoneal dialysis set comprising: at least two supply containers, the first supply container of the at least two supply containers for containing at least one component of a final dialysate for filling a patient, and the second supply container of the at least two supply containers for containing at least one component of the final dialysate; a

connector; a connecting tube connected to the connector; at least two supply tubes, the first supply tube of the at least two supply tubes connecting the first supply container to the connecting tube and the second supply tube of the at least two supply tubes connecting the second supply container to the connecting tube.

5           In an embodiment of the present invention, the connector is a junction.

          In an embodiment of the present invention, the connector is a Y- junction or a T-junction.

          In an embodiment of the present invention, the connector is a patient connector configured to connect to a patients' transfer set.

10           In an embodiment of the present invention, the peritoneal dialysis set further comprises at least three clamps, the first, second and third clamps of the at least three clamps for selectively clamping any one of the supply and connecting tubes.

          In an embodiment of the present invention, the at least three clamps is manually operated.

15           In an embodiment of the present invention, at least one of the at least two supply containers comprises an apparatus for hanging the supply container.

          In an embodiment of the present invention, each of the at least two supply containers comprise at least one port for the introduction or the removal of the at least one component of the final dialysate.

20           In an embodiment of the present invention, the peritoneal dialysis set further comprises a flow control device for selectively clamping any one of the supply and connecting tubes.

          In an embodiment of the present invention, at least one of the at least two supply containers is a two liter container.

25           In an embodiment of the present invention, at least one of the supply and connecting tubes is fitted with a removable plug.

          In an embodiment of the present invention, the connecting tube is sized to extend to and fit within a drain container when a patient connected to the set is sitting or standing.

30           In an embodiment of the present invention, one of the at least two supply containers is a drain container.

In an embodiment of the present invention, the peritoneal dialysis set further comprises at least one cap to close the connector during at least one patient dwell.

In an embodiment of the present invention, at least one of the at least two supply containers is initially full.

5 In an embodiment of the present invention, at least the second supply container of the at least two supply containers is filled with a different component of the final dialysate than the first supply container of the at two supply containers.

In an embodiment of the present invention, the at least two supply containers are separated by a frangible plug.

10 In accordance with another aspect of the present invention, there is provided a peritoneal dialysis system for use with the peritoneal dialysis set described above, the system including at least one of: (i) a drain container configured to receive and secure the connecting tube and (ii) a patient transfer set configured to connect to the connector.

15 In accordance with another aspect of the present invention, there is provided a peritoneal dialysis method comprising: connecting at least two supply containers to a connector, each of the first and second supply containers of the at least two supply containers full of at least one component of a final dialysate for filling a patient; transferring the at least one component of the second supply container to the first  
20 supply container to form the final dialysate; connecting the connector to a patient's transfer set; draining the patient through the connector into a drain container; and filling the patient from the first supply container.

In an embodiment of the present invention, the transfer of the at least one component of the second supply container to the first supply container is partial.

25 In an embodiment of the present invention, the transfer of the at least one component of the second supply container to the first supply container is complete.

In an embodiment of the present invention, connecting the at least two supply containers to the connector comprises connecting the at least two supply containers to a connecting tube connected to the connector.

30 In an embodiment of the present invention, connecting the connector to the patient's transfer set comprises at least one of: (i) providing a cap on the connector

that is removed for connection; and (ii) configuring the connector to be connected fluidly to the patients' transfer set.

In an embodiment of the present invention, draining through the connector comprises preventing flow from the at least two supply containers to the connector, preventing flow from the first supply container to the second supply container, and urging flow from the patient to the drain container.

In an embodiment of the present invention, urging flow from the patient to the drain container comprises lowering the drain container below the patients' access point.

In an embodiment of the present invention, filling the patient from the first supply container comprises preventing flow from the connector to the second supply container, preventing flow from the first supply container to the second supply container, and urging flow from the first supply container through the connector to the patient.

In an embodiment of the present invention, the drain container is the second supply container.

In an embodiment of the present invention, urging flow from the first supply container through the connector to the patient comprises raising the first supply container above a patients' access point.

In an embodiment of the present invention, transferring the at least one component of the second supply container to the first supply container comprises preventing flow from the second supply container to the connector and urging flow from the second supply container to the first supply container.

In an embodiment of the present invention, urging flow from the second supply container to the first supply container comprises lowering the first supply container below the second supply container.

In an embodiment of the present invention, the peritoneal dialysis method further comprises flushing the supply and connecting tubes by preventing flow from the second supply container to the first supply container and urging flow from the first supply container through the supply and connecting tubes to the drain.



In an embodiment of the present invention, the peritoneal dialysis method further comprises allowing for a dialysate dwell by preventing flow from the at least two supply containers to the connector and flow from the connector to the drain.

5 In an embodiment of the present invention, the peritoneal dialysis method further comprises disconnecting the patients' transfer-set from the connector during the dialysate dwell.

In an embodiment of the present invention, filling a patient with a dialysate comprises filling the first supply container containing at least one component of the dialysate with at least another component of the dialysate from the second supply  
10 container to form the final dialysate and filling the patient with the final dialysate from the first supply container.

The peritoneal dialysis set of the present invention provides, in one embodiment, an improvement in the treatment of kidney dialysis patients.

The multi-container system apparatus of present invention provides, in one  
15 embodiment, the means for storing and for providing desired media (gases, liquids, semi-solids and solids including powders, crystals and granules) formulated with multiple combinations of elements, compounds and/or compositions. If these media were already formed and housed in a single container and ready for use, they may undergo transformation during sterilization, curing and/or storage. In addition, poor  
20 handling and certain environmental conditions may generate bacteria growth in the media. The containers of the present invention may be in the form of bags, bottles, syringes cartridges, pumps, tubing etc.

In the multi-container system apparatus of the present invention, components of primary media may be separated into parts and stored in one or more containers.  
25 Additives may also be housed in one or more additional containers, some of which may either be initially attached to the main system or may be in independent detachable containers that may be selectively connected to the main system via a coupling connector. The containers may be arranged in parallel or in series to achieve optimum operation and safety.

30 The multi-container apparatus system of the present invention also provides bi-directional fluid paths and flows to achieve easy and complete mixing of

components stored in separate containers and/or compartments. The usage of the containers may be optimized in every arrangement.

Any one of the embodiments of the multi-container system apparatus of the present invention may be operated manually or with the assistance of a device,  
5 equipment and/or a machine.

In one embodiment of the present invention, the multi-container system apparatus is a peritoneal dialysis set that provides stable, safe and desirable dialysate for kidney dialysis treatments, whether this desirable dialysate is separated into parts, requires additives, undergoes sterilization or not. The apparatus of the present  
10 invention also provides a multi-container system for long-term storage of separated parts of dialysate and, later mixing the separated parts together to constitute desired final product and/or for safe addition of additives. The apparatus of the present invention further provides effective, safe and reliable applications.

Using peritoneal dialysis solution (dialysate) packaging to demonstrate the  
15 apparatus of the present invention, does not limit the scope of this invention to dialysate only or to medical applications only. Parallel applications extend to other industries as well, such as, for example, methods and procedures for mixing medications, paints, beverages, glues, solvents etc. These applications may benefit from the apparatus and method of the present invention in one or many other  
20 versions. Particularly, it is the aim of the present invention to also provide alternate and other useful embodiments that may be used individually, or in combination, to obtain unique advantages.

The novel multi-container system of the present invention provides increased reliability in the reconstitution of the final dialysate. Although the present invention  
25 benefits the CAPD technique, it is equally applicable to all forms of peritoneal modalities including manual peritoneal dialysis and the automated peritoneal dialysis systems (IPD, CCPD, NPD etc.). In general, this system would benefit any operation and/or procedure that use a singular medium or multiple media and, the medium or media, when fully constituted, may be unstable under certain processing and storage  
30 conditions.

The present invention provides an apparatus and use of an apparatus for producing and/or storing separated components of media and, later safely mixing said

components to re-constitute said media for use whenever and wherever required. The components or parts of the components of the media may be reactive or non-reactive, and may be in the form of gases, liquids, solids, powders, crystals, granular and/or salts.

5           The embodiments of the multi-container system of the present invention may be operated manually or with an assistance of a device, equipment and/or a machine. This novel peritoneal dialysis system is being introduced to enhance the art of current CAPD/Manual procedures and to deliver varieties of acceptable biocompatible peritoneal dialysis solutions safely and at affordable prices. Also it provides the means  
10   for safely storing and for providing unaltered, desired media (gases, liquids, solids, powders, crystals, granular and/or salts) formulated with multiple combinations of compounds and/or elements. The system also teaches bidirectional material flow paths for achieving easy and complete mixing of components stored in separated but integrated containers. The usage of the containers is optimized in every arrangement  
15   to transform the system into an acceptable system equivalent to the Double Bag System™ and/or “Y” set system™. The combinational effects of the features of the multi-container apparatus system of the present invention are to help to extend lifetime performance of peritoneal membrane. It is also based on well-proven clinical procedure that closed CAPD system, built on the principles of Double-Bag [“Y”] and  
20   “Flush-Before-Fill” operations, reduces dialysis infection rates.

          The objective of the present invention is to provide a simple and reliable storage system for producing sterile biocompatible peritoneal dialysis solutions with less and/or no harmful glucose degradation end products (GDPs). This system also helps to provide near neutral pH solutions that prolong the viability of peritoneal  
25   membrane (reduce infusion pains). And for production of bicarbonate peritoneal dialysis solutions desired peritoneal dialysis solutions are separated into two or more stable parts and housed in different and independent containers for sterilization and storage until the time of usage. At the time of application the system also transforms into a closed Double Bag system for safe manual operation.

30           With the peritoneal dialysis set of the present invention, the osmotic agents (glucose etc.) can be stored at much lower pH, separately from the electrolytes. This reduces the formation of harmful glucose degradation products.

The peritoneal dialysis set of the present invention is optimized to provide conditions for achieving the most biocompatible peritoneal dialysis solutions: (1) higher pH (near neutral), (2) bicarbonate buffer, (3) reduced glucose degradation products, (4) osmolality (safe glucose based), (5) other alternate osmotic based peritoneal dialysis solutions (amino acids, icodextrin etc.), (6) transformation into Double Bag CAPD closed system (for reduction of infection rate).

Further and other advantages of the present invention will be understood from the rest of the specification.

#### Brief Description of the Drawings

10 The present invention will be further understood from the following detailed description with references to the following drawings in which:

Fig. 1a illustrates one embodiment of the peritoneal dialysis set of the present invention showing two supply containers, each storing at least one component of a final dialysate and both connected to a connecting tube via their respective supply tubes.  
15

Fig. 1b illustrates the embodiment of Fig. 1a wherein the first supply container is lowered to position relative to the second supply container for performing a mixing phase using the peritoneal dialysis set of the present invention.

Fig. 1c illustrates the embodiment of Figs. 1a and 1b wherein the relative positions of the first and second supply containers are exchanged for performing a drain phase followed by a filling phase.  
20

Fig. 2a illustrates another embodiment of the peritoneal dialysis set of the present invention showing three supply containers, the third supply container positioned in series with the first supply container.

25 Fig. 2b illustrates another embodiment of the peritoneal dialysis set of the present invention showing three supply containers and a drain container, the third supply container positioned between, and in series with, the first and second supply containers.

Fig. 2c illustrates an alternative embodiment of the peritoneal dialysis set illustrated in Fig. 2b wherein the third supply container is detachable.  
30

FIG. 3 illustrates another embodiment of the peritoneal dialysis set of the present invention showing four supply containers arranged in parallel, the third supply

container connected to the first supply tube via a third supply tube and the fourth supply container connected to the second supply tube via the fourth supply tube.

Fig. 4a illustrates another embodiment of the peritoneal dialysis set of the present invention showing four supply containers wherein the third and fourth supply  
5 containers are located in the common tubing of the main system.

Fig. 4b is an alternative embodiment of the peritoneal dialysis set of Fig. 4, wherein the first supply container has been eliminated.

Fig. 5a illustrates an alternative embodiment of the peritoneal dialysis set illustrated in Fig. 2a wherein third supply container is an optional detachable  
10 container that when added to the set, is arranged in parallel with the first and second supply containers and is connected to the connecting tube via a third supply tube.

FIG. 5b illustrates the embodiment of the peritoneal dialysis set of Fig. 5a wherein multiple third supply containers may be added to, and removed from, the set one after another.

15 Fig. 6a illustrates an alternative embodiment of the peritoneal dialysis set illustrated in Fig. 5a showing a drain container connected to the connecting tube via a drain tube.

Fig. 6b illustrates an alternative embodiment of the peritoneal dialysis set illustrated in Fig. 6a wherein the drain container is detachable.

20 Fig. 7 illustrates an alternative embodiment of the peritoneal dialysis set illustrated in Fig. 5a wherein the first supply container is also detachable.

Fig. 8 illustrates an alternative embodiment of the peritoneal dialysis set illustrated in Fig. 1a wherein the first supply container is detachable.

Fig. 9 illustrates an alternative embodiment of the peritoneal dialysis set  
25 illustrated in Fig. 1a wherein the second supply container is detachable and the set further comprises a third supply container arranged in series with second supply container.

Similar references are used in different figures to denote similar components.

#### Detailed Description of the Preferred Embodiments

30 Referring now to the drawings and in particular to Figs. 1a, 1b and 1c, one embodiment of the multi-container system apparatus of the present invention is shown. To demonstrate an application of the apparatus of the present invention, a

peritoneal dialysis double bag system is used to illustrate the administration of a normal peritoneal dialysis treatment. The peritoneal dialysis set 10 of the present invention includes a first supply container 12 containing at least one component 14 of a final dialysate for filling a patient (not shown) and fluidly connected to a connecting tube 16 via a first supply tube 18. The set 10 also includes a second supply container 20 containing at least another component 22 of the final dialysate that is fluidly connected to the connecting tube 16 via a second supply tube 24. First supply container 12 is provided with a port 26 for connecting to the connecting tube 16 via supply tube 18. Second supply container 20 is provided with port 28 for connecting to the connecting tube 16 via supply tube 24. The connecting tube 16 terminates with a patient connector 30 that is configured to mate in a releasable and fluid tight manner (e.g., threaded with o-ring seal) with a patient's transfer set (not shown), which leads to a catheter (not shown) implanted inside the patient's peritoneum (not shown). The first and second supply tubes 18 and 24 carry frangibles, in this embodiment check valves 32 that must be broken to allow flow into and out of the respective first and second supply containers 12 and 20. The first and second supply tubes 18 and 24 also carry clamps, in this embodiment reusable manual clamps 34 for controlling the flow into and out of the respective first and second supply containers 12 and 20. The connecting tube 16 also carries a frangible, in this embodiment a check valve 32 that must be broken to allow flow into and out of the patient and a clamp 34 for controlling the flow into and out of the patient. Filters (not shown), in one embodiment, micron filters, may be integrated into any supply tube or connecting tube or into any port or within any part or parts of the multi-container system apparatus of the present invention.

In one embodiment, supply containers 12 and 20, supply tubes 18 and 24, connecting tube 16 and connector 30 are made of medical grade materials, such as Class VI materials or better, e.g., PVC or polyolefin-based non-PVC material. Connector 30 can also be made of Hytrel, PVC or polycarbonate. Supply tubes 18 and 24 and connecting tube 16 can be any length. In one embodiment, supply tubes 18 and 24 can be about three feet in length and connecting tube 16 can be about 2.5 feet in length.

With the peritoneal dialysis set 10 of the present invention, supply containers 12 and 20 are both initially full and hold the patient's prescribed one cycle treatment volume (e.g., 2-3 liters) collectively in one embodiment (plus an extra amount for flushing). With the peritoneal dialysis set 10 of the present invention, the separated components 14 and 22 are used to re-generate the desired composition of the final dialysate for filling the patient. Gravitational force is used to affect the transfer of the separated components 14 and 22 and of the final dialysate throughout the entire system.

Starting with the application, the two supply containers 12 and 20 are placed at an upper altitude, level 1 (see FIG. 1a). By choice, when ready to complete the desired final formulation of the dialysate, first supply container 12 is lowered to position level 3 (see FIG. 1b). Check valves 32 of supply tubes 24 and 18, respectively are broken in sequence to open, in sequence, the supply tubes 24 and 18, respectively. Clamps 34 of supply tubes 18 and 24 respectively are then opened in sequence. By gravity, the component 22 is transferred from supply container 20 to supply container 12, where it mixes with the component 14. The resultant product (14 + 22) is mixed thoroughly in supply container 12 producing the final formulation of the complete dialysate for filling the patient. Then the position of supply container 12 is exchanged with the position of supply container 20, i.e., supply container 12 is moved to the higher position level 1 and the supply container 20, now empty, is moved to the lower position level 3, to become a drain container.

The patient, connected to the patient line connector 30, now drains his/her used dialysate into the second supply container 20. For safety and by practice, a small amount of the resultant product (14 + 22) may be drained out of supply container 12 into supply container 20 to flush the supply tubes 18 and 24 and the connecting tube 16 before filling the patient. The sterile mixed dialysate contents (14 + 22) in supply container 12 may now be discharged out through the patient connector 30 to the patient.

It may be acceptable to redirect the resultant product (14 and 22) back and forth between supply containers 12 and 20 more than once, if so wished, to produce efficient mixing of 14 with 22 before the final product is discharged. If preferred, the mixed product 14 + 22 may be stored in, and discharged from, supply container 20

rather than supply container 12. If that were the case, supply container 12 would become the empty drain container to be positioned at level 3. Then the supply container 20 would be at the highest position, level 1.

5 The transfer of contents from supply container into another may be achieved using gravitational force, *i.e.*, by lowering one supply container with respect to the other. For example, when supply container 12 is placed lower than supply container 20, the medium 22 flows into supply container 12 to mix with medium 14. Persons skilled in the art knowledgeable in hydrodynamic principles would understand that media transfer, whole or partial, from one container to the others, could be achieved  
10 using other applied forces such as pressure, pumps, vacuum, centrifugal, electromagnetic, Hall Effect, screws etc. Hence, the present invention includes within its scope all applicable principles that are capable of transporting and/or transferring media, in whole or in part, from one place to another.

It may be necessary to separate the required desirable product into more than  
15 two independent components, *i.e.*, into three or more independent components. Figs. 2a, 2b, 2c, 3, 4a, 4b, 5a, 5b, 6a, 6b, 7 and 9 demonstrate alternate embodiments of such requirements. Some of the supply containers may not be attached to the main system to start with as shown in Figs. 2c, 5a, 5b, 6a, 6b, 7, 8 and 9. For peritoneal dialysis, the additional container(s) may be empty or may contain at least  
20 one component of the final dialysate for filling a patient that is the same as, similar to, or different from, the at least one component contained in any of the other supply containers. The additional container(s) may contain at least one component of the final dialysate for filling a patient in an amount that is the same as, similar to, or different from, the at least one component contained in any of the other supply  
25 containers. The additional container(s) may contain at least one component of the final dialysate for filling a patient at a volume that is the same as, similar to, or different from, the at least one component contained in any of the other supply containers. For example, the additional container(s) may contain electrolytes, buffering agents and/or osmotic agents. More specifically, an additional supply  
30 container may contain either bicarbonate or dextrose concentrate to produce a final dialysate for filling a patient selected from the group consisting of a 1.5%, 2.5% and 4.25% dialysate, or other percentages of osmotic agent.



Fig. 2a illustrates another embodiment of the peritoneal dialysis set 10 of the present invention wherein a third supply container 36 is arranged in series with the first supply container 12 such that the first supply container 12 is connected to the third supply container 36 through port 38 via the first supply tube 18 and the third supply container 36 is connected through port 40 to the connecting tube 16 via the third supply tube 42. Third supply container 36 may contain at least one component 44 of the final dialysate that is the same as, similar to or different from, the at least one component 14 and 22 of the first and second supply containers 12 and 20, respectively.

Fig. 2b illustrates another embodiment of the peritoneal dialysis set of the present invention wherein a third supply container 36 is arranged between, and in series with, the first and second supply containers 12 and 20, respectively such that the first supply container 12 is connected to the third supply container 36 via the first supply tube 18 and the third supply container 36 is connected to the second supply container 20 through port 46 via the third supply tube 42 and the second supply container 20 is connected to the connecting tube 16 via the second supply tube 24. Third supply container 36 may contain at least one component 44 of the final dialysate that is the same as, similar to or different from, than the at least one component 14 and 22 of the first and second supply containers 12 and 20, respectively. In this embodiment, the peritoneal dialysis set 10 also contains a drain container 48 connected to the connecting tube 16 through port 50 via a drain tube 52. In this embodiment, the first and second supply tubes 18 and 24, respectively carry check valves 32, and second supply tube 24, connecting tube 16 and drain tube 52 carry clamps 34.

Fig. 2c illustrates an alternative embodiment of the peritoneal dialysis set 10 illustrated in Fig. 2b wherein the third supply container 44 is readily attachable/detachable. In particular, the first and third supply tubes 18 and 42, respectively carry a locking connector 54 comprised of male and female engaging portions 56 and 58, respectively. In this embodiment, the third supply tube 42 carries a filter 59 between male engaging portion 56 of the locking connector 54 and port 46 of the second supply container 20.

Fig. 3 illustrates another embodiment of the peritoneal dialysis set 10 of the present invention with additional third and fourth supply containers 36 and 60, respectively, arranged in parallel with first and second supply containers 12 and 20, respectively. Third supply container 36 is connected to the first supply tube 18 via the third supply tube 42 and fourth supply container 60 is connected to the second supply tube 24 through port 62 via the fourth supply tube 64. Each of third and fourth supply containers 36 and 60, respectively, may be empty or may contain the same, similar or different components and/or volumes contained in first and second supply containers B1 and B2, respectively. In this embodiment, third and fourth supply containers 36 and 60, respectively contain a component 44 and 66, respectively of the final dialysate.

FIG. 4a is an alternative embodiment of the peritoneal dialysis set 10 illustrated in Fig. 3 carrying third and fourth supply containers 36 and 40 arranged in parallel with the first supply container 12 and simultaneously arranged in parallel and in series with the second supply container 20. In particular, the third supply container 36 is connected to the second supply tube 24 through port 38 via a first input supply tube 68 and to the connecting tube 16 through port 40 via third supply tube 42. The fourth supply container 60 is connected to the first input supply tube 68 through port 70 via a second input supply tube 72 and to the connecting tube 16 through port 62 via fourth supply tube 64. In this embodiment, the first and second input supply tubes 68 and 72, respectively, carry check valves 32 and the second supply tube 24 carries a second check valve 32 located between the connection with the connecting tube 16 and the connection with the first input supply tube 68. The media 22 of the second supply container 20 may be circulated through the third supply container 36 or the fourth supply container 60 independently, or through both the third and fourth supply containers 36 and 60, respectively together, to produce a desired mixed product. Although not shown here, some of the tubing lines may have dual channels to facilitate re-circulation or bi-directional flow accordingly.

FIG. 4b is an alternative embodiment of the peritoneal dialysis set 10 illustrated in Fig. 4a wherein the first supply container 12 and its associated components have been eliminated.

The illustrations shown in FIG. 5a, FIG. 5b, FIG. 6a, FIG. 6b, FIG. 7, FIG. 8 and FIG. 9 teach alternate embodiments whereby some containers may not be attached to the main system from the beginning. They also give the flexibility for selecting alternate media and/or additives to be used at any time. A typical application is providing a safe, a reliable and a needle-less apparatus for adding medications into saline bags for IV infusion. The third supply container 36 or similar can be in the form of a syringe, and/or an infusion pump etc. The third supply container 36 may contain a medium produced at different time and/or at a different place, and be connected to the main apparatus via a locking connector 54, whenever required for modification and/or for completion of the desired product.

Fig. 5a illustrates an alternative embodiment of the peritoneal dialysis set illustrated in Fig. 2a wherein the third supply container 36 is an optional detachable container that may be added later onto the system via a locking connector 54. The third supply container 36 may not be attached to the main system to start with and may not even be connected to the system at all. If and when the third supply container 36 is attached to the system, it is arranged in parallel with first and second supply containers 12 and 20, respectively. In this embodiment, supply container 36 is detachable at locking connector 54.

Fig. 5b illustrates an alternative embodiment of the multi-container system apparatus 10 illustrated in Fig. 5a employing multiple detachable third supply containers 36 that may be coupled to the female engaging portion 58 of the locking connector 54, one at a time, one after another, to extend the application of the system. No micron filter is shown here. But for such a system, placement of a filter between the locking connector 54 and clamp 34 is highly recommended. In this embodiment, first supply container 12 may be empty or not. However, first supply container 12, may also double up as a drain container if necessary. It is also possible for those schooled in the art to produce variations of the arrangements demonstrated above. The containers may also be arranged and used in sequential order of preferred steps of combining/mixing of the required media.

Some of the media may be gases, solids, powders, crystals, granular and/or salts etc., so packaged in the dry states, to avoid growth of bacteria. If this were the case, then to produce the desired resultant media, fluid may first be directed to flow

from liquid containing containers into the container(s) storing the dry media, to dissolve such said dry media accordingly. It is also possible that under certain favorable arrangements the reverse procedure may be possible.

Fig. 6a illustrates an alternative embodiment of the multi-container system apparatus 10 illustrated in Fig. 5a wherein a drain container 48 is attached to the connecting tube 16 and is employed to accommodate partial flushing of any container, that is originally attached and/or to be attached later. The addition of drain container 48, gives the flexibility for the patient to start draining his/her used dialysate into drain container 48 whilst the contents of the first, second and third supply containers 12, 20 and 36, respectively are being mixed together as explained above. In this embodiment, the drain tube 52 carries a check valve 32.

Fig. 6b illustrates an alternative embodiment of the multi-container system apparatus 10 illustrated in Fig. 6a wherein there is an alternate attachment for drain container 48 in the form of a locking connector 54 in the drain tube 52 leading to drain container 48. This allows drain container 48 to be used as either a drain and/or a sampling container. The locking connector 54 makes it possible for drain container 48 to be added to the system 10 at a later time. It also allows the flexibility for collecting samples of media through the locking connector 54. It is possible to first couple the third supply container 36 to the locking connector 54 in the third supply tube 42, empty its contents 44 then relocate the third supply container 36 at the locking connector 54 in the drain tube 52 and use the third supply container 36 as a drain container 48. This would eliminate the use of the additional drain container 48. Again, the flexibility of this invention makes it possible for any arrangement shown from Figs. 1 to 9, to employ drain container 48 accordingly.

Fig. 7 is another alternate embodiment of Fig. 5 already discussed above. This illustration shows the two additives, 14 and 44, contained in optional first and third supply containers 12 and 36, respectively, to be added now and/or later, or may be entirely omitted. The locking connectors 54 of the first and third supply tubes 18 and 42, respectively may accommodate unlimited multiple containers. This embodiment also allows either first supply container 12 or third supply container 36 to be used later as drain and/or sample container.

Fig. 8 illustrates an alternate embodiment of the apparatus 10 illustrated in Fig.

1. In Fig. 8 the first supply container 12 is detachable from the apparatus 10 via locking connector 54 carried by first supply tube 18. First supply tube 18 carries a filter 59 between the locking connector 54 and the clamp 34. In this embodiment, first supply container 12 is detachable from the apparatus 10 and may double up as a drain and/or sample container. The filter H1, in one embodiment, may be a Micron Filter HP.

Fig. 9 illustrates an alternate embodiment of the apparatus 10 illustrated in Fig.

2a. In Fig. 9, the third supply container 36 is connected to second supply container 20 via the third supply tube 42 and the second supply tube 24 of the second supply container 20 carries a locking connector 54 such that the second and third supply containers 20 and 32 respectively are detachable from the apparatus 10. The second and third supply containers 20 and 36 could form multiple sub-sets of different component combinations and/or additives that could be added onto the apparatus 10 at the time of application.

All or some of the containers, especially the detachable ones, may bear markers and/or graduations at their sides that may be used to discharge in whole or in part, or ratios of their contents, to generate required overall desired product and/or formulations.

The embodiments of the present invention, one of which is as shown in Fig. 1 and all the alternatives as described above and/or implied, could equally be fitted with similar storage/drain containers, detachable coupling connectors, and/or micron filters wherever applicable, desirable and/or needed. For example, a micron filter HP could be employed at every detachable connector.

For the purpose of illustration, the following examples are presented which should not be considered as limiting to the scope of the present invention.

#### Examples

##### Example #1: Peritoneal Dialysis

The demonstration of this application for peritoneal dialysis refers to the basic embodiment illustrated in Fig. 1a and its extensions Fig. 1b and Fig. 1c.

#### Step 1

- (i) Close all clamps

- (ii) Lower bag 12 to Level 3 (Ground Level)
- (iii) Open Clamp 34 on line 18
- (iv) Open Clamp 34 on line 24
- (v) Break to open valve 32 in line 18
- 5 (vi) Break to open valve 32 in line 24
- (vii) Allow fluid from bag 20 to empty completely into bag 12
- (viii) Shake bag 12 to mix thoroughly the composite fluid (14 + 22) in bag 12
- (ix) Close Clamp 34 on line 18

#### 10 Step 2

- (i) Move bag 12 to Level 1
- (ii) Move bag 20 to Level 3, below both Level 1 and Level 2 (patient's height)

#### Step 3

- 15 (i) Connect Patient Line Connector 30 to the patient's Transfer set (not shown) or patient's line (not shown)
- (ii) Open clamp on the patient's Transfer Set (not shown)
- (iii) Open Clamp 34 on line 16
- (iv) Break to open valve 32 in line 16
- 20 (v) Allow patient to drain waste dialysate (used dialysis fluid currently in the peritoneum) into bag 20 (serving as a Drain Bag)

#### Step 4: Flush-before-Fill

- (i) Close clamp 34 in line 16
- (ii) Open Clamp 34 in line 18 for about 5 seconds to flush solution from bag 12
- 25 into bag 20
- (iii) Close Clamp 32 on line 24

#### 5: Filling Patient

- (i) Open Clamps on Transfer Set (not shown here)
- 30 (ii) Open Clamp 34 on line 16
- (iii) Allow dialysate (composite fluid) to flow from bag 12 into patient through Patient Line Connector 30

#### Step 6: Disconnecting Patient

- 35 (i) Close all clamps; Clamps (34) and, Clamp on Transfer Set (not shown).
- (ii) Disconnect Patient Line Connector 30 from Transfer Set connector (not shown here).
- (iii) Safely and quickly cap off the end of Transfer Set connector with Disinfectant Cap (not shown here)
- 40 (iv) Cap off Patient Line Connector 30
- (v) Safely discard the Multi-Container System Set

#### Example #2: Medicated Solution

- 45 This will demonstrate application for producing desirable medicated solution for medical treatment. For example, for administering medications (*i.e.*, intravenous

(i.v.)) and/or for providing feeding fluids for parenteral nutrition. These could be made possible using illustrations shown in Figs. 5a, 5b, 6a, 6b, 7 and/or 8. Referring to the embodiment shown in Fig. 8 as a typical example, steps for producing safe medicated IV solutions are set out below. With this application a Micron Filter 59, although highly recommended, is optional.

#### Initial Step 1

- (i) Close all clamps (34)
- (ii) Check and select the prepared medication dosage stored in container 12.
- (iii) Attach container 12 via locking connector 54 to the main set carrying the container with the appropriate base solution 22, (saline etc.)
- (iv) Break to open valve 32 in line 18
- (x) Open Clamp 34 on line 18
- (xi) Break to open valve 32 in line 24
- (xii) Open Clamp 34 on line 24
- (xiii) Allow the correct amount of medication 14 to flow into container 20
- (xiv) Close clamp 34 on line 18
- (xv) Close clamp 34 on line 24
- (xvi) Shake bag 20 to mix thoroughly the composite fluid (14 + 22) in bag 20

#### Step 2: Application

- (i) Attach line connector 30 to IV line or to infusion pump (not shown here)
- (ii) Break to open valve 32 in line 16
- (iii) Open clamp 34 on line 16
- (iv) Open clamp 34 on line 24
- (v) Start the infusion therapy as per direction

#### Step 3: Ending Therapy

- (i) At the end of infusion, close clamp 34 on line 24
- (ii) Close clamp 34 on line 16
- (iii) Disconnect line connector 30 from the infusion pump or the IV line (not shown here)
- (iv) Discard the set accordingly

The illustration shown in Fig. 7 may be used for the process described above if two different medications are to be added to saline accordingly. Then container 36 may house the second medication 44. All the medications may be pre-filled and labeled accordingly by the pharmacists.

#### Example #3: Food Packaging, Preservation and/or Storage

A practical application for food packaging, preservation and/or storage and the final usage is demonstrate by the embodiment illustrated in Fig. 8.

Dehydrated food such as wheat, oats\*, baby food (may be in flour or granular format), corn flour, food for soldiers (to be carried and used during field combats), and special formulated food for astronauts etc., may be packaged under vacuum in container 20. [It makes it easier for long-term preservation. In dehydrated form, these packages are also very lightweight for transporting around]. The packaged system may be sterilized accordingly if so desired.

#### Step 1: Connections.

- 10 (i) Close all clamps (34)
- (ii) Take the appropriate container 12 housing the desired fluid: Water, milk, soup, etc., (may be heated before use)
- (iii) Remove the covers off the locking connector 56 & 58
- (iv) Attach 12 to the appropriate system using locking connector 54
- 15 (v) Break to open valve 32 attached to output 26
- (vi) Open clamp 34 of line 18
- (vii) Open clamp 34 of line 24
- (viii) Break to open valve 32 in line 24
- (ix) Transfer the fluid 14 from container 12 through the Micron Filter 59\*\* into container 20 by applying pressure to container 12, or by lowering container 20 below container 12
- 20 (x) Close clamp 34 in line 24
- (xi) Give required time for the food in 20 to hydrate properly.
- (xii) The final food could be warmed or heated up before consumption if so
- 25 desired.

NOTE: - \* These food products may be grated and roasted to produce hydrated granular or flour, that could be preserved for months. They may be sealed under vacuum.

\*\* The Micron Filter 59 may be essential to purify water and/or fluid that may be suspect of contaminations as the case may be, in the developing World or in certain uncontrolled locations such as campgrounds, wildlife, recreational areas and/or battlefields.

#### Example #4: Mixing Paint Colours

The present invention may be applied for mixing paints using embodiment shown in Fig. 7. Here, variations of extended embodiments illustrated in Fig. 3 and Fig. 7 may be used to demonstrate practical applications for mixing paint colors.



Sighting Fig. 7 for this demonstration, container 20 may contain the basic white paint or the desired base color. Two additional colors may be housed in containers 12 and 36.

Step 1: Connections

- 5 (i) Close all clamps (34)
- (ii) Select the main system that contains the base color in 20.
- (iii) Select containers 12 and 36 housing the colors to be added in ratio. (These containers will have appropriate graduations on them).
- (iv) Remove the covers from their respective connectors
- 10 (v) Attach container 12 to the system via locking connector 54 in line 18
- (vi) Attach container 36 to the system via locking connector 54 in line 42

Step 2: Adding the first color

- (i) Break open valve 32 of container 12
- 15 (ii) Open clamp 34 on line 18
- (iii) Break open valve 32 in line 24
- (iv) Apply pressure to container 12 or raise it high above container 20
- (v) Open clamp 34 on line 24
- (vi) Allow the correct amount of additive paint 14 to flow into container 22
- 20 (vii) Close clamp 34 on line 18
- (viii) Close clamp 34 on line 24

Step 3: Adding the second color

- (i) Break open valve 32 of container 36
- 25 (ii) Open clamp 34 on line 42
- (iii) Apply pressure to container 36 or raise it high above container 20
- (iv) Open clamp 34 on line 24
- (ix) Allow the correct amount of additive paint 44 to flow into container 22
- (v) Close clamp 34 on line 42
- 30 (vi) Close clamp 34 on line 24
- (vii) Shake container 20 thoroughly to obtain the desired color
- (viii) The paint may be discharged for use through line connector 30.

Note: Alternate or different color additives may be housed in alternate  
 35 containers to 12 and 36 etc. and could be added via either locking connectors 54 respectively following the same procedure stated above.

Any one of the embodiments of this invention, the Multi-Container System, may be operated manually or with an assistance of a device, equipment and/or a machine.

40 While the foregoing provides a detailed description of preferred embodiments of the present invention, it is to be understood that it is intended that all material

contained herein be interpreted as illustrative of the present invention only and not in a limiting sense. Furthermore, numerous modifications, variations and adaptations may be made to the particular embodiments of the present invention described above without departing from the scope of the present invention, which is defined in the

5 claims.

The embodiments of the invention in which an exclusive property or privilege is claimed are as follows:

1. A multi-container system apparatus comprising at least two independent containers, each container of said at least two containers for containing at least one  
5 component of the final formulation of a medium; a connector; a connecting tubing line connected to the connector; at least two output tubing lines, the first and second output tubing lines of said at least two output tubing lines connecting the first and second containers of said at least two containers, respectively, to the connecting tubing line.
- 10 2. The apparatus of Claim 1, wherein the at least one component is selected from a solid, a semi-solid, a liquid and a gas.
3. The apparatus of Claim 2, wherein the solid is in a form selected from the group consisting of a powder, a crystal and a granule.
4. The apparatus of Claim 2 or 3, wherein the solid is a salt.
- 15 5. The apparatus of any one of Claims 1 to 4, wherein at least one of the tubing lines comprises a clamp.
6. The apparatus of any one of Claims 1 to 5, wherein at least one of the tubing lines comprises a check valve.
7. The apparatus of any one of Claims 1 to 6, wherein at least one of the tubing  
20 lines comprises a locking connector.
8. The apparatus of any one Claims 1 to 7, wherein at least one of the tubing lines comprises a filter.
9. The apparatus of any one of Claims 1 to 8, wherein at least one container of said at least two independent containers comprises a housing diaphragm at the outlet  
25 of the container.
10. The apparatus of Claim 9, wherein the housing diaphragm is a breakable seal.
11. The apparatus of any one of Claims 1 to 10, wherein each container of said at least two independent containers is for storing a separate component of the final formulation of the medium.
- 30 12. The apparatus of any one of Claims 1 to 11, wherein the apparatus is configured such that the at least one component of the first container of said at least two independent containers is caused to flow into the second container of the at least

two independent containers to admix the at least one component of said first container with the at least one component of said second container to reconstitute the medium.

13. The apparatus of any one of Claims 1 to 12, wherein the apparatus is

5 configured such that the at least one component of the second container of said at least two independent containers is caused to flow into the first container of said at least two independent containers to admix the at least one component of said second container with the at least one component of said first container to reconstitute the medium.

10 14. The apparatus of Claim 13, wherein the apparatus is configured such that the admixture is caused to flow back and forth at least two times, between the first container and the second container.

15 15. The apparatus of any one of Claims 1 to 14, wherein one of the at least two independent containers is used as a drain container or a sampling container, once the at least one component has been transferred partially or completely out, thus transforming the apparatus into a double bag system.

16. The apparatus of any one of Claims 1 to 15, wherein the at least two independent containers are three independent containers and the at least two output tubing lines are three output tubing lines.

20 17. The apparatus of Claim 16, wherein the three independent containers are connected in parallel such that the first, second and third output tubing lines of the three output tubing lines connect the first, second and third containers of said three independent containers, respectively, to the connecting tubing line.

25 18. The apparatus of Claim 17, wherein at least one of the output tubing lines of the three output tubing lines and the connecting tubing line comprises a check valve.

19. The apparatus of Claim 17 or 18, wherein at least one of the output tubing lines of the three output tubing lines and the connecting tubing line comprises a clamp.

30 20. The apparatus of any one of Claims 17 to 19, wherein at least one of the output tubing lines of the three output tubing lines and the connecting tubing line comprises a locking connector.

21. The apparatus of Claim 17, wherein each of the first, second and third output tubing lines and the connecting tubing line comprises a check valve and a clamp.

22. The apparatus of Claim 21, wherein the third output tubing line of the third container comprises a locking connector such that the third container is detachable  
5 from the apparatus.

23. The apparatus of Claim 22, wherein the first output tubing line of the first container comprises a locking connector such that the first container is detachable from the apparatus.

24. The apparatus of Claim 22, wherein the apparatus further comprises a drain  
10 container and a drain tubing line connecting the drain container to the connecting tubing line.

25. The apparatus of Claim 24, wherein the drain tubing line comprises a check valve.

26. The apparatus of Claim 25, wherein drain tubing line further comprises a  
15 locking connector such that the drain container is detachable from the apparatus.

27. The apparatus of Claim 16, wherein the third container of the three independent containers is connected in series with the first container.

28. The apparatus of Claim 27, wherein the first output tubing line of the first container is connected to the third container and the second and third output tubing  
20 lines of the second and third containers, respectively, are connected to the connecting tubing line.

29. The apparatus of Claim 28, wherein at least one of the output tubing lines of the three output tubing lines and the connecting tubing line comprises a check valve.

30. The apparatus of Claim 28 or 29, wherein at least one of the output tubing  
25 lines of the three output tubing lines and the connecting tubing line comprises a clamp.

31. The apparatus of any one of Claims 28 to 30, wherein at least one of the output tubing lines of the three output tubing lines and the connecting tubing line comprises a locking connector.

30 32. The apparatus of Claim 28, wherein each of the first, second and third output tubing lines and the connecting tubing line comprises a check valve.

33. The apparatus of Claim 32, wherein each of the first and second output tubing lines and the connecting tubing line comprises a clamp.

34. The apparatus of Claim 16, wherein the third container of the three independent containers is connected in series with the second container.

5 35. The apparatus of Claim 34, wherein the third output tubing line of the third container is connected to the second container and the first and second output tubing lines of the first and second containers, respectively, are connected to the connecting tubing line.

36. The apparatus of Claim 35, wherein at least one of the output tubing lines of  
10 the three output tubing lines and the connecting tubing line comprises a check valve.

37. The apparatus of Claim 35 or 36, wherein at least one of the output tubing lines of the three output tubing lines and the connecting tubing line comprises a clamp.

38. The apparatus of any one of Claims 35 to 37, wherein at least one of the  
15 output tubing lines of the three output tubing lines and the connecting tubing line comprises a locking connector.

39. The apparatus of Claim 36, wherein each of the first, second and third output tubing lines and the connecting tubing line comprises a check valve.

40. The apparatus of Claim 37, wherein each of the first and second output tubing  
20 lines and the connecting tubing line comprises a clamp.

41. The apparatus of Claim 38, wherein the second output tubing line comprises a locking connector such that the second and third containers are detachable from the apparatus.

42. The apparatus of Claim 16, wherein the third container of the three  
25 independent containers is connected in series with both the first and second containers and the apparatus further comprises a drain container and a drain tubing line connecting the drain container to the connecting tubing line.

43. The apparatus of Claim 42, wherein the first output tubing line of the first container is connected to the third container, the third output tubing line of the third  
30 container is connected to the second container and the second output tubing line of the second container is connected to the connecting tubing line.

44. The apparatus of Claim 43, wherein at least one of the output tubing lines of the three output tubing lines, the connecting tubing line and the drain tubing line comprises a check valve.
45. The apparatus of Claim 43 or 44, wherein at least one of the output tubing  
5 lines of the three output tubing lines, the connecting tubing line and the drain tubing line comprises a clamp.
46. The apparatus of any one of Claims 43 to 45, wherein at least one of the output tubing lines of the three output tubing lines, the connecting tubing line and the drain tubing line comprises a locking connector.
- 10 47. The apparatus of Claim 44, wherein each of the first and second output tubing lines comprises a check valve.
48. The apparatus of Claim 45, wherein each of the second output tubing lines, the connecting tubing line and the drain tubing line comprises a clamp.
49. The apparatus of Claim 43, wherein each of the first and second output tubing  
15 lines comprise a check valve and each of the second output tubing line, the connecting tubing line and the drain tubing line comprises a clamp.
50. The apparatus of Claim 46 or 49, wherein each of the first and third output tubing lines comprises a locking connector such that the third container is removable from the apparatus.
- 20 51. The apparatus of Claim 50, wherein the third output tubing line comprises a filter between the locking connector and the second container.
52. The apparatus of Claim 16, wherein the second and third containers are arranged in parallel with each other and simultaneously arranged in parallel and in series with the first container.
- 25 53. The apparatus of Claim 52, wherein each of the first, second and third output tubing lines of the first, second and third containers, respectively is connected to the connecting tubing line and wherein the apparatus further comprises a first input tubing line connecting the first output tubing line with the second container and a second input tubing line connecting the first input tubing line with the third container.
- 30 54. The apparatus of Claim 53, wherein at least one of the output tubing lines, the input tubing lines and the connecting tubing line comprises a check valve.

55. The apparatus of Claim 53 or 54, wherein at least one of the output tubing lines, the input tubing lines and the connecting tubing line comprises a clamp.

56. The apparatus of any one of Claims 53 to 55, wherein at least one of the output tubing lines, the input tubing lines and the connecting tubing line comprises a  
5 locking connector.

57. The apparatus of Claim 54, wherein each of the first output tubing line and the input tubing lines comprises a check valve and the connecting tubing line comprises two check valves.

58. The apparatus of Claim 55, wherein each of the first output tubing line and the  
10 connecting tubing line comprises a clamp.

59. The apparatus of any one of Claims 1 to 15, wherein the at least two independent containers are four independent containers and the at least two output tubing lines are four output tubing lines.

60. The apparatus of Claim 59, wherein the four independent containers are  
15 connected in parallel such that the first and second output tubing lines of the four output tubing lines connect the first and second containers of the four independent containers, respectively, to the connecting tubing line and the third and fourth output tubing lines of the four output tubing lines connect the third and fourth containers of the four independent containers to the first and second output tubing lines,  
20 respectively.

61. The apparatus of Claim 60, wherein at least one of the output tubing lines of the four output tubing lines and the connecting tubing line comprises a check valve.

62. The apparatus of Claim 60 or 61, wherein at least one of the output tubing lines of the four output tubing lines and the connecting tubing line comprises a clamp.

25 63. The apparatus of any one of Claims 60 to 62, wherein at least one of the output tubing lines of the four output tubing lines and the connecting tubing line comprises a locking connector.

64. The apparatus of Claim 61, wherein each of the first, second, third and fourth output tubing lines and the connecting tubing line comprises a check valve.

30 65. The apparatus of Claim 62, wherein each of the first and second output tubing lines and the connecting tubing line comprise a clamp.



66. The apparatus of Claim 60, wherein each of the first, second, third and fourth output tubing lines and the connecting tubing line comprises a check valve and each of the first and second output tubing lines and the connecting tubing line comprises a clamp.

5 67. The apparatus of Claim 60, wherein the four independent containers are arranged in parallel with each other and the third and fourth containers of the four independent containers are simultaneously arranged in parallel and in series with the second container.

68. The apparatus of Claim 67, wherein each of the first, second, third and fourth  
10 output tubing lines of the first, second, third and fourth containers, respectively is connected to the connecting tubing line and wherein the apparatus further comprises a first input tubing line connecting the second output tubing line of the second container with the third container and a second input tubing line connecting the first input tubing line with the fourth container.

15 69. The apparatus of Claim 68, wherein at least one of the output tubing lines, the input tubing lines and the connecting tubing line comprises a check valve.

70. The apparatus of Claim 68 or 69, wherein at least one of the output tubing lines, the input tubing lines and the connecting tubing line comprises a clamp.

71. The apparatus of any one of Claims 68 to 70, wherein at least one of the  
20 output tubing lines, the input tubing lines and the connecting tubing line comprises a locking connector.

72. The apparatus of Claim 69, wherein each of the first output tubing line, the input tubing lines and the connecting tubing line comprises a check valve and the second output tubing line comprises two check valves.

25 73. The apparatus of Claim 70, wherein each of the first and second output tubing lines and the connecting tubing line comprises a clamp.

74. The apparatus of Claim 71, wherein the first output tubing line comprises a locking connector such that the first container is removable from the apparatus.

75. The apparatus of Claim 68, wherein each of the first output tubing line, the  
30 input tubing lines and connecting tubing line comprise a check valve, the second output tubing line comprises two check valves and each of the first and second output tubing lines and the connecting tubing line comprises a clamp.

76. The apparatus of Claim 5, wherein each of the first and second output tubing lines and the connecting tubing line comprises a clamp.
77. The apparatus of Claim 6, wherein each of the first and second output tubing lines and the connecting tubing line comprises a check valve.
- 5 78. The apparatus of Claim 7, wherein each of the first and second output tubing lines and the connecting tubing line comprises a locking connector.
79. The apparatus of Claim 8, wherein each of the first and second output tubing lines and the connecting tubing line comprises a filter.
80. The apparatus of Claim 5, wherein each of the first and second output tubing  
10 lines and the connecting tubing line comprises a clamp and a check valve.
81. The apparatus of Claim 80, wherein the first output tubing line further comprises a locking connector between the check valve and the clamp such that the first container is removable from the apparatus, and a filter between the locking connector and the clamp.
- 15 82. Use of the multi-container apparatus as claimed in any one of Claims 1 to 81 for peritoneal dialysis.
83. The use of Claim 82, wherein the peritoneal dialysis is continuous ambulatory peritoneal dialysis.
84. Use of the multi-container apparatus as claimed in any one of Claims 1 to 81  
20 for administering a medical solution to a patient.
85. Use of the multi-container apparatus as claimed in any one of Claims 1 to 81 for administering feeding fluids to a patient for parenteral nutrition.
86. The use Claim 84 or 85, wherein the administration is intravenous.
87. Use of the multi-container apparatus as claimed in any one of Claims 1 to 81  
25 for storing, preserving and rehydrating dehydrated foods.
88. Use of the multi-container apparatus as claimed in any one of Claims 1 to 81 for mixing paint colours.
89. A peritoneal dialysis set comprising: at least two supply containers, the first supply container of the at least two supply containers for containing at least one  
30 component of a final dialysate for filling a patient, and the second supply container of the at least two supply containers for containing at least one component of the final dialysate; a connector; a connecting tube connected to the connector; at least two

supply tubes, the first supply tube of the at least two supply tubes connecting the first supply container to the connecting tube and the second supply tube of the at least two supply tubes connecting the second supply container to the connecting tube.

90. The peritoneal dialysis set of Claim 89, wherein the connector is a junction.

5 91. The peritoneal dialysis set of Claim 89, wherein the connector is a Y- junction or a T-junction.

92. The peritoneal dialysis set of Claim 89, wherein the connector is a patient connector configured to connect to a patients' transfer set.

93. The peritoneal dialysis set of Claim 89 further comprising at least three clamps,  
10 the first, second and third clamps of the at least three clamps for selectively clamping any one of the supply and connecting tubes.

94. The peritoneal dialysis set of Claim 93, wherein the at least three clamps is manually operated.

95. The peritoneal dialysis set of Claim 89, wherein at least one of the at least two  
15 supply containers comprises an apparatus for hanging the supply container.

96. The peritoneal dialysis set of Claim 89, wherein each of the at least two supply containers comprise at least one port for the introduction or the removal of the at least one component of the final dialysate.

97. The peritoneal dialysis set of Claim 89 further comprising a flow control device  
20 for selectively clamping any one of the supply and connecting tubes.

98. The peritoneal dialysis set of Claim 89, wherein at least one of the at least two supply containers is a two liter container.

99. The peritoneal dialysis set of Claim 89, wherein at least one of the supply and connecting tubes is fitted with a removable plug.

25 100. The peritoneal dialysis set of Claim 89, wherein the connecting tube is sized to extend to and fit within a drain container when a patient connected to the set is sitting or standing.

101. The peritoneal dialysis set of Claim 89, wherein one of the at least two supply containers is a drain container.

30 102. The peritoneal dialysis set of Claim 89 further comprising at least one cap to close the connector during at least one patient dwell.

103. The peritoneal dialysis set of Claim 89, wherein at least one of the at least two supply containers is initially full.
104. The peritoneal dialysis set of Claim 89, wherein at least the second supply container of the at least two supply containers is filled with a different component of the final dialysate than the first supply container of the at two supply containers.
105. The peritoneal dialysis set of Claim 89, wherein the at least two supply containers are separated by a frangible plug.
106. A peritoneal dialysis system for use with the peritoneal dialysis set as claimed in Claim 89, the system comprising at least one of: (i) a drain container configured to receive and secure the connecting tube and (ii) a patient transfer set configured to connect to the connector.
107. A peritoneal dialysis method comprising: connecting at least two supply containers to a connector, each of the first and second supply containers of the at least two supply containers full of at least one component of a final dialysate for filling a patient; transferring the at least one component of the second supply container to the first supply container to form the final dialysate; connecting the connector to a patient's transfer set; draining the used dialysate of a previous dwell from the patient through the connector into a drain container; and filling the patient from the first supply container.
108. The peritoneal dialysis method of Claim 107, wherein the transfer of the at least one component of the second supply container to the first supply container is partial.
109. The peritoneal dialysis method of Claim 107, wherein the transfer of the at least one component of the second supply container to the first supply container is complete.
110. The peritoneal dialysis method of Claim 107, wherein connecting the at least two supply containers to the connector comprises connecting the at least two supply containers to a connecting tube connected to the connector.
111. The peritoneal dialysis method of Claim 107, wherein connecting the connector to the patient's transfer set includes at least one of: (i) providing a cap on the connector that is removed for connection; and (ii) configuring the connector to be connected fluidly to the patients' transfer set.

112. The peritoneal dialysis method of Claim 107, wherein draining the used dialysate from a previous dwell from the patient through the connector comprises preventing flow from the at least two supply containers to the connector, preventing flow from the first supply container to the second supply container, and urging flow  
5 from the patient to the drain container.
113. The peritoneal dialysis method of Claim 107, wherein urging flow from the patient to the drain container comprises lowering the drain container below the patients' access point.
114. The peritoneal dialysis method of Claim 107, wherein filling the patient from  
10 the first supply container comprises preventing flow from the connector to the second supply container, preventing flow from the first supply container to the second supply container, and urging flow from the first supply container through the connector to the patient.
115. The peritoneal dialysis method of Claim 107, wherein the drain container is the  
15 second supply container.
116. The peritoneal dialysis method of Claim 107, wherein urging flow from the first supply container through the connector to the patient comprises raising the first supply container above a patients' access point.
117. The peritoneal dialysis method of Claim 107, wherein transferring the at least  
20 one component of the second supply container to the first supply container comprises preventing flow from the second supply container to the connector and urging flow from the second supply container to the first supply container.
118. The peritoneal dialysis method of Claim 107, wherein urging flow from the second supply container to the first supply container comprises lowering the first  
25 supply container below the second supply container.
119. The peritoneal dialysis method of Claim 107, further comprising flushing the supply and connecting tubes by preventing flow from the second supply container to the first supply container and urging flow from the first supply container through the supply and connecting tubes to the drain.
- 30 120. The peritoneal dialysis method of Claim 107, further comprising allowing for a dialysate dwell by preventing flow from the at least two supply containers to the connector and flow from the connector to the drain.

121. The peritoneal dialysis method of Claim 107, further comprising disconnecting the patients' transfer-set from the connector during the dialysate dwell.

122. The peritoneal dialysis method of Claim 107, wherein filling a patient with a dialysate comprises filling the first supply container containing at least one

5 component of the dialysate with at least another component of the dialysate from the second supply container to form the final dialysate and filling the patient with the final dialysate from the first supply container.

1/16

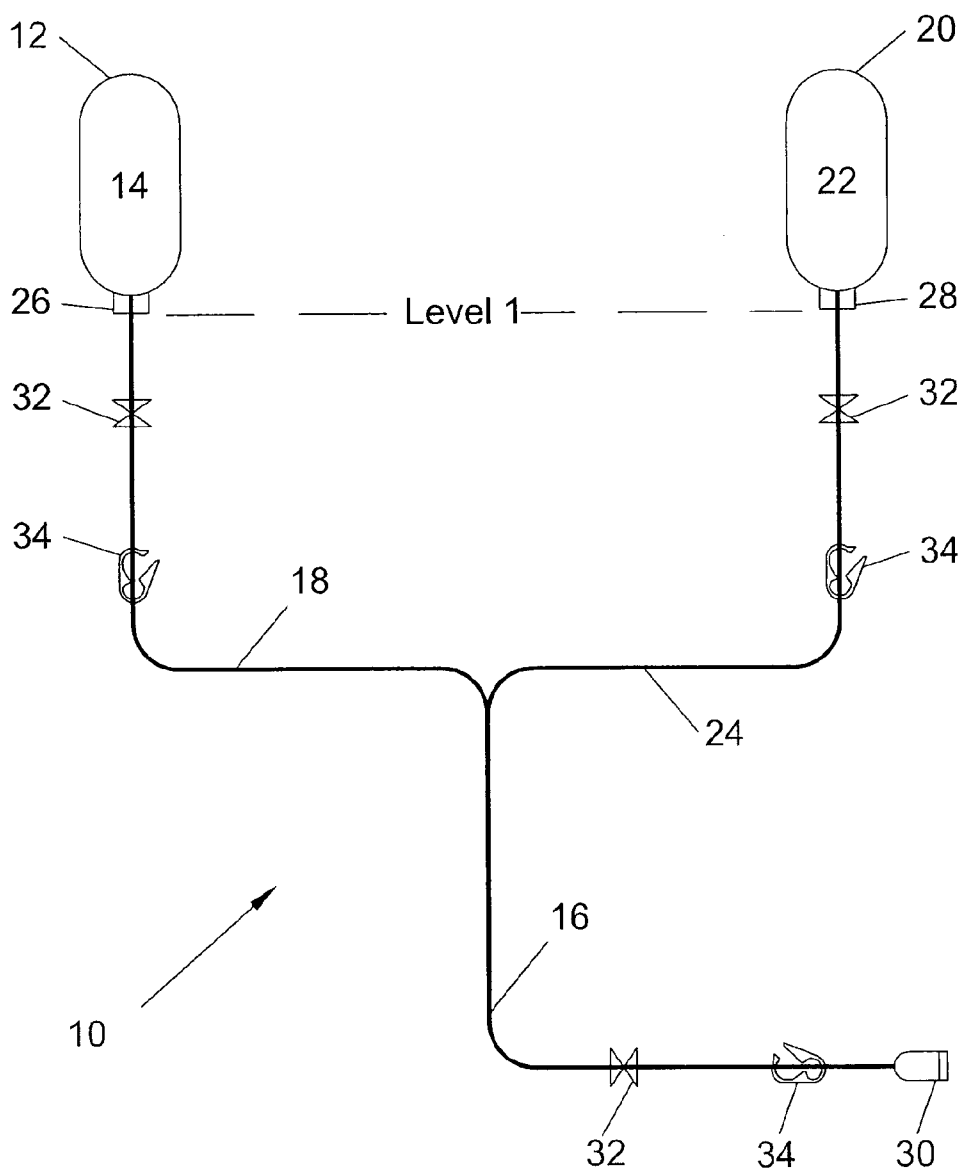


FIG. 1a

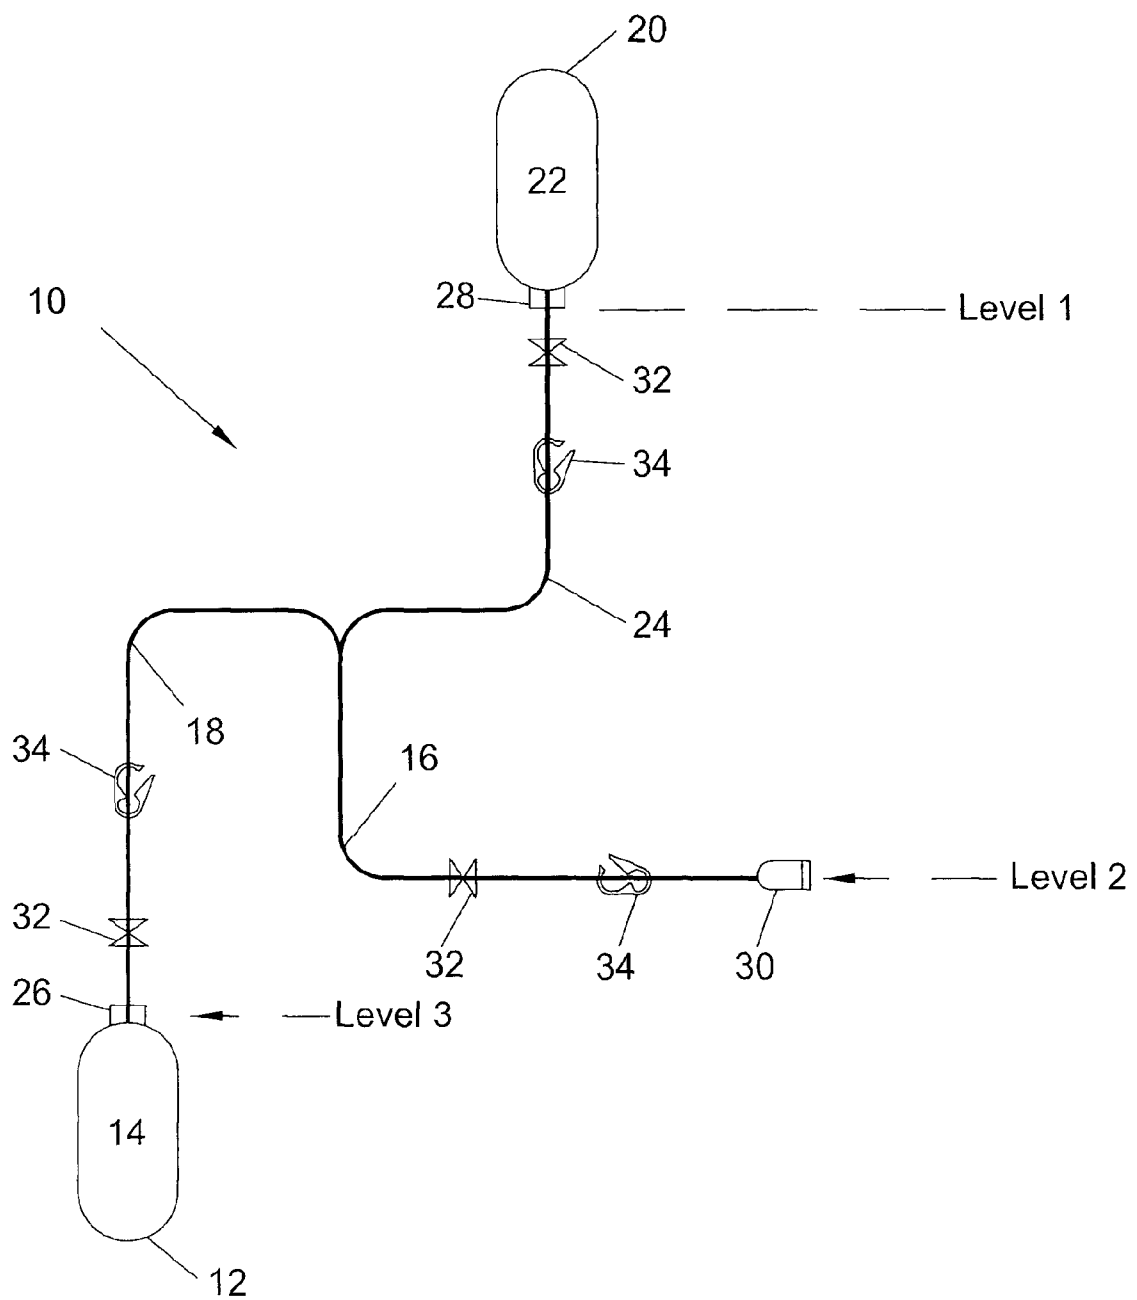


FIG. 1b



3/16

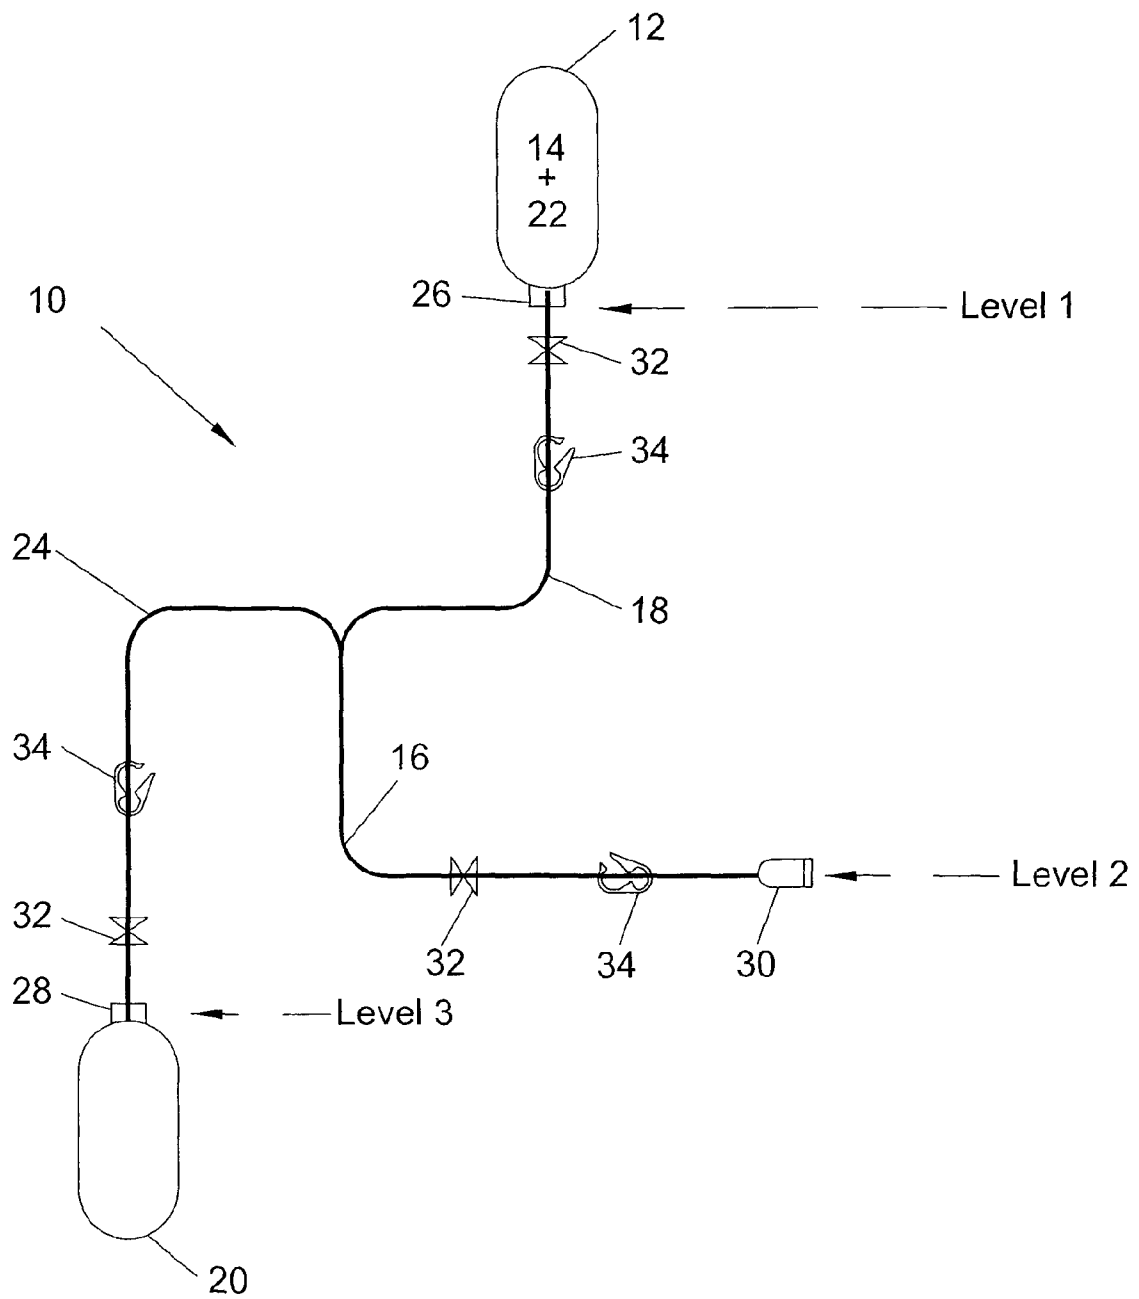


FIG. 1c

4/16

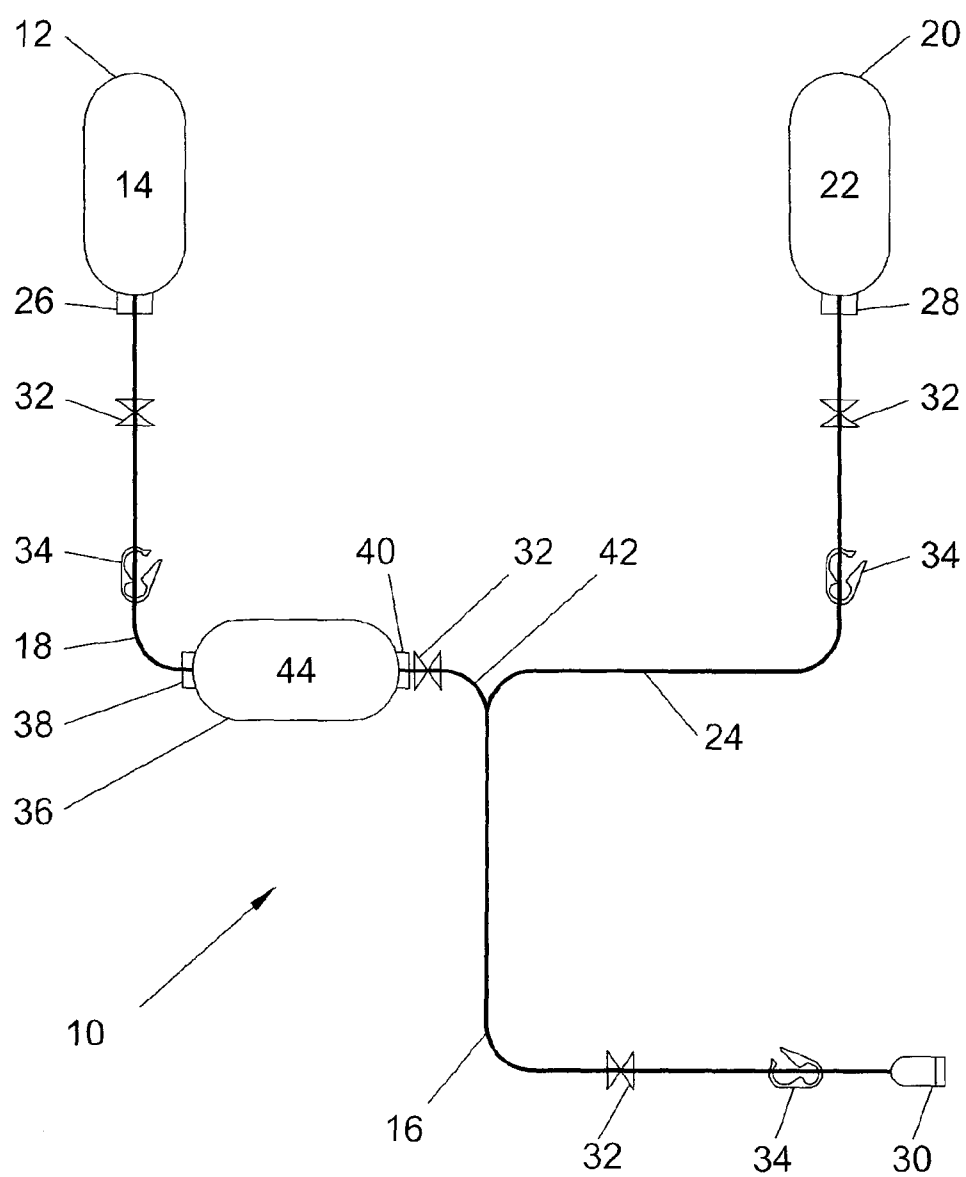


FIG. 2a

5/16

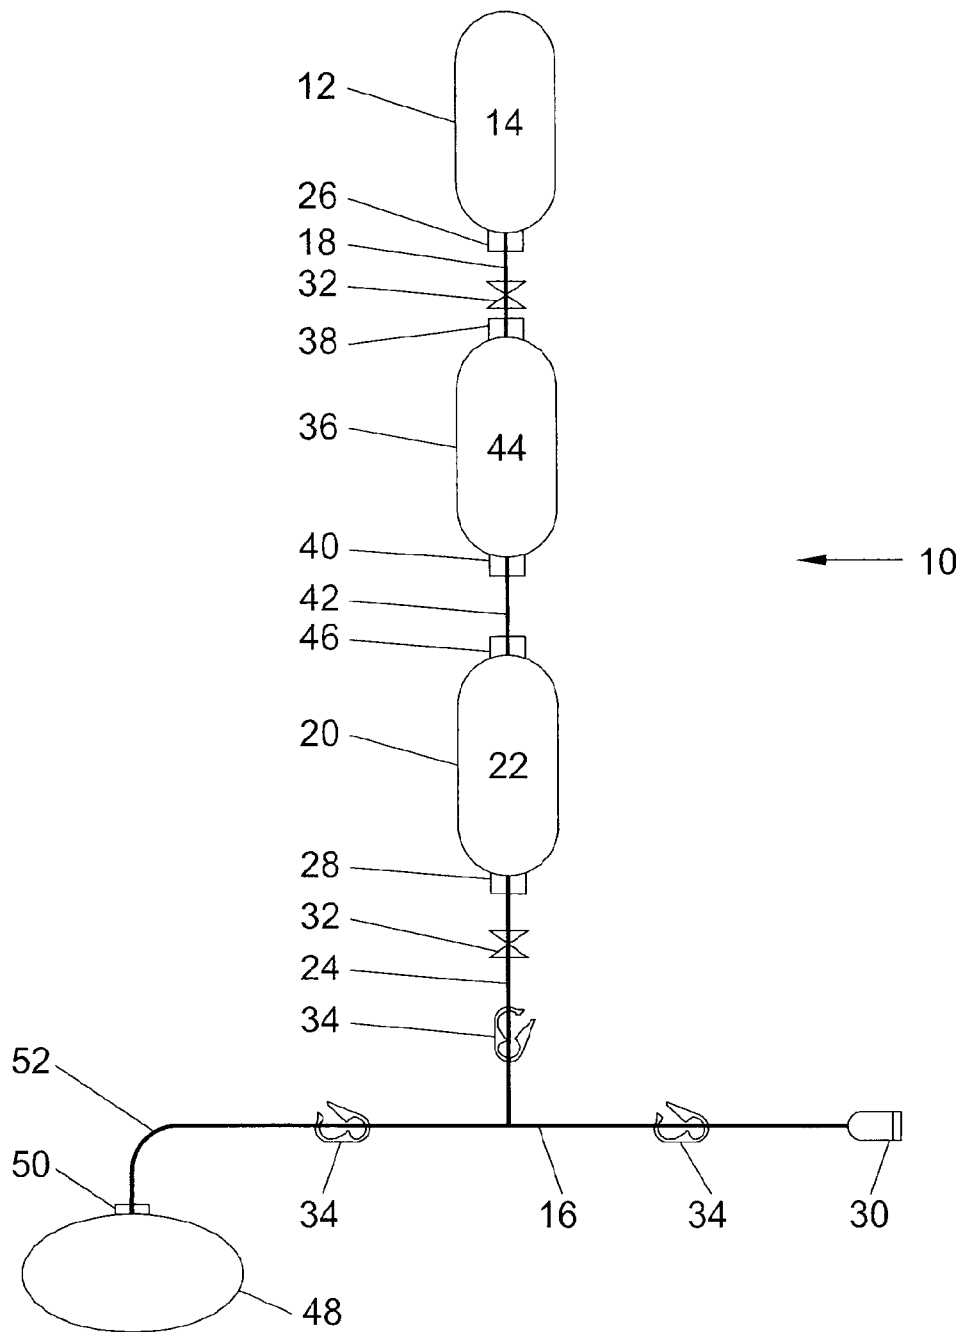


FIG. 2b

6/16

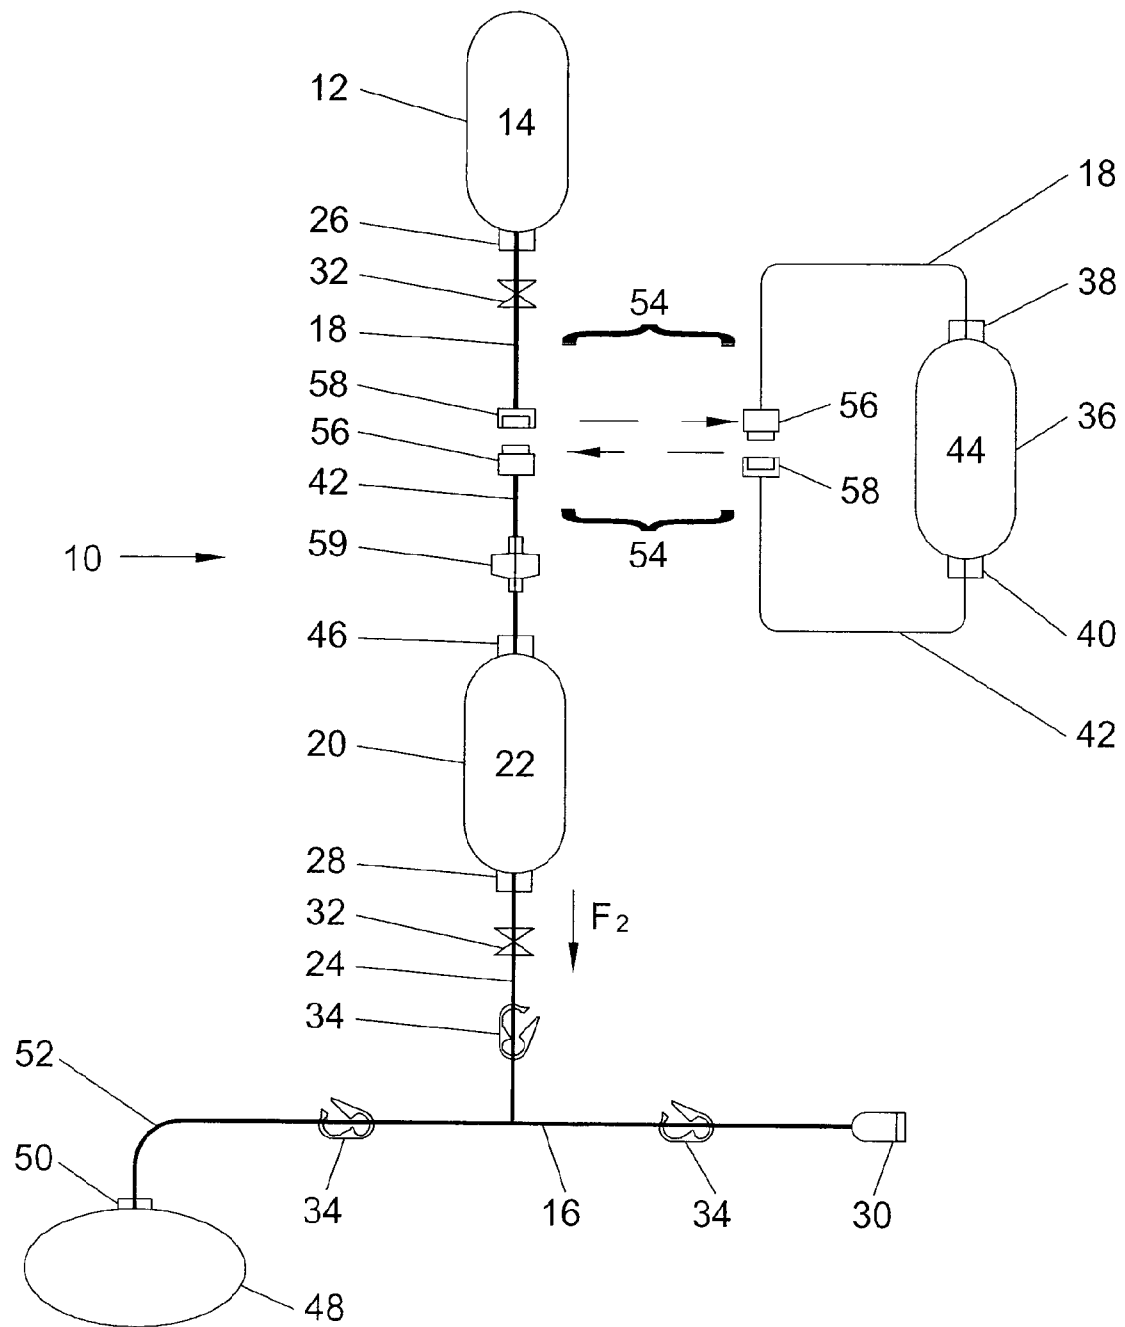


FIG. 2c

7/16

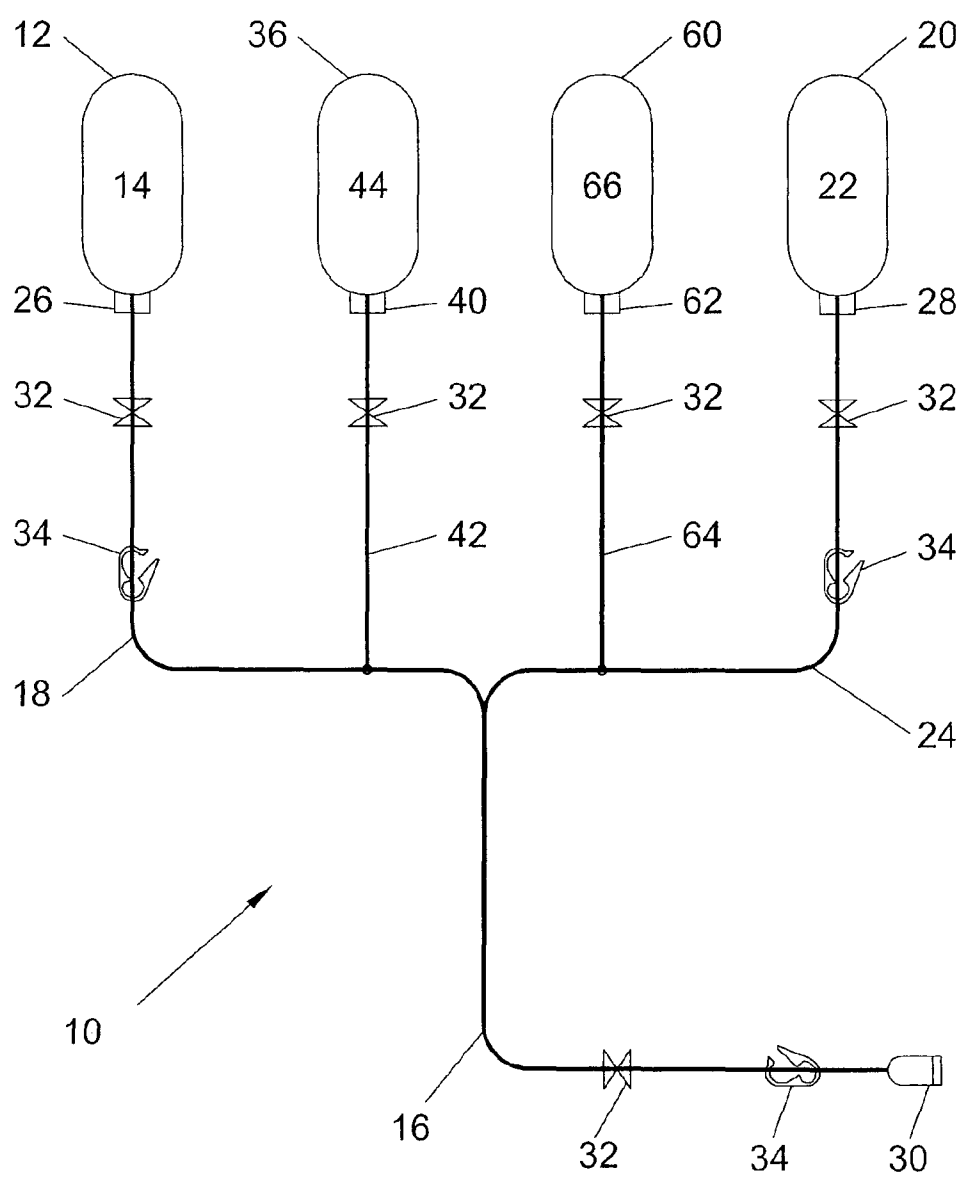


FIG. 3

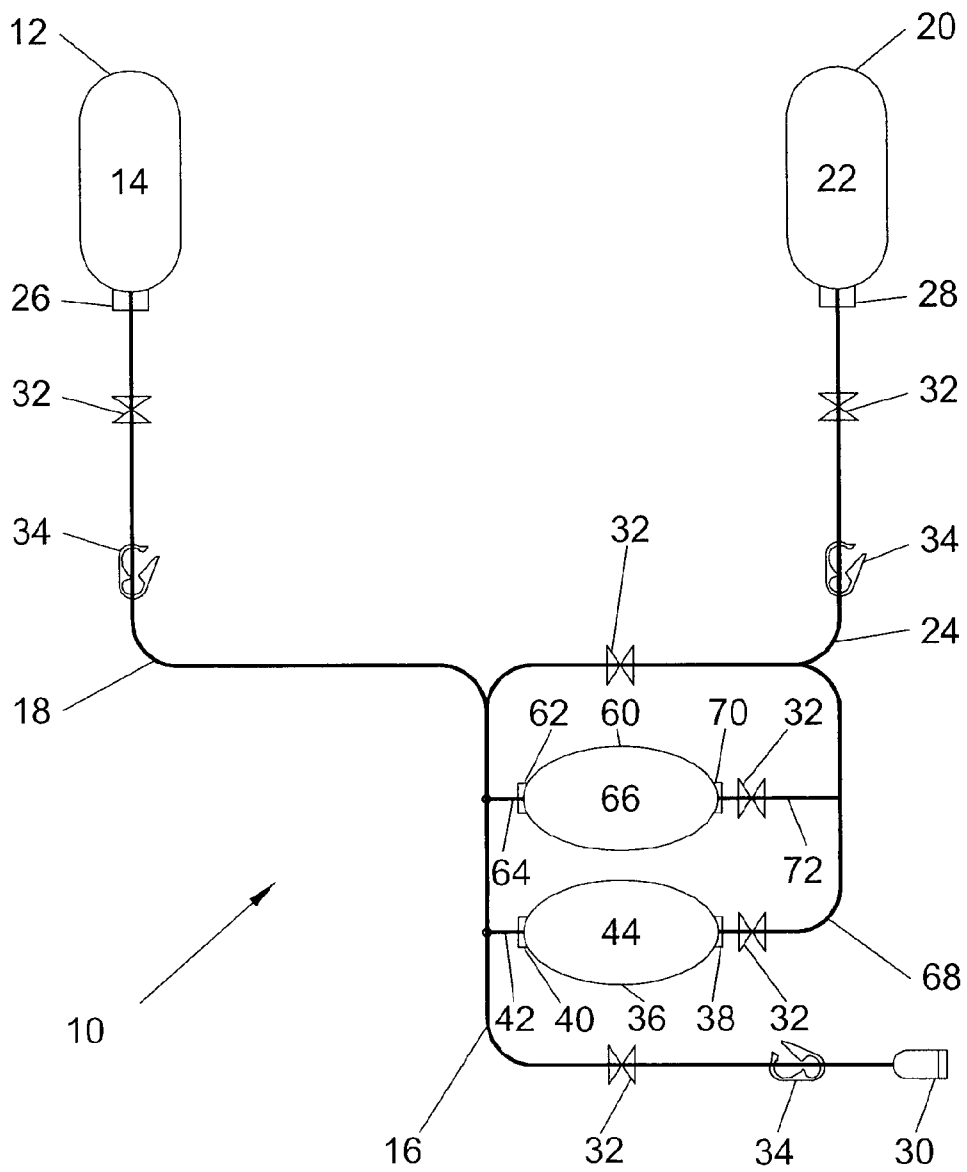


FIG. 4a

9/16

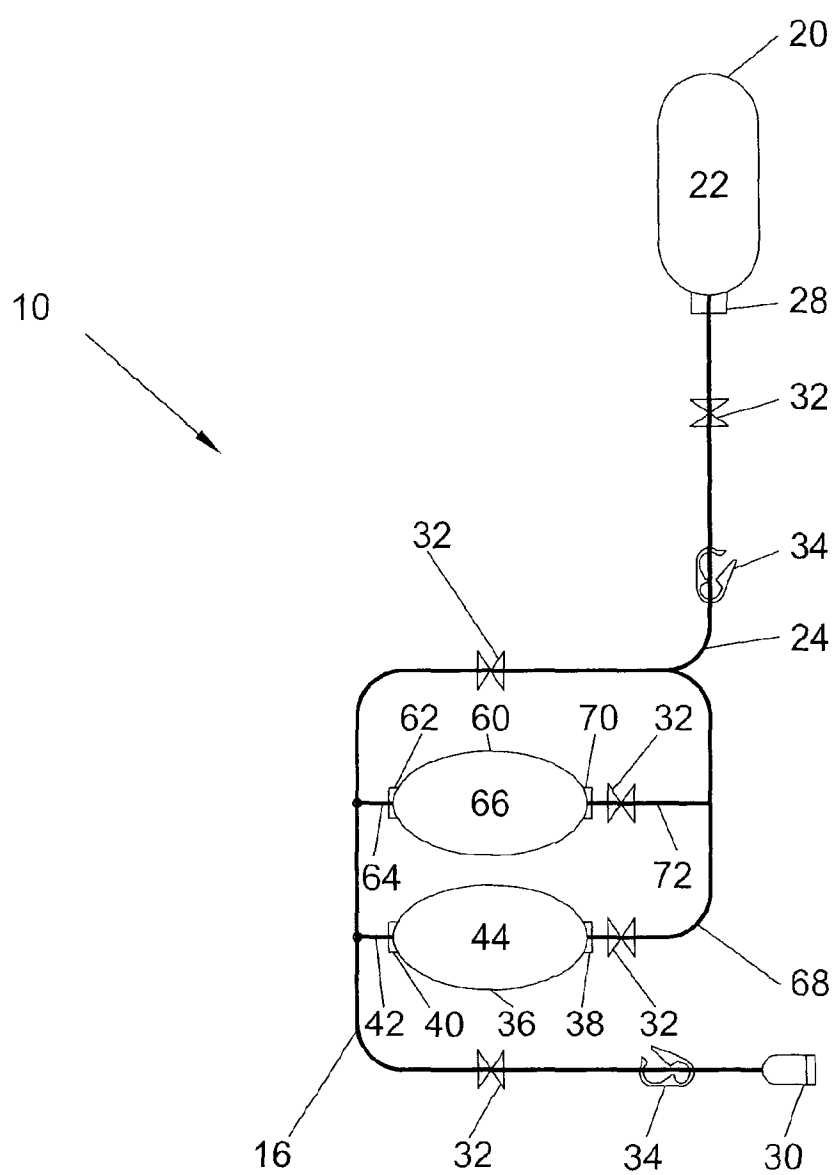


FIG. 4b

10/16

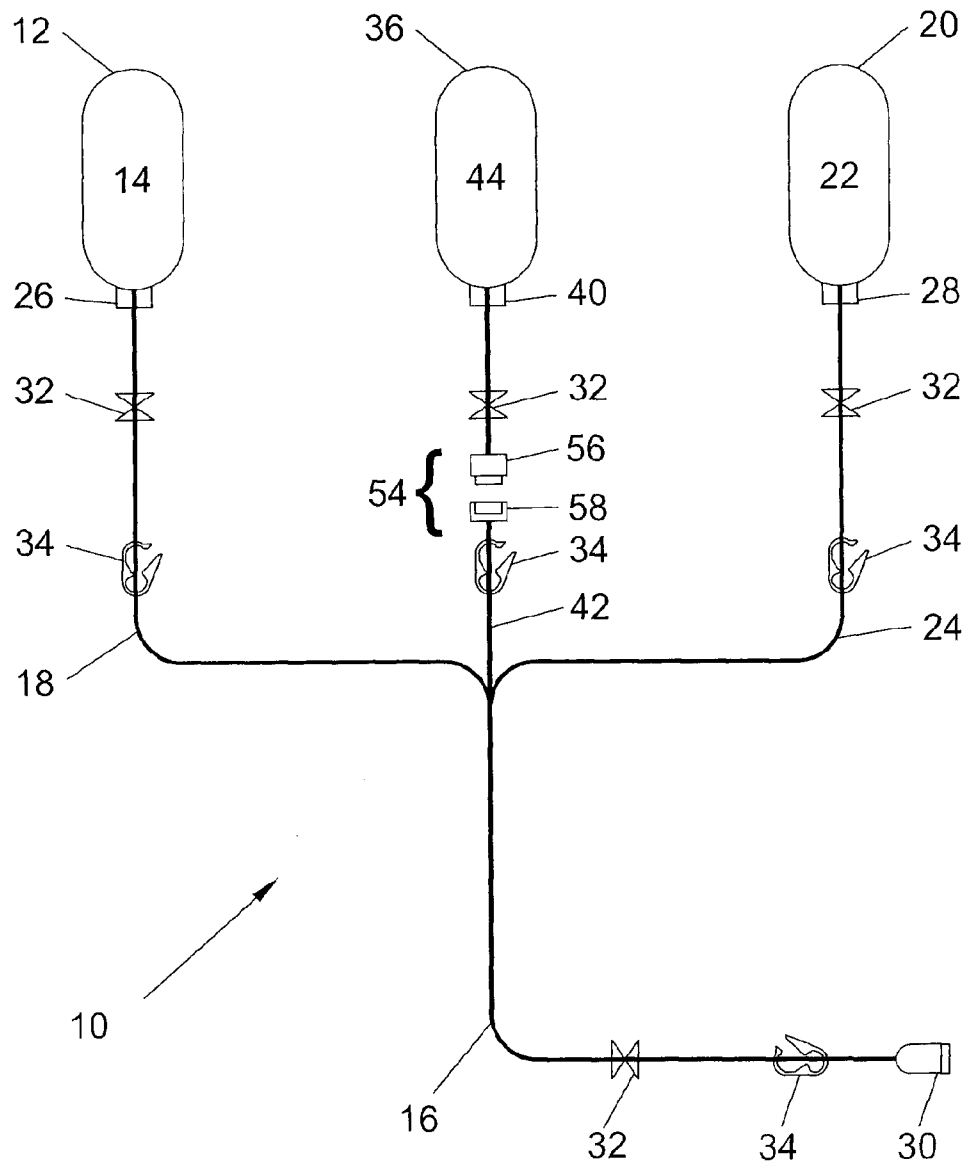


FIG. 5a



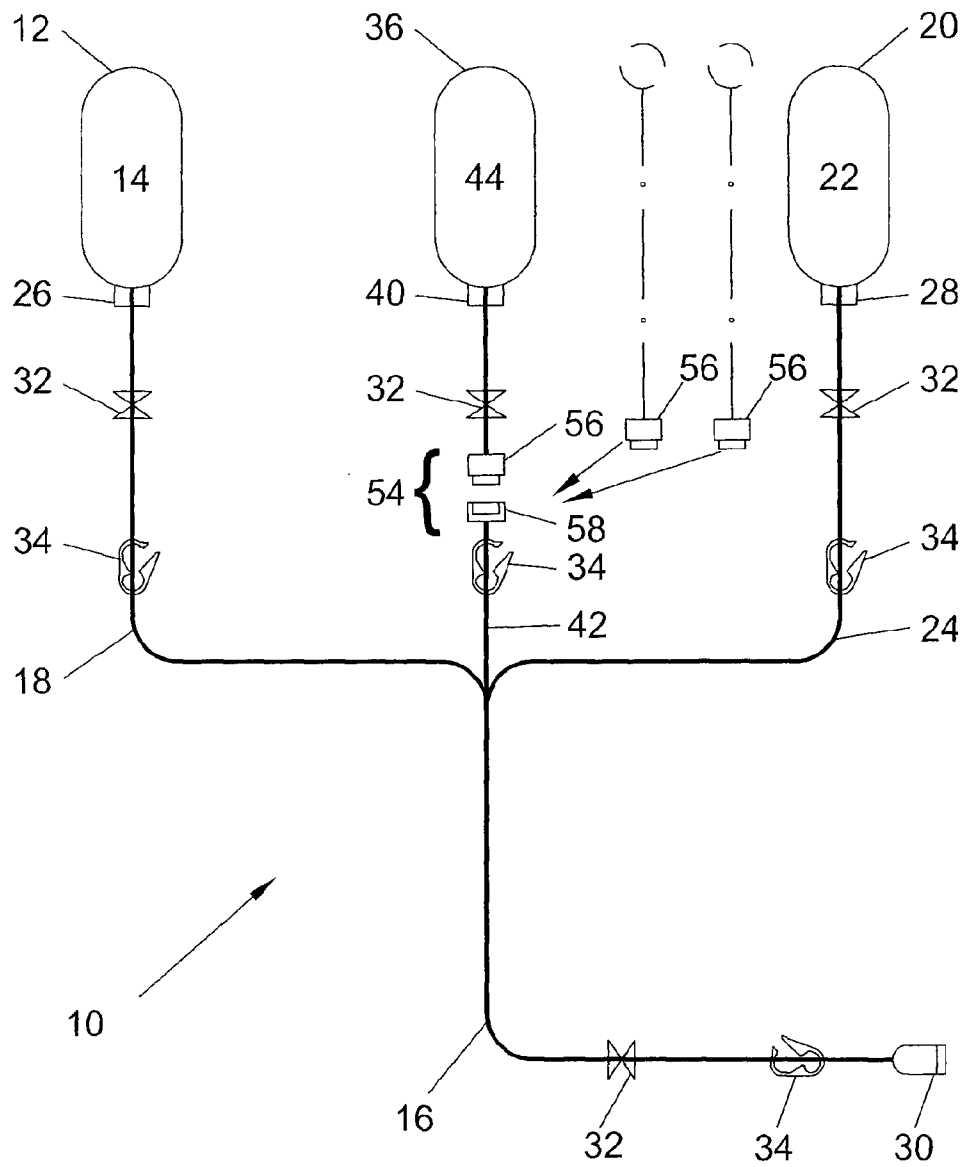


FIG. 5b

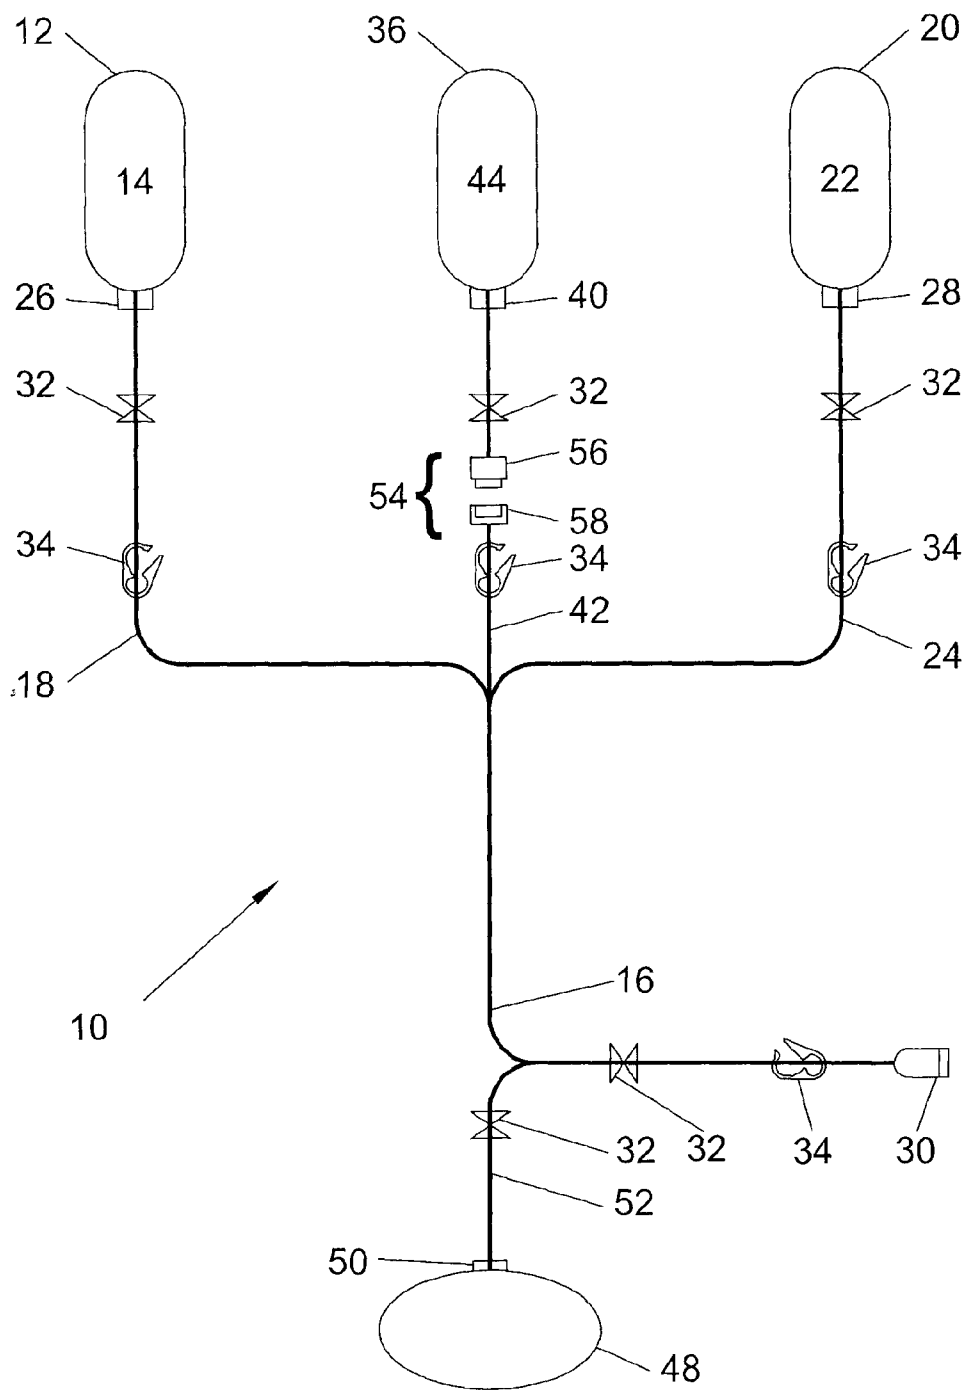


FIG. 6a

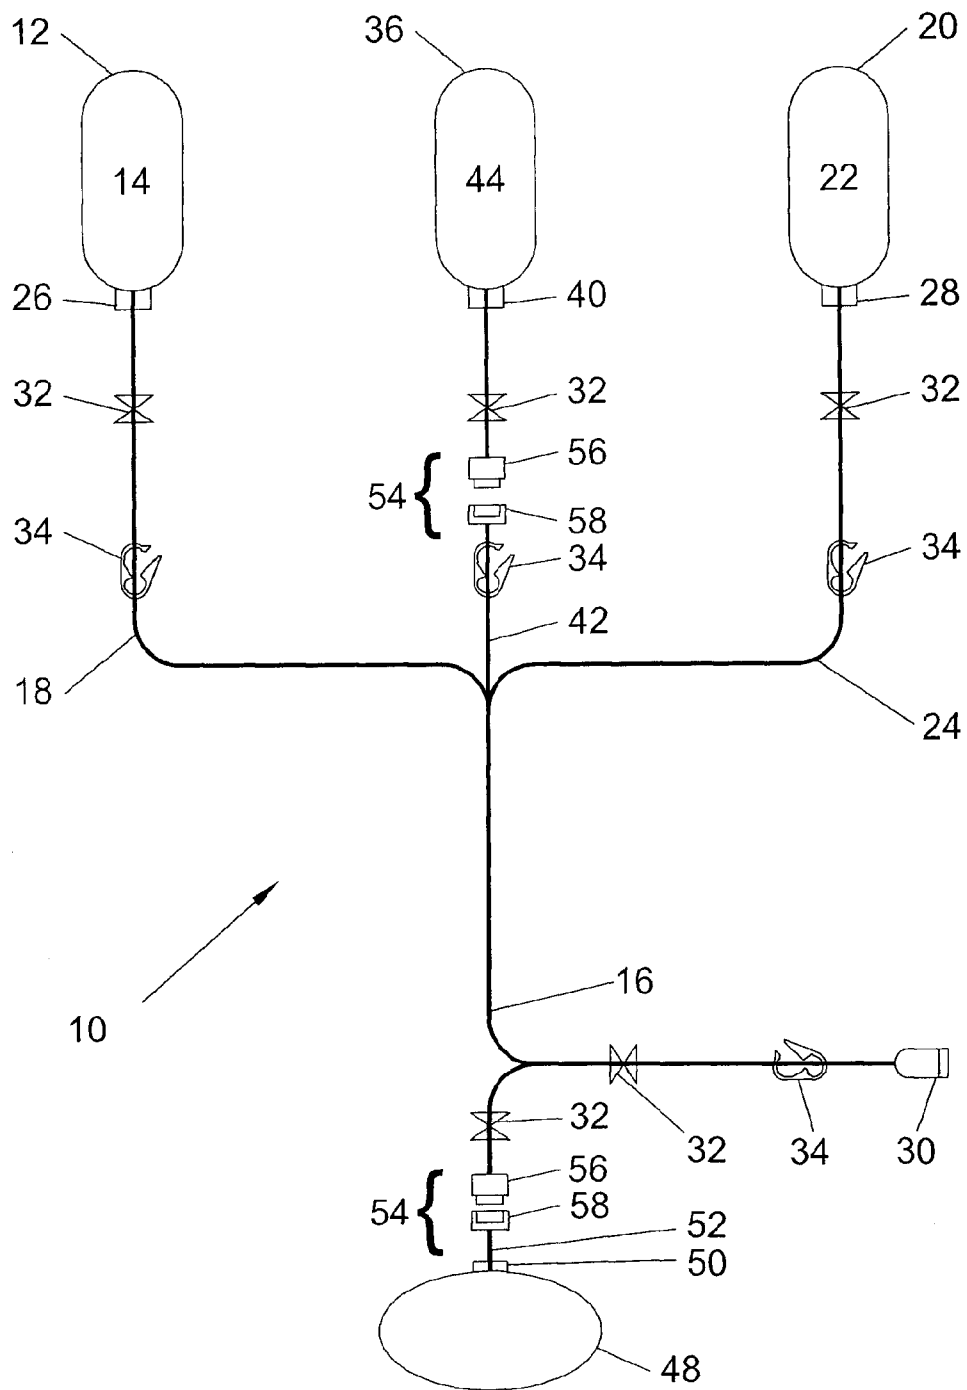


FIG. 6b

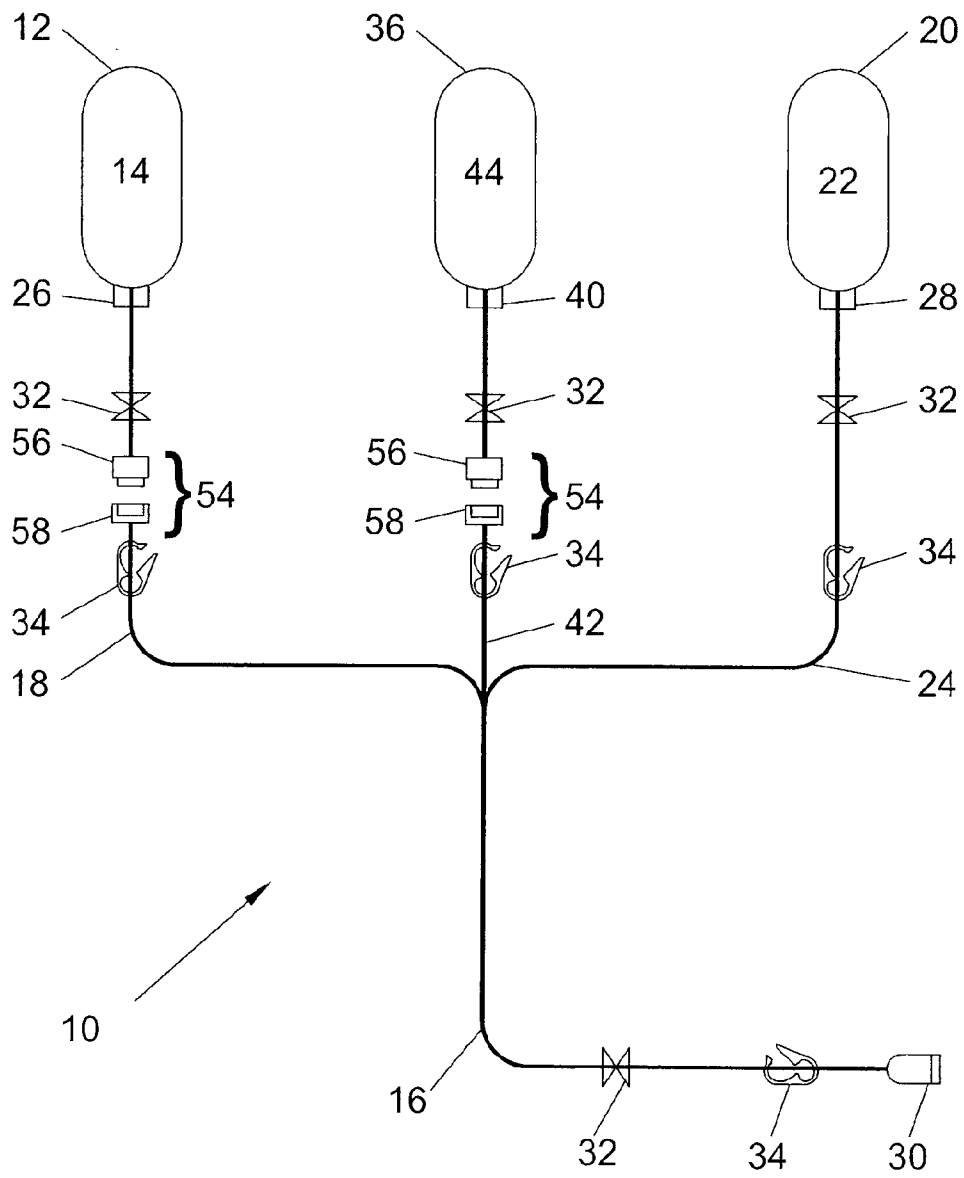


FIG. 7

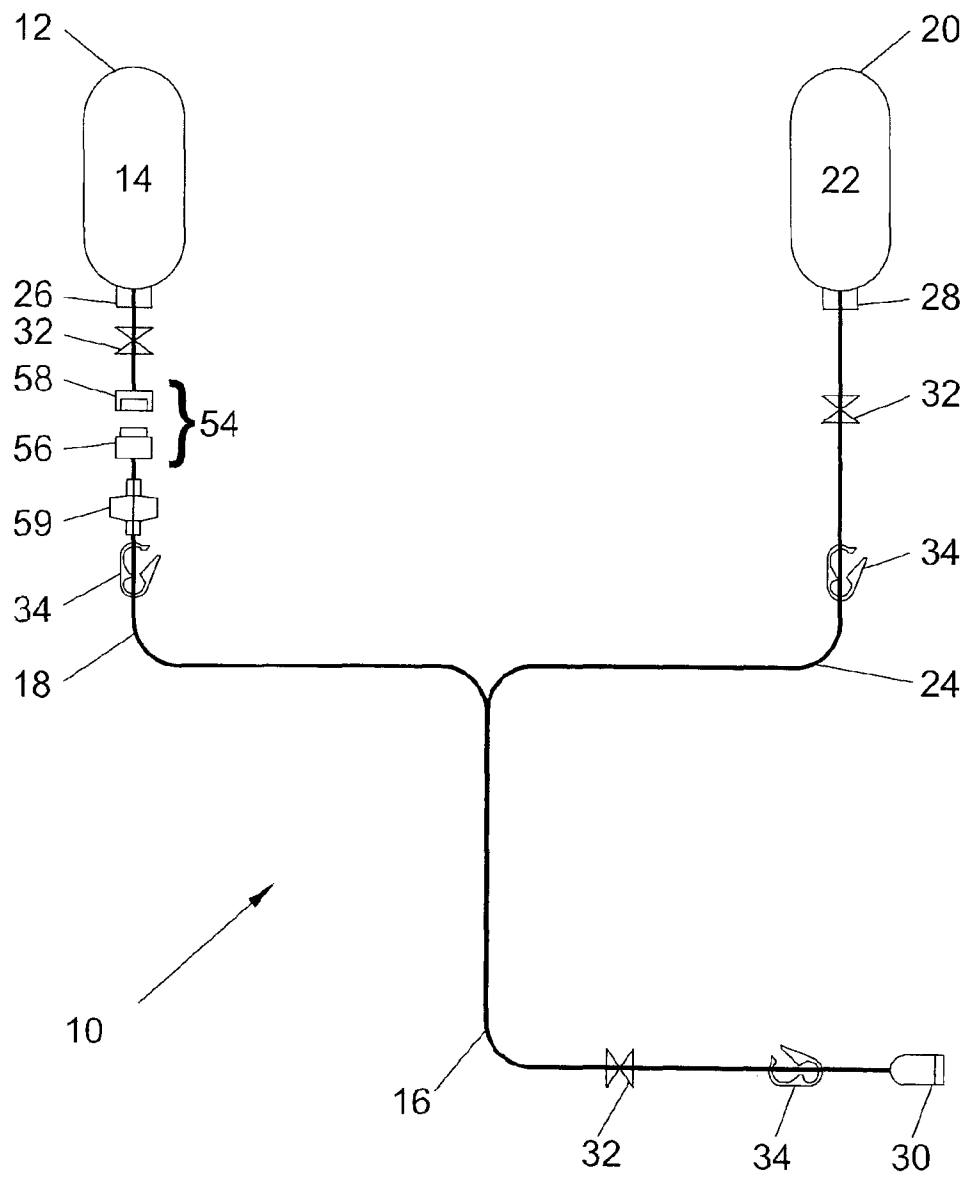


FIG.8

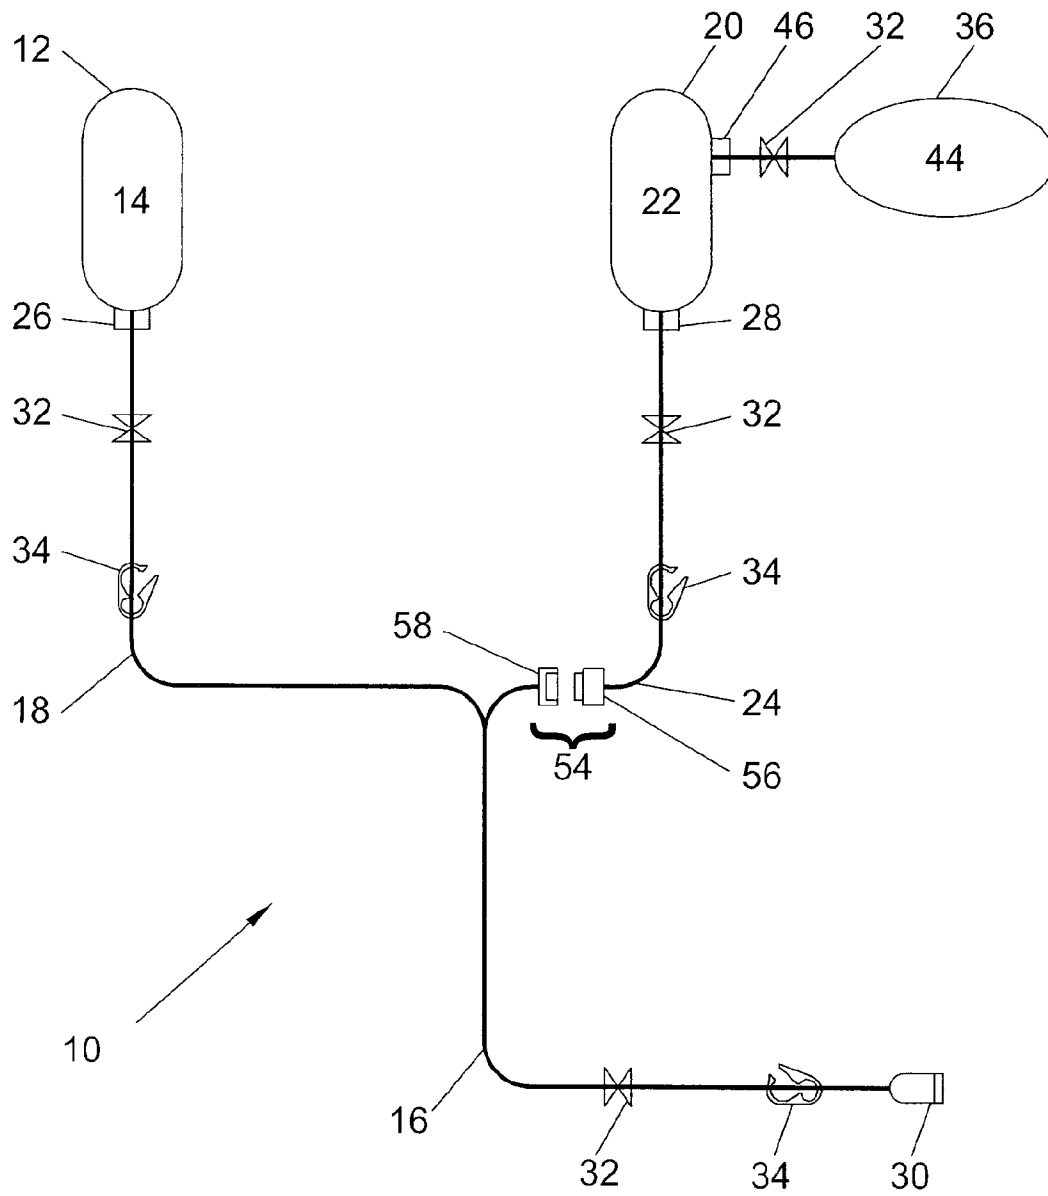


FIG. 9

# INTERNATIONAL SEARCH REPORT

International application No.  
PCT/CA2012/000611

<b>A. CLASSIFICATION OF SUBJECT MATTER</b> <b>IPC: <i>A61J 1/20</i> (2006.01) , <i>A61J 1/10</i> (2006.01) , <i>A61M 1/28</i> (2006.01) , <i>A61M 39/00</i> (2006.01) , <i>A61M 39/10</i> (2006.01) , <i>A61M 39/24</i> (2006.01) (more IPCs on the last page)</b> According to International Patent Classification (IPC) or to both national classification and IPC		
<b>B. FIELDS SEARCHED</b> Minimum documentation searched (classification system followed by classification symbols) <b>IPC: <i>A61J 1/20</i> (2006.01) , <i>A61J 1/10</i> (2006.01) , <i>A61M 1/28</i> (2006.01) , <i>A61M 39/00</i> (2006.01) , <i>A61M 39/10</i> (2006.01) , <i>A61M 39/24</i> (2006.01)</b> Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched Electronic database(s) consulted during the international search (name of database(s) and, where practicable, search terms used) Canadian Patents Database; Full text database (using search tool TotalPatent)		
<b>C. DOCUMENTS CONSIDERED TO BE RELEVANT</b>		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	CA2399440 C (FAICT ET AL.) 06 March 1997 (06-03-1997) - refer to the abstract; figs. 1, 2, 6 & 7; refer to description pages 5a, 8, 9 & 17-20	1-4, 6, 8-18, 24, 25, 27-75, 77, 79, 82-85, 87, 90, 91, 96, 97, 99, 100, 102-106 and 107
Y		5, 7, 19-23, 26, 76, 78, 80, 81, 86, 88, 89, 92-95 and 98
Y	WO2005/009511 A2 (NEFTEL ET AL.) 03 February 2005 (03-02-2005) - refer to figs. 1, 1a, 1b & 6	5, 7, 19-23, 26, 76, 78, 80, 81, 92-95 and 98
Y	WO00/30701 A1 (HARALDSSON ET AL.) 02 June 2000 (02-06-2000) - refer to figs. 1-9	5, 7, 19-23, 26, 76, 78, 80, 81, 92-95 and 98
Y	US2009/0277516 A1 (WINKLER ET AL.) 12 November 2009 (12-11-2009) - refer to paras. 0076, 0077 and 0081	88 and 89
A	WO00/20050 A1 (BRUGGER ET AL.) 13 April 2000 (13-04-2000) - refer to entire document	1, 82, 84, 90
<input type="checkbox"/> Further documents are listed in the continuation of Box C. <input checked="" type="checkbox"/> See patent family annex.		
* Special categories of cited documents :	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art "&" document member of the same patent family	
"A" document defining the general state of the art which is not considered to be of particular relevance		
"E" earlier application or patent but published on or after the international filing date		
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)		
"O" document referring to an oral disclosure, use, exhibition or other means		
"P" document published prior to the international filing date but later than the priority date claimed		
Date of the actual completion of the international search	Date of mailing of the international search report	
04 September 2012 (04-09-2012)	14 September 2012 (14-09-2012)	
Name and mailing address of the ISA/CA Canadian Intellectual Property Office Place du Portage I, C114 - 1st Floor, Box PCT 50 Victoria Street Gatineau, Quebec K1A 0C9 Facsimile No.: 001-819-953-2476	Authorized officer  Ishtiaque Ibne Rashid (819) 953-0787	

**INTERNATIONAL SEARCH REPORT**International application No.  
PCT/CA2012/000611**Box No. II Observations where certain claims were found unsearchable (Continuation of item 2 of the first sheet)**

This international search report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons :

1. ☒ Claim Nos. : 108-123  
because they relate to subject matter not required to be searched by this Authority, namely :  
  
Claims 108-123 are directed to a method for treatment of the human or animal body by surgery or therapy which the International Search Authority is not required to in view of rule 39.1 of the PCT.
2. ☐ Claim Nos. :  
because they relate to parts of the international application that do not comply with the prescribed requirements to such an extent that no meaningful international search can be carried out, specifically :
3. ☐ Claim Nos. :  
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

**Box No. III Observations where unity of invention is lacking (Continuation of item 3 of first sheet)**

This International Searching Authority found multiple inventions in this international application, as follows :

1. ☐ As all required additional search fees were timely paid by the applicant, this international search report covers all searchable claims.
2. ☐ As all searchable claims could be searched without effort justifying additional fees, this Authority did not invite payment of additional fees.
3. ☐ As only some of the required additional search fees were timely paid by the applicant, this international search report covers only those claims for which fees were paid, specifically claim Nos. :
4. ☐ No required additional search fees were timely paid by the applicant. Consequently, this international search report is restricted to the invention first mentioned in the claims; it is covered by claim Nos. :

**Remark on Protest** ☐ The additional search fees were accompanied by the applicant's protest and, where applicable, the payment of a protest fee.

☐ The additional search fees were accompanied by the applicant's protest but the applicable protest fee was not paid within the time limit specified in the invitation.

☐ No protest accompanied the payment of additional search fees.



**INTERNATIONAL SEARCH REPORT**International application No.  
PCT/CA2012/000611

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO2005/035023 A1 (JANSSON ET AL.) 21 April 2005 (21-04-2005) - refer to entire document	1, 82, 84, 90
A	US2009/0124963 A1 (HOGARD ET AL.) 14 May 2009 (14-05-2009) - refer to entire document	1, 82, 84, 90

**INTERNATIONAL SEARCH REPORT**  
Information on patent family members

International application No.  
**PCT/CA2012/000611**

Patent Document Cited in Search Report	Publication Date	Patent Family Member(s)	Publication Date
CA2399440C	06 March 1997 (06-03-1997)		
WO2005009511A2	03 February 2005 (03-02-2005)		
WO0030701A1	02 June 2000 (02-06-2000)	AU764044B2 AU764044C AU2131000A CA2351840A1 EP1128855A1 JP2002530161A SE512683C2 SE9803987D0 SE9803987A SE9803987L US6585682B1	07 August 2003 (07-08-2003) 06 May 2004 (06-05-2004) 13 June 2000 (13-06-2000) 02 June 2000 (02-06-2000) 05 September 2001 (05-09-2001) 17 September 2002 (17-09-2002) 02 May 2000 (02-05-2000) 20 November 1998 (20-11-1998) 02 May 2000 (02-05-2000) 02 May 2000 (02-05-2000) 01 July 2003 (01-07-2003)
US2009277516A1	12 November 2009 (12-11-2009)	AU2007254017A1 AU2008296060A1 AU2008296074A1 AU2008296079A1 AU2008296141A1 AU2009249061A1 AU2009285598A1 AU2011220486A1 BRPI0708597A2 CN101400895A CN101842311A CN101849237A CN101849320A CN101868420A CN102387982A EP1999371A2 EP2188203A2 EP2188204A2 EP2188753A1 EP2188869A1 EP2311141A2 EP2331452A2 EP2430505A2 JP2009529120A JP2010538402A JP2011501832A JP2011503406A JP2011510360A JP2012505370A MX2008011208A MX2010002670A MX2010002671A MX2010002672A MX2010002673A MX2011002154A MX2011011834A RU2008139145A RU2435984C2 RU2010112993A RU2010112995A RU2010113008A RU2010113009A US2007207040A1 US7740152B2 US2008054837A1 US7905373B2 US2010005903A1 US8087303B2	29 November 2007 (29-11-2007) 12 March 2009 (12-03-2009) 12 March 2009 (12-03-2009) 12 March 2009 (12-03-2009) 12 March 2009 (12-03-2009) 26 November 2009 (26-11-2009) 04 March 2010 (04-03-2010) 16 August 2012 (16-08-2012) 07 June 2011 (07-06-2011) 01 April 2009 (01-04-2009) 22 September 2010 (22-09-2010) 29 September 2010 (29-09-2010) 29 September 2010 (29-09-2010) 20 October 2010 (20-10-2010) 21 March 2012 (21-03-2012) 10 December 2008 (10-12-2008) 26 May 2010 (26-05-2010) 26 May 2010 (26-05-2010) 26 May 2010 (26-05-2010) 26 May 2010 (26-05-2010) 20 April 2011 (20-04-2011) 15 June 2011 (15-06-2011) 21 March 2012 (21-03-2012) 13 August 2009 (13-08-2009) 09 December 2010 (09-12-2010) 13 January 2011 (13-01-2011) 27 January 2011 (27-01-2011) 31 March 2011 (31-03-2011) 01 March 2012 (01-03-2012) 11 September 2008 (11-09-2008) 01 June 2010 (01-06-2010) 01 June 2010 (01-06-2010) 01 June 2010 (01-06-2010) 01 June 2010 (01-06-2010) 25 May 2011 (25-05-2011) 06 March 2012 (06-03-2012) 20 April 2010 (20-04-2010) 10 December 2011 (10-12-2011) 20 October 2011 (20-10-2011) 20 October 2011 (20-10-2011) 20 October 2011 (20-10-2011) 20 October 2011 (20-10-2011) 06 September 2007 (06-09-2007) 22 June 2010 (22-06-2010) 06 March 2008 (06-03-2008) 15 March 2011 (15-03-2011) 14 January 2010 (14-01-2010) 03 January 2012 (03-01-2012)

## INTERNATIONAL SEARCH REPORT

International application No.  
PCT/CA2012/000611

		US2011163125A1	07 July 2011 (07-07-2011)
		US8091736B2	10 January 2012 (10-01-2012)
		US2009069922A1	12 March 2009 (12-03-2009)
		US2009069925A1	12 March 2009 (12-03-2009)
		US2009159612A1	25 June 2009 (25-06-2009)
		US2011011888A2	20 January 2011 (20-01-2011)
		US2010206400A2	19 August 2010 (19-08-2010)
		US2009289796A1	26 November 2009 (26-11-2009)
		US2009295659A1	03 December 2009 (03-12-2009)
		US2011205134A1	25 August 2011 (25-08-2011)
		US2012109370A1	03 May 2012 (03-05-2012)
		US2012192969A1	02 August 2012 (02-08-2012)
		WO2007136905A2	29 November 2007 (29-11-2007)
		WO2007136905A3	10 July 2008 (10-07-2008)
		WO2009033080A2	12 March 2009 (12-03-2009)
		WO2009033080A3	28 May 2009 (28-05-2009)
		WO2009033087A1	12 March 2009 (12-03-2009)
		WO2009033101A1	12 March 2009 (12-03-2009)
		WO2009033106A2	12 March 2009 (12-03-2009)
		WO2009033106A3	02 July 2009 (02-07-2009)
		WO2009143289A2	26 November 2009 (26-11-2009)
		WO2009143289A3	11 March 2010 (11-03-2010)
		WO2009143289A8	29 April 2010 (29-04-2010)
		WO2010025382A2	04 March 2010 (04-03-2010)
		WO2010025382A3	26 April 2012 (26-04-2012)
		WO2010129835A2	11 November 2010 (11-11-2010)
		WO2010129835A3	03 November 2011 (03-11-2011)
		WO2011106666A1	01 September 2011 (01-09-2011)
		ZA200807504A	26 August 2009 (26-08-2009)
WO0020050A1	13 April 2000 (13-04-2000)	AU6413599A	26 April 2000 (26-04-2000)
		CA2345741A1	13 April 2000 (13-04-2000)
		EP1124597A1	22 August 2001 (22-08-2001)
		JP2002531149A	24 September 2002 (24-09-2002)
		US6245039B1	12 June 2001 (12-06-2001)
		US2001014793A1	16 August 2001 (16-08-2001)
		US6585681B2	01 July 2003 (01-07-2003)
WO2005035023A1	21 April 2005 (21-04-2005)	AT386557T	15 March 2008 (15-03-2008)
		AU2004279280A1	21 April 2005 (21-04-2005)
		AU2004279280B2	26 November 2009 (26-11-2009)
		CA2536421A1	21 April 2005 (21-04-2005)
		CA2536421C	13 March 2012 (13-03-2012)
		CN1859936A	08 November 2006 (08-11-2006)
		CN1859936B	03 November 2010 (03-11-2010)
		DE602004011981D1	03 April 2008 (03-04-2008)
		DE602004011981T2	05 March 2009 (05-03-2009)
		EP1691863A1	23 August 2006 (23-08-2006)
		EP1691863B1	20 February 2008 (20-02-2008)
		ES2298818T3	16 May 2008 (16-05-2008)
		JP2007508101A	05 April 2007 (05-04-2007)
		JP4658062B2	23 March 2011 (23-03-2011)
		KR20060128862A	14 December 2006 (14-12-2006)
		KR101112117B1	22 February 2012 (22-02-2012)
		SE0302698D0	13 October 2003 (13-10-2003)
		SE0302698A	14 April 2005 (14-04-2005)
		SE0302698L	14 April 2005 (14-04-2005)
		US2010137782A1	03 June 2010 (03-06-2010)
US2009124963A1	14 May 2009 (14-05-2009)	AU2008325037A1	14 May 2009 (14-05-2009)
		CA2704411A1	14 May 2009 (14-05-2009)
		EP2219703A1	25 August 2010 (25-08-2010)
		WO2009061608A1	14 May 2009 (14-05-2009)
		WO2009061608A4	09 July 2009 (09-07-2009)

**INTERNATIONAL SEARCH REPORT**

International application No.  
**PCT/CA2012/000611**

***B01D 61/28*** (2006.01) , ***B01D 61/30*** (2006.01) , ***B65D 30/24*** (2006.01)