



(51) International Patent Classification:
H03K 17/96 (2006.01)

(21) International Application Number:
PCT/US2010/057734

(22) International Filing Date:
23 November 2010 (23.11.2010)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
61/263,505 23 November 2009 (23.11.2009) US

(71) Applicant (for all designated States except US):
TOUCHSENSOR TECHNOLOGIES, LLC [US/US];
203 N. Gables Blvd., Wheaton, Illinois 60187 (US).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **ORELLANA, Jay J.**
[US/US]; 206 White Oak Drive, Wheaton, Illinois 60187
(US).

(74) Agents: **VRLA, Mark P.** et al.; Barnes & Thornburg
LLP, P.O. Box 2786, Chicago, Illinois 60690-2786 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.


(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

[Continued on next page]

(54) Title: USER INTERFACE PANEL

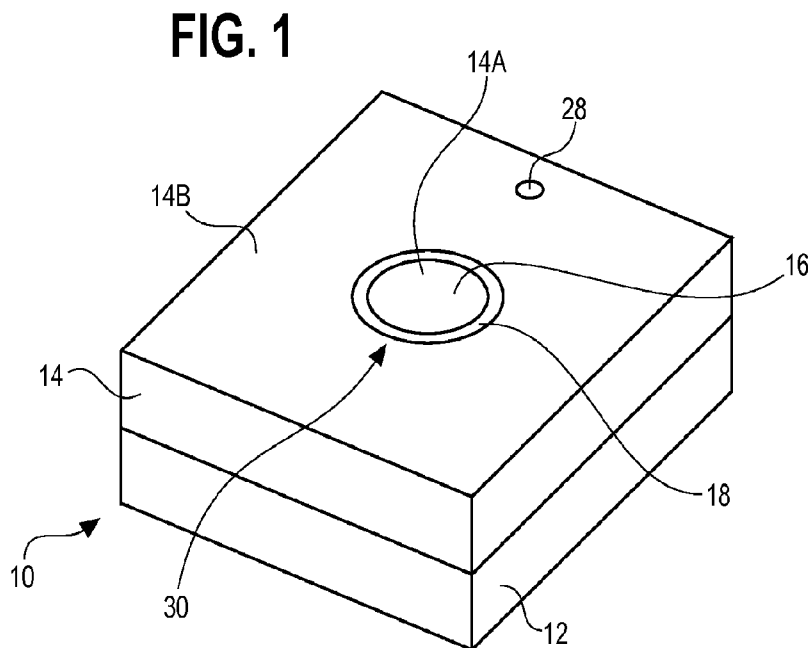

(57) Abstract: A user interface panel includes a touch sensor having one or more sensing electrodes and a user interface substrate disposed on a circuit carrier substrate. The user interface substrate includes a touch surface comprising a conductive material. A gap separates a portion of the conductive material overlying one of the sensing electrodes from surrounding portions of the conductive material.



-
- *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))*

USER INTERFACE PANEL

CROSS-REFERENCE TO RELATED APPLICATIONS

[0001] This application claims priority from and incorporates the disclosure of U.S. Provisional Patent Application No. 61/263,505, filed on November 23, 2009.

BACKGROUND OF THE INVENTION

[0002] The present invention is directed to a user interface panel using electronic sensor technology.

BRIEF DESCRIPTION OF THE DRAWINGS

[0003] FIG. 1 is a perspective view of a user interface panel 10 including a circuit carrier substrate 12 and a user interface substrate 14 defining a touch surface 16, a gap 18 surrounding touch surface 16, and an indicator 28;

[0004] FIG. 2A is a plan view of user interface substrate 14 defining a round touch surface 16, a gap 18 surrounding touch surface 16, and an indicator 28;

[0005] FIG. 2B is a plan view of user interface substrate 14 defining a square touch surface 16, a gap 18 surrounding touch surface 16, and an indicator 28;

[0006] FIG. 3A is a plan view of circuit carrier substrate 12 having a touch sensor 20 disposed thereon, touch sensor 20 including a generally round, conductive electrode pad 22 and a narrow, conductive electrode 24 substantially surrounding electrode pad 22;

[0007] FIG. 3B is a plan view of circuit carrier substrate 12 having a touch sensor 20 disposed thereon, touch sensor 20 including a generally square, conductive electrode pad 22 and a narrow, conductive electrode 24 substantially surrounding electrode pad 22;

[0008] FIG. 3C is a plan view of circuit carrier substrate 12 having a touch sensor 20 disposed thereon, touch sensor 20 including a generally square, conductive electrode pad 22 and a narrow, conductive electrode 24 abutting one side of electrode pad 22;

[0009] FIG. 4A is a plan view similar to FIG. 2A showing electrode pad 22 and electrode 24 in phantom;

[0010] FIG. 4B is a plan view similar to FIG. 2B showing electrode pad 22 and electrode 24 in phantom;

[0011] FIG. 5 is a cross-sectional view of user interface panel 10 including circuit carrier substrate 12 having touch sensor 20 disposed thereon and user interface substrate 14 defining touch surface 16 and gap 18 surrounding touch surface 16;

[0012] FIG. 6 is a plan view of an interface panel 10 having a generally round touch surface 16, a generally annular gap 18, and a touch sensor 20, shown in phantom, having a generally square electrode 22 pad and a generally square annular electrode 24 substantially surrounding electrode pad 22;

[0013] FIG. 7 is a perspective view of a user interface panel 10 including a circuit carrier substrate 12 and a user interface substrate 14 that defines a plurality of touch surfaces 16 and gaps 18 surrounding touch surfaces 16;

[0014] FIG. 8 is a plan view of an alternative structure for electrode pad 22;

[0015] FIG. 9 is a plan view of a portion of user interface substrate 14 defining touch surface 16;

[0016] FIG. 10 is a plan view of a portion of user interface substrate 14 defining touch surface 16;

[0017] FIG. 11 is a plan view of a portion of user interface substrate 14 defining touch surface 16;

[0018] FIG. 12 is a plan view of a user interface panel 10 having an alternate form of user interface substrate 14; and

[0019] FIG. 13 is a plan view of a user interface panel 10 having another alternate form of user interface substrate 14.

DETAILED DESCRIPTION OF THE ILLUSTRATED EMBODIMENTS

[0020] FIGS. 1-11 illustrate several exemplary embodiments of a user interface panel 10 including a circuit carrier substrate 12, a touch sensor 20 disposed on a first surface of circuit carrier substrate 12, and a user interface substrate 14 disposed on a second surface of circuit carrier substrate 12. User interface substrate 14 defines a touch surface 16 and a gap 18 surrounding touch surface 16.

[0021] Circuit carrier substrate 12 can be embodied as any rigid or flexible substrate suitable for carrying touch sensors, electrical circuitry, conductive traces, and/or electrical components. For example, circuit carrier substrate 12 can be embodied as a rigid printed wiring board made of FR4 material or a flexible carrier comprising a polyester or Mylar sheet. If embodied as a flexible carrier, circuit carrier substrate 12 preferably, but not necessarily, is attached to a further, rigid substrate. One skilled in the art would recognize that circuit carrier substrate 12 could be embodied in many other forms, as well. For example, circuit carrier substrate 12 could be embodied as a piece of glass, plastic, or other suitable material.

Preferably, circuit carrier substrate 12 does not include, at least in the proximity of touch sensor 20 as described further below, any perforations, apertures or other means enabling liquids or other contaminants to pass through circuit carrier substrate 12, from one side thereof to the other.

[0022] Touch sensor 20 includes a first electrode 22 in the form of a conductive, inner electrode pad and a relatively narrow, second, outer electrode 24 adjacent at least a portion of first sensing electrode. Preferably, second sensing electrode 24 is spaced from and substantially surrounds first electrode 22, as shown in FIGS. 3A and 3B. In alternate embodiments, second sensing electrode 24 could be spaced from and adjacent only a portion of first sensing electrode 22, as shown in FIG. 3C.

[0023] FIGS. 3A and 3B illustrate first electrode 22 as having a solid geometric form. In other embodiments, first electrode 22 could have a substantially open, for example, annular or grid-like, geometric form and/or second electrode 24 could partially surround first electrode 22. Fig. 8 illustrates a first electrode 22 having a grid-like form and a second electrode 24 substantially surrounding first electrode 22. In alternate embodiments, second sensing electrode 24 could be spaced from and adjacent only a portion of first sensing electrode 22, rather than substantially surrounding first sensing electrode 22, as shown in FIG. 14.

[0024] FIGS. 3A and 4A illustrate first electrode 22 as generally round and second electrode 24 as generally annular. FIGS. 3B and 4B illustrate first electrode 22 as generally square and second electrode 24 as generally square annular. In other embodiments, first electrode 22 could have other shapes, for example, generally rectangular or irregular, and it could be of substantially open, rather than solid, form. In such embodiments, second electrode

24 could be formed to substantially or partially surround first electrode 22 and have a complementary or other shape.

[0025] First and second electrodes 22, 24 can be made of any suitable material and disposed on circuit carrier substrate 12 using any suitable technique, as would be recognized by one skilled in the art. Suitable materials include, without limitation, copper, silver, ITO, and other conductive and semi-conductive materials, as would be understood by one skilled in the art. Suitable techniques include, without limitation, plating/etching and screen printing, as would be understood by one skilled in the art.

[0026] Touch sensor 20 can include one or more active components, for example, transistors, disposed on circuit carrier substrate 12 proximate first and second electrodes 22, 24 and coupled thereto, as described in U.S. Patent Nos. 5,594,222 and 6,310,611 assigned to TouchSensor Technologies, LLC, the disclosures of which are incorporated herein by reference. Alternatively, touch sensor 20 can include an integral field generation and detection circuit disposed on circuit carrier substrate 12 proximate first and second electrodes 22, 24 and coupled thereto, as described in U.S. Patent No. 6,320,282 assigned to TouchSensor Technologies, LLC, the disclosure of which is incorporated herein by reference. The foregoing sensors sometimes are referred to as field effect sensors.

[0027] One or more electrical traces 26 can be disposed on circuit carrier substrate 12. Such traces can, for example, couple touch sensor 20 to one or more associated controlled devices, control circuits, or elements thereof, which can be located near to or relatively far from sensors 14. Such electrical traces can be disposed on circuit carrier substrate 12 using any suitable technique, as would be recognized by one skilled in the art.

[0028] User interface substrate 14 can be made of metal or other conductive material. For example, user interface substrate 14 can be embodied as a sheet of stainless steel, copper, aluminum, or other metal. Alternatively, user interface substrate 14 could be embodied as a plastic, glass or other substrate having a surface which is plated, coated, or otherwise partially or completely covered with a metal, for example, stainless steel, copper or aluminum, or other conductive material. Preferably, such surface is oriented outwardly so as to be visible to and/or touchable by a user. In either embodiment, the outward facing surface of user interface substrate 14 could bear a protective coating, for example, a lacquer coating. Such a coating could protect the surface from the environment, thereby inhibiting corrosion and simplify cleaning thereof. The coating could, but need not, act as an insulator. Preferably, the coating would be transparent so that the metal or conductive surface of user interface substrate 14 is visible there through.

[0029] User interface substrate 14 can be joined to circuit carrier substrate 12 using any suitable technique. For example, user interface substrate 14 can be joined to circuit carrier substrate 12 using adhesives, mechanical fasteners, and otherwise, as would be recognized by one skilled in the art. Preferably, user interface substrate 14 is joined to circuit carrier substrate 12 so as to minimize or eliminate any air gap between the two, at least in the proximity of first sensing electrode 22 and second sensing electrode 24 and the electric fields generated about them, as discussed further below.

[0030] User interface substrate 14 is shown in FIG. 5 as being disposed on a surface of circuit carrier substrate 12 opposite the surface on which touch sensors 20 and other circuitry and circuit components are located. In other embodiments, user interface substrate 14 can be disposed on the same side of circuit carrier substrate 12 as touch sensors 20 and/or other

conductive circuitry and/or circuit components, provided that some form of electrical insulation is provided between conductive portions of user interface substrate 14 and such electrical components. Such insulation could be embodied as a discrete insulating layer or a portion of user interface substrate 14 having suitable qualities as an electrical insulator. For example, user interface substrate 14 could be embodied as a plastic substrate with a metalized user interface surface, with the plastic portion acting as an insulator between the metalized surface and such electrical components.

[0031] User interface substrate 14 (or, in embodiments wherein user interface substrate 14 is a non-conductive substrate with a metal or other conductive coating or overlay, the conductive surface thereof) includes a center portion 14A and a surrounding portion 14B that together define gap 18 between center portion 14A and surrounding portion 14B. In essence, surrounding portion 14B defines an aperture 30 in user interface substrate 14 or the conductive portion thereof, part of which is occupied by center portion 14A. Aperture 30 and center portion 14A are illustrated as being circular, but can take other shapes as well. For example, aperture 30 and center portion 14A can have generally rectangular, round, or other regular or irregular shapes. Aperture 30 and center portion 14A can, but need not, have complementary shapes. Consequently, gap 18 could, but need not, have a uniform width. The exposed surface of center portion 14A defines touch surface 16.

[0032] FIGS. 1, 2A, 2B, 4A, 4B, 6 and 7 illustrate center portion 14A as having a generally solid geometric form. In other embodiments, center portion 14A could have a more open geometric form. For example, as shown in FIGS. 9-11, center portion 14A could include one or more apertures or perforations 32 therein. Apertures 32 could have any desired shape, and could be provided for decorative and/or functional purposes. For example, as shown in FIG.

11, apertures 32 could form text representing the function controlled by the corresponding touch sensor. Apertures 32 could form other text, as well. Backlighting could be provided to illuminate apertures 32 independently from gap 18 to further identify the location of the corresponding touch sensor, to indicate the status of a corresponding controlled device, or otherwise. For example, in the FIG. 11 embodiment, apertures 32 could be backlit at a first intensity or in a first color to identify the location of the corresponding touch sensor and be backlit at a second intensity or in a second color to indicate that the corresponding controlled device is in the “ON” state.

[0033] Center portion 14A overlies at least a portion of first electrode 22 of touch sensor 20. In the embodiments illustrated in FIGS. 4A and 4B (which are not drawn to scale), center portion 14A completely overlies first electrode 22. In the embodiment illustrated in FIG. 6, center portion 14A overlies most of first electrode 22. In other embodiments, center portion 14a could overlie half or less of first electrode 22.

[0034] In the foregoing embodiments, center portion 14A does not overlie second electrode 24 or the area between first electrode 22 and second electrode 24. In other embodiments, center portion 14A could overlie a relatively small portion of second electrode 24 and the area between first electrode 22 and second electrode 24. In further embodiments, center portion 14A could overlie a larger portion, or substantially all, of second electrode 24.

[0035] In the embodiments illustrated in FIGS. 4A and 4B, surrounding portion 14B surrounds second electrode 24 such that no portion of surrounding portion 14B overlies second electrode 24. In some embodiments, for example, the embodiment illustrated in FIG. 6, surrounding portion 14B can overlie a relatively small portion of second electrode 24. In other embodiments, surrounding portion 14B could overlie more or substantially all of second

electrode 24. Preferably, surrounding portion 14B would not overlie any portion of first electrode 22.

[0036] Aperture 30, center portion 14B, and gap 18 can, but need not, have shapes complementary to those of touch sensor 20, first electrode 22, and second electrode 24, respectively. For example, FIGS. 2A, 3A and 4A illustrate embodiments wherein first electrode 22 and second electrode 24 have generally round and annular shapes, respectively, which are complementary to the generally round and annular shapes of center portion 14A and gap 18, respectively. Also, FIGS. 2B, 3B and 4B illustrate embodiments wherein first electrode 22 and second electrode 24 have generally square and square annular shapes, respectively, which are complementary to the generally square and square annular shapes of center portion 14A and gap 18. FIG. 6, on the other hand, illustrates an embodiment wherein first electrode 22 and second electrode 24 have generally square and square annular shapes, respectively, which are not complementary to the generally round and annular shapes of center portion 14A and gap 18.

[0037] As suggested above, gap 18 can, but need not, completely overlie second electrode 24 such that the entirety of second electrode 24 would be visible through gap 18 but for any intervening structure, for example, circuit carrier substrate 12 on which second electrode 24 is disposed. For example, in the embodiments illustrated in FIGS. 2A, 3A and 4A, and in FIGS. 2B, 3B and 4B, gap 18 completely overlies second electrode 24. On the other hand, in the embodiment shown in FIG. 6, gap 18 does not completely overlie second electrode 24. In further embodiments, other portions or even the entirety of second electrode 24 could be obscured by center portion 14A or surrounding portion 14B of user interface substrate 14 (or

the metal or otherwise conductive surface thereof). For example, center portion 14A or surrounding portion 14B could overlie the entirety of second electrode 24.

[0038] In the illustrated embodiments, gap 18 completely overlies second electrode 24 where center portion 14A, gap 18, first electrode 22 and second electrode 24 have complementary shapes, and gap 18 does not completely overlie second electrode 24 where gap 18, first electrode 22 and second electrode 24 do not have complementary shapes. In other embodiments wherein gap 18, first electrode 22 and second electrode 24 have complementary shapes, gap 18 could only partially overlie second electrode 24. In further embodiments where two or more of gap 18, first electrode 22 and second electrode do not have complementary shapes, gap 18 could completely overlie second electrode 24. In still other embodiments, gap 18 could overlie no portion of second electrode 24.

[0039] User interface 10 can, but need not, include an indicator to indicate, for example, the status of touch sensor 20 or the status of a controlled device coupled to touch sensor 20. Such an indicator can be embodied as an aperture 28 in user interface substrate 14 and any suitable means for backlighting aperture 28, for example a lamp, LED, or other suitable light source, with or without a suitable reflector, as would be recognized by one skilled in the art.

[0040] User interface 10 can, but need not, include means for illuminating gap 18. For example, a lamp, LED, or other suitable light source, with or without a suitable reflector, can be used to backlight gap 18, as would be recognized by one skilled in the art. Such lighting structures and/or associated power and control circuitry could be located on a side of circuit carrier substrate 12 away from user interface substrate 14. Alternatively, such lighting structures and/or associated power and control circuitry could be located on a separate substrate attached to or otherwise associated with a side of circuit carrier substrate 12 away from user

interface substrate 14. In such embodiments, at least relevant portions of circuit carrier substrate 12 would need to be sufficiently transparent or translucent to allow light to pass toward gap 18.

[0041] In other embodiments, front-lighting could be provided using light pipe structure located between circuit carrier substrate 12 and the user interface substrate 14 and one or more associated light sources, for example, lamps or LEDs. In embodiments wherein user interface substrate 14 is a plastic, glass, or other substrate plated, coated or otherwise covered with a metal or other conductive material, the substrate material itself could be used to conduct light provided by a light source. For example, an LED could protrude into user interface substrate 14 from circuit carrier substrate 12 or elsewhere, thereby providing light to illuminate transparent or translucent portions of user interface substrate 14.

[0042] FIGS. 1-6 illustrate user interface panels 10 having a single touch sensor 20 and touch surface 16. In other embodiments, a user interface panel 10 can include more than one touch sensor 20 and touch surface 16. FIG. 7 illustrates a user interface panel 10 having four touch sensors 20 and touch surfaces 16. In other embodiments, a user interface panel 10 could have more or fewer than four touch sensors 20 and touch surfaces 16.

[0043] In operation, a field generation circuit associated with touch sensor 20 generates electric fields about first and second electrodes 22, 24. At least a portion of the electric field generated about first electrode 22 couples with center portion 14A. At least a portion of the electric field generated about second electrode 24 penetrates user interface substrate 14 through gap 18. The electric field generated about second electrode 24 tends to preclude the electric field generated about first electrode 22 from coupling to surrounding portion 14B.

[0044] A detection circuit associated with touch sensor 20 can detect disturbances to the foregoing electric fields resulting from the proximity of a stimulus, for example, a finger or other conductive object, to touch surface 16 and/or gap 18, and can distinguish whether such stimulus is proximate touch surface 16, gap 18, or both, based on disturbances to the electric fields caused by such stimulus. The detection circuit can be configured to output a signal (or lack thereof) indicative of a touch to touch surface 16 when a stimulus is proximate only touch surface 16. The field detection circuit also can be configured to output a signal (or lack thereof) indicative of no touch to touch surface 16 when no stimulus is present proximate touch surface 16, when a stimulus is simultaneously present proximate touch surface 16 and gap 18 or when a stimulus is present proximate gap 18 but not touch surface 16.

[0045] In alternative embodiments, second electrode 24 could be omitted. In such embodiments, first electrode 22 preferably, but not necessarily, is fully contained underneath center portion 14A such that gap 18 precludes or limits coupling of the electric field generated about first electrode 22 to surrounding portion 14B. In such embodiments, touch sensor 20 could be configured to output a signal (or lack thereof) indicative of a touch to touch surface 16 when a stimulus is present proximate touch surface 16, regardless of whether the stimulus also is present proximate gap 18, and to output a signal (or lack thereof) indicative of no touch to touch surface 16 when a stimulus is not present proximate touch surface 16.

[0046] In other alternative embodiments, center portion 14A could be omitted. In such embodiments, touch surface 16 is defined by the structure underlying omitted center portion 14A, as shown in FIG. 13. This structure could be, for example, an exposed surface of circuit carrier substrate 12 or, where user interface substrate 14 is embodied as a non-conductive substrate bearing a conductive coating, a portion of the non-conductive substrate 14.

[0047] In such embodiments, both first electrode 22 and second electrode 24 preferably lie within the confines of aperture 30 such that the electric fields generated about first electrode 22 and second electrode 24, or portions thereof, penetrate user interface substrate 14 through aperture 30. The detection circuit detects disturbances to the electric fields caused by a stimulus in proximity thereto. The detection circuit could be configured to output a signal (or lack thereof) indicative of a touch to touch surface 16 when a stimulus is proximate only the portion of touch surface 16 overlying first electrode 22. The field detection circuit also can be configured to output a signal (or lack thereof) indicative of no touch to touch surface 16 when no stimulus is present proximate touch surface 16, when a stimulus is simultaneously present proximate the portion of touch surface 16 overlying first electrode 22 and second electrode 24, or when a stimulus is present proximate the portion of touch surface 16 overlying second electrode 24 but not the portion of touch surface 16 overlying first electrode 22.

[0048] Alternatively, surrounding portion 14B could overlie some portion or all of second electrode 24, or it could overlie all of second electrode 24 and a portion of first electrode 22. In such embodiments, at least a portion of the electric field generated about first electrode 22 would penetrate user interface surface 14 through aperture 30 and at least a portion of the electric field generated about second electrode 24 could couple to surrounding portion 14B. In such embodiments, the detection circuit could be configured to output a signal (or lack thereof) indicative of a touch to touch surface 16 when a stimulus is proximate only touch surface 16 and to output a signal (or lack thereof) indicative of no touch to touch surface 16 when no stimulus is present proximate touch surface 16, when a stimulus is simultaneously present proximate touch surface 16 and neighboring portions of surrounding portion 14B, or when a

stimulus is present proximate neighboring portions of surrounding portion 14B but not proximate touch surface 16.

[0049] In further embodiments, surrounding portion 14B could be omitted. In such embodiments, center portion 14A overlies some or all of first electrode 22 and could further overlie all or some of second electrode 24. One such embodiment is shown in FIG. 12. The principles of operation for such embodiments are similar to those described above in connection with embodiments including both center portion 14A and surrounding portion 14B, except that portions of the electric field generated about outer electrode 24 simply extend around and past the periphery of center portion 14A, rather than penetrating user interface substrate 14 through gap 18 (which gap would not exist in such embodiments due to the omission of surrounding portion 14B).

[0050] The foregoing descriptions and drawings set forth certain exemplary embodiments of the invention, but are not intended to limit the scope thereof. One skilled in the art would recognize that the exemplary embodiments could be modified without departing from the scope of the invention as claimed below.

I claim:

1. A user interface comprising:
 - a circuit carrier substrate;
 - a first electrode structure disposed on said circuit carrier substrate, said first electrode structure comprising a first sensing electrode and a second sensing electrode abutting at least a portion of said first sensing electrode;
 - a field generation and detection circuit coupled to said first sensing electrode and said second sensing electrode of said first electrode structure; and
 - a user interface substrate associated with said circuit carrier substrate, said user interface substrate comprising a layer of conductive material defining a gap, said gap surrounding a center portion of said layer of conductive material, said center portion overlying at least a portion of said first sensing electrode of said first electrode structure, and said gap being surrounded by a surrounding portion of said layer of conductive material.
2. The user interface of claim 1 wherein said first sensing electrode of said first electrode structure comprises a thin conductive electrode pad having a substantially closed geometric form.
3. The user interface of claim 1 wherein said first sensing electrode of said first electrode structure comprises a thin conductive electrode pad having a substantially open geometric form.

4. The user interface of claim 1 wherein said second sensing electrode of said first electrode structure substantially surrounds said first sensing electrode.
5. The user interface of claims 1 wherein said center portion further overlies at least a portion of said second sensing electrode of said first electrode structure.
6. The user interface of claim 1 wherein said gap substantially overlies said second sensing electrode of said first electrode structure.
7. The user interface of claim 1 wherein said surrounding portion overlies at least a portion of said second sensing electrode of said first electrode structure.
8. The user interface of claims 1 wherein said field generation and detection circuit is embodied on an integrated circuit proximate said first and second sensing electrodes of said first electrode structure.
9. The user interface of claim 1 wherein said field generation and detection circuit generates electric fields about said first and second sensing electrodes of said first electrode structure.
10. The user interface of claim 9 wherein at least a portion of said electric field about said second sensing electrode of said first electrode structure penetrates said user interface substrate through said gap.

11. The user interface of claim 10 wherein said field generation and detection circuit detects disturbances to said electric fields and provides an output indicative of proximity of a stimulus to said center portion.
12. The user interface of claim 1 further comprising an indicator.
13. The user interface of claim 12 wherein said indicator comprises an aperture in said user interface substrate and a light source associated with said aperture.
14. The user interface of claim 1 further comprising means for illuminating said gap.
15. The user interface of claim 1 wherein said user interface substrate comprises a conductive material.
16. The user interface of claim 15 wherein said user interface substrate comprises stainless steel, aluminum, or copper.
17. The user interface of claim 1 wherein said user interface substrate comprises a dielectric material having a conductive surface disposed thereon.
18. The user interface of claim 1 wherein substantially no air gap exists between said circuit carrier substrate and said user interface substrate proximate said first electrode structure.

19. The user interface of claim 1 wherein substantially no air gap exists between said circuit carrier substrate and said user interface substrate.
20. The user interface of claim 1 wherein said first electrode structure and said user interface substrate are located on different sides of said circuit carrier substrate.
21. The user interface of claim 1 wherein at least a portion of said first electrode structure and said user interface substrate are located on the same side of said circuit carrier substrate.
22. The user interface of claim 21 further comprising an electrical insulator separating said at least a portion of said first electrode structure from said user interface substrate.
23. The user interface of claim 1 further comprising:
a second electrode structure, said second electrode structure comprising a first sensing electrode and a second sensing electrode abutting at least a portion of said first sensing electrode;
wherein said layer of conductive material further defines a second gap, said second gap surrounding a second center portion of said layer of conductive material, said second center portion overlying at least a portion of said first sensing electrode of said second electrode structure, and said second gap being surrounded by said surrounding portion of said layer of conductive material.

24. A user interface comprising:

a circuit carrier substrate;

a first sensing electrode disposed on said circuit carrier substrate;

a field generation and detection circuit coupled to said first sensing electrode;

a user interface substrate connected to said circuit carrier substrate;

said user interface substrate defining a center portion overlying at least a portion of said first sensing electrode, a gap surrounding said center portion and overlying an area about the perimeter of said first sensing electrode, and a surrounding portion surrounding said gap.

FIG. 1

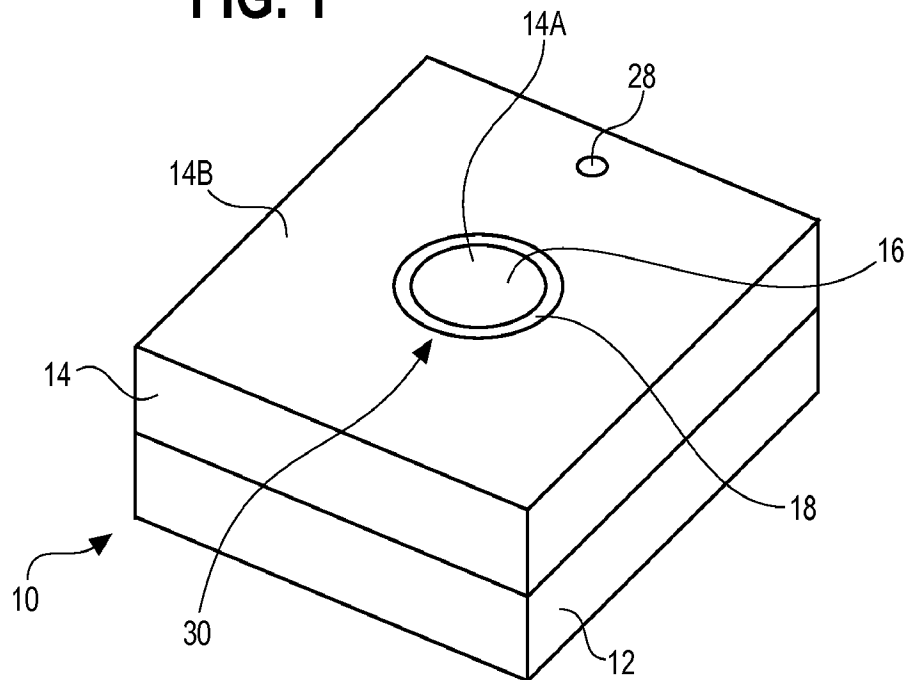


FIG. 7

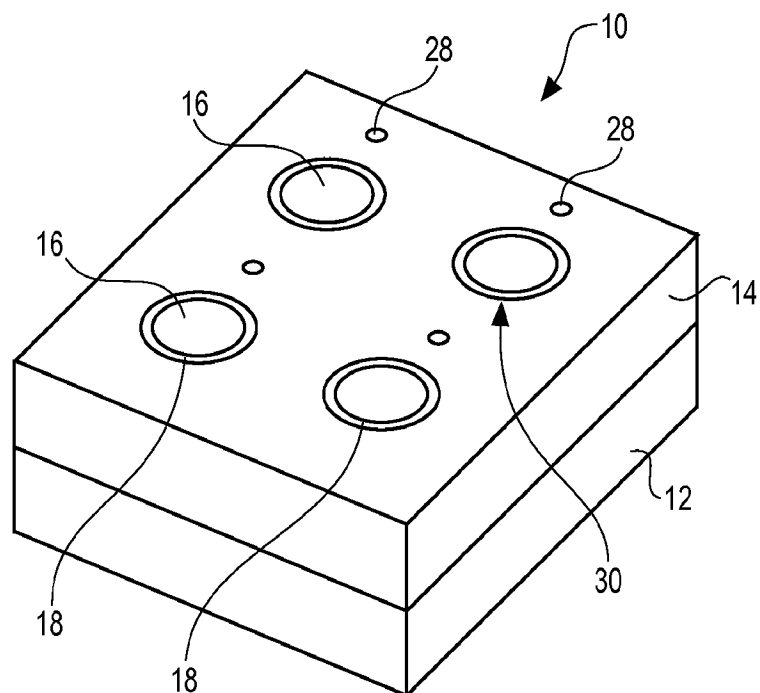


FIG. 2A

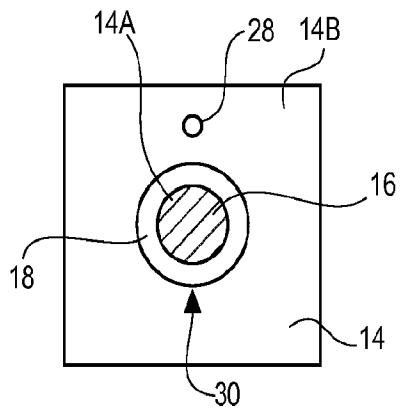


FIG. 2B

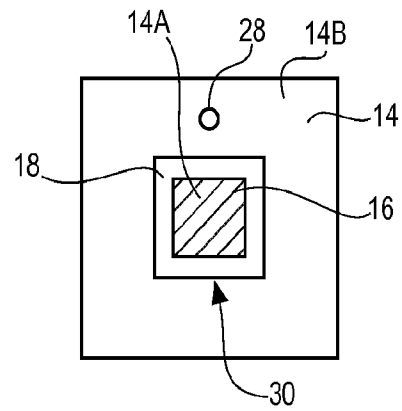


FIG. 3A

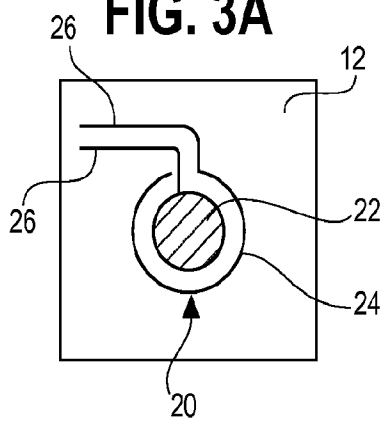


FIG. 3B

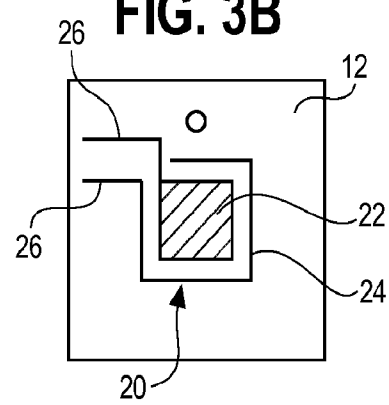


FIG. 5

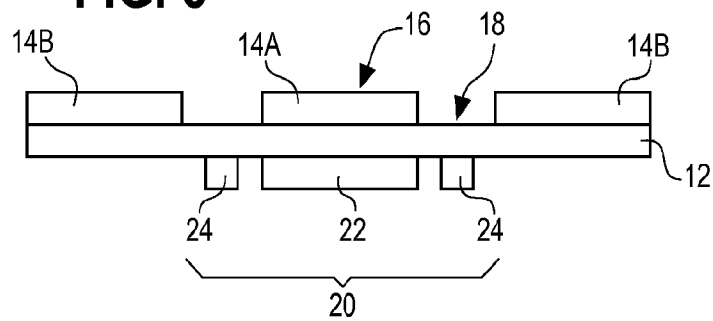


FIG. 3C

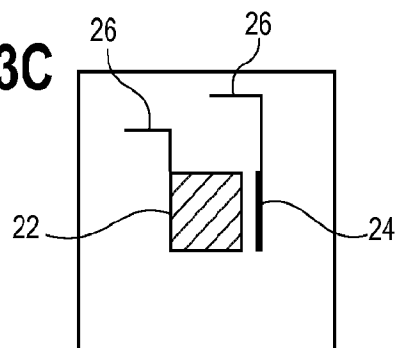


FIG. 4A

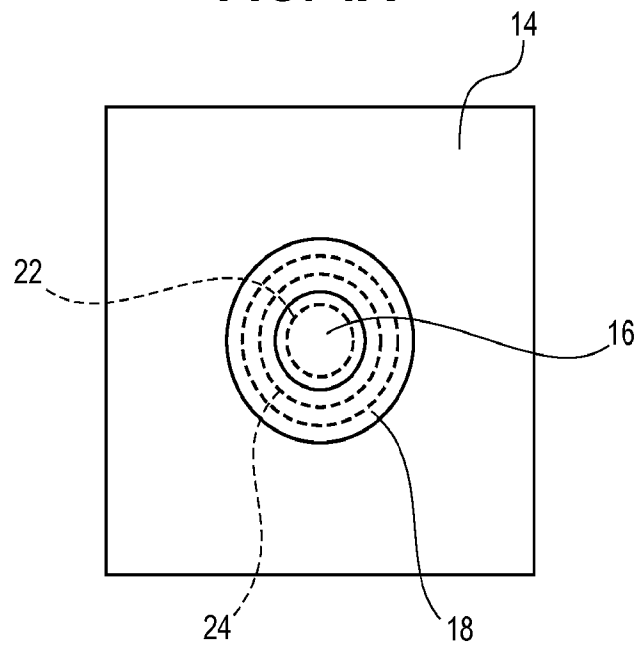


FIG. 4B

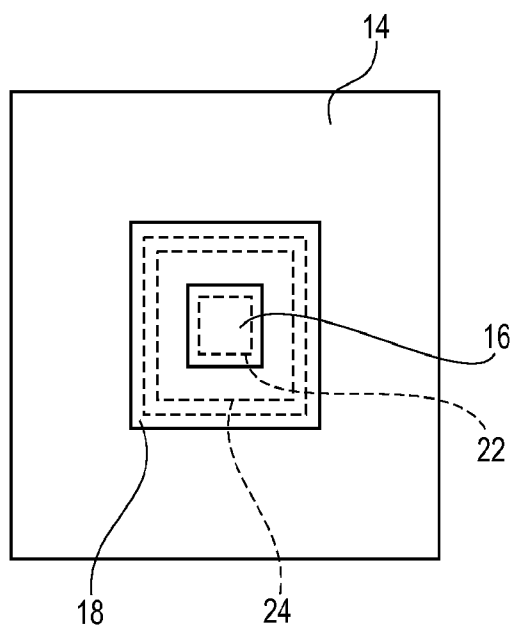


FIG. 6

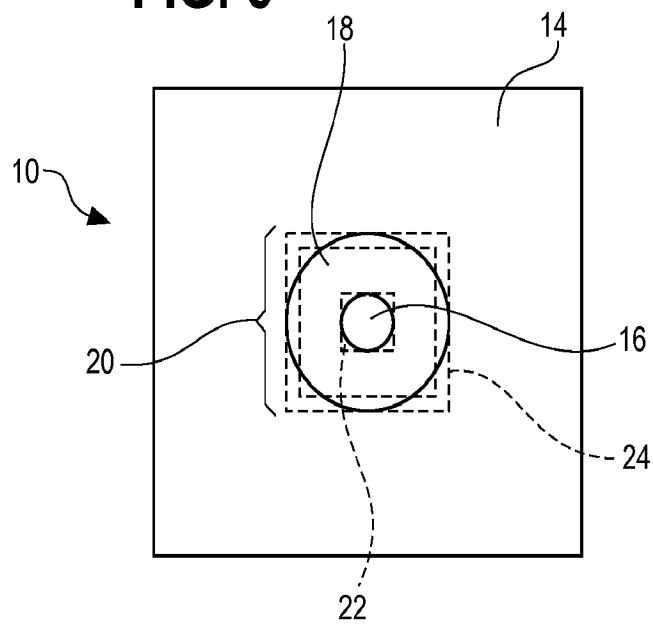


FIG. 8




FIG. 9

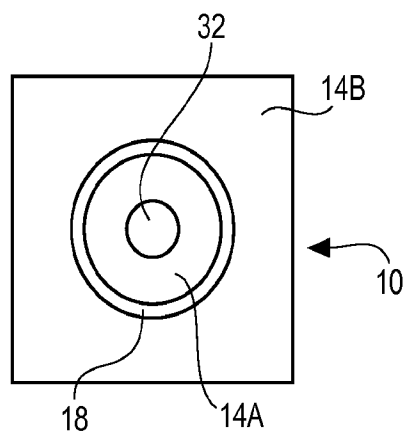


FIG. 10

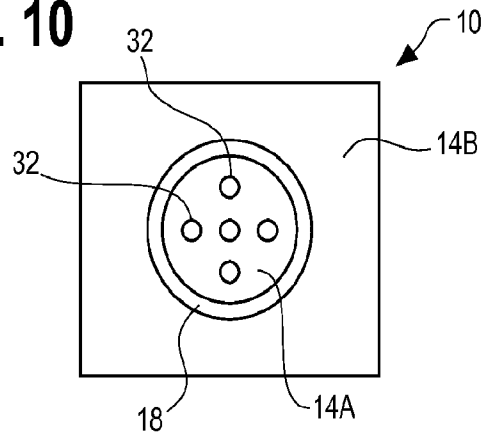


FIG. 11

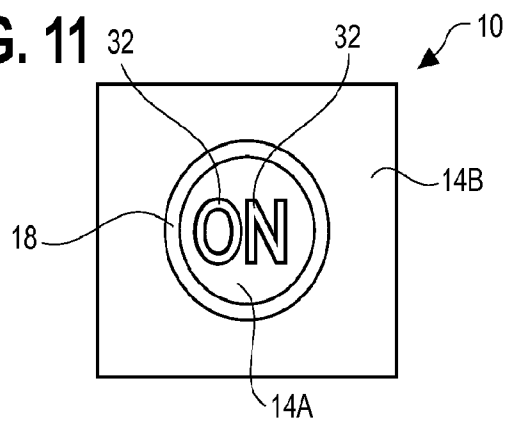


FIG. 12


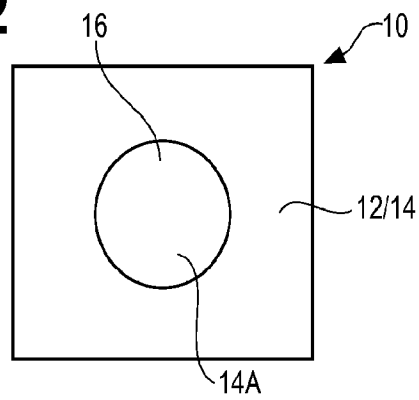


FIG. 13

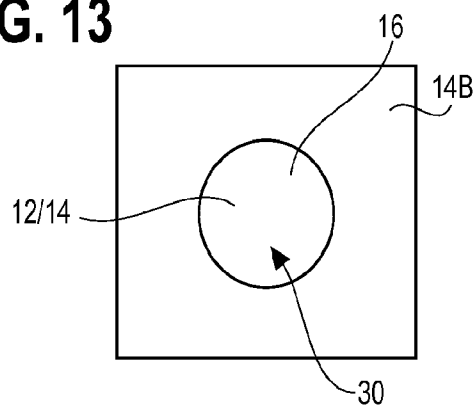

INTERNATIONAL SEARCH REPORT

International application No

PCT/US2010/057734

A. CLASSIFICATION OF SUBJECT MATTER

INV. H03K17/96
ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
H03K

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EP0-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2005/001633 A1 (OKUSHIMA AKIHIRO [JP] ET AL) 6 January 2005 (2005-01-06) paragraphs [0042], [0 46], [0 74]; figures 6A-6B -----	1-24
X	US 2005/006213 A1 (ENGELMANN HARRY [DE]) 13 January 2005 (2005-01-13) paragraphs [0035], [0 37] - [0041], [0 47] - [0050]; figures 2, 4 -----	24 1-23
A	DE 10 2004 026836 A1 (SCHOTT AG [DE]) 22 December 2005 (2005-12-22) paragraphs [0008], [0 25]; figures 1A-1B -----	1,12-14
A	US 5 593 222 A (MAGLICA ANTHONY [US]) 14 January 1997 (1997-01-14) cited in the application figure 2 -----	1,24
-/-		



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance
"E" earlier document but published on or after the international filing date
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
"O" document referring to an oral disclosure, use, exhibition or other means
"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
"&" document member of the same patent family

Date of the actual completion of the international search

17 March 2011

Date of mailing of the international search report

25/03/2011

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040,
Fax: (+31-70) 340-3016

Authorized officer

De La Pinta, Luis

INTERNATIONAL SEARCH REPORT

International application No
PCT/US2010/057734

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 6 310 611 B1 (CALDWELL DAVID W [US]) 30 October 2001 (2001-10-30) cited in the application figure 2 -----	1,24
A	US 6 320 282 B1 (CALDWELL DAVID W [US]) 20 November 2001 (2001-11-20) cited in the application column 7, lines 48-64; figures 2, 9 -----	1,24

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/US2010/057734

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2005001633	A1	06-01-2005	EP 1487104 A2 15-12-2004
			JP 4009953 B2 21-11-2007
			JP 2004340662 A 02-12-2004
			KR 20040098574 A 20-11-2004
US 2005006213	A1	13-01-2005	DE 10320548 A1 16-12-2004
			EP 1475692 A2 10-11-2004
			JP 2004335477 A 25-11-2004
DE 102004026836	A1	22-12-2005	NONE
US 5593222	A	14-01-1997	AT 205292 T 15-09-2001
			AU 709851 B2 09-09-1999
			BR 9612788 A 23-11-1999
			CA 2253721 A1 25-06-1998
			DE 69615064 D1 11-10-2001
			DE 69615064 T2 27-06-2002
			DK 0912650 T3 17-12-2001
			EP 0912650 A1 06-05-1999
			ES 2162059 T3 16-12-2001
			HK 1018286 A1 08-02-2002
			HU 0002123 A2 28-10-2000
			JP 3999817 B2 31-10-2007
			JP 2001502469 T 20-02-2001
			NO 985201 A 06-11-1998
			NZ 332636 A 28-05-1999
			PL 329737 A1 12-04-1999
			TR 9802239 T2 21-08-2000
			WO 9827603 A1 25-06-1998
			US 5645955 A 08-07-1997
US 6310611	B1	30-10-2001	NONE
US 6320282	B1	20-11-2001	AT 371255 T 15-09-2007
			AU 768047 B2 27-11-2003
			AU 2510900 A 01-08-2000
			CA 2359364 A1 20-07-2000
			CN 1341268 A 20-03-2002
			DE 60036083 T2 08-05-2008
			EP 1153403 A1 14-11-2001
			HK 1044850 A1 26-01-2007
			JP 2002535862 T 22-10-2002
			NZ 513570 A 26-09-2003
			WO 0042628 A1 20-07-2000
			US 2002057020 A1 16-05-2002