




(86) **Date de dépôt PCT/PCT Filing Date:** 2011/09/09
(87) **Date publication PCT/PCT Publication Date:** 2012/03/15
(45) **Date de délivrance/Issue Date:** 2016/05/03
(85) **Entrée phase nationale/National Entry:** 2013/03/04
(86) **N° demande PCT/PCT Application No.:** CA 2011/001006
(87) **N° publication PCT/PCT Publication No.:** 2012/031353
(30) **Priorités/Priorities:** 2010/09/09 (US61/381,243);
2010/11/04 (US61/410,099)

(51) **Cl.Int./Int.Cl.** *E21B 7/08* (2006.01)
(72) **Inventeurs/Inventors:**
CLAUSEN, JEFFERY, US;
PRILL, JONATHAN RYAN, CA
(73) **Propriétaire/Owner:**
NATIONAL OILWELL VARCO, L.P., US
(74) **Agent:** TOMKINS, DONALD V.

(54) **Titre : APPAREIL DE FORAGE ROTATIF DE FOND DE TROU COMPORTANT DES ELEMENTS EN INTERFACE AVEC LES FORMATIONS ET SYSTEME DE COMMANDE**
(54) **Title: DOWNHOLE ROTARY DRILLING APPARATUS WITH FORMATION-INTERFACING MEMBERS AND CONTROL SYSTEM**

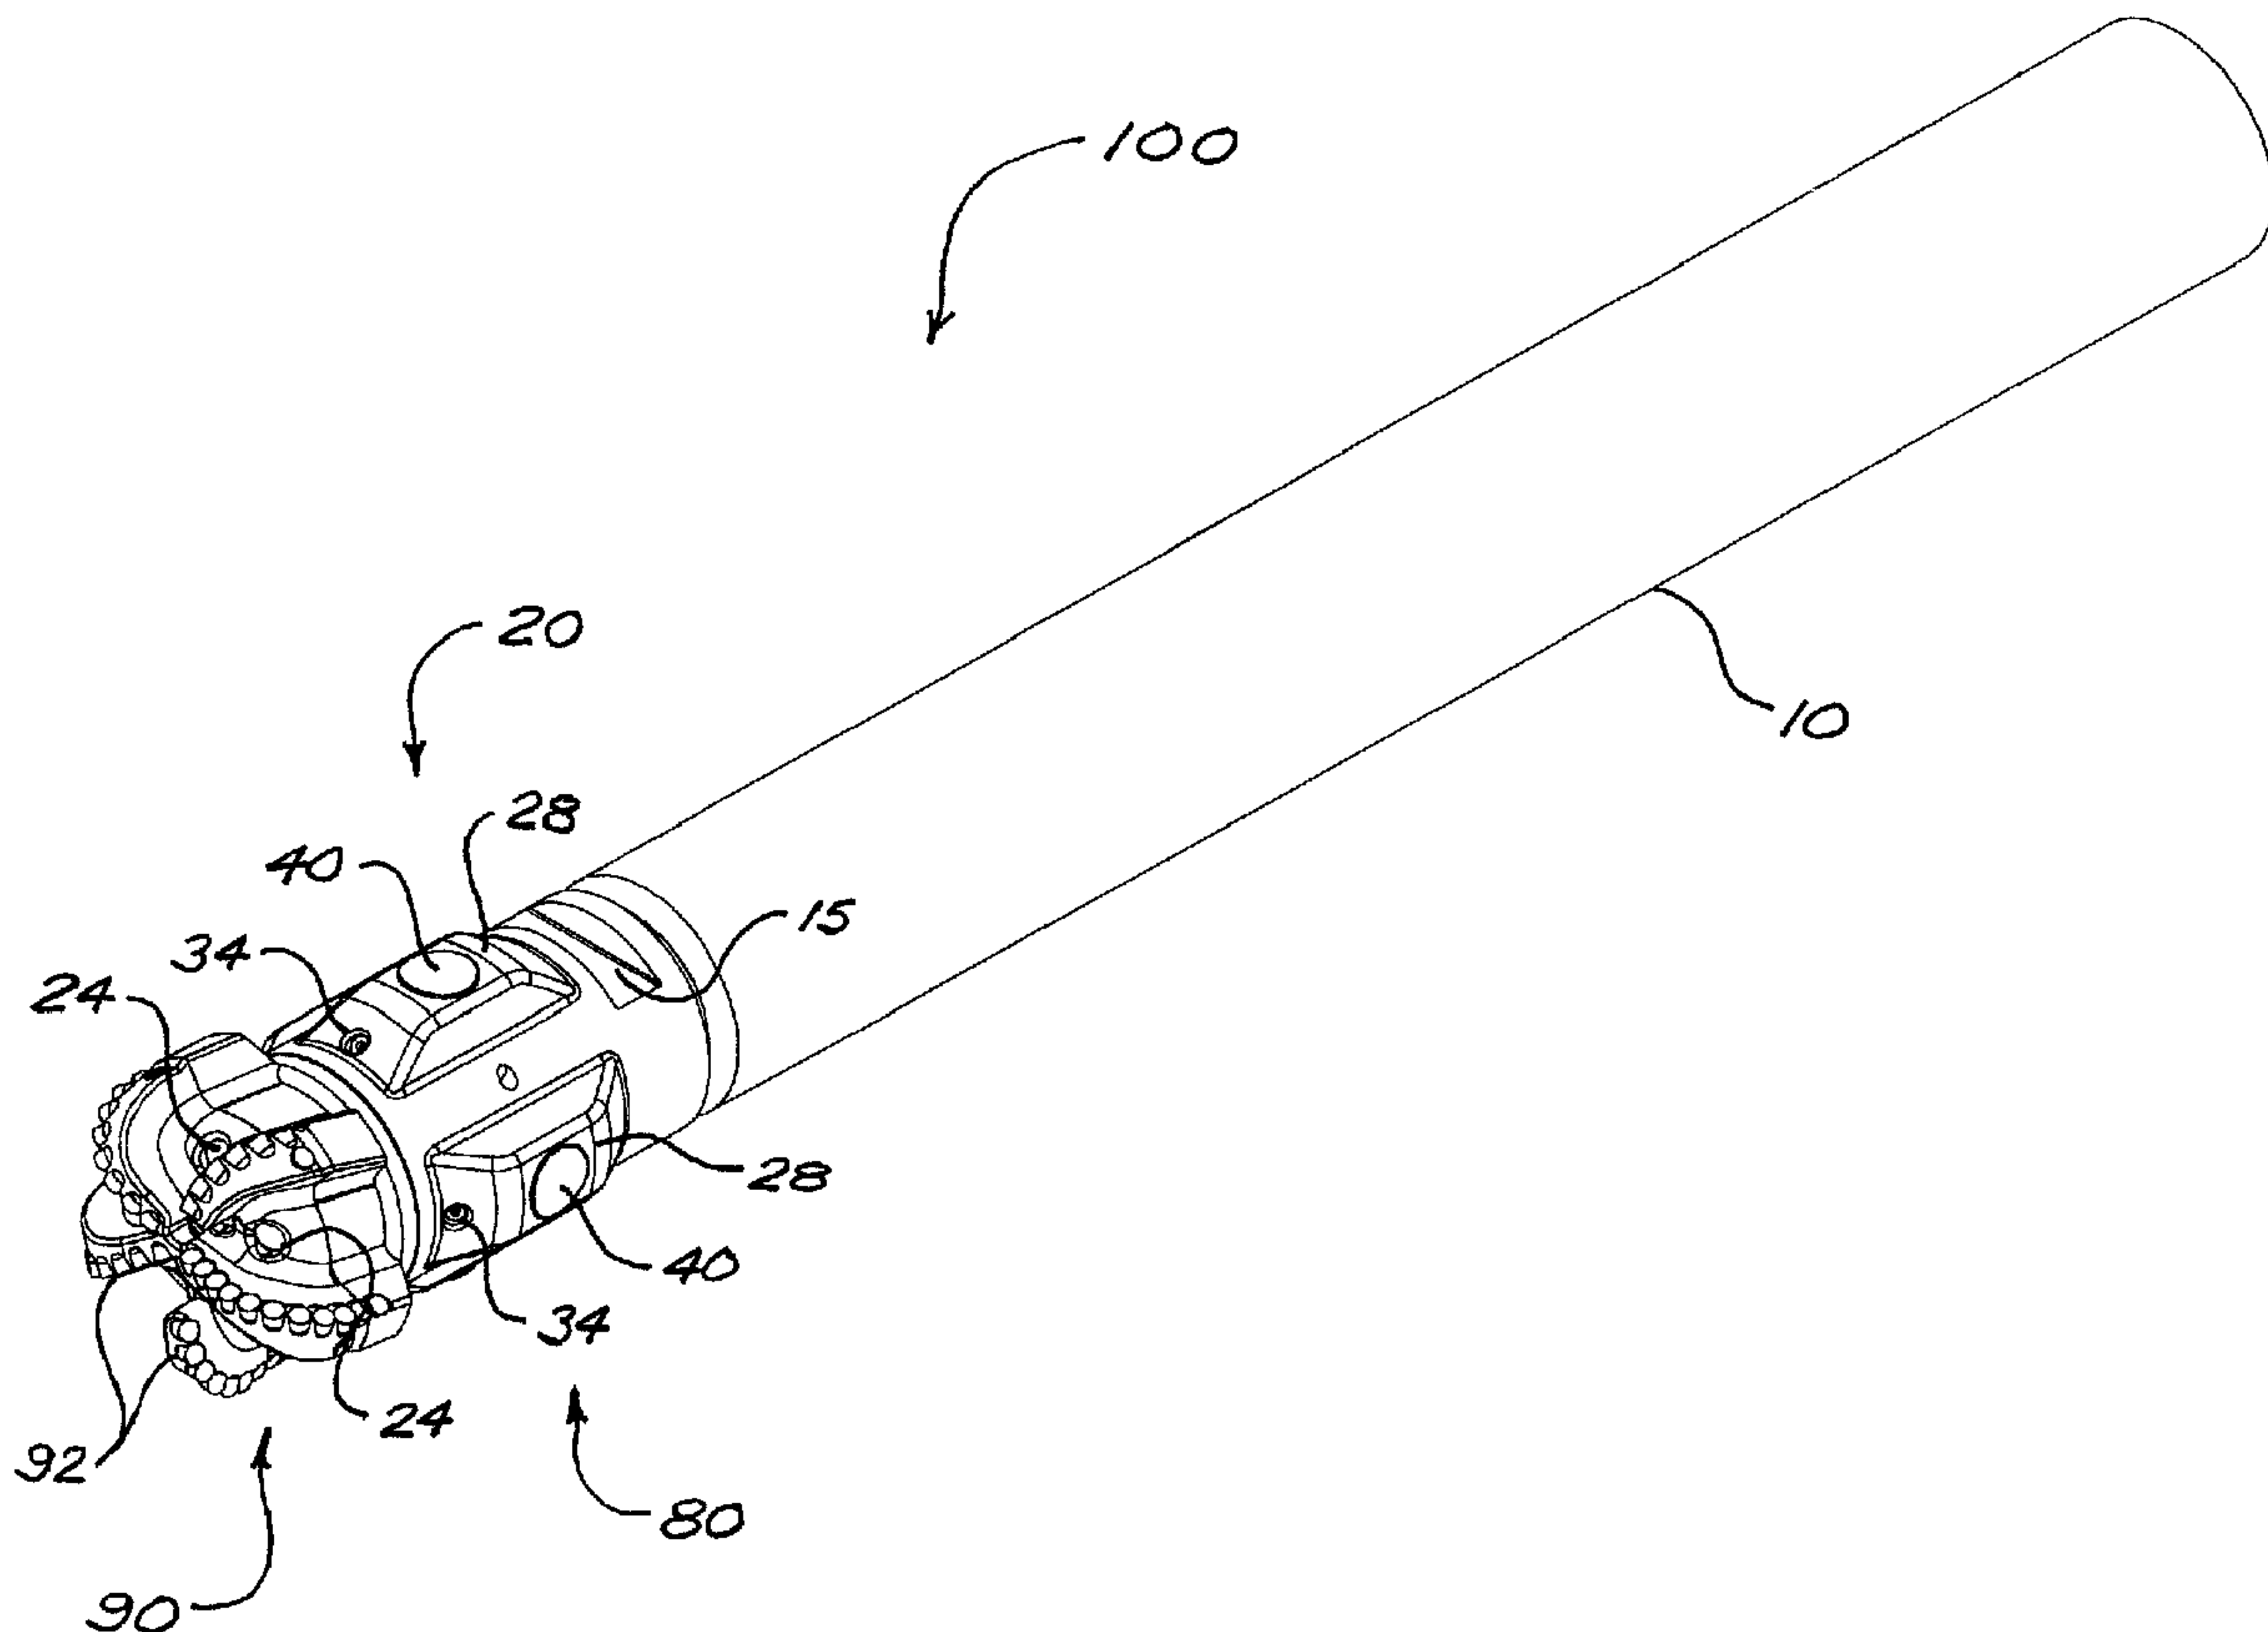

(57) **Abrégé/Abstract:**

A steerable drilling apparatus includes a control system inside a cylindrical housing connected to a drill bit having radially-extendable pistons. A piston-actuating fluid flows from the housing and through a fluid-metering assembly which directs fluid into fluid channels in the drill bit leading to respective pistons. The control system controls the fluid-metering assembly to selectively



(57) Abrégé(suite)/Abstract(continued):

allow fluid to flow through the fluid channels to the pistons and to exit through an orifice in each fluid channel. The selective fluid flow causes pistons in the drill bit to temporarily extend in the opposite direction to a desired wellbore deviation, thereby deflecting it away from the borehole centerline. The fluid-metering assembly has the ability to stabilize, steer, and change TFA within the drill bit by moving an upper member within the fluid-metering assembly. The control system and the drill bit connect in a specific manner to facilitate removal to change the drill bit's steering section and cutting structure configuration or gauge simultaneously.

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau(43) International Publication Date
15 March 2012 (15.03.2012)(10) International Publication Number
WO 2012/031353 A1(51) International Patent Classification:
E21B 7/08 (2006.01)(21) International Application Number:
PCT/CA2011/001006(22) International Filing Date:
9 September 2011 (09.09.2011)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
61/381,243 9 September 2010 (09.09.2010) US
61/410,099 4 November 2010 (04.11.2010) US(71) Applicant (for all designated States except US): **NATIONAL OILWELL VARCO, L.P.** [US/US]; 7909 Parkwood Circle Drive, Houston, TX 77036 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **CLAUSEN, Jeffery** [US/US]; 11930 Golden Lodge Lane, Houston, TX 77066 (US). **PRILL, Jonathan Ryan** [CA/CA]; 7603 - 16 Avenue SW, Edmonton, Alberta T6X 2M3 (CA).(74) Agent: **TOMKINS, Donald, V.**; c/o Parlee McLaws LLP, 1500, 10180 - 101 Street, Edmonton, Alberta T5J 4K1 (CA).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.


(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

— with amended claims (Art. 19(1))

(54) Title: DOWNHOLE ROTARY DRILLING APPARATUS WITH FORMATION-INTERFACING MEMBERS AND CONTROL SYSTEM

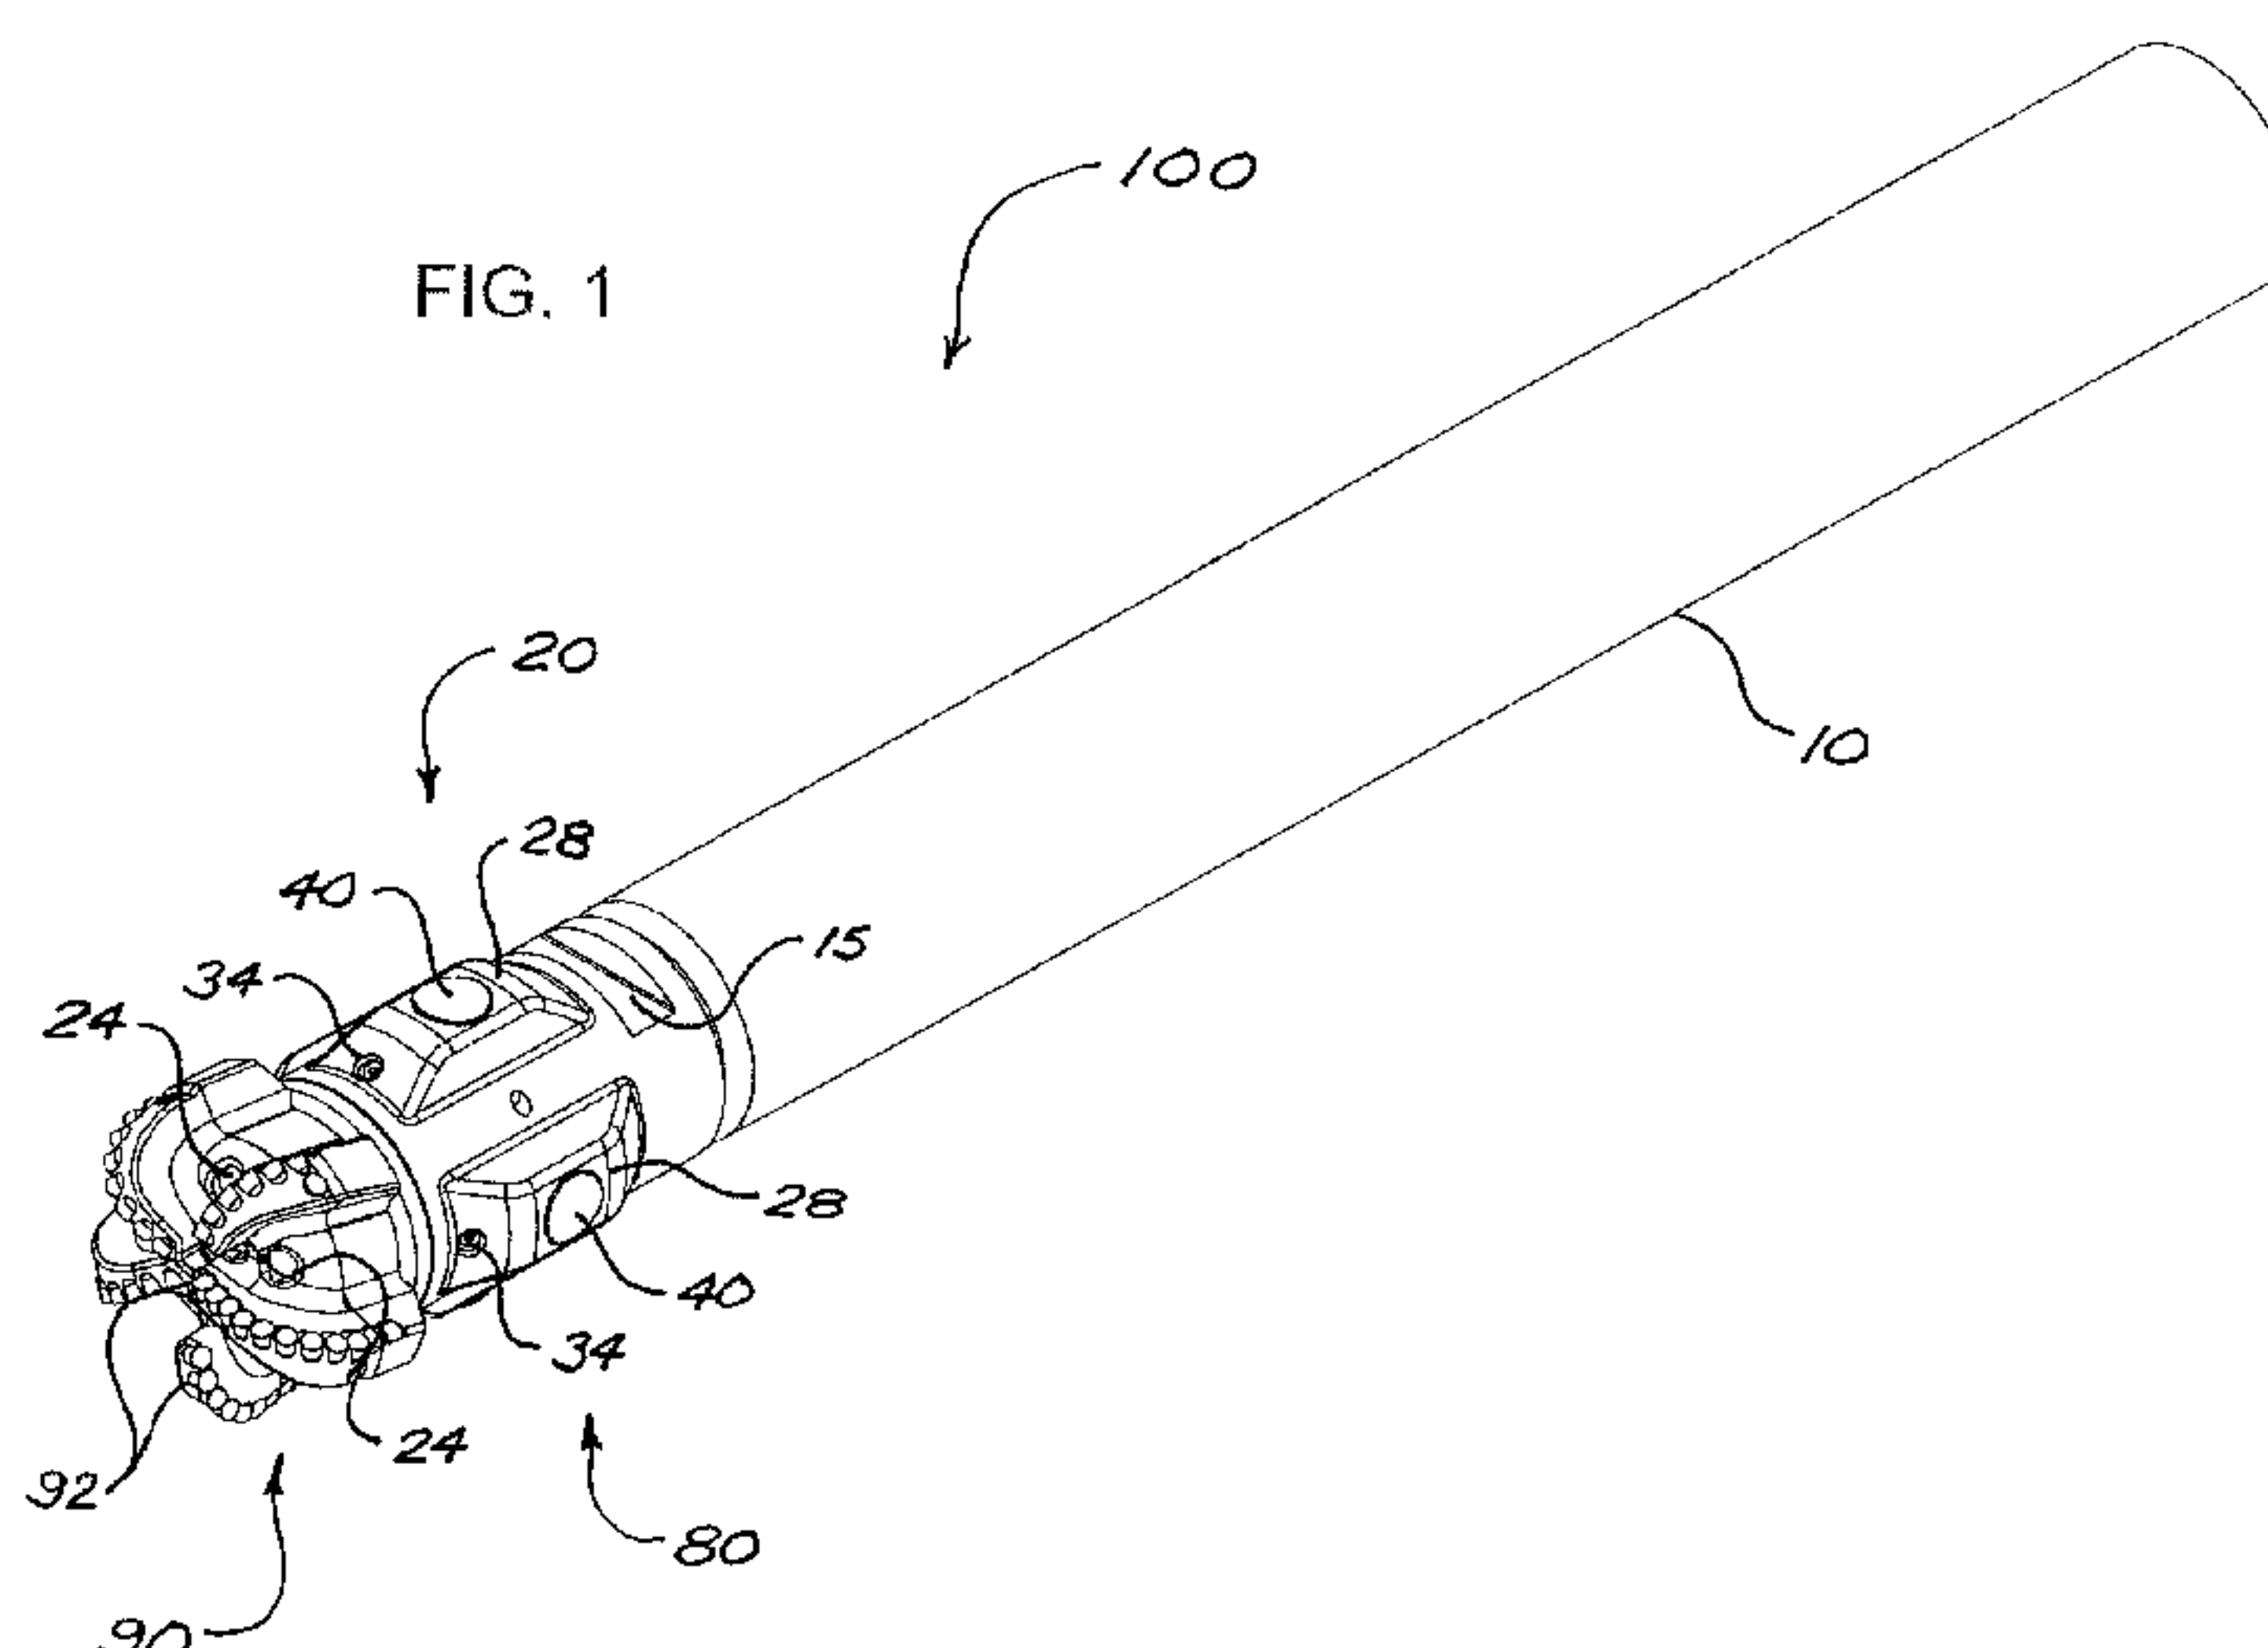

(57) Abstract: A steerable drilling apparatus includes a control system inside a cylindrical housing connected to a drill bit having radially-extendable pistons. A piston-actuating fluid flows from the housing and through a fluid-metering assembly which directs fluid into fluid channels in the drill bit leading to respective pistons. The control system controls the fluid-metering assembly to selectively allow fluid to flow through the fluid channels to the pistons and to exit through an orifice in each fluid channel. The selective fluid flow causes pistons in the drill bit to temporarily extend in the opposite direction to a desired wellbore deviation, thereby deflecting it away from the borehole centerline. The fluid-metering assembly has the ability to stabilize, steer, and change TFA within the drill bit by moving an upper member within the fluid-metering assembly. The control system and the drill bit connect in a specific manner to facilitate removal to change the drill bit's steering section and cutting structure configuration or gauge simultaneously.

DOWNHOLE ROTARY DRILLING APPARATUS WITH FORMATION-INTERFACING MEMBERS AND CONTROL SYSTEM

5

FIELD OF THE DISCLOSURE

The present disclosure relates in general to systems and apparatus for directional drilling of wellbores, particularly for oil and gas wells.

BACKGROUND

Rotary steerable systems (RSS) currently used in drilling oil and gas wells into
10 subsurface formations commonly use tools that operate above the drill bit as completely
independent tools controlled from the surface. These tools are used to steer the drill
string in a desired direction away from a vertical or other desired wellbore orientation,
such as by means of steering pads or reaction members that exert lateral forces against
the wellbore wall to deflect the drill bit relative to the wellbore centerline. Most of these
15 conventional systems are complex and expensive, and have limited run times due to
battery and electronic limitations. They also require the entire tool to be transported
from the well site to a repair and maintenance facility when parts of the tool break down.
Most currently-used designs require large pressure drops across the tool for the tools to
work well. Currently there is no easily separable interface between RSS control systems
20 and formation-interfacing reaction members that would allow directional control directly
at the bit.

There are two main categories of rotary steerable drilling systems used for
directional drilling. In “point-the-bit” drilling systems, the orientation of the drill bit is
varied relative to the centerline of the drill string to achieve a desired wellbore deviation.
25 In “push-the-bit” systems, a lateral or side force is applied to the drill string (typically at a
point several feet above the drill bit), thereby deflecting the bit away from the local axis
of the wellbore to achieve a desired deviation.

Rotary steerable systems (RSS) currently used for directional drilling focus on
tools that sit above the drill bit and either push the bit with a constant force several feet

above the bit, or point the bit in order to steer the bit in the desired direction. Push-the-bit systems are simpler and more robust, but have limitations due to the applied side force being several feet from the bit and thus requiring the application of comparatively large forces to deflect the bit. As a matter of basic physics, the side force necessary to induce a given bit deflection (and, therefore, a given change in bit direction) will increase as the distance between the side force and the bit increases.

Examples of prior art RSS systems may be found in U.S. Patents No. 4,690,229 (Raney); 5,265,682 (Russell et al.); 5,513,713 (Groves); 5,520,255 (Barr et al.); 5,553,678 (Barr et al.); 5,582,260 (Murer et al.); 5,706,905 (Barr); 5,778,992 (Fuller); 5,803,185 (Barr et al.); 5,971,085 (Colebrook); 6,279,670 (Eddison et al.); 6,439,318 (Eddison et al.); 7,413,413,034 (Kirkhope et al.); 7,287,605 (Van Steenwyk et al.); 7,306,060 (Krueger et al.); 7,810,585 (Downton); and 7,931,098 (Aronstam et al.), and in Int'l Application No. PCT/US2008/068100 (Downton), published as Int'l Publication No. WO 2009/002996 A1.

Currently-used RSS designs typically require large pressure drops across the bit, thus limiting hydraulic capabilities in a given well due to increased pumping horsepower requirements for circulating drilling fluid through the apparatus. Point-the-bit systems may offer performance advantages over push-the-bit systems, but they require complex and expensive drill bit designs; moreover, they can be prone to bit stability problems in the wellbore, making them less consistent and harder to control, especially when drilling through soft formations.

A push-the-bit system typically requires the use of a filter sub run above the tool to keep debris out of critical areas of the apparatus. Should large debris (e.g., rocks) or large quantities of lost circulation material (e.g., drilling fluid) be allowed to enter the valve arrangements in current push-the-bit tool designs, valve failure is typically the result. However, filter subs are also prone to problems; should lost circulation material or rocks enter and plug up a filter sub, it may be necessary to remove (or "trip") the drill string and bit from the wellbore in order to clean out the filter.

For the foregoing reasons, there is a need for rotary steerable push-the-bit drilling systems and apparatus that can deflect the drill bit to a desired extent applying lower side forces to the drill string than in conventional push-the-bit systems, while producing less pressure drop across the tool than occurs using known systems. There is also a need for rotary steerable push-the-bit drilling systems and apparatus that can operate reliably without needing to be used in conjunction with filter subs.

Push-the-bit RSS designs currently in use typically incorporate an integral RSS control system or apparatus for controlling the operation of the RSS tool. It is therefore necessary to disconnect the entire RSS apparatus from the drill string and replace it with a new one whenever it is desired to change bit sizes. This results in increased costs and lost time associated with bit changes. Accordingly, there is also a need for push-the-bit RSS designs in which the RSS control apparatus is easily separable from the steering mechanism and can be used with multiple drill bit sizes.

There is a further need for push-the-bit RSS systems and apparatus that can be selectively operated in either a first mode for directional drilling, or a second mode in which the steering mechanism is turned off for purposes of straight, non-deviated drilling. Such operational mode selectability will increase service life of the apparatus as well as the time between tool change-outs in the field. In addition, there is a need for such systems and apparatus that use a field-serviceable modular design, allowing the control system and components of the pushing system to be changed out in the field, thereby providing increased reliability and flexibility to the field operator, and at lower cost.

BRIEF SUMMARY

In general terms, the present disclosure teaches embodiments of push-the-bit rotary steerable drilling apparatus (alternatively referred to as an RSS tool) comprising a drill bit having a cutting structure, a pushing mechanism (or "steering section") for laterally deflecting the cutting structure by applying a side force to the drill bit, and a control assembly for actuating the bit-pushing mechanism. As used in this patent specification, the term "drill bit" is to be understood as including both the cutting structure and the steering section, with the cutting structure being connected to the lower

end of the steering section. The cutting structure may be permanently connected to or integral with the steering section, or may be demountable from the steering section.

5 The steering section of the drill bit houses one or more pistons, each having a radial stroke. The pistons are typically (but not necessarily) spaced uniformly around the circumference of the bit, and adapted for extension radially outward from the main body of the steering section. In some embodiments, the pistons are adapted for direct contact with the wall of a wellbore drilled into a subsurface formation. In other embodiments, a reaction member (alternatively referred to as a reaction pad) may be provided for each piston, with the outer surfaces of the reaction members lying in a circular pattern generally corresponding to the diameter (i.e., gauge) of the wellbore and the drill bit's cutting structure. Each reaction member is mounted to the steering section so as to extend over at least a portion of the outer face of the associated piston, such that when a given piston is extended, it reacts against the inner surface of its reaction member. The outer surface of the reaction member in turn reacts against the wall of the wellbore, such that the side force induced by extension of the piston will push or deflect the bit's cutting structure in a direction away from the extended piston, toward the opposite side of the wellbore. The reaction members are mounted to the steering section in a non-rigid or resilient fashion so as to be outwardly deflectable relative to the steering section, in order to induce lateral displacement of the cutting structure relative to the wellbore when a given piston is actuated. The pistons may be biased toward retracted positions within the steering section, such as by means of biasing springs.

25 The steering section is formed with one or more fluid channels, corresponding in number to the number of pistons, and each extending between the radially-inward end of a corresponding piston to a fluid inlet at the upper end of the steering section, such that a piston-actuating fluid (such as drilling mud) can enter any given fluid channel to actuate the corresponding piston. The fluid channels typically continue downward past the pistons to allow fluid to exit into the wellbore through terminal bit jets.

30 The control assembly of the RSS tool is disposed within a housing, the lower end of which connects to the upper end of the steering section. A piston-actuating fluid such as drilling mud flows downward through the housing and around the steering section.

The lower end of the control assembly engages and actuates a fluid-metering assembly for directing piston-actuating fluid to one (or more) of the pistons via the corresponding fluid channels in the steering section.

5 In one embodiment of the RSS tool, the fluid-metering assembly comprises a generally cylindrical upper sleeve member having an upper flange and a fluid-metering slot or opening in the sleeve below the flange. The fluid-metering assembly also comprises a lower sleeve having a center bore and defining the required number of fluid inlets, with each fluid inlet being open to the center bore via an associated recess in an upper region of the lower sleeve. The lower sleeve is mounted to or integral with the
10 upper end of the steering section. The upper sleeve is disposable within the bore of the lower sleeve, with the slot in the upper sleeve at generally the same height as the recesses in the lower sleeve. The control assembly is adapted to engage and rotate the upper sleeve within the lower sleeve, such that piston-actuating fluid will flow from the housing into the upper sleeve, and then will be directed via the slot in the upper sleeve into a
15 recess with which the slot is aligned, and thence into the corresponding fluid inlet and downward within the corresponding fluid channel in the steering section to actuate (i.e., to radially extend) the corresponding piston.

The housing and the drill bit will rotate with the drill string, but the control assembly is adapted to control the rotation of the upper sleeve relative to the housing. To
20 use the apparatus to deflect or deviate a wellbore in a specific direction, the control assembly controls the rotation of the upper sleeve to keep it in a desired angular orientation relative to the wellbore, irrespective of the rotation of the drill string. In this operational mode, the fluid-metering slot in the upper sleeve will remain oriented in a selected direction relative to the earth; i.e., opposite to the direction in which it is desired
25 to deviate the wellbore. As the lower sleeve rotates below and relative to the upper sleeve, piston-actuating fluid will be directed sequentially into each of the fluid inlets, thus actuating each piston to exert a force against the wall of the wellbore, thus pushing and deflecting the bit's cutting structure in the opposite direction relative to the wellbore. With each momentary alignment of the upper sleeve's fluid-metering slot with one of the
30 fluid inlets, fluid will flow into that fluid inlet and actuate the corresponding piston to

deflect the cutting structure in the desired lateral direction (i.e., toward the side of the wellbore opposite the actuated piston). Accordingly, with each rotation of the drill string, the cutting structure will be subjected to a number of momentary pushes corresponding to the number of fluid inlets and pistons.

5 In a variant embodiment, the upper and lower sleeves are adapted and proportioned such that the upper sleeve is axially movable relative to the lower sleeve, from an upper position permitting fluid to flow into all fluid inlets simultaneously, to an intermediate position permitting fluid flow into only one fluid inlet at a time, and to a lower position preventing fluid flow into any of the fluid inlets (in which case all of the
10 fluid simply continues to flow downward to the cutting structure through a central bore or channel in the steering section).

 In another embodiment of the RSS tool, the fluid-metering assembly comprises an upper plate that is coaxially rotatable (by means of the control assembly) above a fixed lower plate incorporated into the upper end of the steering section, with the fixed lower
15 plate defining the required number of fluid inlets, which are arrayed in a circular pattern concentric with the longitudinal axis (i.e., centerline) of the steering section, and aligned with corresponding fluid channels in the steering section. The upper and lower plates are preferably made from tungsten carbide or another wear-resistant material. The upper plate has a single fluid-metering opening extending through it, offset a radial distance
20 generally corresponding to the radius of the fluid inlets in the fixed lower plate. As the tool housing and the drill bit rotate with the drill string, the control assembly controls the rotation of the upper plate to keep it in a desired angular orientation relative to the wellbore, irrespective of the rotation of the drill string.

 The rotating upper plate lies immediately above and parallel to the fixed lower
25 plate, such that when the fluid-metering opening in the upper plate is aligned with a given one of the fluid inlets in the fixed lower plate, piston-actuating fluid can flow through the fluid-metering opening in the upper plate and the aligned fluid inlet in the fixed lower plate, and into the corresponding fluid channel in the steering section. This fluid flow will cause the corresponding piston to extend radially outward from the steering section

such that it reacts against its reaction member (or reacts directly against the wellbore), thus pushing and deflecting the bit's cutting structure in the opposite direction.

Preferably, the steering section of the drill bit is demountable from the control assembly (such as by means of a conventional pin-and-box threaded connection), with the rotating upper plate being incorporated into the control assembly. This facilitates field assembly of the components to complete the RSS tool at the drilling rig site, and facilitates quick drill bit changes at the rig site, either to use a different cutting structure, or to service the steering section, without having to remove the control assembly from the drill string.

To push the cutting structure in a desired direction relative to the wellbore, the control assembly is set to keep the fluid-metering opening oriented in the direction opposite to the desired pushing direction (i.e., direction of deflection). The drill bit is rotated within the wellbore, while the upper plate is non-rotating relative to the wellbore. With each rotation of the drill bit, the fluid-metering opening in the upper plate will pass over and be momentarily aligned with each of the fluid inlets in the fixed lower plate. Accordingly, when an actuating fluid is introduced into the interior of the tool housing above the upper plate, fluid will flow into each fluid channel in turn during each rotation of the drill string.

With each momentary alignment of the upper plate's fluid-metering opening with one of the fluid inlets, fluid will flow into that fluid inlet and actuate the corresponding piston to push (i.e., deflect) the cutting structure in the desired lateral direction (i.e., toward the side of the wellbore opposite the actuated piston). Accordingly, with each rotation of the drill string, the cutting structure will be subjected to a number of momentary pushes corresponding to the number of fluid inlets and pistons.

By means of the control assembly, the direction in which the cutting structure is pushed can be changed by rotating the upper plate to give it a different fixed orientation relative to the wellbore. However, if it is desired to use the tool for straight (i.e., non-deviated) drilling, the tool can be put into a straight-drilling mode (as further discussed later herein).

By having a side force applied directly at the drill bit, close to the cutting structure, rather than at a substantial distance above the bit as in conventional push-the-bit systems, bit steerability is enhanced, and the force needed to push the bit is reduced. Lower side forces at the bit, with a bit that is kept in line with the rest of the stabilized drill string behind, also increases stability and enhances repeatability in soft formations. The term “repeatability”, as used in this patent specification, is understood in the directional drilling industry as denoting the ability to repeatably achieve a consistent curve radius (or “build rate”) for the trajectory of a wellbore in a given subsurface formation, independent of the strength of the formation. The greater the magnitude of the force applied against the wall of a wellbore by a piston in a push-the-bit drilling system, the greater will be the tendency for the piston to cut into softer formations and reduce the curvature of the trajectory of the wellbore (as compared to the effect of similar forces in harder formations). Accordingly, this tendency in softer formations will be reduced by virtue of the lower piston forces required for equal effectiveness when using push-the-bit systems in accordance with the present disclosure.

Push-the-bit rotary steerable drilling systems and apparatus in accordance with the present disclosure may be of modular design, such that any of the various components (e.g., pistons, reaction members, control assembly, and control assembly components) can be changed out in the field during bit changes. As previously noted, another advantageous feature of the apparatus is that the rotating upper plate (or sleeve) of the fluid-metering assembly can be deactivated such that the tool will drill straight when deviation of the wellbore is not required, thereby promoting longer battery life (e.g., for battery-powered control assembly components) and thus extending the length of time that the tool can operate without changing batteries.

The control assembly for rotary steerable drilling apparatus in accordance with the present disclosure may be of any functionally suitable type. By way of one non-limiting example, the control assembly could be similar to or adapted from a fluid-actuated control assembly of the type in accordance with the vertical drilling system disclosed in International Application No. PCT/US2009/040983 (published as International Publication No. WO 2009/151786). In other embodiments, the control assembly could

rotate the rotating upper plate or sleeve using, for example, an electric motor or opposing turbines.

BRIEF DESCRIPTION OF THE DRAWINGS

Embodiments in accordance with the present disclosure will now be described with reference to the accompanying Figures, in which numerical references denote like parts, and in which:

FIGURE 1 is an isometric view of a first embodiment of a rotary drilling apparatus in accordance with the present disclosure, with bit-deflecting pistons adapted for direct contact with the wall of a wellbore.

FIGURE 2 is a longitudinal cross-section through a first variant of the rotary drilling apparatus in FIG. 1, in which the fluid-metering assembly comprises a rotating upper sleeve and a fixed lower sleeve.

FIGURE 2A is an enlarged detail of the fluid-metering assembly in FIG. 2.

FIGURES 3A, 3B, and 3C are isometric, cross-sectional, and side views, respectively, of the rotating upper sleeve of the apparatus in FIG. 2.

FIGURES 4A, 4B, and 4C are isometric, cross-sectional, and side views, respectively, of the fixed lower sleeve of the apparatus in FIG. 2.

FIGURE 5 is a transverse cross-section through the apparatus in FIG. 2, showing the fluid-metering slot in the rotating upper sleeve aligned with a fluid inlet in the fixed lower sleeve to permit fluid flow into the corresponding fluid channel in the drill bit, and showing the corresponding piston extended.

FIGURE 6 is an isometric partial longitudinal section through a medial region of the apparatus in FIG. 2, showing the rotating upper sleeve, fixed lower sleeve with fluid inlets, and fluid channels in the steering section.

FIGURE 7 is a bottom view of the apparatus of FIG. 2, showing the drill bit and piston housings, with one bit-deflecting piston extended.

FIGURE 8A is a cross-section through a variant of the sleeve assembly shown in FIGS. 2-6, with the rotating upper sleeve in an upper position in which piston-actuating fluid flows into all fluid channels.

FIGURE 8B is a transverse cross-section through the sleeve assembly in FIG. 8A, illustrating flow of piston-actuating fluid into all fluid inlets.

FIGURE 9A is a cross-section through the variant sleeve assembly in FIG. 8A, with the rotating upper sleeve in an intermediate position in which piston-actuating fluid flows only into one fluid inlet.

FIGURE 9B is a transverse cross-section through the sleeve assembly in FIG. 9A, illustrating flow of piston-actuating fluid into the fluid inlet aligned with the slot in the rotating upper sleeve.

FIGURE 10A is a cross-section through the variant sleeve assembly in FIG. 8A, with the rotating upper sleeve in a lower position in which actuating fluid cannot flow into any of the fluid inlets.

FIGURE 10B is a transverse cross-section through the sleeve assembly in FIG. 10A, illustrating fluid flow to the fluid inlets blocked.

FIGURE 11 is a longitudinal cross-section similar to FIG. 2, showing the rotary drilling apparatus in operation within a wellbore, with one piston radially extended and exerting a bit-deflecting force against one side of the wellbore.

FIGURE 12 is a longitudinal cross-section through a second embodiment of the rotary drilling apparatus in FIG. 1, with a resiliently-mounted reaction member associated with each piston, and in which the fluid-metering assembly comprises a rotating upper plate and a fixed lower plate.

FIGURE 12A is a plan view of the rotating upper plate of the fluid-metering assembly in FIG. 12.

FIGURE 12B is a plan view of the fixed lower plate of the fluid-metering assembly in FIG. 12.

5 **FIGURE 13** is a transverse cross-section through the apparatus in FIG. 12, illustrating the fluid-metering opening in the rotating upper plate aligned with a fluid inlet through the fixed upper plate into the drill bit, and showing the corresponding bit-deflecting piston extended.

10 **FIGURE 14A** is an isometric view of the steering section of the apparatus in FIG. 12, with a flexible reaction member mounted to the steering section in association with each piston.

FIGURE 14B is a top end view of the apparatus in FIG. 14A, showing the upper and lower plates of the fluid-metering assembly, the piston housings, and the resiliently-mounted flexible reaction members.

15 **FIGURE 14C** is a side view of the apparatus in FIG. 14A, with one piston actuated and deflecting its associated flexible reaction member.

FIGURE 14D is a longitudinal cross-section through the apparatus in FIG. 14A, with one piston actuated and deflecting its associated flexible reaction member.

20 **FIGURE 15A** is an isometric view of the steering section of the apparatus in FIG. 12, with a hinged reaction member mounted to the steering section in association with each piston.

25 **FIGURE 15B** is a top end view of the apparatus in FIG. 15A, showing the upper and lower plates of the piston-actuating mechanism, the piston housings, and the hinged reaction members.

FIGURE 15C is a side view of the apparatus in FIG. 15A, with one piston actuated and deflecting its associated hinged reaction member.

FIGURE 15D is a longitudinal cross-section through the apparatus in FIG. 15A, with one piston actuated and deflecting its associated hinged reaction member.

FIGURE 16A is an isometric view of a variant of the steering section of the apparatus in FIG. 12, with the fluid-metering assembly incorporating a sleeve assembly as in FIGS. 2-6.

FIGURE 16B is a top end view of the apparatus in FIG. 16A, showing the upper and lower sleeves of the piston-actuating mechanism, the piston housings, and the resiliently-mounted flexible reaction members.

FIGURE 16C is a side view of the apparatus in FIG. 16A, with one piston actuated and deflecting its associated flexible reaction member.

FIGURE 16D is a longitudinal cross-section through the apparatus in FIG. 16A, with one piston actuated and deflecting its associated flexible reaction member.

FIGURE 17A is a cross-section through one embodiment of a piston assembly in accordance with the present disclosure, shown in a retracted position.

FIGURE 17B is a cross-section through the piston assembly in FIG. 17A, shown in an extended position (and with the biasing spring not shown for clarity of illustration).

FIGURE 18A is a side view of the piston assembly in FIGS. 17A and 17B, shown in a retracted position.

FIGURE 18B is a side view of the piston assembly in FIGS. 17A and 17B, shown in an extended position.

FIGURE 19A is an isometric view of the piston assembly in FIGS. 17A-18B, shown in a retracted position.

FIGURE 19B is an isometric view of the piston assembly in FIGS. 17A-18B, shown in an extended position.

FIGURE 20A is an isometric view of the outer member of the piston assembly in FIGS. 17A-19B.

5 **FIGURE 20B** is an isometric view of the inner member of the piston assembly in FIGS. 17A-19B.

FIGURE 21 is an isometric view of the biasing spring of the piston assembly in FIGS. 17A-19B.

10 **FIGURE 22** is a transverse cross-section through the steering section of the drilling apparatus in FIG. 2, incorporating piston assemblies in accordance with FIGS. 17A-21.

DETAILED DESCRIPTION

FIGS. 1 and 2 illustrate (in isometric and cross-sectional views, respectively) a rotary steerable drilling apparatus (or “RSS tool”) **100** in accordance with a first
15 embodiment. RSS tool **100** comprises a cylindrical housing **10**, which encloses a control assembly **50**; and a drill bit **20**. An annular space **12** is formed around control assembly **50** within housing **10**, such that drilling fluid flowing into housing **10** will flow downward through annular space **12** toward drill bit **20**. Drill bit **20** comprises a steering section **80** connected to the lower end of housing **10**, and a cutting structure **90** connected to the lower
20 end of steering section **80** so as to be rotatable therewith. Steering section **80** is preferably formed or provided with means for facilitating removal from housing **10**, such as bit breaker slots **15**. Cutting structure **90** may be of any suitable type (for example, a polycrystalline diamond compact bit or a roller-cone-style bit), and cutting structure **90** does not form part of the broadest embodiments of apparatus in accordance with the present disclosure.

25 Steering section **80** has one or more fluid channels **30** extending downward from the upper end of steering section **80**. As seen in FIG. 2, steering section **80** also has a central axial channel **22** for conveying drilling fluid to cutting structure **90**, where the drilling fluid can exit under pressure through jets **24** (to enhance the effectiveness of cutting structure **90**

as it drills into subsurface formation materials). Each fluid channel **30** leads to the radially inward end of a corresponding piston **40** extendable radially outward from steering section **80** in response to pressure from an actuating fluid flowing under pressure through fluid channel **30**. Typically, each fluid channel **30** extends beyond its corresponding piston **40** to a terminal bit jet **34**, which allows for fluid drainage and for bleeding off of fluid pressure.

Steering section **80** defines and incorporates a plurality of piston housings **28** protruding outward from steering section **80** (the main body of which will typically have a diameter matching or close to that of housing **10**). The radial travel of each piston **40** is preferably restricted by any suitable means (indicated by way of example in FIG. 12 in the form of a transverse pin **41** passing through a slotted opening **43** in piston **40** and secured within piston housing **28** on each side of piston **40**). This particular feature is by way of example only, and persons skilled in the art will appreciate that other means for restricting piston travel may be readily devised without departing from the scope of the present disclosure. Pistons **40** are also preferably provided with suitable biasing means (such as, by way of non-limiting example, biasing springs) biasing pistons **40** toward a retracted position within their respective piston housings **28**.

In a typical case, the piston-actuating fluid will be a portion of the drilling fluid diverted from the fluid flowing through axial channel **22** to cutting structure **90**. However, the piston-actuating fluid could alternatively be a fluid different from and/or from a different source than the drilling fluid flowing to cutting structure **90**.

RSS tool **100** incorporates a fluid-metering assembly which in the embodiment shown in FIG. 2 comprises an upper sleeve **110** which is rotatable by means of control assembly **50** within and relative to a lower sleeve **120**, which in turn is fixed to or integral with the upper end of steering section **80**. As best seen in FIGS. 2A, 3A, 3B, and 3C, rotatable upper sleeve **110** has a bore **114** extending through a cylindrical section **116** extending downward below an annular upper flange **112**. Cylindrical section **116** has a fluid-metering opening shown in the form of a vertical slot **118**. As seen in FIGS. 2A, 4A, 4B, and 4C, fixed lower sleeve **120** has a bore **121** and a number of fluid inlets **122** geometrically arrayed to correspond with the fluid channels **30** in steering section **80**. In the

illustrated embodiments, fluid inlets **122** are arrayed in a circular pattern centered about the longitudinal centerline CL_{RSS} of RSS tool **100**.

Recesses **124** are formed into an upper region of lower sleeve **120** to provide fluid communication between each fluid inlet **122** and bore **121**. Accordingly, and as best seen in FIGS. 2A and 6, when cylindrical section **116** of upper sleeve **110** is disposed within bore **121** of lower sleeve **120**, with fluid-metering slot **118** aligned with a given recess **124** in lower sleeve **120**, bore **114** of upper sleeve **110** will be in fluid communication with the corresponding fluid channel **30** in steering section **80**, via slot **118**, recess **124**, and fluid inlet **122**. As may be seen in FIG. 5, the resultant flow of actuating fluid under pressure within the corresponding fluid channel **30** results in actuation and radially-outward extension of the corresponding piston (indicated in FIG. 5 by reference numeral **40A** to denote an actuated piston).

The assembly and operation of the fluid-metering assembly described above can be further understood with reference to FIG. 6. Control assembly **50** is provided with metering assembly engagement means for rotating upper sleeve **110**, and this could take any functionally effective form. By way of non-limiting example, the metering assembly engagement means is shown in FIGS. 2, 2A, and 6 as comprising a shaft **52** operably connected at its upper end to control assembly **50**, and connected at its lower end to a cylindrical yoke **54** having an upper end plate **53** with one or more fluid openings **53A**. Cylindrical yoke **54** is concentrically connected at its lower end **54L** to flange **112** of upper sleeve **110**, such that upper sleeve **110** will rotate relative to lower sleeve **120** when shaft **52** is rotated by control assembly **50**. A fluid **70** flowing downward within the annular space **12** surrounding control assembly **50** within housing **10** flows through fluid openings **53A** in upper end plate **53** of yoke **54**, into the cylindrical cavity **55** within yoke **54**, and then into bore **114** of upper sleeve **110**. A portion of fluid **70** is diverted through slot **118** in cylindrical section **116** of upper sleeve **110** into the fluid inlet **120** aligned at the time with slot **118**, and then into the corresponding fluid channel **30** to actuate the corresponding piston **40**. The remainder of fluid **70** flows into main axial channel **22** in steering section **80** for delivery to cutting structure **90**.

FIG. 7 is a bottom view of drill bit **20**, showing cutting structure **90** with cutting elements or teeth **92**, bit jets **24**, pistons **40**, and piston housings **28**. In FIG. 13, one piston, marked **40A**, is shown in its actuated position, extending radially outward from its piston housing **28**.

5 FIG. 8A illustrates a variant of the sleeve assembly shown in FIGS. 2 and 6 and related detail drawings. Upper sleeve **210** in FIG. 8A is generally similar to upper sleeve **110** in FIGS. 3A-3C, with a flange **212** and a bore **214** similar to flange **112** and bore **114** in upper sleeve **110**, except that it has a cylindrical section **216** longer than cylindrical section **116** in upper sleeve **110**. Cylindrical section **216** has a fluid-metering slot **218** similar to
10 fluid-metering slot **118** in cylindrical section **116**, located in a lower region of cylindrical section **216**. Lower sleeve **220** in FIG. 8A is generally similar to lower sleeve **120** in FIGS. 4A-4C, with fluid inlets **222** below corresponding recesses **224** (similar to fluid inlets **122** and recesses **24** in lower sleeve **120**) formed into a lower body **225** having a bore **221** analogous to bore **121** in lower sleeve **120**, plus a cap plate **226** extending across the top of
15 lower body **25** and having a central opening for receiving cylindrical section **216** of upper sleeve **210**.

As may be understood with reference to FIGS. 8A and 8B, when upper sleeve **210** is in an upper position relative to lower sleeve **220**, with cylindrical section **216** raised at least partially clear of recesses **224** in lower sleeve **220**, portions of fluid **70** flowing into bore **214**
20 in upper sleeve **210** and bore **221** in lower sleeve **220** will be diverted directly into all recesses **224** and fluid inlets **222** to actuate all of pistons **40**. In this operational mode, the actuated pistons will serve to centralize and stabilize drill bit **20** when drilling an undeviated section of a wellbore. This may be particularly beneficial and advantageous when drilling a straight but non-vertical section of the wellbore, and or when it is desirable to maximize the
25 total flow area (TFA) at the bit (TFA being defined as the total area of all nozzles or jets through which fluid can flow out of the bit). TFA will be greatest when upper sleeve **210** is in its uppermost position, in which fluid can flow into all fluid channels **30**. This is because fluid will be able to flow out of all terminal bit jets **34** connecting to fluid channels **30**, in addition to flowing out of all bit jets **24** in cutting structure **90**. In contrast, TFA will be
30 least when upper sleeve **210** is in its lowermost position (as shown in FIGS. 10A and 10B),

in which fluid flow into all fluid channels **30** is blocked, and fluid can exit the tool only through bit jets **24**.

Drill bit stabilization with all pistons extended may also be desirable during “straight” drilling to mitigate “bit whirl” which can result in poor wellbore quality when drilling through soft formations.

FIGS. 9A and 9B illustrate the situation when upper sleeve **210** is in an intermediate position relative to lower sleeve **220**, with cylindrical section **216** extending below cap plate **226** to permit fluid flow from bore **214** through fluid-metering slot **218**. In this operational mode, fluid **70** will be diverted into a recess **224** aligned with slot **218**, and then into the corresponding fluid inlet **222** to actuate the corresponding piston **40**; i.e., essentially the same as for the sleeve assembly shown in FIG. 2A.

FIGS. 10A and 10B illustrate the situation when upper sleeve **210** is in a lower position relative to lower sleeve **220**, with slot **218** disposed below recesses **224** such that fluid cannot enter any of recesses **224** and fluid inlets **222**. In this operational mode, all of fluid **70** will flow directly to cutting structure **90**, without diversion. This may be desirable for straight drilling through comparatively stable subsoil materials, with a smaller TFA at the bit.

To operate a fluid-metering assembly incorporating upper and lower sleeves **210** and **220** as in FIGS. 8A-10B, control assembly **50** will incorporate or be provided with means for raising and lowering upper sleeve **210** in addition to rotating upper sleeve **210**. Persons skilled in the art will appreciate that various means for axially moving upper sleeve **210** relative to lower sleeve **220** can be devised in accordance with known technologies, and the present disclosure is not limited to the use of any particular such means.

FIG. 11 illustrates RSS tool **100** as in FIG. 2, in operation within a wellbore **WB**. In this view, a portion **70A** of fluid **70** from annular space **12** of RSS **100** has been diverted into an “active” fluid channel **30A** in steering section **80** via fluid-metering slot **118** in rotating upper sleeve **110** of the fluid-metering assembly. The flow of fluid under pressure into fluid channel **30A** actuates the corresponding piston **40A**, causing actuated piston **40A** to extend radially outward from steering section **80** and into reacting contact with the wall of

wellbore **WB** in a contact region **WX**, thus exerting a transverse force against steering section **80** deflecting cutting structure **90** in the direction away from contact region **WX** by a deflection **D**, being the lateral offset of the deflected axial centerline **CL_{RSS}** of RSS tool **100** relative to the centerline **CL_{WB}** of wellbore **WB**. Contact region **WX**, for a given fixed orientation of upper sleeve **110** and its fluid-metering slot **118** relative to wellbore **WB**, will not be a specific fixed point or region on the wellbore wall, but rather will move as drilling progresses deeper into the ground. However, for in operational modes providing for actuation of only one piston **40** at a given time, contact region **WX** will always correspond to the angular position of fluid-metering slot **118**.

As tool **100** continues rotating, the flow of actuating fluid **70A** into active fluid channel **30A** will be blocked off, thus relieving the hydraulic force actuating piston **40A** which will then be retracted into the body of steering section **80**. Further rotation of tool **100** will cause actuating fluid to flow into the next fluid channel **30** in steering section **80**, thereby actuating and extending the next piston **40** in sequence, and exerting another transverse force in contact region **WX** of wellbore **WB**.

Accordingly, for each rotation of tool **100**, a bit-deflecting transverse force will be exerted against wellbore **WB**, in contact region **WX**, the same number of times as the number of fluid channels **30** in steering section **80**, thus maintaining an effectively constant deflection **D** of cutting structure **90** in a constant transverse direction relative to wellbore **WB**. As a result of this deflection, the angular orientation of wellbore **WB** will gradually change, creating a curved section in wellbore **WB**.

When a desired degree of wellbore curvature or deviation has been achieved, and it is desired to drill an undeviated section of wellbore, the operation of control assembly **50** is adjusted to rotate upper sleeve **110** such that fluid-metering slot **118** is in a neutral position between an adjacent pair of recesses **124** in lower sleeve **120**, such that fluid **70** cannot be diverted into any of the fluid inlets **122** in lower sleeve **120**. Control assembly **50** (or an associated metering assembly engagement means) then is either disengaged from upper sleeve **110**, leaving upper sleeve **110** free to rotate with lower sleeve **120** and steering section **80**, or alternatively is actuated to rotate at the same rate as tool **100**, thereby in either case maintaining slot **118** in a neutral position relative to lower sleeve **120** such that fluid

cannot flow to any of pistons **40**. Drilling operations may then be continued without any transverse force acting to deflect cutting structure **90**.

In variant embodiments in which the fluid-metering assembly includes axially-movable upper sleeve **210** and lower sleeve **220** as shown in FIGS. 8A-10B, the transition to non-deviated drilling operations is effected by moving upper sleeve **210** (by means of control assembly **50**) to either its upper or lower position relative to lower sleeve **220**, as may be desired or appropriate having regard to operational considerations. Fluid flow to fluid channels **30** will then be prevented regardless of whether upper sleeve **210** continues to rotate relative to lower sleeve **220**.

FIG. 12 illustrates an RSS tool **200** in accordance with an alternative embodiment in which the fluid-metering assembly comprises a rotating upper plate **60** and a lower plate **35** fixed to or formed integrally into the upper end of a modified steering section **280**. Lower plate **35** has one or more fluid inlets **32** analogous to fluid inlets **122** in lower sleeve **120** shown in FIGS. 2 and 6 (and elsewhere herein). In the illustrated embodiment, and as shown in FIG. 12B, fluid inlets **32** are arrayed in a circular pattern about centerline **CL_{RSS}** of RSS tool **200**. Upper plate **60** is rotatable, relative to housing **10**, about a rotational axis coincident with centerline **CL_{RSS}**. As shown in FIG. 12A, upper plate **60** has a fluid-metering hole **62** offset from centerline **CL_{RSS}** at a radius corresponding to the radius of the circle of the fluid inlets **32** formed in fixed lower plate **35**. Upper plate **60** also has a central opening **63** to permit fluid flow downward into axial channel **22** of steering section **80**, and lower plate **35** has a central opening **33** for the same purpose.

The fluid-metering assembly shown in FIGS. 12, 12A, and 12B functions in essentially the same way as previously described with respect to RSS tool embodiments having a fluid-metering assembly incorporating an upper sleeve **110** (or **210**) and a lower sleeve **120** (or **220**). Upper plate **60** is rotated by control assembly **50** (such as by means of a yoke **54** as previously described) so as to keep fluid-metering hole **62** in a fixed orientation relative to wellbore **WB** irrespective of the rotation of housing **10** and steering section **80**. As housing **10** and steering section **80** rotate relative to wellbore **WB**, fluid-metering hole **62** in upper plate **60** will come into alignment with each of the fluid inlets **32** in lower plate **35** in sequence, thus allowing a portion of the fluid flowing from

annular space **12** through fluid openings **53A** in upper end plate **53** of yoke **54** to be diverted into each fluid channel **30** in sequence, and causing the corresponding pistons **40** to be radially extended in sequence, thus inducing a deviation in the orientation of wellbore **WB** as previously described.

5 FIG. 13 is a cross-section through housing **10** just above rotating upper plate **60**, showing offset hole **62** in upper plate **60** and, in broken outline, fluid inlets **32** (four in total in the illustrated embodiment) in fixed lower plate **35** disposed below upper plate **60**. As well, FIG. 13 illustrates pistons **40** and their corresponding piston housings **28** (four in total, corresponding to the number of fluid inlets **32**) and, therebelow, cutting structure **90**
10 with drill bit teeth **92**. FIG. 13 illustrates the alignment of fluid-metering hole **62** of upper plate **60** with one of the fluid inlets **32** in lower plate **35**, resulting in radially-outward extension of a corresponding actuated piston **40A**.

 To transition RSS tool **200** to undeviated drilling operations, control assembly **50** is actuated to rotate upper plate **60** to a neutral position relative to lower plate such that
15 fluid-metering hole **62** is not in alignment with any of the fluid inlets **32** in lower plate **35**, and upper plate **60** is then rotated at the same rate as steering section **80** to keep fluid-metering hole **62** in the neutral position relative to lower plate **35**.

 In an alternative embodiment of the apparatus (not shown), upper plate **60** can be selectively moved axially and upward away from lower plate **35**, thus allowing fluid flow
20 into all fluid channels **30** and causing outward extension of all pistons **40**. This results in equal transverse forces being exerted all around the perimeter of steering section **80** and effectively causing cutting structure **90** to drill straight, without deviation, while also stabilizing cutting structure **90** within wellbore **WB**, similar to the case for previously-described embodiments incorporating upper and lower sleeves **210** and **220** when upper
25 sleeve **210** is in its upper position relative to lower sleeve **220**. Control system **50** can be deactivated or put into hibernation mode when upper plate **60** and lower plate **35** are not in contact, thus saving battery life and wear on the control system components.

 In one embodiment, control assembly **50** comprises an electronically-controlled positive displacement (PD) motor that rotates upper plate **60** (or upper sleeve **110** or

210), but control assembly 50 is not limited to this or any other particular type of mechanism.

Steerable rotary drilling systems in accordance with the present disclosure can be readily adapted to facilitate change-out of the highly-cycled pistons during bit changes. This ability to change out the pistons independently of the control system, in a design that provides a field-changeable interface, makes the system more compact, easier to service, more versatile, and more reliable than conventional steerable systems. RSS tools in accordance with the present disclosure will also allow multiple different sizes and types of drill bits and/or pistons to be used in conjunction with the same control system without having to change out anything other than the steering system and/or cutting structure. This means, for example, that the system can be used to drill a 12-1/4" (311 mm) wellbore, and subsequently be used to drill a 8-3/4" (222 mm) wellbore, without changing the control system housing size, thus saving time and requiring less equipment.

The system can also be adapted to allow use of the drill bit separately from the control system. Optionally, the control assembly can be of modular design to control not only drill bits but also other drilling tools that can make beneficial use of the rotating upper plate (or sleeve) of the tool to perform useful tasks.

FIGS. 14A, 14B, 14C, and 14D illustrate the steering section 280 of an RSS tool in accordance with the embodiment shown in FIG. 12. Steering section 280 is substantially similar to steering section 80 described with reference to FIG. 12, and like reference numbers are used for components common to both embodiments. Steering section 280 is shown by way of non-limiting example with an upper pin end 16 for purposes of threaded connection to the lower end of housing 10, and with a lower box end 17 for threaded connection to the upper end of cutting structure 90. Steering section 280 is distinguished from steering section 80 shown in FIG. 2 by the provision of flexible reaction pads 240, each of which has an upper end resiliently mounted to the main body of steering section 280 and a free lower end 241 which extends over a corresponding piston housing 28. In the illustrated embodiment, the resilient mounting of flexible reaction pads 240 to the body of steering section 280 is accomplished by having the upper ends of reaction pads 240 formed integrally with a circular band 242 disposed within an

annular groove **243** extending around the circumference of steering section **280** at a point below pin end **16**. However, this is by way of example only. Persons skilled in the art will appreciate that other ways of resiliently mounting the upper ends of reaction pads **240** to steering section **280** may be readily devised, and the present disclosure is not
5 limited to the use of any particular means or method of mounting reaction pads **240**.

As best appreciated with reference to the upper portion of FIG. 14D, when a given piston **40** is in its retracted position, the free lower end **241** of its associated flexible reaction pad **240** will preferably lie flush or nearly so with the outer surface of the associated piston housing **28**. However, when a piston is actuated (as illustrated by
10 actuated piston **40A** in the lower portion of FIG. 14D), it will deflect the free lower end **241** of the associated reaction pad (indicated by reference number **240A** in FIG. 14D) radially outward. The deflected flexible reaction pad **240A** will thus be pushed toward and against the wall of the wellbore, resulting in steering section **280** and cutting structure **90** being pushed in the radially opposite direction. When actuated piston **40A** retracts
15 into its piston housing **28**, the free lower end of reaction pad **240A** will elastically rebound to its unstressed state and position.

FIGS. 15A, 15B, 15C, and 15D illustrate the steering section **380** of an RSS tool in accordance with an alternative embodiment. Steering section **380** is substantially similar to steering section **80** described with reference to FIG. 12, and like reference
20 numbers are used for components common to both embodiments. Steering section **380** is distinguished from steering section **80** by the provision of hinged reaction pads **340**, each of which extends over a corresponding piston housing **28**, to which reaction pad **340** is mounted at one or more hinge points **342** so as to be pivotable about a hinge axis substantially parallel to the longitudinal axis of steering section **380**. Hinge points **342** are
25 preferably located on the leading edges of hinged reaction pads **340** (the term "leading edge" being relative to the direction of rotation of the tool).

As best appreciated with reference to the upper portion of FIG. 15D, when a given piston **40** is in its retracted position, its associated hinged reaction pad **340** will preferably lie flush or nearly so with the surface of the associated piston housing **28**. However,
30 when a piston is actuated (as illustrated by actuated piston **40A** in the lower portion of

FIG. 15D), it will push outward against its corresponding hinged reaction pad **340A**, causing pad **340A** to pivot about its hinge point(s) **342** and deflect outward toward and against the wall of the wellbore, as seen in FIGS. 15C and 15D. This results in steering section **380** and cutting structure **90** being pushed in the radially opposite direction. When actuated piston **40A** retracts into its piston housing **28**, the deflected hinged reaction pad **340A** can be returned to its original position, assisted as appropriate by suitable biasing means.

FIGS. 16A, 16B, 16C, and 16D illustrate a variant **280-1** of steering section **280** shown in FIGS. 14A, 14B, 14C, and 14D, with the only difference being that the fluid-metering assembly in steering section **280-1** incorporates upper and lower sleeves **110** and **120** as in FIGS. 3A-3C and 4A-4C, rather than upper and lower plates **60** and **35** as in steering section **280**. Components and features not having reference numbers in FIGS. 16A, 16B, 16C, and 16D correspond to like components and features shown and referenced in FIGS. 14A, 14B, 14C, and 14D. Persons skilled in the art will also appreciate that steering section **380** shown in FIGS. 15A, 15B, 15C, and 15D could be similarly adapted.

RSS tools in accordance with the present disclosure may use pistons of any functionally suitable type and construction, and the disclosure is not limited to the use of any particular type of piston described or illustrated herein. FIGS. 12, 14D, 15D, and 16D, for instance, show unitary or one-piece pistons **40**. FIGS. 17A to 21 illustrate an embodiment of an alternative piston assembly **140** comprising an outer (or upper) member **150**, an inner (or lower) member **160**, and, in preferred embodiments, a biasing spring **170**. In this description of piston assembly **140** and its constituent elements, the adjectives “inner” and “outer” are used relative to the centerline of a steering section **80** in conjunction with which piston **140** is installed; i.e., inner member **160** will be disposed radially inward of outer member **150**, while outer member **150** is extendable radially outward from steering section **80** (and away from inner member **160**). However, for convenience in describing these components, the adjectives “upper” and “lower” may be used interchangeably with “outer” and “inner”, respectively, in correspondence with the graphical representation of these elements in FIGS. 17A to 21.

As shown in particular detail in FIGS. 17A and 17B, outer member **150** of piston assembly **140** has a cylindrical sidewall **152** with an upper end **152U** closed off by a cap member **151**, and an open lower end **152L**. The upper (or outer) surface **151A** of cap member **151** may optionally be contoured as shown in FIGS. 17A, 17B, 18A, and 18B to conform with the effective diameter of a cutting structure **90** mounted to steering section **80**, in embodiments intended for direct piston contact with a wellbore wall, without intervening reaction members. The embodiment of outer member **150** shown in FIGS. 17A and 17B is adapted to receive the upper end of biasing spring **170** (in a manner to be described later herein), and for that purpose is formed with a cylindrical boss **153** projecting coaxially downward from cap member **151** and having an open-bottomed and internally-threaded cavity **154**. An open-bottomed annular space **155** is thus formed between boss **153** and sidewall **152** of outer member **150**.

Extending downward from cylindrical sidewall **152** are a pair of spaced, curvilinear, and diametrically-opposed sidewall extensions **156**, each having a lower portion **157** formed with a circumferentially-projecting lug or stop element **157A** at each circumferential end of lower portion **157**. Each sidewall extension **156** can thus be described as taking the general shape of an inverted “T”, with a pair of diametrically-opposed sidewall openings **156A** being formed between the two sidewall extensions **156**.

Inner member **160** of piston assembly **140** has a cylindrical sidewall **161** having an upper end **160U** and a lower end **160L**, and enclosing a cylindrical cavity **165** which is open at each end. A pair of diametrically-opposed retainer pin openings **162** are formed through sidewall **161** for receiving a retainer pin **145** for securing inner member **160** to and within steering section **80**, such that the position of inner member **160** relative to steering section **80** will be radially fixed. A pair of diametrically-opposed fluid openings **168** (semi-circular or semi-ovate in the illustrated embodiment) are formed into sidewall **161** of inner member **160**, intercepting lower end **160L** of inner member **160** and at right angles to retainer pin openings **162**, so as to be generally aligned with corresponding fluid channels **30** when piston **40** is installed in steering section **80**, to permit passage of drilling fluid downward beyond inner member **160** and into a corresponding bit jet **34** in steering section **80**. As best seen in FIG. 17B, and for purposes to be described later

herein, an annular groove **169** is formed around cavity **165** at lower end **160U** of inner member **160**. In the illustrated embodiment, annular groove **169** is discontinuous, being interrupted by fluid openings **168**.

Extending upward from cylindrical sidewall **161** are a pair of spaced, curvilinear, and diametrically-opposed sidewall extensions **163**, each having an upper portion **164** formed to define a circumferentially-projecting lug or stop element **164A** at each circumferential end of upper portion **164**. Each sidewall extension **163** can thus be described as being generally T-shaped, with a pair of diametrically-opposed sidewall openings **163A** being formed between the two sidewall extensions **163**. In combination, lugs **157A** and **164A** thus serve as travel-limiting means defining the maximum radial stroke of outer member **150** of piston assembly **140**.

As may be best understood with reference to FIGS. 18A, 18B, 19A, and 19B, outer member **150** and inner member **160** may be assembled by laterally inserting upper portions sidewall extensions **163** of inner member **160** into sidewall openings **156A** of outer member **150** such that outer member **150** and inner member **160** are in coaxial alignment. Outer member **150** is axially movable relative to inner member **160** (i.e., radially relative to steering section **80**), with the outward axial movement of outer member **150** being limited by the abutment of lugs **157A** on outer member **150** against lugs **164A** on inner member **160**, as seen in FIGS. 17B, 18B, and 19B.

Biasing spring **170**, shown in isometric view in FIG. 21, comprises a cylindrical sidewall **173** having an upper end **173U** and a lower end **173L**, and defining a cylindrical inner chamber **174**. Upper end upper end **173U** of sidewall **173** is formed or provided with an inward-projecting annular flange **171**, and lower end **173L** of sidewall **173** is formed or provided with an outward-projecting annular lip **179**. A helical slot **175** is formed through sidewall **173** such that sidewall **173** takes the form of a helical spring, with helical slot **175** having an upper terminus adjacent to annular flange **171** and a lower terminus adjacent to annular lip **179**. A pair of diametrically-opposed retainer pin openings **172** are formed through sidewall **173** for receiving a retainer pin **145** when biasing spring **170** is assembled with inner member **160** of piston assembly **140** and installed in a steering section **80** (as will be described later herein). In the illustrated

embodiment of spring **170**, the lower terminus of helical slot **175** coincides with one of the retainer pin openings **172**, but this is for convenience rather than for any functionally essential reason. A pair of diametrically-opposed fluid openings **168** (semi-circular or semi-ovate in the illustrated embodiment) are formed into sidewall **173**, intercepting lower end **173L** of sidewall **173** and at right angles to retainer pin openings **172**, so as to be generally aligned with fluid openings **168** in sidewall **161** of inner member **160** when biasing spring **170** is assembled with inner member **160**.

The assembly of piston assembly **140** may be best understood with reference to FIGS. 17A, 17B, and 22. The first assembly step is to insert biasing spring **170** upward into cavity **165** of inner member **160** such that annular lip **179** on biasing spring **170** is retainingly engaged within annular groove **169** at lower end **160L** of inner member **160**. The next step is to assemble the sub-assembly of inner member **160** and biasing spring **170** with outer member **150**, by inserting the upper end of biasing spring **170** into the lower end of outer member **150** such that flange **171** of biasing spring **170** is disposed within annular space **155** in outer member **150**. A generally cylindrical spacer **180** having an inward-projecting annular flange **180A** at its lower end is then positioned over and around cylindrical boss **153**, and a cap screw **182** is inserted upward through the opening in spacer **180** and threaded into threaded cavity **154** in boss **153**, thus securing spacer **180** and the upper end of biasing spring **170** to outer member **150**.

Thus assembled, piston **140** incorporates biasing spring **170** with its upper (outer) end securely retained within outer member **150** and with its lower (inner) end securely retained by inner member **160**. Accordingly, when a piston-actuating fluid flows into the associated fluid channel **30** in steering section **80**, fluid will flow into piston **140** and exert pressure against cap member **151** of outer member **150**, so as to overcome the biasing force of biasing spring **170** and extend outer member **150** radially outward from steering section **80**. When the fluid pressure is relieved, biasing spring **170** will return outer member **150** to its retracted position as shown in FIGS. 17A and 18A. The magnitude of the biasing force provided by biasing spring **170** can be adjusted by adjusting the axial position of cap screw **182**, and/or by using spacers **180** of different axial lengths.

The assembled piston(s) **140** can then be mounted into steering section **80** as shown in FIG. 22. Retainer pins **145** are inserted through transverse openings in steering section **80** and through retainer pin openings **162** and **172** in inner member **160** and biasing spring **170** respectively, thereby securing inner member **160** and the lower end of biasing spring **170** against radial movement relative to steering section **80**.

The particular configuration of biasing spring **170** shown in the Figures, and the particular means used for assembling biasing spring **170** with outer member **150** and inner member **160**, are by way of example only. Persons skilled in the art will appreciate that alternative configurations and assembly means may be devised in accordance with known techniques, and such alternative configurations and assembly means are intended to come within the scope of the present disclosure.

Piston assembly **140** provides significant benefits and advantages over existing piston designs. The design of piston assembly **140** facilitates a long piston stroke within a comparatively short piston assembly, with a high mechanical return force provided by the integrated biasing spring **170**. This piston assembly is also less prone to debris causing pistons to bind within the steering section or limiting piston stroke when operating in dirty fluid environments. It also allows a spring-preloaded piston assembly to be assembled and secured in place within the steering section using a simple pin, without the need to preload the spring during insertion into the steering section, making the piston assembly easier to service or replace.

It will be readily appreciated by those skilled in the art that various modifications of embodiments taught by the present disclosure may be devised without departing from the teaching and scope of the present disclosure, including modifications that use equivalent structures or materials hereafter conceived or developed. It is especially to be understood that the present disclosure is not intended to be limited to any described or illustrated embodiment, and that the substitution of a variant of a claimed element or feature, without any substantial resultant change in operation, will not constitute a departure from the scope of the present disclosure. It is also to be appreciated that the different teachings of the embodiments described and discussed herein may be employed separately or in any suitable combination to produce different embodiments providing desired results.

Persons skilled in the art will also appreciate that components of disclosed embodiments that are described or illustrated herein as unitary components could also be built up from multiple subcomponents without material effect on function or operation, unless the context clearly requires such components to be of unitary construction.

5 Similarly, components described or illustrated as being assembled from multiple subcomponents may be provided as unitary components unless the context requires otherwise.

10 In this patent document, any form of the word “comprise” is to be understood in its non-limiting sense to indicate that any item following such word is included, but items not specifically mentioned are not excluded. A reference to an element by the indefinite article “a” does not exclude the possibility that more than one such element is present, unless the context clearly requires that there be one and only one such element.

Any use of any form of the terms “connect”, “engage”, “couple”, “attach”, or other terms describing an interaction between elements is not intended to limit such interaction to direct interaction between the subject elements, and may also include indirect interaction between the elements such as through secondary or intermediary structure.

15

Relational terms such as “parallel”, “perpendicular”, “coincident”, “intersecting”, “equal”, “coaxial”, and “equidistant” are not intended to denote or require absolute mathematical or geometrical precision. Accordingly, such terms are to be understood as denoting or requiring substantial precision only (e.g., “substantially parallel”) unless the context clearly requires otherwise.

20

Wherever used in this document, the terms “typical” and “typically” are to be interpreted in the sense of representative or common usage or practice, and are not to be understood as implying essentiality or invariability.

25 In this patent document, certain components of disclosed RSS tool embodiments are described using adjectives such as “upper” and “lower”. Such terms are used to establish a convenient frame of reference to facilitate explanation and enhance the reader’s understanding of spatial relationships and relative locations of the various elements and features of the components in question. The use of such terms is not to be

interpreted as implying that they will be technically applicable in all practical applications and usages of RSS tools in accordance with the present disclosure, or that such sub tools must be used in spatial orientations that are strictly consistent with the adjectives noted above. For example, RSS tools in accordance with the present disclosure may be used in drilling horizontal or angularly-oriented wellbores. For greater certainty, therefore, the adjectives “upper” and “lower”, when used with reference to an RSS tool, should be understood in the sense of “toward the upper (or lower) end of the drill string”, regardless of what the actual spatial orientation of the RSS tool and the drill string might be in a given practical usage. The proper and intended interpretation of the adjectives “inner”, “outer”, “upper”, and “lower” for specific purposes of illustrated piston assemblies and components thereof will be apparent from corresponding portions of the Detailed Description.

**THE EMBODIMENTS OF THE INVENTION IN WHICH AN EXCLUSIVE
PROPERTY OR PRIVILEGE IS CLAIMED ARE DEFINED AS FOLLOWS:**

1. A rotary steerable drilling apparatus comprising:

- (a) a control assembly disposed within a cylindrical housing;
- 5 (b) a steering section having a central axis, a first end coupled to the housing, a second end, a central channel, and one or more fluid channels radially spaced from the central channel;
- (c) one or more radially-extendable pistons housed in the steering section; and
- (d) a fluid-metering assembly configured to selectively meter the flow of
10 drilling fluid into one or more of the fluid channels of the steering section;

wherein:

- (e) the central channel extends axially from the first end of the steering section and is configured to flow drilling fluid through the steering section;
- (f) each of the fluid channels extends to one of the pistons and is configured
15 to flow drilling fluid to the corresponding piston;
- (g) the fluid-metering assembly includes a first component coupled to the control assembly and a second component coupled to the steering section;
- (h) the second component includes a central through-bore and one or more fluid inlets disposed about the central through-bore, said central through-bore of the second component being in fluid communication with the
20 central channel of the steering section;
- (i) each fluid inlet of the second component is in fluid communication with at least one fluid channel of the steering section;
- (j) the control assembly is configured to move the first component relative to
25 the second component to control the flow of drilling fluid into one or more of the fluid inlets of the second component;
- (k) the first component comprises a flange and a sleeve extending axially from the flange; and
- (l) the sleeve extends into the central through-bore of the second component
30 and slidingly engages the second component.

2. The rotary steerable drilling apparatus of Claim 1 wherein:
 - (a) the first end of the steering section is coupled to a lower end of the housing; and
 - (b) the first component is positioned axially above the second component.
- 5 3. The rotary steerable drilling apparatus of Claim 1 or Claim 2 wherein the second end of the steering section comprises a cutting structure.
4. The rotary steerable drilling apparatus of any one of Claims 1-3 wherein:
 - (a) the first component includes a central through-bore extending axially through the flange and the sleeve, and a fluid-metering opening extending
10 radially through the sleeve; and
 - (b) the central through-bore of the first component is in fluid communication with the central through-bore of the second component.
5. The rotary steerable drilling apparatus of Claim 4 wherein the control assembly is configured to rotate the first component relative to the second component to place the
15 fluid-metering opening of the first component into fluid communication with each fluid inlet of the second component in sequence.
6. The rotary steerable drilling apparatus of Claim 4 wherein the control assembly is configured to move the first component axially relative to the second component between:
 - 20 (a) a first position allowing drilling fluid to flow from the central through-bore of the first component into all of the fluid inlets of the second component simultaneously; and
 - (b) a second position allowing drilling fluid to flow from the central through-bore of the first component into at least one of the fluid inlets of the
25 second component at a time.

7. The rotary steerable drilling apparatus of Claim 6 wherein the control assembly is configured to move the first component axially relative to the second component between the first position, the second position, and a third position, wherein said third position prevents drilling fluid from flowing from the central through-bore of the first component into any of the fluid inlets of the second component.

8. The rotary steerable drilling apparatus of any one of Claims 1-7, further comprising one or more reaction pads coupled to the steering section, wherein:

- (a) one reaction pad is provided for each piston; and
- (b) each piston is configured to deflect the corresponding reaction pad radially away from the steering section in response to the flow of drilling fluid through the corresponding fluid channel.

9. The rotary steerable drilling apparatus of Claim 8 wherein each reaction pad comprises a flexible member resiliently mounted to the steering section.

10. The rotary steerable drilling apparatus of Claim 8 wherein each reaction pad comprises a hinged member pivotably coupled to the steering section and configured to pivot about a hinge axis oriented parallel to the central axis of the steering section.

11. The rotary steerable drilling apparatus of any one of Claims 1-10, further comprising a biasing means for each piston, wherein each biasing means is configured to bias the piston to a radially retracted position within the steering section.

12. The rotary steerable drilling apparatus of any one of Claims 1-10 wherein at least one of the one or more pistons is a two-piece piston assembly comprising:

- (a) an inner member fixably coupled to the steering section; and
- (b) an outer member disposed about the inner member and configured to move radially relative to the inner member and the steering section.

13. The rotary steerable drilling apparatus of Claim 12 wherein the two-piece piston assembly includes a travel-limiting means for restricting the radial stroke of the outer member relative to the inner member and the steering section.

14. The rotary steerable drilling apparatus of Claim 13 wherein the travel-limiting means comprises a plurality of first stop elements formed on the outer member and a plurality of second stop elements formed on the inner member, said first and second stop elements being configured and arranged such that each first stop element will react
5 against one of the second stop elements when the stroke of the outer member reaches a preset limit.

15. The rotary steerable drilling apparatus of any one of Claims 1-14 wherein the control assembly is configured to be separated from the steering section with the first component remaining coupled to the control assembly.

10 16. The rotary steerable drilling apparatus of any one of Claims 1-15 wherein:

- (a) the first component includes a central through-bore extending axially through the flange and the sleeve of the first component; and
- (b) the central through-bore of the first component and the central through-bore of the second component are in fluid communication with
15 the central channel of the steering section.

17. A rotary steerable drilling apparatus comprising:

- (a) a steering section having a central axis, a first end, a second end comprising a cutting structure, a central channel, and a plurality of circumferentially-spaced fluid channels disposed about the central
20 channel;
- (b) a plurality of pistons housed in the steering section; and
- (c) a fluid-metering assembly including a lower component fixably coupled to the steering section and an upper component coupled to a control assembly;

25 wherein:

- (d) the central channel extends axially from the first end of the steering section and is configured to flow drilling fluid through the steering section to the cutting structure;
- (e) each of the fluid channels extends from the first end of the steering section
30 to at least one of the pistons;

- (f) each piston is configured to move radially outward in response to drilling fluid supplied by one or more of the fluid channels;
- (g) the upper component includes a central through-bore in fluid communication with the central channel of the steering section;
- 5 (h) the lower component includes a central through-bore and a plurality of circumferentially-spaced fluid inlets disposed about the central through-bore, wherein:
- h.1 said central through-bore of the lower component is in fluid communication with the central through-bore of the upper component and the central channel of the steering section;
- 10 h.2 the central through-bore of the upper component and the central through-bore of the lower component are configured to continuously flow drilling fluid through the central channel of the steering section to the cutting structure; and
- 15 h.3 each fluid inlet of the lower component is in fluid communication with at least one fluid channel of the steering section; and
- (i) the control assembly is configured to move the upper component relative to the lower component to control the distribution of drilling fluid between the central through-bore of the lower component and the fluid inlets of the lower component.
- 20
18. The rotary steerable drilling apparatus of Claim 17 wherein:
- (a) the upper component comprises a flange and a sleeve extending axially from the flange; and
- (b) the sleeve extends into the central through-bore of the lower component and slidingly engages the lower component.
- 25

19. The rotary steerable drilling apparatus of Claim 18 wherein:

- 5 (a) the upper component includes a central through-bore extending axially through the flange and the sleeve, and a fluid-metering opening extending radially from the central through-bore to a radially outer surface of the sleeve; and
- (b) the central through-bore of the upper component is in fluid communication with the central through-bore of the lower component.

10 20. The rotary steerable drilling apparatus of Claim 19 wherein the control assembly is configured to rotate the upper component relative to the lower component to place the fluid-metering opening of the upper component into fluid communication with at least one of the fluid inlets of the lower component.

21. The rotary steerable drilling apparatus of Claim 19 or Claim 20 wherein the control assembly is configured to move the upper component axially relative to the lower component between:

- 15 (a) an upper position allowing drilling fluid to flow from the central through-bore of the upper component into all of the fluid inlets of the lower component simultaneously; and
- (b) an intermediate position allowing drilling fluid to flow from the central through-bore of the upper component into at least one of the fluid inlets of the lower component at a time.
- 20

22. The rotary steerable drilling apparatus of Claim 21 wherein the control assembly is configured to move the upper component axially relative to the lower component between the upper position, the intermediate position, and a lower position, said lower preventing drilling fluid from flowing from the central through-bore of the upper component into any of the fluid inlets of the lower component.

25

23. The rotary steerable drilling apparatus of Claim 17 wherein the upper component comprises an upper plate having a central through-bore extending axially through the upper plate and an arcuate fluid-metering hole extending axially through the upper plate, wherein said fluid-metering hole is radially offset from the central through-bore of the upper plate.

24. The rotary steerable drilling apparatus of Claim 23 wherein the control assembly is configured to rotate the upper plate relative to the lower component to place the fluid-metering hole of the upper plate into fluid communication with at least one of the fluid inlets of the lower component.

25. The rotary steerable drilling apparatus of Claim 24 wherein the control assembly is configured to move the upper plate axially away from the lower component to allow drilling fluid to flow through the central opening of the upper plate and into all of the fluid inlets of the lower plate simultaneously.

26. The rotary steerable drilling apparatus of Claim 17, further comprising one or more reaction pads coupled to the steering section, wherein:

- (a) one reaction pad is provided for each piston; and
- (b) each piston is configured to deflect the corresponding reaction pad radially away from the steering section in response to the flow of drilling fluid through the corresponding fluid channel.

27. The rotary steerable drilling apparatus of Claim 17, further comprising a biasing means for each piston, wherein each biasing means is configured to bias the piston to a radially retracted position within the steering section.

28. The rotary steerable drilling apparatus of Claim 17 wherein at least one of the one or more pistons is a two-piece piston assembly comprising:

- (a) an inner member fixably coupled to the steering section; and
- (b) an outer member disposed about the inner member and configured to move radially relative to the inner member and the steering section.

29. The rotary steerable drilling apparatus of Claim 28 wherein the two-piece piston assembly includes a travel-limiting means for restricting the radial stroke of the outer member relative to the inner member and the steering section.

30. A method for drilling a borehole with a drill bit having a cutting structure, said method comprising the steps of:

- (a) flowing drilling fluid to a steering section having a central axis, a first end, and a second end opposite the first end, wherein the second end comprises the cutting structure;
- (b) selectively distributing the drilling fluid supplied to the steering section with a fluid-metering assembly, wherein the fluid-metering assembly includes a first component and a second component;
- (c) continuously flowing drilling fluid through a central passage in the first component, a central passage in the second component, and a central channel in the steering section to the cutting structure;
- (d) flowing drilling fluid through an outlet of the first component, a first inlet of the second component, and a first fluid channel in the steering section to a first piston housed in the steering section while flowing drilling fluid to the cutting structure in step (c), so as to move the first piston radially outward from the steering section.

31. The method of Claim 30, further comprising the step of:

- 5 (e) flowing drilling fluid through the outlet of the first component, a second inlet of the second component, and a second fluid channel in the steering section to a second piston housed in the steering section after step (d) and while flowing drilling fluid to the cutting structure in step (c), so as to move the second piston radially outward from the steering section.

32. The method of Claim 31 wherein step (d) comprises rotating the first component to a first position aligning the outlet with the first inlet, and step (e) comprises rotating the first component to a second position aligning the outlet with the second inlet.

10 33. The method of Claim 31, further comprising the step of:

- (f) flowing drilling fluid through the first component into both the first inlet and the second inlet simultaneously.

15 34. The method of Claim 33 wherein step (f) causes the first piston and the second piston to extend radially outward from the steering section to centralize the drill bit in the borehole.

35. The method of Claim 33, further comprising the step of flowing drilling fluid through the first component and the second component while restricting drilling fluid from flowing into the first inlet and the second inlet.

20 36. The method of any one of Claims 30-35 wherein the outlet extends radially through the first component.

37. The method of any one of Claims 30-35 wherein the outlet extends axially through the first component and the first inlet extends axially through the second component.

25 38. The method of any one of Claims 30-37, further comprising the step of rotating the first component relative to the second component to place the outlet in fluid communication with the first inlet.


39. A method for drilling a borehole with a drill bit having a cutting structure, said method comprising the steps of:

- 5 (a) flowing drilling fluid to a steering section having a central axis, a first end, and a second end opposite the first end, wherein the second end comprises the cutting structure;
- (b) selectively distributing the drilling fluid supplied to the steering section with a fluid-metering assembly, wherein the fluid-metering assembly includes a first component and a second component;
- 10 (c) continuously flowing drilling fluid through the first component, the second component, and the steering section to the cutting structure;
- (d) flowing drilling fluid through an outlet of the first component, a first inlet of the second component, and a first fluid channel in the steering section to a first piston housed in the steering section while flowing drilling fluid to the cutting structure in step (c), so as to move the first piston radially
- 15 outward from the steering section; and
- (e) moving the first component axially relative to the second component to place the outlet in fluid communication with the first inlet.


40. The method of Claim 39 wherein step (c) comprises continuously flowing drilling fluid through a central passage in the first component, a central passage in the second

20 component, and a central channel in the steering section to the cutting structure.

1 / 23

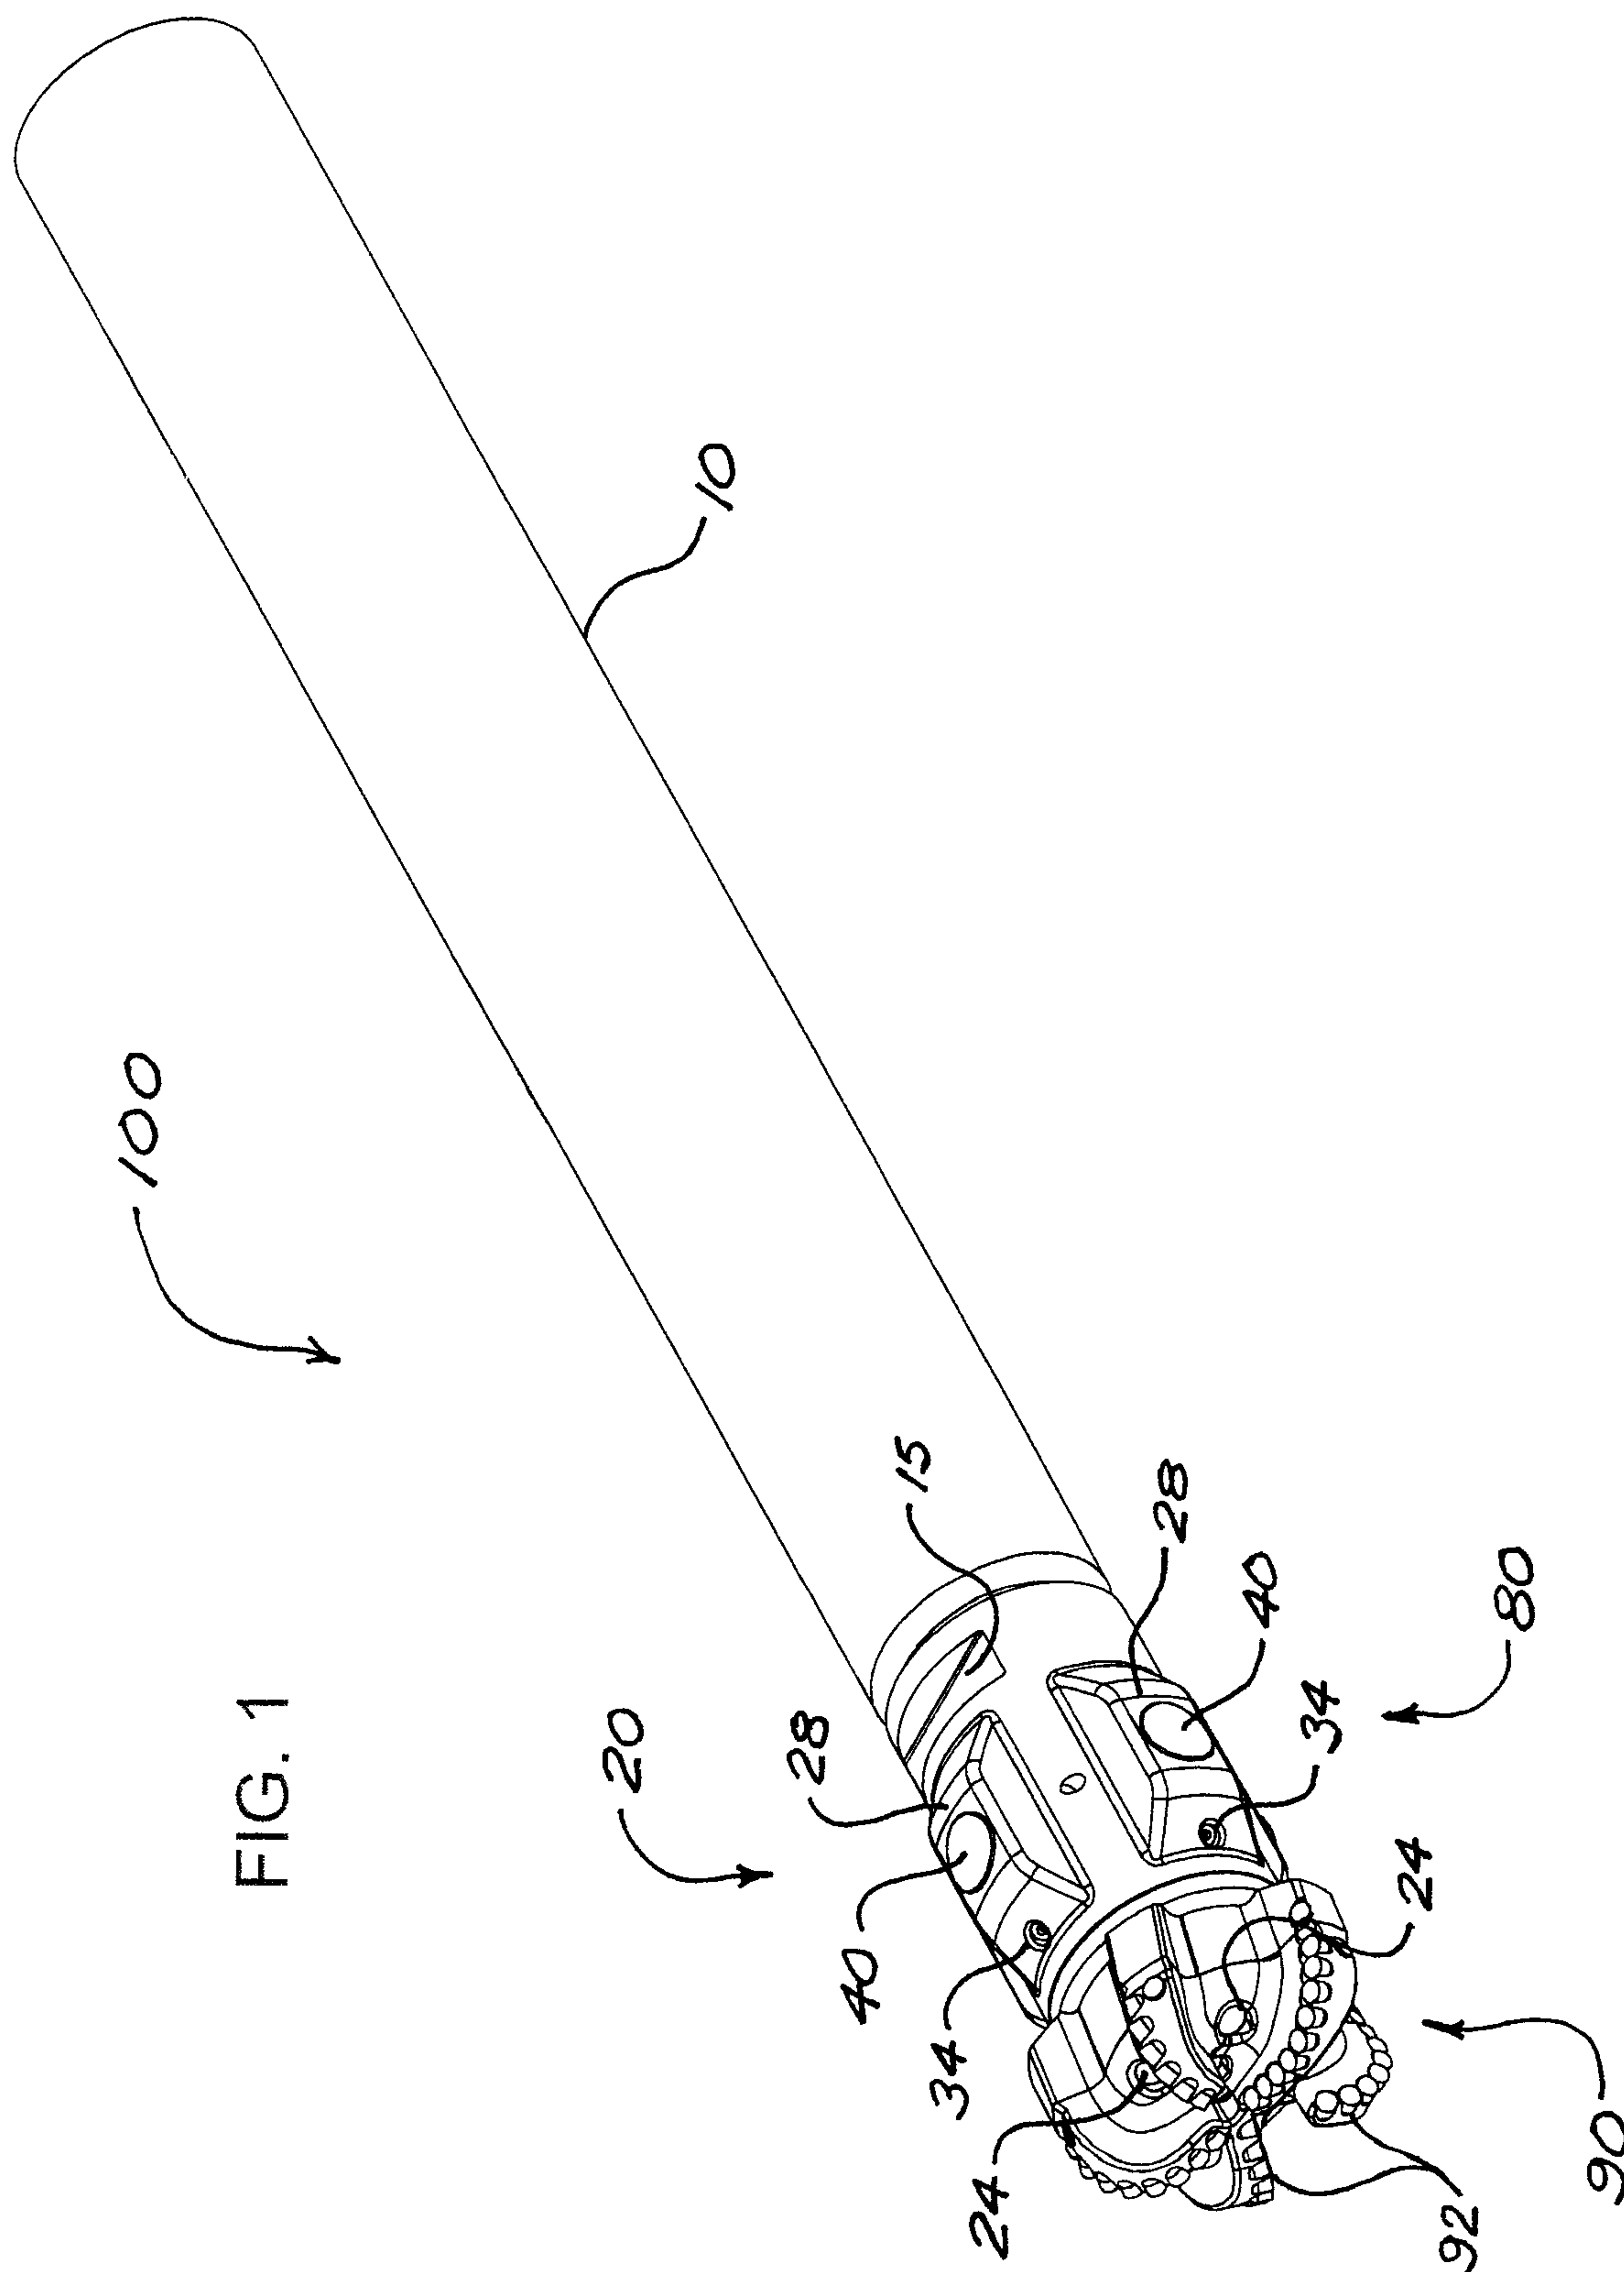

2 / 23

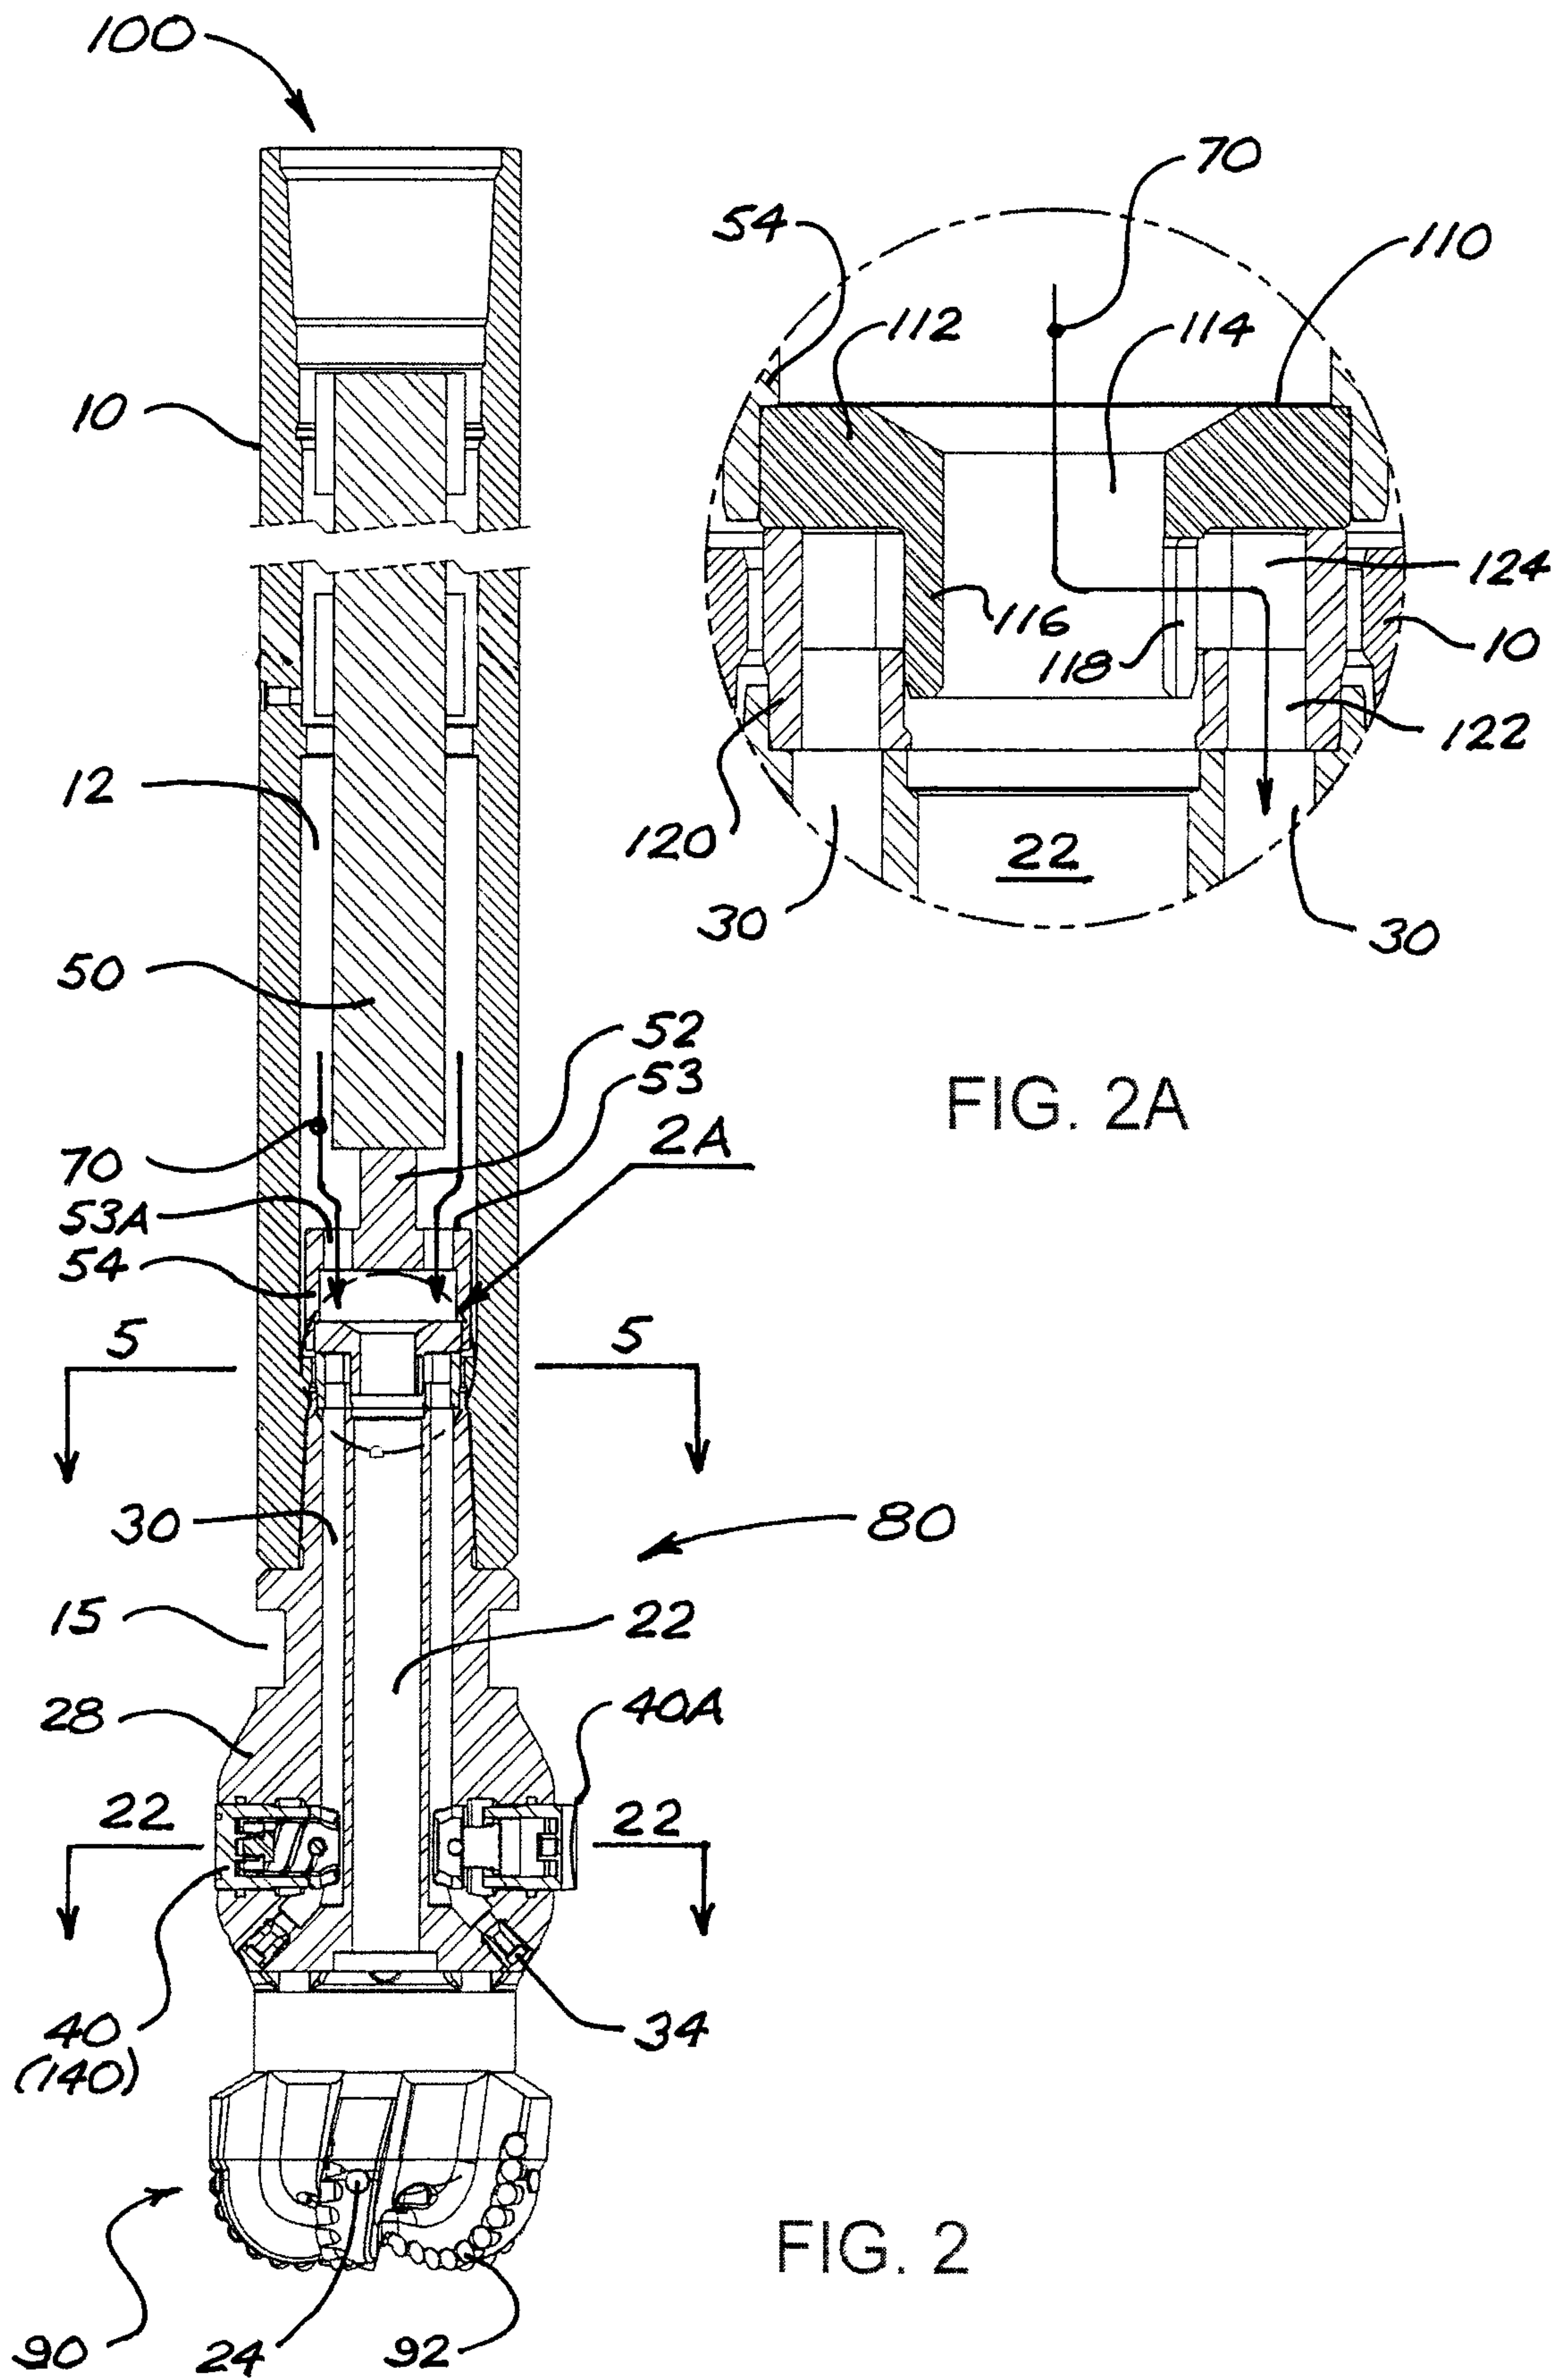

3 / 23

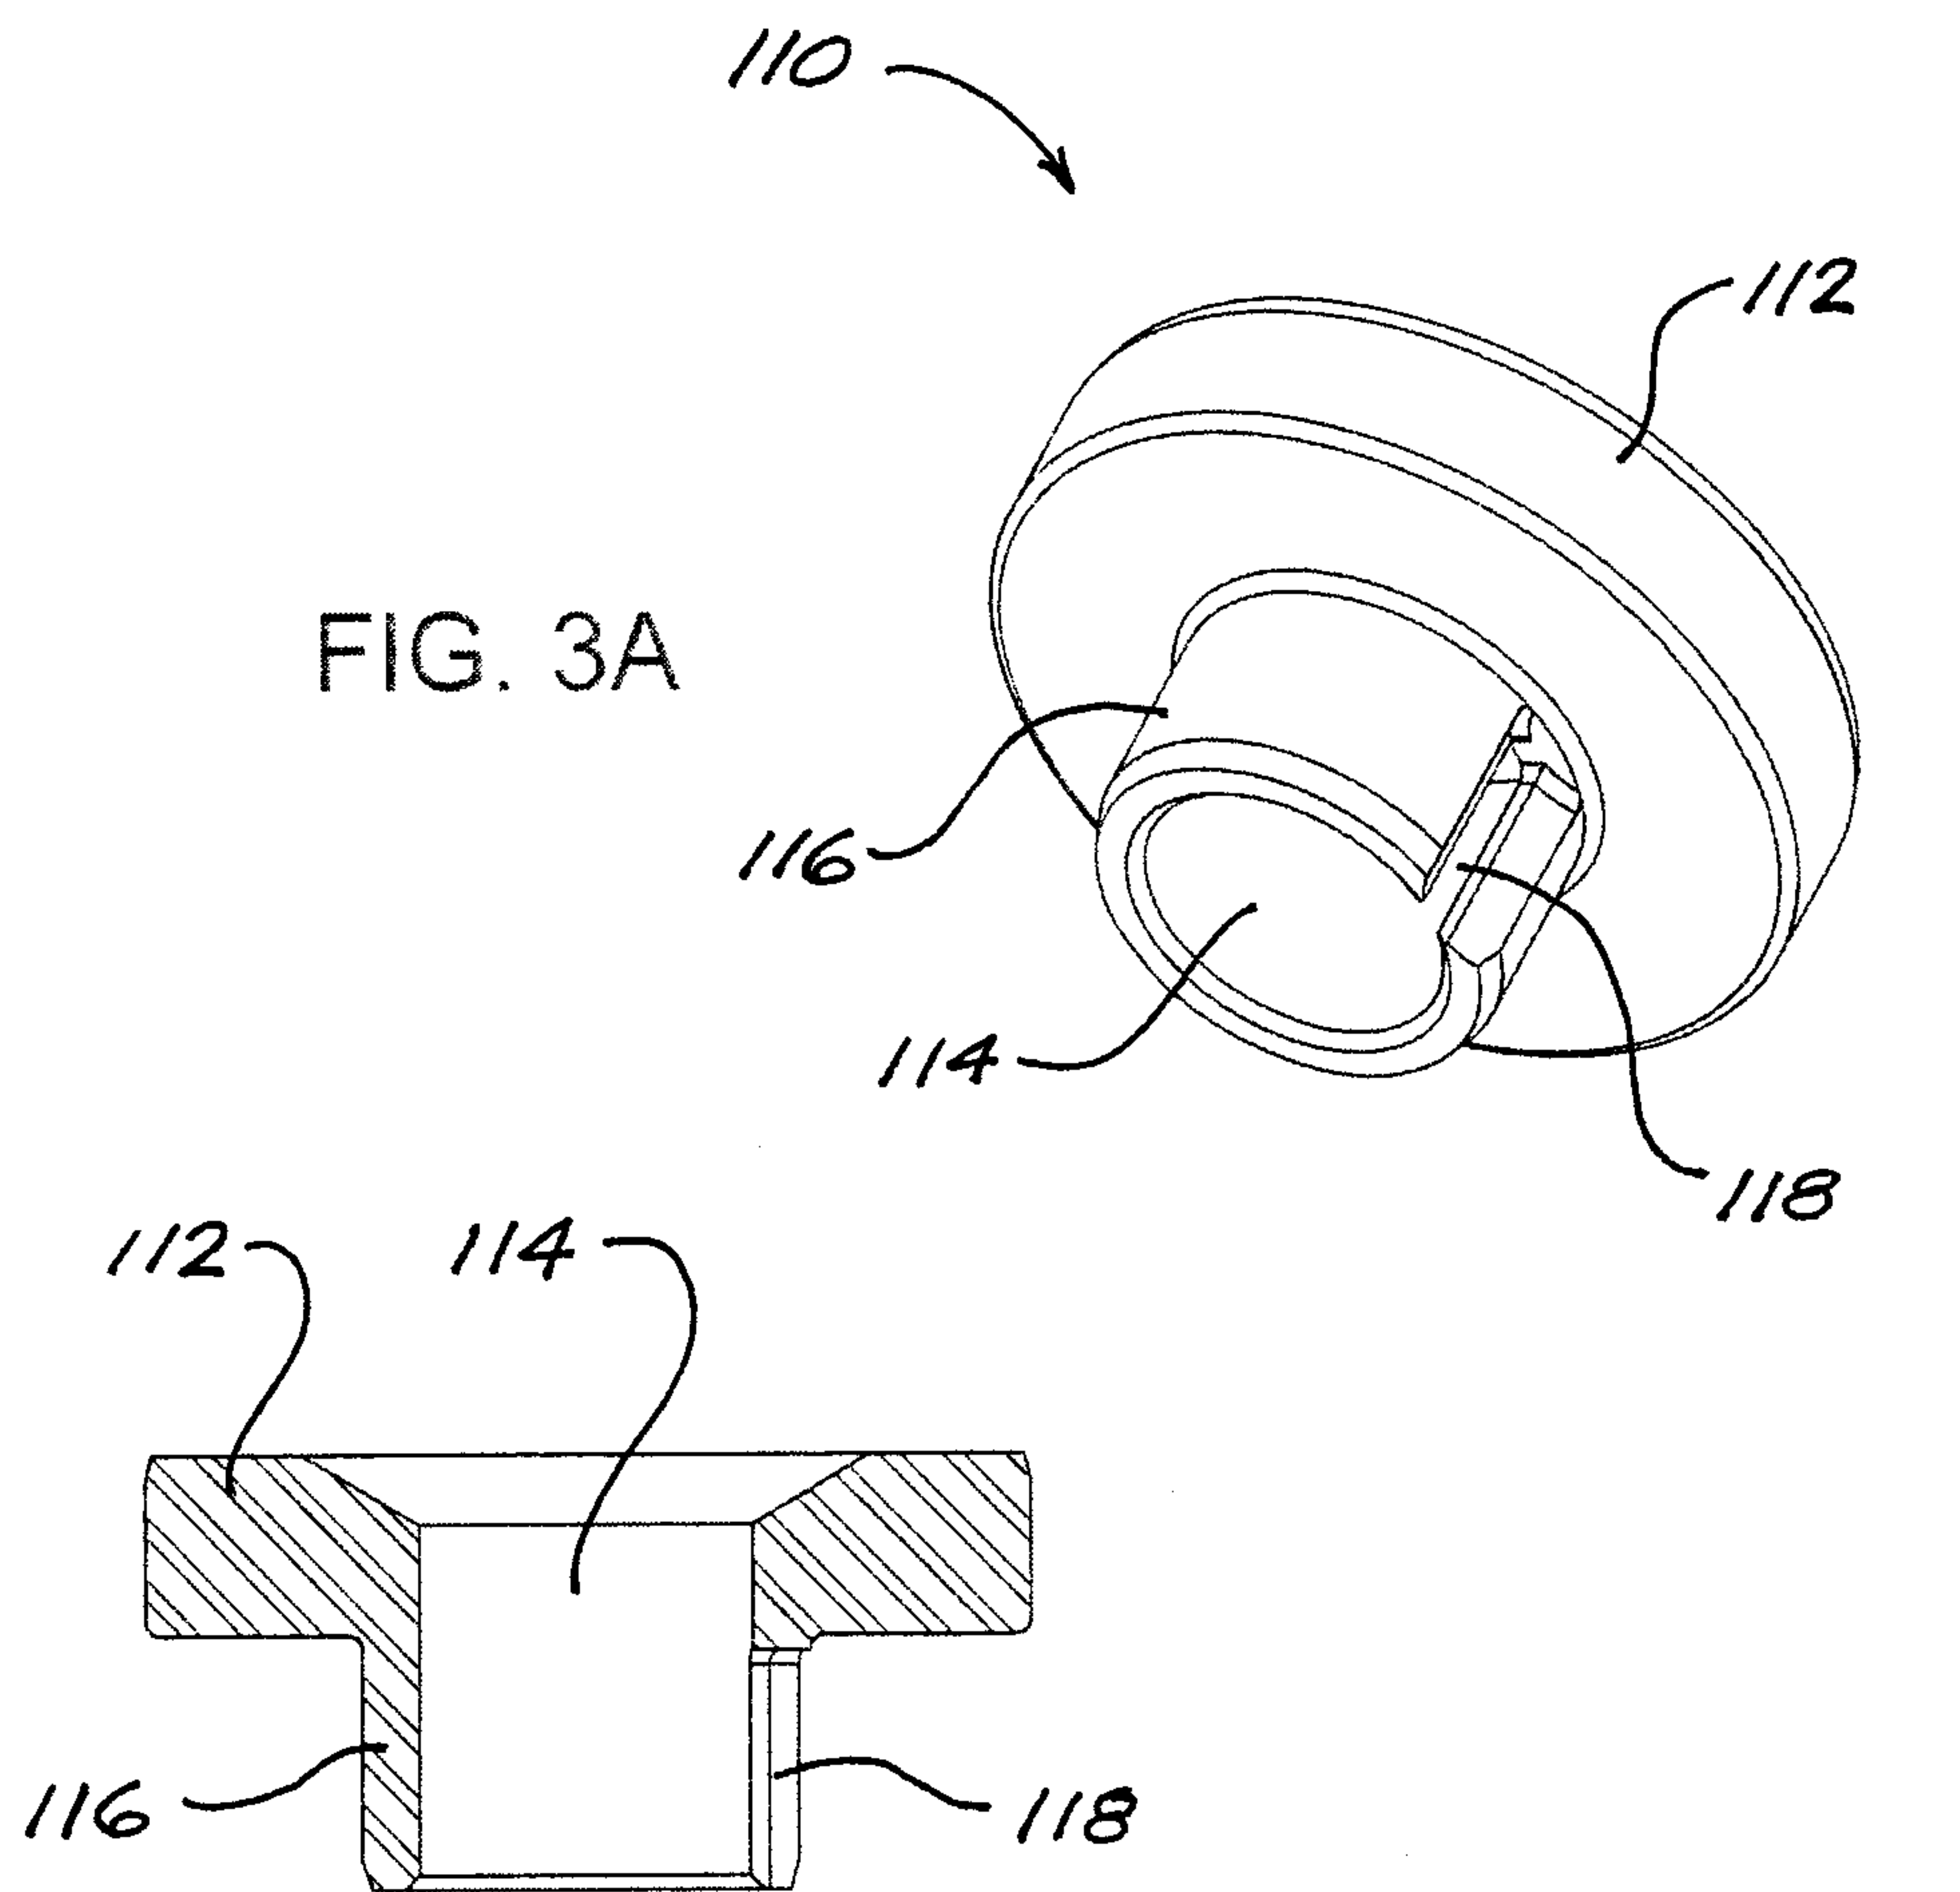


FIG. 3B

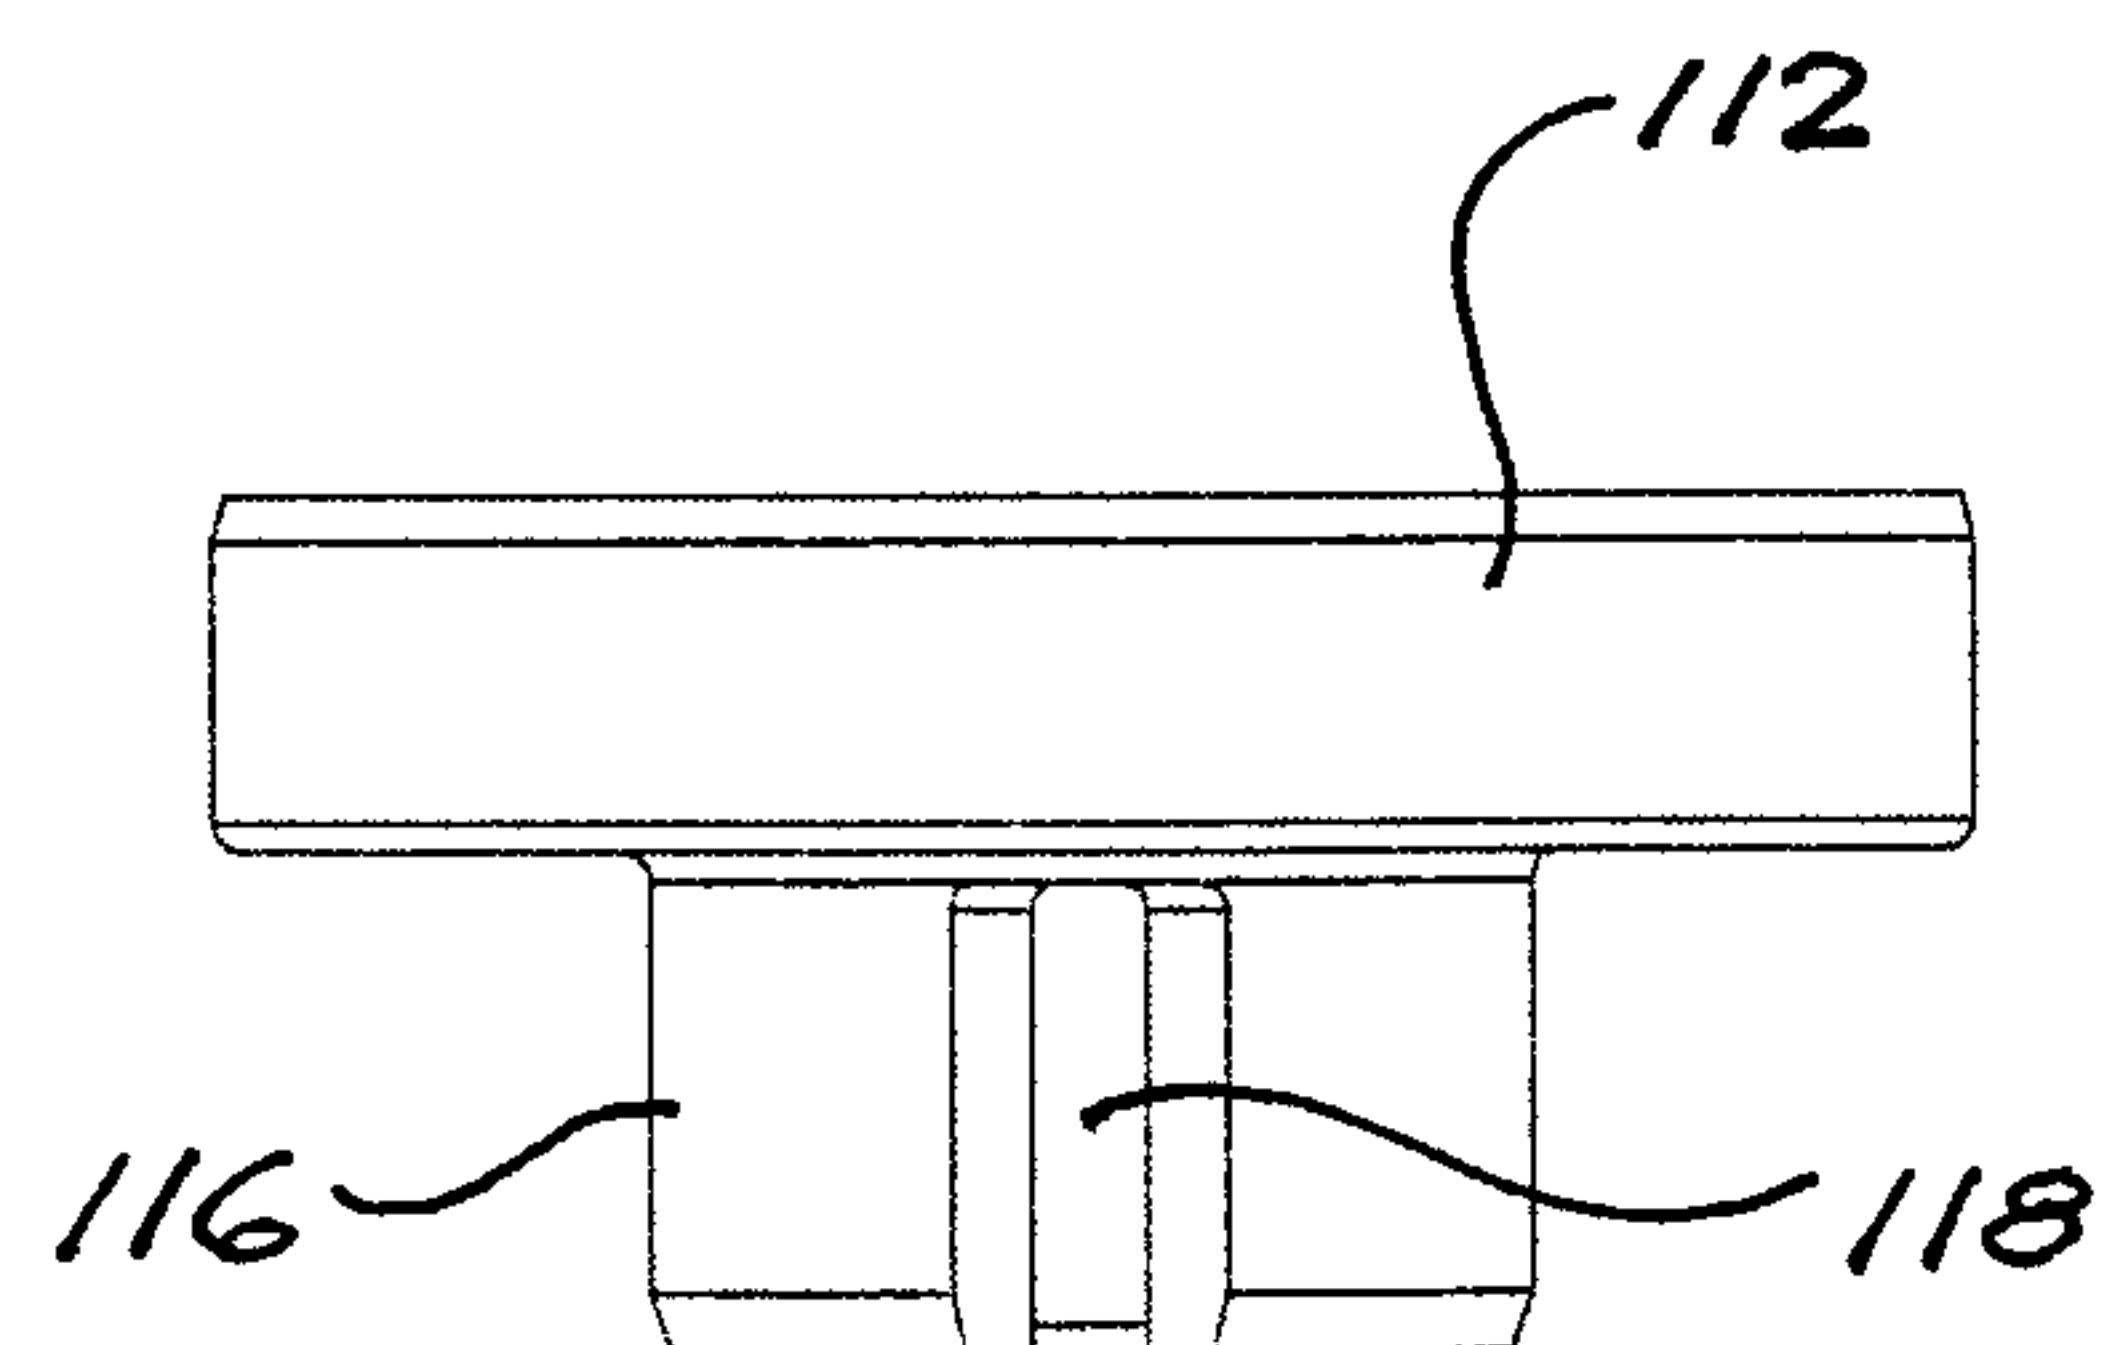
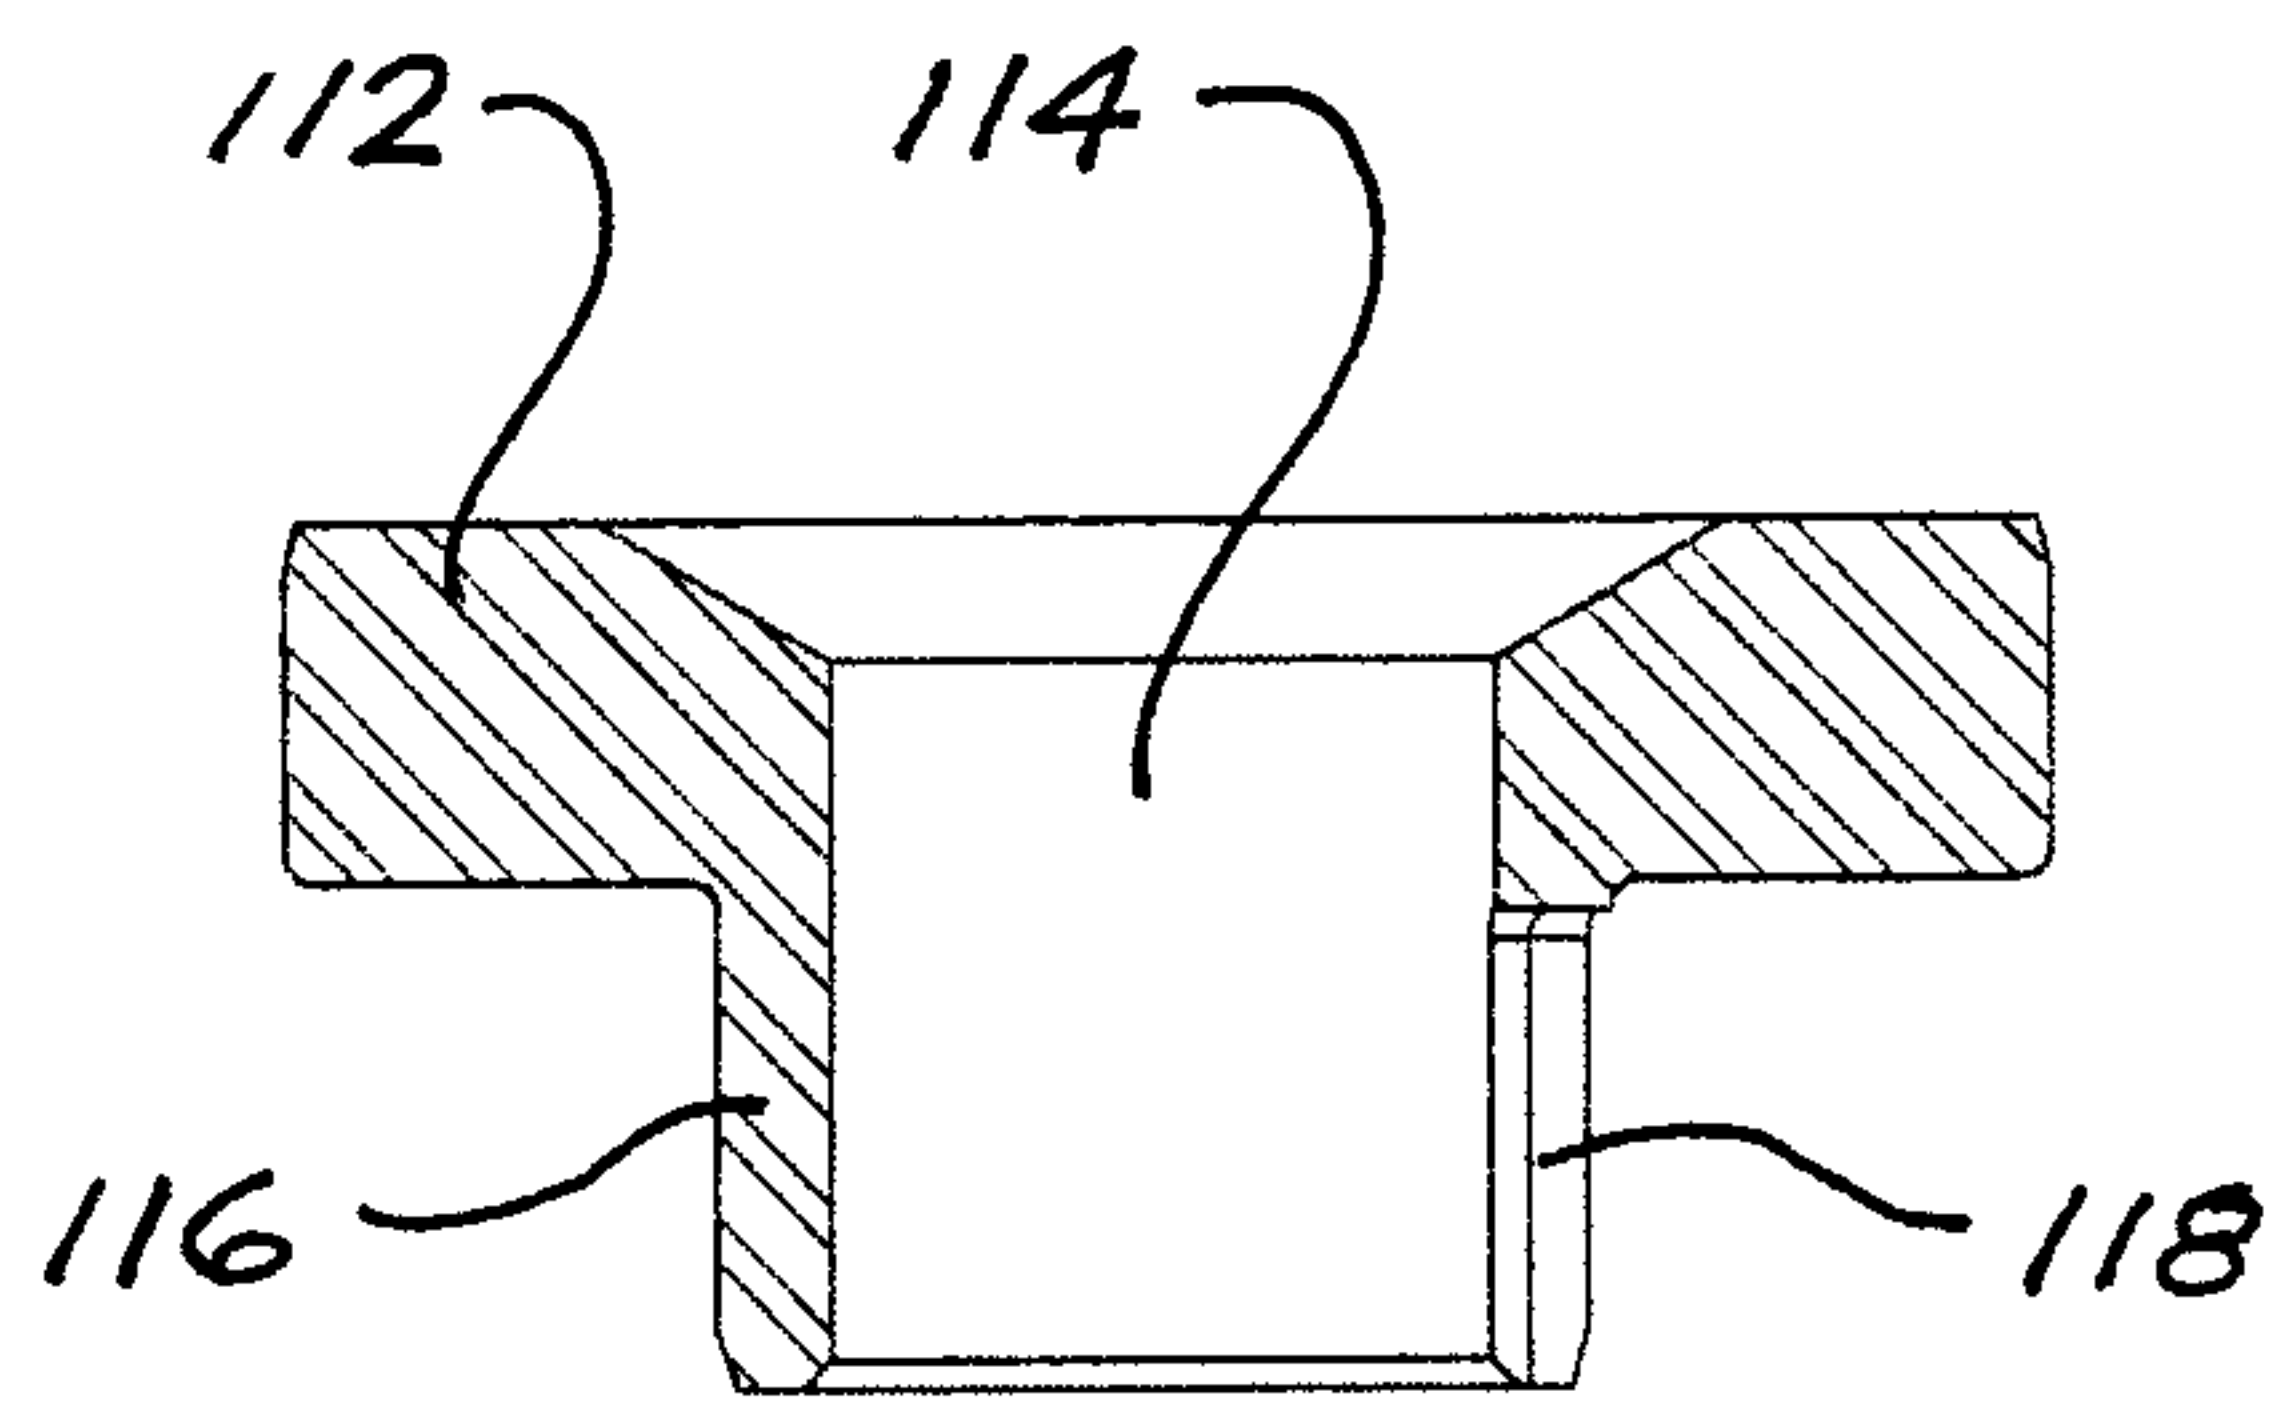


FIG. 3C

FIG. 4A

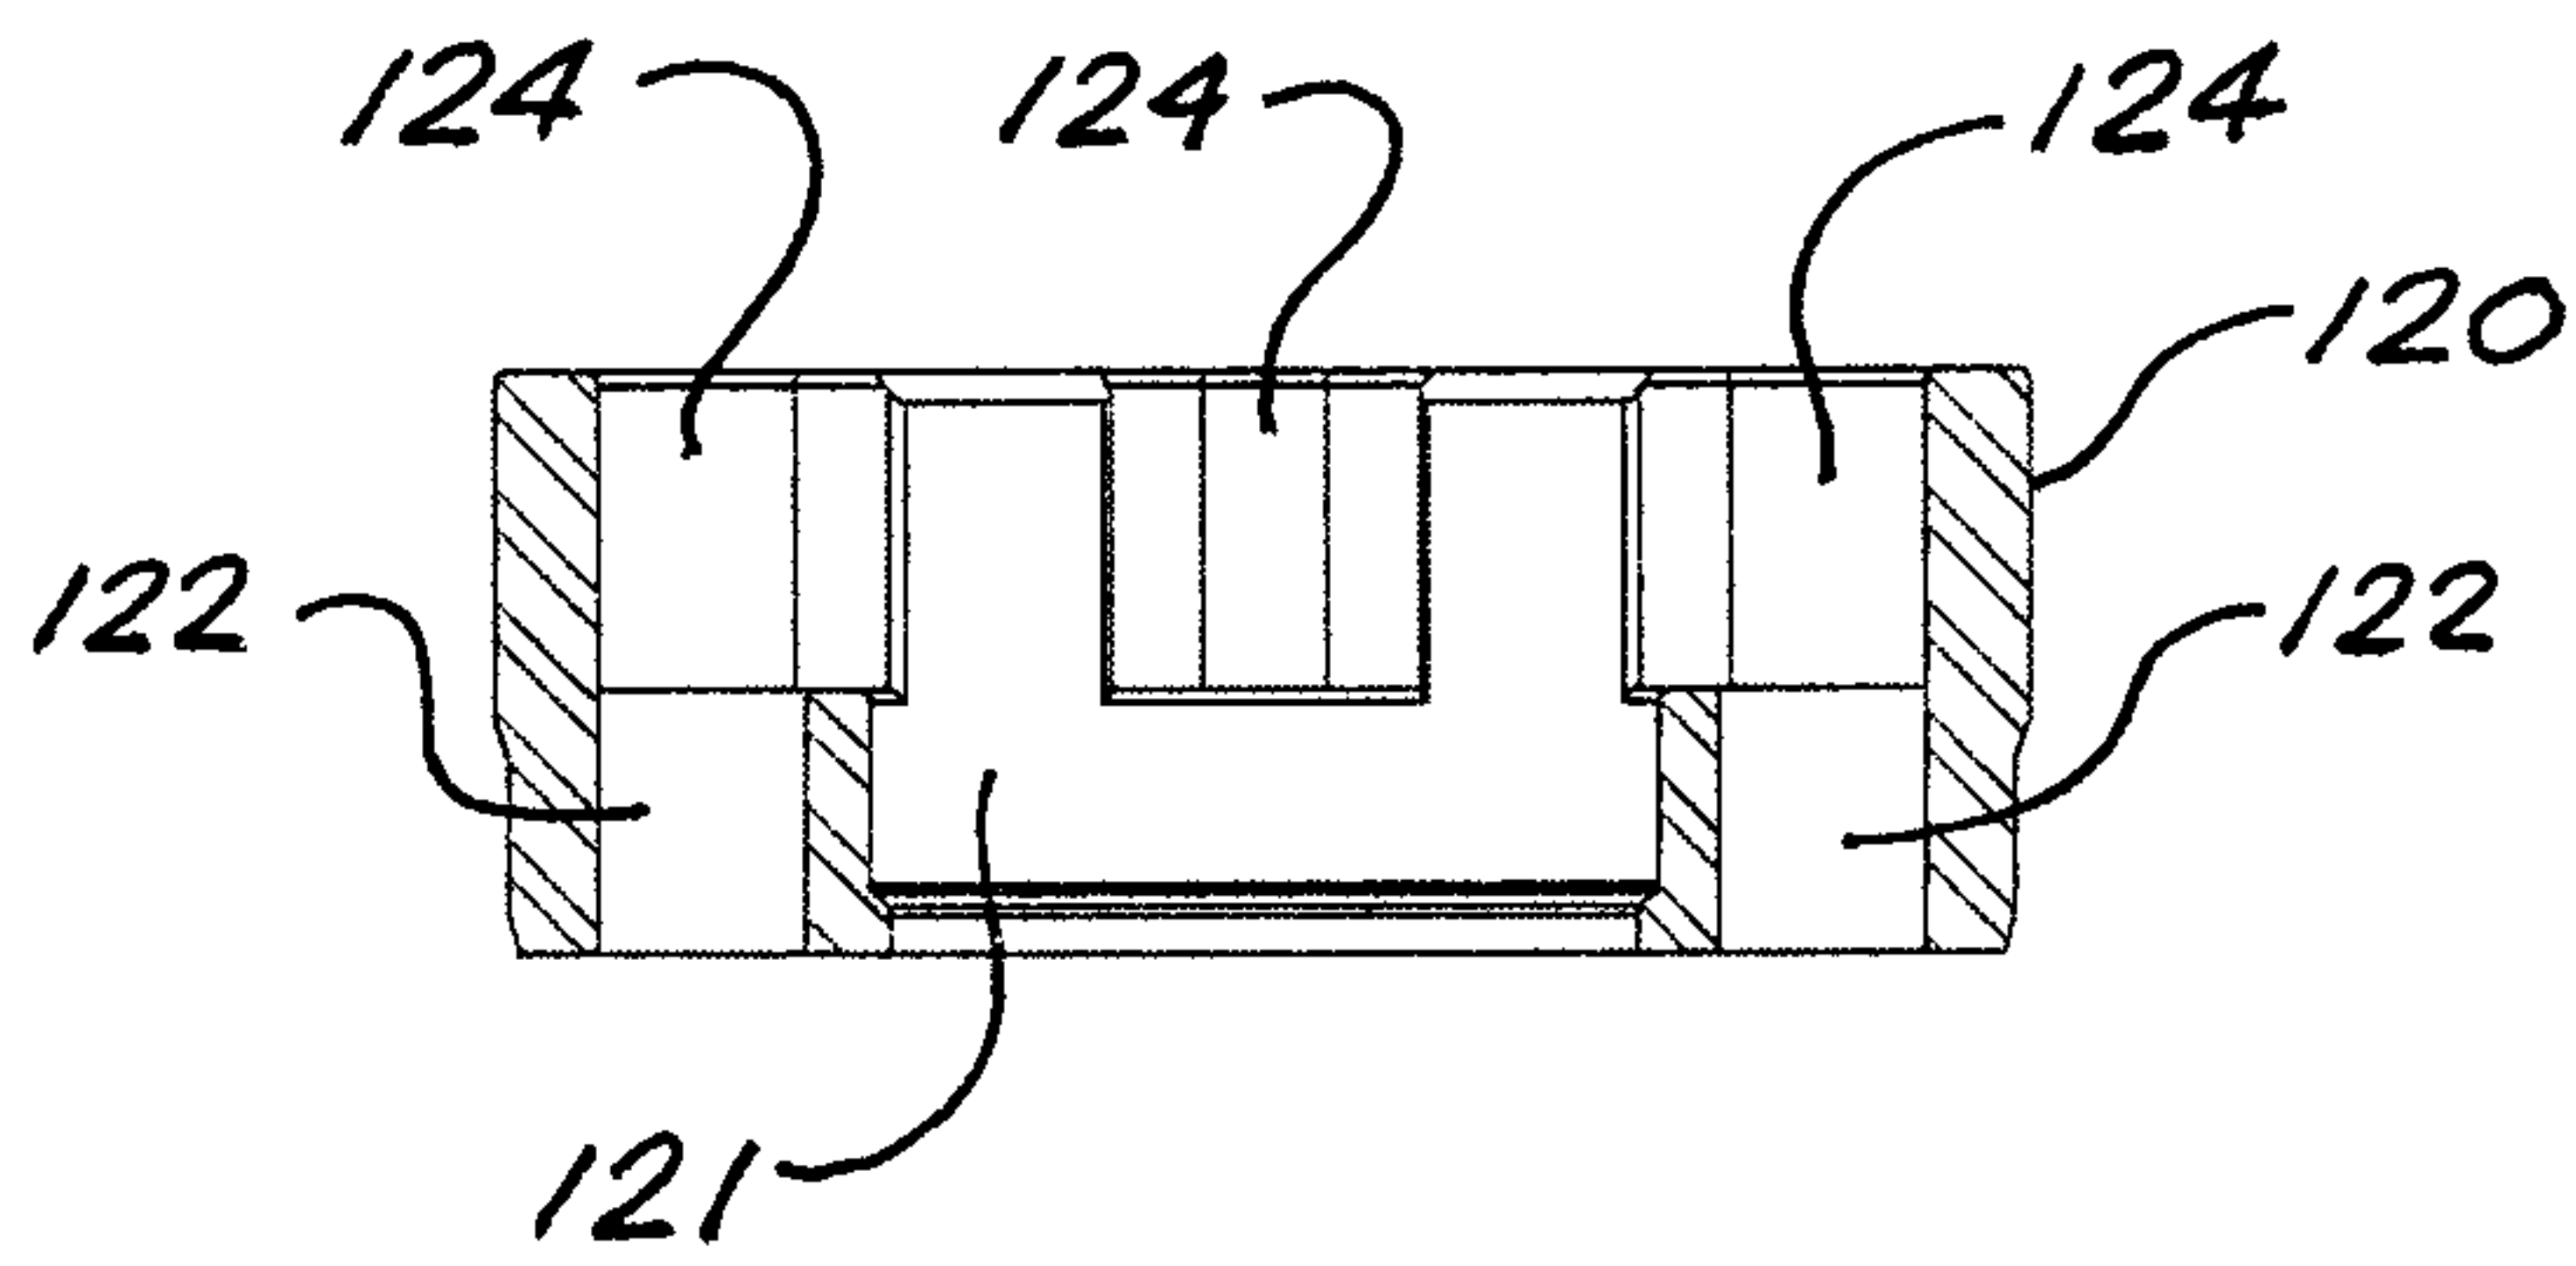
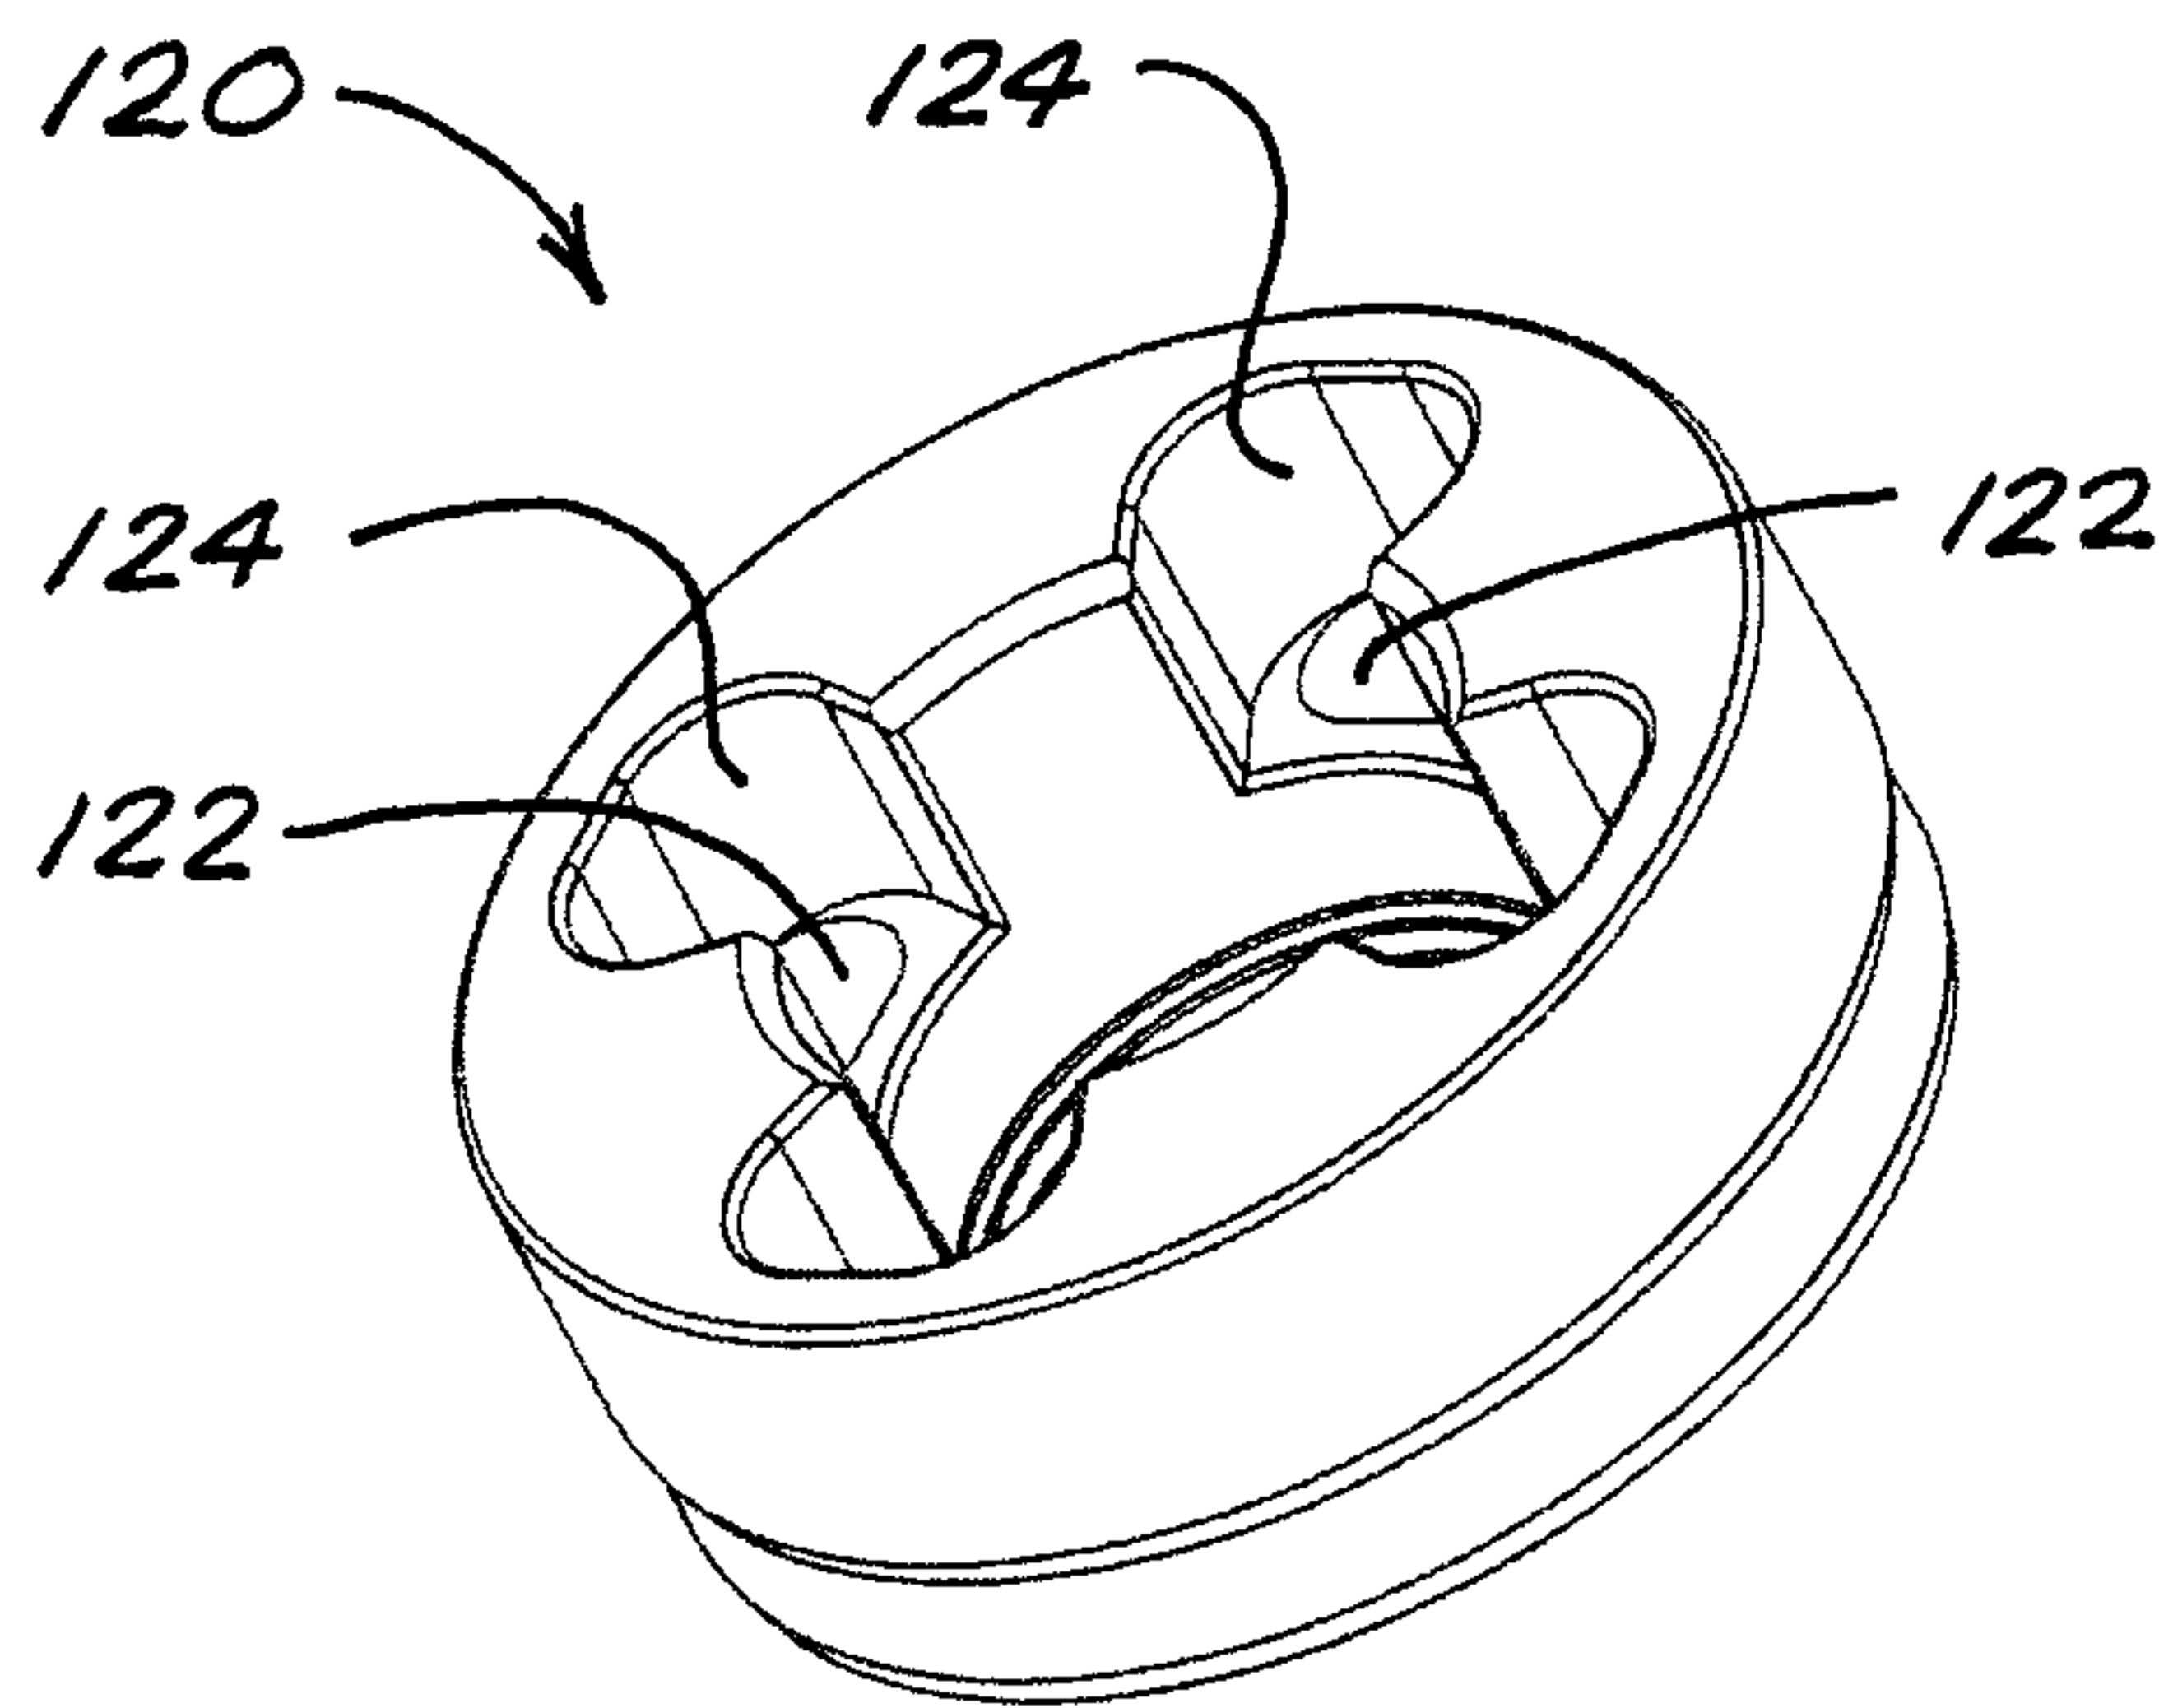


FIG. 4B

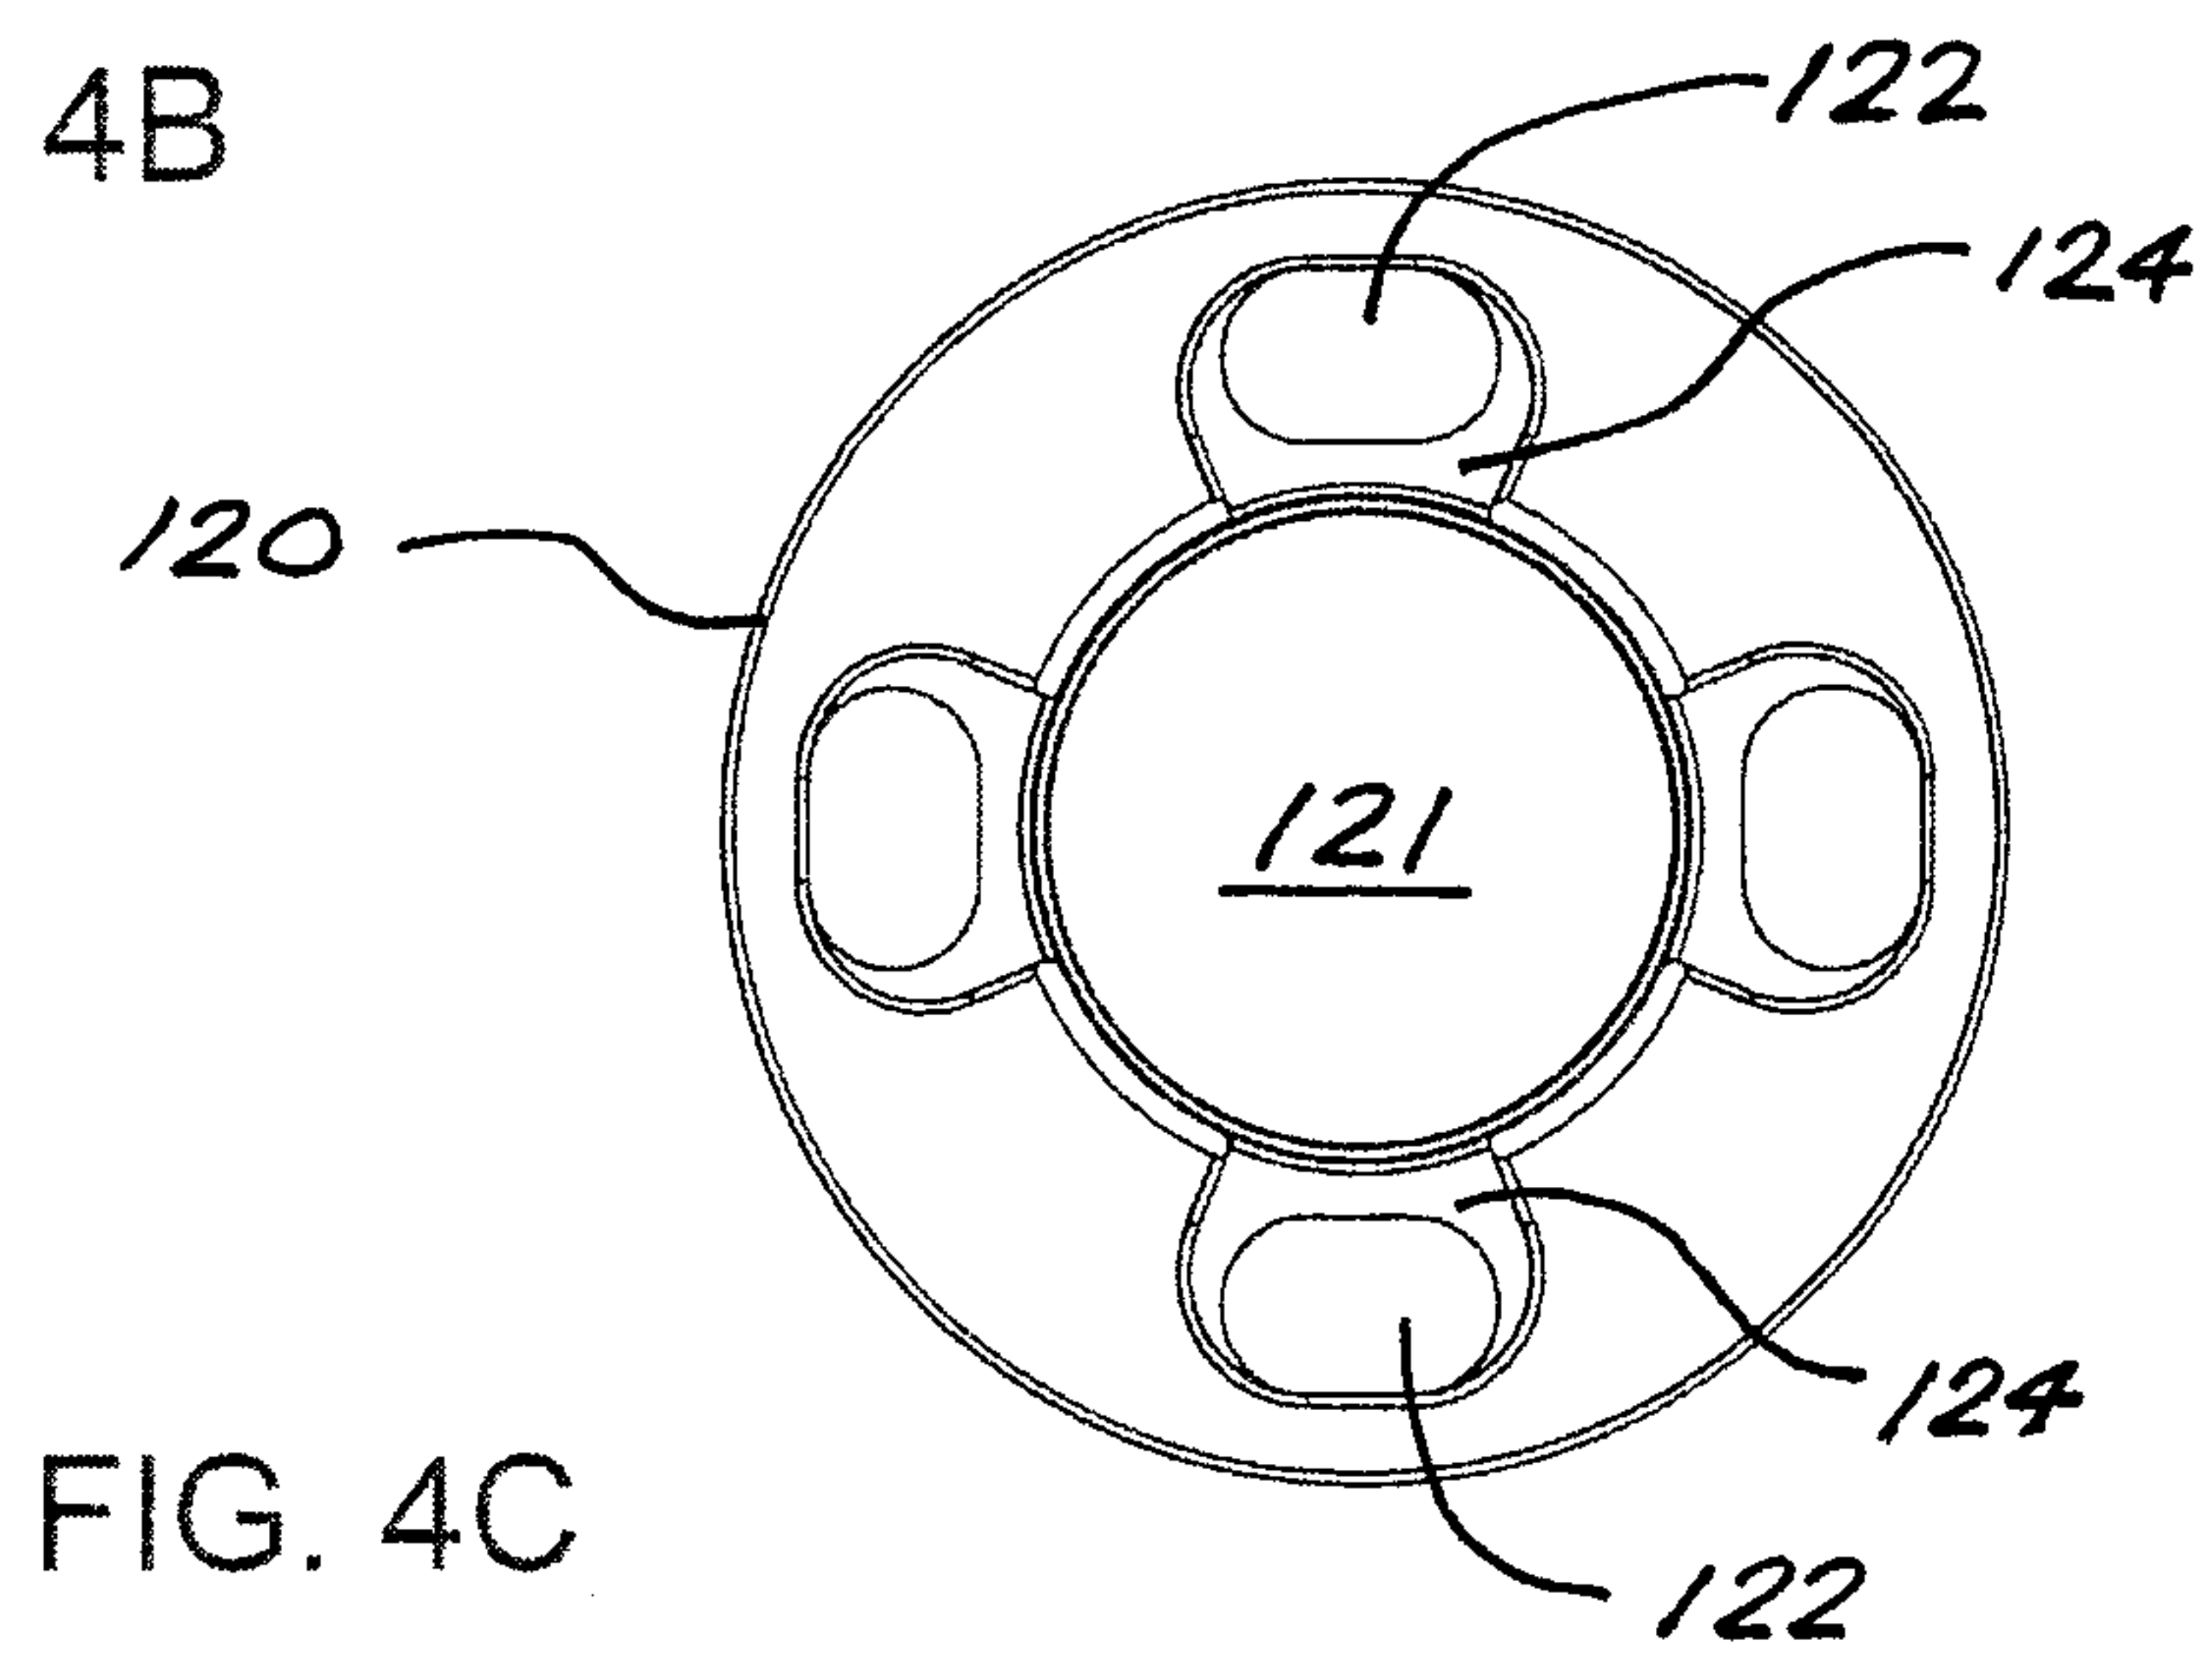


FIG. 4C

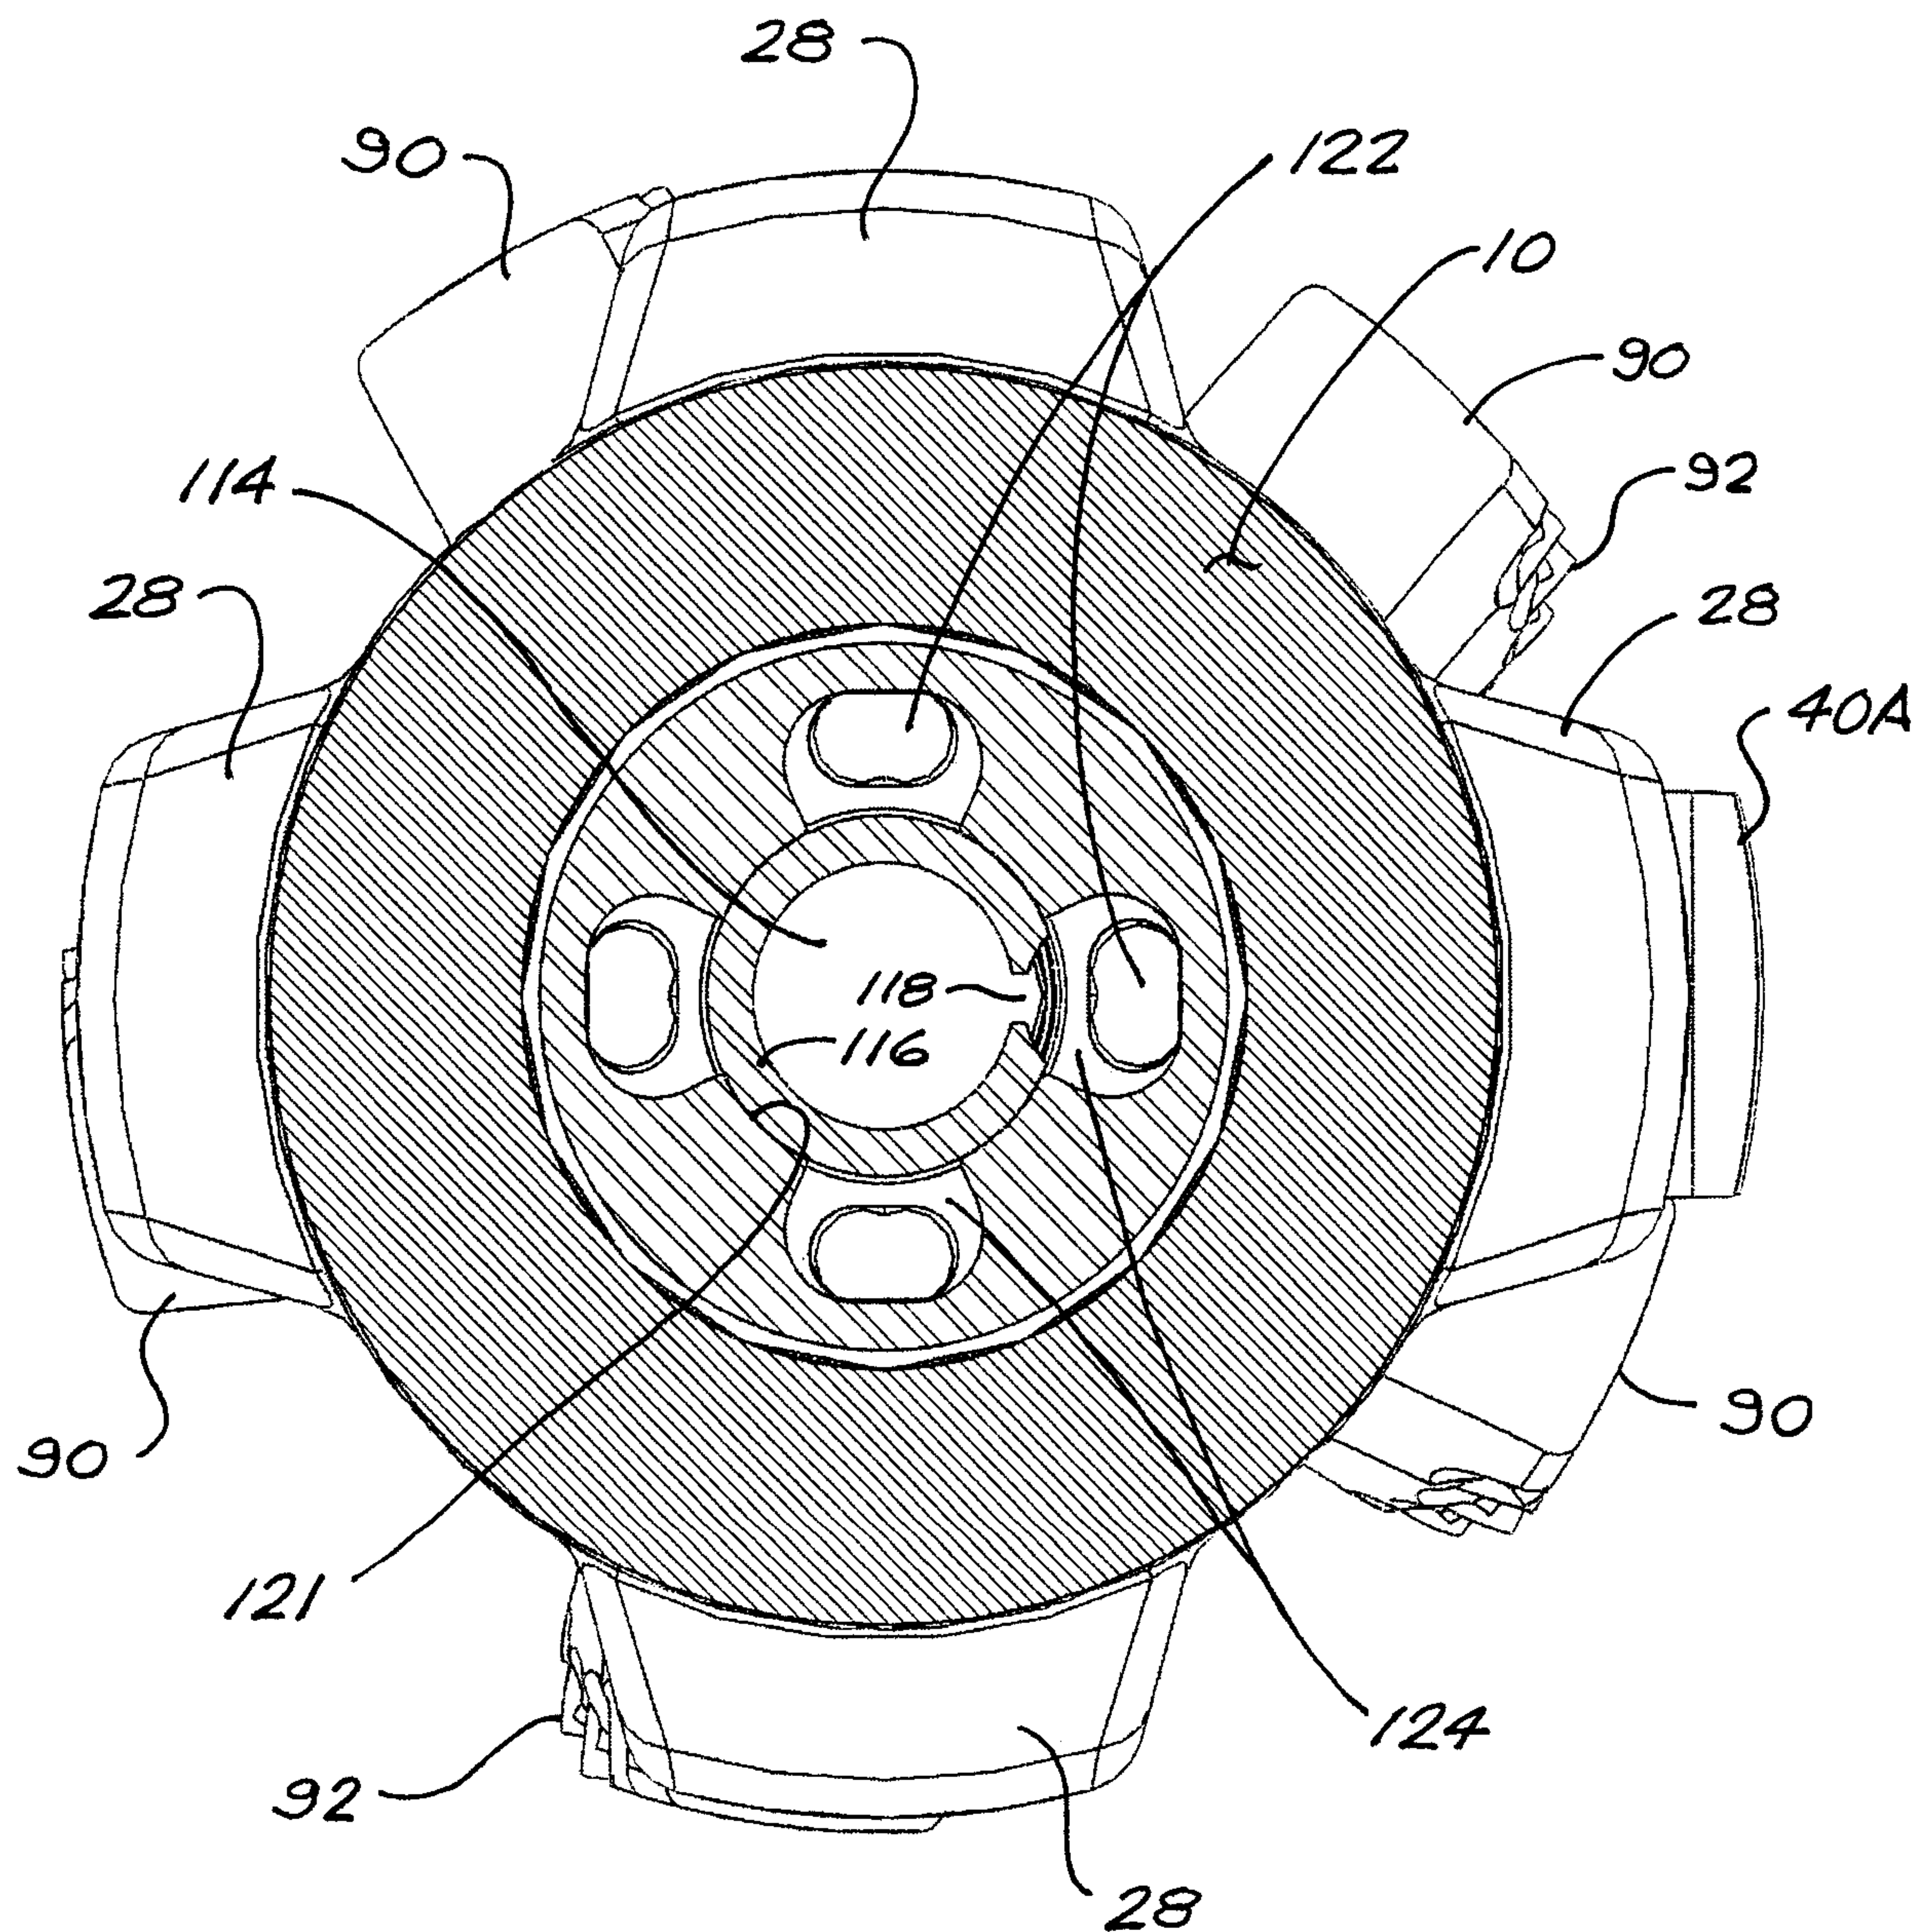


FIG. 5

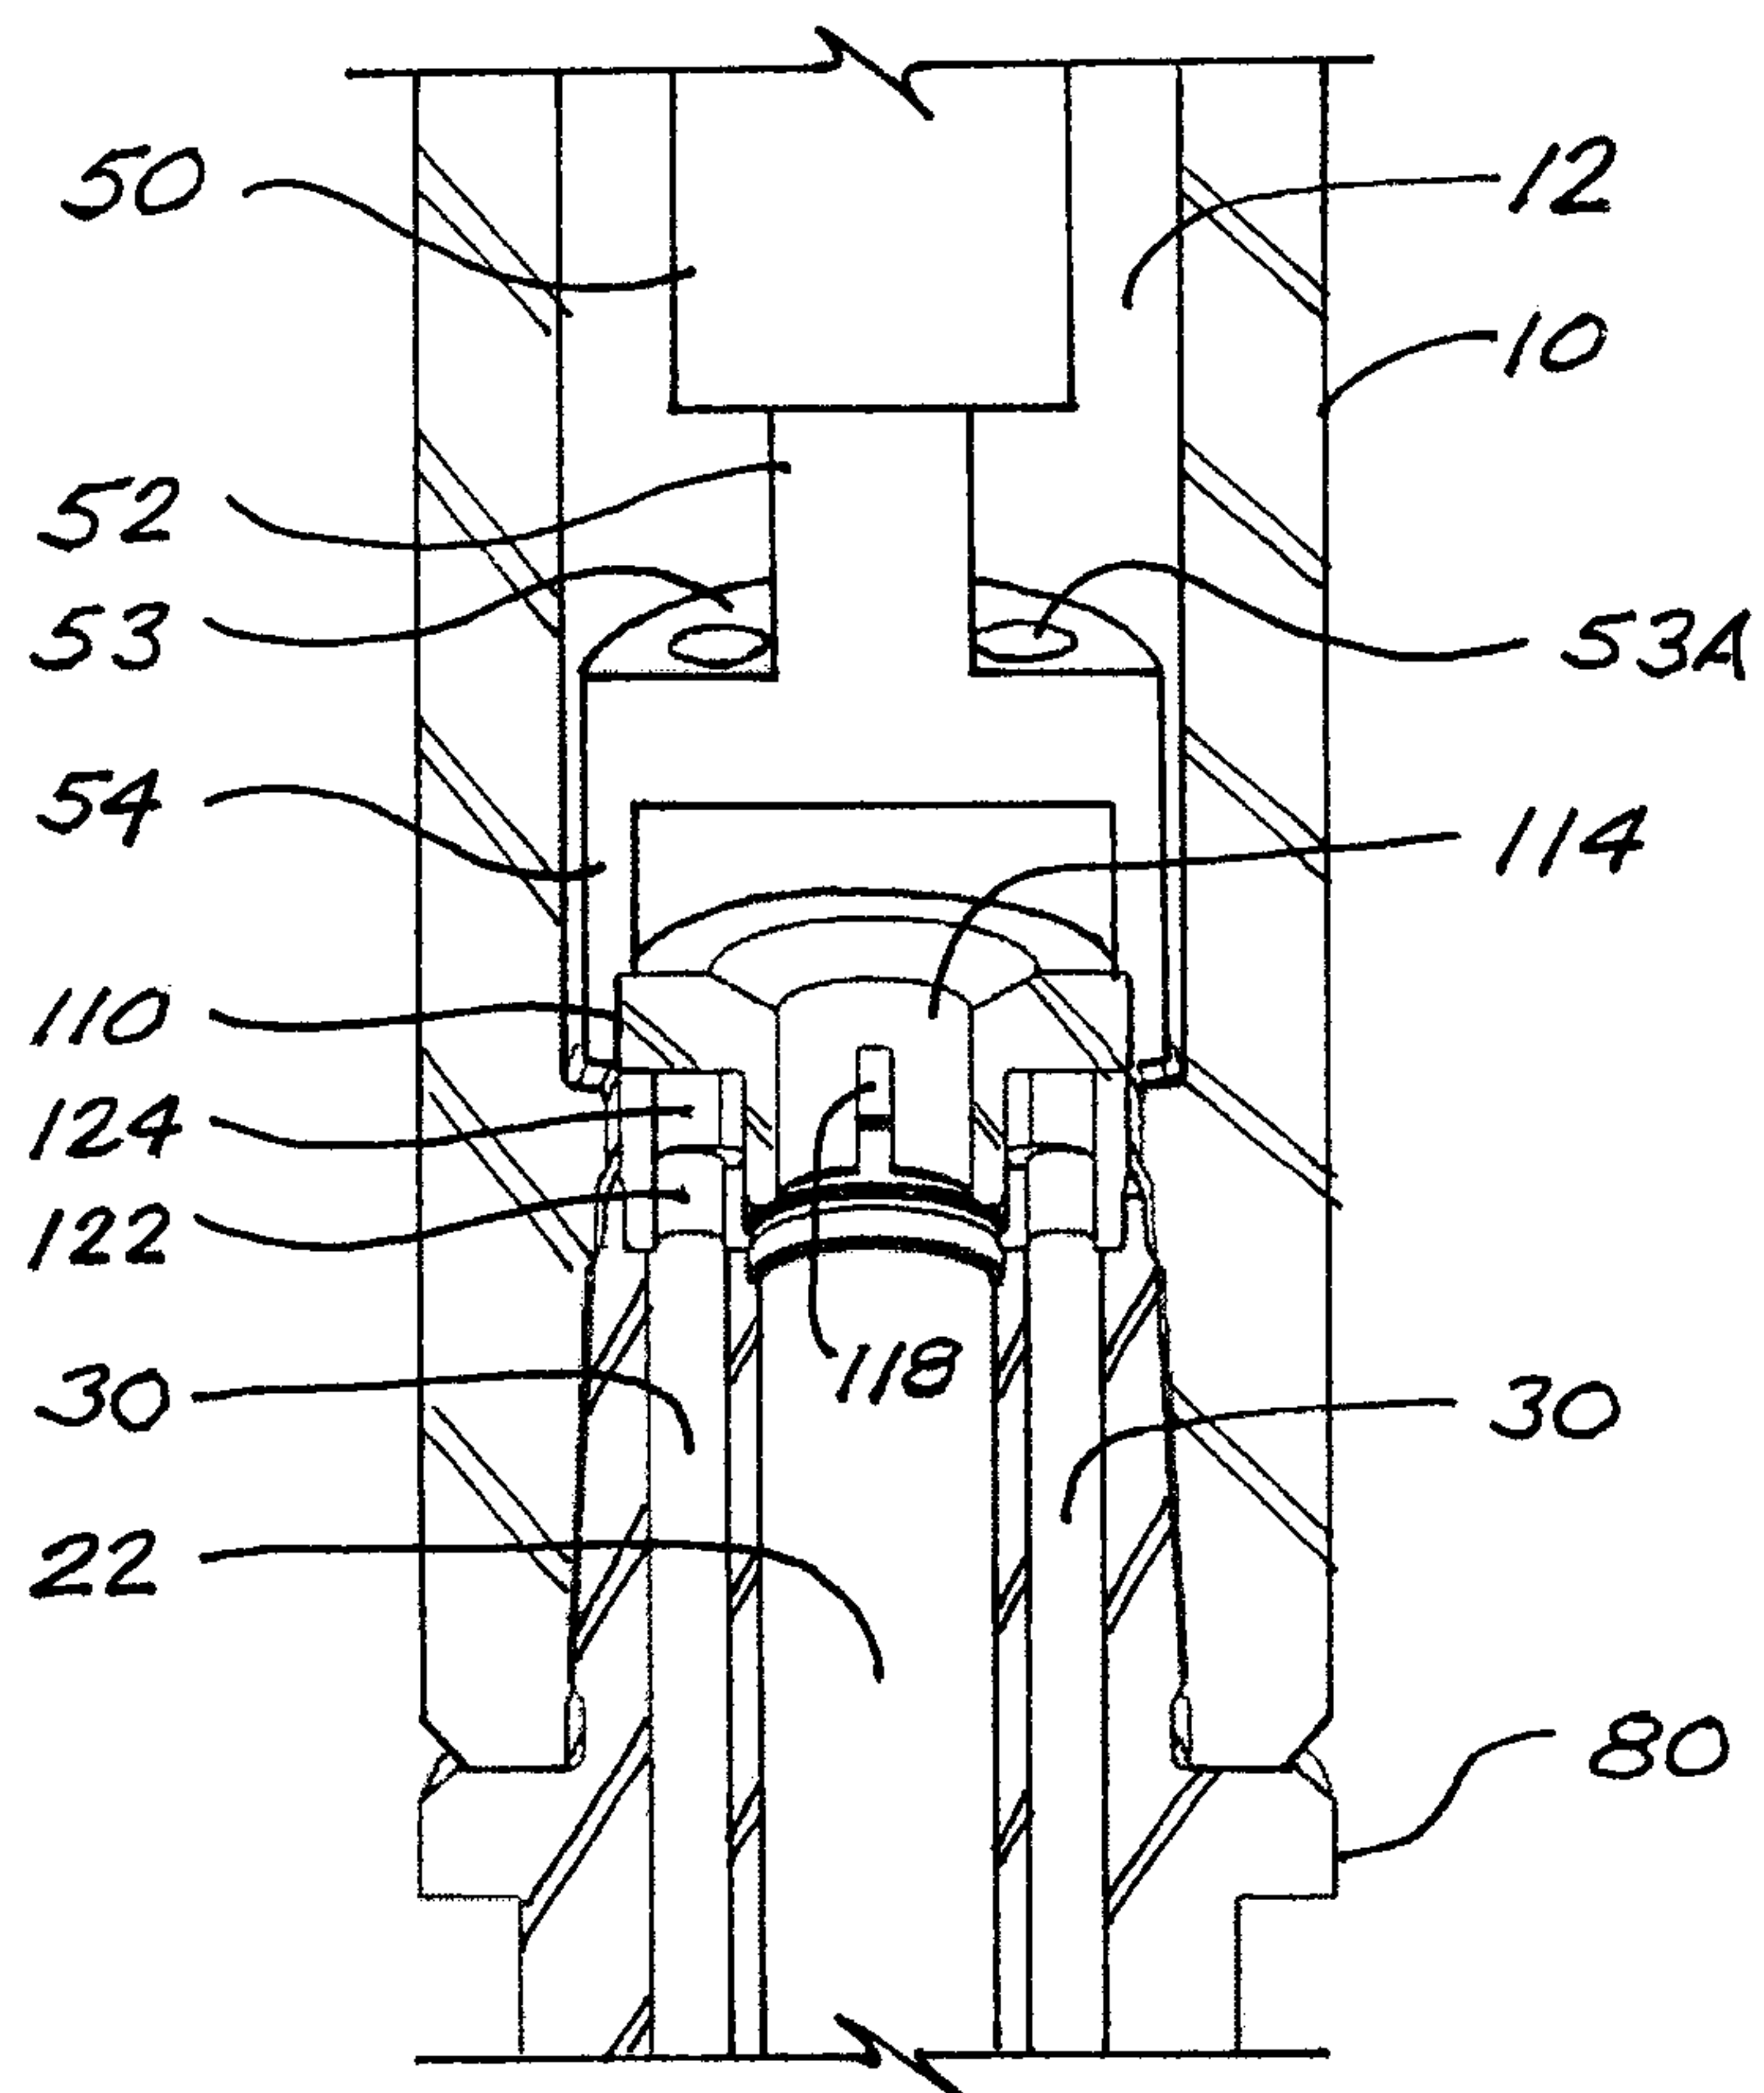


FIG. 6

7 / 23

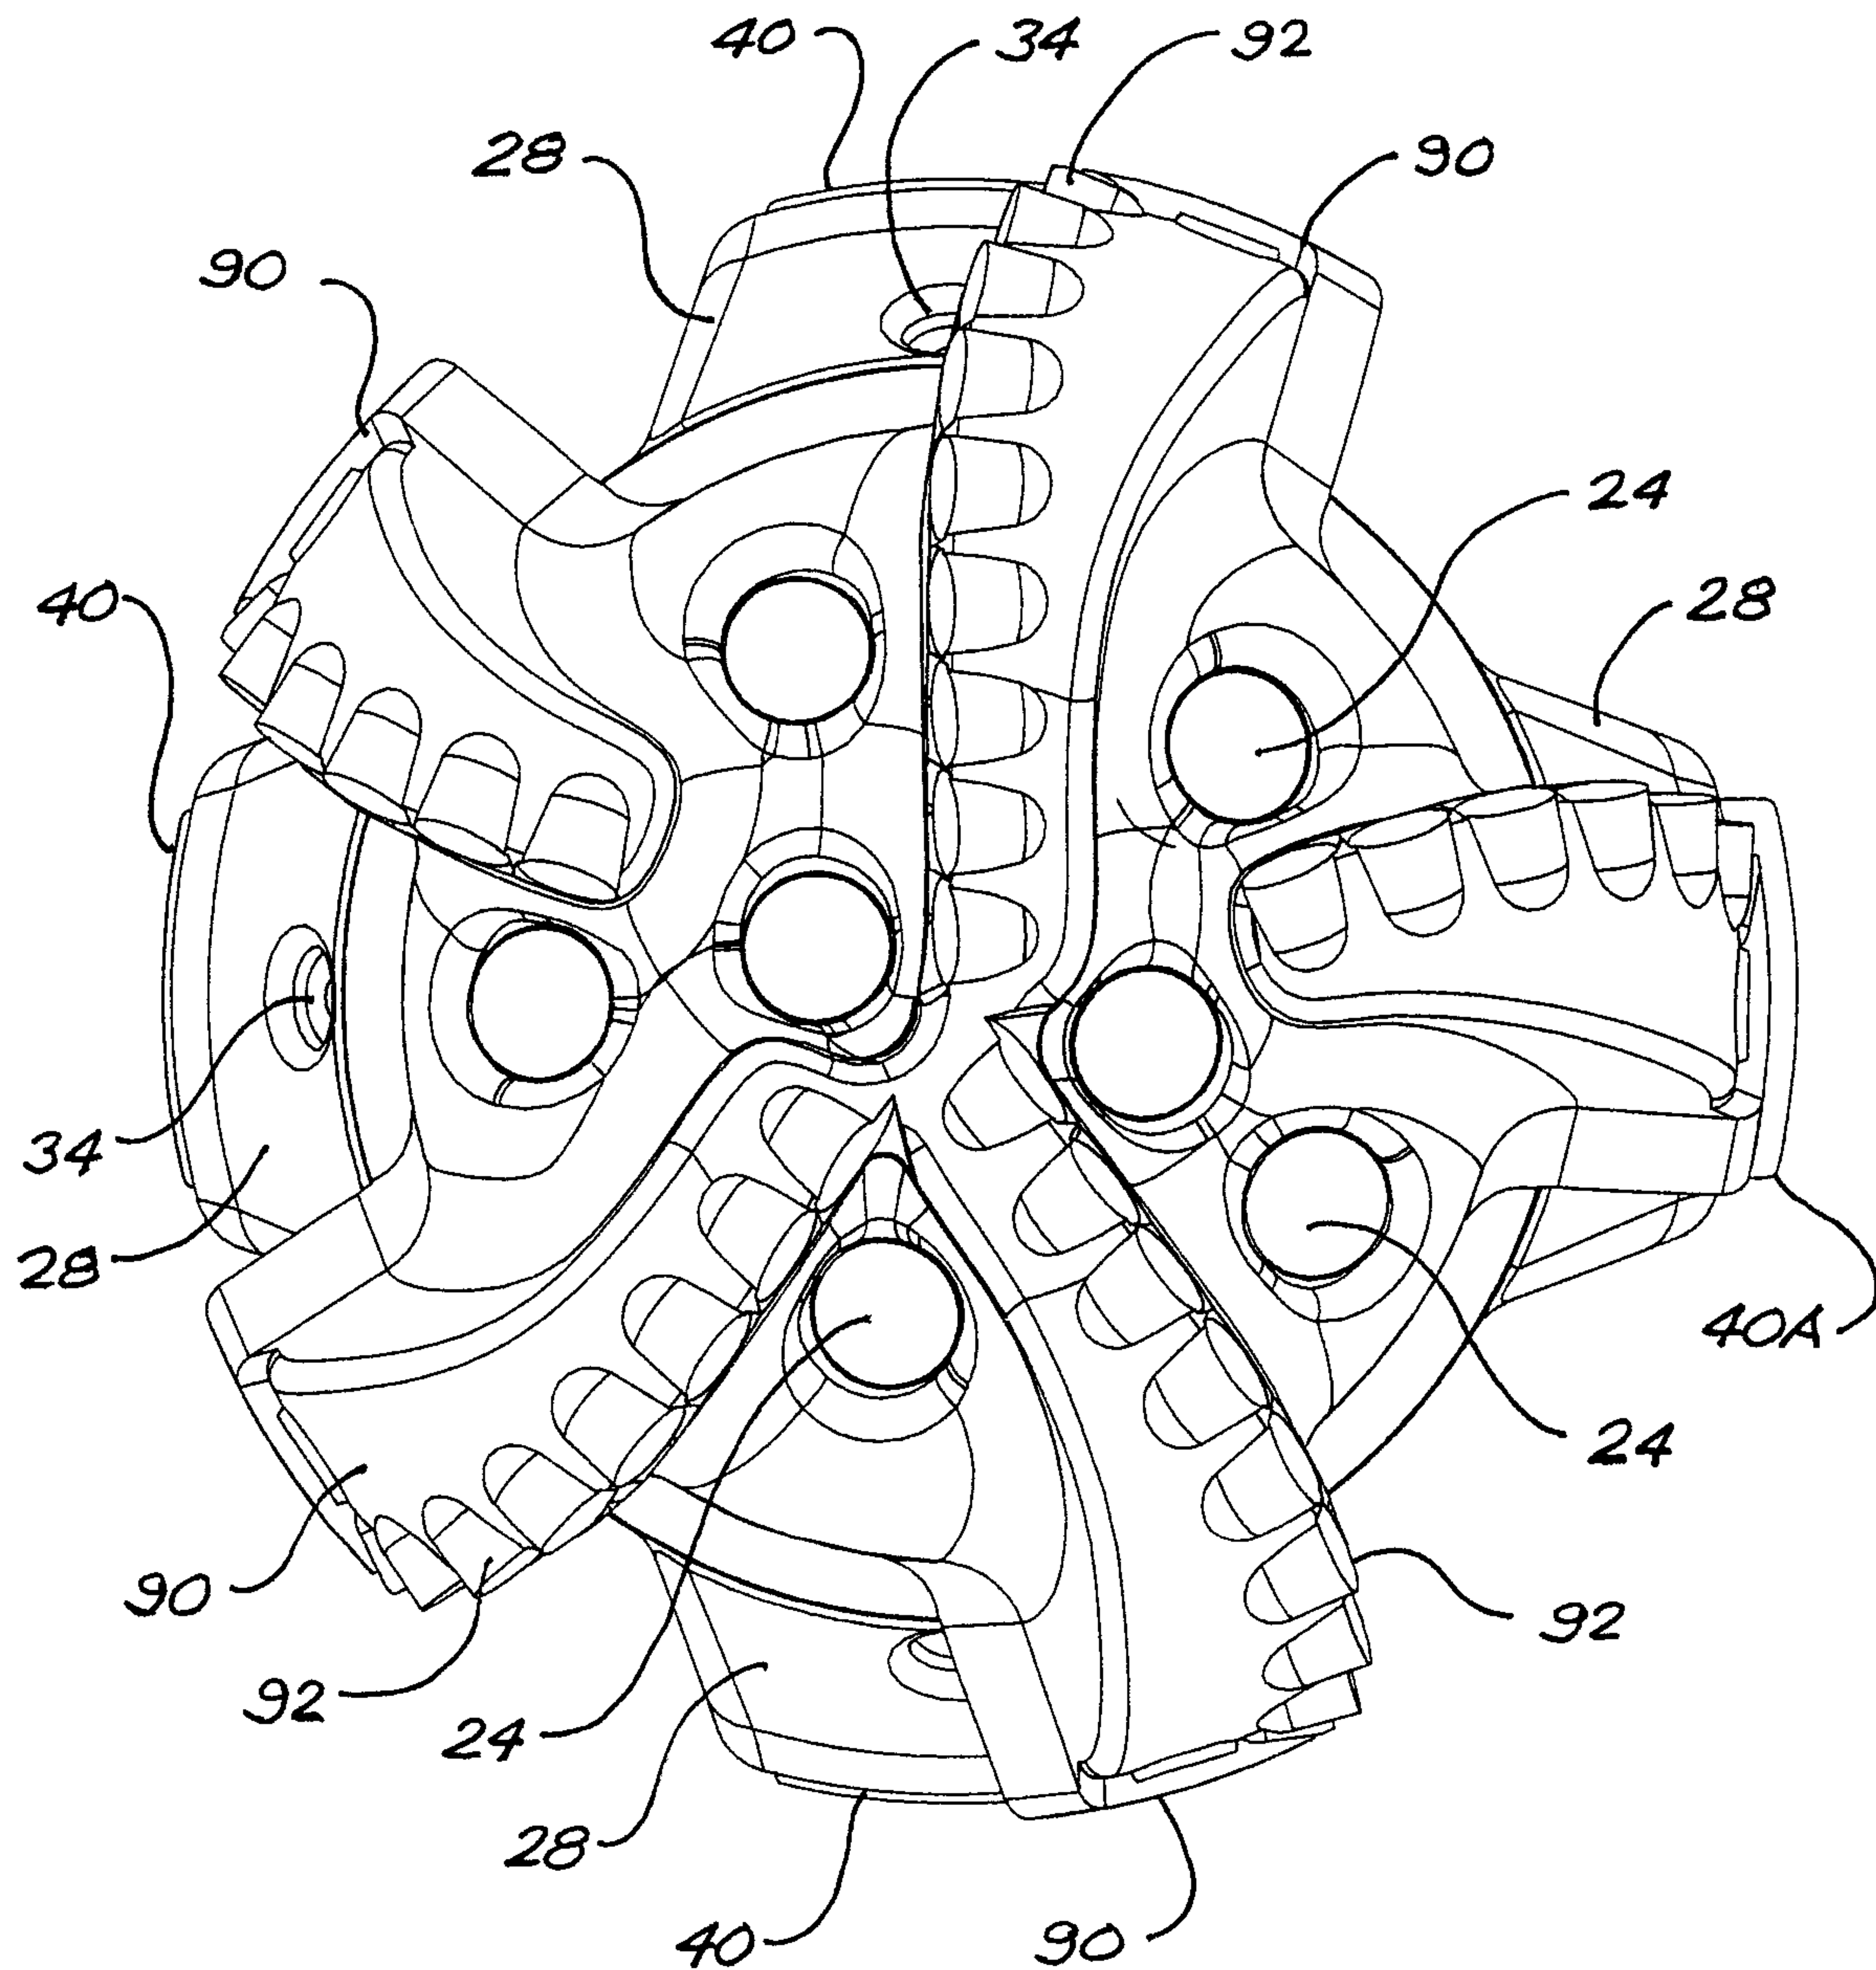


FIG. 7

10 / 23






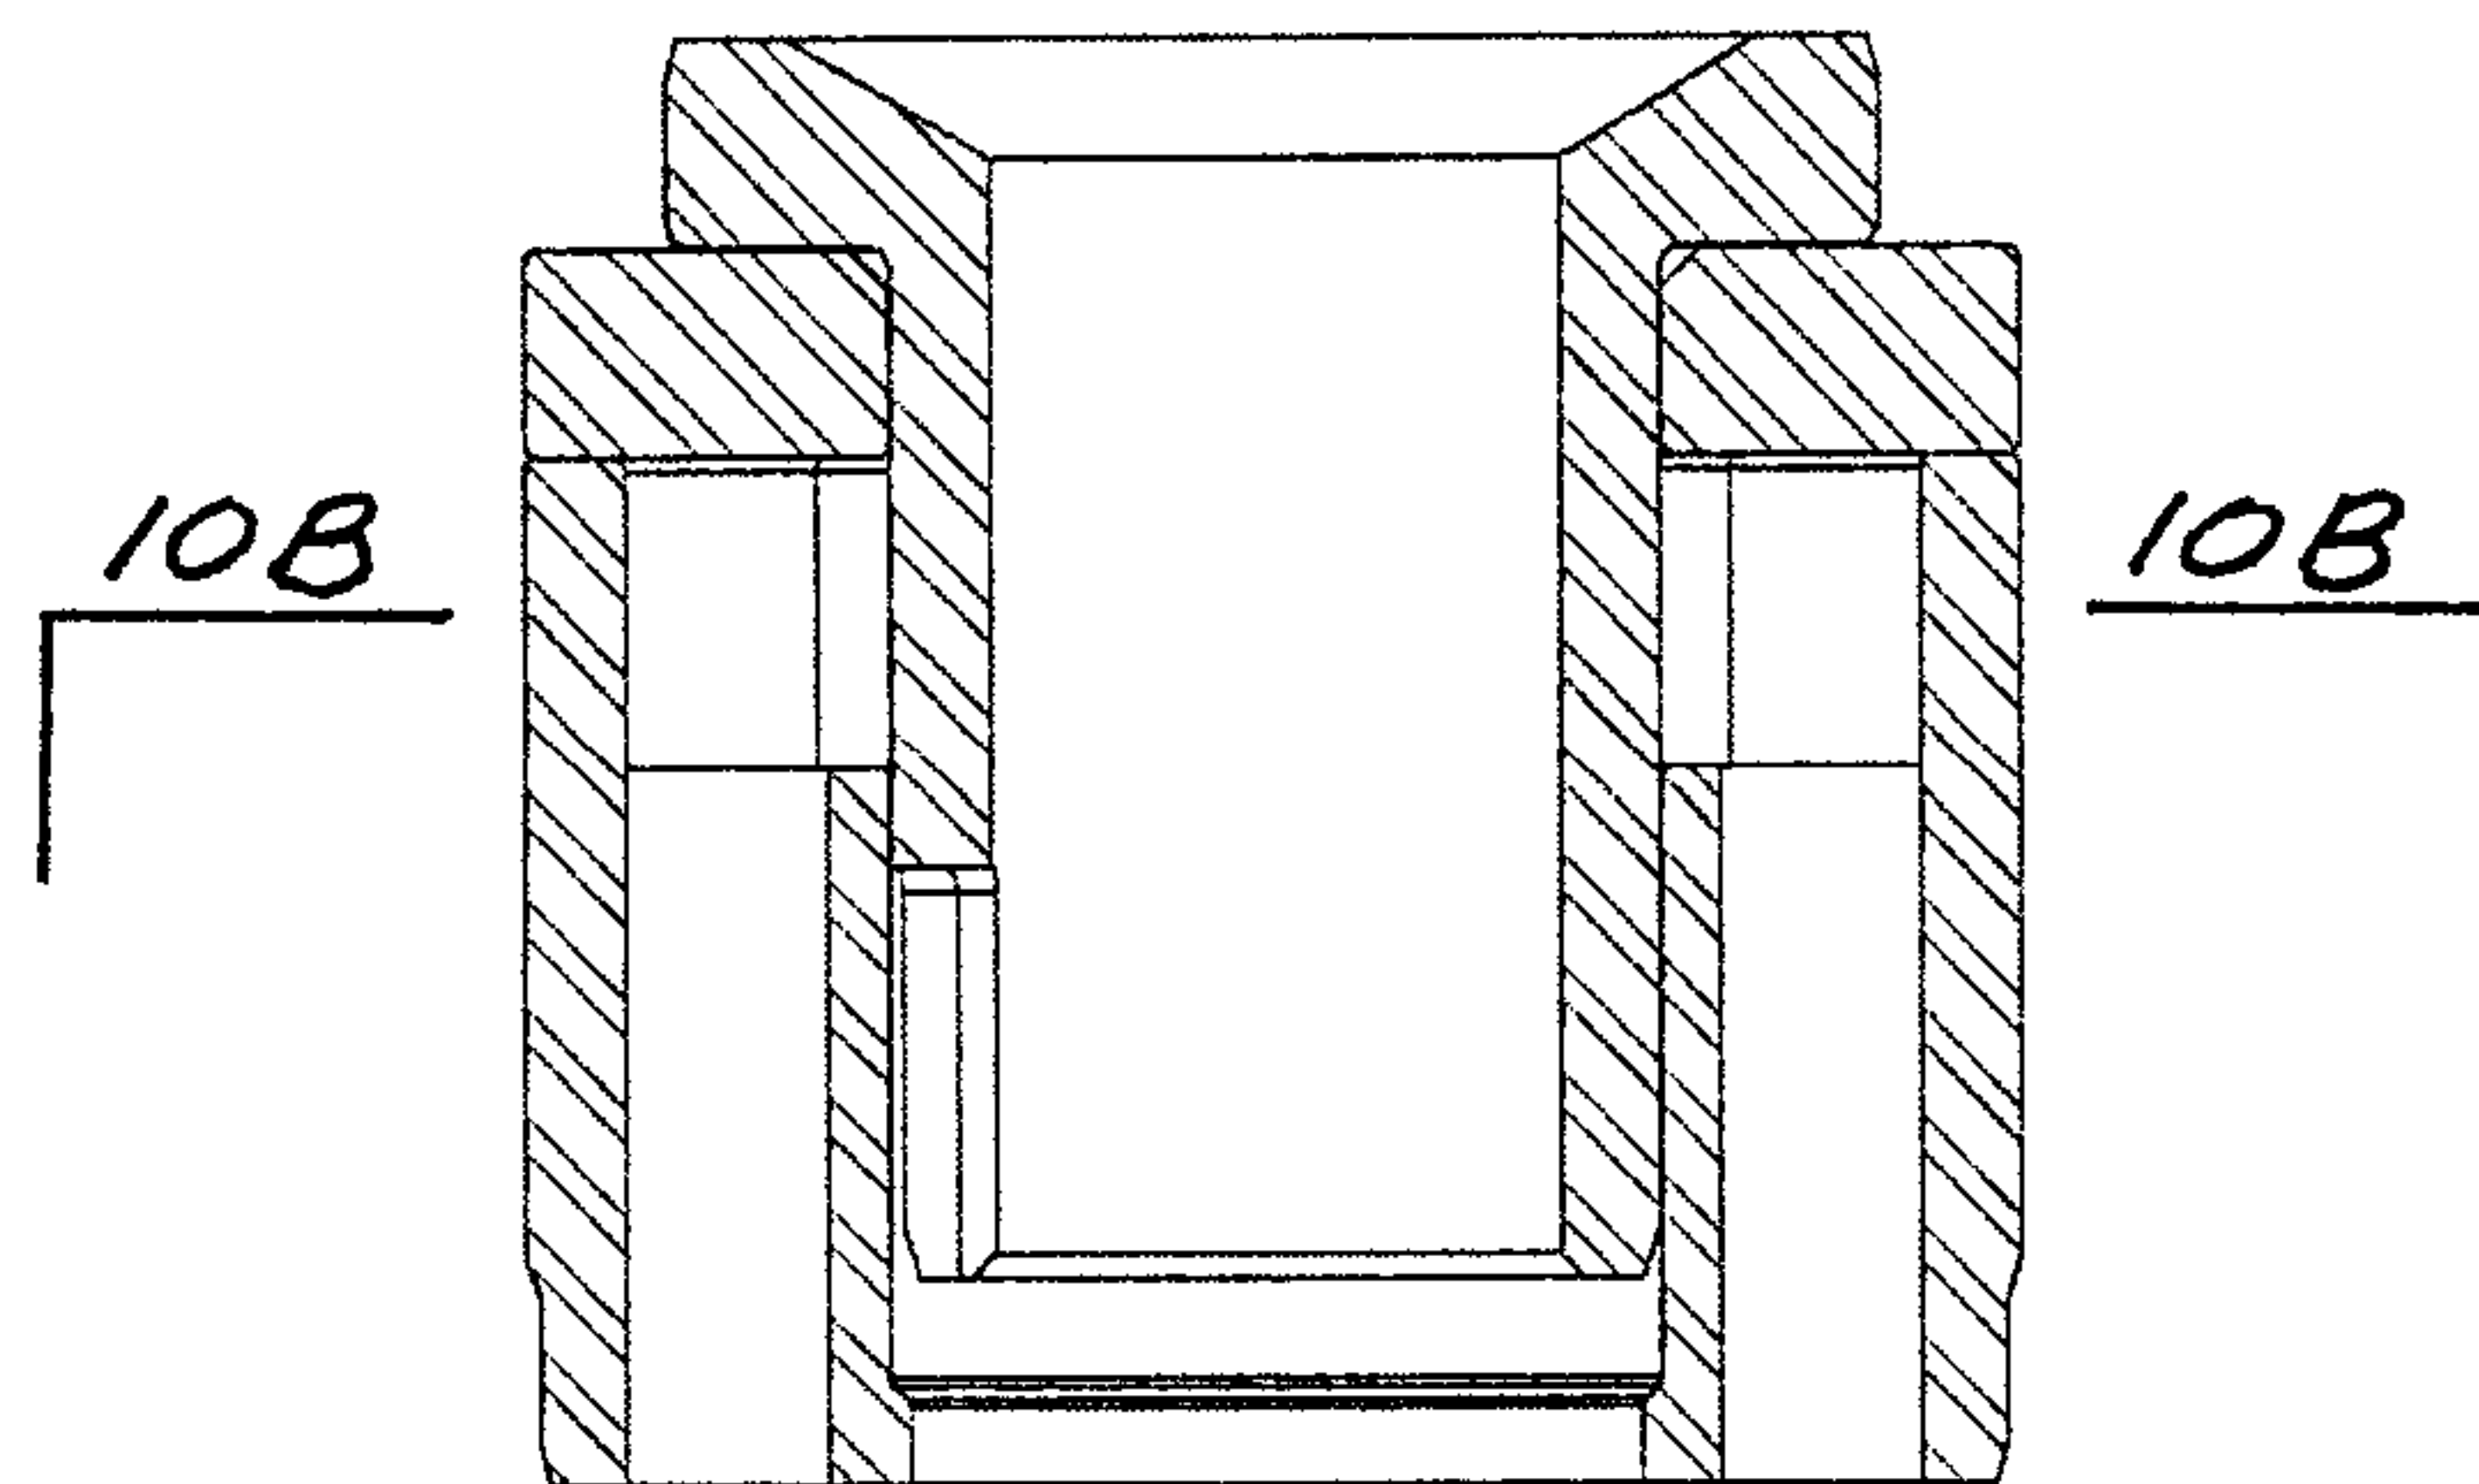


FIG. 10A

11 / 23

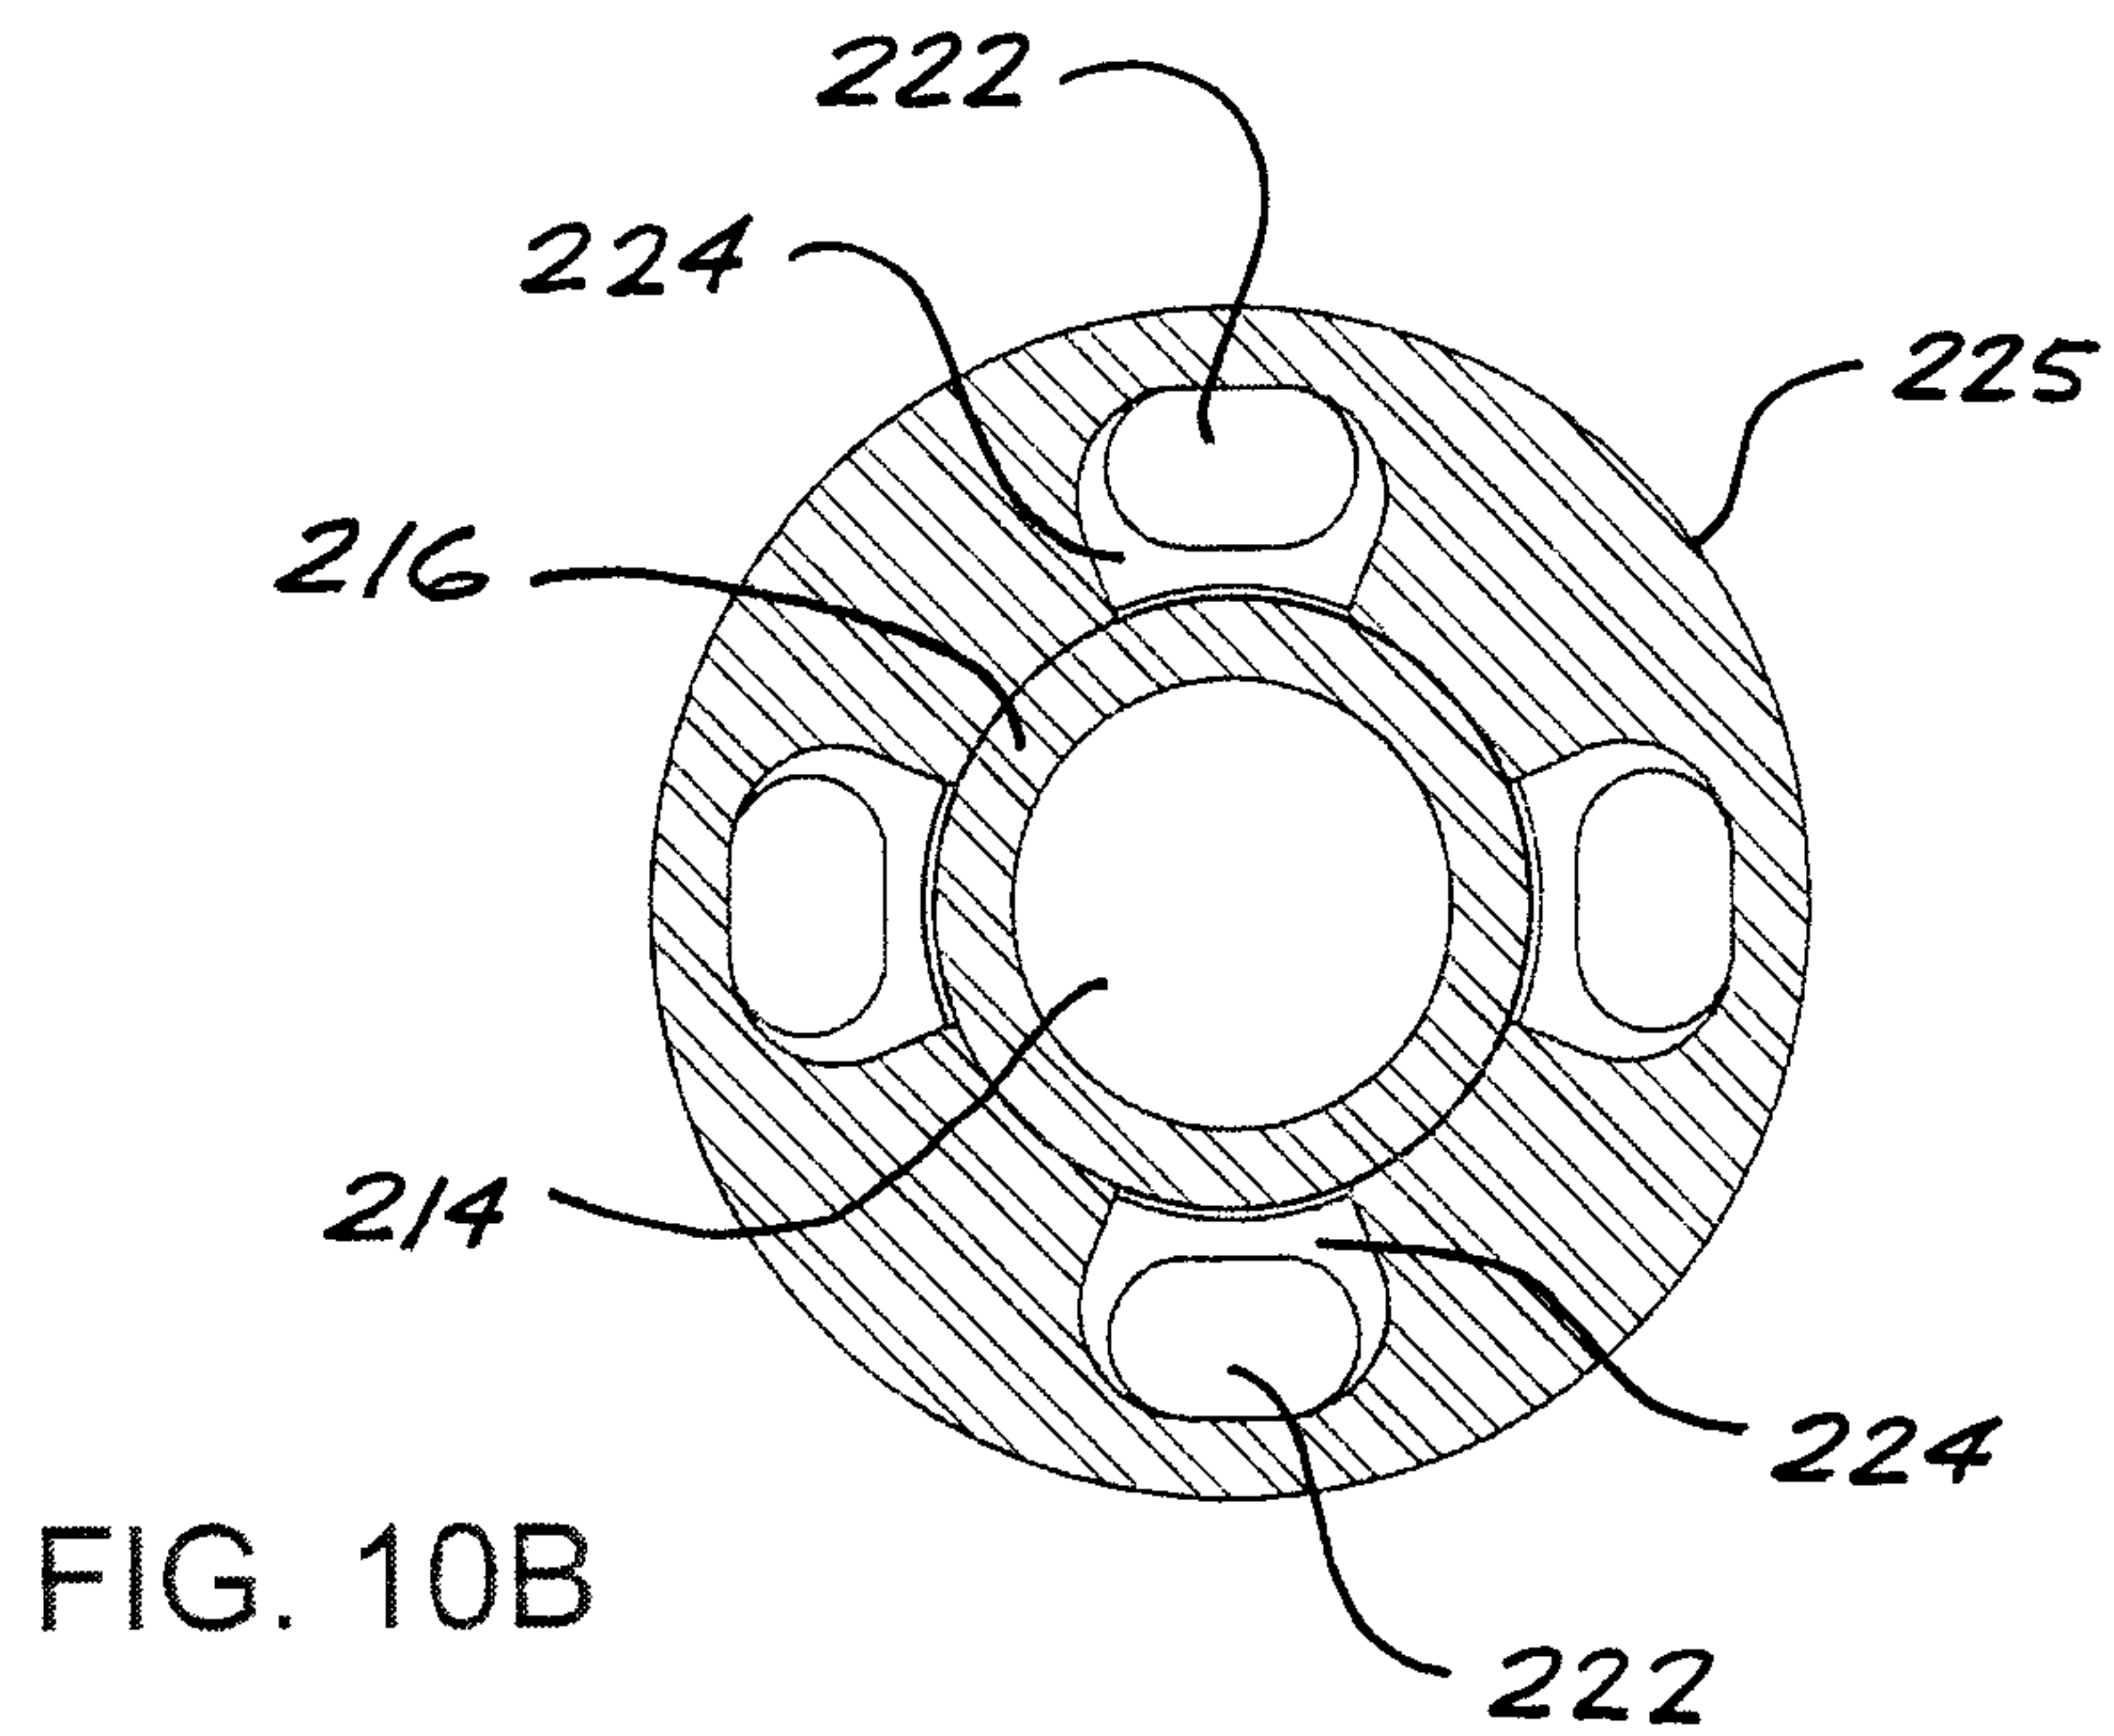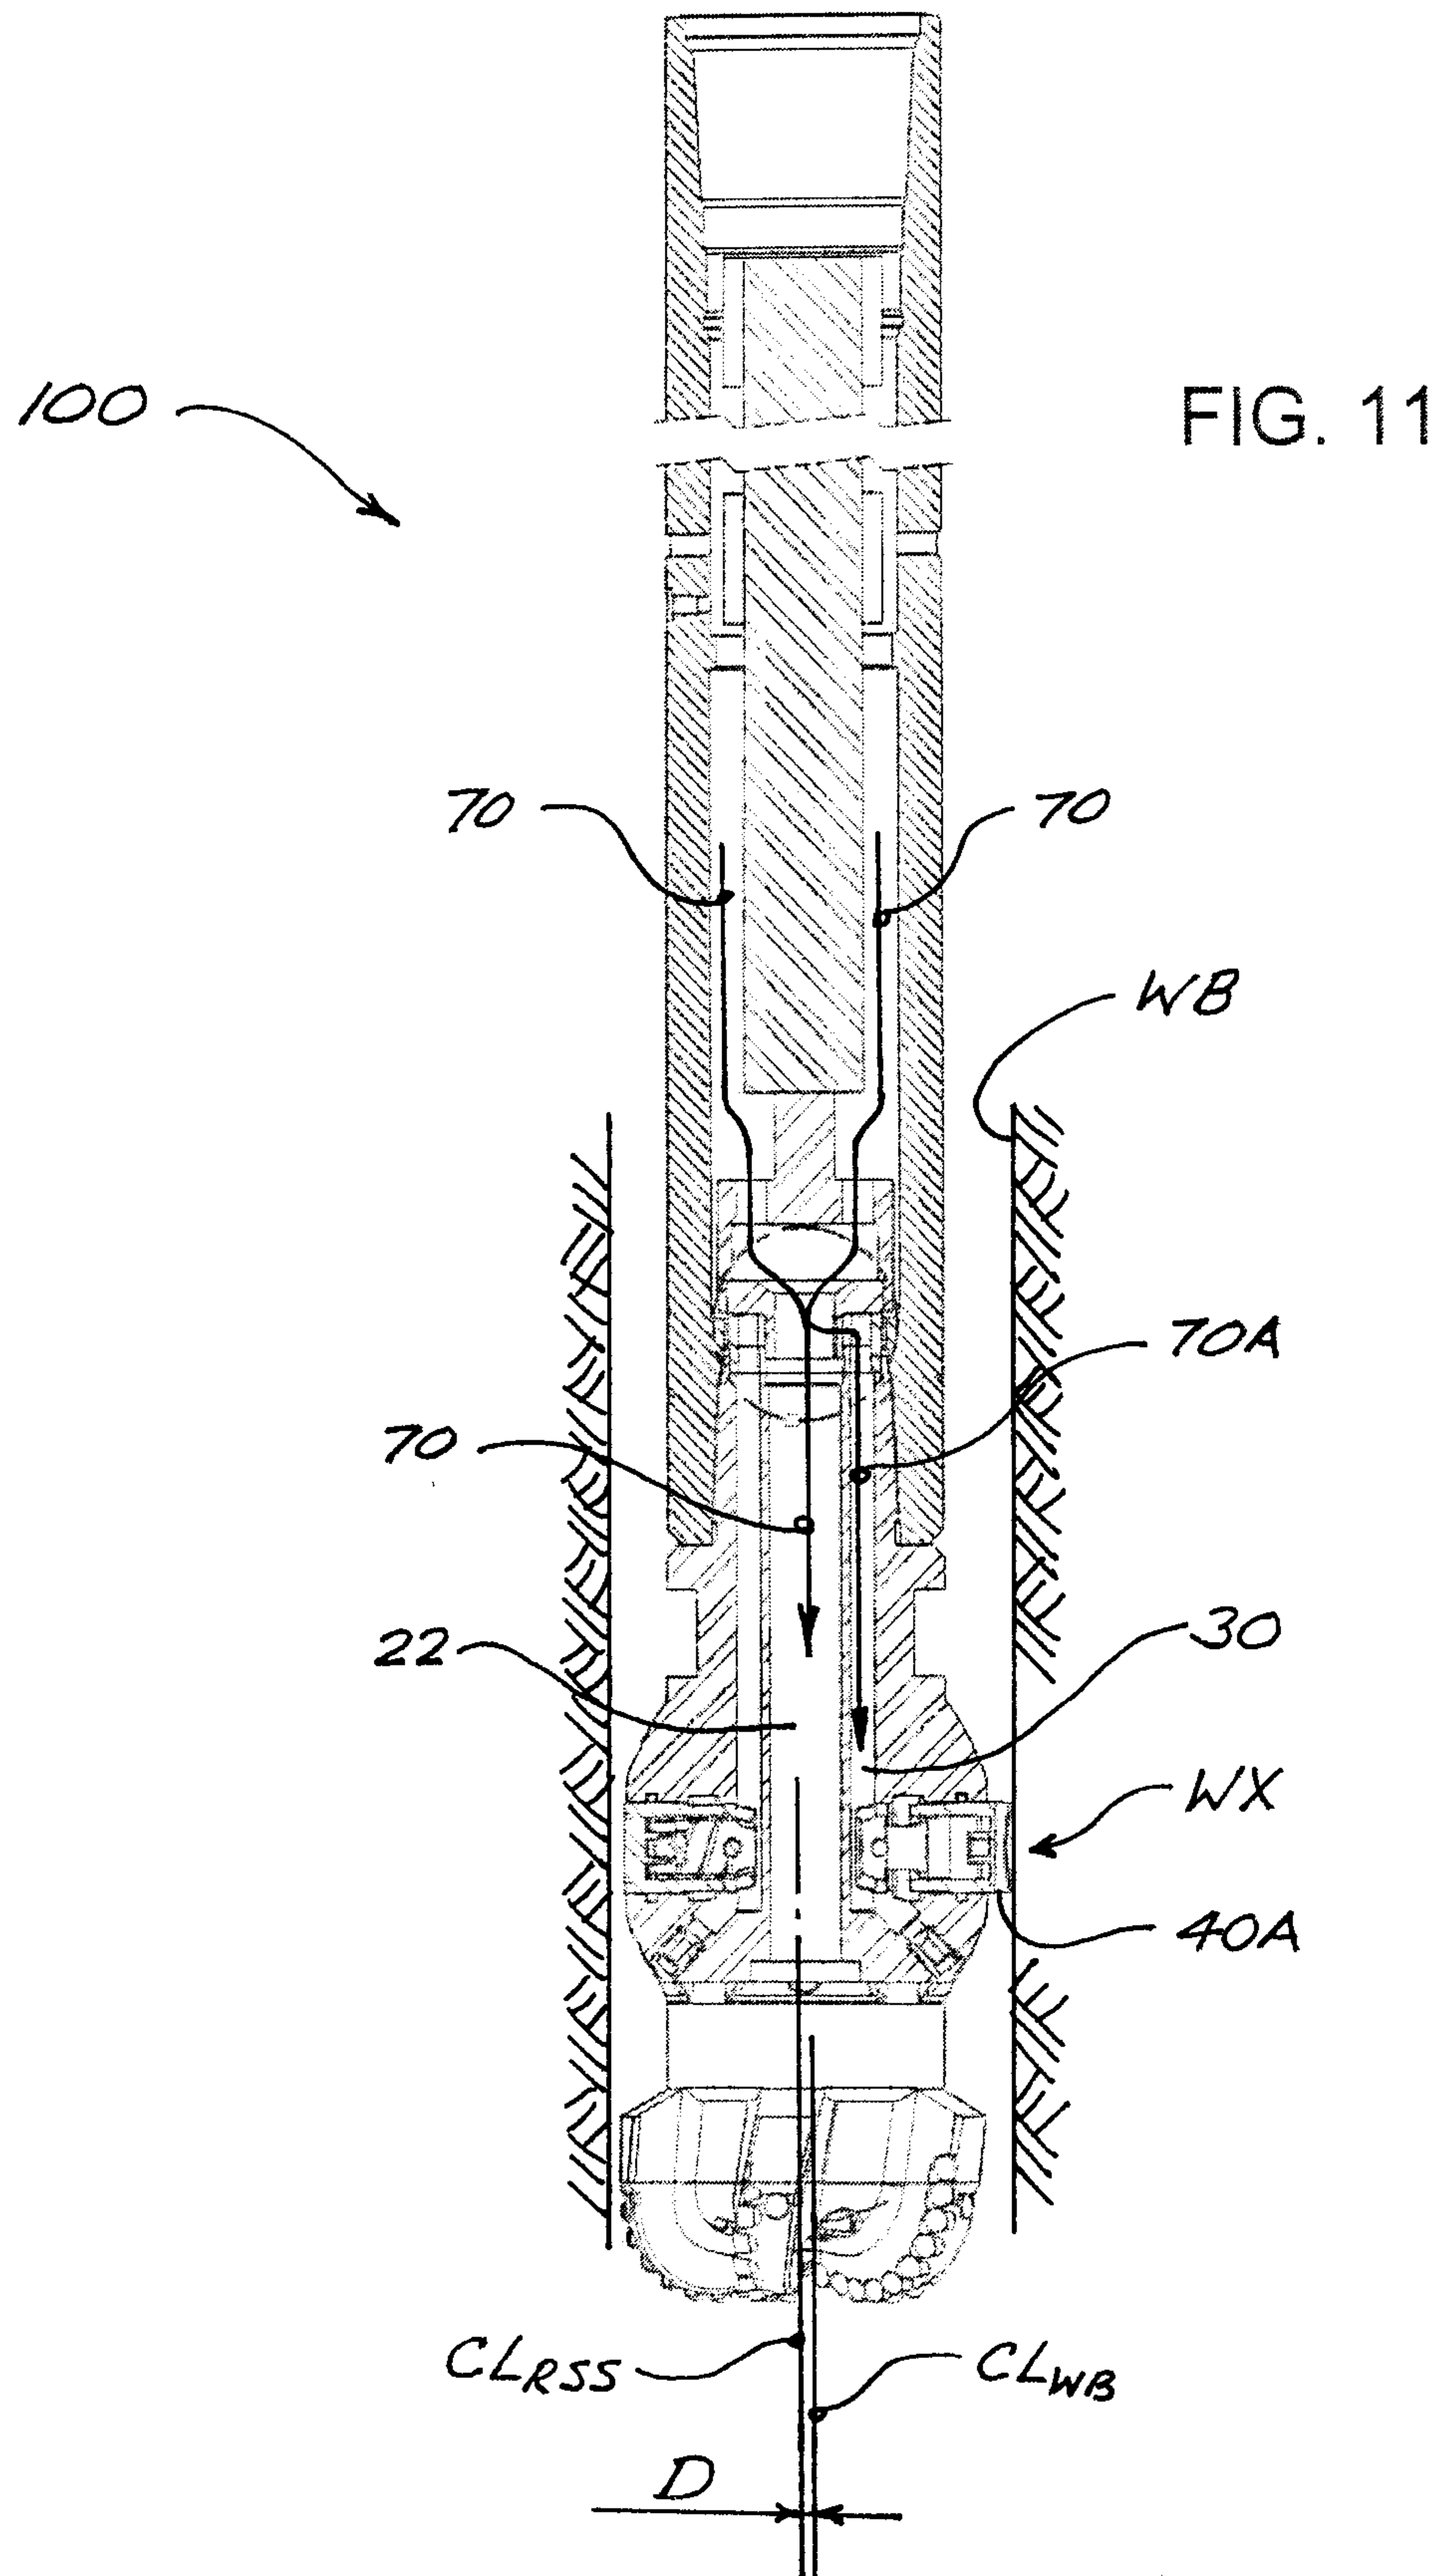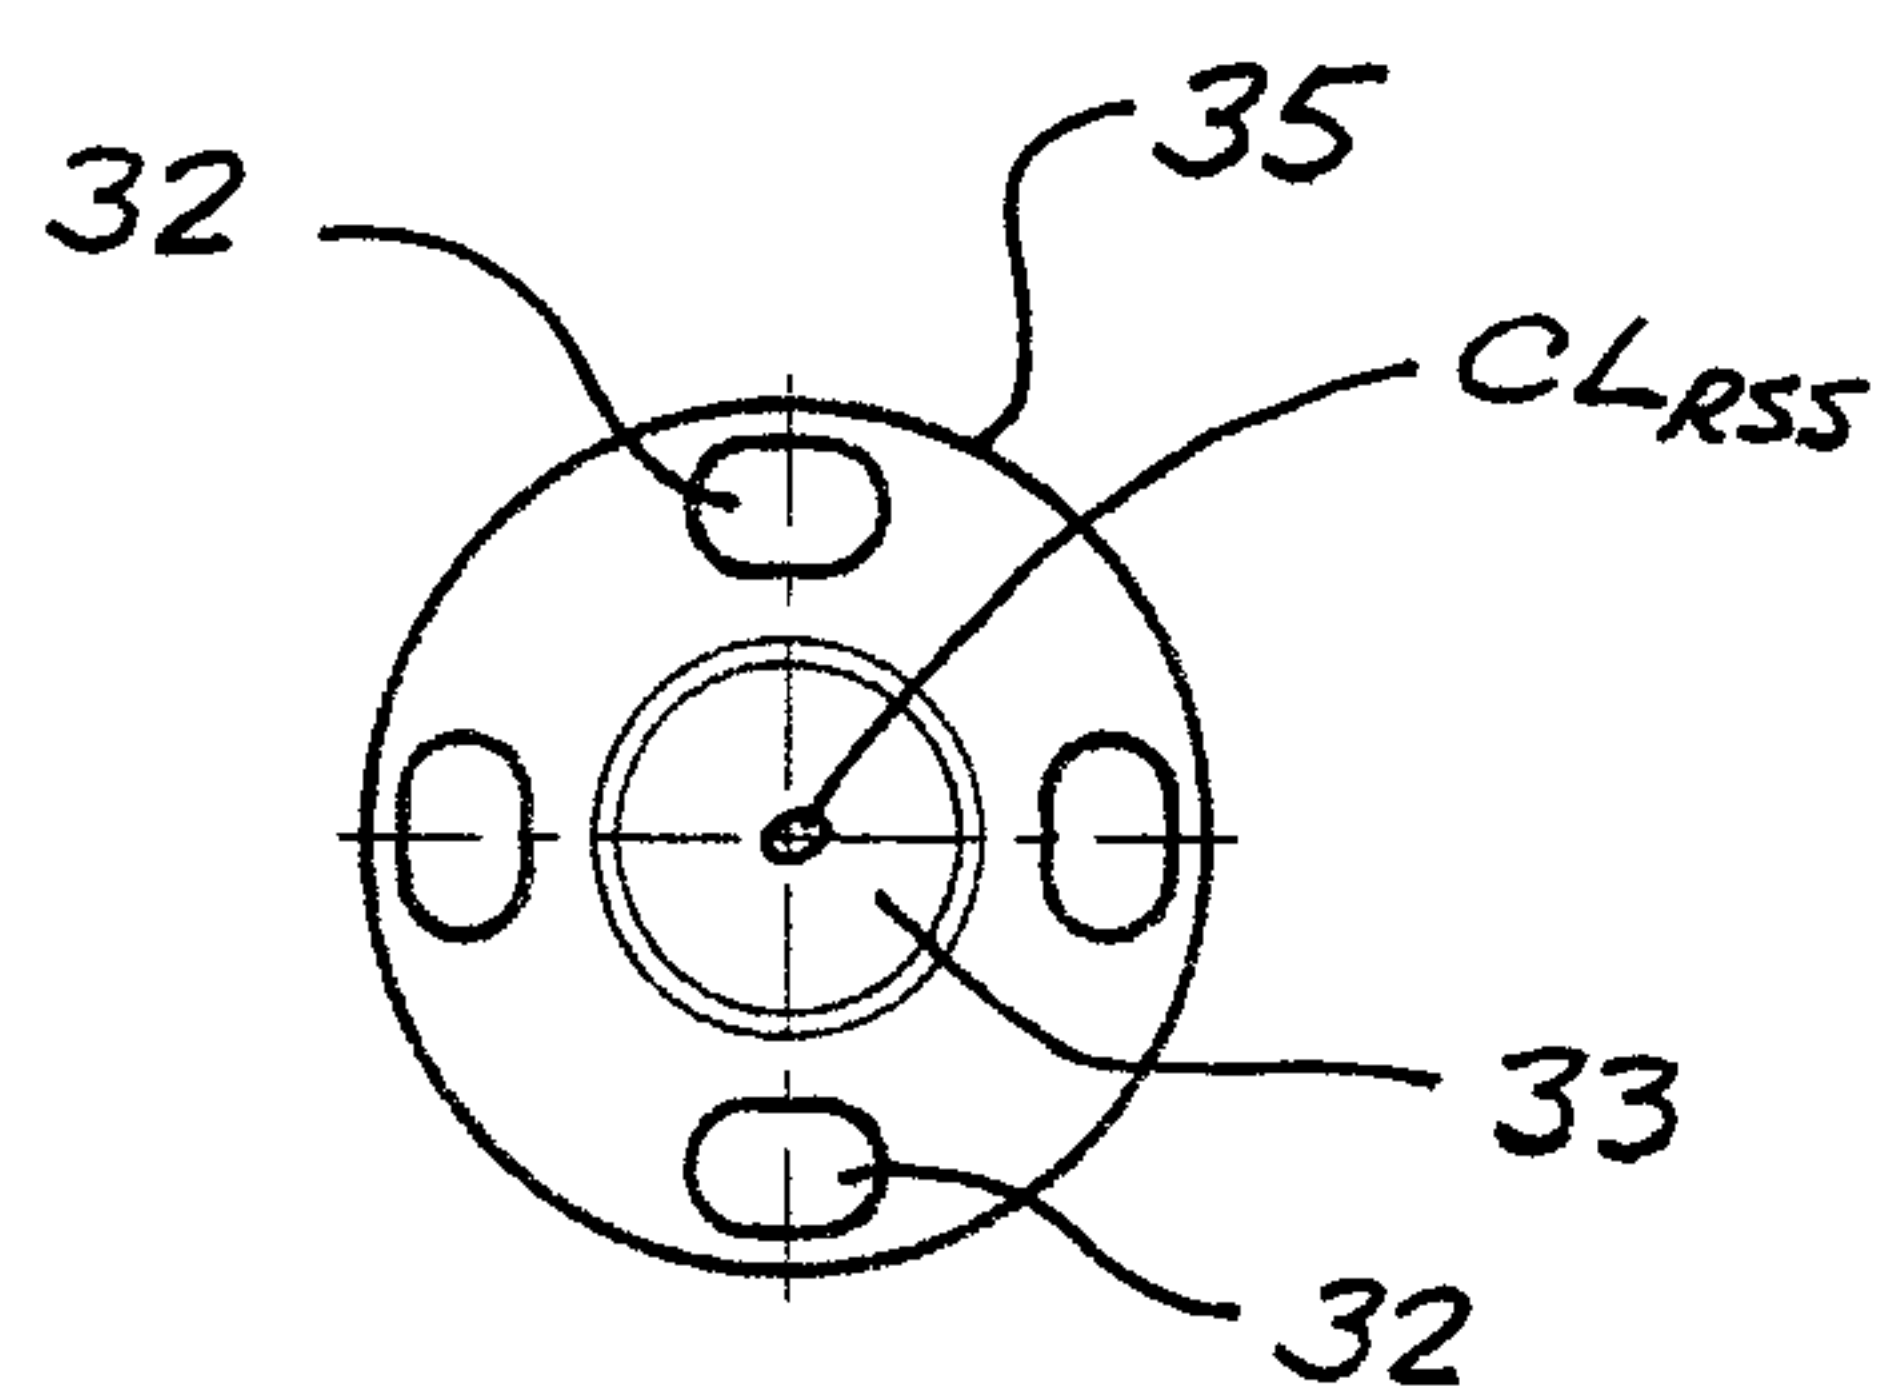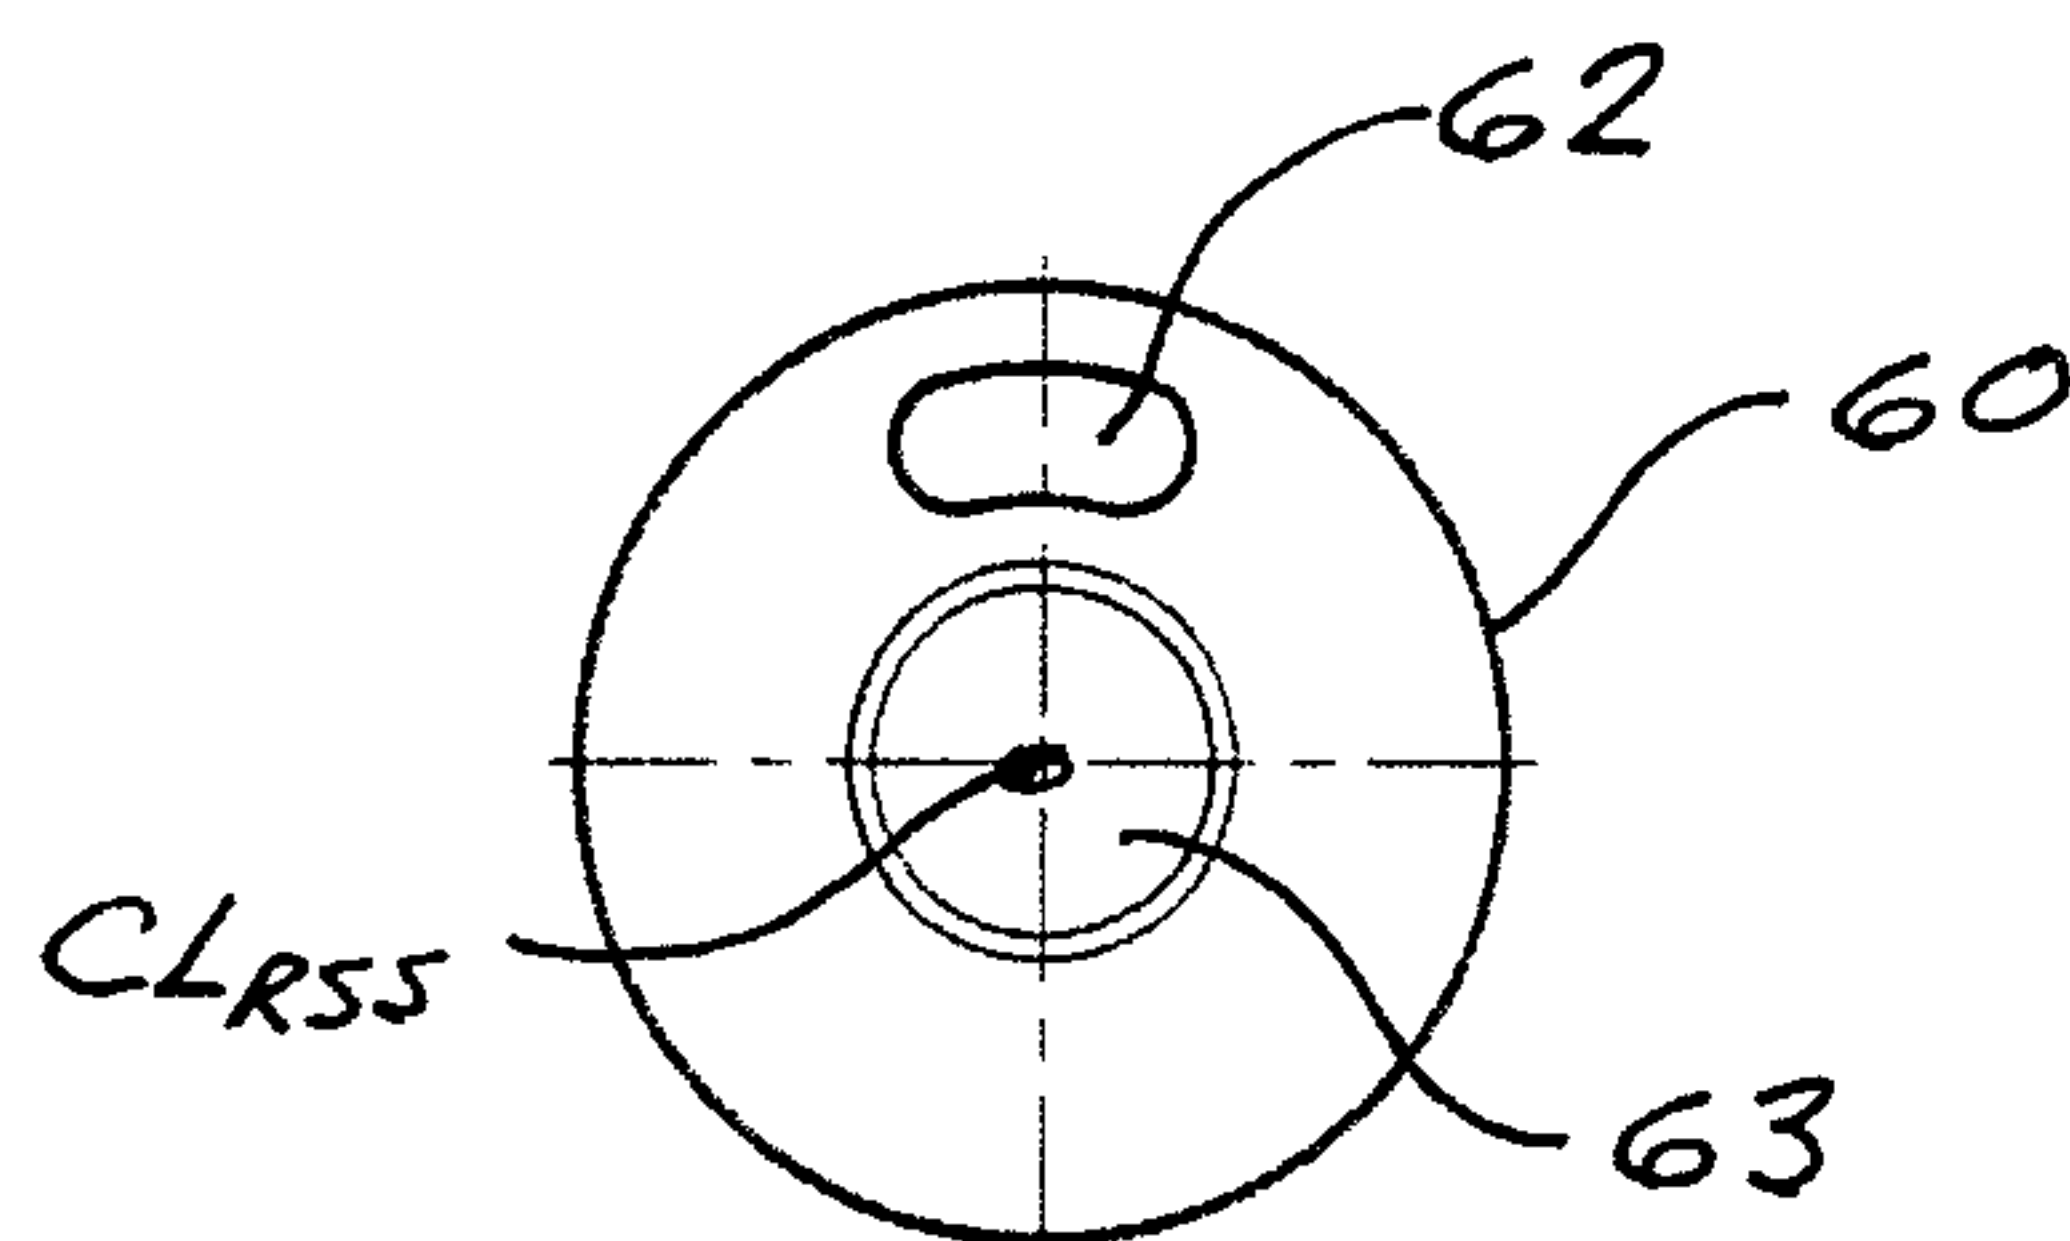

12 / 23

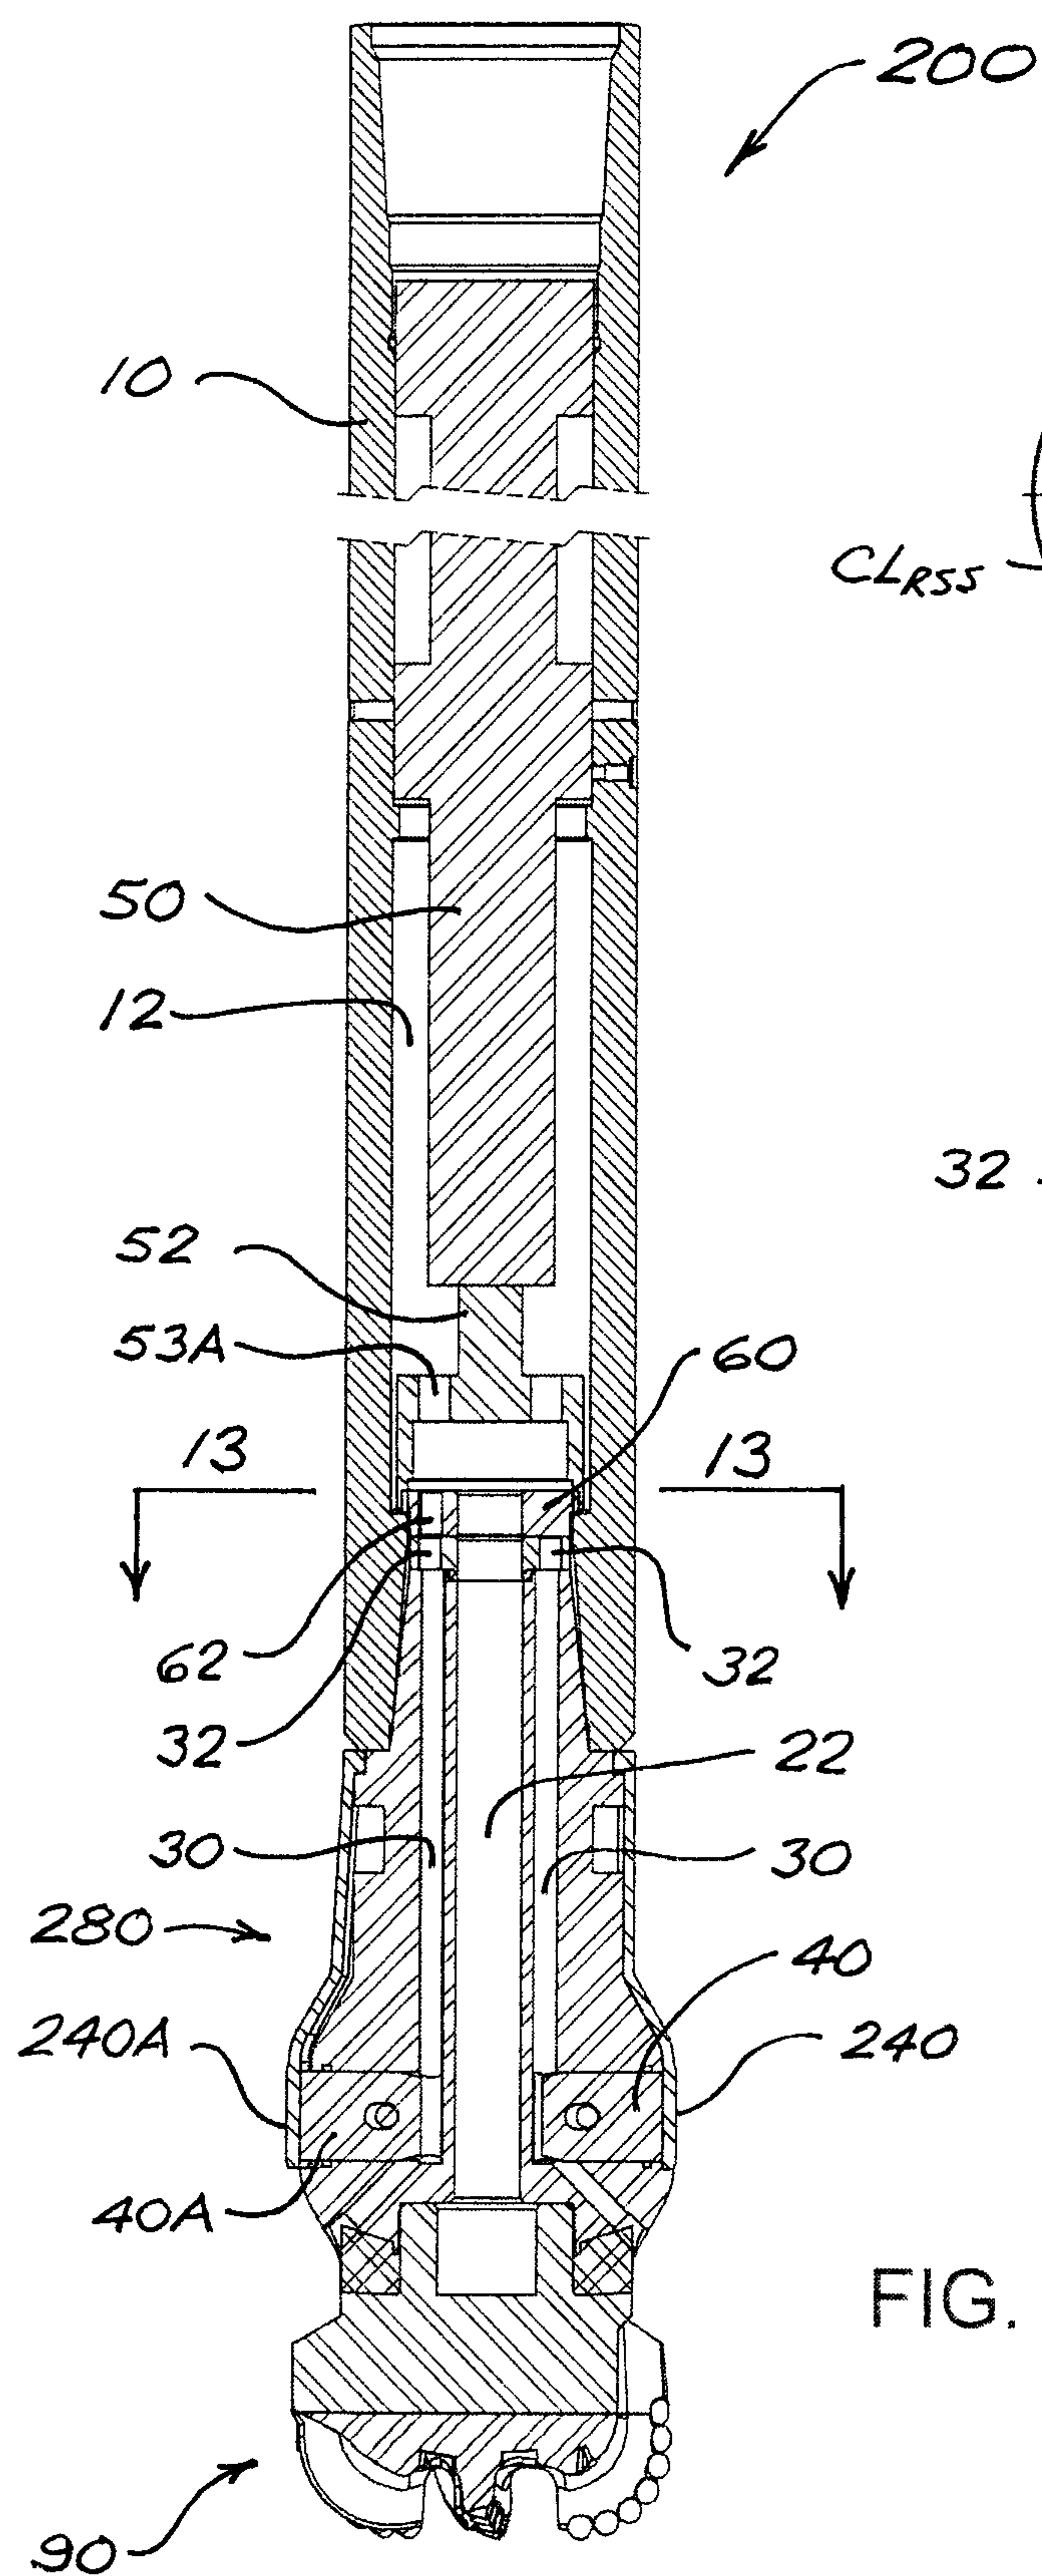

13 / 23

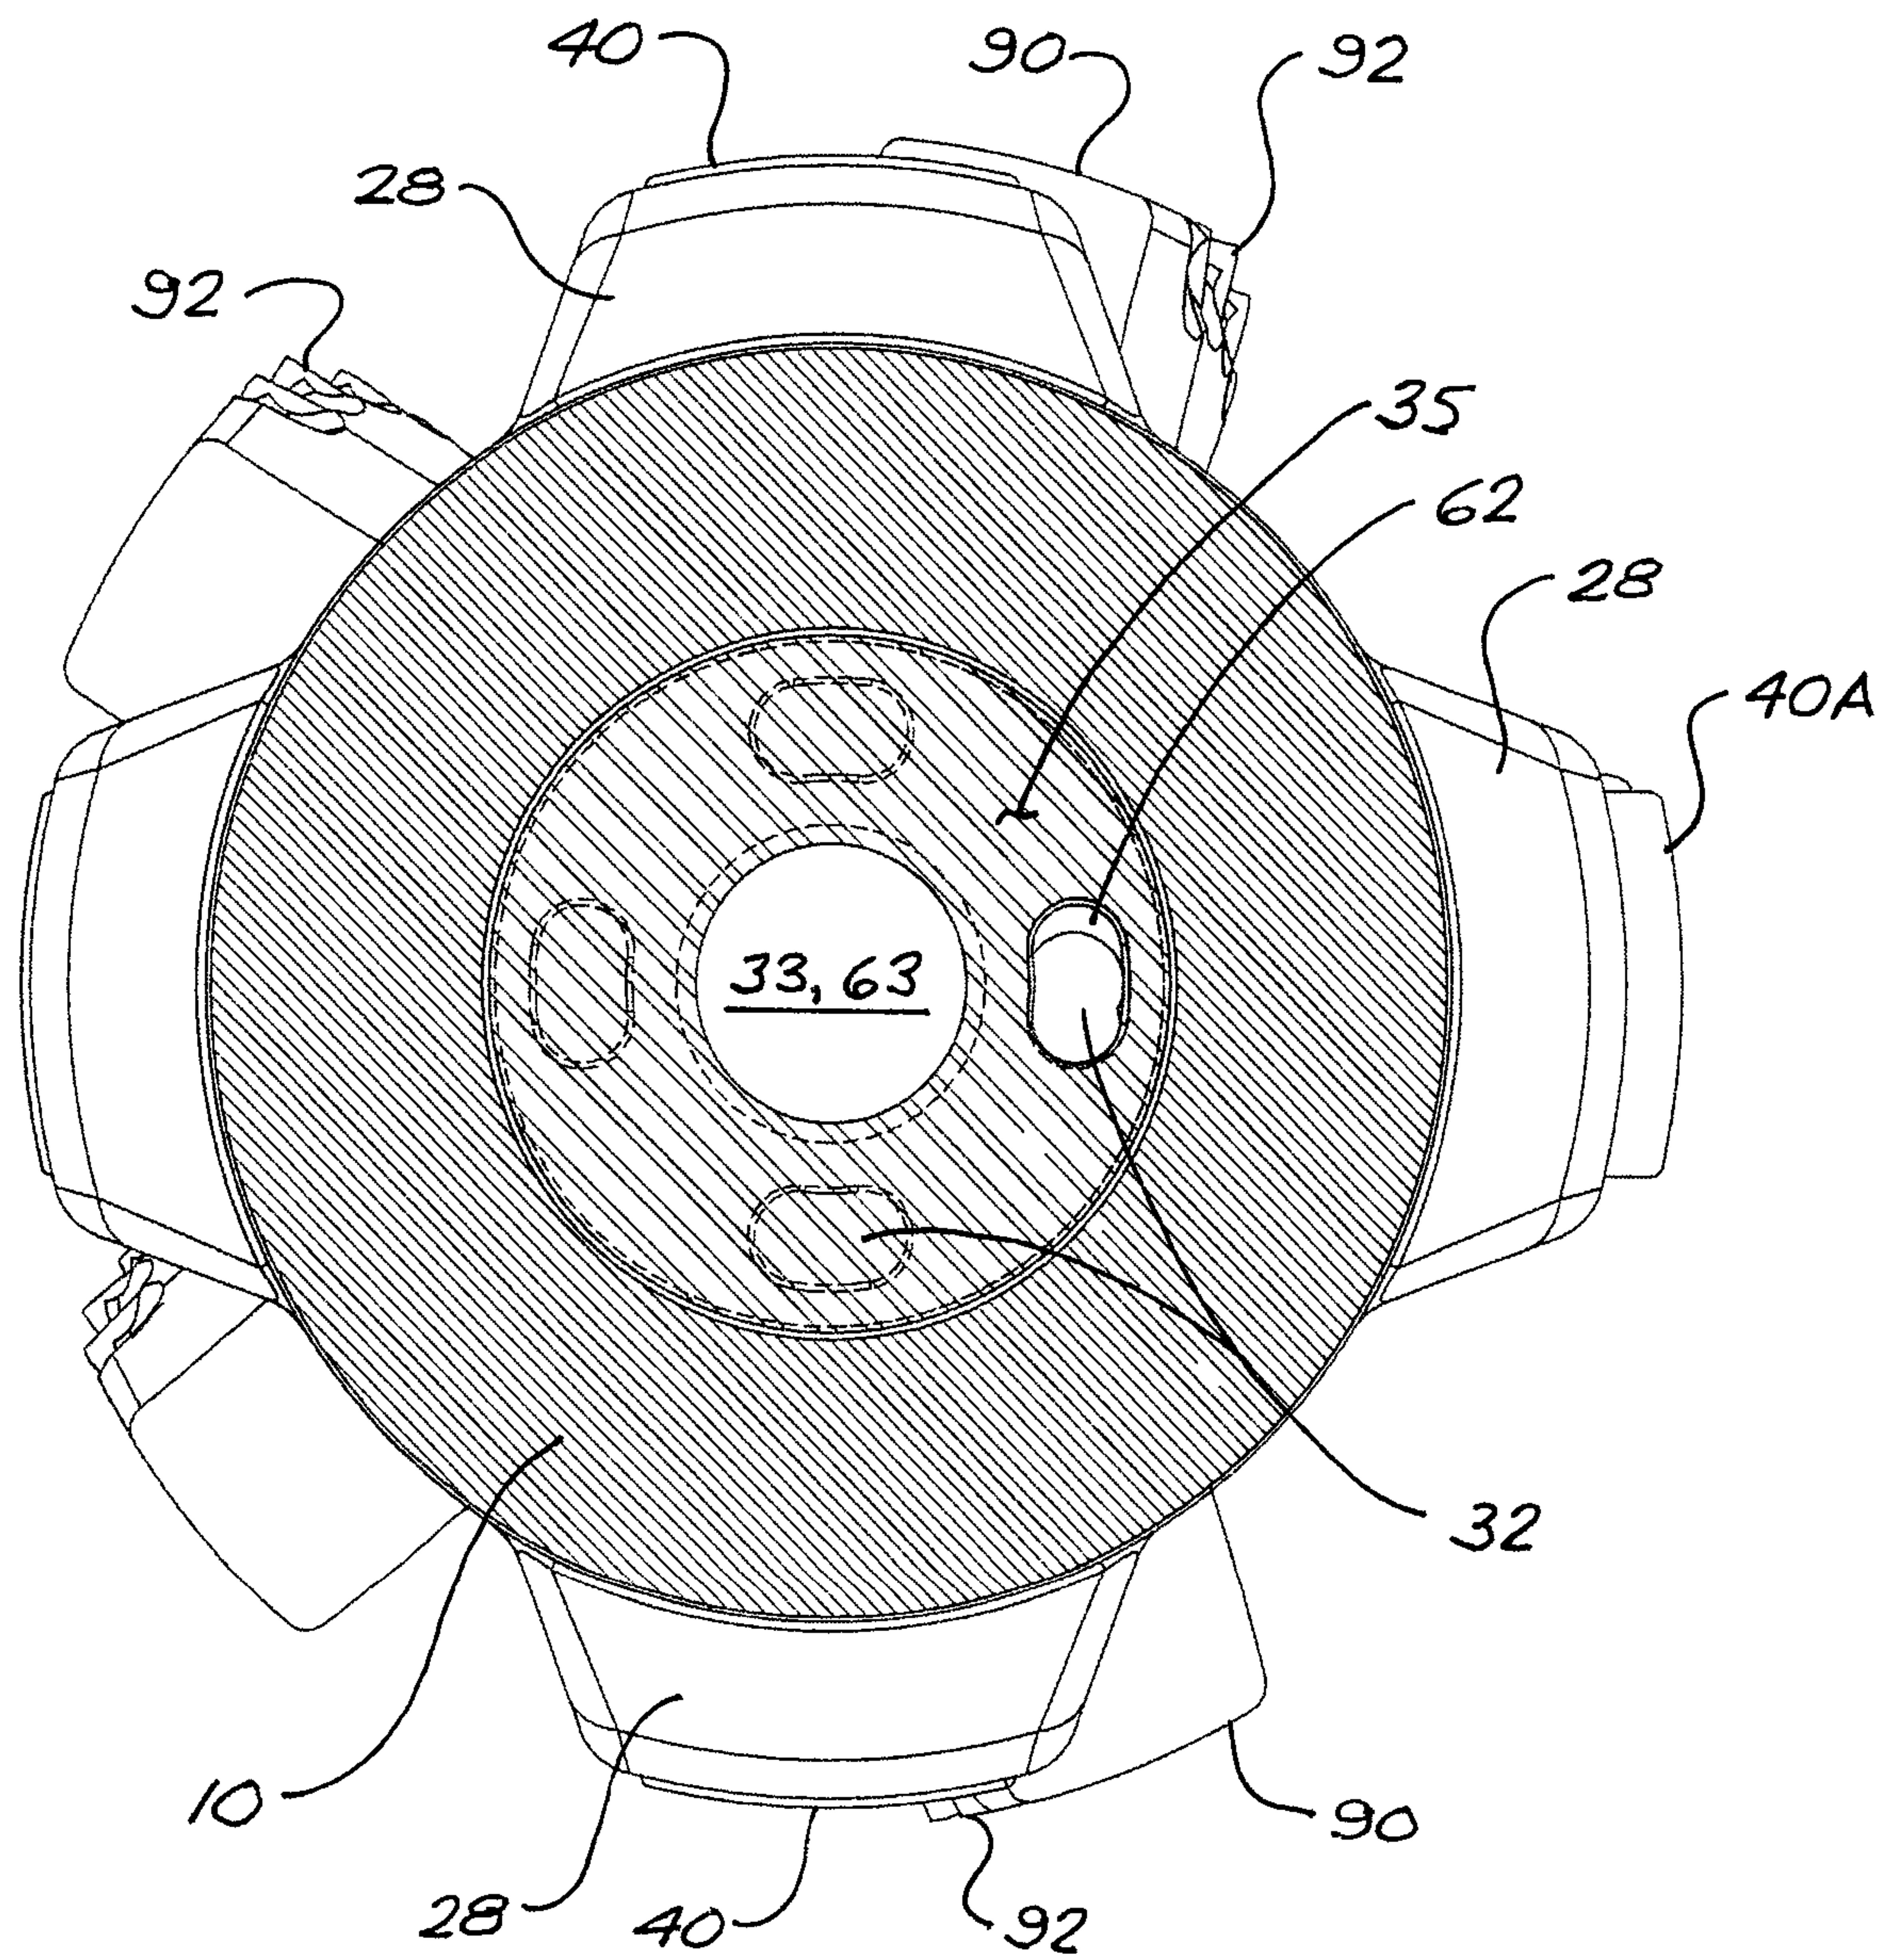


FIG. 13

14 / 23

FIG. 14A


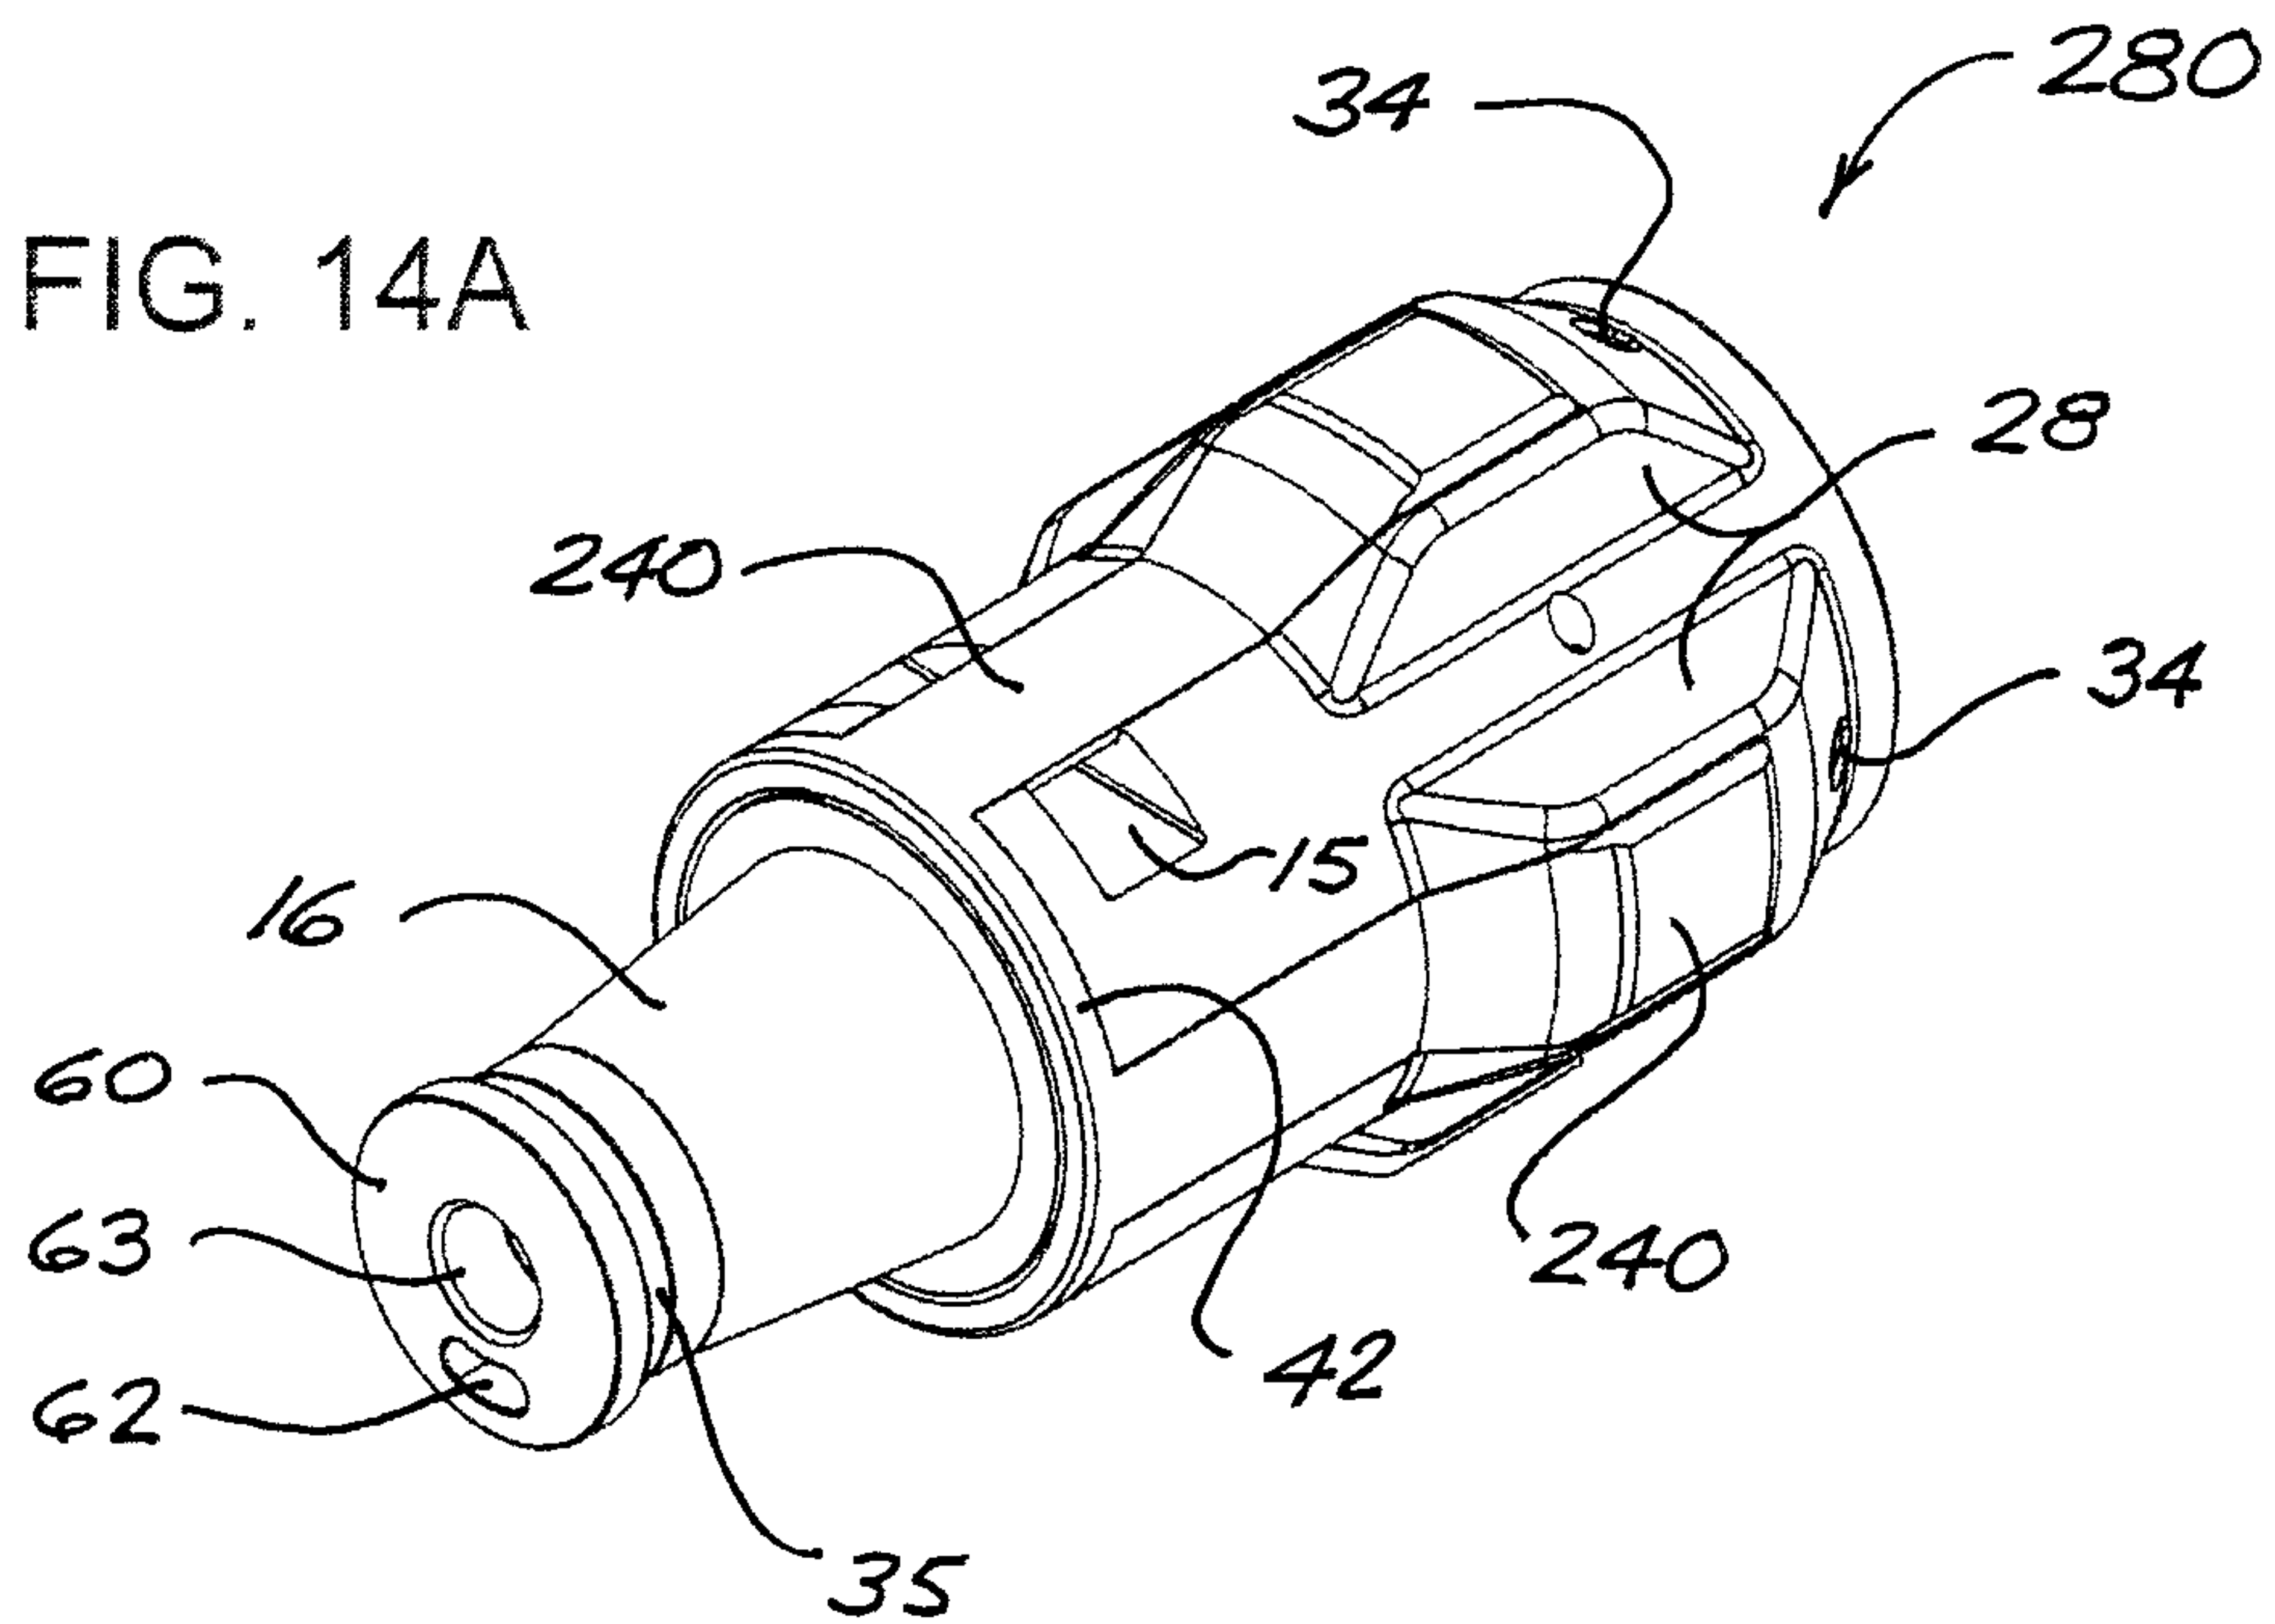


FIG. 14B

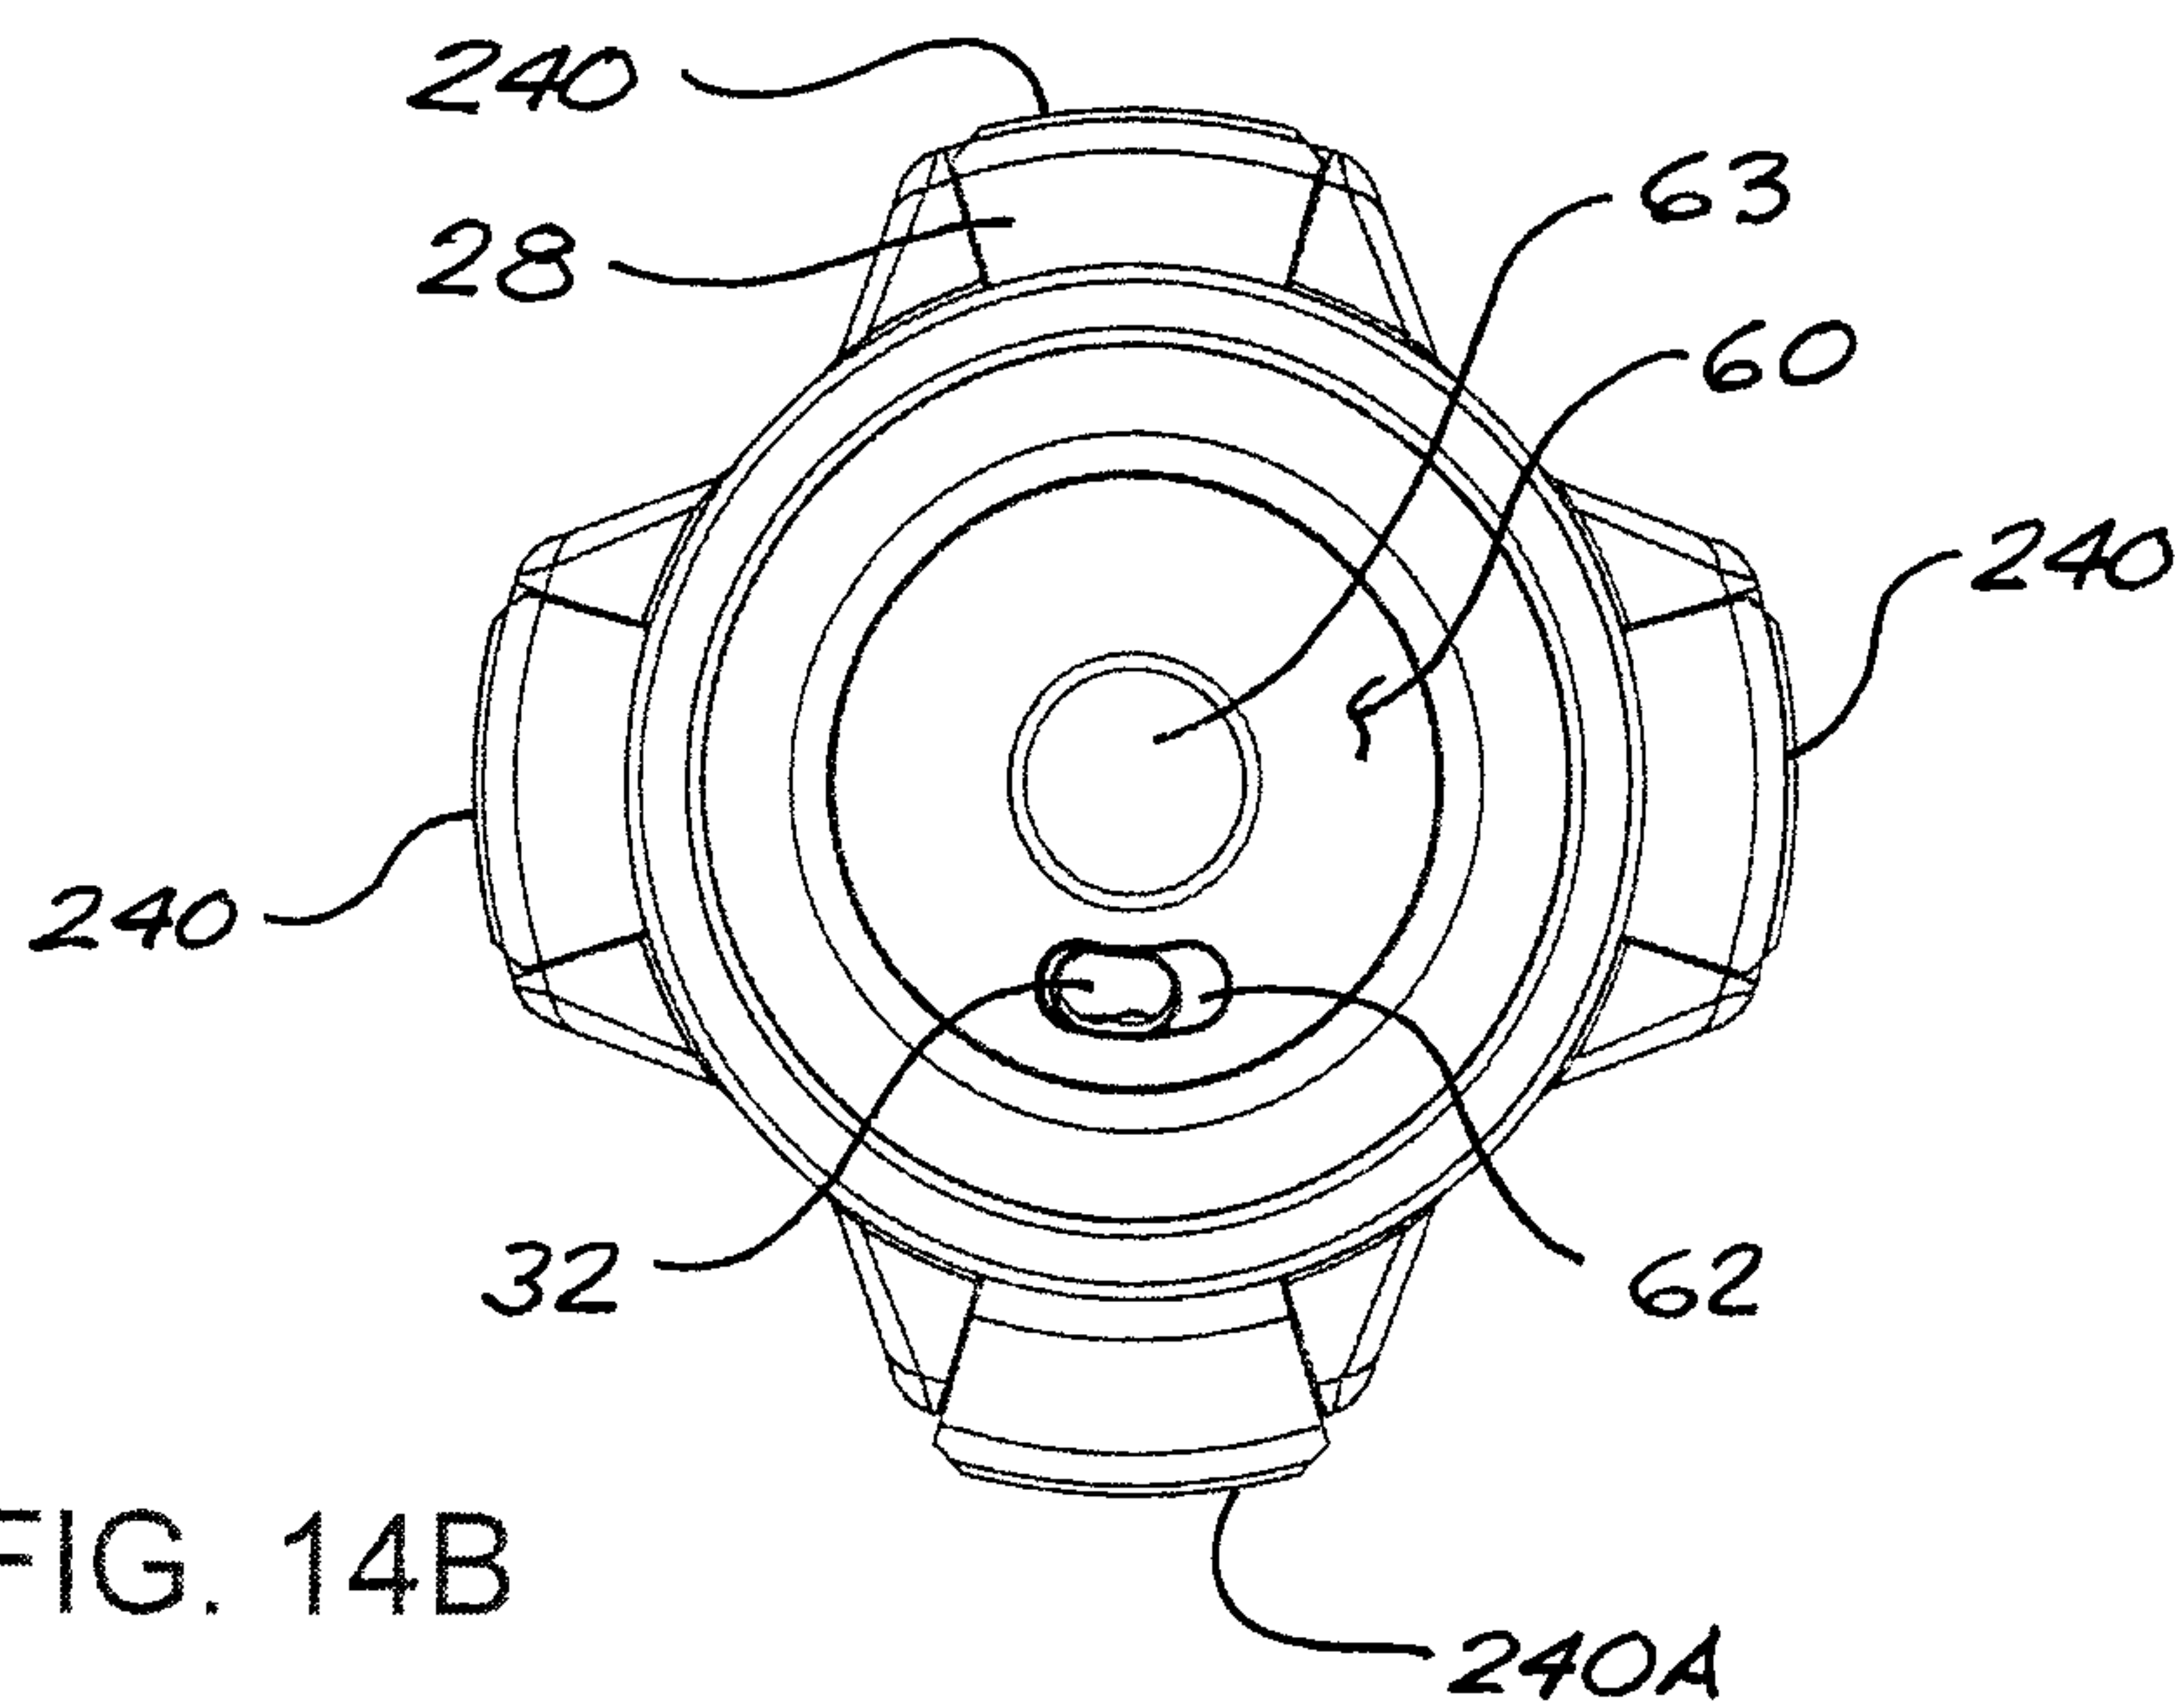

15 / 23

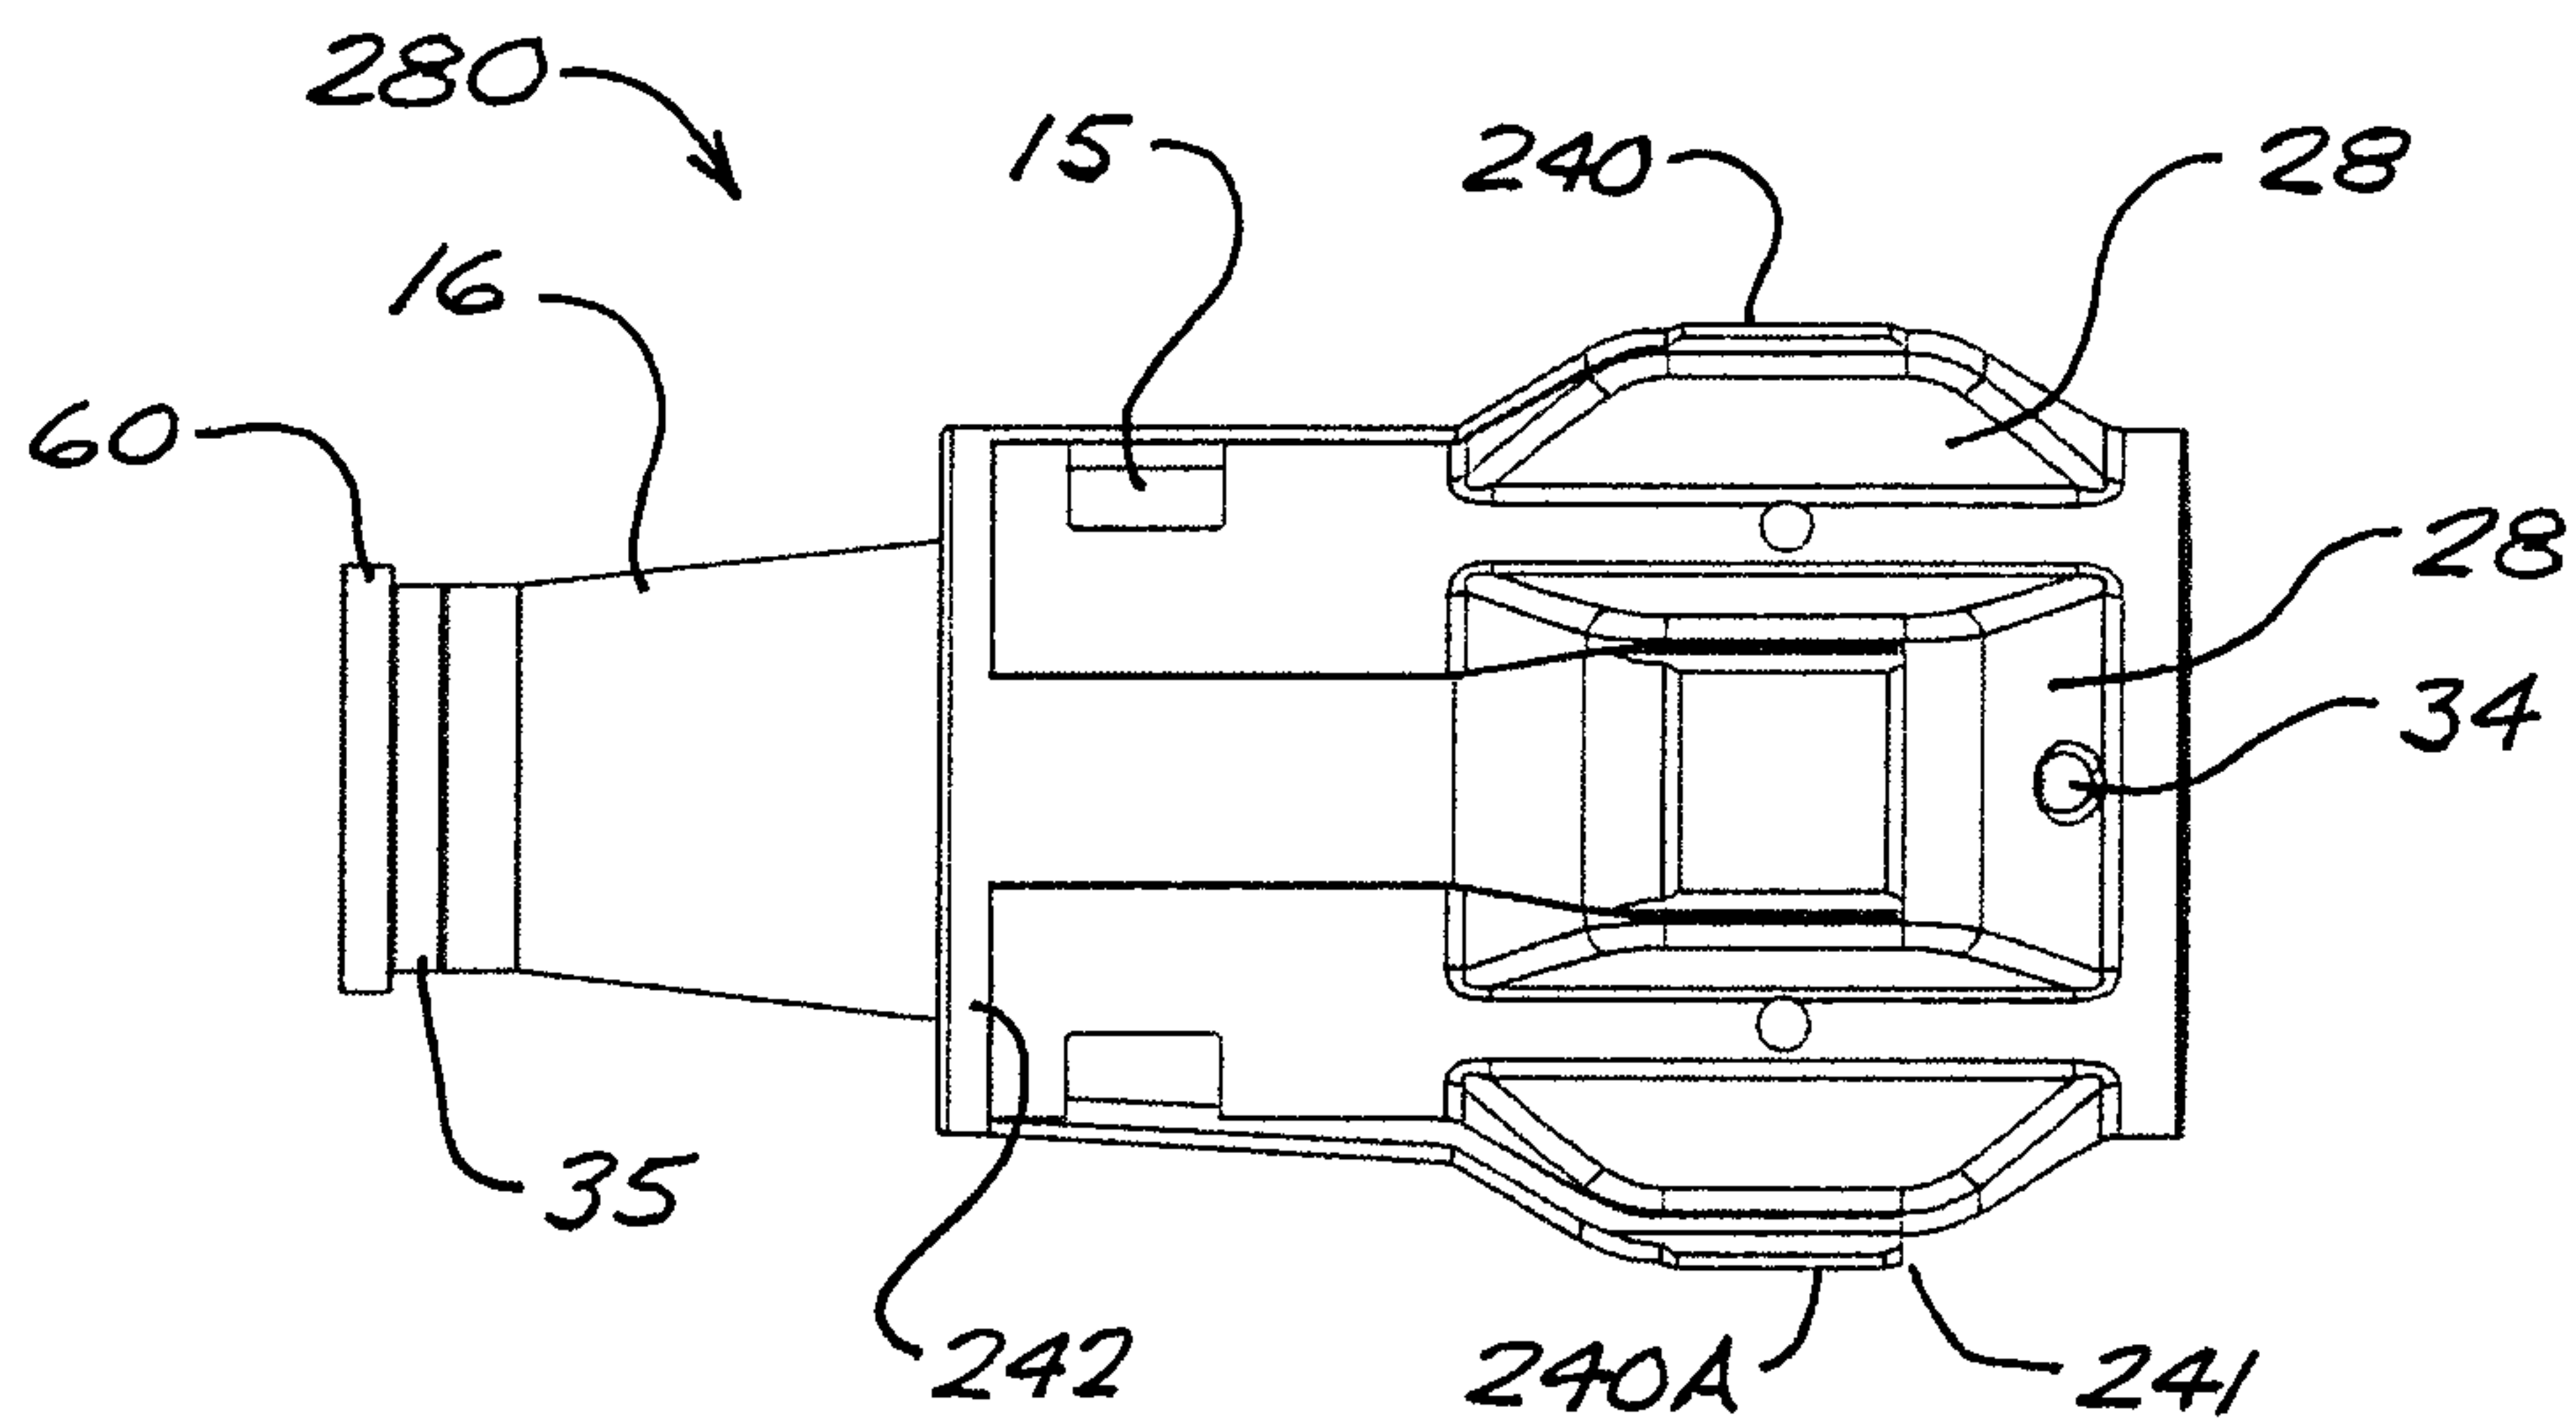


FIG. 14C



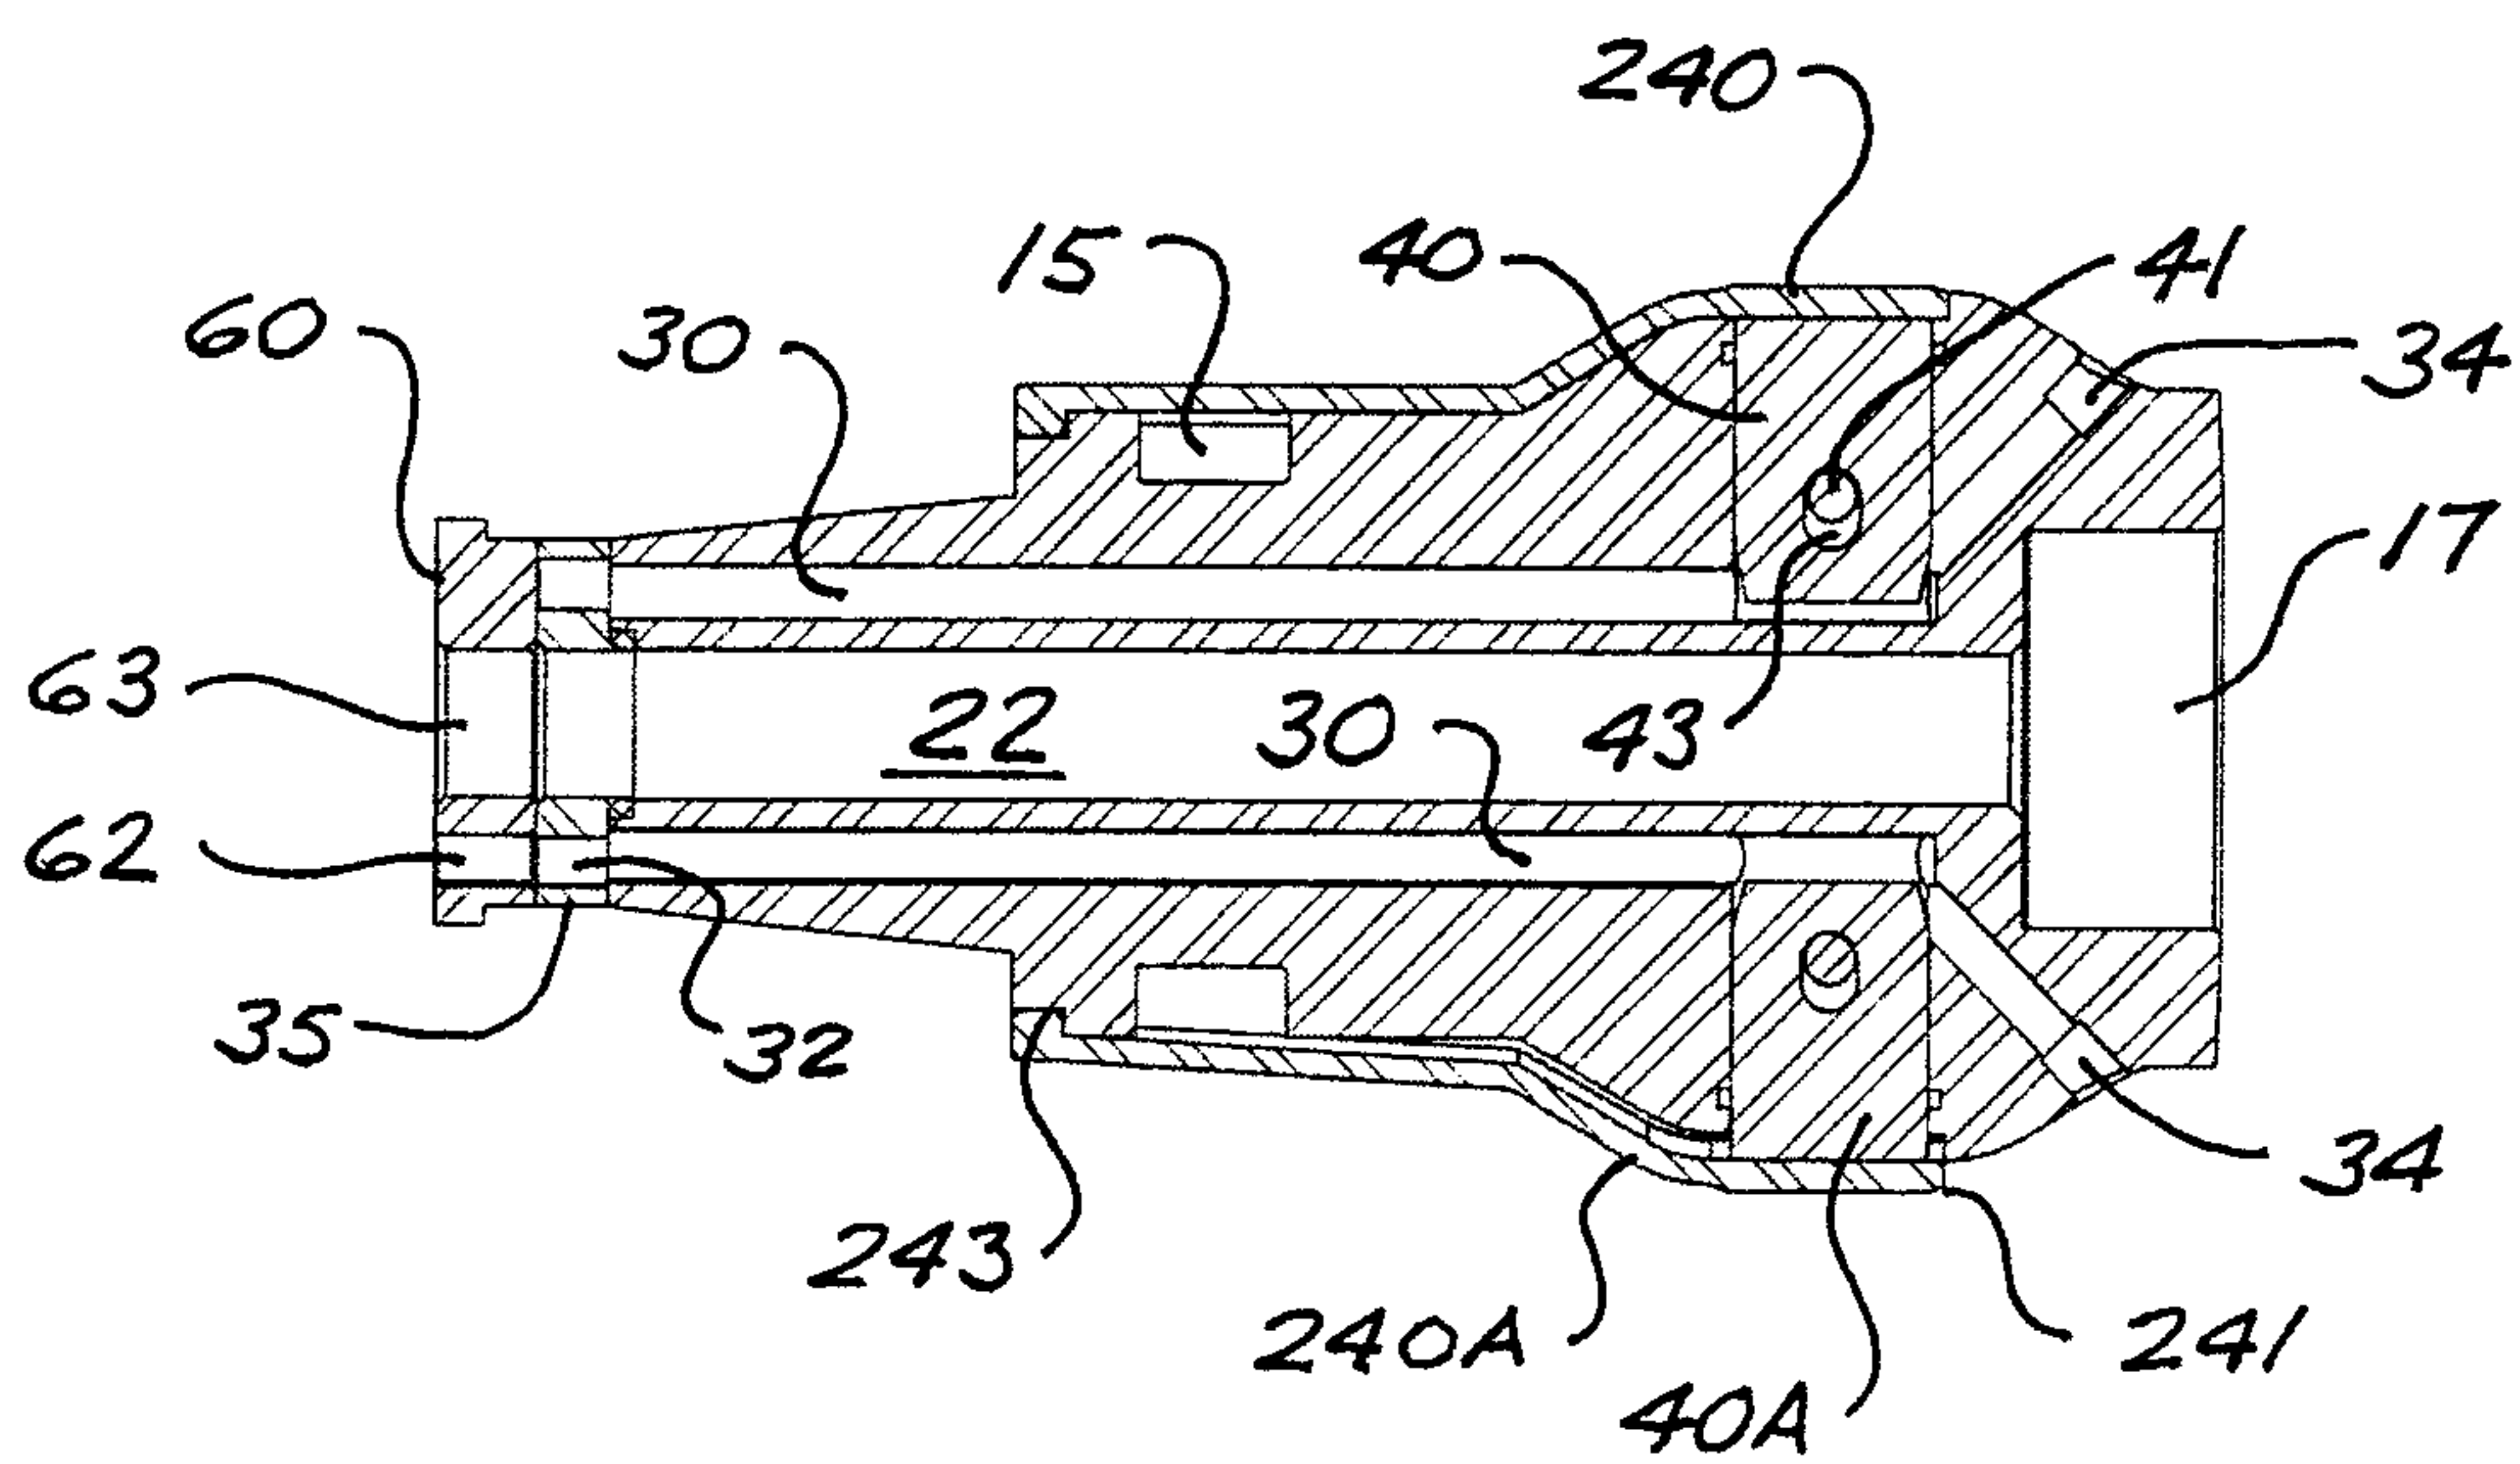


FIG. 14D

16 / 23

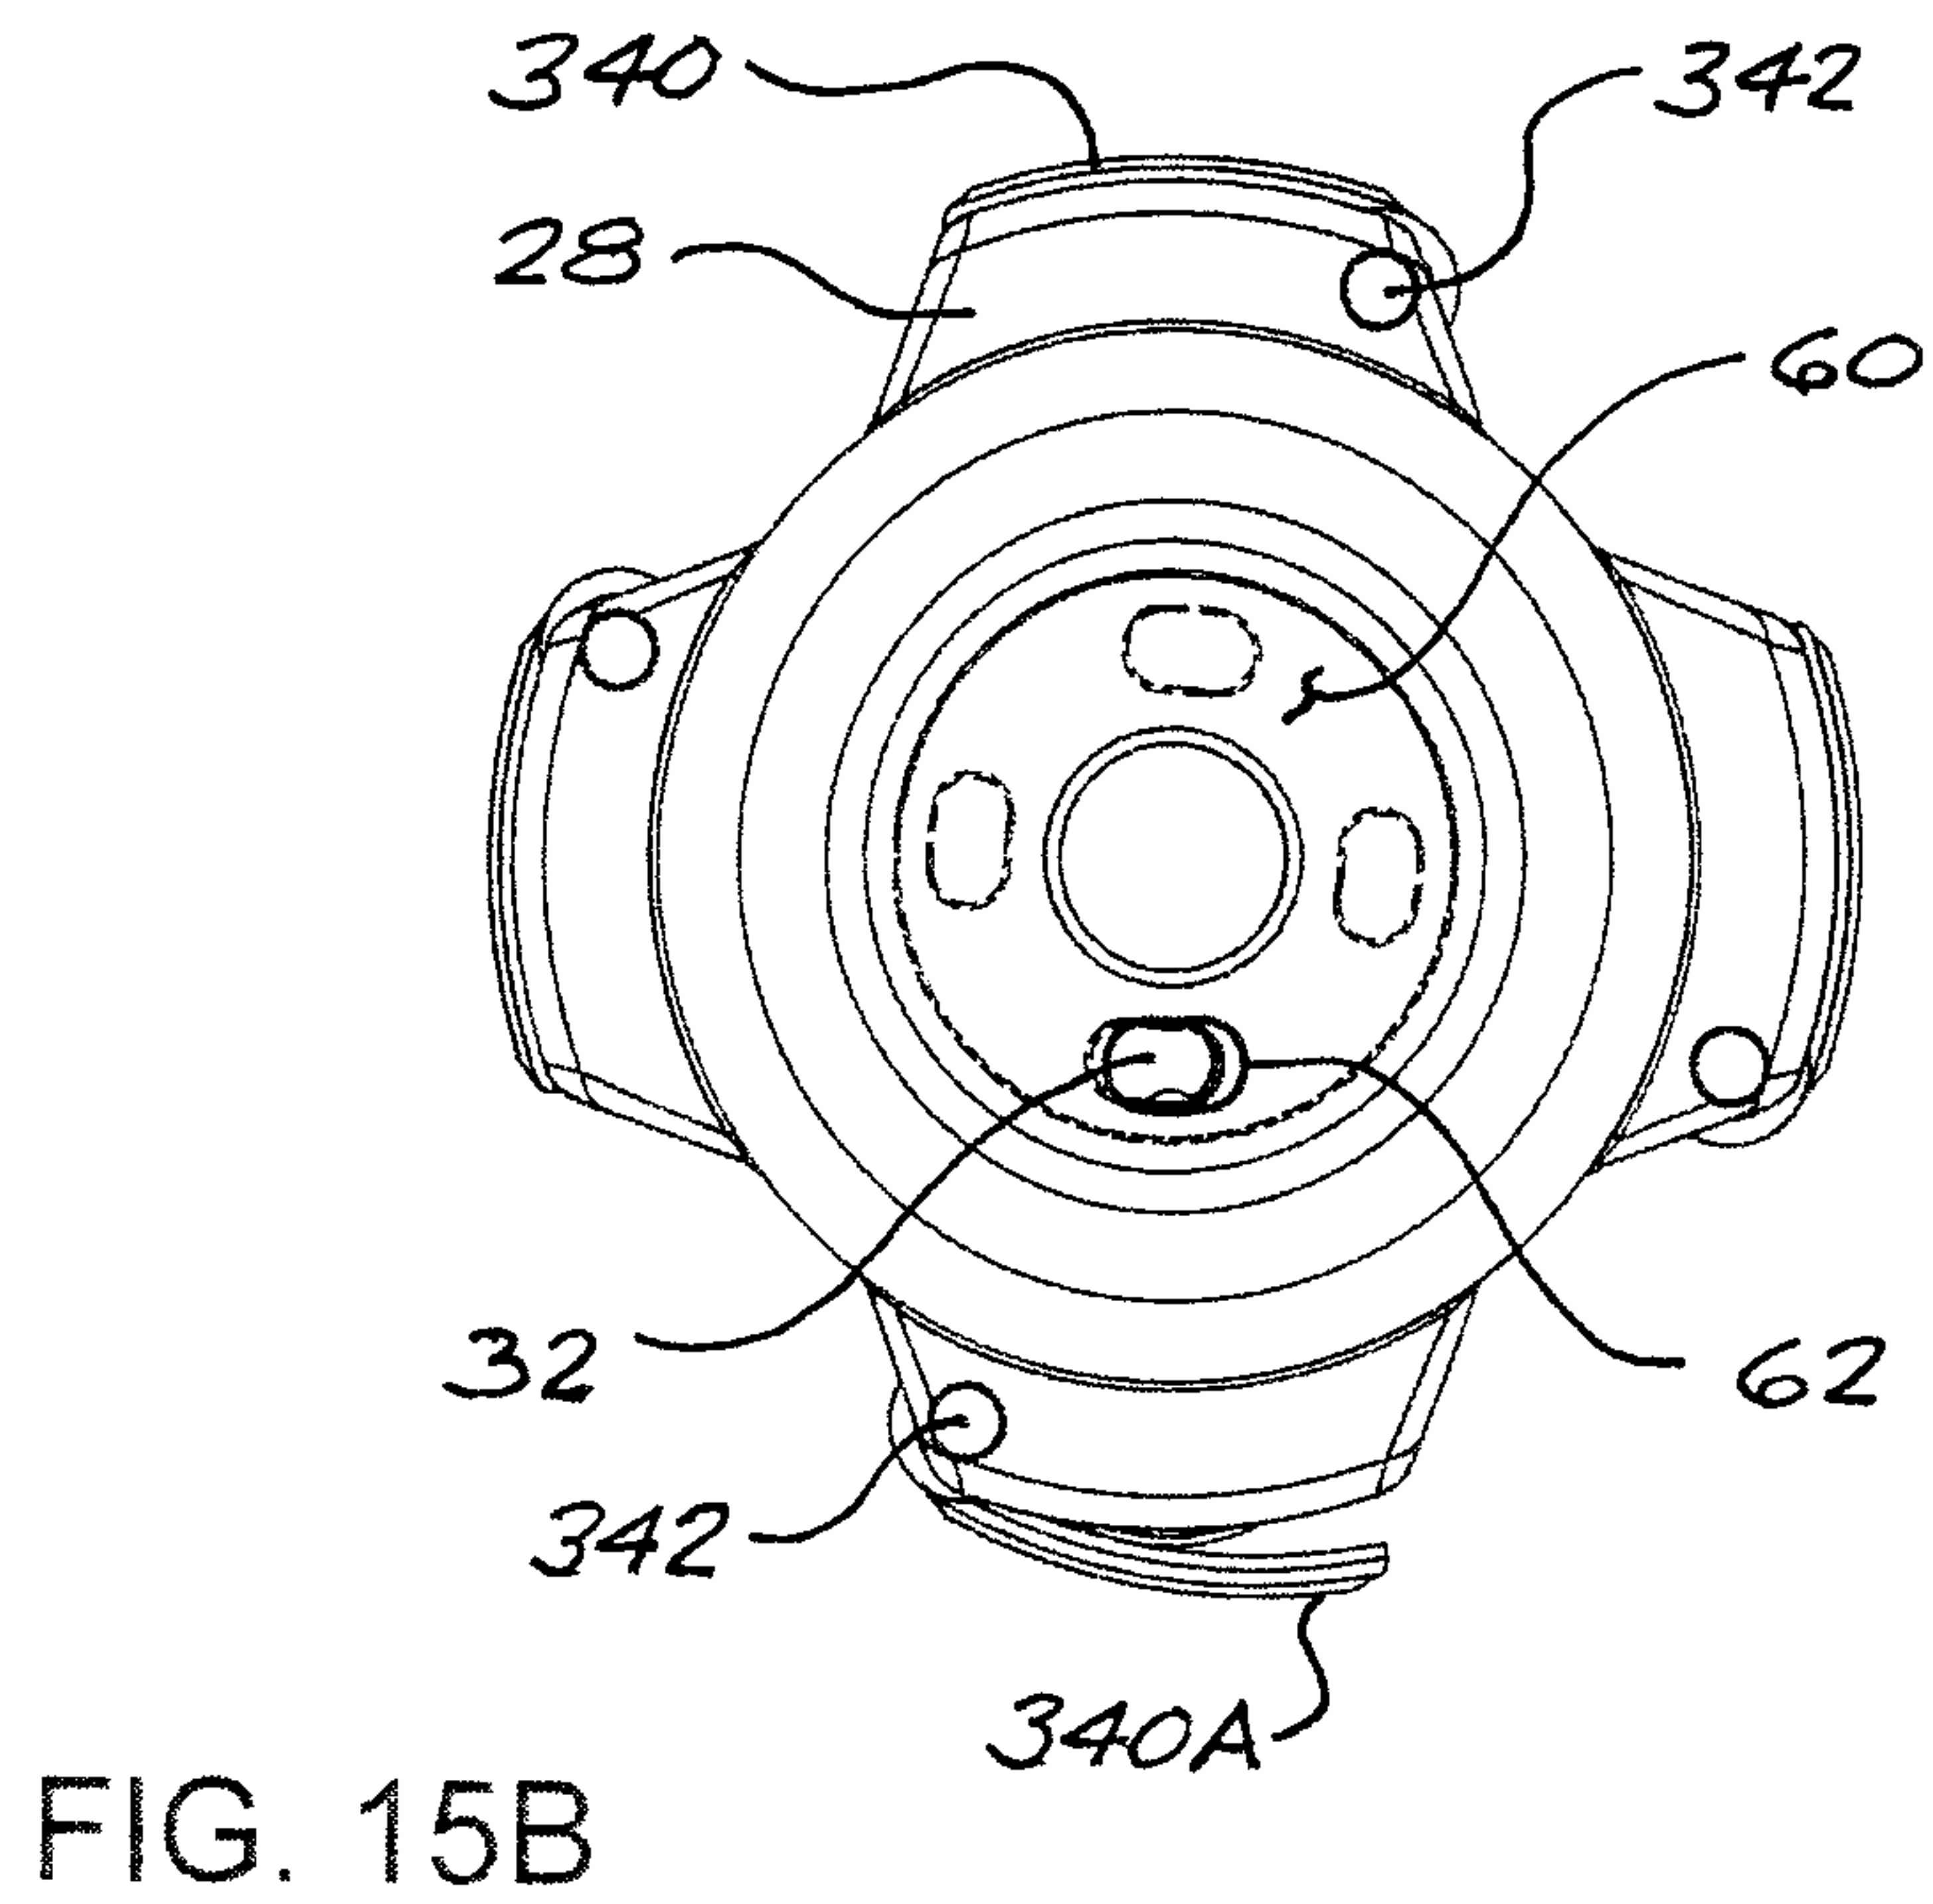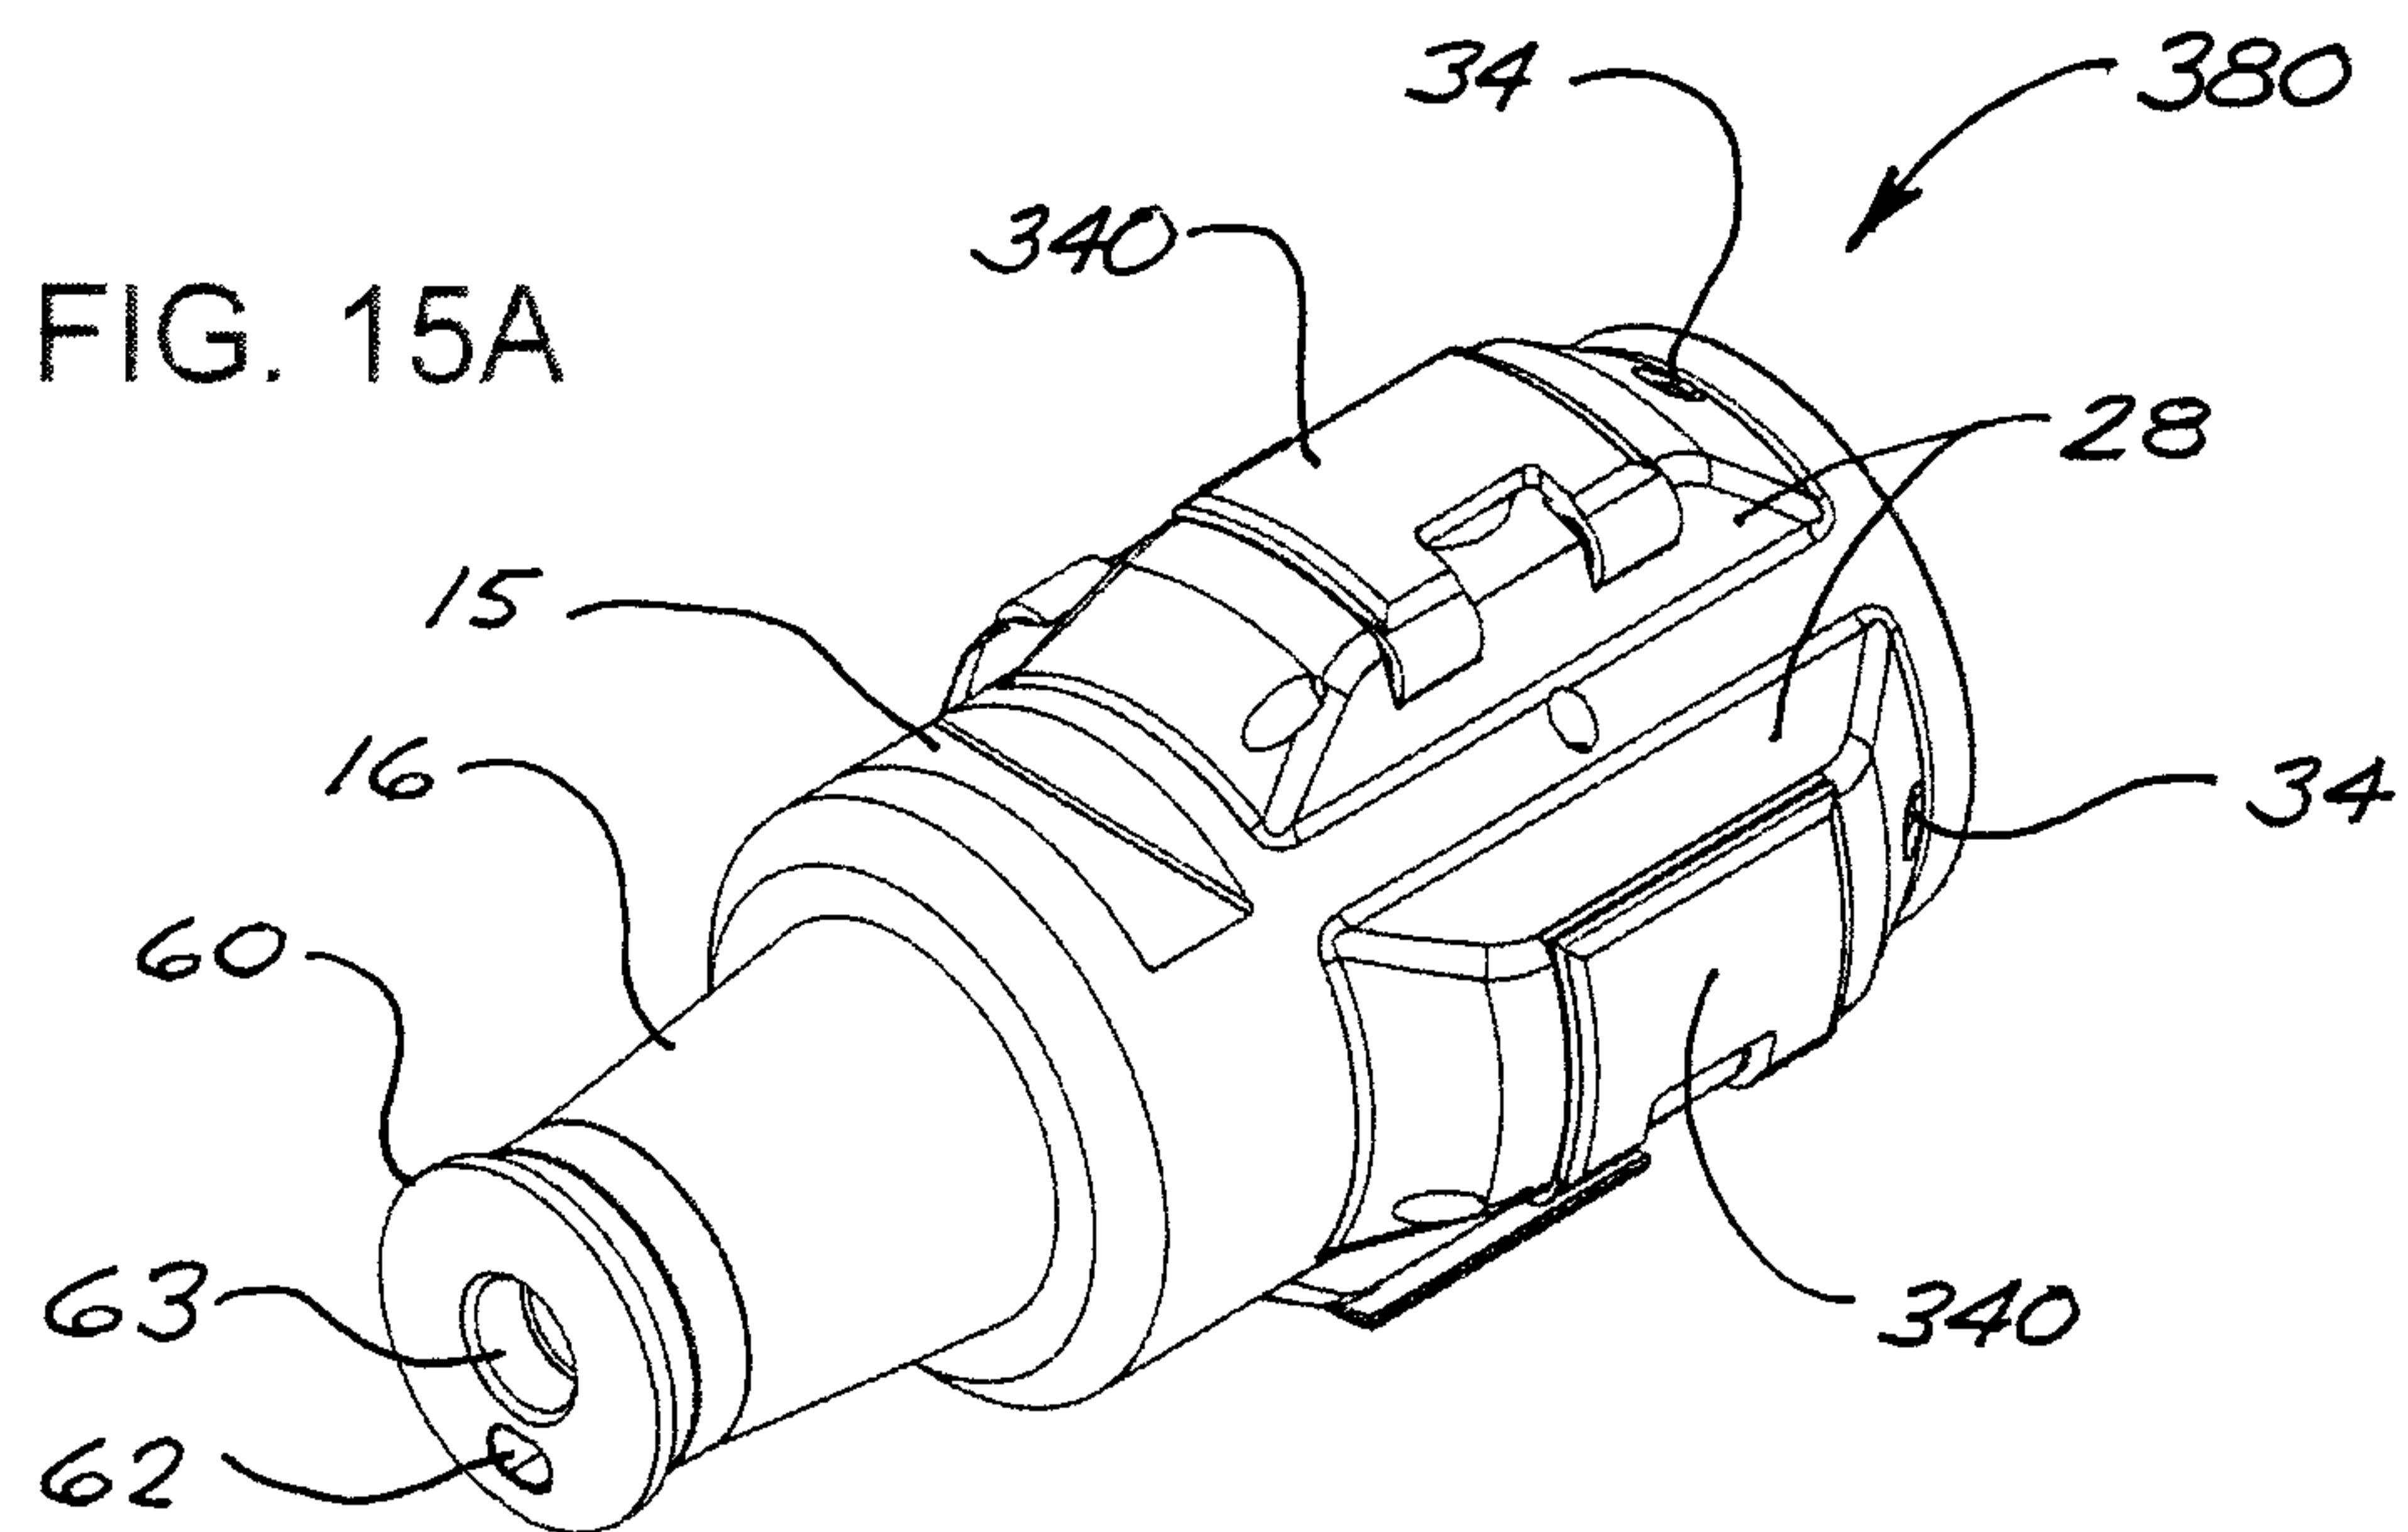

17 / 23

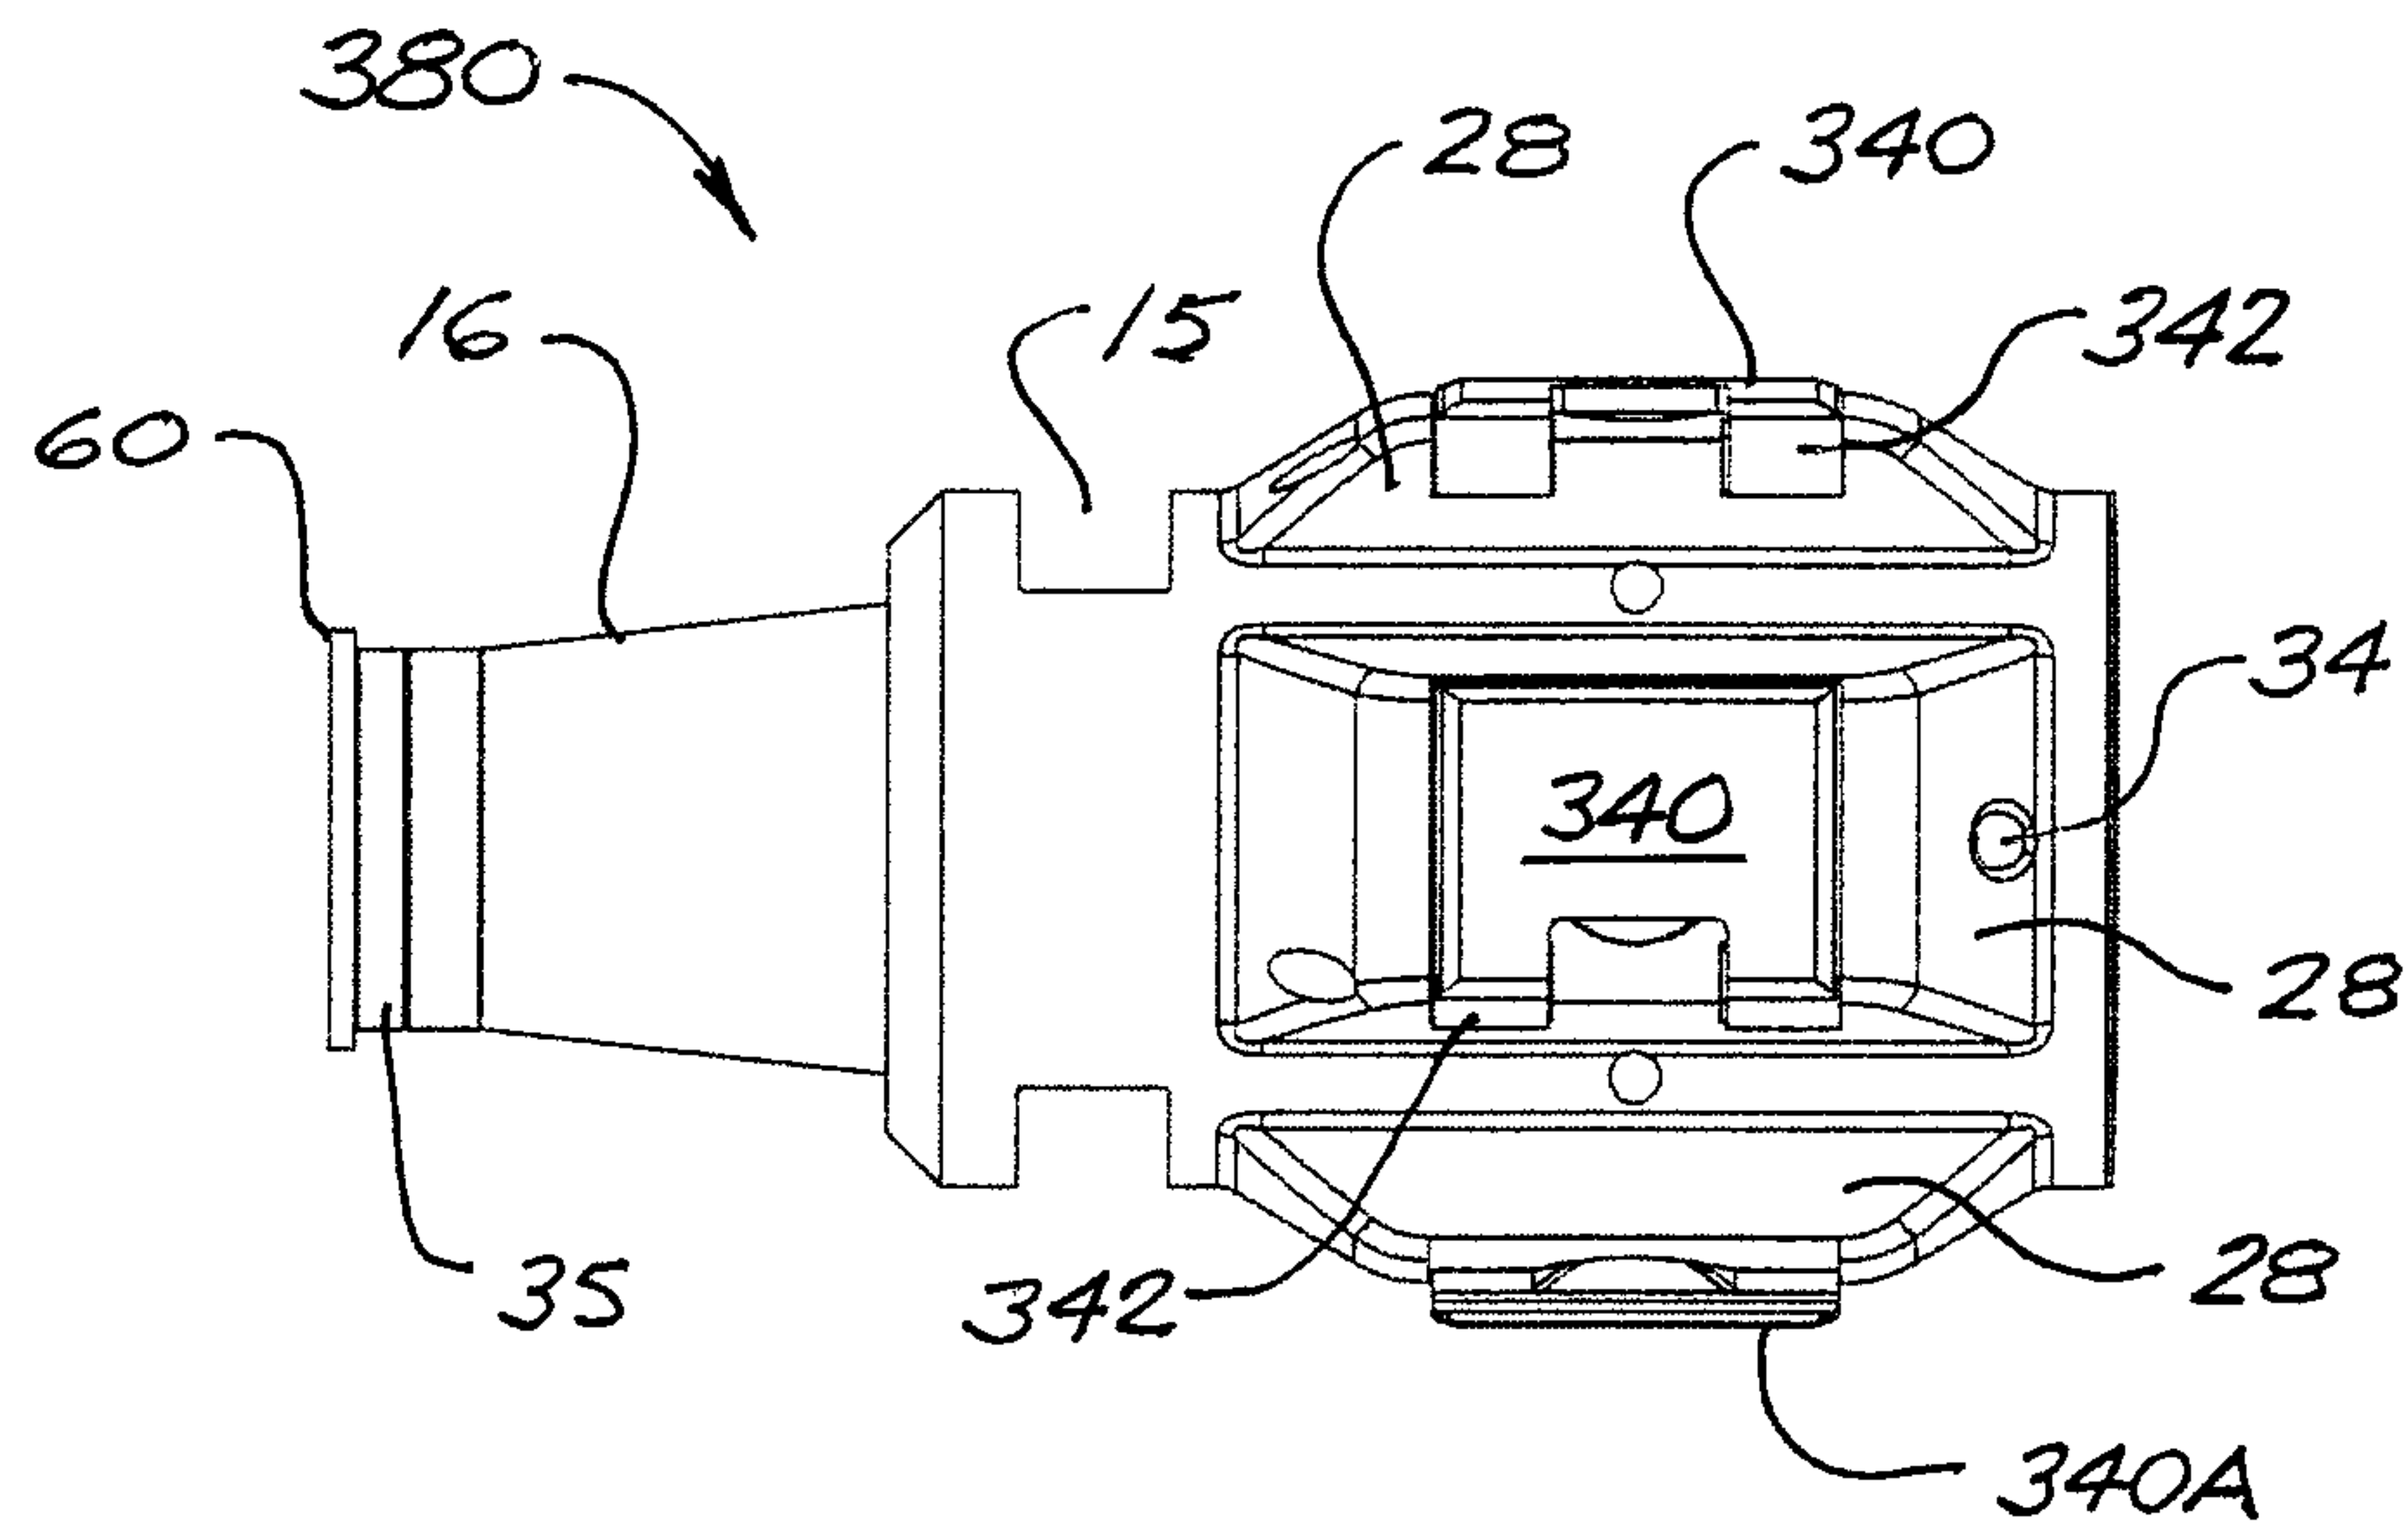


FIG. 15C

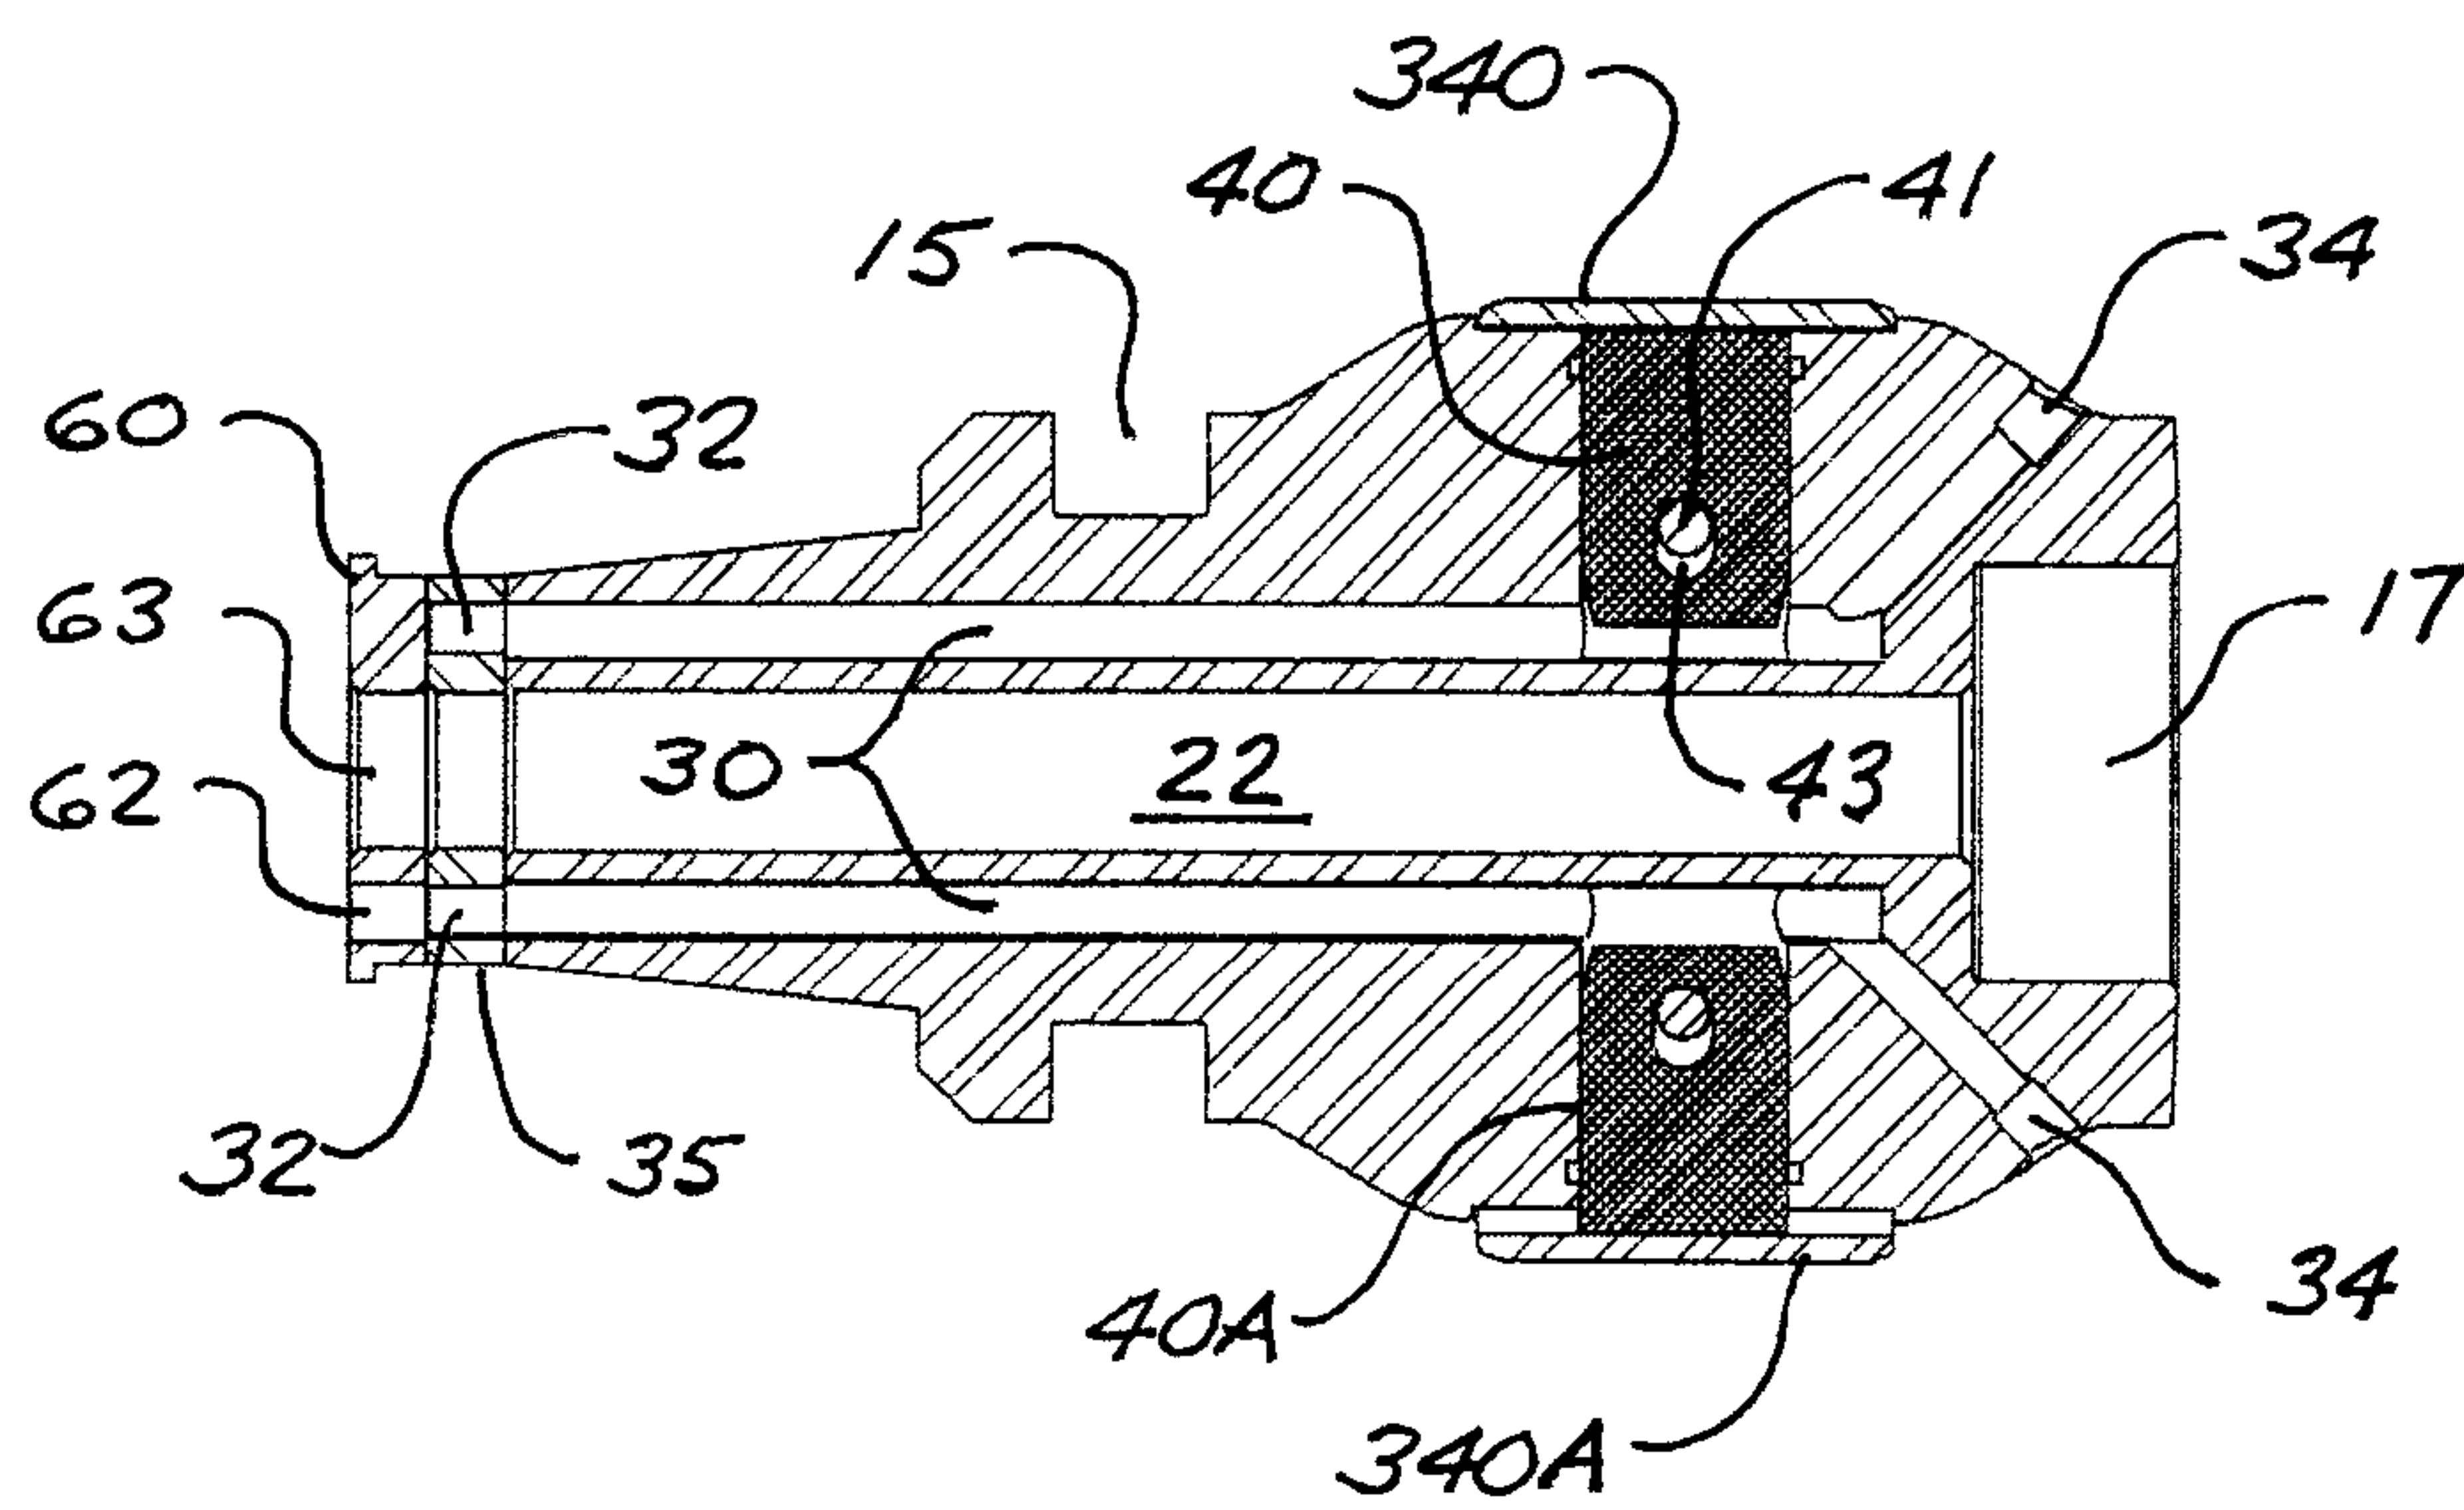


FIG. 15D

18 / 23

FIG. 16A


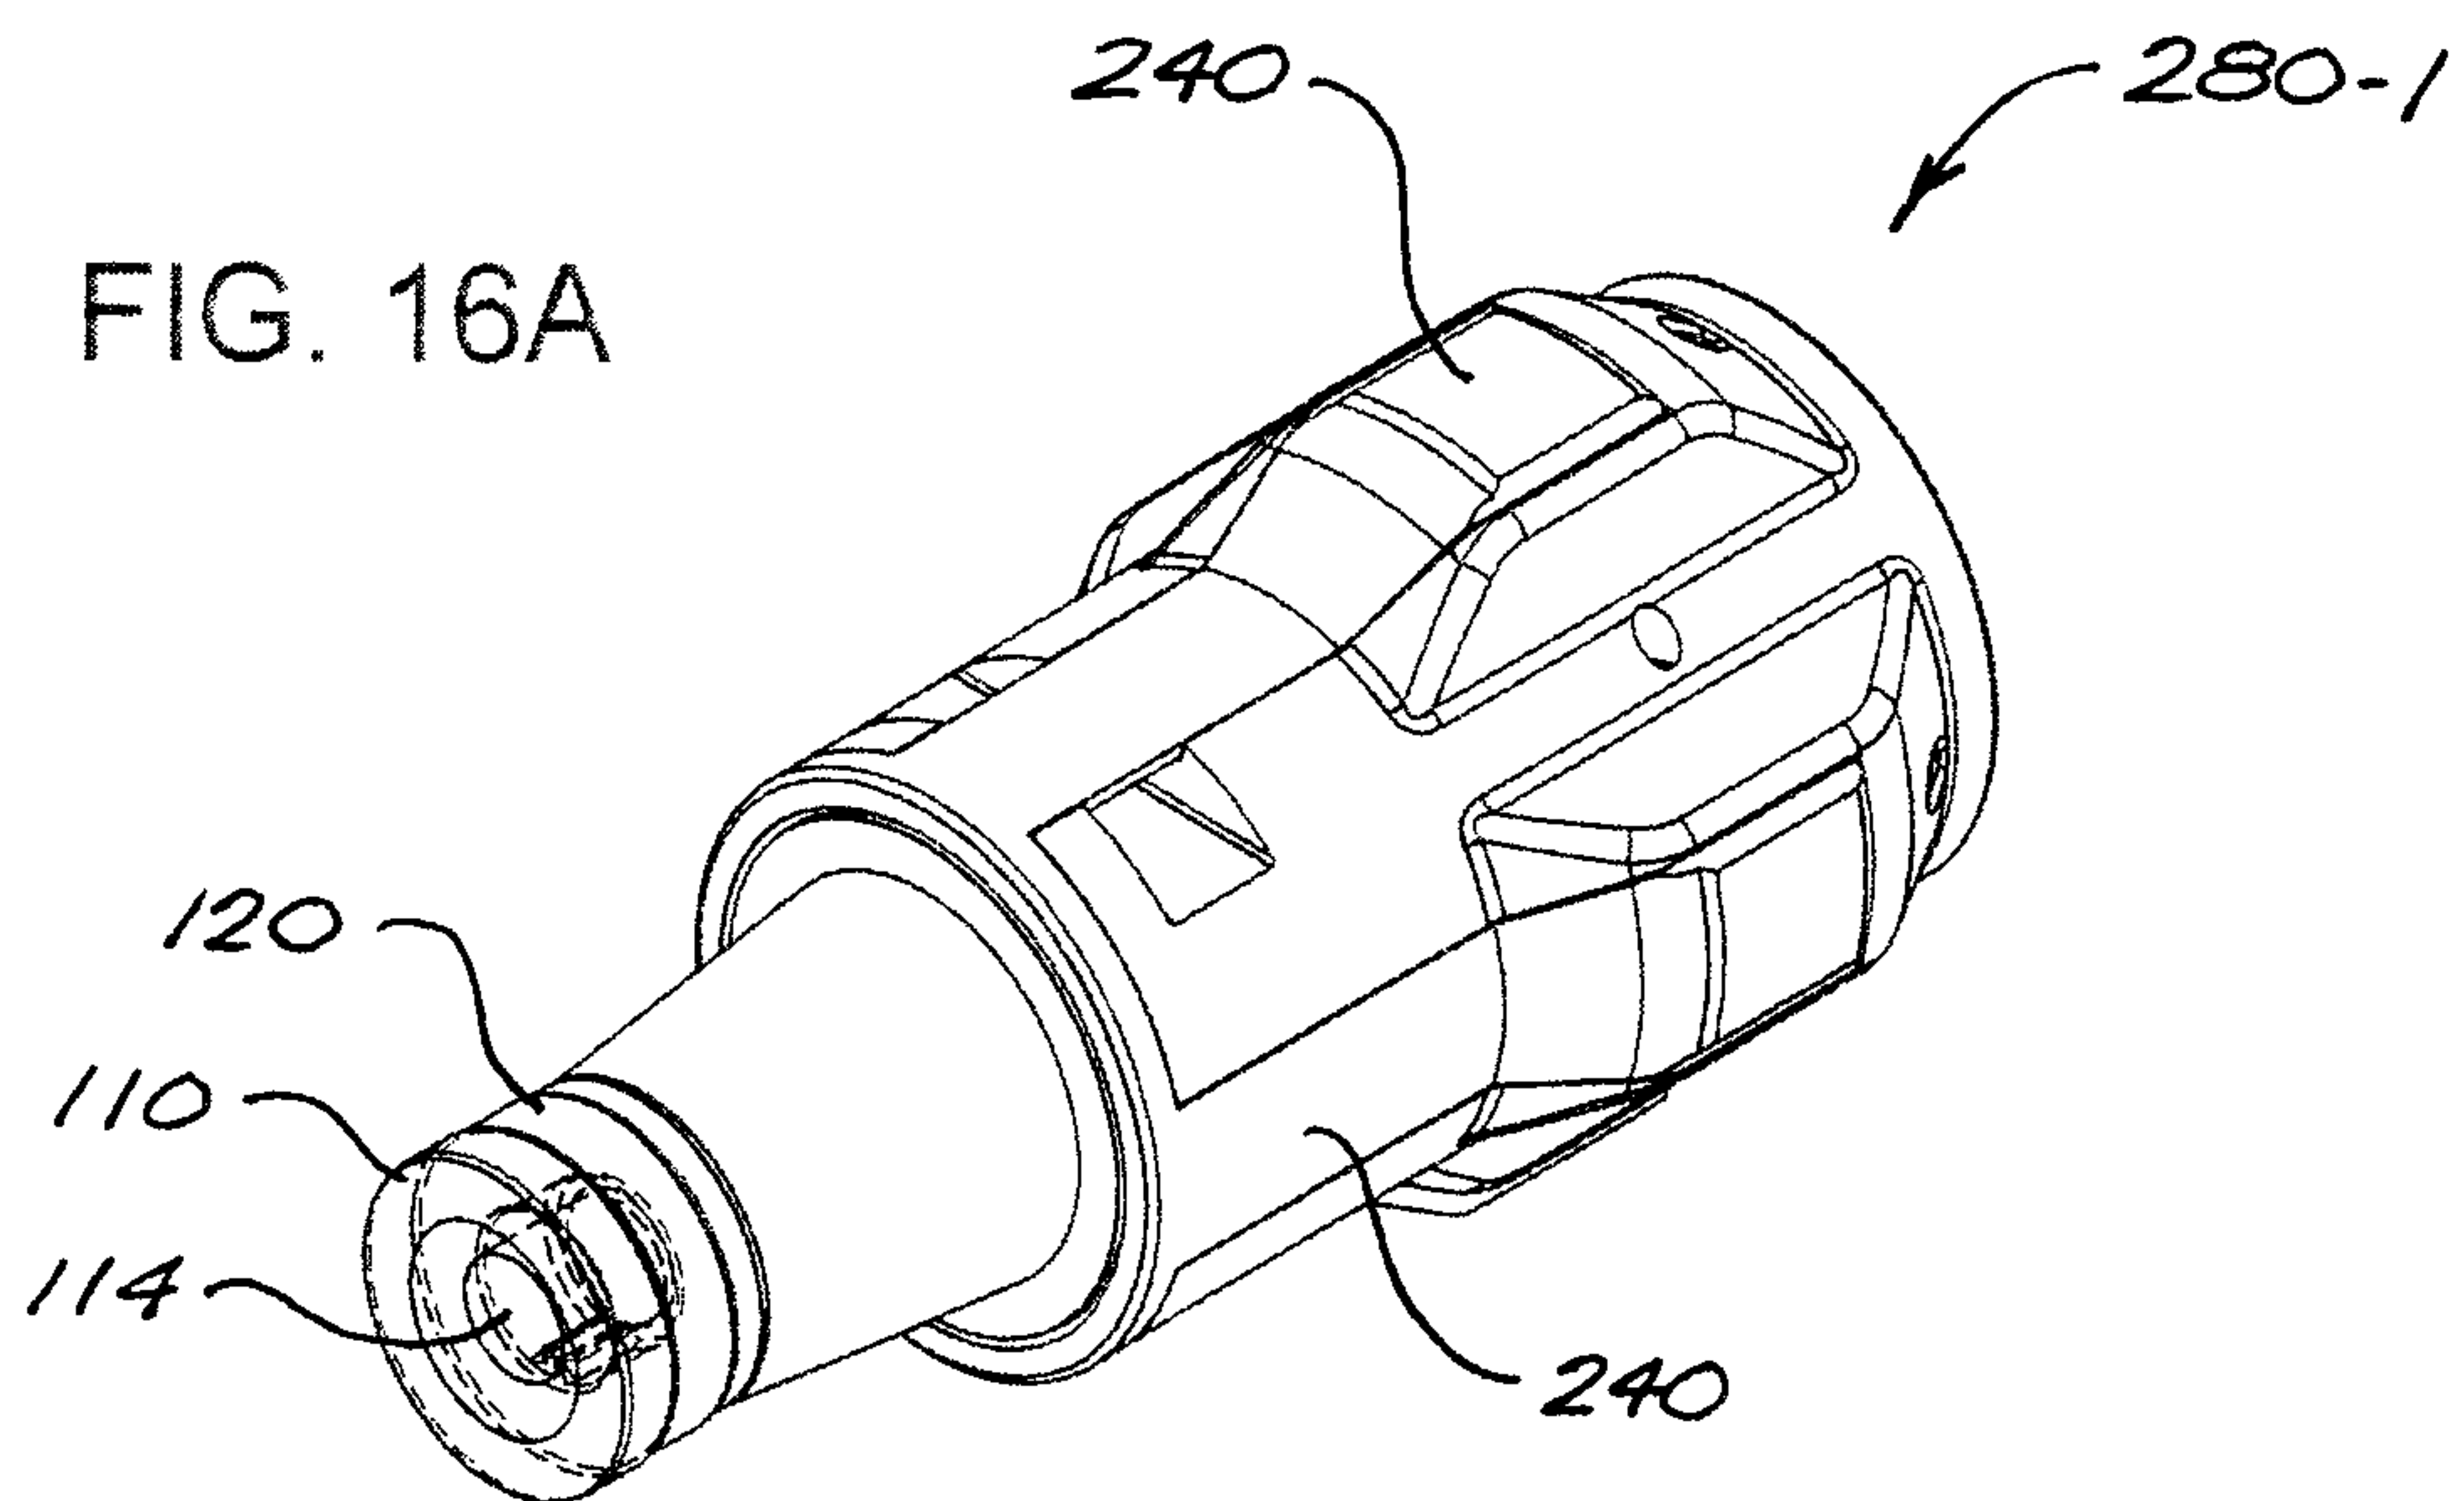


FIG. 16B

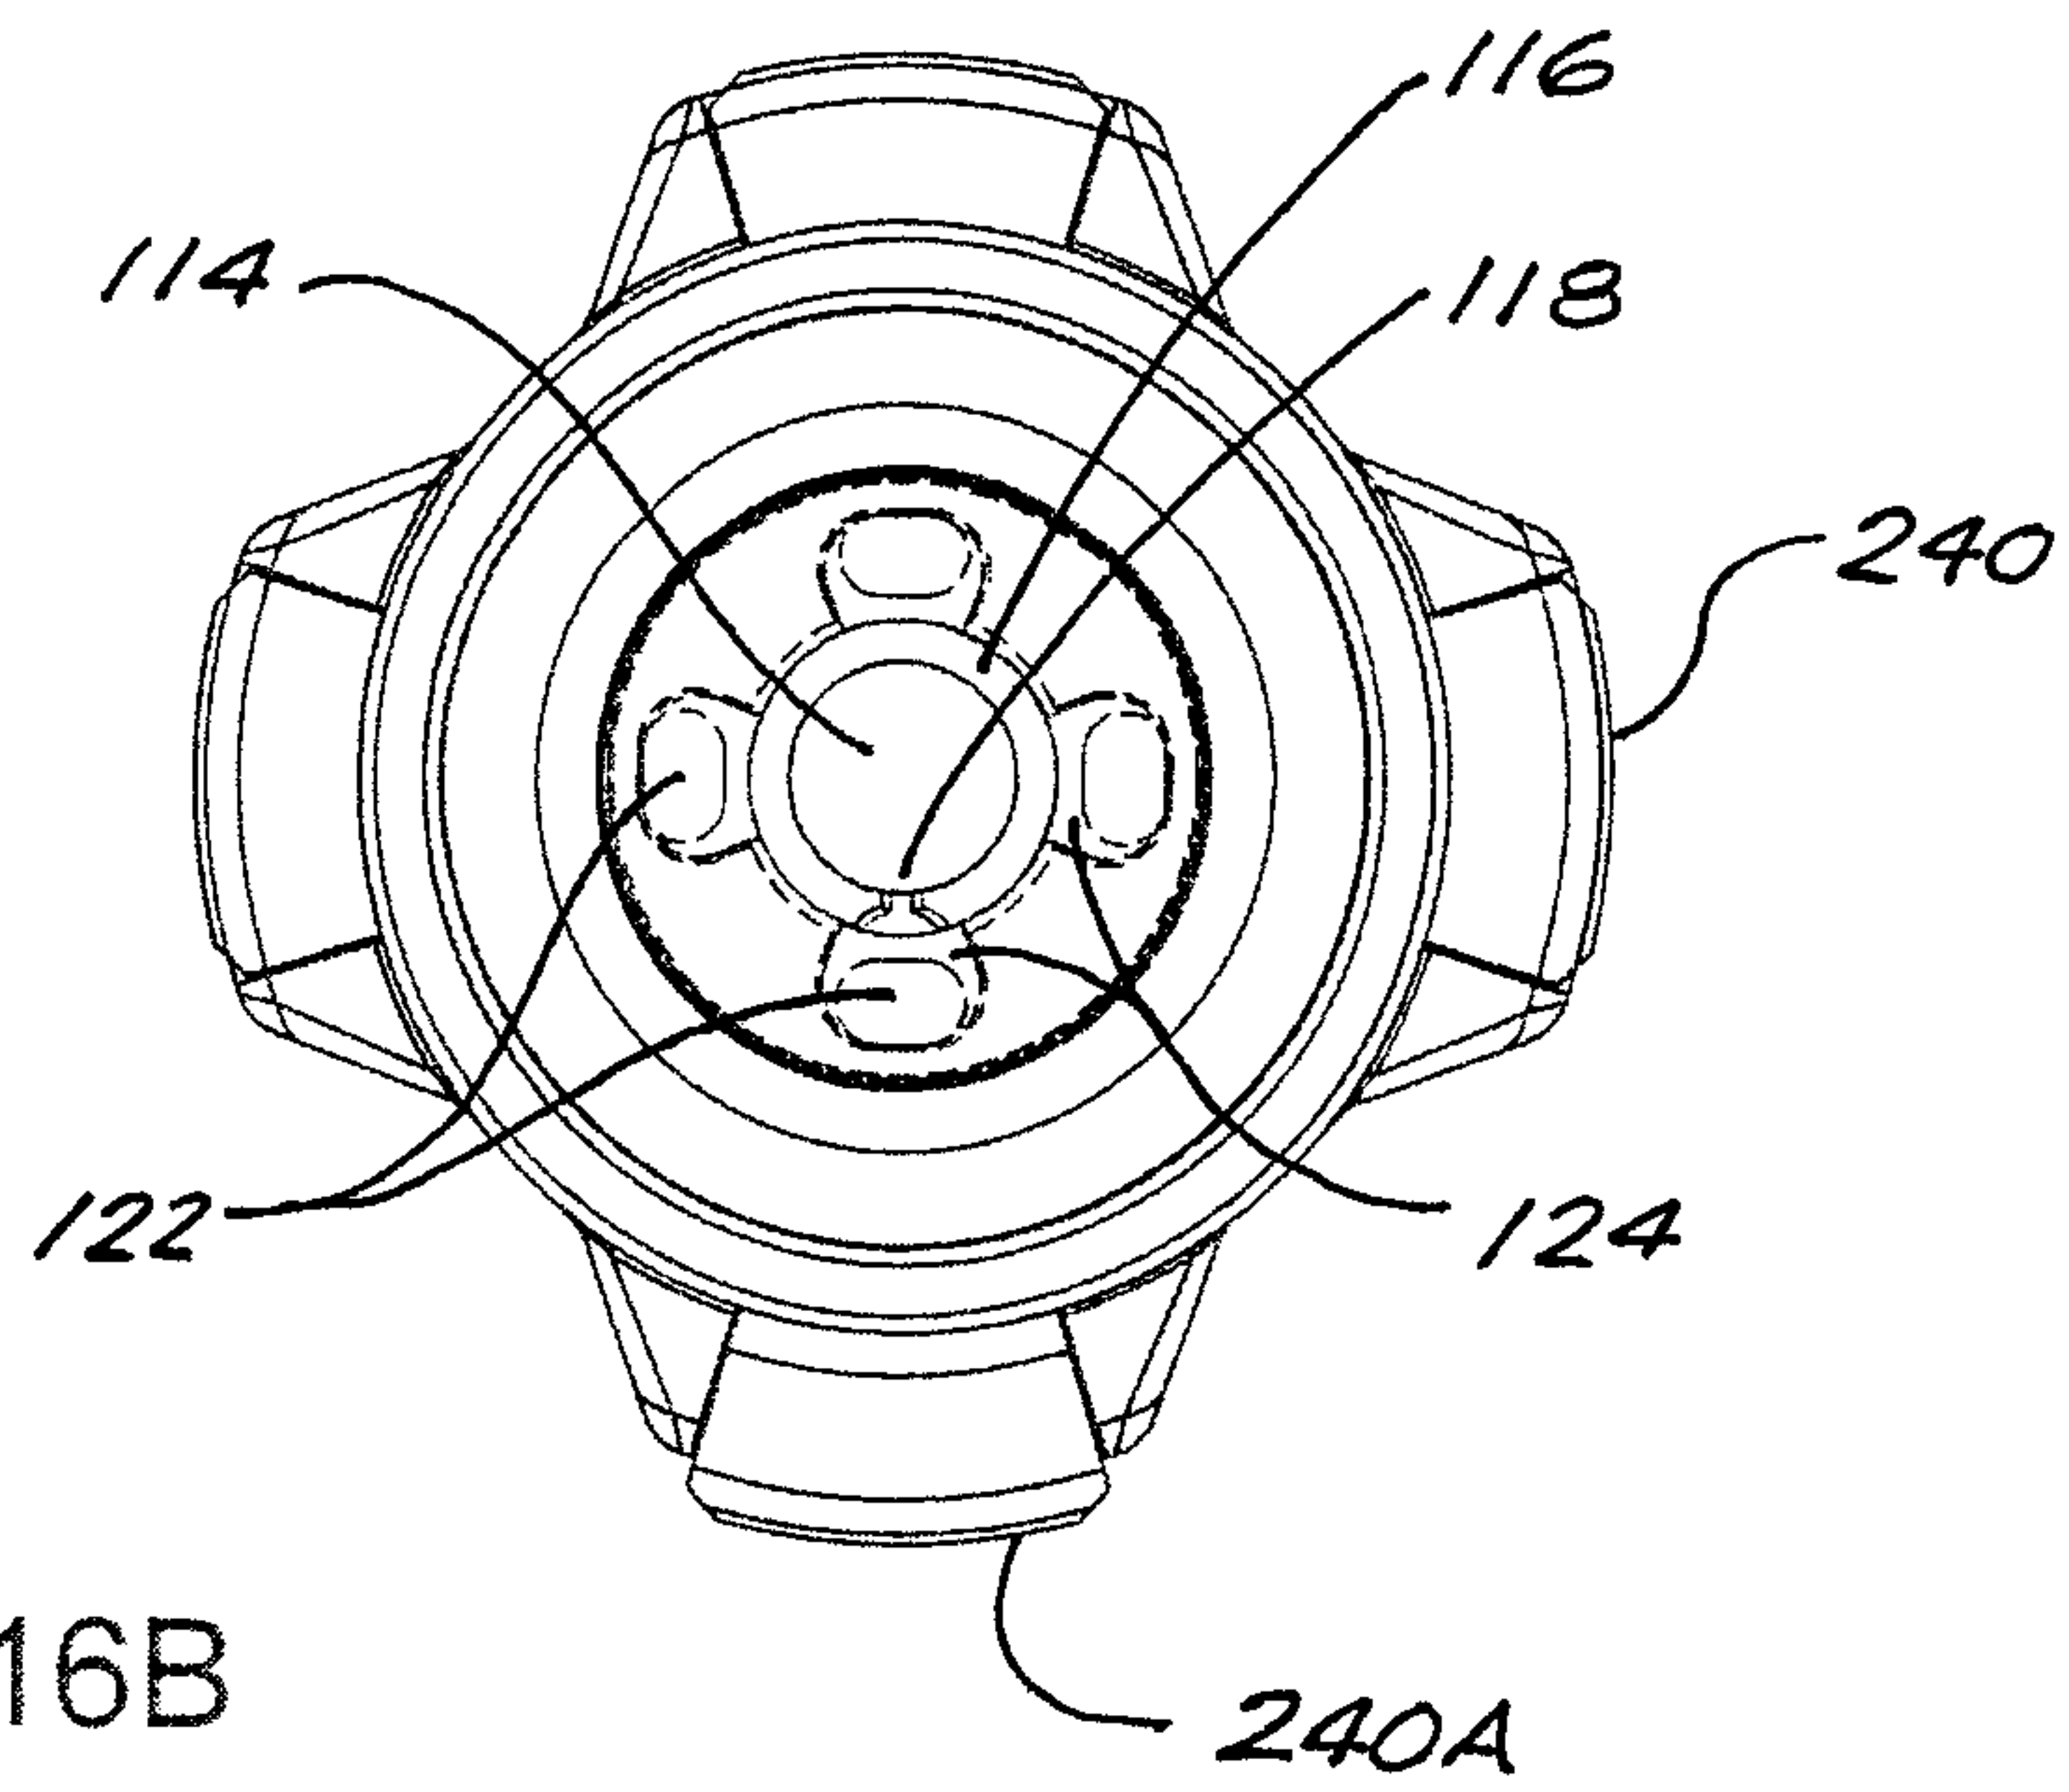

19 / 23

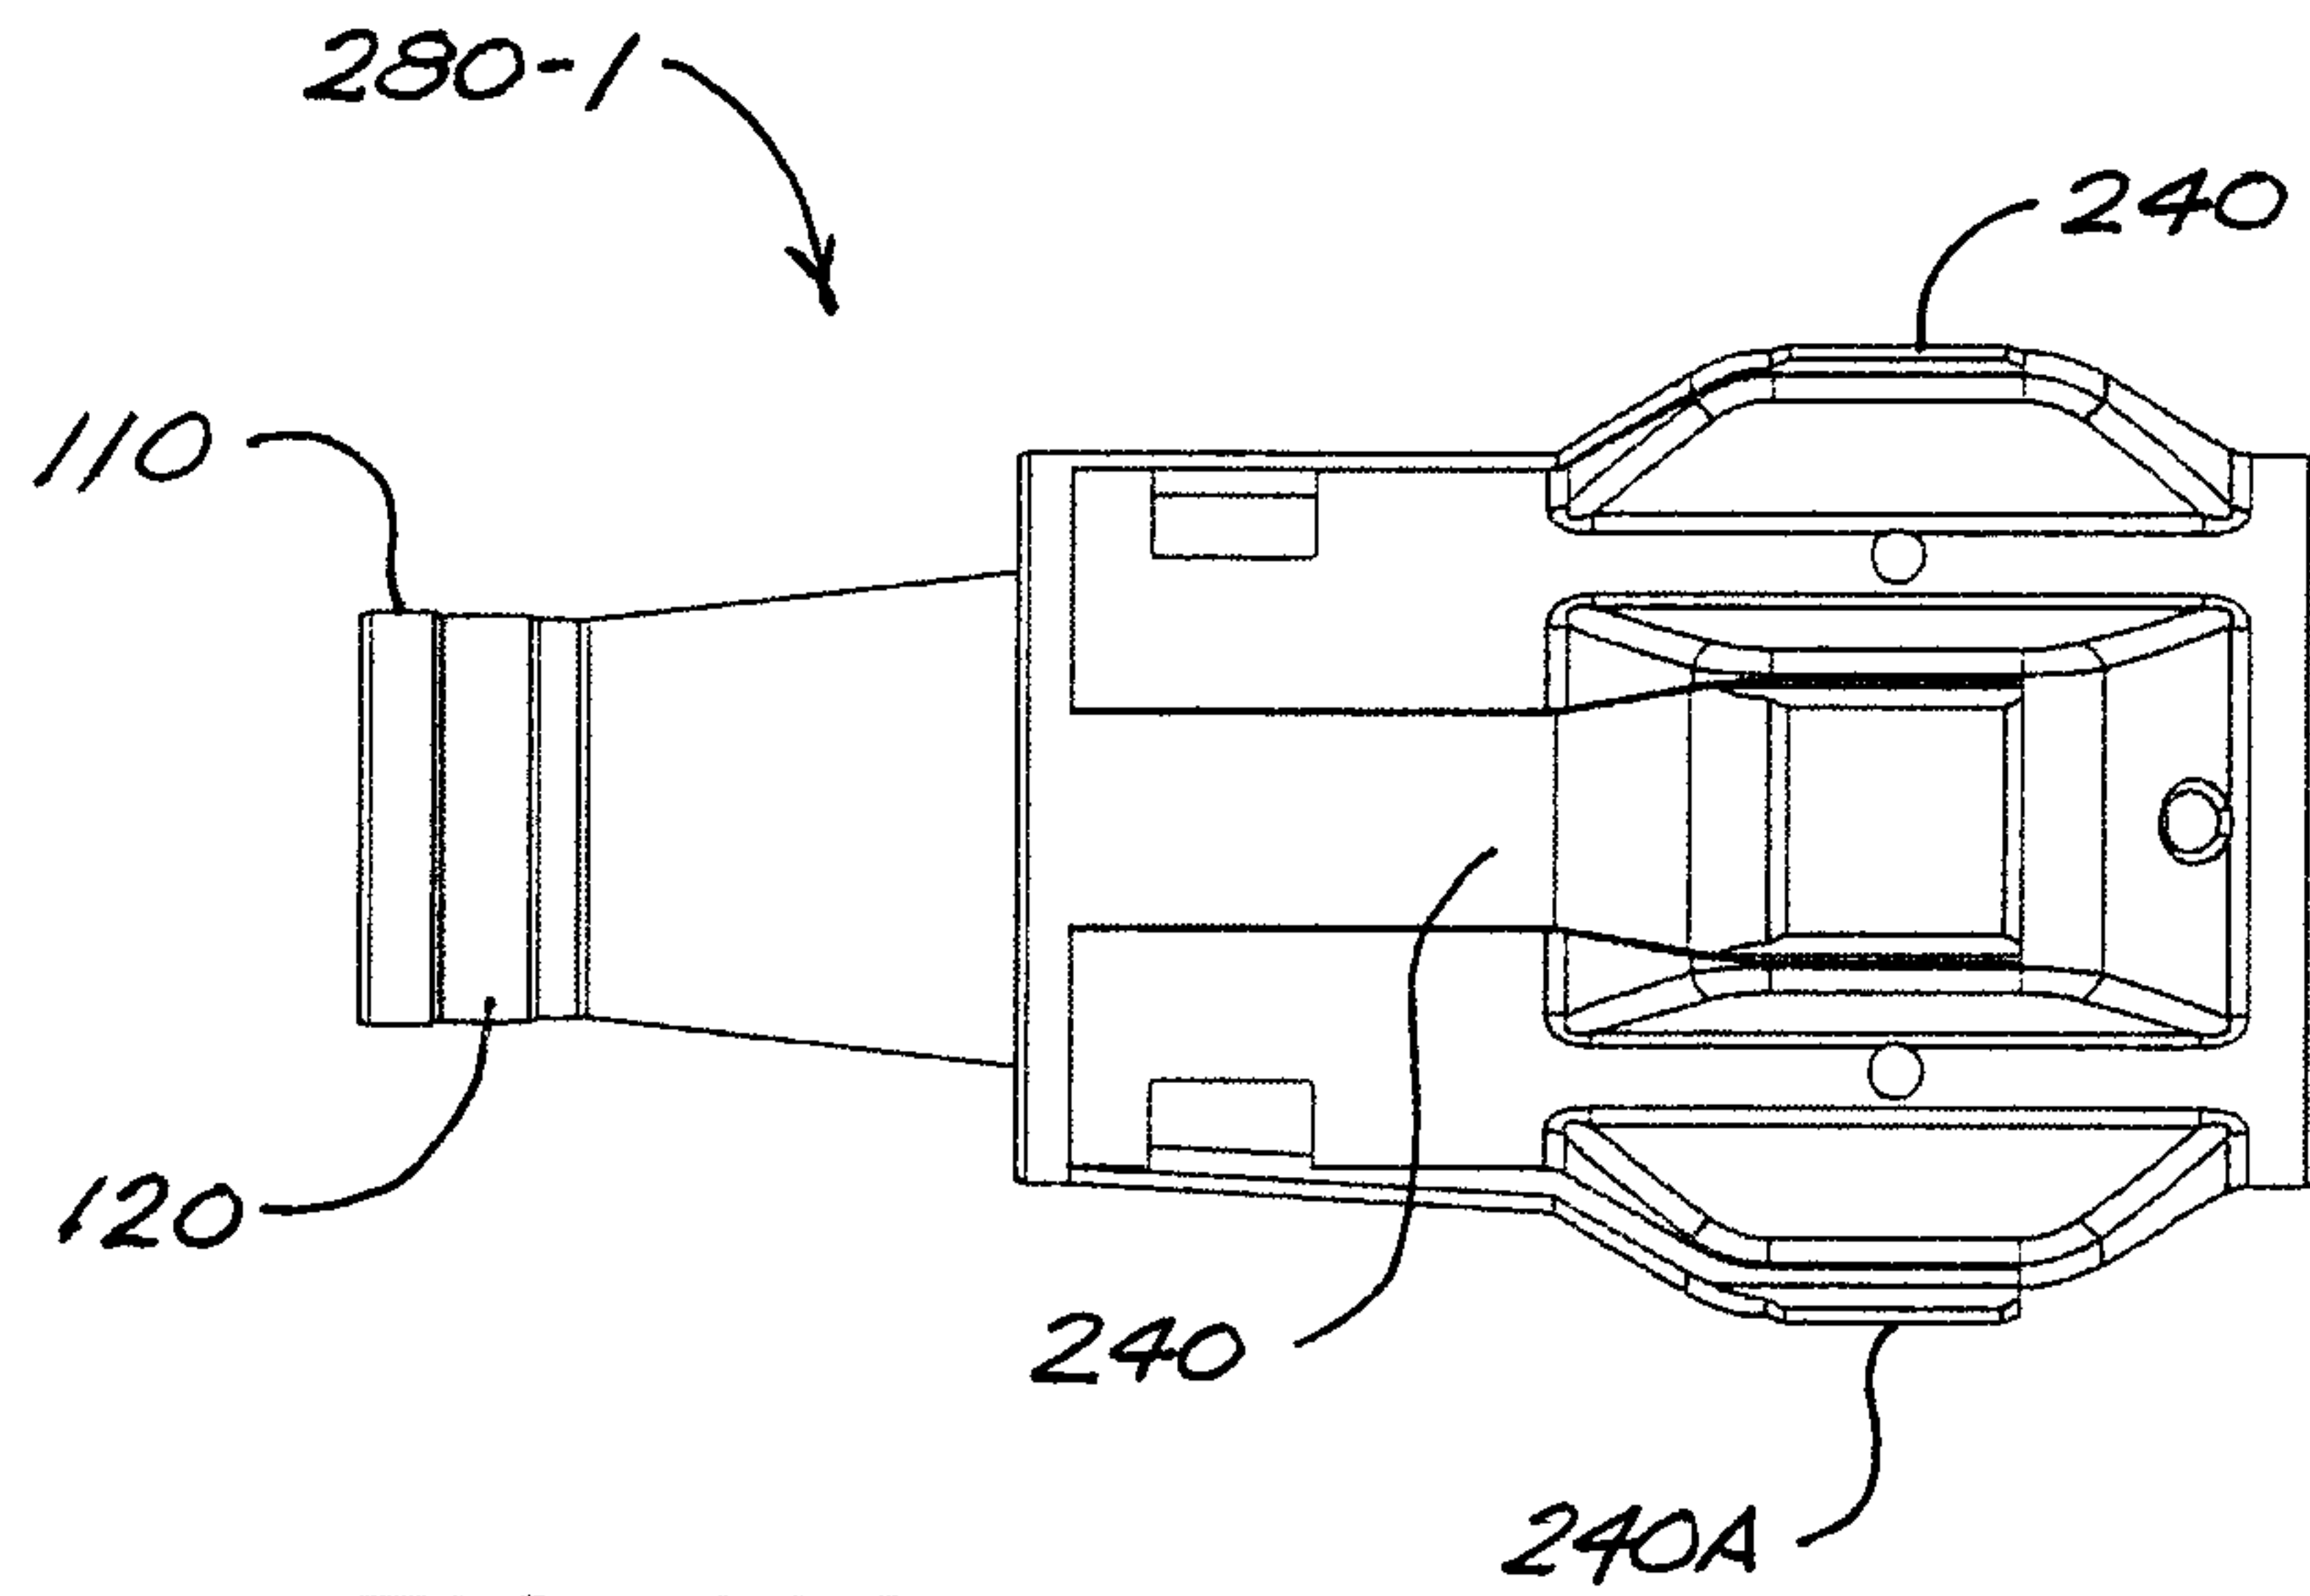


FIG. 16C

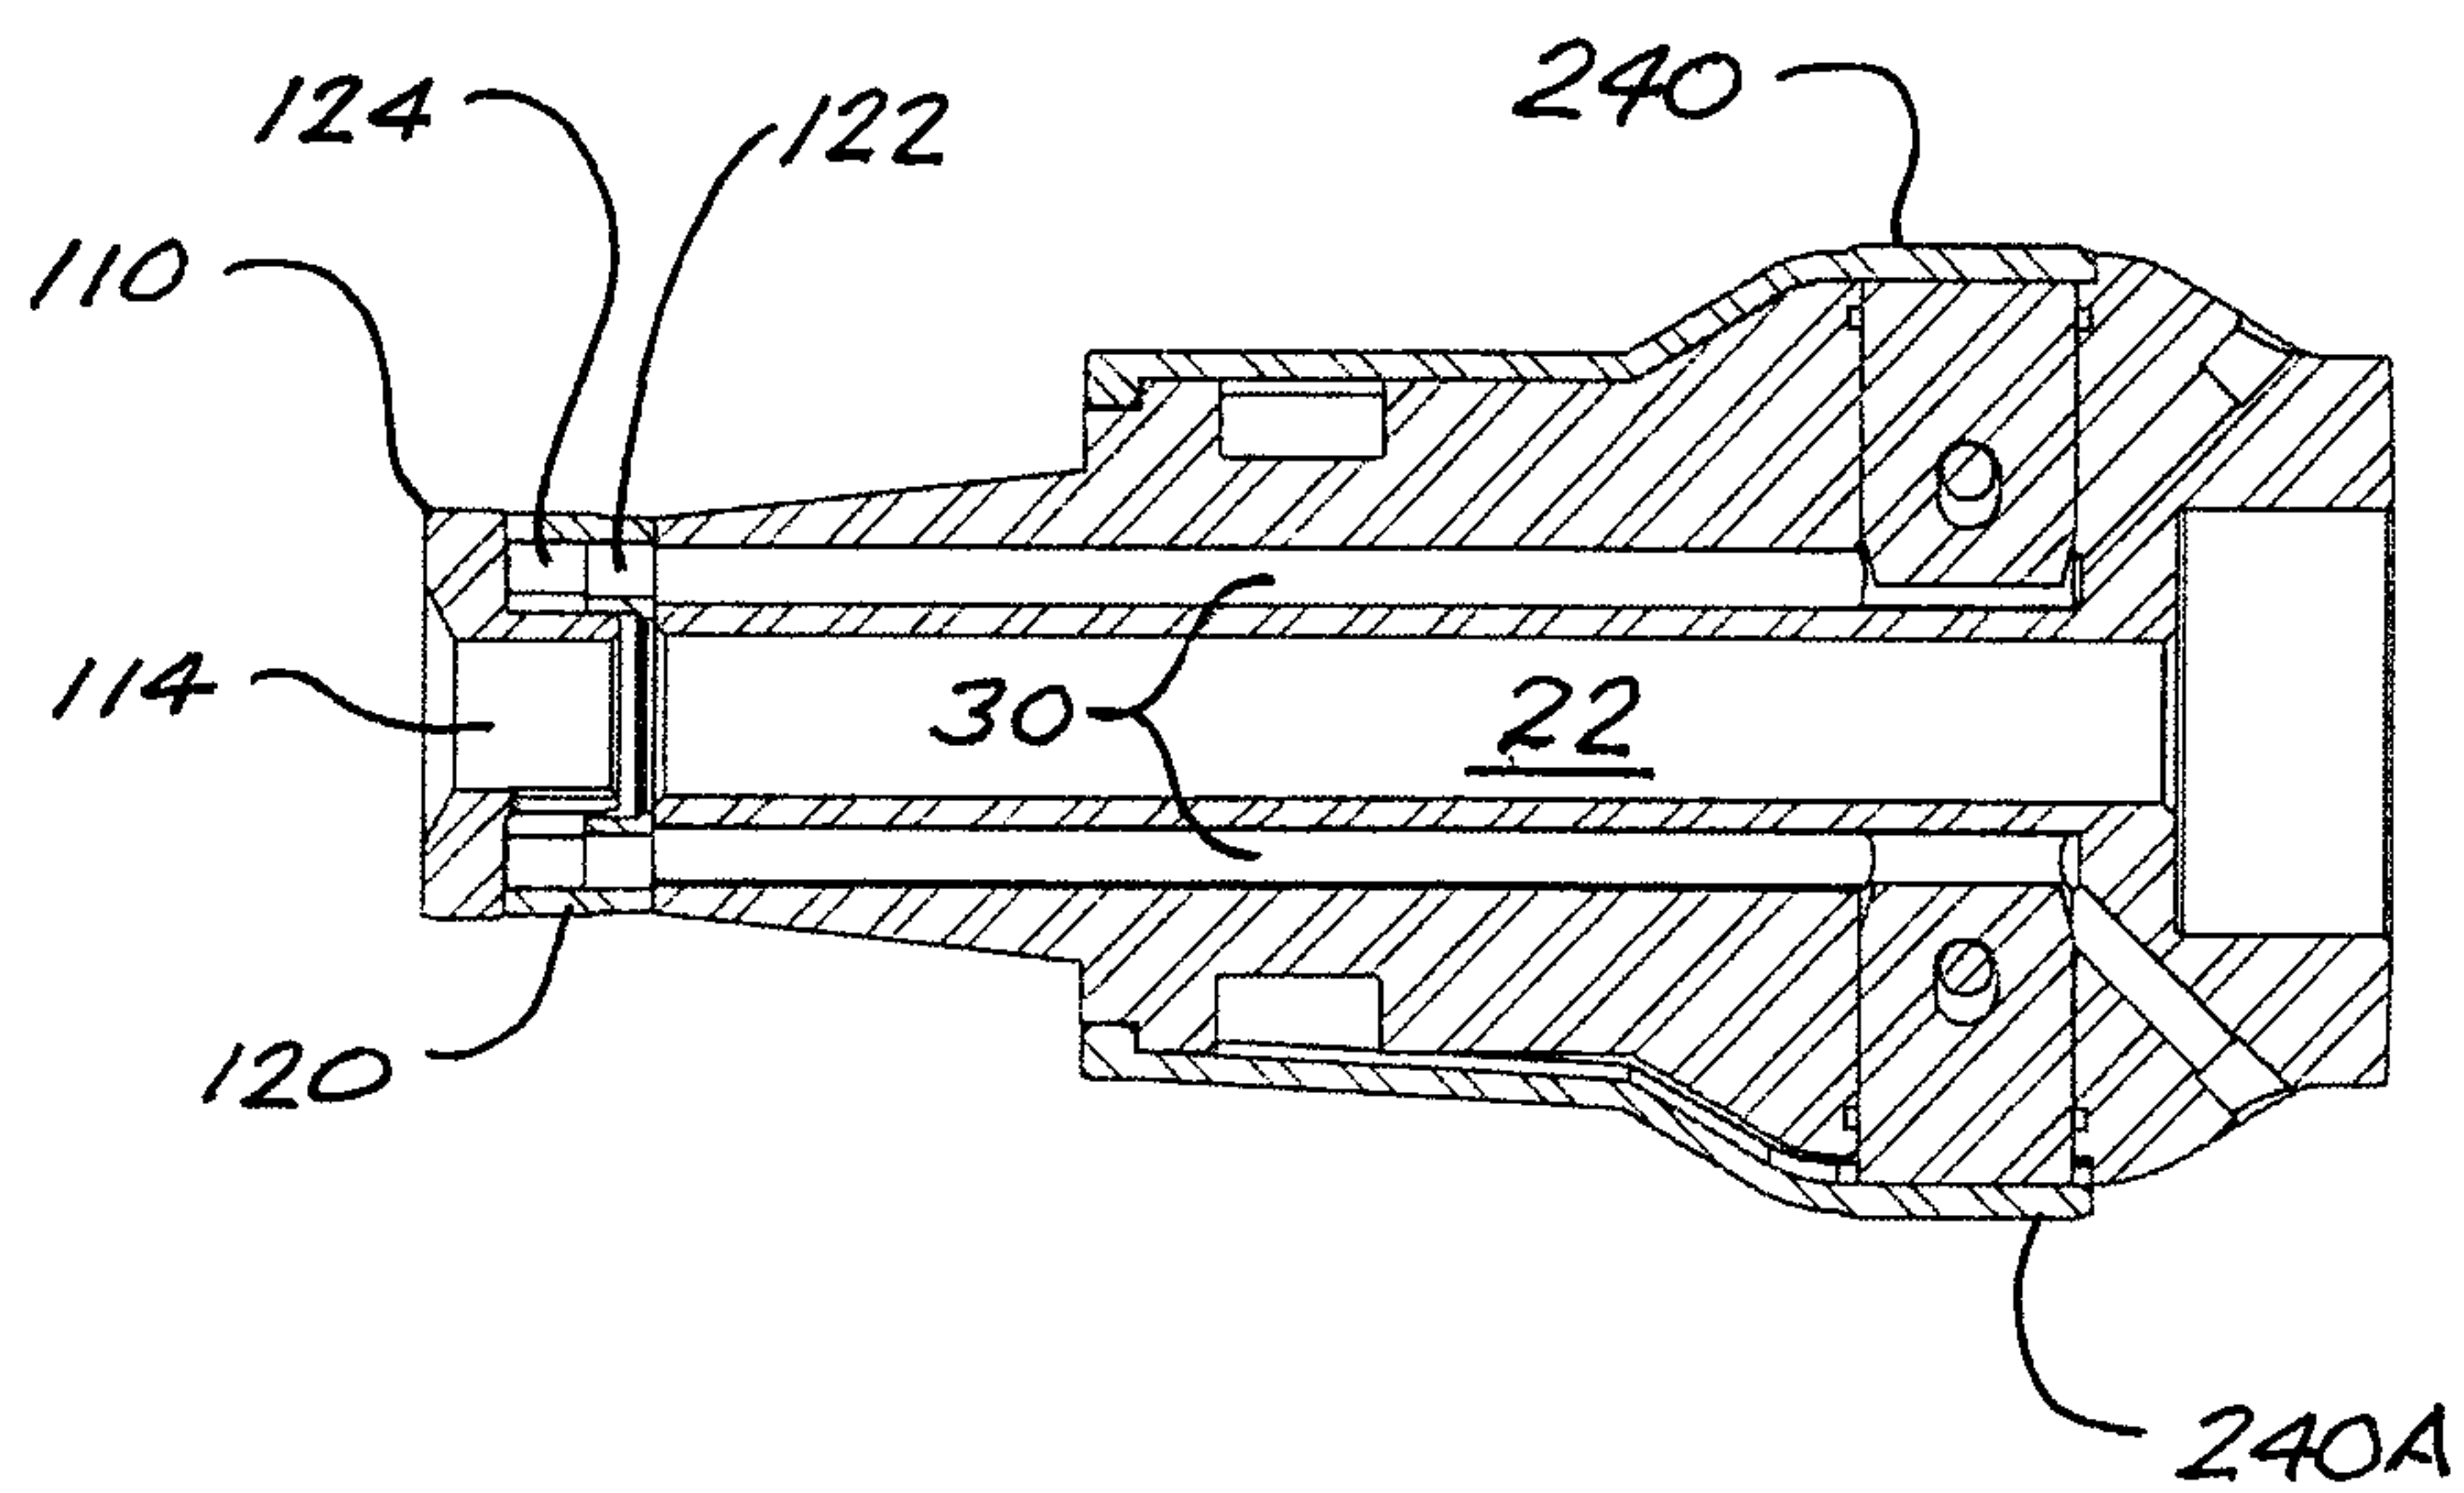


FIG. 16D

21 / 23

FIG. 19A


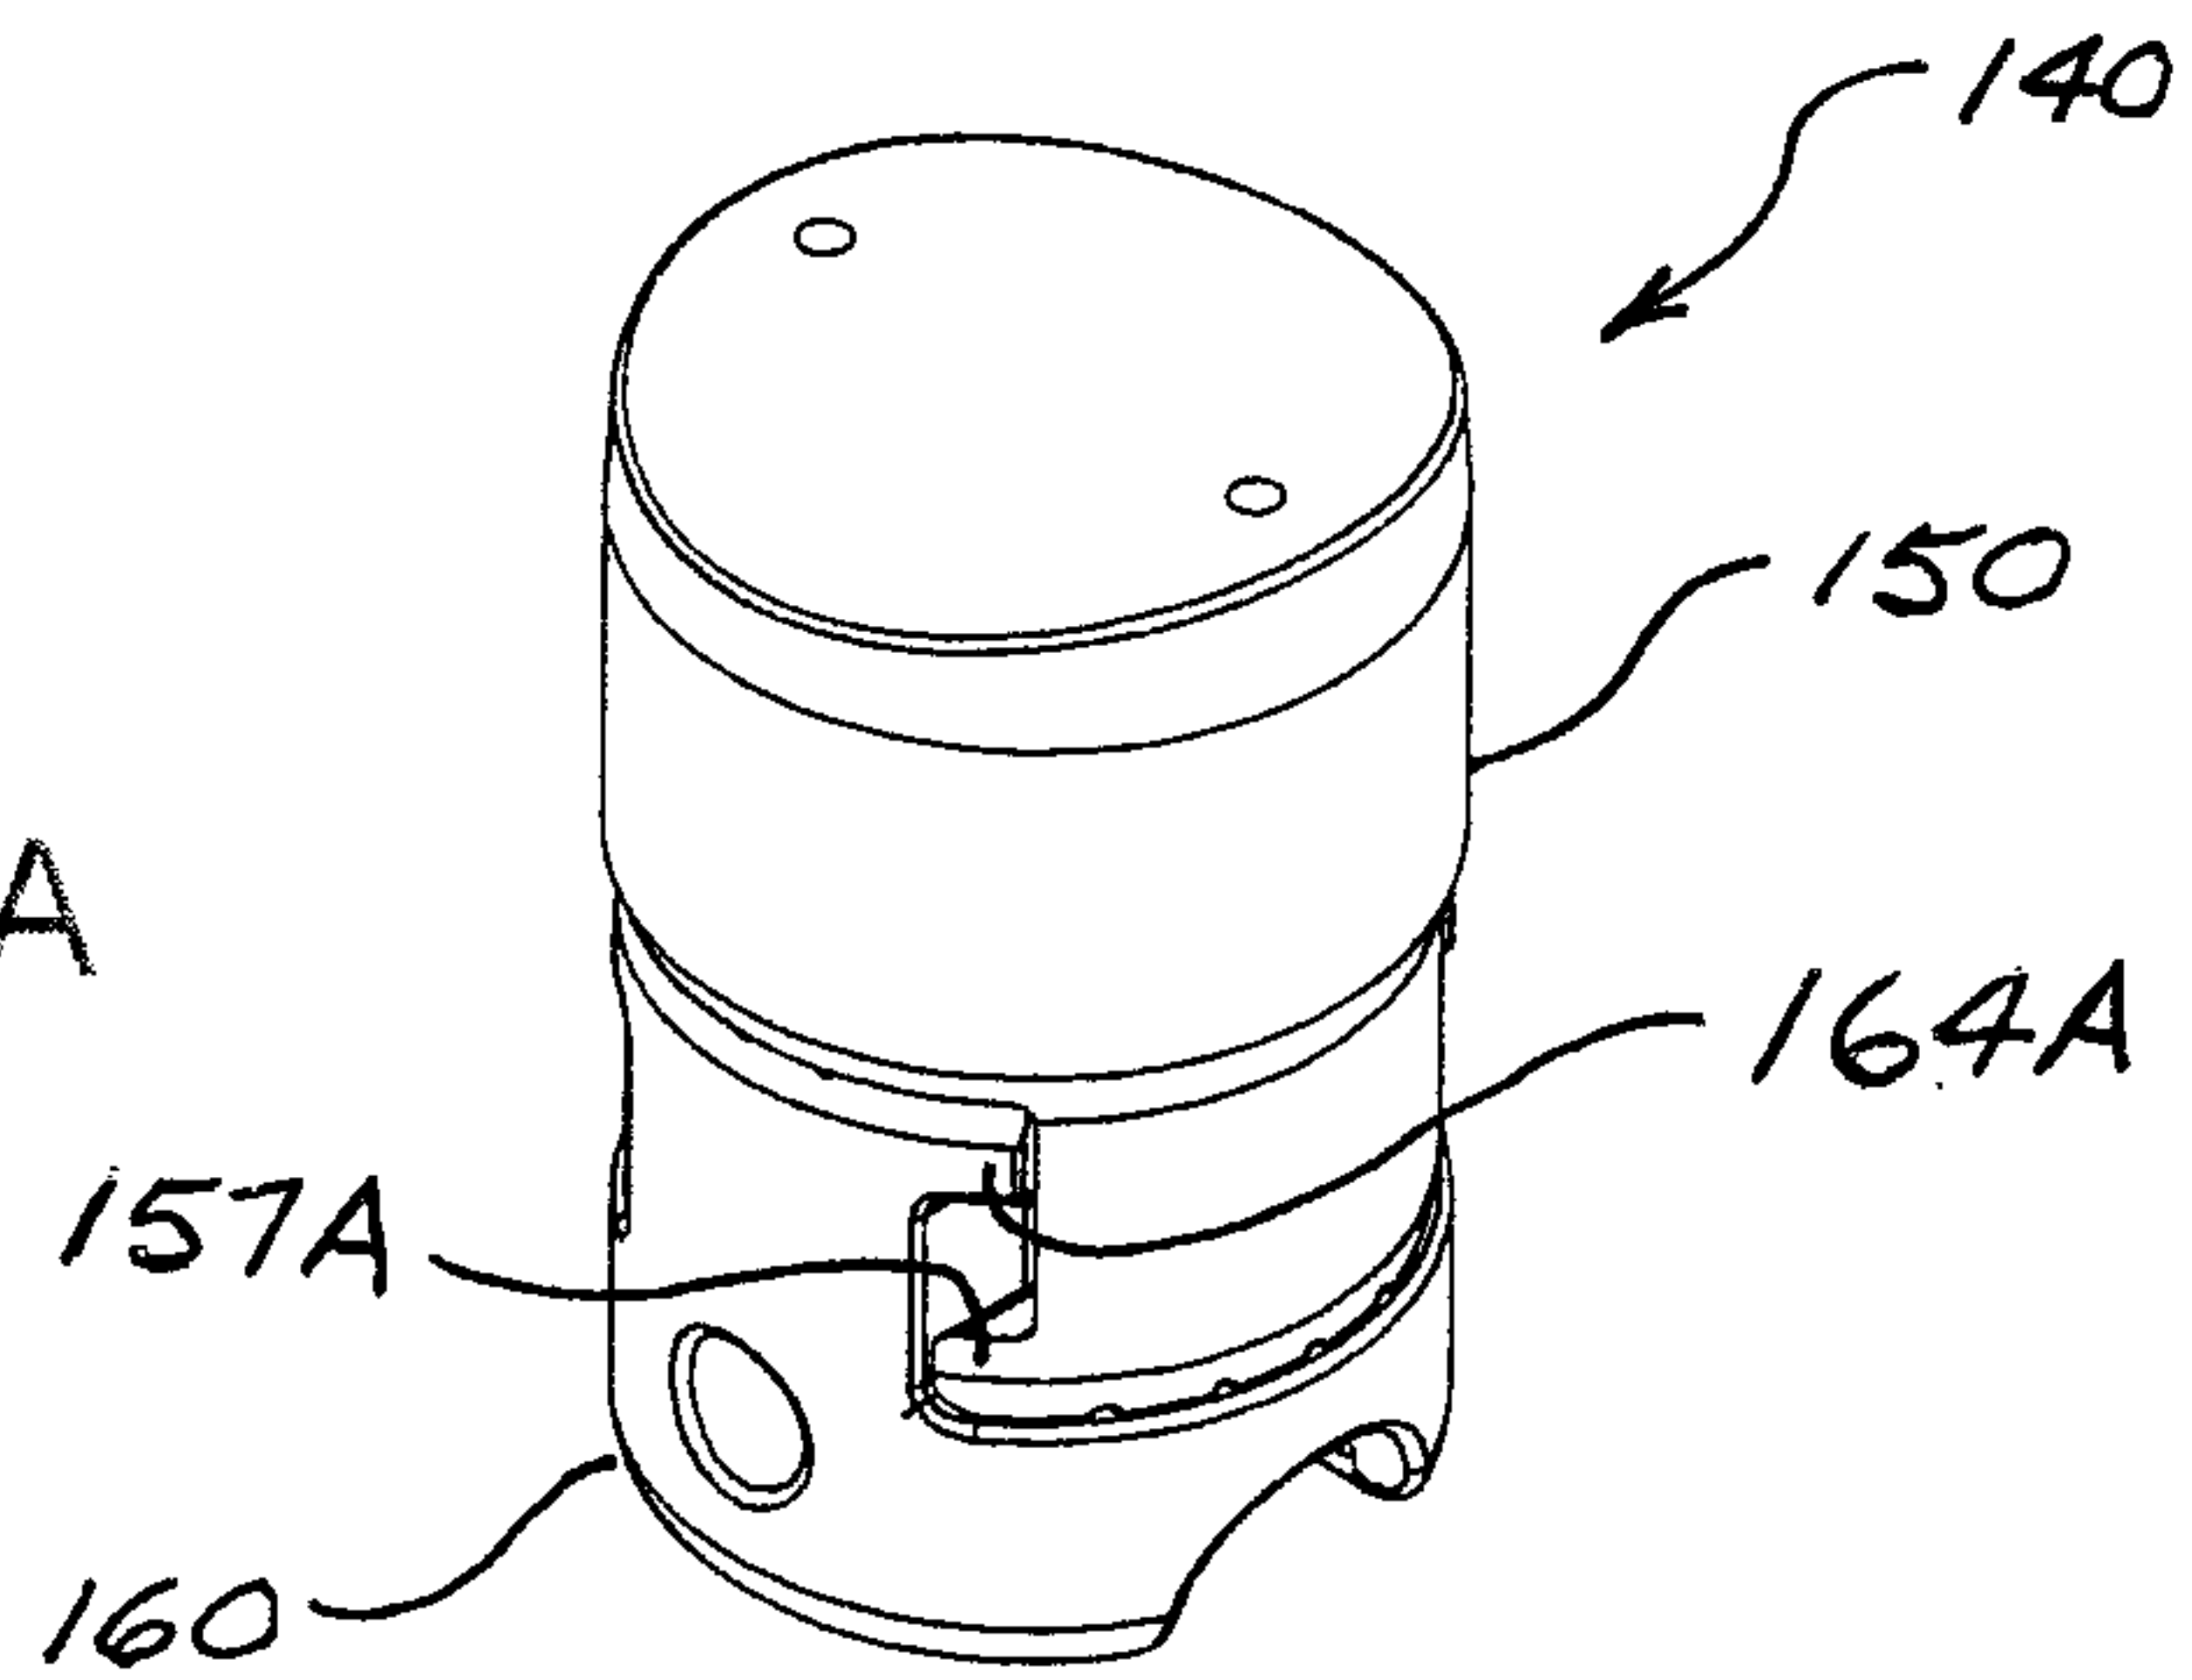


FIG. 19B

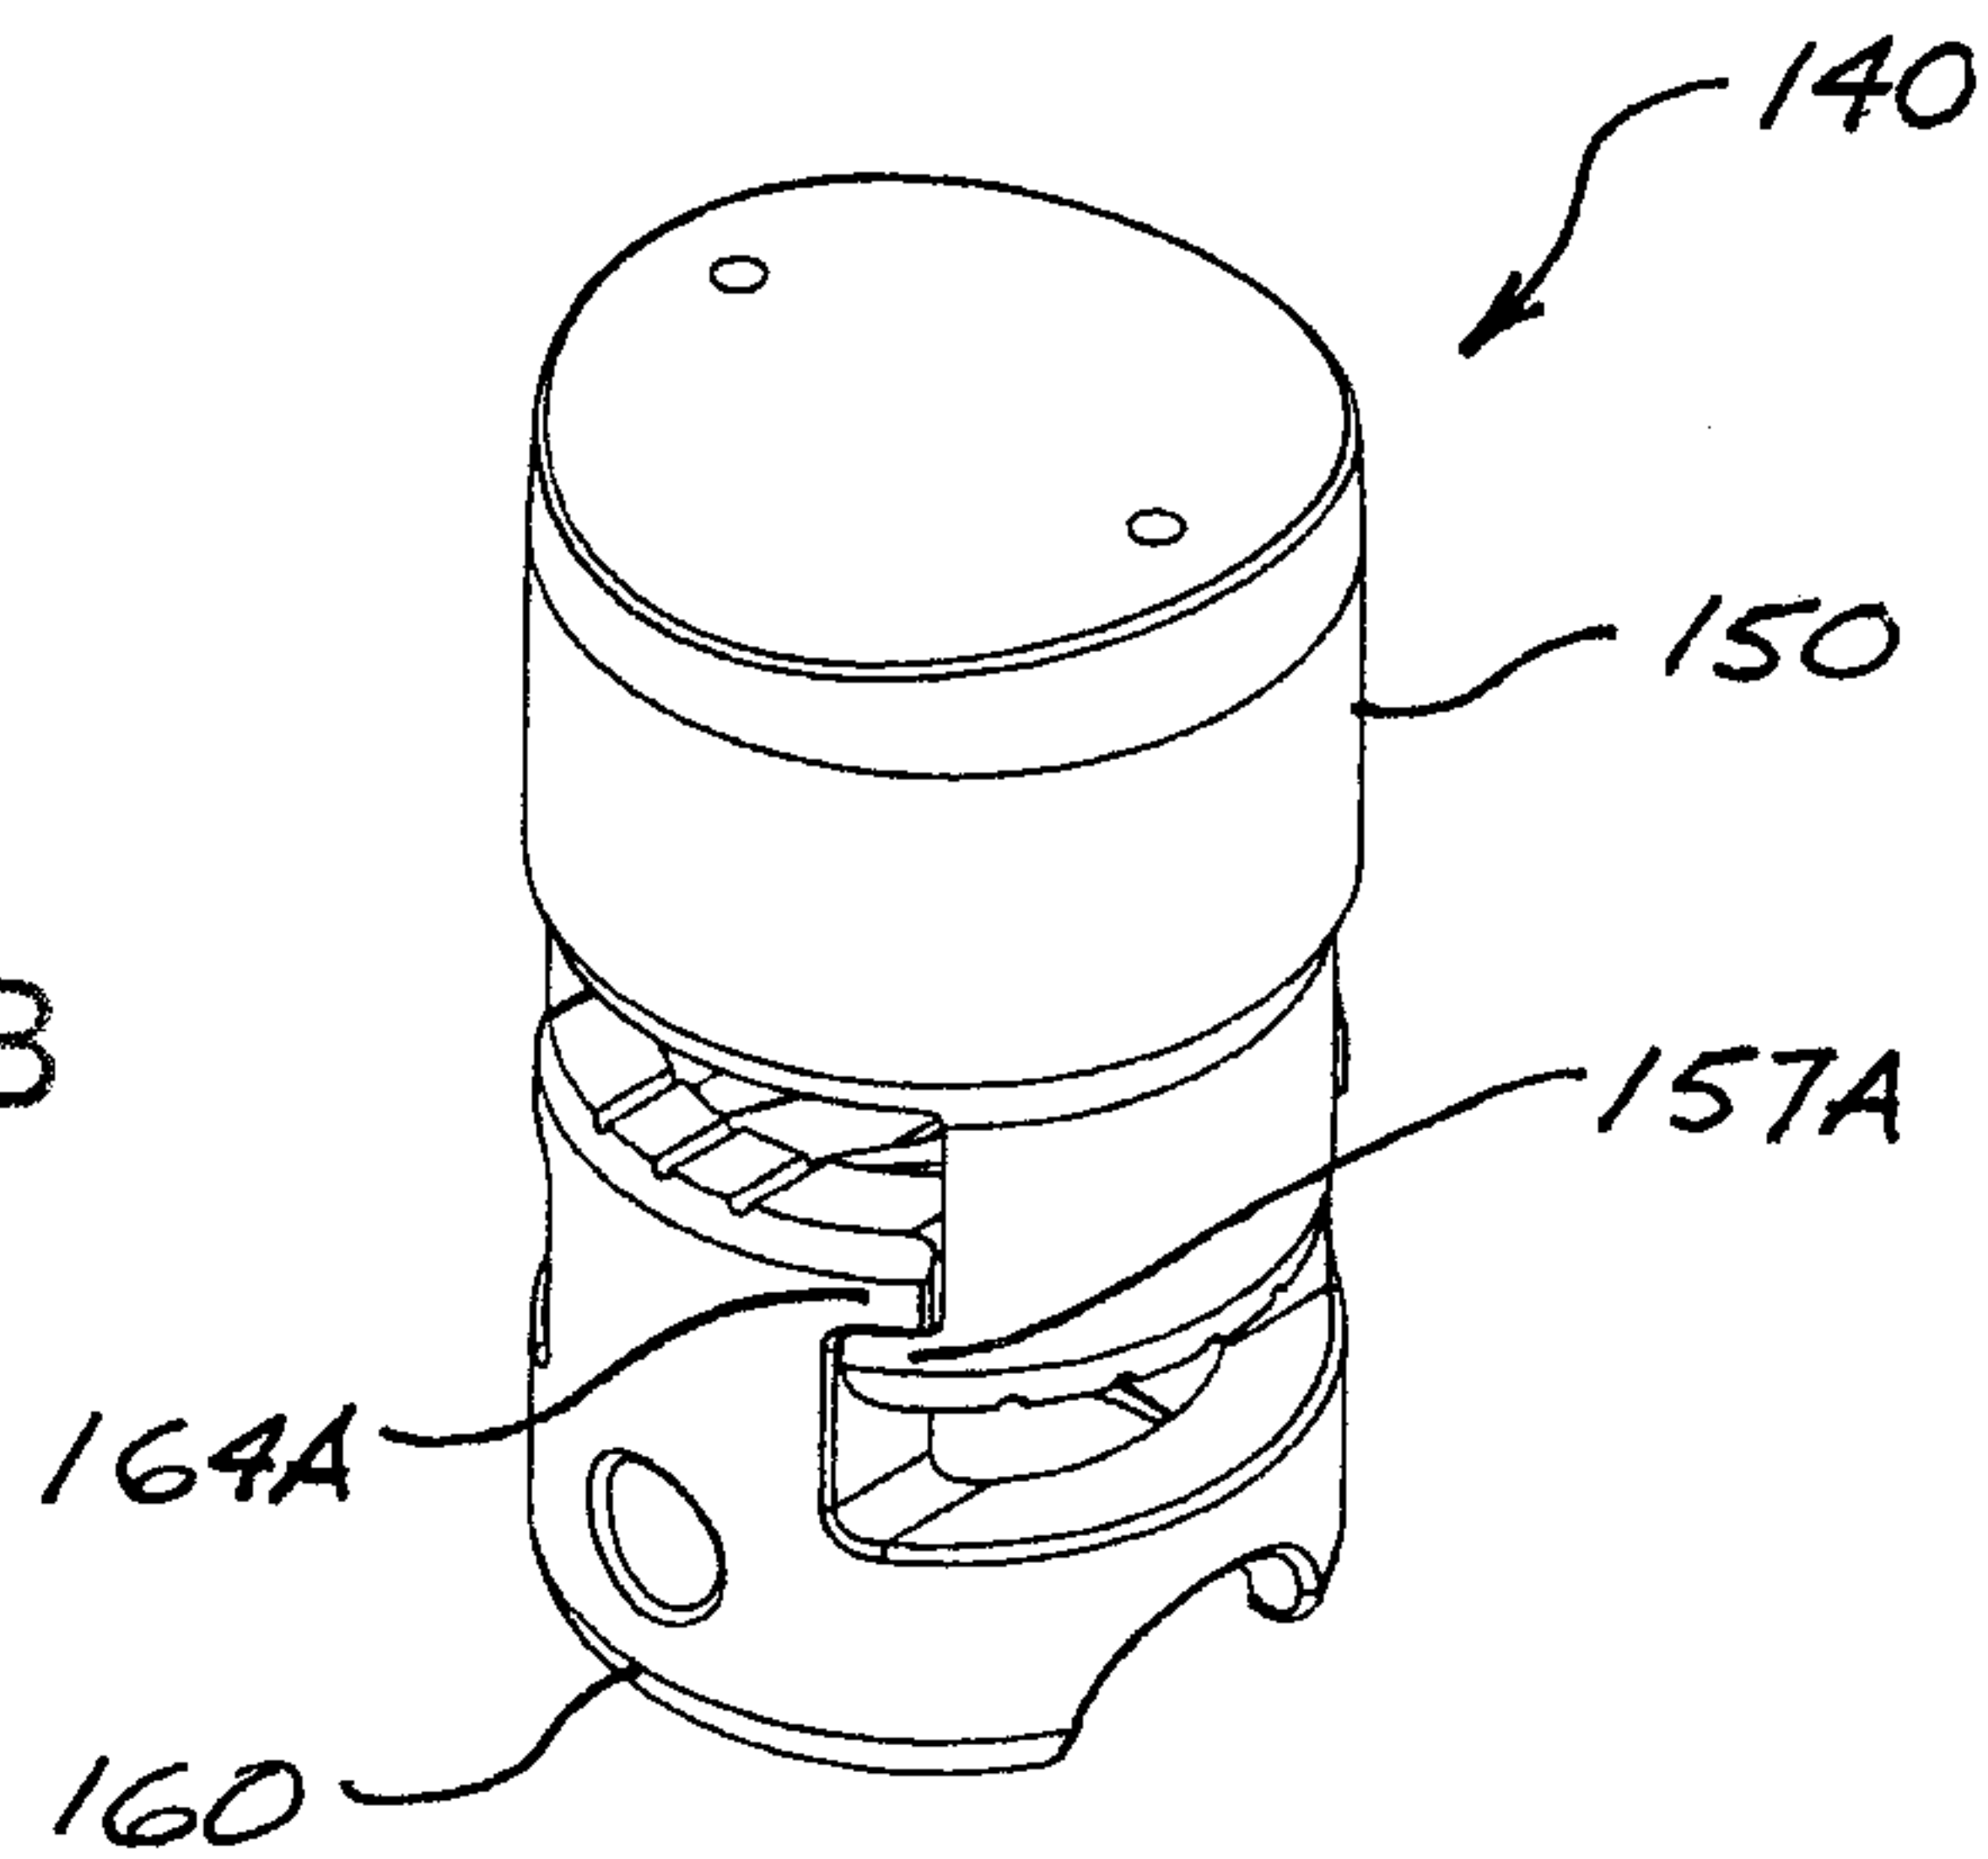

22 / 23

FIG. 20A

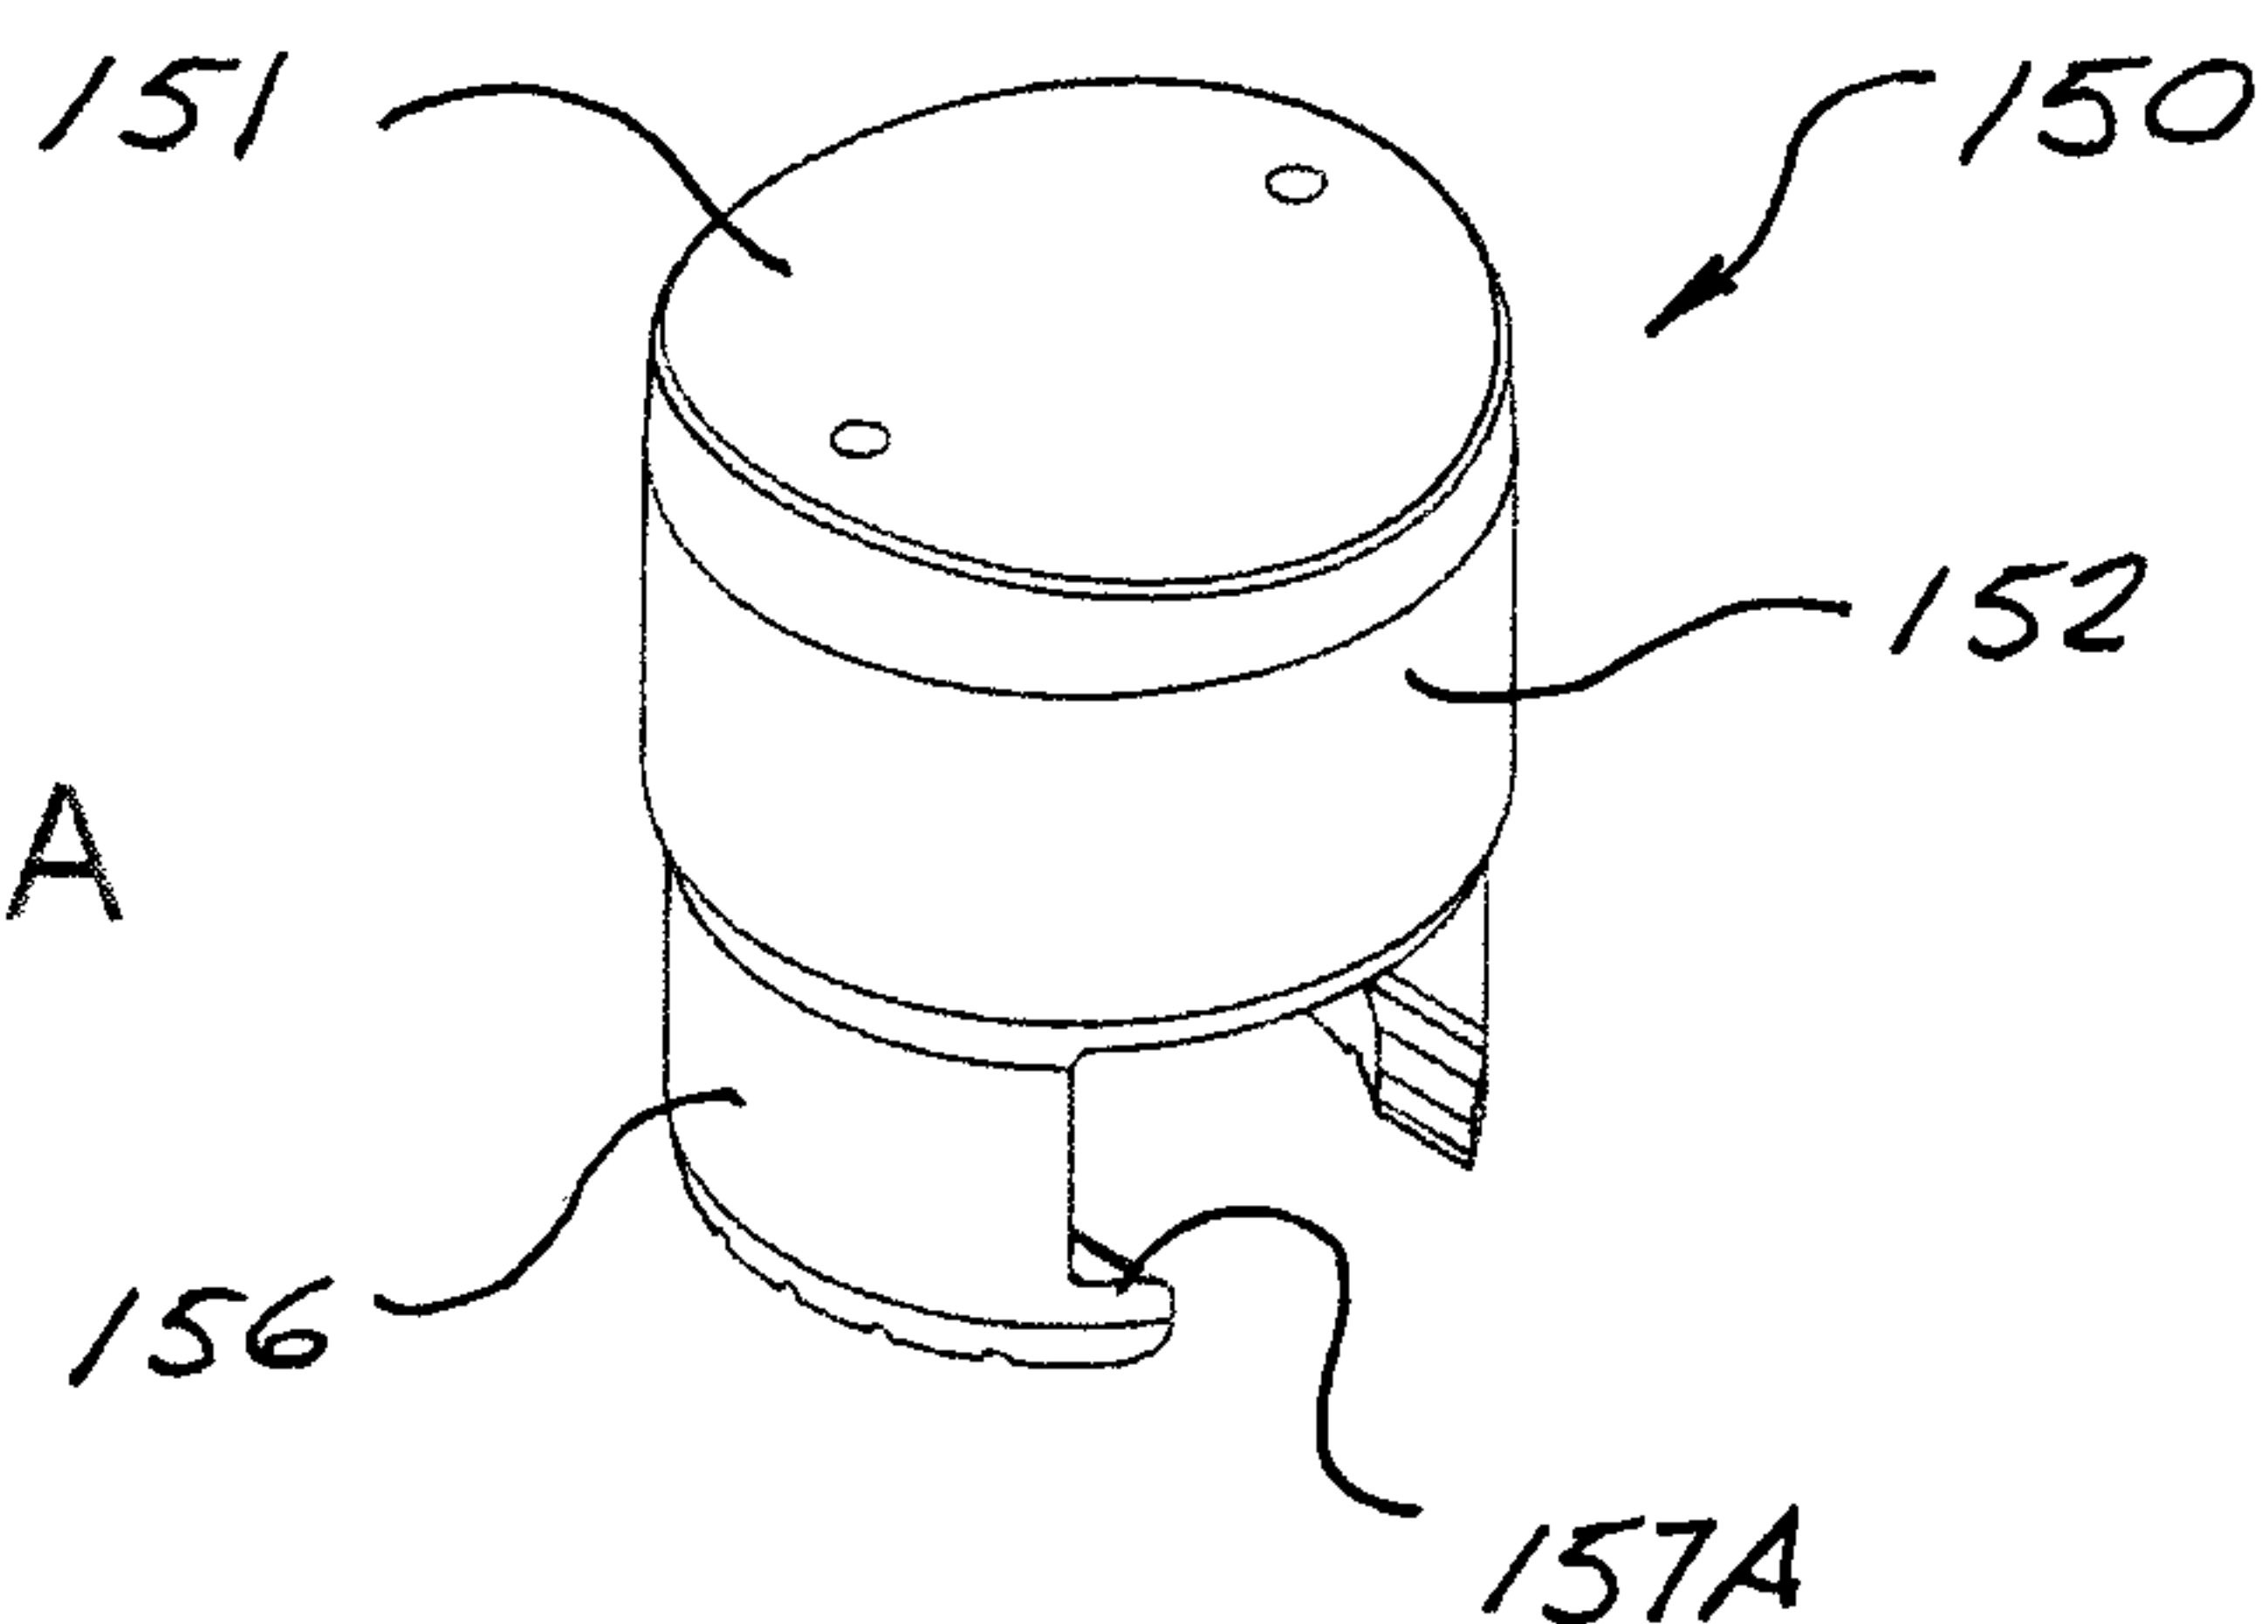


FIG. 20B


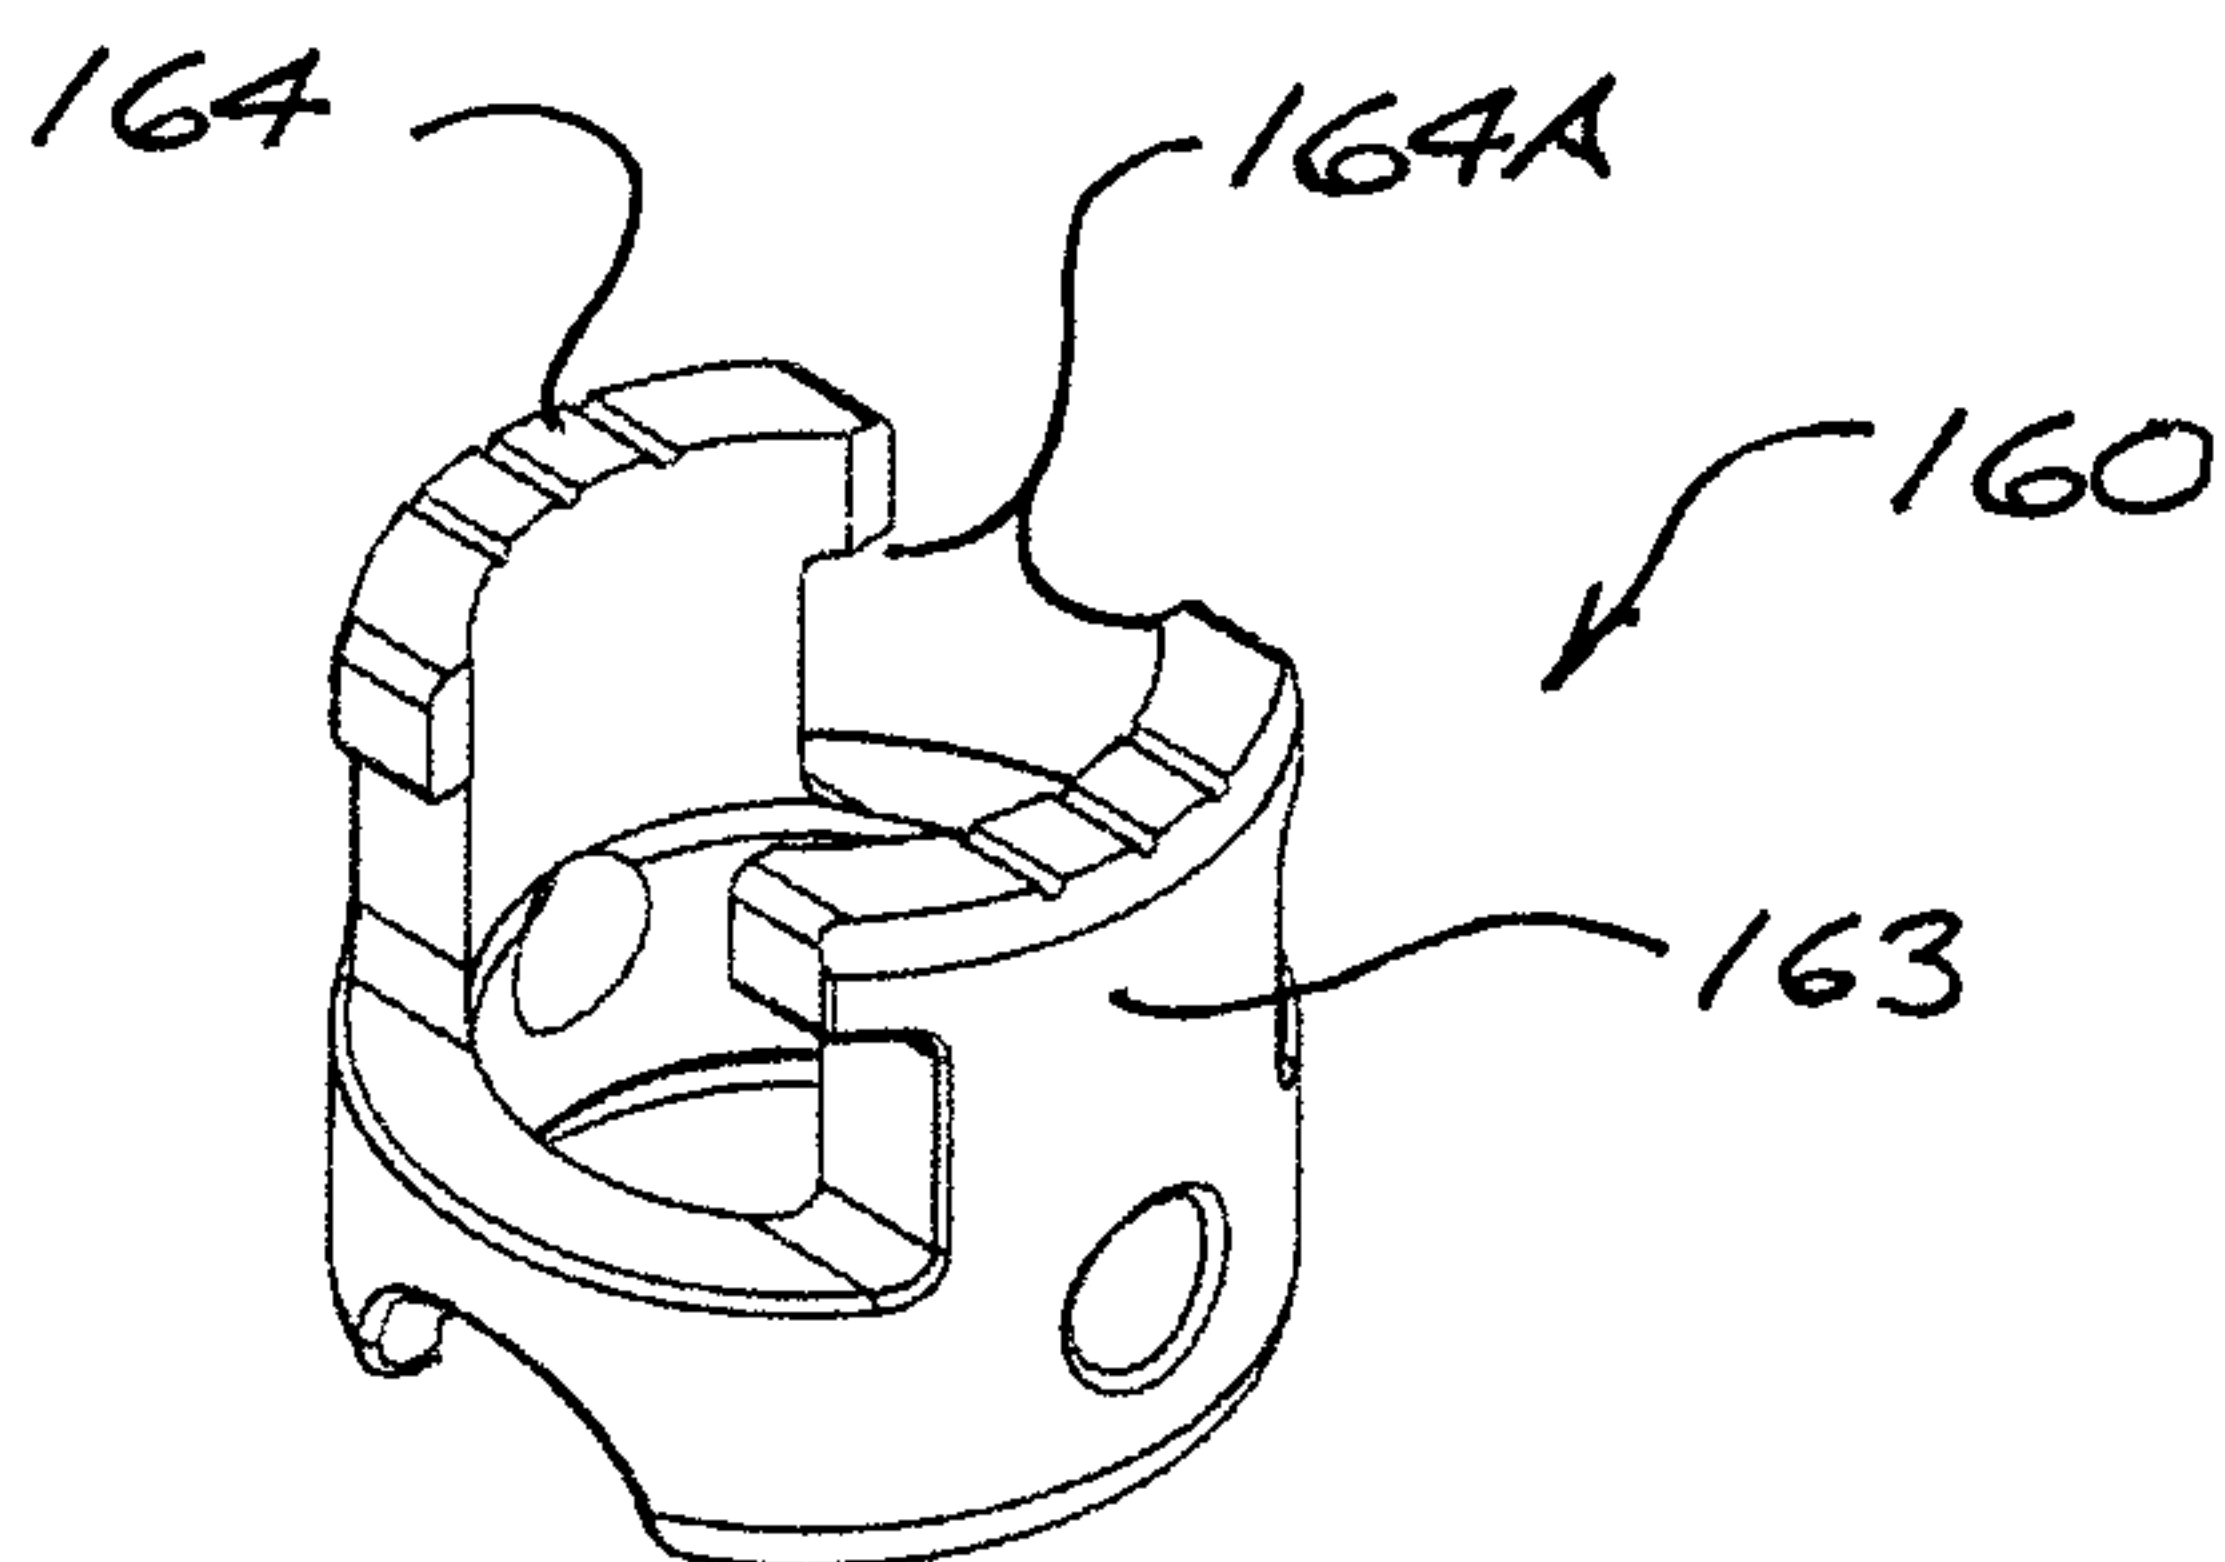


FIG. 21

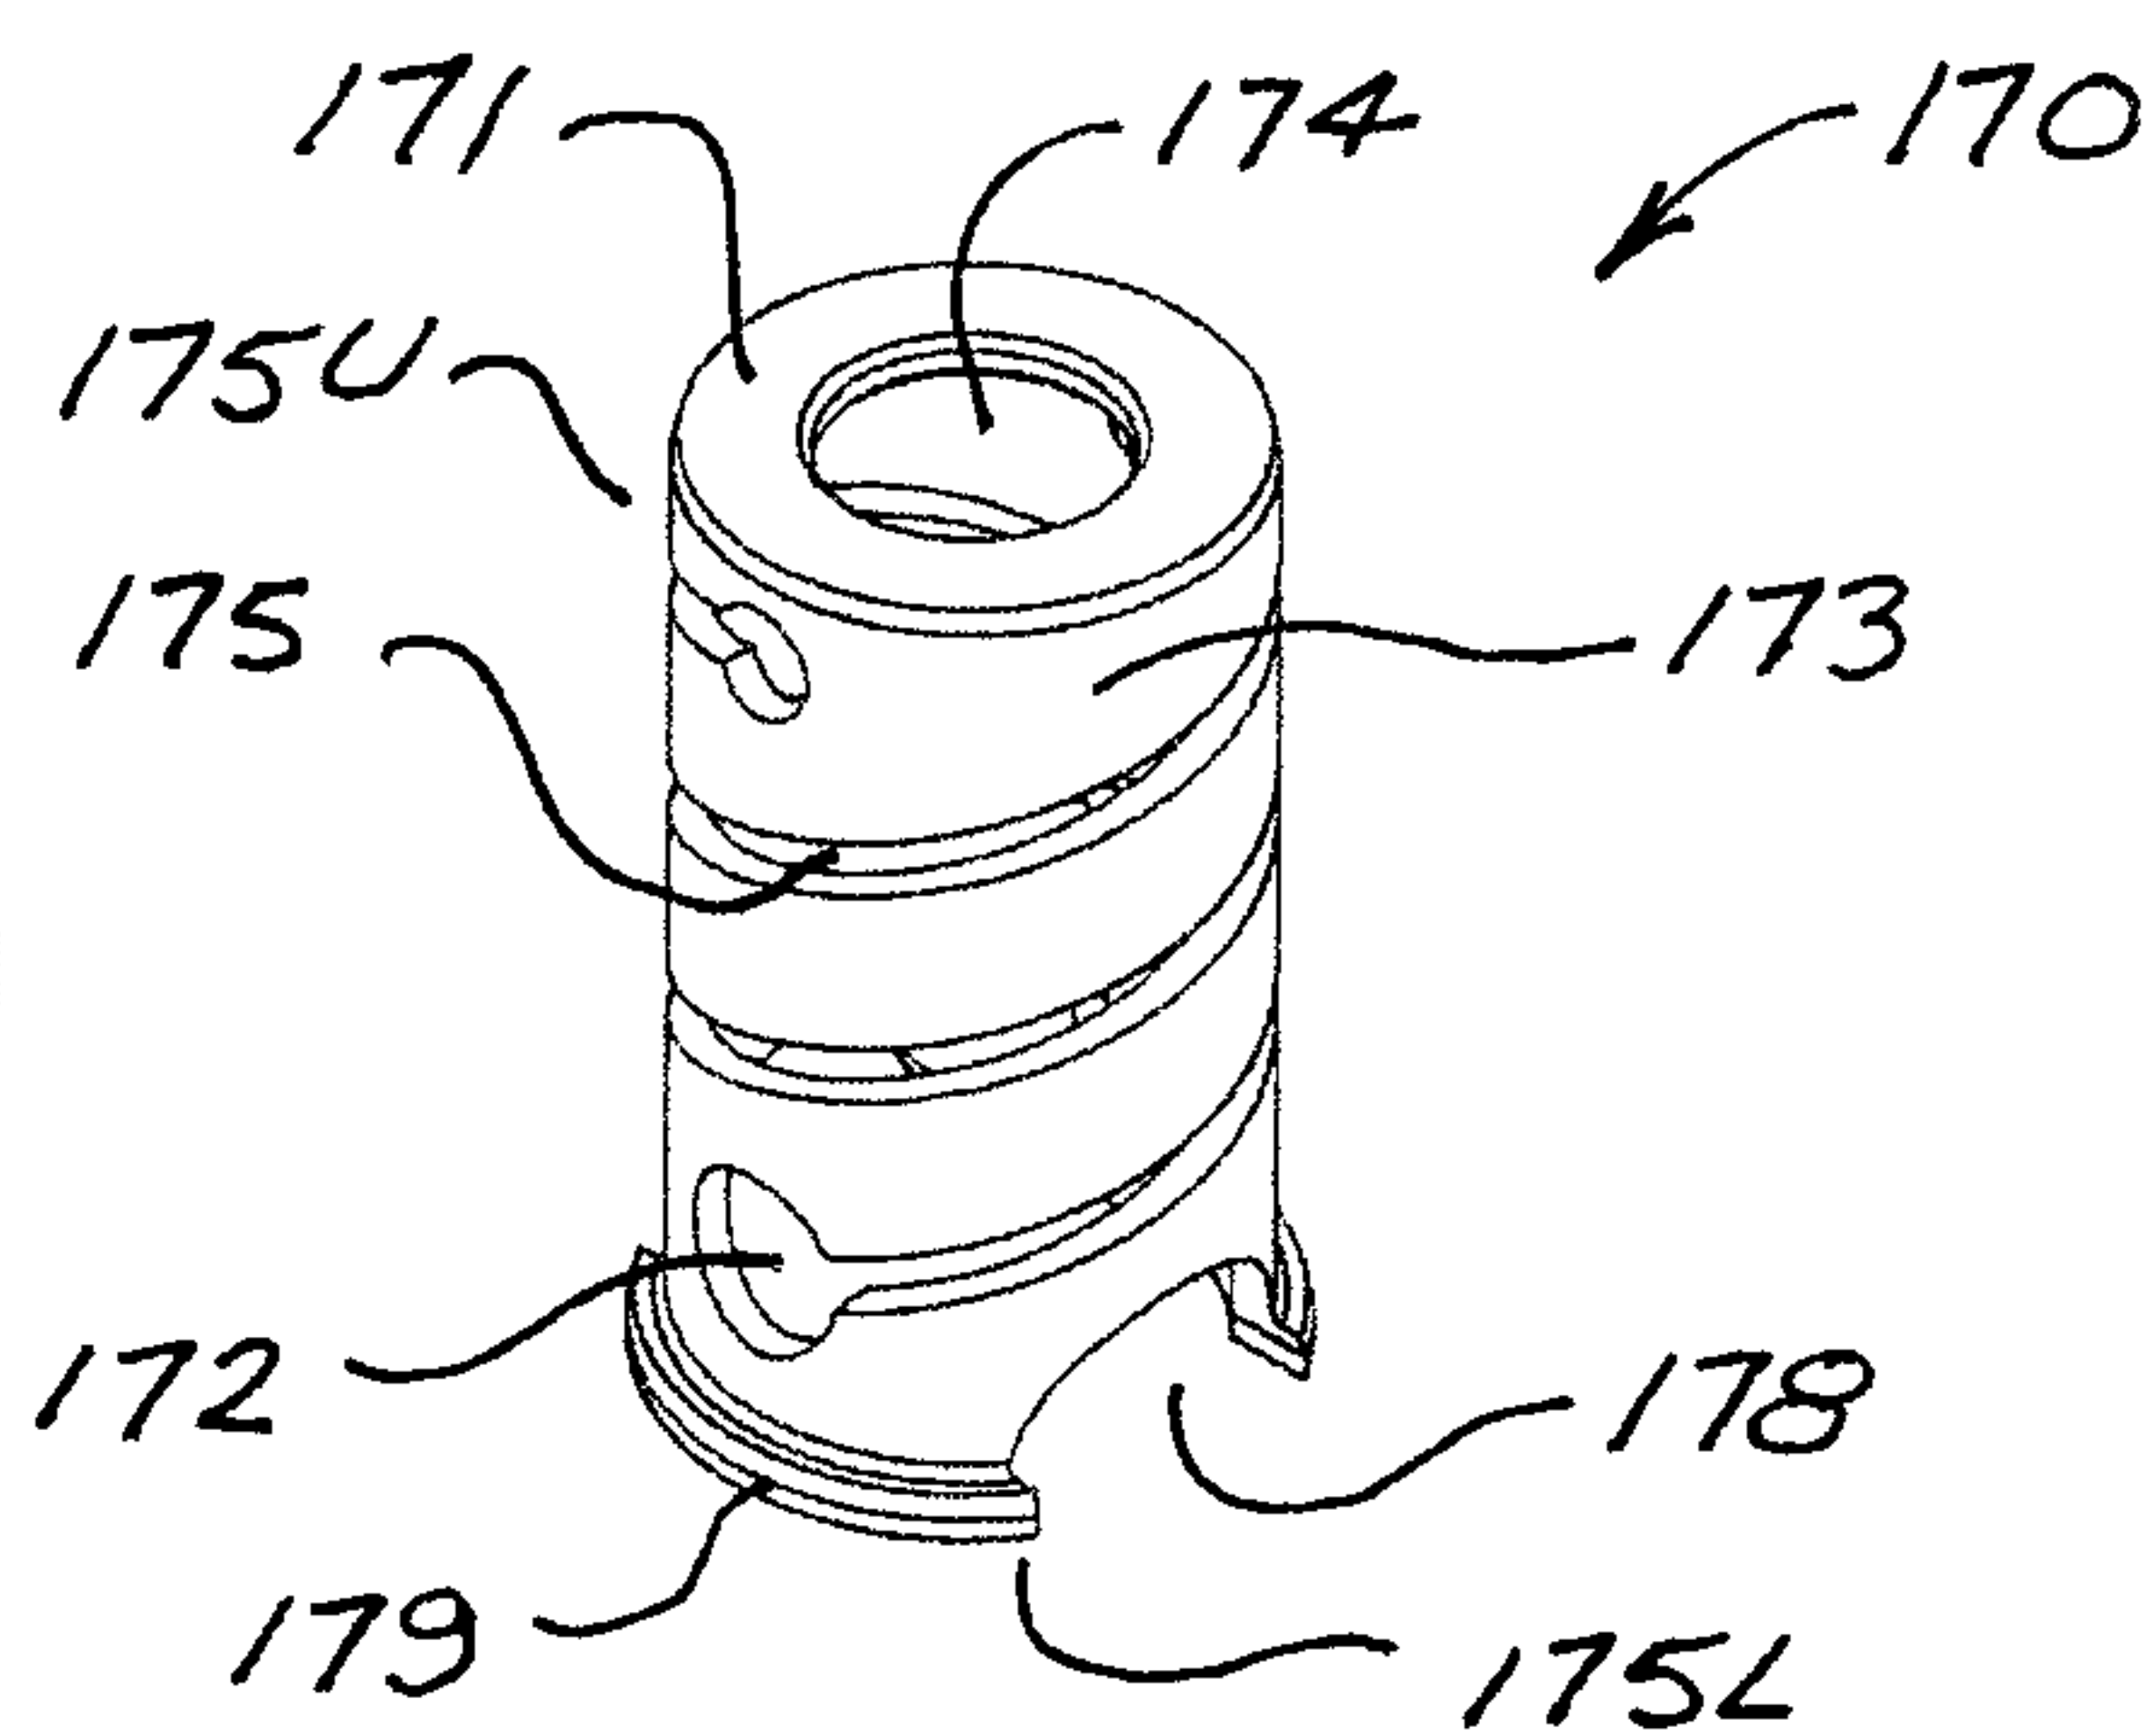

23 / 23

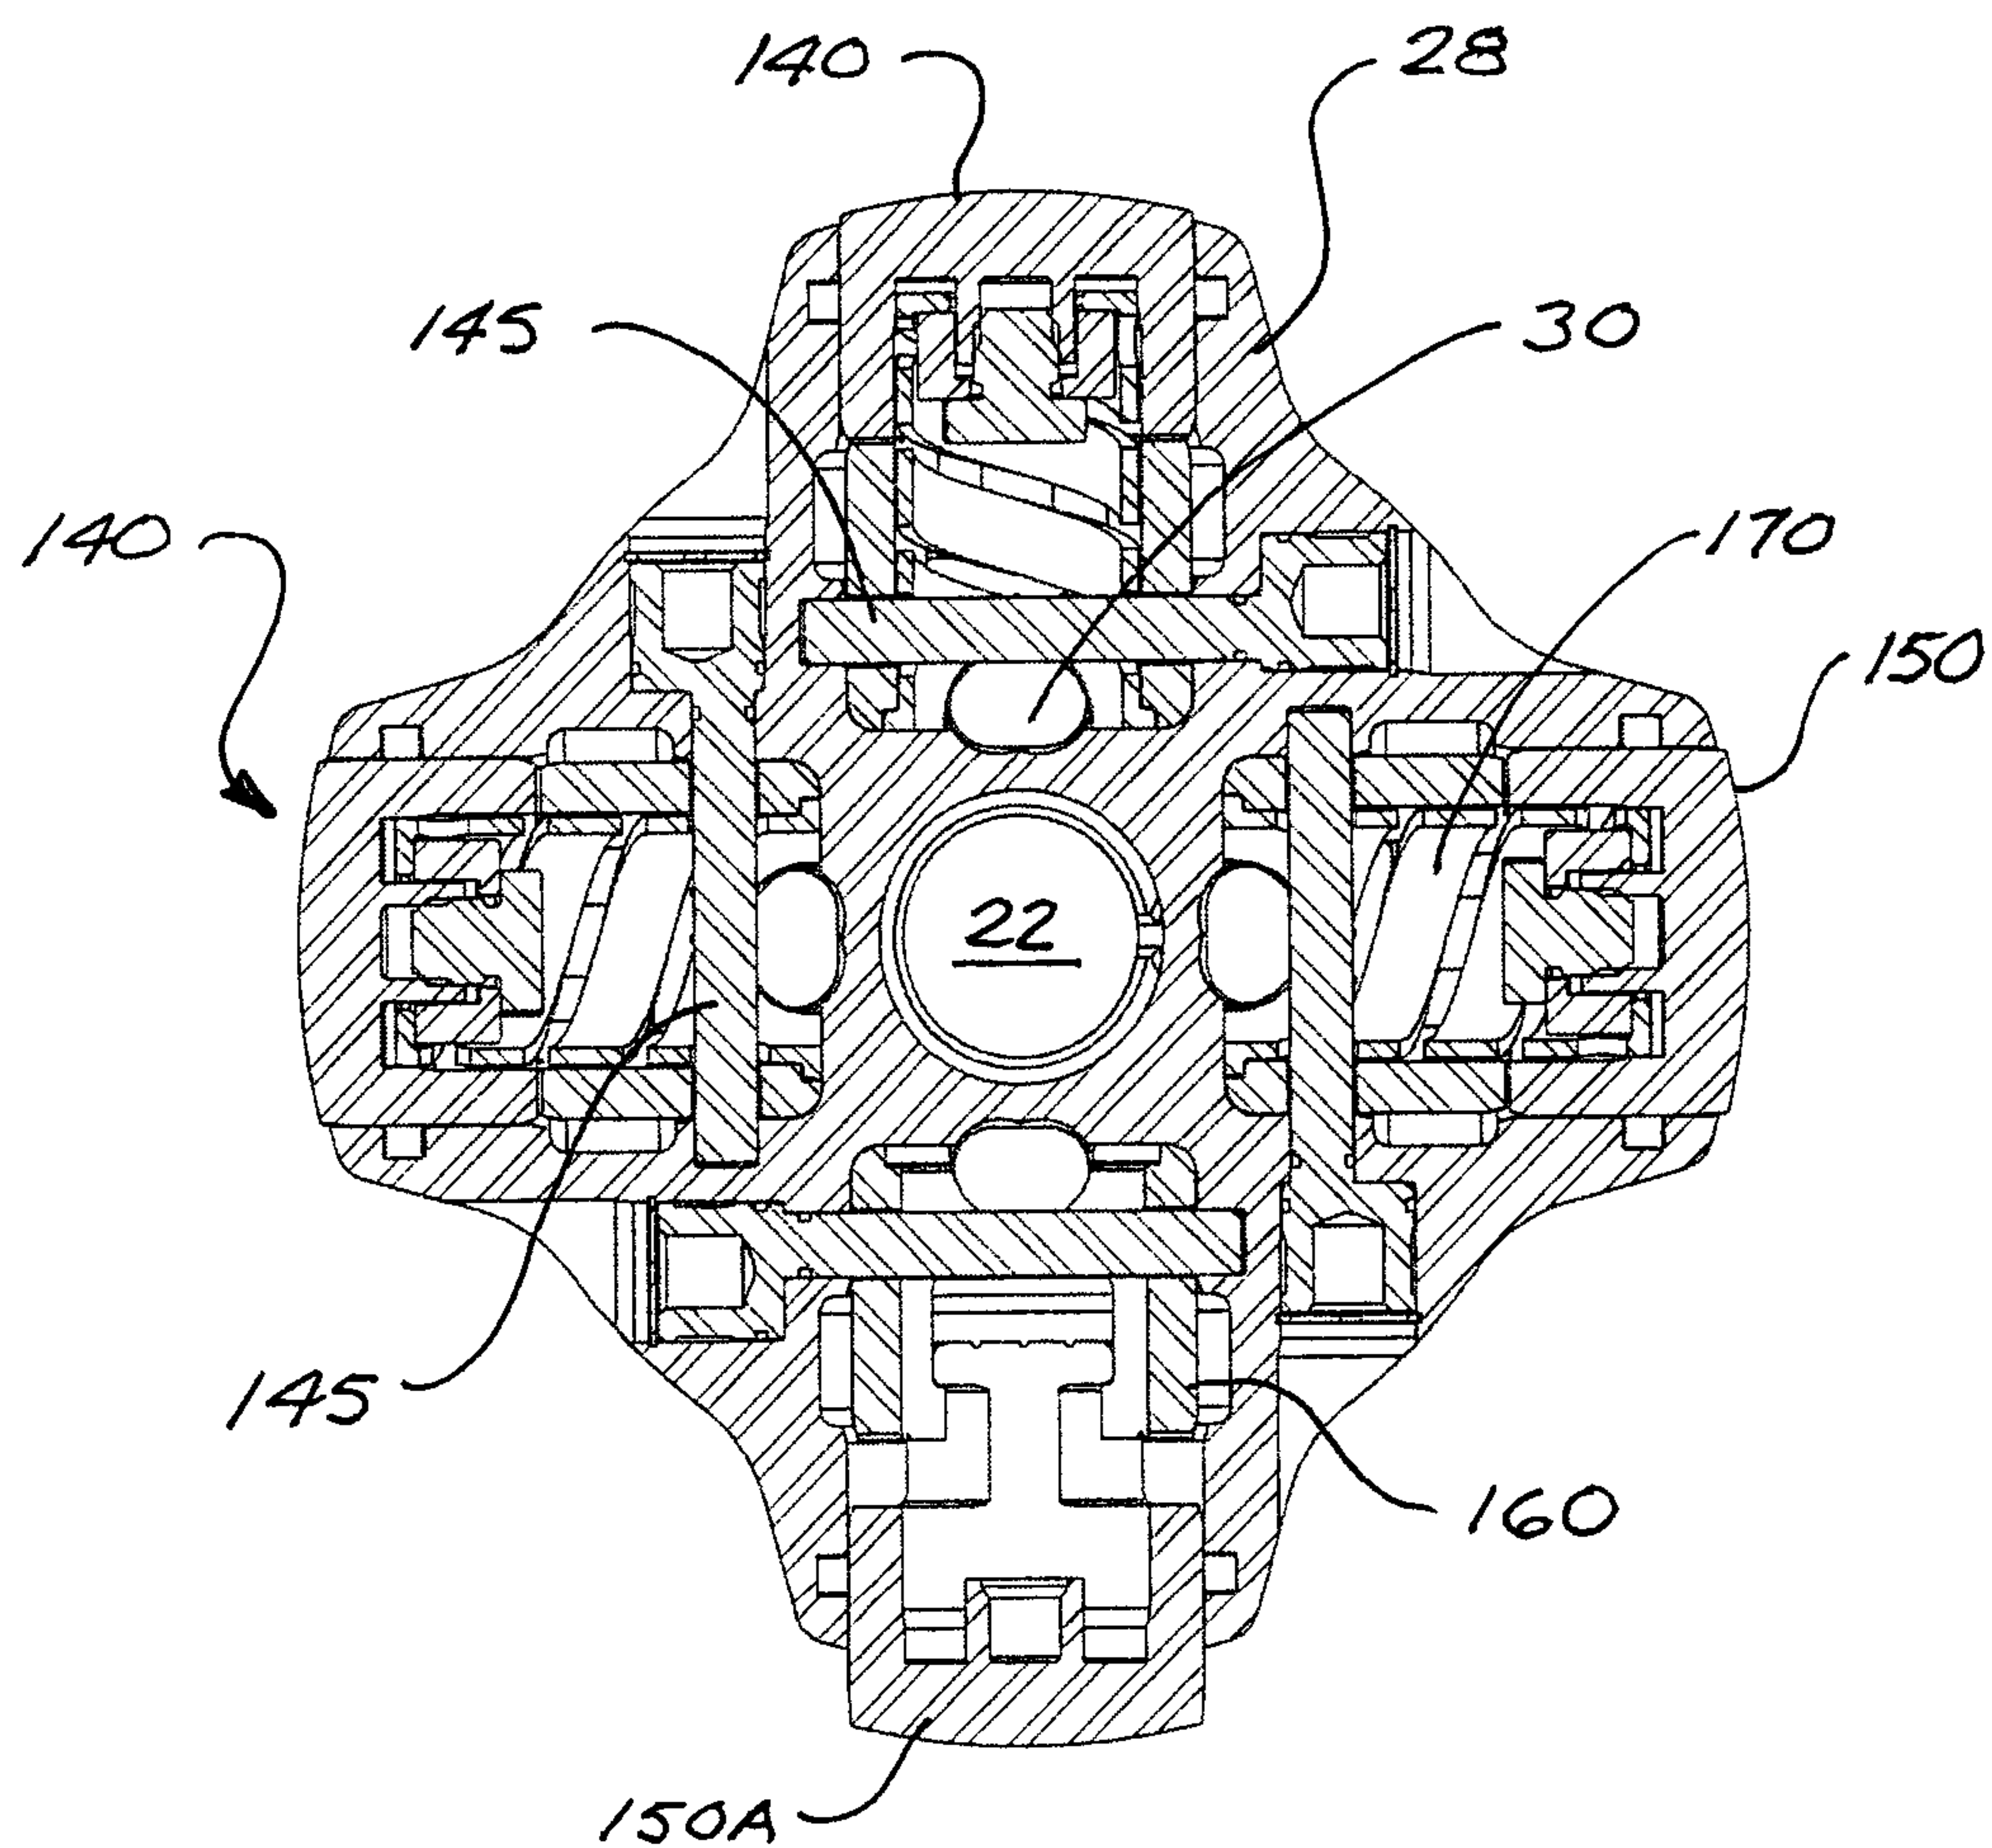


FIG. 22

