




(86) Date de dépôt PCT/PCT Filing Date: 2004/10/13
(87) Date publication PCT/PCT Publication Date: 2005/04/28
(45) Date de délivrance/Issue Date: 2011/03/08
(85) Entrée phase nationale/National Entry: 2006/04/05
(86) N° demande PCT/PCT Application No.: SE 2004/001463
(87) N° publication PCT/PCT Publication No.: 2005/037532
(30) Priorité/Priority: 2003/10/15 (US60/511,106)

(51) Cl.Int./Int.Cl. *B30B 9/02* (2006.01),
C02F 11/12 (2006.01)
(72) Inventeur/Inventor:
CHRISTOPHERSON, JESPER, SE
(73) Propriétaire/Owner:
NORDIC WATER PRODUCTS AB, SE
(74) Agent: GOWLING LAFLEUR HENDERSON LLP

(54) Titre : APPAREIL ET PROCEDE POUR TRAITER DES BOUES
(54) Title: APPARATUS AND METHOD FOR TREATING SLUDGE

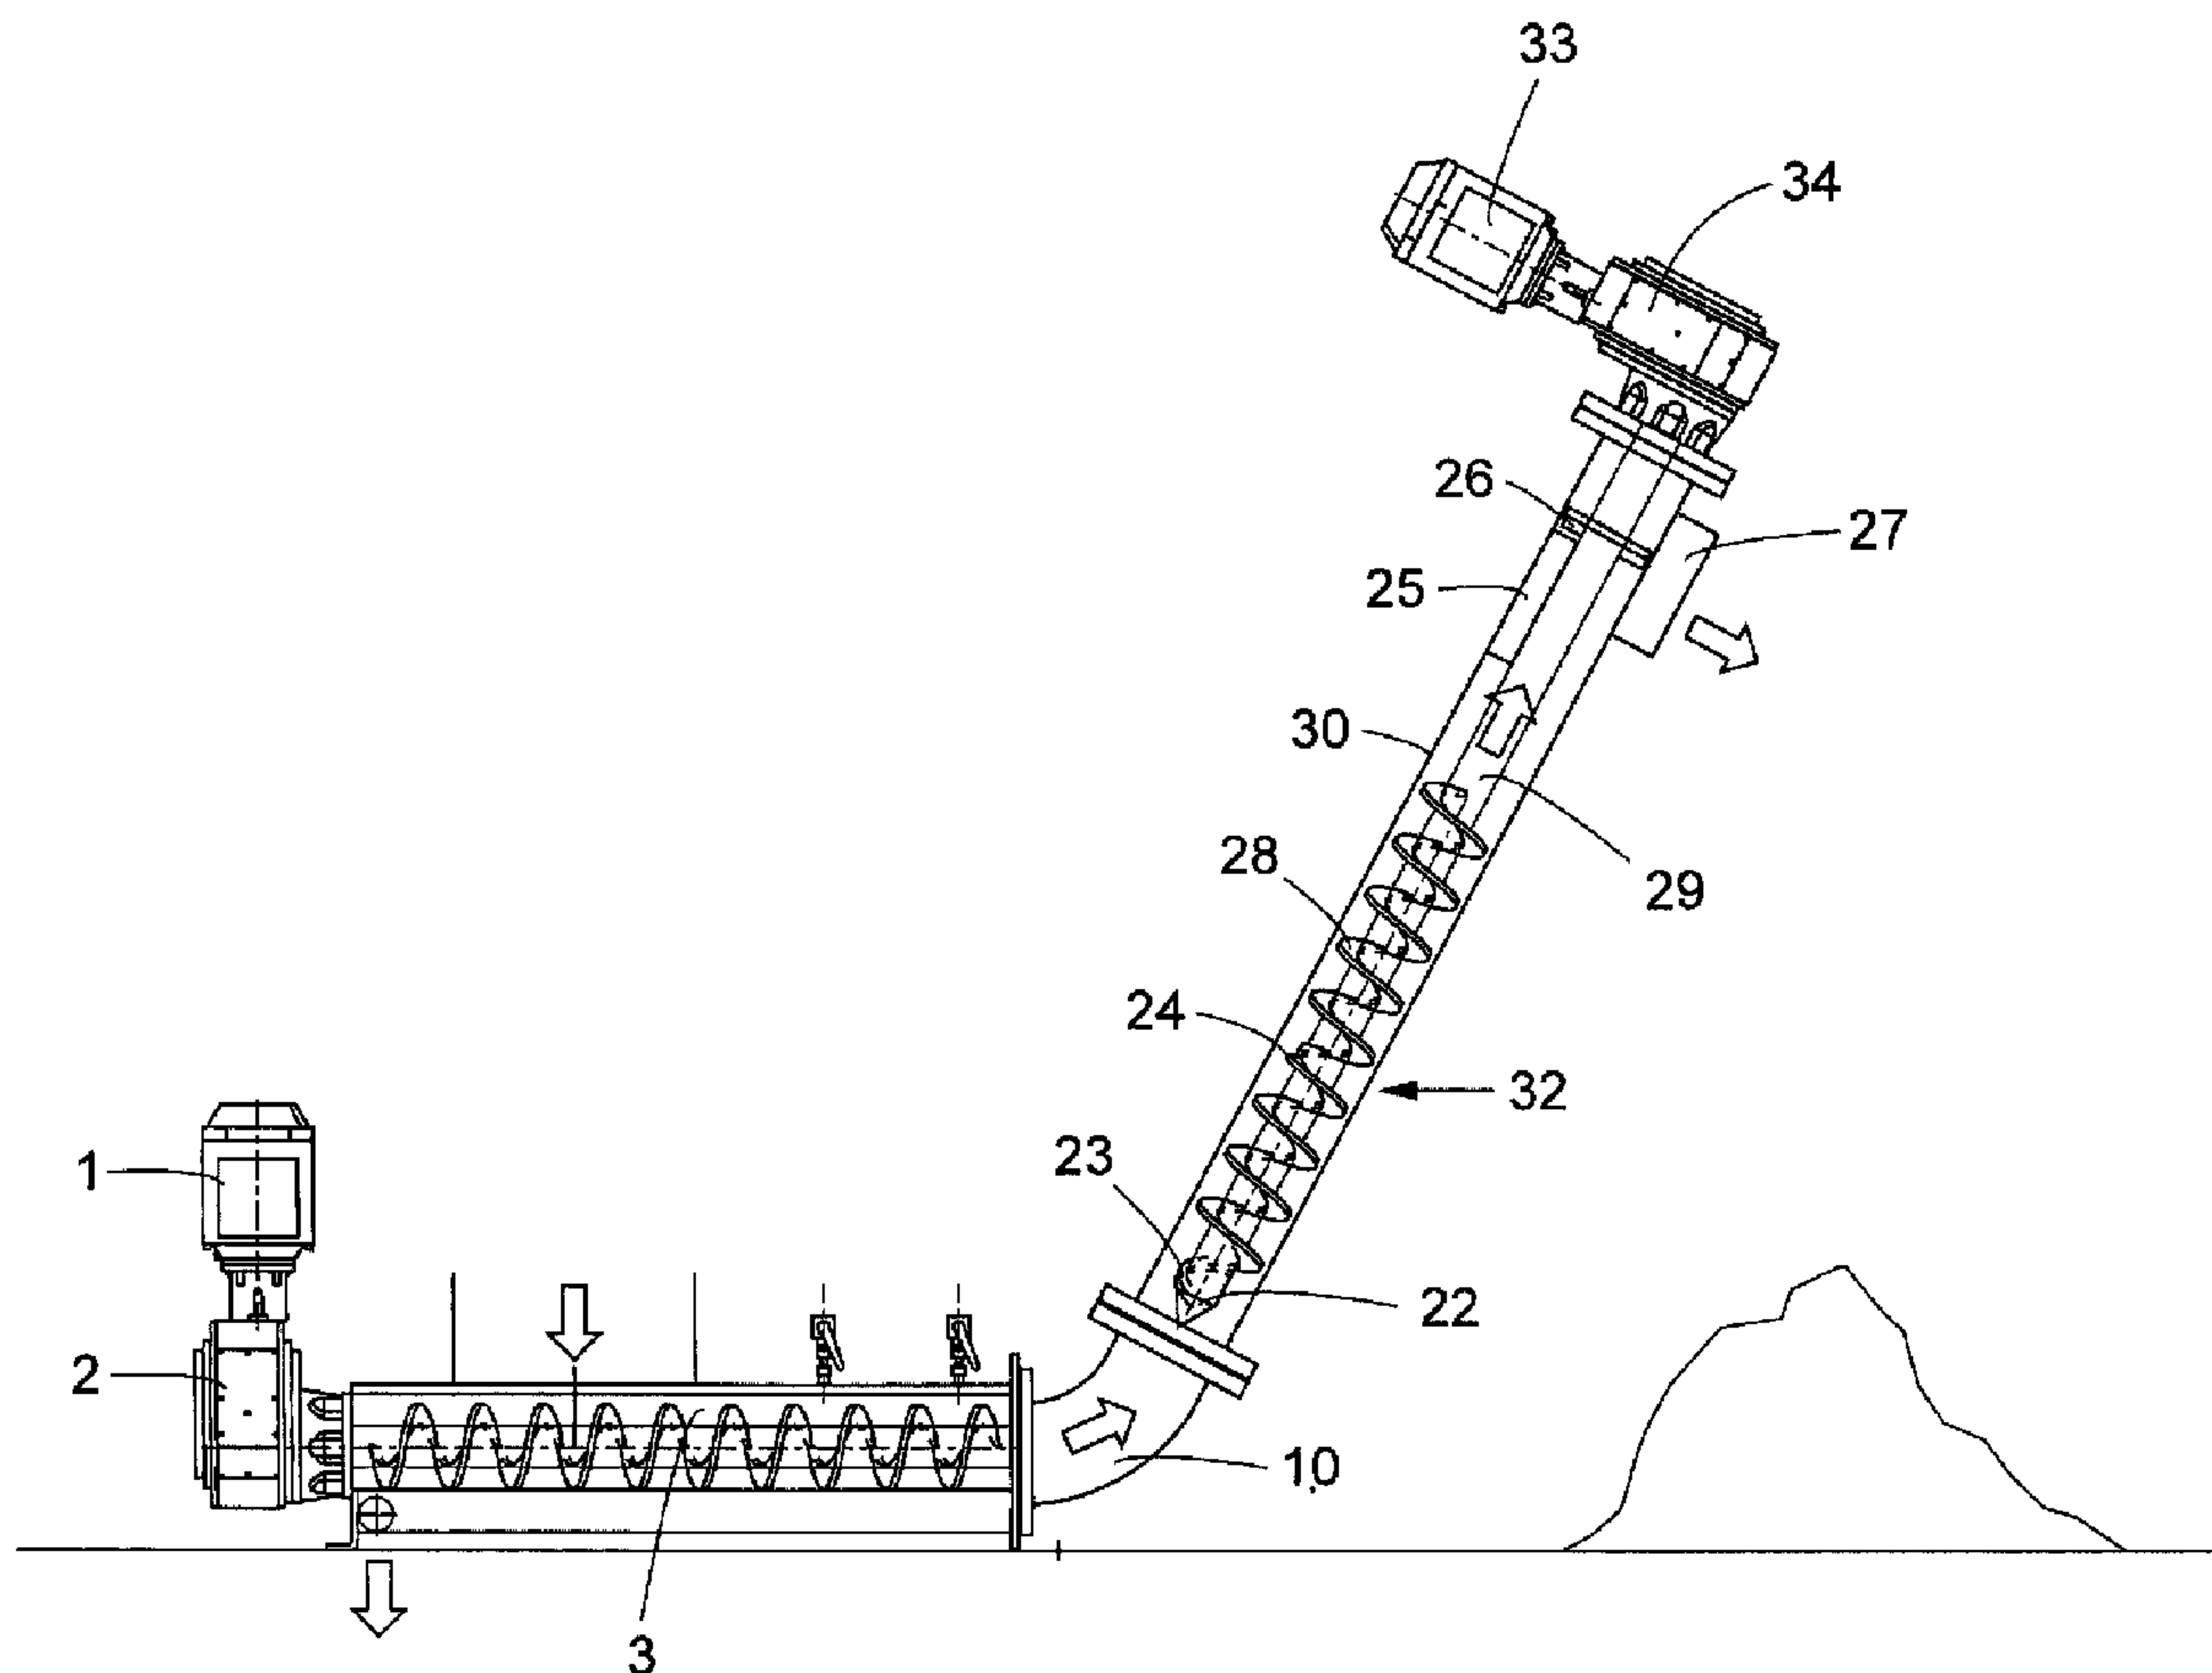

(57) Abrégé/Abstract:

An apparatus for treating sludge comprises a press (3) for dewatering the sludge, a compaction device (10) for receiving and compacting sludge dewatered by the press, a shredder (23) for receiving and shredding sludge compacted by the compaction



(57) **Abrégé(suite)/Abstract(continued):**

device, and a tube conveyor (30) for conveying shredded sludge from the shredder. As a result, it is possible to dewater the sludge to a high degree of dryness at the same time as the dewatered sludge can be transported in the tube conveyor over considerable distances and at any inclination to the horizontal.

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
28 April 2005 (28.04.2005)

PCT

(10) International Publication Number
WO 2005/037532 A1

(51) International Patent Classification⁷: **B30B 9/02,**
C02F 11/12

(21) International Application Number:
PCT/SE2004/001463

(22) International Filing Date: 13 October 2004 (13.10.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
60/511,106 15 October 2003 (15.10.2003) US

(71) Applicant (for all designated States except US): **NORDIC
WATER PRODUCTS AB** [SE/SE]; Sisjö Kullegata 6,
S-421 32 Västra Frölunda (SE).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **CHRISTOPHERS-
SON, Jesper** [SE/SE]; Lyckestigen 9, S-432 95 Varberg
(SE).

(74) Agents: **HAGSTRÖM, Leif** et al.; Bergenstråhle & Lind-
vall AB, Box 17704, S-118 93 Stockholm (SE).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,
KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD,
MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG,
PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM,
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM,
ZW.


(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,
ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,
FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI,
SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,
GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guid-
ance Notes on Codes and Abbreviations" appearing at the begin-
ning of each regular issue of the PCT Gazette.

(54) Title: APPARATUS AND METHOD FOR TREATING SLUDGE

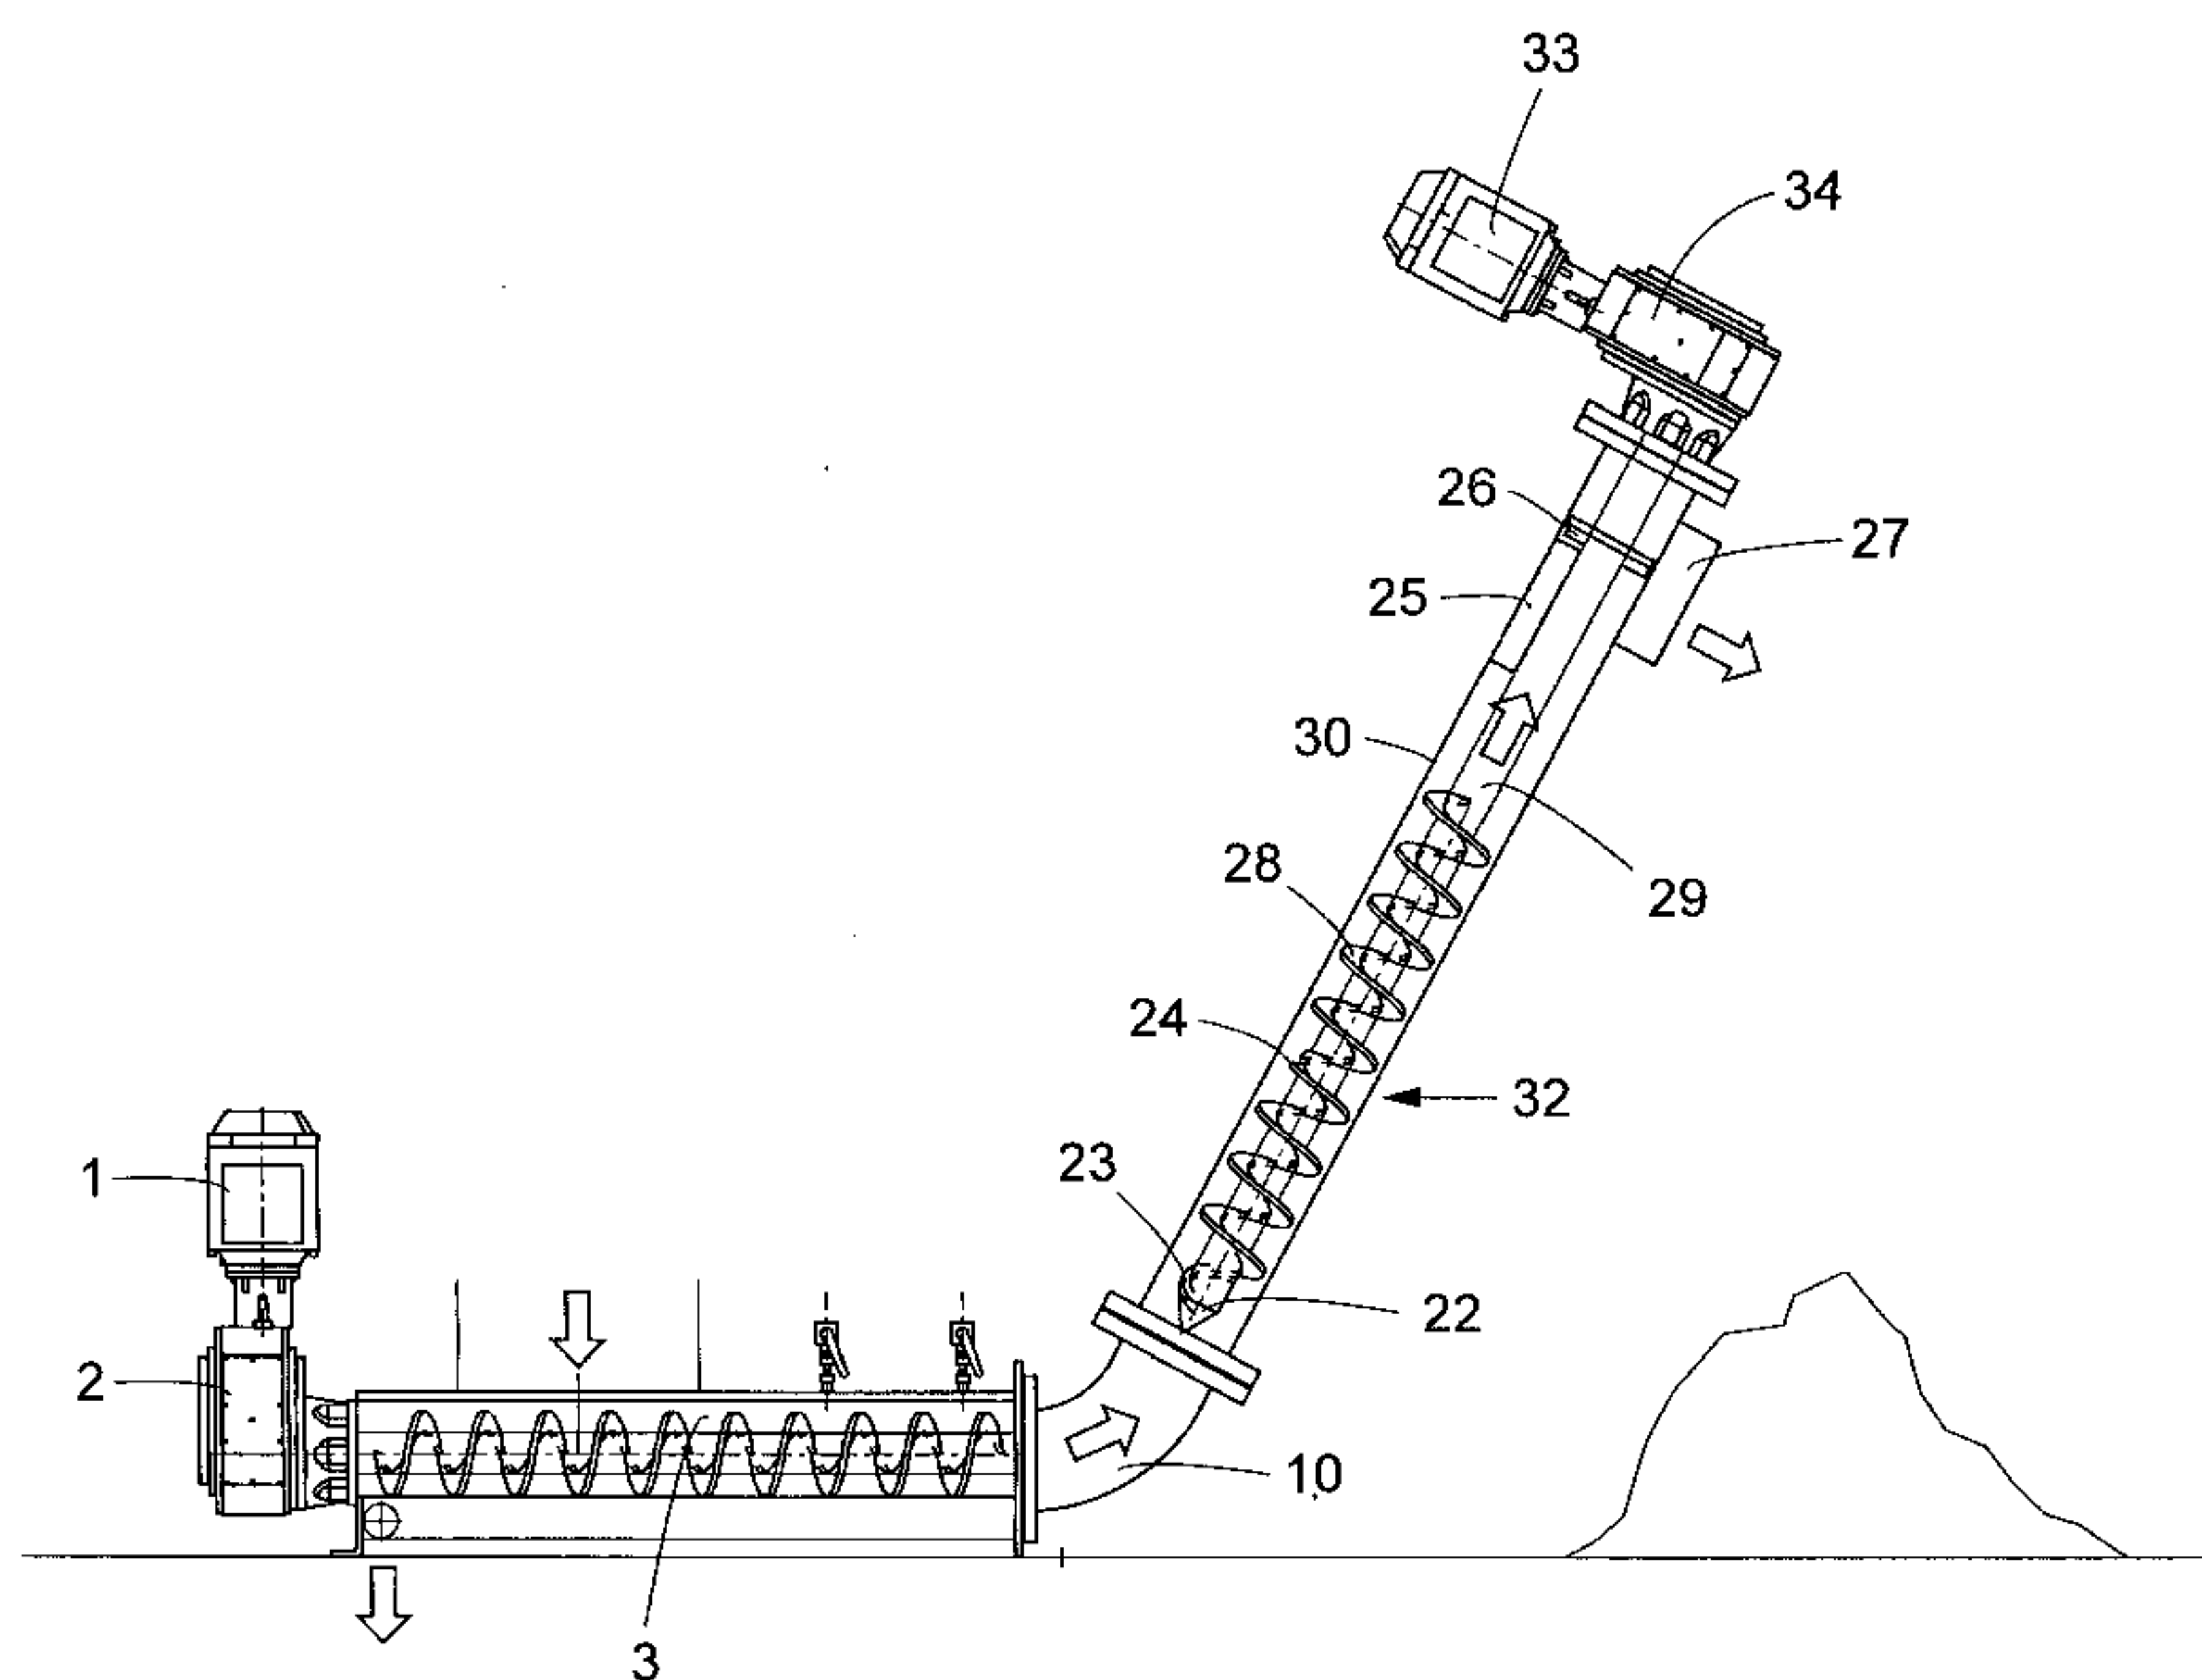

(57) Abstract: An apparatus for treating sludge comprises a press (3) for dewatering the sludge, a compaction device (10) for receiving and compacting sludge dewatered by the press, a shredder (23) for receiving and shredding sludge compacted by the compaction device, and a tube conveyor (30) for conveying shredded sludge from the shredder. As a result, it is possible to dewater the sludge to a high degree of dryness at the same time as the dewatered sludge can be transported in the tube conveyor over considerable distances and at any inclination to the horizontal.

WO 2005/037532 A1

APPARATUS AND METHOD FOR TREATING SLUDGE

The present invention relates to an apparatus and method for treating sludge. More particularly, the invention relates to dewatering of sludge and transport of the dewatered sludge.

Processes for treatment of polluted water normally involve a screening step, in which solids are removed by passage of the water through a screen. The removed solids, the screenings, form a wet, water-containing sludge that has to be dewatered and in many cases washed before the it can be deposited, incinerated or taken care of in another way. In order to obtain a manageable sludge that can easily be transported, deposited or incinerated it is essential that the solids content of the dewatered screenings is as high as possible. The same type of dewatering, and/or solids/liquid separation, and the same type of problems as those described below are also encountered in many industrial processes e.g. the dewatering and washing of cellulose pulp in the pulp and paper industry and in the food industry when pressing fruit juices and/or extracting oils from vegetable or animal material, but for brevity the description below will use screenings from treatment of polluted water as an example.

Sludge of screenings from municipal wastewater treatment plants normally contains cellulose fibres. Such sludge is suited for dewatering in screw presses and/or in piston presses also called ram presses. These types of presses as well as wash presses based on these press types are collectively referred to as press or presses in the following text. In the screw press the sludge is introduced into a hollow cylinder, having a water pervious wall, in which a rotating press screw compresses the sludge so that water is

pressed out of the sludge and can escape through the water pervious cylinder wall. In the piston or ram press the sludge is likewise introduced into a hollow cylinder, having a water pervious wall, but here the dewatering is achieved by use of a piston that is pressed into the hollow cylinder and thus pressing water out of the sludge. The water escapes through the water pervious cylinder wall. Both screw presses and piston or ram presses are normally provided with a compaction device for the sludge, where the sludge is compacted and further water separation takes place. Such a compaction device is usually an extension of the hollow cylinder and may have either solid walls or water pervious walls and may be straight or bent.

15 In a so called wash press wash water is introduced into the sludge, mixed with the sludge and then removed by pressing, carrying with it fine solids that are sent back to the treatment plant for treatment together with the polluted water. This procedure can be repeated until the desired cleanness of the sludge has been obtained. In that case for each repeated wash cycle the pressure on the sludge is released, wash water is introduced and mixed with the sludge and then removed by renewed pressing. According to one wash procedure the sludge is initially dewatered by pressing after which the pressure on the sludge is released, wash water is introduced and mixed with the sludge and then removed by renewed pressing. Also this procedure can be repeated until the desired cleanness of the sludge has been obtained. A wash press may be either of the screw press type or the piston press type.

A conveyor tube is normally connected directly to the press for transporting the dewatered screenings to a container or

deposit. Such a conveyor may be arranged to transport the dewatered screenings horizontally or at any angle to the horizontal. When dewatering sludge screenings it is desirable and of great economic value to get the sludge screenings as dry as possible after dewatering and washing /dewatering. However, current methods for obtaining a dry sludge after dewatering lead to problems in the press/conveyor system caused mainly by problems in the transportation of the sludge in the tube conveyors that are normally used in conjunction with the presses. Since dry sludge is in the form of lumps, aggregates or a hard "sausage" it causes a high friction against the conveyor tube wall, so that it might get stuck in the conveyor and cause blocking of the same. This means that to enable transport of the dewatered sludge the desired distance and at the desired angle to the horizontal, the sludge has to be kept wetter than is desirable from an economic point of view.

The problem of combining dewatering the sludge to a high dryness in presses and transporting the dewatered sludge in a tube conveyor or tube screw conveyor is well known in the industry and a number of solutions have been tried but none of the known solutions has given a satisfactory solution to the problem.

25

It is, for instance, well known to use conveyor tubes with widening diameters in the direction of transportation to avoid blocking by dry sludge. This will work as long as the sludge and dewatering parameters are in accordance with the design values. However it is in the nature of sludge and sludge dewatering that the properties of the sludge are variable and this will directly affect the dewatering performance of the press. Therefore, when using conveyors with widening tubes,

30

i.e. conical tube sections, one always has to allow for these variations by setting the parameters of the dewatering press so that it will produce a wetter sludge than would be possible in order to ensure that the conveyor does not block up as the
5 sludge load and/ or the sludge characteristics in the press changes. In order to be able to operate optimally for different sludge characteristics one would need a set of conveyor tubes with different slopes of the wall of the conical section. These tube sections would have to be changed
10 in accordance with sludge properties, which would be impractical. The solution using widening conveyor tubes will consequently produce sub-optimal results in respect of dryness of the sludge and it will also be susceptible to disturbances if an unforeseen change in the parameters should occur. In
15 order to be on the safe side for the conveyor the dewatered sludge is normally kept much wetter than could be achieved by the press.

Another way that has been tried to solve the problem at hand
20 is to use a tube conveyor of a type that allows variation of the slope of the conical section. In this way a certain adjustment of the tube can be carried out during operation in case the sludge characteristic and dryness after dewatering should change, but this requires constant supervision or a
25 complicated control system. Changes cannot be made quickly enough to properly adjust to changes in load or sludge characteristics and the span of possible settings of the slope is limited. A further drawback of this system is that it can only be used for transporting the sludge a short distance and
30 it cannot be used for lifting the sludge more than a short distance to a conveyor and/or a container. The sludge will exit from this device in the form of big lumps, which requires a conveyor screw with a big diameter for the further transport

of the sludge. The reloading into a big diameter screw conveyor is costly and impractical.

Sludge dewatering by use of screw presses, piston presses and wash presses is an important operation in wastewater treatment and industrial processes. The laws and rules guiding the disposal of sludge and waste products are getting stricter all the time and there is a great need for simple methods and devices by which dried sludge that is transportable over long distances and at desired angles to the horizontal can be produced. It is a hygienic requirement that the sludge should be dewatered and transported in closed equipment and conveyors. The layout of wastewater treatment plants often requires closed transport of the sludge over long distances and also vertically between floors due to building constraints.

The object of the present invention is to provide an apparatus and a method that enable dewatering of sludge to a high degree of dryness in a press and transport of the dewatered sludge over considerable distances and at any inclination to the horizontal.

Accordingly, in accordance with a first aspect of the present invention, there is provided an apparatus for treating sludge, comprising a press for dewatering the sludge, a compaction device for receiving and compacting sludge dewatered by the press, and a tube conveyor for conveying sludge from the compaction device. The apparatus is characterised by a shredder provided in the tube conveyor and adapted to shred the sludge compacted by the compaction device.

As a result, the apparatus of the invention enables operation of a screw press, piston press or wash press in a way that makes it possible to dewater the sludge to a high degree of dryness at the same time as the dewatered sludge can also be transported in tube conveyors with or without transport screws therein over considerable distances and at any inclination to the horizontal without problems. By using operational parameters in the press to control the flow of dewatered sludge out of the press and/or the compaction device, together with the breaking up or shredding of the lumps or "sausages" of dewatered sludge, a dewatered sludge having a high dryness as well as being easily transportable over long distances and at any angle of inclination in the tube conveyor is achieved.

15 The flow of sludge out of the press and/or the compaction device can be controlled in such a way that desired values for dewatering parameters in the press are achieved. Further, by using a flow control means together with the shredder the dewatered sludge will be transportable in tube conveyors over long distances and at any angle of inclination to the horizontal. Various parameters can be measured to produce a signal for controlling the flow of sludge out of the press, e.g. the dryness of the sludge in the compaction device. Where the press is a screw press, a parameter may be the momentary power consumption of the press motor and/or the torque of the drive shaft. Where the press is a piston press, the parameter may be the piston pressure and/or the hydraulic and/or pneumatic pressure in the drive unit of the piston press. Generally, the parameter may be the pressure on the sludge in the press and/or the compaction device and the feed flow and/or the water flow out of the press.

For instance, by measuring the momentary power consumption of the press motor and using this value to control the flow of sludge out of the press and if desirable also the shredder it is possible to always operate the press motor near, but below, its maximum power consumption thereby making sure that the press will exert its maximum dewatering work on the sludge as well as allowing the sludge to have its maximum detention time in the press thereby achieving the driest possible sludge for the press and the load in question . This type of control will also adjust the operation of the press to variations in the feed flow as well as to changing characteristics of the feed so that the press will always produce a good dewatering. The shredder provides small pieces of the dewatered and compacted sludge that are easily transportable in the tube conveyor. The shredder is essential for the operation of the press according to the invention since in case the press should be operated with the described flow control but without the shredder then the dewatered and compacted sludge would plug up the tube conveyor and consequently the press. Similarly, where the press is a screw press the torque of the screw can be measured and the signal used for the type of control described above.

In an analogous way, where the press is a piston press it is possible to measure the hydraulic and/or pneumatic pressure applied to the piston and use this value for controlling the flow rate of dewatered sludge leaving the piston press and if desirable for controlling the shredder.

Similarly the concentration of the dewatered sludge in the press or the compaction device can be measured and the signal be used for control of the flow of dewatered sludge leaving the press and if desirable for control of the shredder.

Further signals that can be used for control according to the invention are those obtained from sensors measuring the feed flow to the press, the flow of water from the press, viscosity sensors in the press and/or any suitable sensor measuring any operational parameter in the press. Further, according to the invention a combination of signals from different sensors may be combined to control the press.

A time sequence controller and/or control sequence from a computer or similar may also be used alone or together with any of the control methods described above to control a press in accordance with the invention. One alternative is to let the time sequence controller run the press unless overruled by any of the control signals described above. Another alternative is to use the time sequence signal and/or control sequence to dewater the sludge in batches, i.e. initially filling the press, then starting a timer and running the dewatering of the batch of sludge until the signal from one or more of the sensors has reached its set value and/or the timer has reached its set value, at which time the flow of sludge out of the press is started and run for a certain time or alternatively changed in accordance with the control strategy. This sequence can be repeated any number of times.

The flow control can be carried out by running the flow control means intermittently or by continuous and/or stepped changes of their settings.

The shredder may be combined with a flow control means for the dewatered sludge so that big lumps or hard "sausages" are broken up into smaller pieces which can easily be transported over long distances in a tube conveyor with or without a transport screw therein.

There are many types of means for the flow control and shredders that can be used, for instance a valve with variable opening together with a shredder in the form of a rotating blade for shredding the sludge. Another means could be a
5 rotating cone with ridges on its surface which cone can be moved relatively to the outlet opening of a screw press, piston press or wash press forming a controlled annulus and thus obtaining the desired effect according to the invention. A further means is to use a valve followed by the front end of
10 a transport screw of a tube conveyor, wherein the front end of the transport screw is designed with a shredder, so that sludge lumps and sausages are broken up to smaller pieces suitable for transport.

15 It has been found especially advantageous to use a combined means for controlling the flow of dewatered sludge out of the press and the flow of shredded sludge out of the shredder. Such a combined means can be a transport screw in a tube conveyor that is directly connected to the press and/or the
20 compaction device using signals from measured suitable parameters related to the operation of the press to control both the flow of dewatered sludge out of the press and the shredding of sludge lumps, aggregates or "sausages". Thus, the flow of sludge out of the press may be controlled by varying
25 the revolutions per minute of the transport screw of the tube screw conveyor. For example, the rotational speed of the transport screw may be controlled in response to at least one sensed operational parameter of the press, such as the momentary power for operating the press or the pressure,
30 concentration or viscosity of the sludge in the press. The transport screw preferably comprises a helically extending element having a peripheral edge, and the shredder is formed on the peripheral edge of the helical element. The shredding

can thus also be controlled by controlling the revolutions per minute of the transport screw. According to the invention it is also possible to provide at least one more shredder downstream of the first shredder. Such a shredder can be
5 arranged on the transport screw.

The above mentioned transport screw of the tube conveyor may be designed so that at stand still there will be essentially no flow of sludge out of the press. By controlling the rate of
10 rotation of such a transport screw any desirable flow combined with shredding of the sludge lumps or "sausages" can be easily achieved. The upstream end of the transport screw may be provided with a centrally attached conical tip that will break up the dewatered sludge and direct it to the part of the
15 transport screw that provides the shredding as well as provide better control and further protect the transport screw from overloading.

In the case that the transport screw in the tube conveyor is
20 used in the way described above it has three functions: a) it controls the flow of dewatered sludge out of the press according to the signal originating from the measurement of parameters in the press and/or provided by a timer or predetermined time sequence, b) it breaks up lumps and/or
25 "sausages" of sludge and c) it transports away the pieces of sludge resulting from the shredding. Using this method the sludge can be dewatered to a high dryness at the same time as transportation of the dewatered sludge over long distances and at any angle of inclination is possible by use of a tube
30 conveyor with or without a transport screw therein. The dewatered sludge will further be discharged from the tube conveyor in a form, which is ideal for handling and incineration.

The wash process in a wash press can also be improved so that a cleaner sludge can be produced using the present invention. Cleaner sludge means lower handling, storage and disposal costs for screenings from wastewater treatment. It also means cleaner cellulose pulp and improved recovery of chemicals when the invention is used in the pulp and paper industry, which has great economic value. Recovery of chemicals from sludge in the chemical industry is another application.

10

Traditionally, simple tube conveyors are used, whereby the press connected to such a tube conveyor pushes the sludge cake through the tube conveyor. However, a tube conveyor provided with a transport screw therein has the advantage that it operates independently of the press, since the transport screw pulls the dewatered sludge through the tube conveyor and consequently does not use any of the power supplied for driving the press. Consequently, all power can be used for dewatering which gives a drier dewatered cake. It is true, however, that tube conveyors with transport screws that pull the sludge normally cannot be used for transporting sludge dewatered to a high dryness in a press since this sludge forms hard lumps that will not transport and discharge properly from the tube conveyor. This problem is taken care of by the method and apparatus according to this invention. In one version of the present invention at least a second disintegration or breaking up of lumps that may be formed during transportation takes place using shredder(s) along the transport screw and a further shredders may be provided at the downstream end of the tube conveyor to break up any aggregates formed. This downstream shredder may include a rotary knife working together with a stationary knife. In this way both a trouble free transportation by the transport screw in the tube

30

conveyor and a trouble free discharge from the tube conveyor is achieved for a wide range of conditions.

In accordance with a second aspect of the present invention,
5 there is provided a method of treating sludge, comprising the steps of dewatering the sludge, compacting the dewatered sludge, shredding the compacted sludge, transporting the shredded sludge in a closed channel, and discharging the sludge from the channel.

10

The sludge may be shredded at least once more as the sludge is transported in the channel, preferably just before the sludge is discharged from the channel. The sludge may be washed, preferably in cycles, at the same time as it is dewatered.

15

The method may further comprise providing a press for performing the dewatering step and a compaction device for performing the compacting step. The press is controlled to transport the sludge at a controlled flow rate to or from the
20 compaction device, preferably to vary the flow rate of the sludge in response to at least one sensed operational parameter of the press. Such a parameter may be the momentary power for operating the press, pressure in the sludge in the press, sludge concentration in the press, sludge feed flow to
25 the press or separated water flow from the press. Alternatively, the operational parameter may be the momentary power consumption of the motor that drives the press or the torque of a drive shaft connecting the motor and a press screw of the press.

30

The press may also be controlled to vary the flow rate of the sludge in response to at least one sensed operational parameter of the compaction device, such as the pressure in

the sludge in the compaction device or sludge concentration in the compaction device.

The method may further comprise providing a shredder for
5 performing the shredding step, wherein the operation of the shredder is controlled, preferably in response to at least one sensed operational parameter of the press, such as the momentary power for operating the press, pressure in the sludge in the press, sludge concentration in the press, sludge
10 feed flow to the press or separated water flow from the press. Alternatively, or in combination, the parameter may be the momentary power consumption of the press motor or the torque of the drive shaft connecting the motor and press screw. The shredder may also be controlled in response to at least one
15 sensed operational parameter of the compaction device, such as the pressure in the sludge in the compaction device, or concentration of the sludge in the compaction device. The shredded sludge may be transported in a direction upwardly from the shredder and the sludge may be discharged from the
20 channel in a position above the shredder.

The method may further comprise providing a transport screw in the closed channel for performing the transporting step, wherein the rotational speed of the transport screw is
25 controlled in response to at least one sensed operational parameter of the press, such as the momentary power for operating the press, or the pressure, concentration or viscosity of the sludge in the press. The transport screw may be adapted to convey the shredded sludge in a direction
30 upwardly in the channel.

Generally, the method further comprising controlling the press to operate in cycles, and/or controlling the shredder to

operate in cycles, and/or controlling the transport screw to operate in cycles.

The invention is described in more detail in the following
5 with reference to the accompanying drawings, in which
Figures 1, 2 and 3 show apparatuses according to prior art,
Figure 4 is a general embodiment of the apparatus of the
invention including a sludge dewatering press, a sludge
compaction device, a sludge shredder and a tube conveyor for
10 conveying shredded sludge,
Figure 5 shows a modification of the general embodiment of
Figure 4,
Figure 6 shows a modification of the tube conveyor of the
embodiment shown in Figure 5,
15 Figures 7-10 are four further modifications of the general
embodiment of Figure 4 provided with control systems, and
Figure 11 shows a modification of the tube conveyor of the
embodiments shown in Figures 7-10.

20 Referring to the drawing figures, like reference numerals
designate identical or corresponding elements throughout the
several figures.

Figures 1, 2 and 3 show apparatuses according to prior art.
25 Accordingly, Fig. 1 shows a conventional screw press/screw
wash press for sludge dewatering including a compaction device
and followed by a tube conveyor for transporting dewatered
sludge. Fig. 2 shows a conventional piston press for sludge
dewatering including a compaction device and followed by a
30 tube conveyor. Fig. 3 shows a modified conventional screw
press/screw wash press for sludge dewatering including a
compaction device and followed by a tube conveyor for
transporting dewatered sludge having a conveying tube with

widening diameter in the direction of transport in order to avoid blocking by dry sludge.

Embodiments of the present invention will now be explained in detail with reference to figures 4 to 11.

5

Fig. 4 shows a general embodiment including a screw press 3, a compaction device 10 in the form of a tube bend connected to the screw press 3 downstream thereof and a tube conveyor 11 extending upwardly from the compaction device 10 and defining
10 a channel for conveying sludge. Sludge to be dewatered is introduced into the press 3 through a feed inlet 5 and is transported and subjected to pressure by a press screw 4 attached to a shaft 19 driven by a press motor 1 via a gear 2. The press screw 4 rotates inside a cylinder of the press 3
15 having a water pervious wall 8. Wash water may be introduced into the cylinder of the press 3 through pipes 7 provided with valves. Water being pressed out of the sludge is collected in a trough 9 below the press screw 4 and discharged through a water outlet 6 of the trough 9. The sludge leaving the screw
20 press 3 is further compacted and dewatered in the compaction device 10. An adjustable valve 16 is provided between the tube bend of the compaction device 10 and the tube conveyor 11. A manually or automatically operable control device 17 controls the valve 16 to provide a desired rate of flow of dewatered
25 sludge out of the compaction device 10.

The tube conveyor 11 includes a tube 21, in which an axle 13 extends and is driven by a motor 14 via a gear 15 placed at the downstream end of the tube 21. At the upstream end of the
30 tube 21 there is a screw-shaped shredder 12 attached to the axle 13. The shredder 12 has a conical tip 18 (see Figure 6) attached to the end of the axle 13. The dewatered sludge leaving the compaction device 10 is first broken up by the

conical tip 18 and then shredded by the shredder 12. The dewatered and shredded sludge is discharged from the tube conveyor 11 at its upper downstream end through a discharge opening 20.

5

Fig. 5 shows an embodiment similar to the embodiment of Fig. 4 except that it lacks an adjustable valve between the tube bend of the compaction device 10 and the tube conveyor, and that the tube conveyor is designed differently. Thus, in this embodiment the tube conveyor 32 includes an upwardly extending tube 30 and a helical transport screw 28 extending in the tube 30. Wear bars of hard material, not shown in Fig. 5, are placed on the inside of the tube 30. These bars, preferably three bars, centre the transport screw 28 and prevent wear on the wall of tube 30, as well as enhance transport. It is also possible to substitute a core-less screw for the transport screw 28. The axle 29 is connected to a conveyor motor 33 via a gear 34. The dewatered sludge leaving the compaction device 10 enters the tube conveyor 32 axially at its upstream end, where it is first broken up by a conical tip 22 provided on the upstream end of the transport screw 28 and then directed to and shredded by the periphery of the front end of the helical transport screw 28. The transport screw 28 transports the shredded dewatered sludge up to the downstream end of the tube conveyor 32 where a discharge outlet 27 for dewatered sludge is provided remote from the transport screw 28. At least one additional shredder 24 may be arranged along the transport screw 28 of the tube conveyor 32. At the downstream/upper end of the tube conveyor 32 there is provided a further shredding step including at least one rotary knife 26 attached to the axle 29 and at least one stationary elongate knife 25 attached to the tube 30. The rotary knife 26 is situated in front of the discharge outlet 27, whereas the elongate

25

30

stationary knife 25 extends axially downwardly from the rotary knife 26 a distance past the lower edge of the discharge outlet 27. The knives 25 and 26 ensure that clogging of sludge at the outlet 27 is prevented

5 .

Fig. 6 shows the upstream part of the transport screw 28 in more detail. The conical tip 22 attaches to the axle 29 and close to the tip 22 the transport screw 28 is provided with a helically extending element having a shredder 23 in the form of a peripheral edge. The radial extension of the peripheral edge of the shredder 23 is shorter than that of remaining portion of the transport screw 28. At least three hard material sticks 31, two of which are shown in Fig. 6, are provided on the inside wall of the tube 30, in order to centre the transport screw 28 and prevent wear on the wall of tube 30, as well as enhance transport of dewatered sludge. One additional shredder 24 having an edge is shown on the transport screw 28 situated downstream of the shredder edge 23. The helically extending element of the transport screw 28 has a cut-away portion between the upstream and downstream ends of the transport screw 28, wherein the additional shredder 24 extends in the cut-away portion.

Fig. 7 shows the embodiment of Fig.5 provided with control means. Thus, a control unit 36 of the control means controls the transport of sludge out of the screw press 3 and/or to or from the compaction device 10 and/or out of the tube screw conveyor 32 by controlling the conveyor motor 33 in response to signals from one or more of the following sensors. A sensor 37 provided on the press motor 1 gives a signal related to the momentary power for operating the press 3, a sensor 38 provided on the screw press 3 gives a signal related to the torque on the shaft 19 of the press screw 4, a sensor 39 also

provided on the screw press 3 gives a signal related to the pressure and/or the concentration and/or the viscosity in/of the sludge in the screw press 3, a sensor 40 provided on the compaction device 10 gives a signal related to the sludge
5 concentration and/or pressure and/or viscosity in the compaction device 10. A time sequence unit 35 of the control means controls the press motor 1 and/or the conveyor motor 33 to operate in cycles, so that they perform a programmed time sequence which may be initiated manually or by a signal
10 through a signal line 41 from a process control computer (not shown) and/or originate from another source in the process upstream of the screw press 3. The time sequence unit 35 controls the press motor 1 and the conveyor motor 33 according to a predetermined time sequence unless overruled by signals
15 from the control unit 36. The time sequence unit 35 may also be used to control the wash cycle in the screw press 3 in a known manner.

Fig. 8 shows the embodiment as described in Fig. 5 with added
20 control means that differs from the control means of the embodiment shown in Fig. 7. Thus, the time sequence control unit 35 as described in fig. 7 has sensors added, a first sensor 43 for sensing feed flow of the sludge that is supplied to the screw press 3 and a second sensor 45 for sensing water
25 discharged through the water outlet 6. The time sequence unit 35 controls the press motor 1 and the conveyor motor 33 so that they perform a programmed time sequence, which may be initiated by a signal from sensor 43 indicating that the screw press 3 is receiving or has received sludge to be dewatered.
30 The time sequence unit 35 can also control the feed flow to the screw press 3 in a manner known in the art although this is not shown in detail in Fig. 8. The programmed time sequence from unit 35 can be initiated or turned off by the sensor 45

sensing the flow of water out of the screw press 3 resulting from the dewatering of the sludge. For instance, the programmed time sequence may be turned off and/or re-initiated when the sensor 45 indicates that no more water is pressed out
5 of the sludge.

The control unit 36 has sensors 42 and 44 connected for controlling the conveyor motor 33. Such control can be based on signals from the sensor 42 sensing the sludge feed flow to
10 the screw press 3 and/or based on signals from the sensor 44 sensing the separated water flow discharged through the water outlet 6.

Fig. 9 shows an embodiment of the invention including a piston
15 press 50 for dewatering sludge connected to the compaction device 10 and tube conveyor 32 as described above in connection with the embodiment according to Fig.5. The piston press 50 is driven by a hydraulic or pneumatic press motor 48 connected to a hydraulic or pneumatic unit 49, in which a
20 hydraulic or pneumatic pressure is produced and transmitted to the piston press 50 through pressure pipes 59. The piston press 50 has a piston press cylinder with a water pervious wall 54, in which a piston 51 moves in response to the pressure in a pressure chamber 60 provided through the
25 pressure pipes 59. Sludge to be dewatered is introduced through a feed opening 52 and is compressed by the movement of the piston 51 as the pressure in the pressure chamber 60 is increased. Water is pressed out through the water pervious wall 54 of the piston press cylinder, is collected by a water
30 collection plate 61 and is discharged through an opening 53. The dewatered sludge is pressed into the compaction device 10 where it is compacted and further dewatered. The dewatered and

compacted sludge is then shredded and transported in the tube conveyor 32 as previously described.

Control means are provided and includes a control unit 47 that
5 controls the transport of sludge out of the piston press 50
and/or to or from the compaction device 10 and/or out of the
tube conveyor 32 by controlling the conveyor motor 33 in
response to signals from one or more of the following sensors.
Thus, a first sensor 55 gives a signal related to the
10 momentary power used by the press motor 48, a second sensor 56
gives a signal related to the pressure in the hydraulic or
pneumatic unit 49, a third sensor 57 gives a signal related to
the pressure and/or the concentration and/or the viscosity
in/of the sludge in the piston press 50, and a sensor 58 gives
15 a signal related to the sludge concentration and/or pressure
and/or viscosity in the compaction device 10.

The control means further includes a time sequence unit 46
that controls the press motor 48 and the conveyor motor 33 so
20 that they perform a programmed time sequence, which may be
initiated manually or by a signal from a process control
computer and/or originate from another source in the process
upstream of the piston press 50. The time sequence unit 46
controls the press motor 48 and the conveyor motor 33
25 according to a predetermined time sequence unless overruled by
signals from the control unit 47. The time sequence unit 46
may also be used to control the wash cycle in the piston press
50 in a manner known per se.

30 Fig. 10 shows an embodiment similar to the embodiment of Fig.
9 except that the control means are different. Thus, the time
sequence control unit 46 has a first sensor 63 sensing feed
flow of sludge supplied to the piston press 50 and a second

sensor 65 sensing water being discharged through the opening 53. The time sequence unit 46 controls the press motor 48 and the conveyor motor 33 so that they perform a programmed time sequence, which may be initiated by a signal from sensor 63
5 indicating that the press 50 is receiving or has received sludge to be dewatered. The time sequence unit 46 can also control the feed flow to the press 50 in a manner known in the art although this is not shown in detail in fig. 10. The programmed time sequence can be initiated or turned off by the
10 sensor 65 sensing the flow of water out of the press 50 resulting from the dewatering. For instance, the programmed time sequence may be turned off and/or re-initiated when sensor 65 indicates that no more water is pressed out of the sludge.

15 The control unit 47 has a first sensor 62 and a second sensor 64 connected for controlling the conveyor motor 33. Such a control can be based on signals from the sensor 62 sensing the sludge feed flow supplied to the piston press 50 and/or
20 the sensor 64 sensing the separated water flow discharged from the piston press 50.

Fig. 11 shows a modification of the tube conveyor 32. Thus, the transport screw 28 extends in the tube 30 all the way up
25 to the lower edge of the discharge outlet 27, and both the rotary knife 26 and the stationary knife 25 are located so that they face the discharge outlet 27. Of course, the stationary knife 25 is positioned relative to the discharge outlet such that it does not extend axially beyond the latter,
30 in order not to interfere with the transport screw 28. Therefore, the stationary knife 25 is in this modification designed somewhat shorter than in the embodiments according to Figs. 5-10.

The various control and time sequence units described above can be applied in any of the above embodiments of the invention.

5

The apparatus of the present invention has been tested. At the test a dry solids concentration of 54 % in the dewatered sludge was obtained. In contrast, dewatering of sludge in a conventional apparatus for treating sludge gives a dry solids concentration of maximum 40 - 45%. Furthermore, the sludge dewatered by the apparatus of the invention can be transported by the tube conveyor eight to ten meters vertically versus maximum three meters with a conventional sludge treatment apparatus.

15

In the embodiments according to Figs. 5 to 10 operational parameters relating to the press are measured and a signal based on the measured parameters is used for controlling the flow rate of sludge through the press and/or compaction device and/or tube conveyor. In addition, it is also possible according to the invention to alternatively measure operational parameters related to the tube conveyor/and or shredder and use the signals resulted from these measured parameters to control the operation of the press. As an example the momentary power consumption of the conveyor motor and/or shredder motor and/or torque of the transport screw axle can be measured to produce a signal which can be used to control the flow of sludge to the press and/or the speed of the press motor and/or be used to overrule the signal from the time sequence unit.

30

CLAIMS

1. An apparatus for treating sludge, comprising a press (3) for dewatering the sludge, a compaction device (10) for receiving and compacting sludge dewatered by the press, a tube conveyor (11) for conveying sludge from the compaction device, the tube conveyor (30) including a transport screw (28), and a shredder (12;23) for shredding the sludge compacted by the compaction device (10), the shredder being operable independently of the press and compaction device, **characterised** in that the apparatus further comprises a control unit (36;47) adapted to control the rotational speed of the transport screw (28) in response to at least one sensed operational parameter of the press (3) and also to control the operation of the shredder (12) in response to at least one sensed operational parameter of the press (3) and/or at least one sensed operational parameter of the compaction device (10).
2. An apparatus according to claim 1, wherein the transport screw (28) has an upstream end and a downstream end, the shredder (23) being situated at the upstream end.
3. An apparatus according to claim 2, wherein the transport screw (28) and the shredder (23) are integrated.
4. An apparatus according to claim 3, wherein the transport screw (28) comprises a helically extending element having a peripheral edge, and the shredder (23) is formed on the peripheral edge.

AMENDED SHEET

5. An apparatus according to claim 2, further comprising a conical tip (18;22) centrally attached to the transport screw at the upstream end thereof.
- 5 6. An apparatus according to claim 2, further comprising at least one additional shredder (24) situated downstream of the first-mentioned shredder (23).
7. An apparatus according to claim 6, further comprising a
10 discharge outlet (27) for discharging sludge from the tube conveyor (32) at the downstream end of the transport screw (28), wherein the additional shredder (24) is situated at the discharge outlet (27).
- 15 8. An apparatus according to claim 7, wherein the additional shredder (24) comprises a stationary (25) and/or rotary knife (26).
9. An apparatus according to claim 6, wherein the transport
20 screw (28) comprises a helically extending element having a cut-away portion between the upstream and downstream ends of the transport screw, and the additional shredder (24) extends in the cut-away portion.
- 25 10. An apparatus according to any one of claims 1-9, further comprising a washing device (7) for introducing a wash liquid into the sludge existing in the press to mix with the sludge and effect washing thereof.
- 30 11. An apparatus according to claim 10, wherein the washing device (7) is operable to cyclically introduce wash liquid in batches.

AMENDED SHEET

12. An apparatus according to claim 11, wherein the press (3) is operable to decrease the pressure exerted on the sludge while the washing device (7) introduces wash liquid.

5 13. An apparatus according to any one of claims 1-12, wherein the control unit (36;47) also controls the press (3).

14. An apparatus according to claim 13, wherein the control unit (36;47) is adapted to control the press (3) to transport
10 the sludge at a controlled flow rate to or from the compaction device (10).

15. An apparatus according to claim 14, wherein the control unit (36;47) is adapted to control the press (3) to vary the
15 flow rate of the sludge leaving the press in response to at least one sensed operational parameter of the press.

16. An apparatus according to claim 15, wherein the operational parameter of the press comprises the momentary
20 power for operating the press (3), pressure in the sludge in the press, sludge concentration in the press, sludge feed flow to the press or separated water flow from the press.

17. An apparatus according to claim 15, wherein the press (3)
25 comprises a press motor (1) for driving it and the operational parameter of the press comprises the momentary power consumption of the press motor.

18. An apparatus according to claim 17, wherein the press (3)
30 comprises a press screw (4) and a drive shaft (19) connecting the motor (1) and press screw, and the operational parameter of the press comprises the torque of the drive shaft.

AMENDED SHEET

2 6 -01- 2006

19. An apparatus according to claim 13, wherein the control unit (36;47) is adapted to control the press (3) to vary the flow rate of the sludge in response to at least one sensed operational parameter of the compaction device (10).

5

20. An apparatus according to claim 19, wherein the operational parameter of the compaction device comprises the pressure in the sludge in the compaction device (10), or sludge concentration in the compaction device.

10

21. An apparatus according to claim 1, wherein the operational parameter of the press comprises the momentary power for operating the press (3), pressure in the sludge in the press, sludge concentration in the press, sludge feed flow to the press or separated water flow from the press.

15

22. An apparatus according to claim 1, wherein the press (3) comprises a press motor (1) for driving it and the operational parameter of the press comprises the momentary power consumption of the press motor.

20

23. An apparatus according to claim 15, wherein the press (3) comprises a press motor (1), a press screw (4) and a drive shaft (19) connecting the motor and press screw, and the operational parameter of the press comprises the torque of the drive shaft.

25

24. An apparatus according to claim 1, wherein the operational parameter of the compaction device comprises the pressure in the sludge in the compaction device (10), or sludge concentration in the compaction device.

30

AMENDED SHEET

25. An apparatus according to claim 1, wherein the operational parameter of the press comprises the momentary power for operating the press (3).

5 26. An apparatus according to claim 1, wherein the operational parameter of the press comprises the pressure, concentration or viscosity of the sludge in the press (3).

27. An apparatus according to any one of claims 1-12, further
10 comprising a time sequence controller (35;46) adapted to control the press (3) to operate in cycles.

28. An apparatus according to any one of claims 1-12, further comprising a time sequence controller (35;46) adapted to
15 control the shredder and/or tube conveyor to operate in cycles.

29. A method of treating sludge, comprising the steps of:
providing a press (3) and operating the press to dewater the
20 sludge,
providing a compaction device (10) and operating the compaction device to compact the dewatered sludge,
providing a shredder (12;23) and operating the shredder to shred the compacted sludge,
25 controlling the operation of the shredder in response to at least one sensed operational parameter of the press and/or at least one operational parameter of the compaction device,
providing a transport screw (28) in a closed channel and rotating the transport screw to transport the shredded sludge
30 in the closed channel,
controlling the rotational speed of the transport screw in response to at least one sensed operational parameter of the press (3), and

AMENDED SHEET

discharging the sludge from the channel.

30. A method according to claim 29, further comprising shredding the sludge at least once more as the sludge is
5 transported in the channel.

31. A method according to claim 29, further comprising shredding the sludge once more just before the sludge is discharged from the channel.

10

32. A method according to claim 29, further comprising washing the sludge at the same time as it is dewatered.

33. A method according to claim 32, wherein the sludge is
15 washed in cycles.

34. A method according to claim 29, further comprising also controlling the press to transport the sludge at a controlled flow rate to or from the compaction device.

20

35. A method according to claim 29, further comprising also controlling the press (3) to vary the flow rate of the sludge in response to at least one sensed operational parameter of the press.

25

36. A method according to claim 35, wherein the operational parameter of the press (3) comprises the momentary power for operating the press (3), pressure in the sludge in the press, sludge concentration in the press, sludge feed flow to the
30 press or separated water flow from the press.

37. A method according to claim 35, wherein the press (3) comprises a press motor (1) for driving it and the operational

AMENDED SHEET

parameter of the press comprises the momentary power consumption of the press motor (1).

38. A method according to claim 37, wherein the press (3) comprises a press screw (4) and a drive shaft (19) connecting the motor (1) and press screw, and the operational parameter of the press comprises the torque of the drive shaft.

39. A method according to claim 29, further comprising also controlling the press (3) to vary the flow rate of the sludge in response to at least one sensed operational parameter of the compaction device (10).

40. A method according to claim 39, wherein the operational parameter of the compaction device (10) comprises the pressure in the sludge in the compaction device (10), or sludge concentration in the compaction device.

41. A method according to claim 29, wherein the operational parameter of the press (3) comprises the momentary power for operating the press (3), pressure in the sludge in the press, sludge concentration in the press, sludge feed flow to the press or separated water flow from the press.

42. A method according to claim 29, wherein the press comprises a press motor (1) for driving it and the operational parameter of the press (3) comprises the momentary power consumption of the press motor.

43. A method according to claim 29, wherein the press (3) comprises a press motor (1), a press screw (4) and a drive shaft (19) connecting the motor (1) and press screw, and the

AMENDED SHEET

operational parameter of the press (3) comprises the torque of the drive shaft.

44. A method according to claim 29, wherein the operational
5 parameter of the compaction device comprises the pressure in the sludge in the compaction device (10), or sludge concentration in the compaction device.

45. A method according to claim 29, wherein the operational
10 parameter of the press (3) comprises the momentary power for operating the press.

46. A method according to claim 29, wherein the operational
parameter of the press comprises the pressure, concentration
15 or viscosity of the sludge in the press (3).

47. A method according to claim 29, further comprising also controlling the press (3) to operate in cycles.

20 48. A method according to claim 29, further comprising controlling the shredder (23) to operate in cycles.

49. A method according to claim 29, further comprising controlling the transport screw (28) to operate in cycles.

25

50. A method according to claim 29, wherein the transport screw (28) is adapted to convey the shredded sludge in a direction upwardly from the shredder (23) and the sludge is discharged from the channel in a position above the shredder.

30

AMENDED SHEET

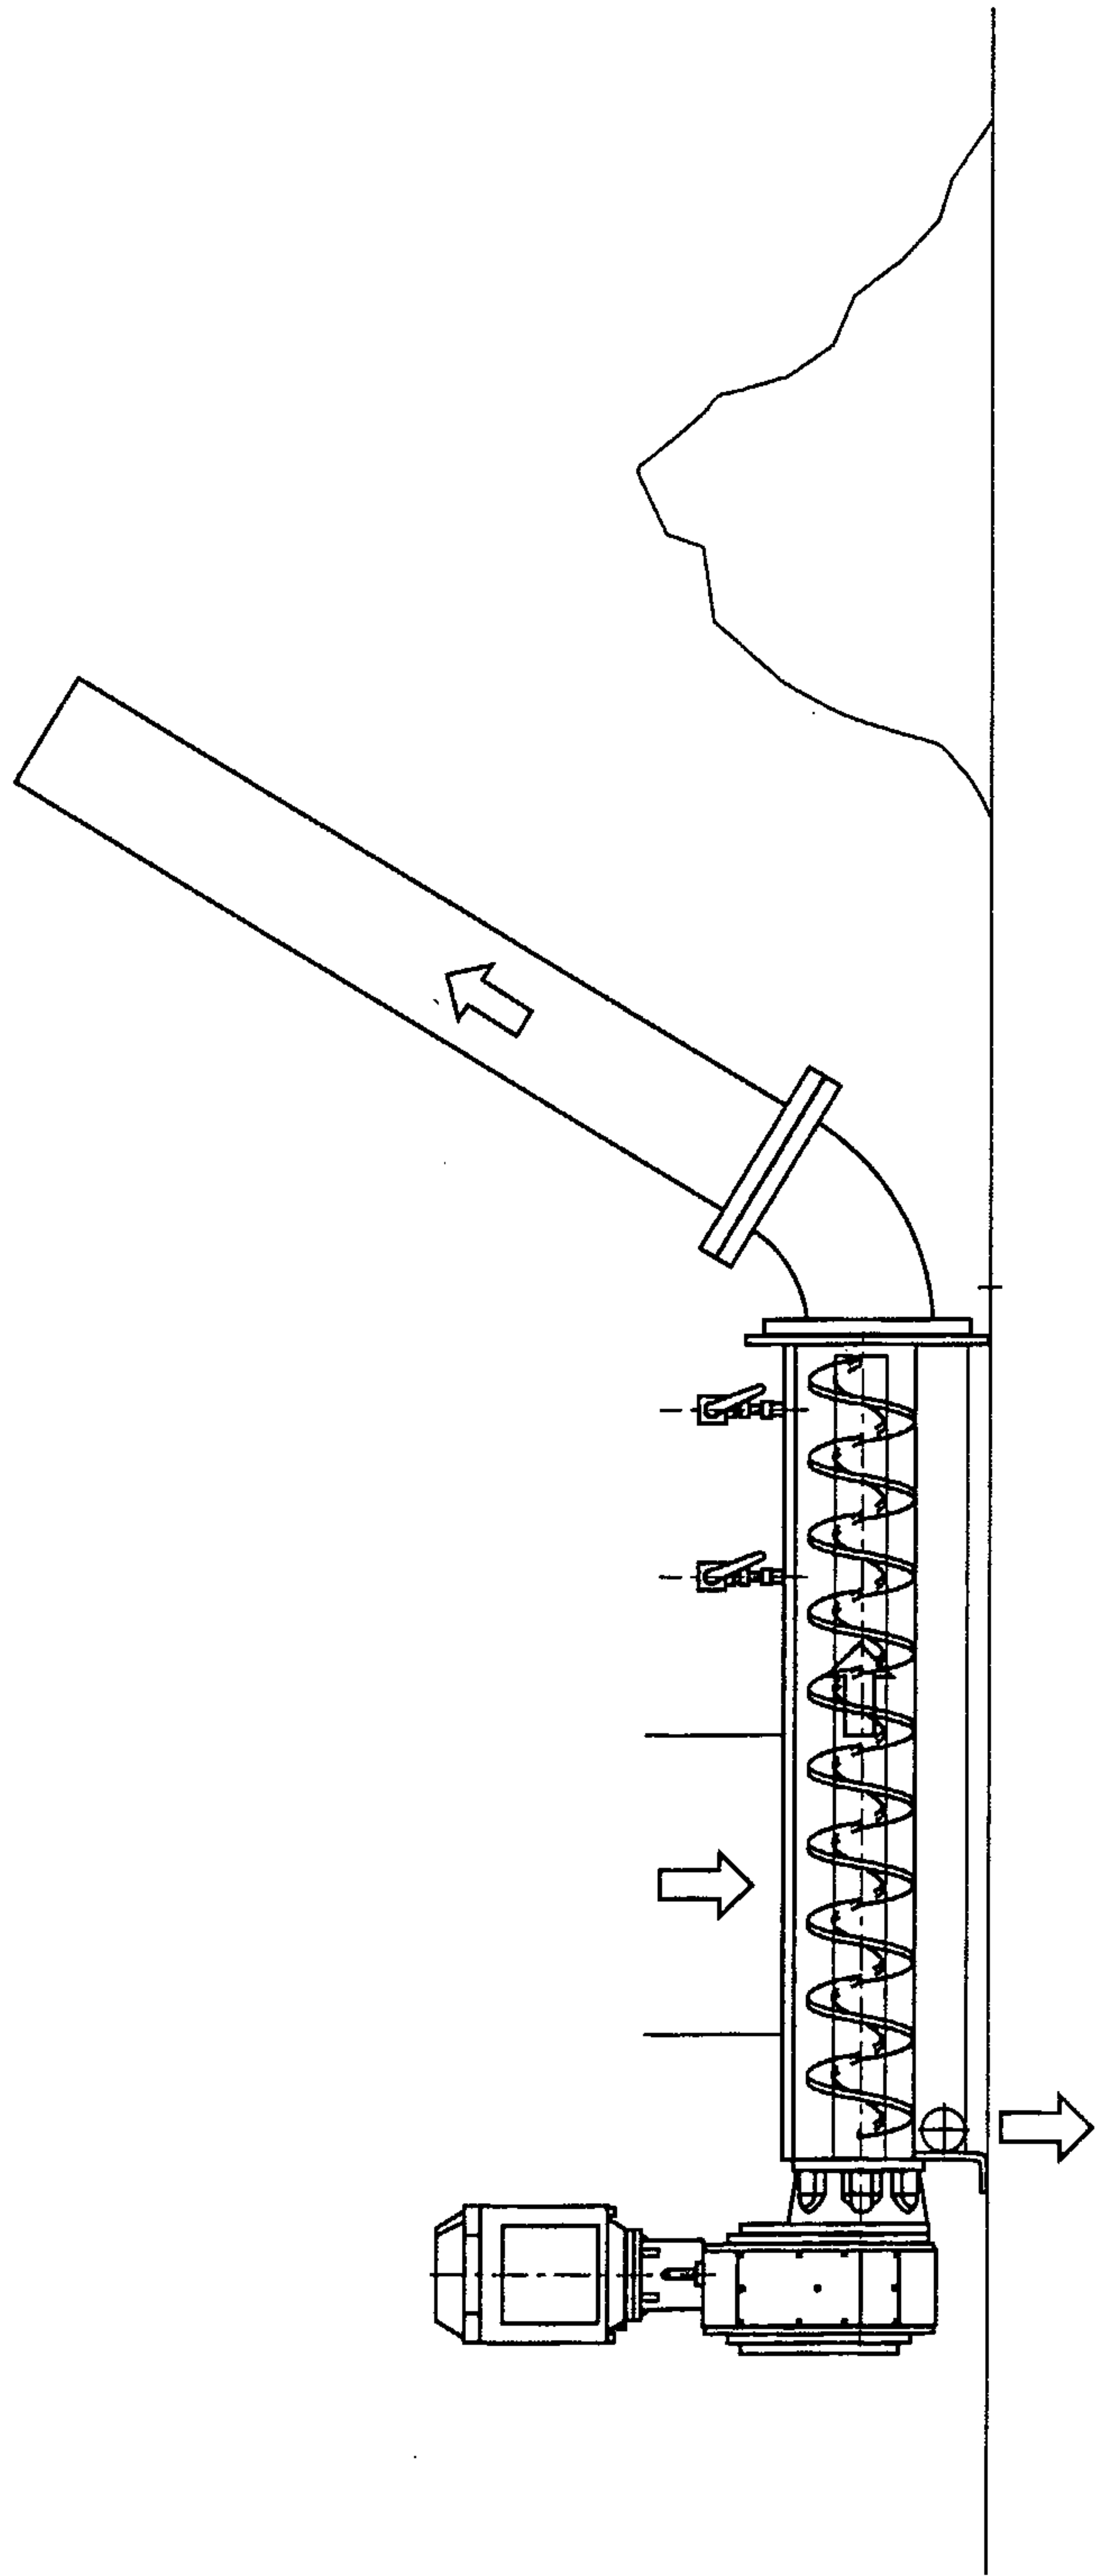
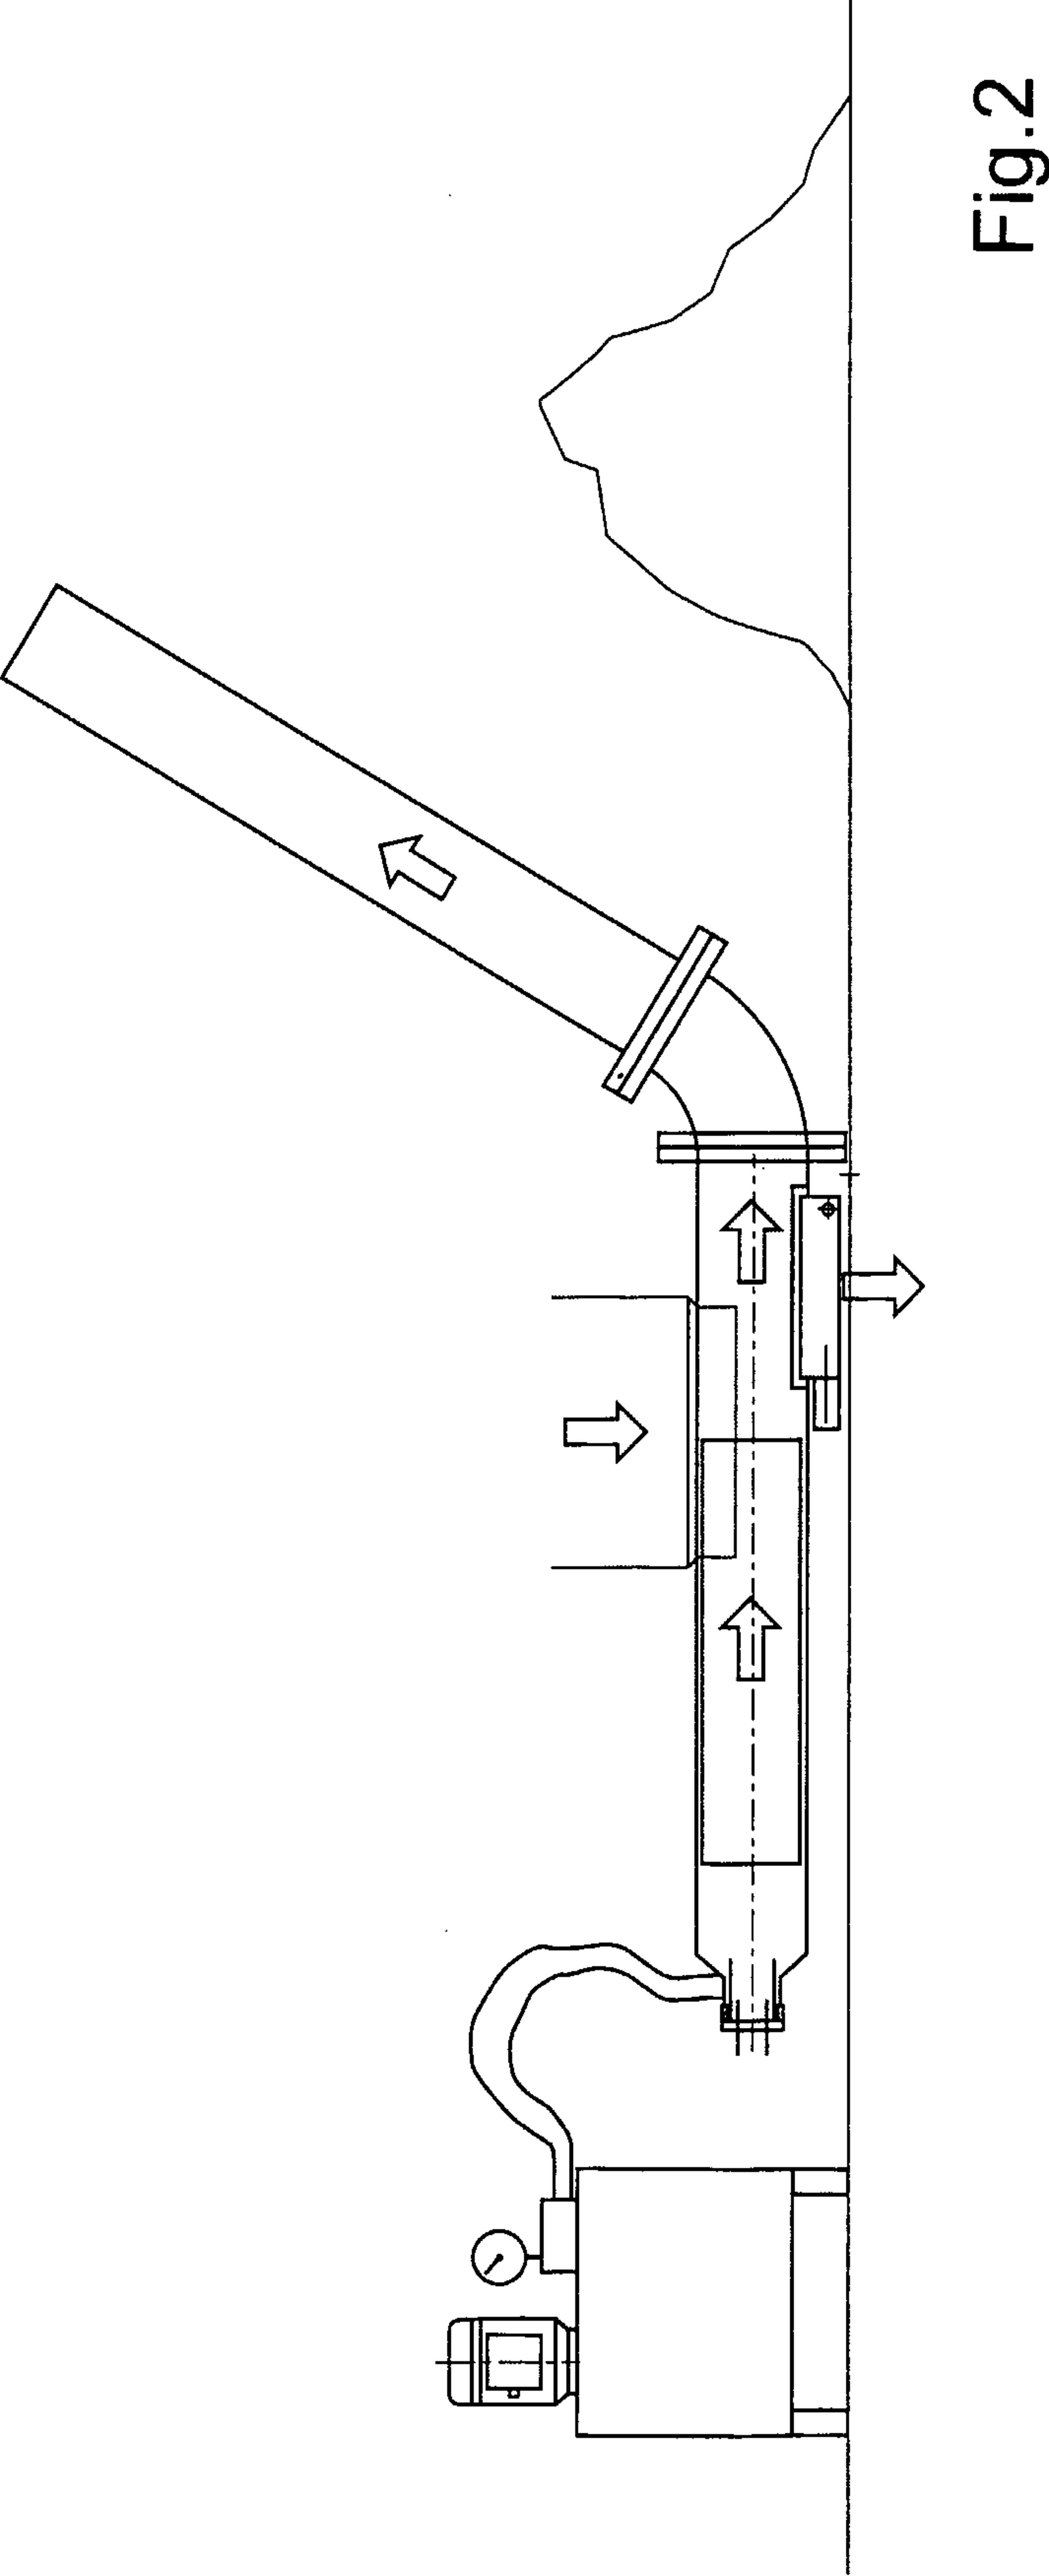


Fig. 1



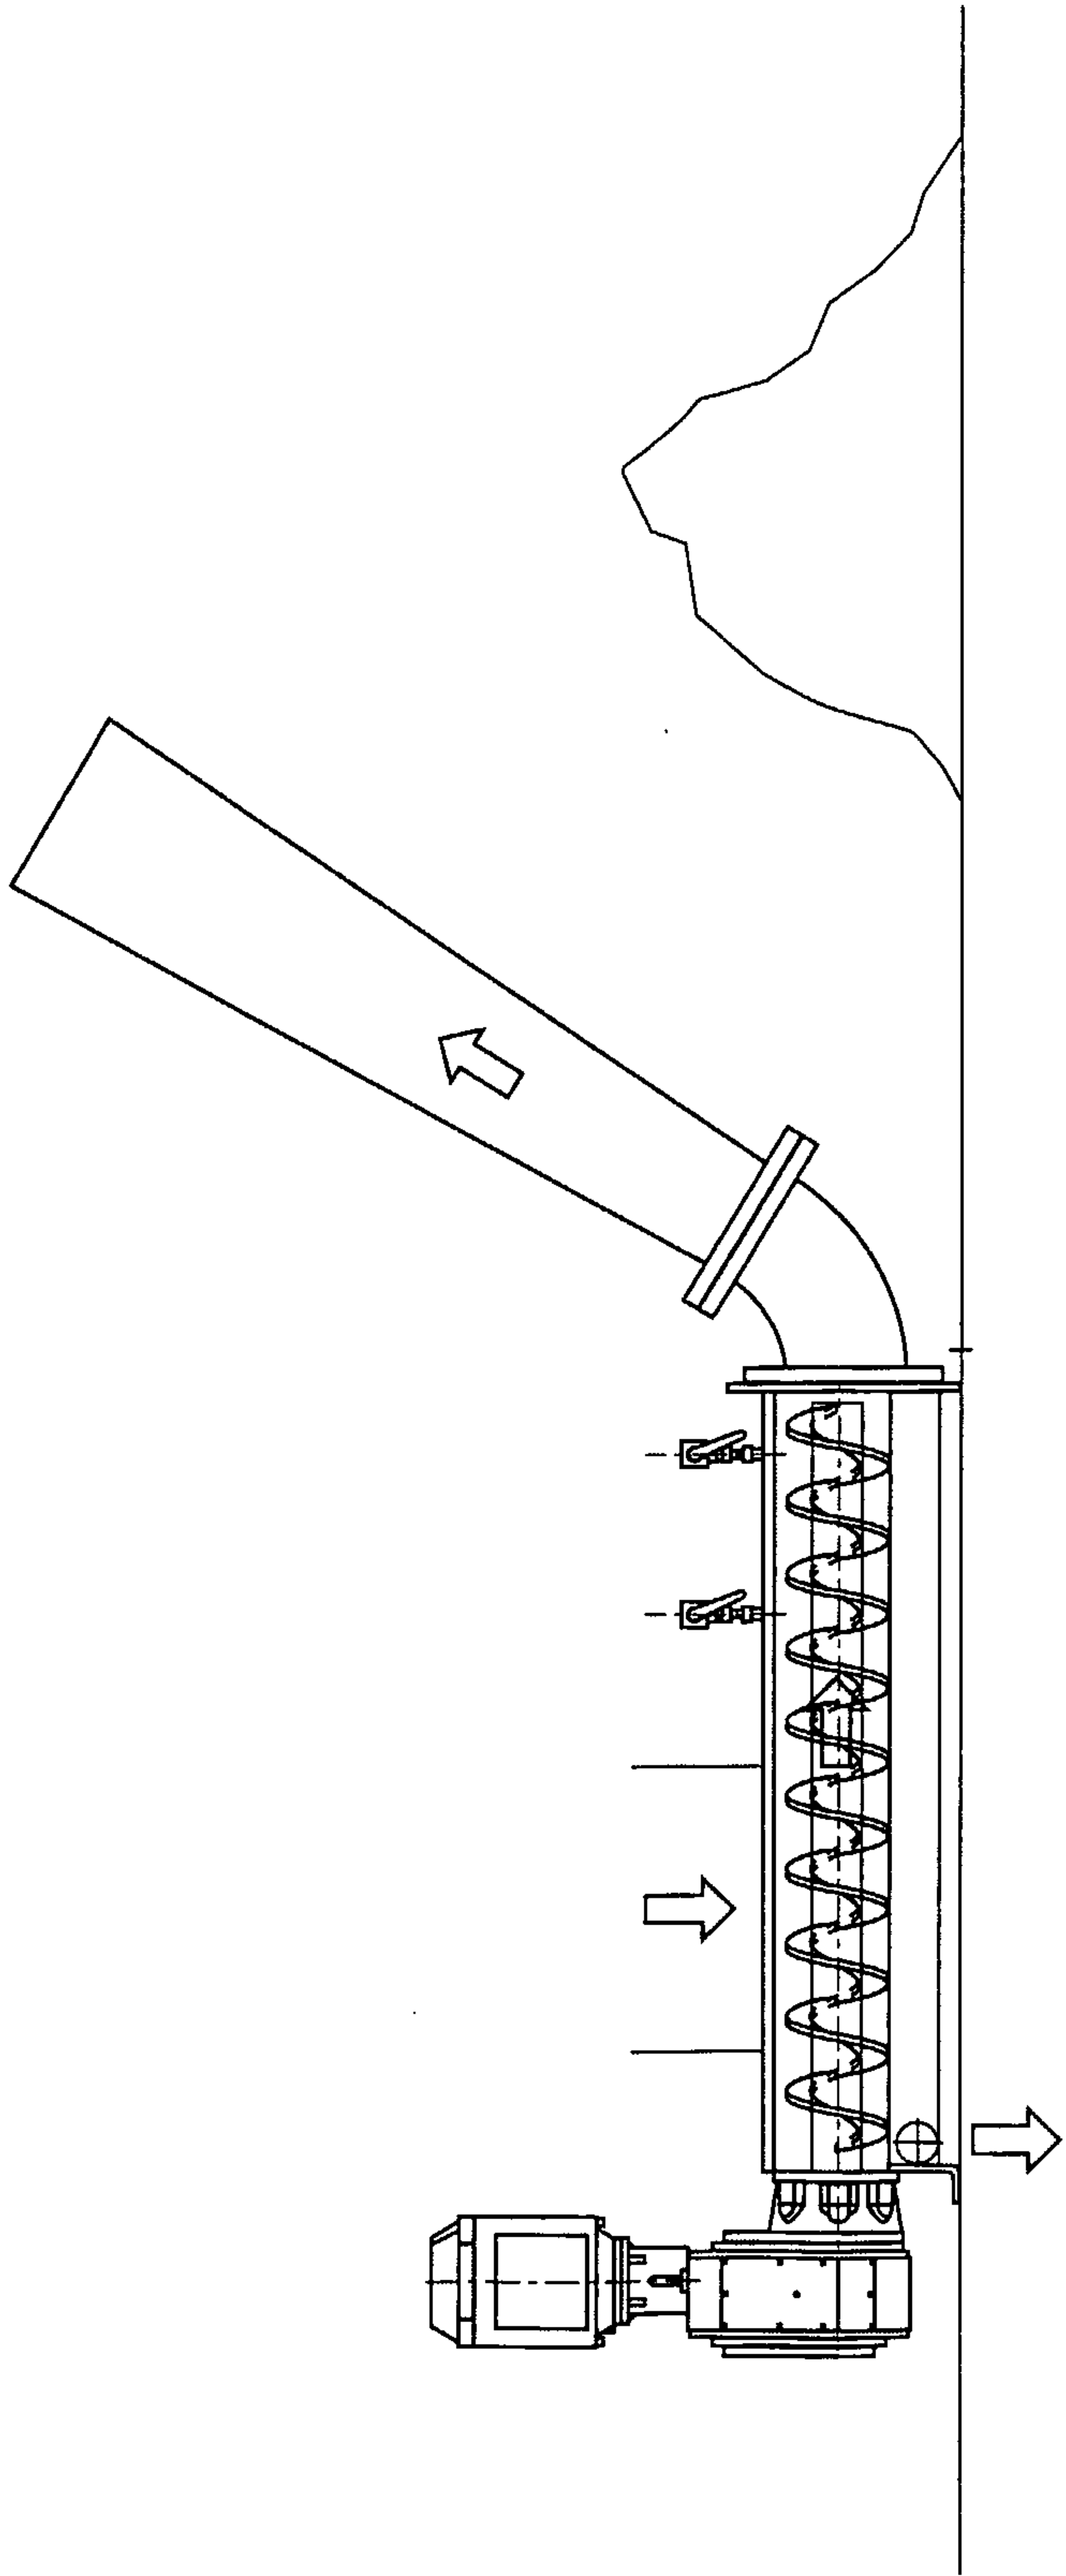


Fig. 3

4/11

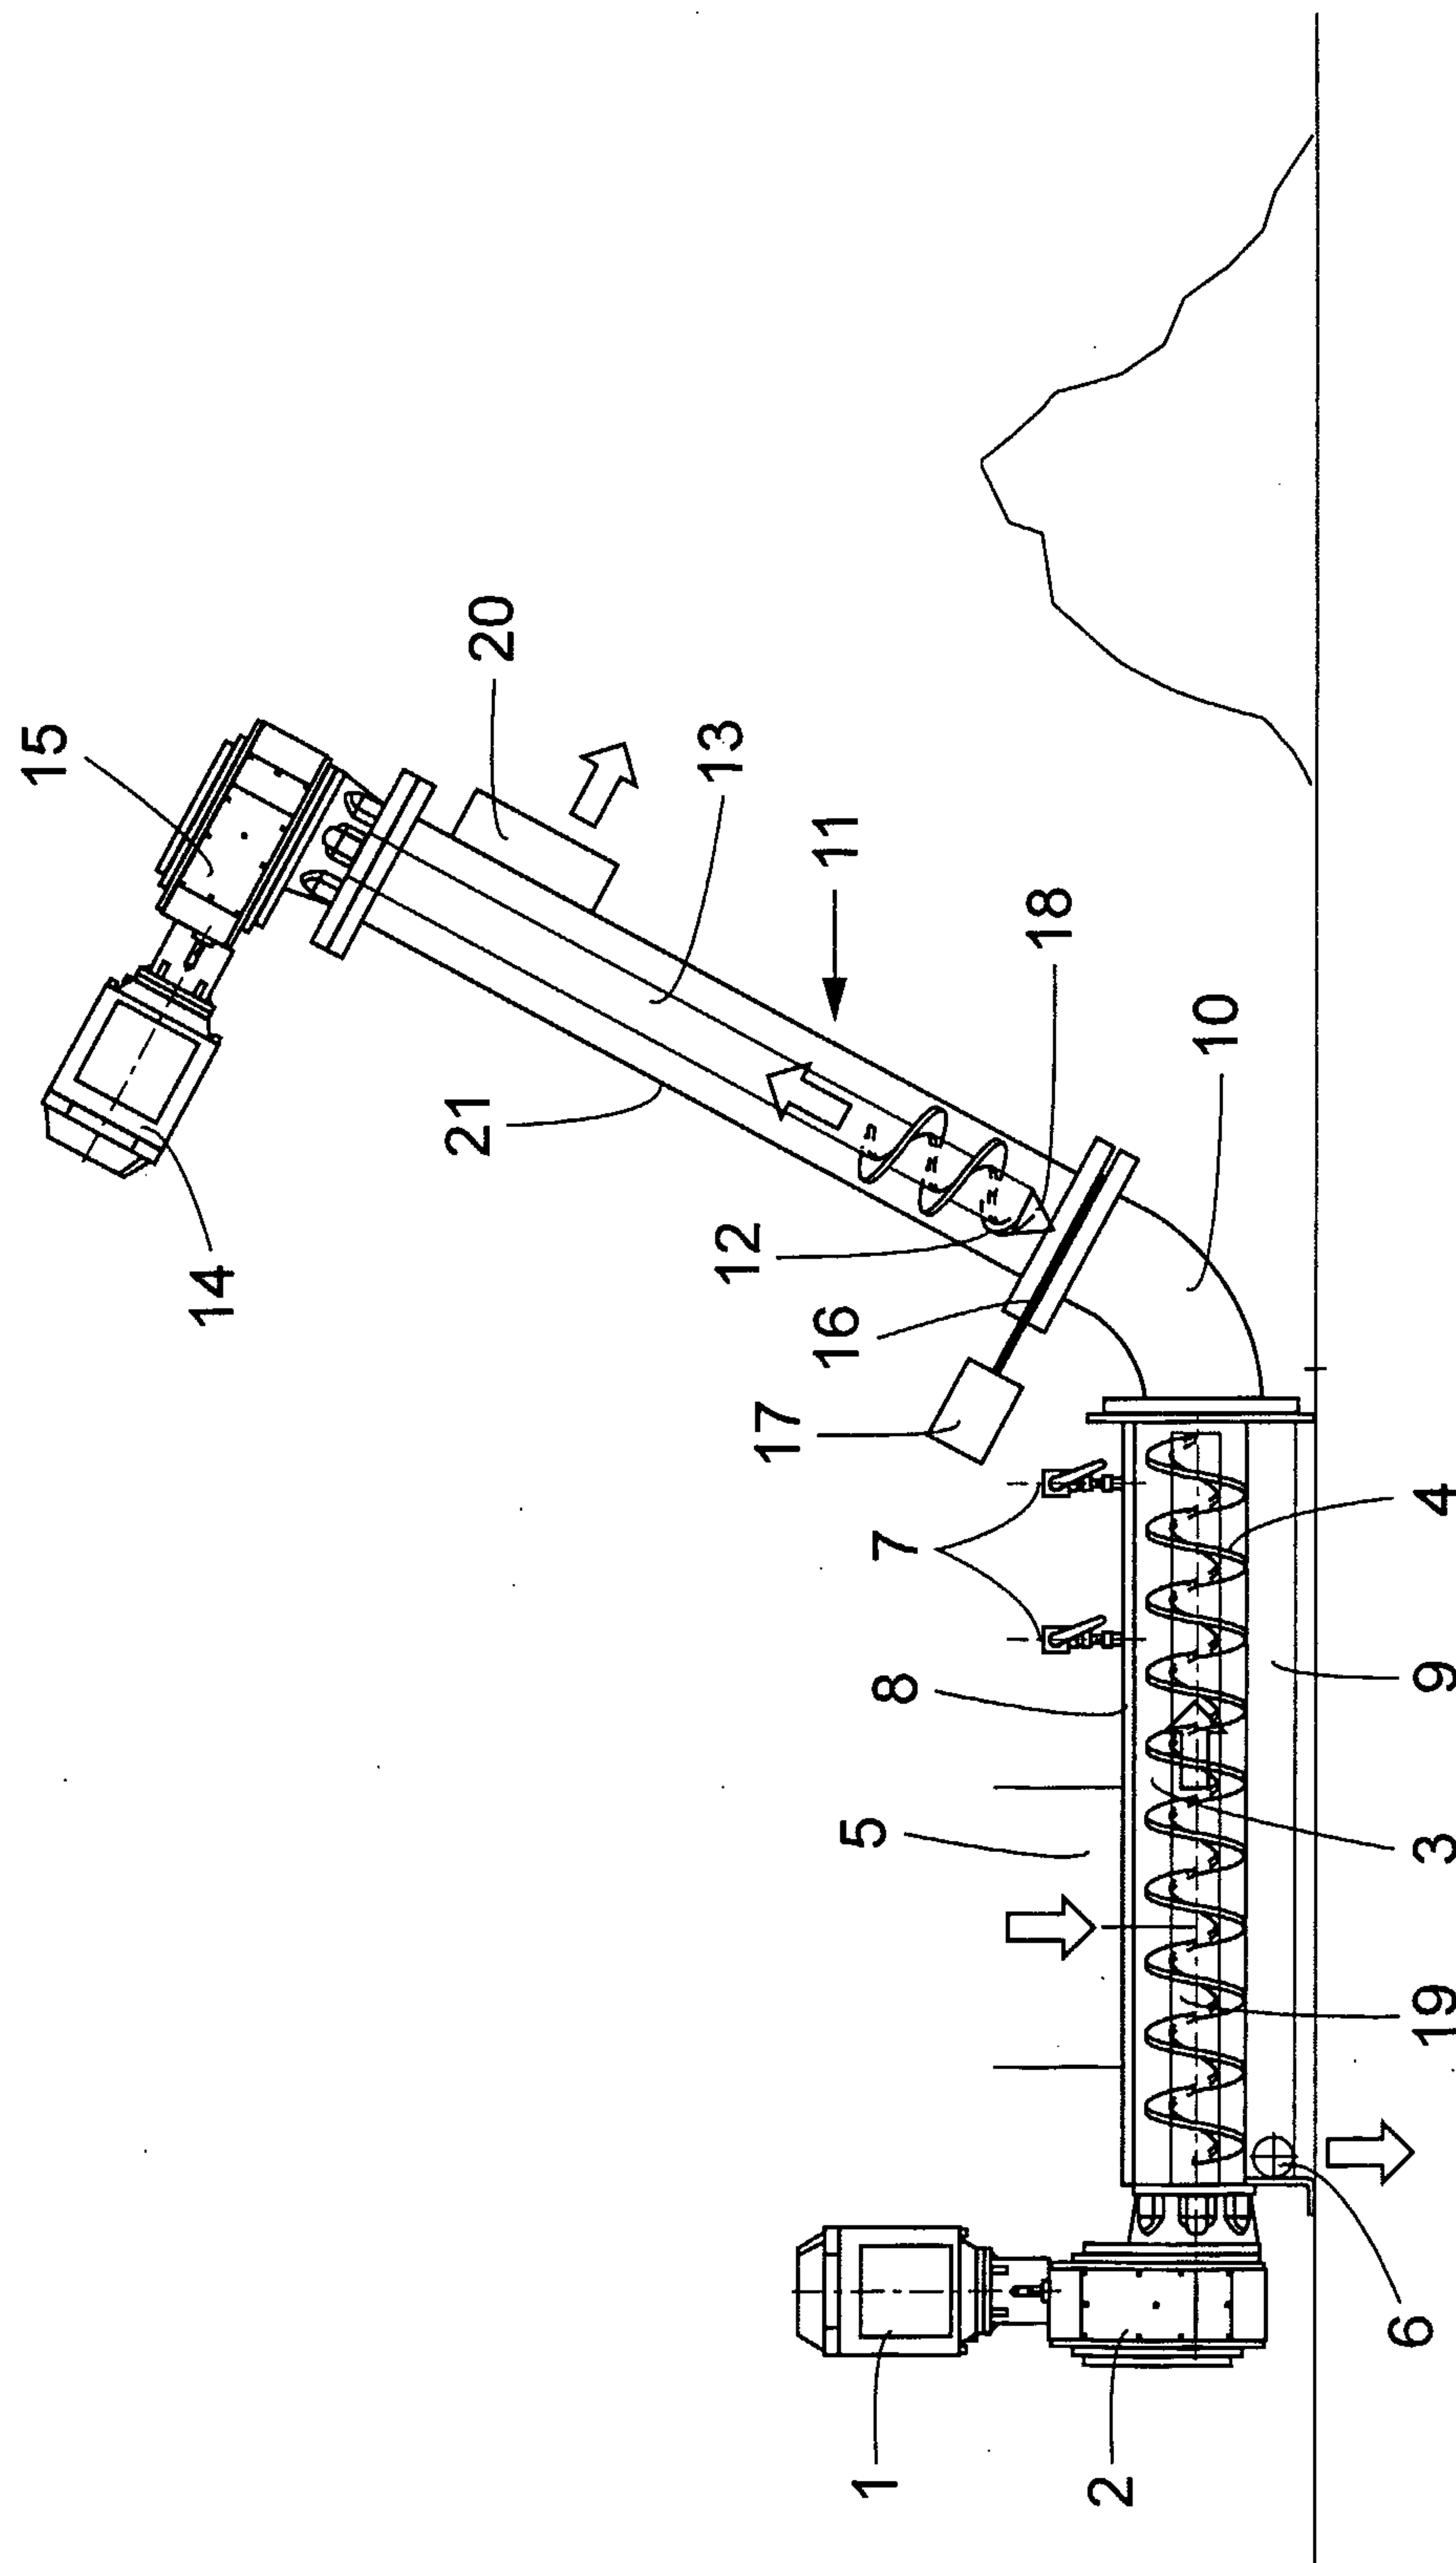


Fig. 4

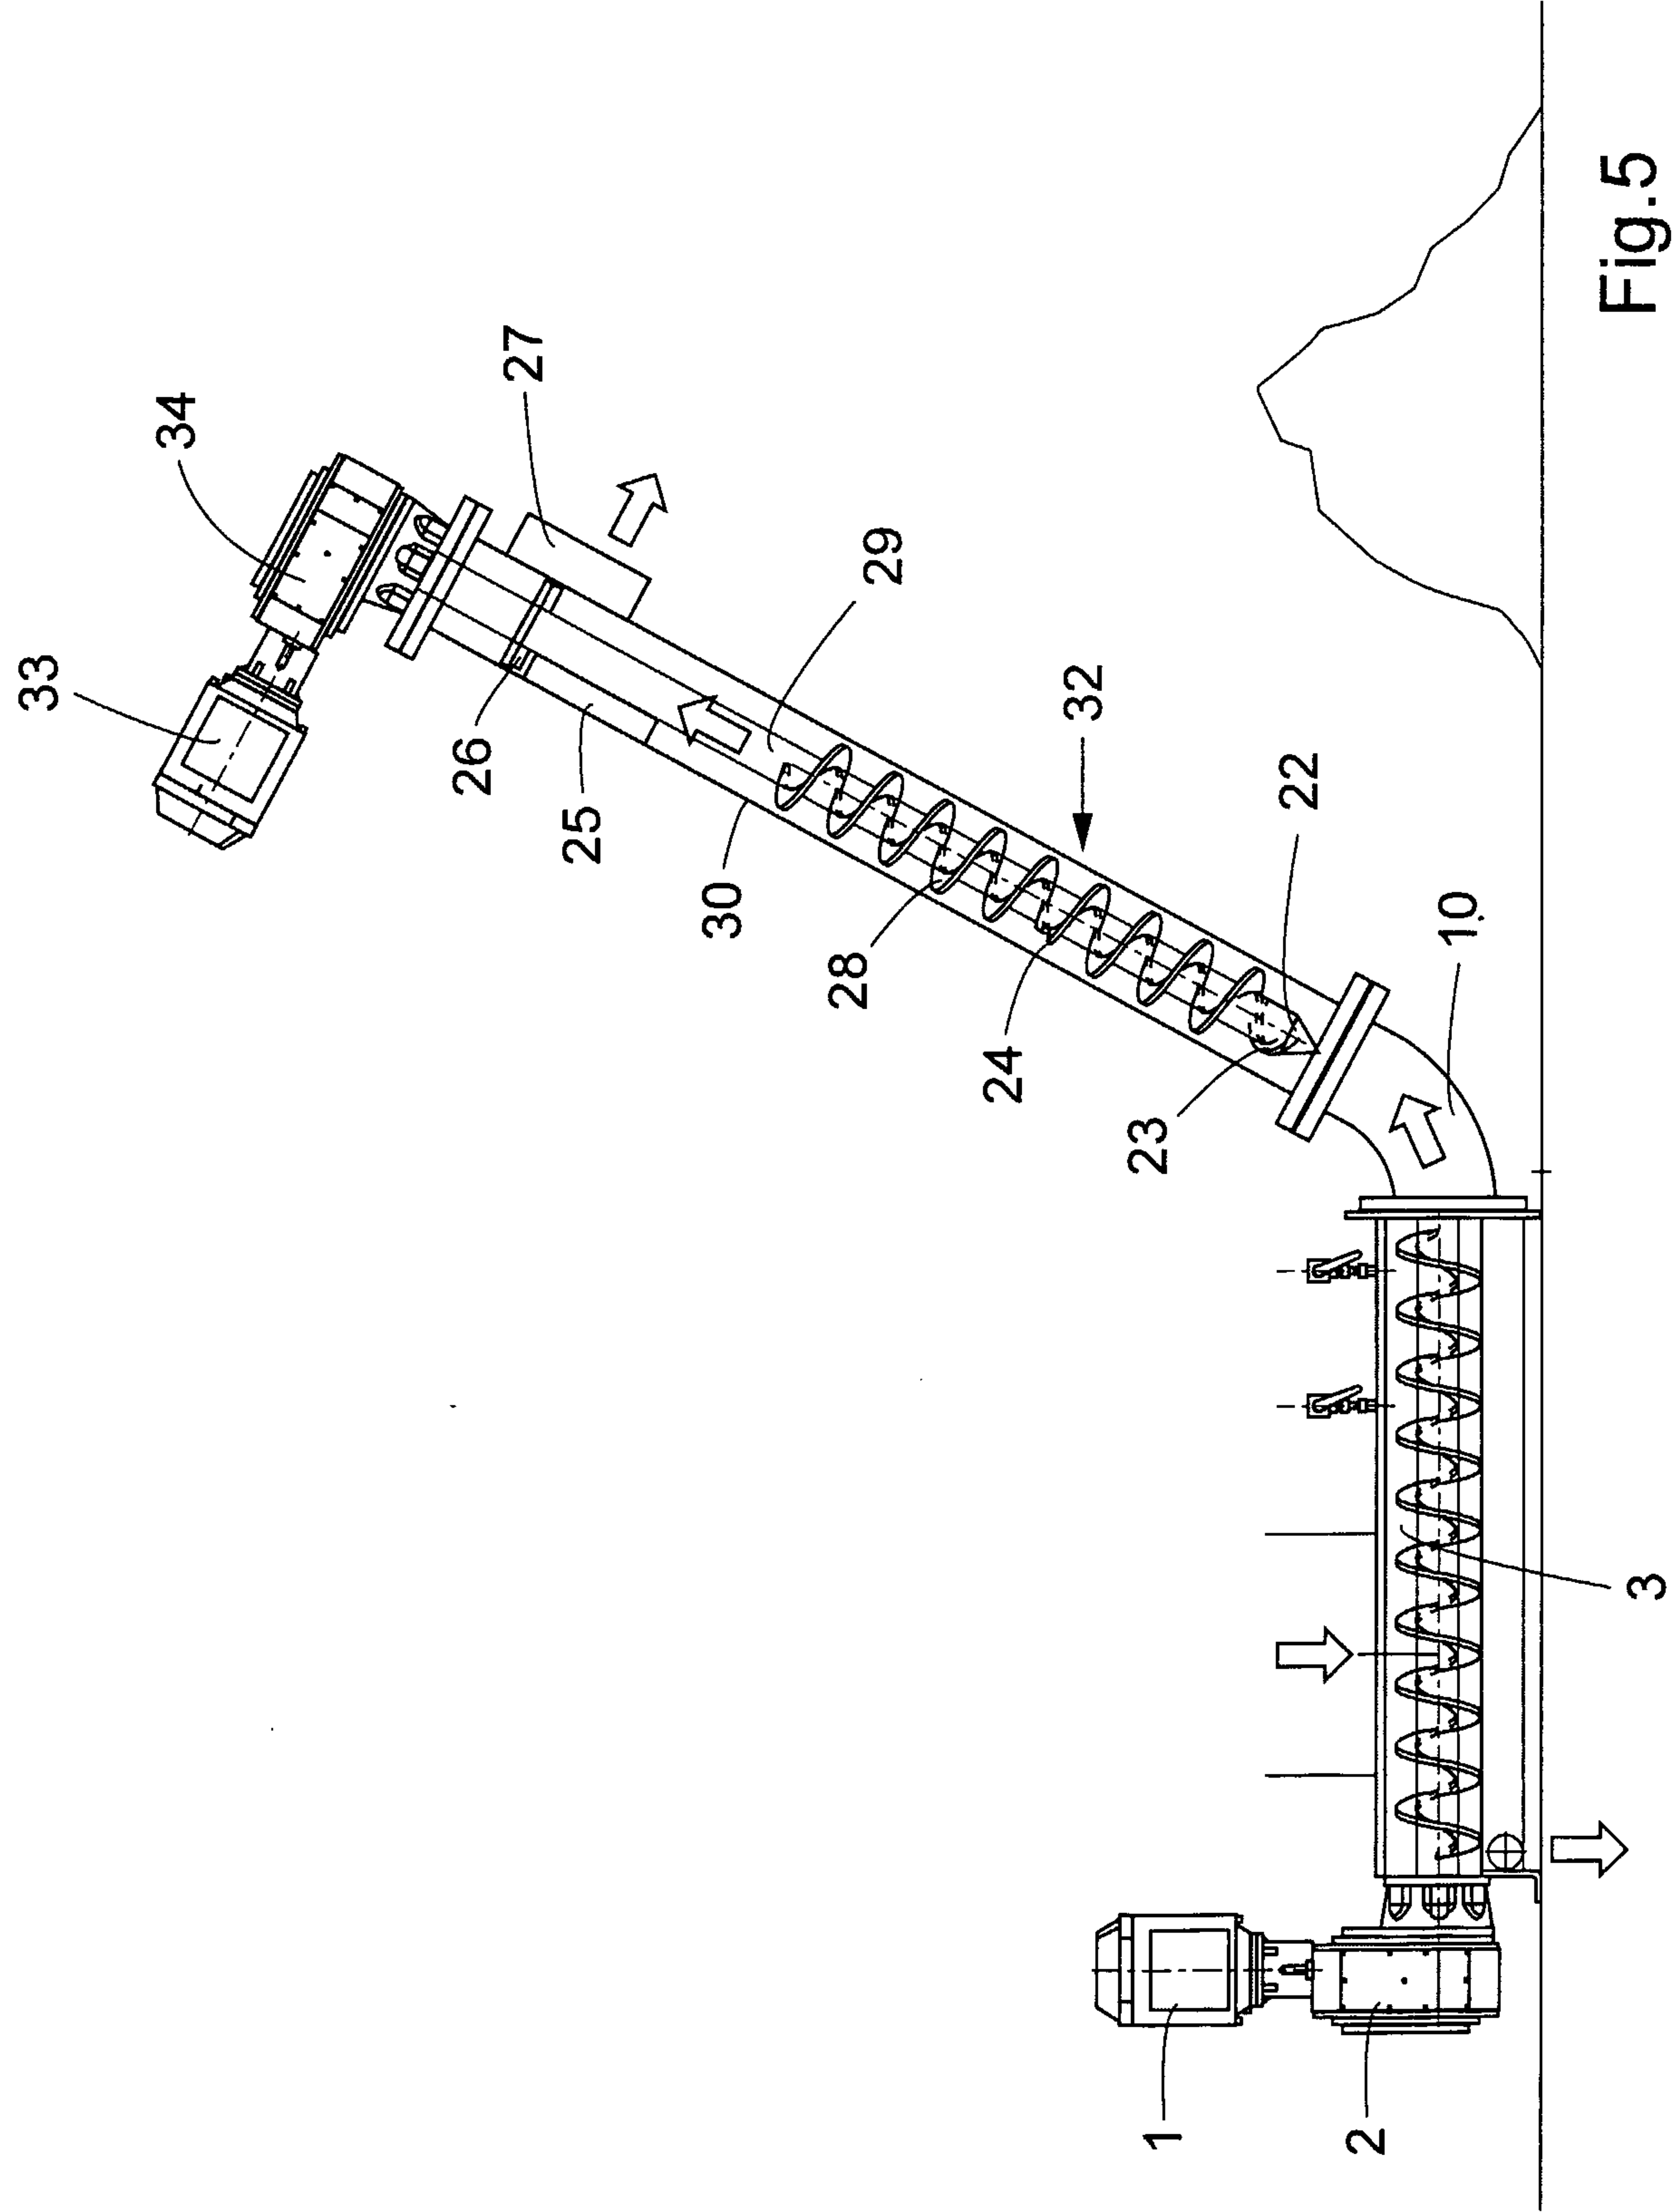
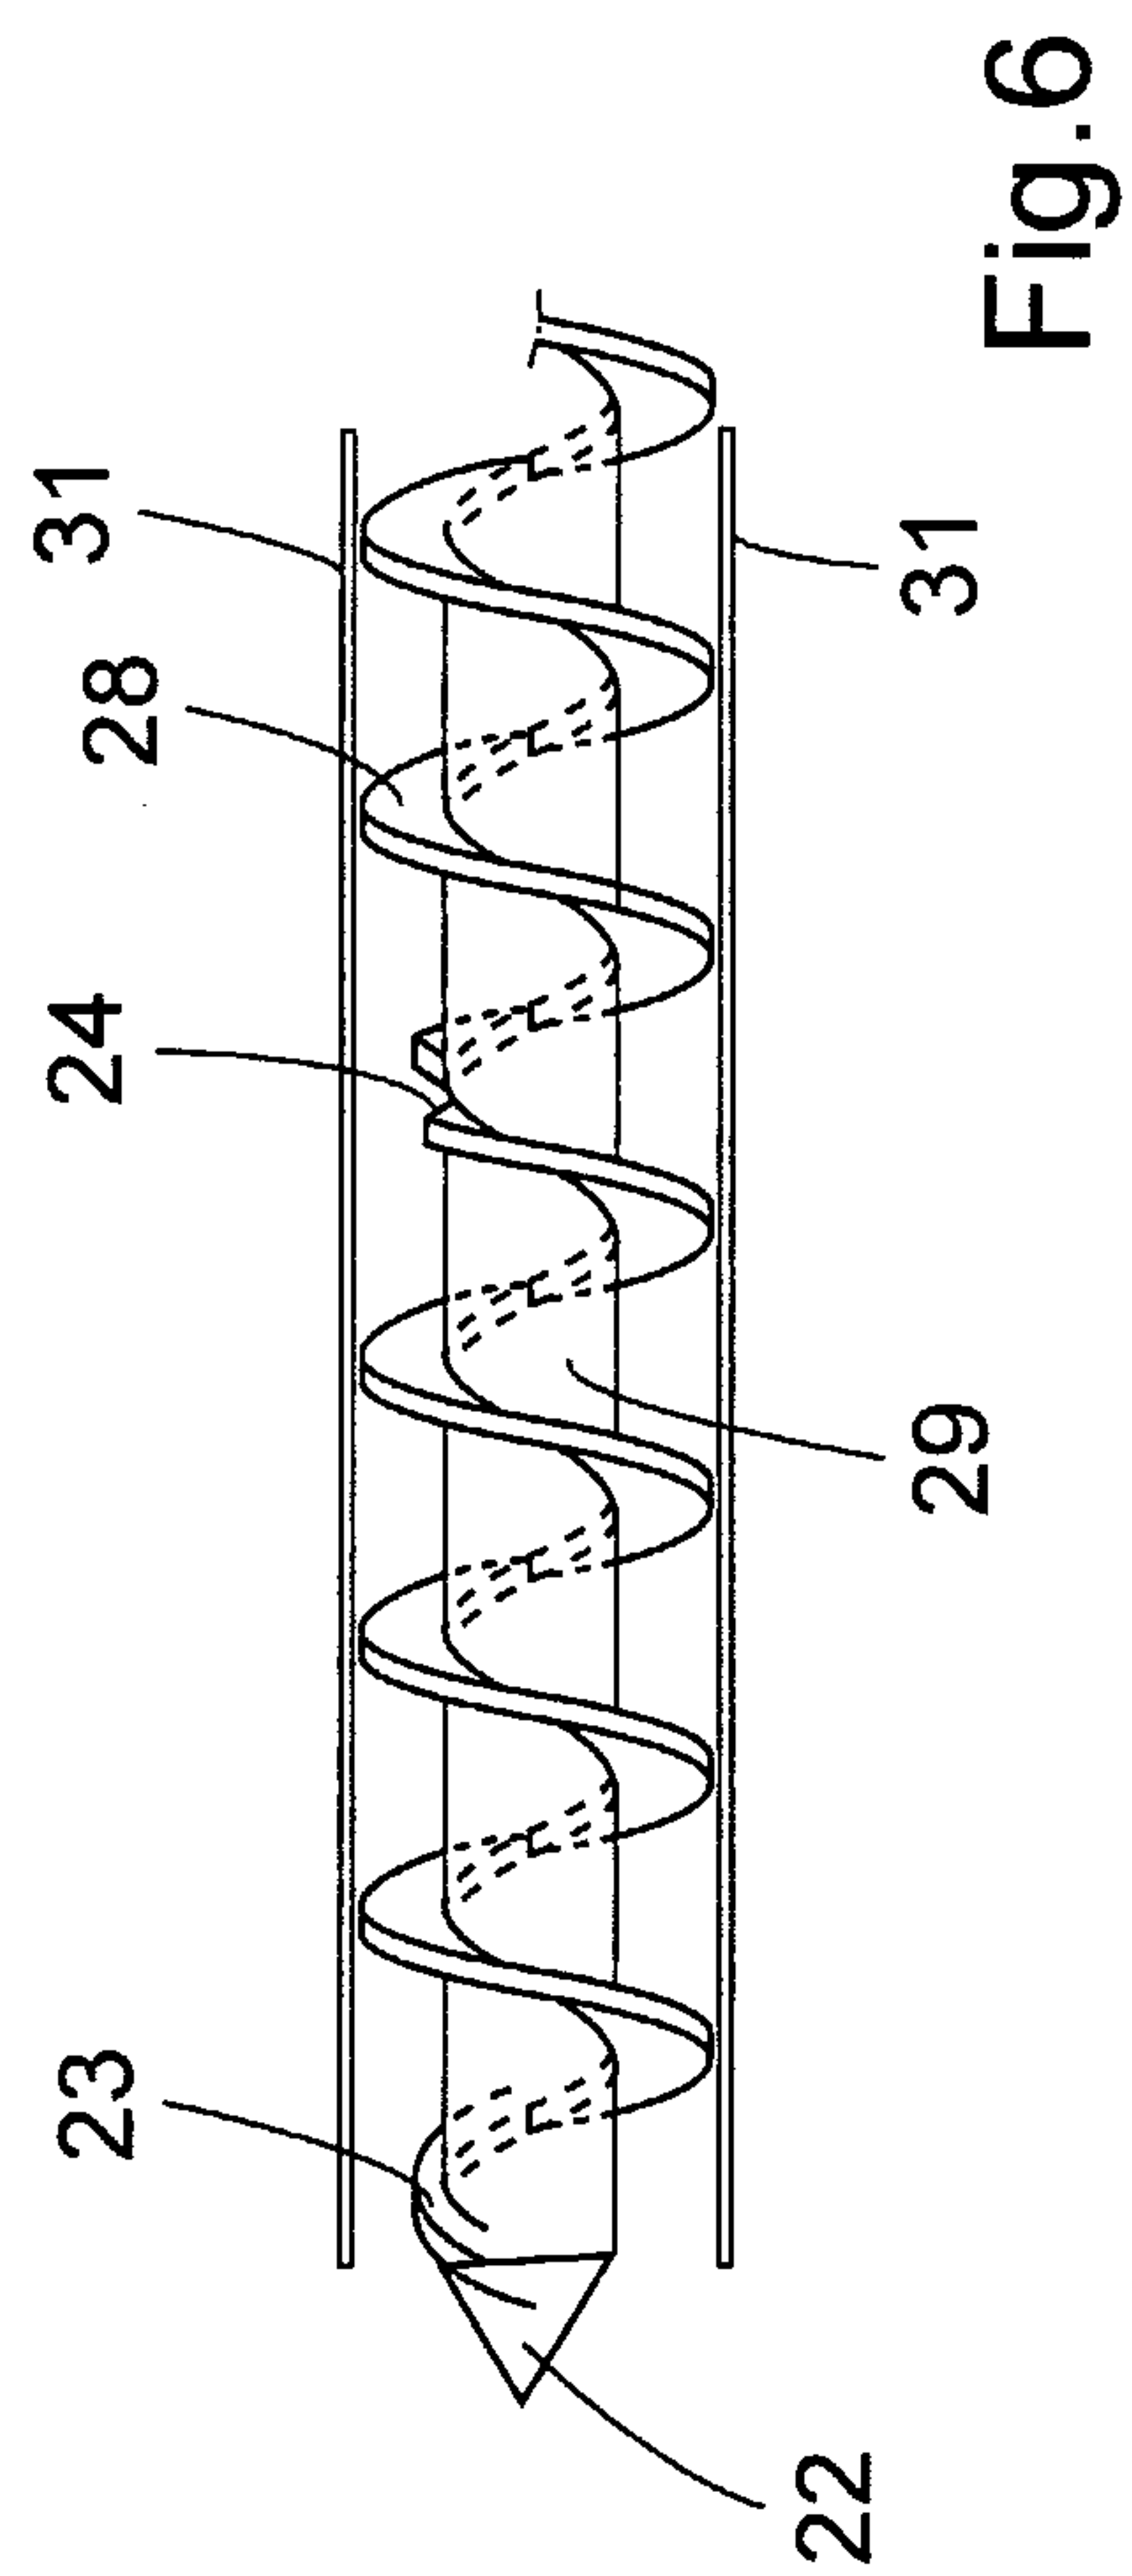
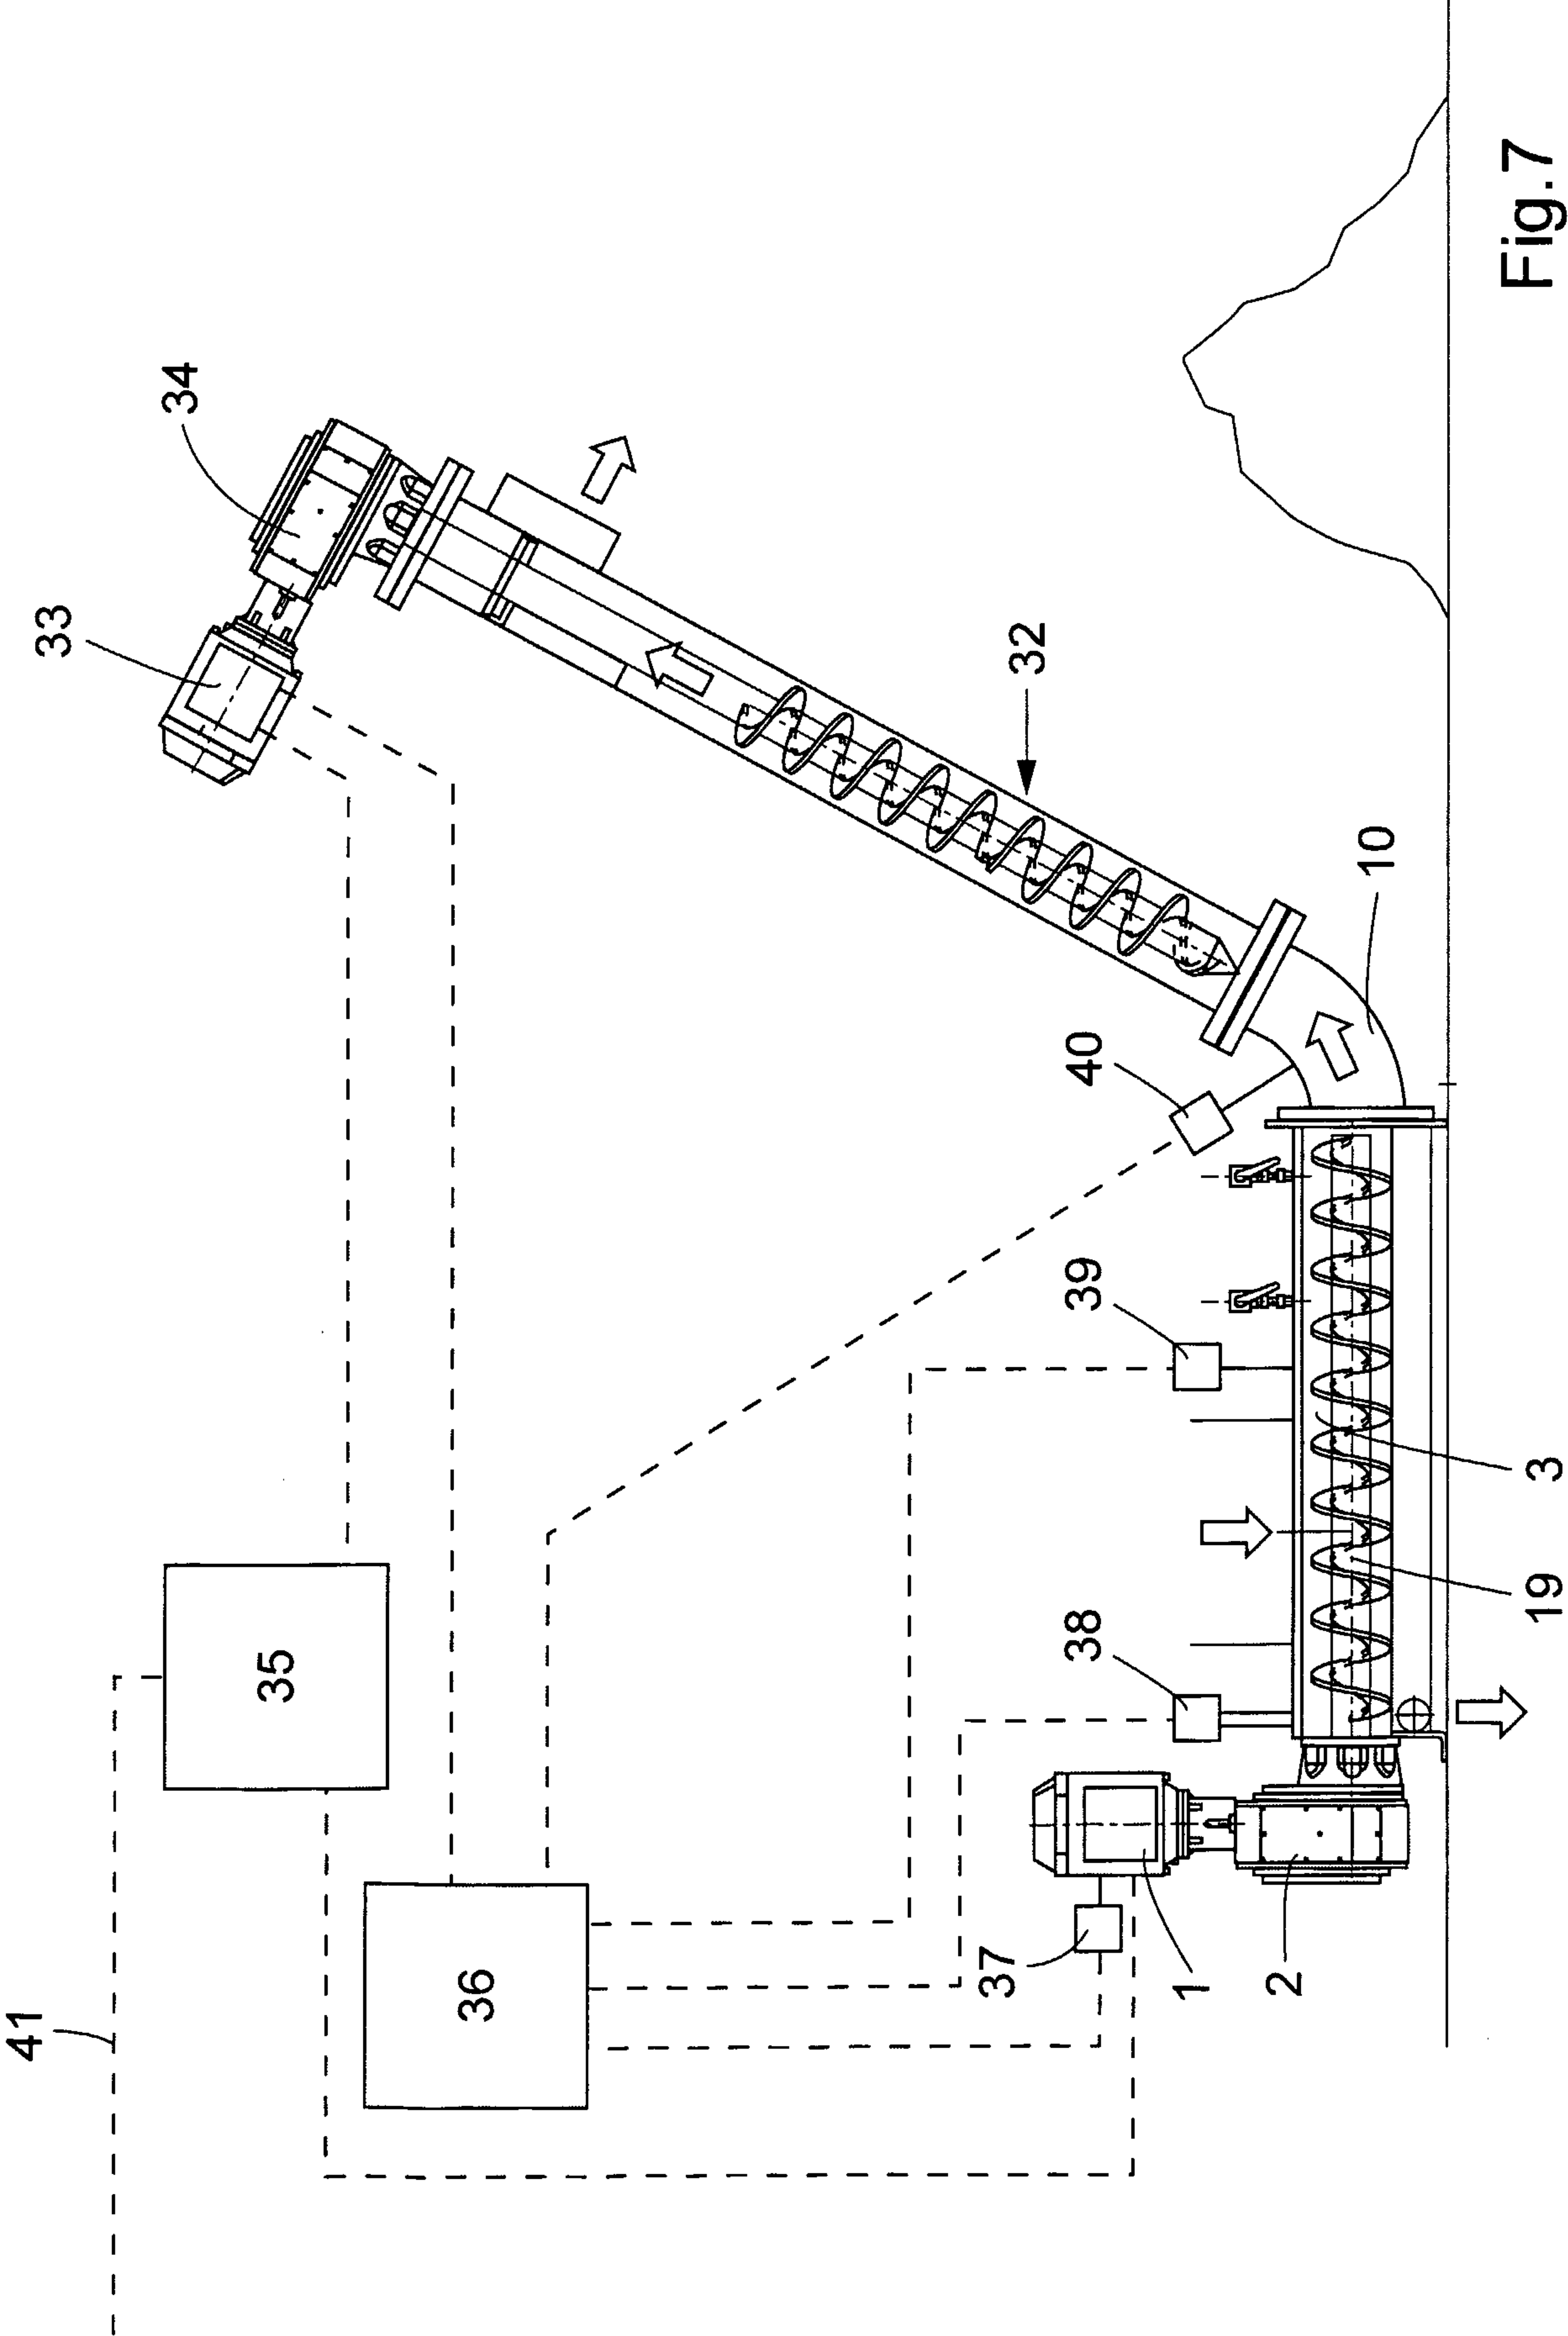


Fig. 5

6/11





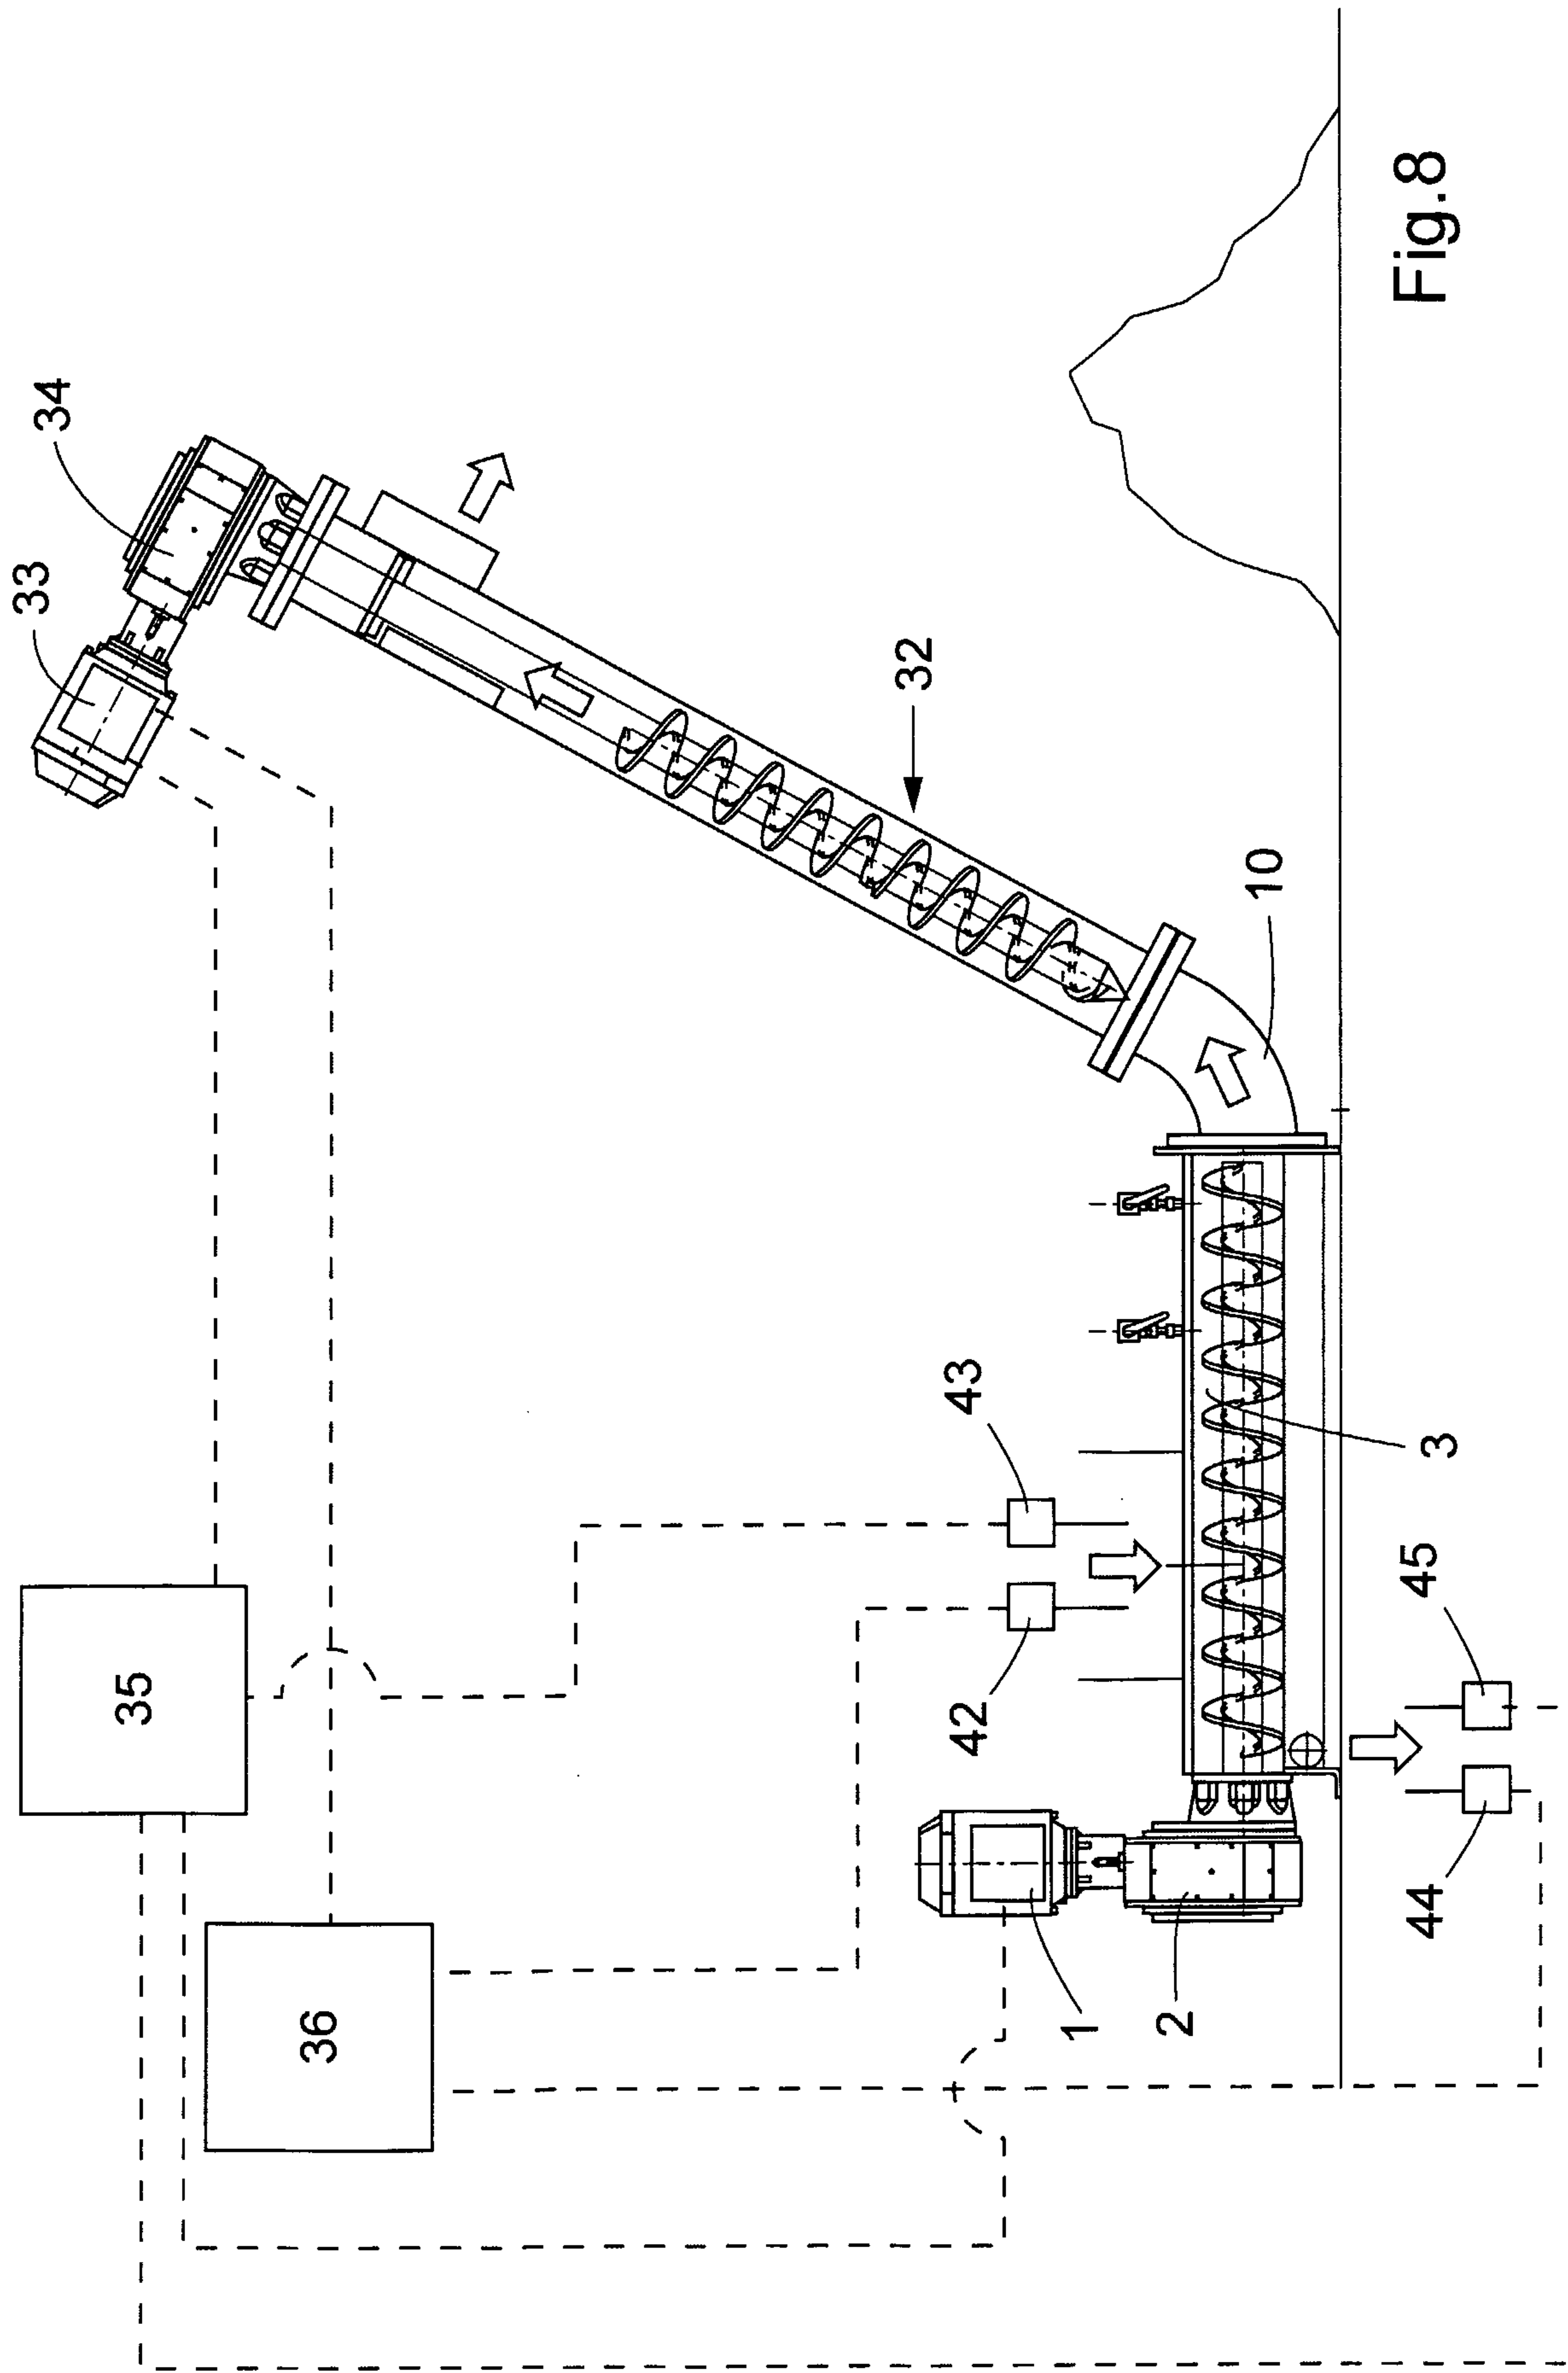


Fig. 8

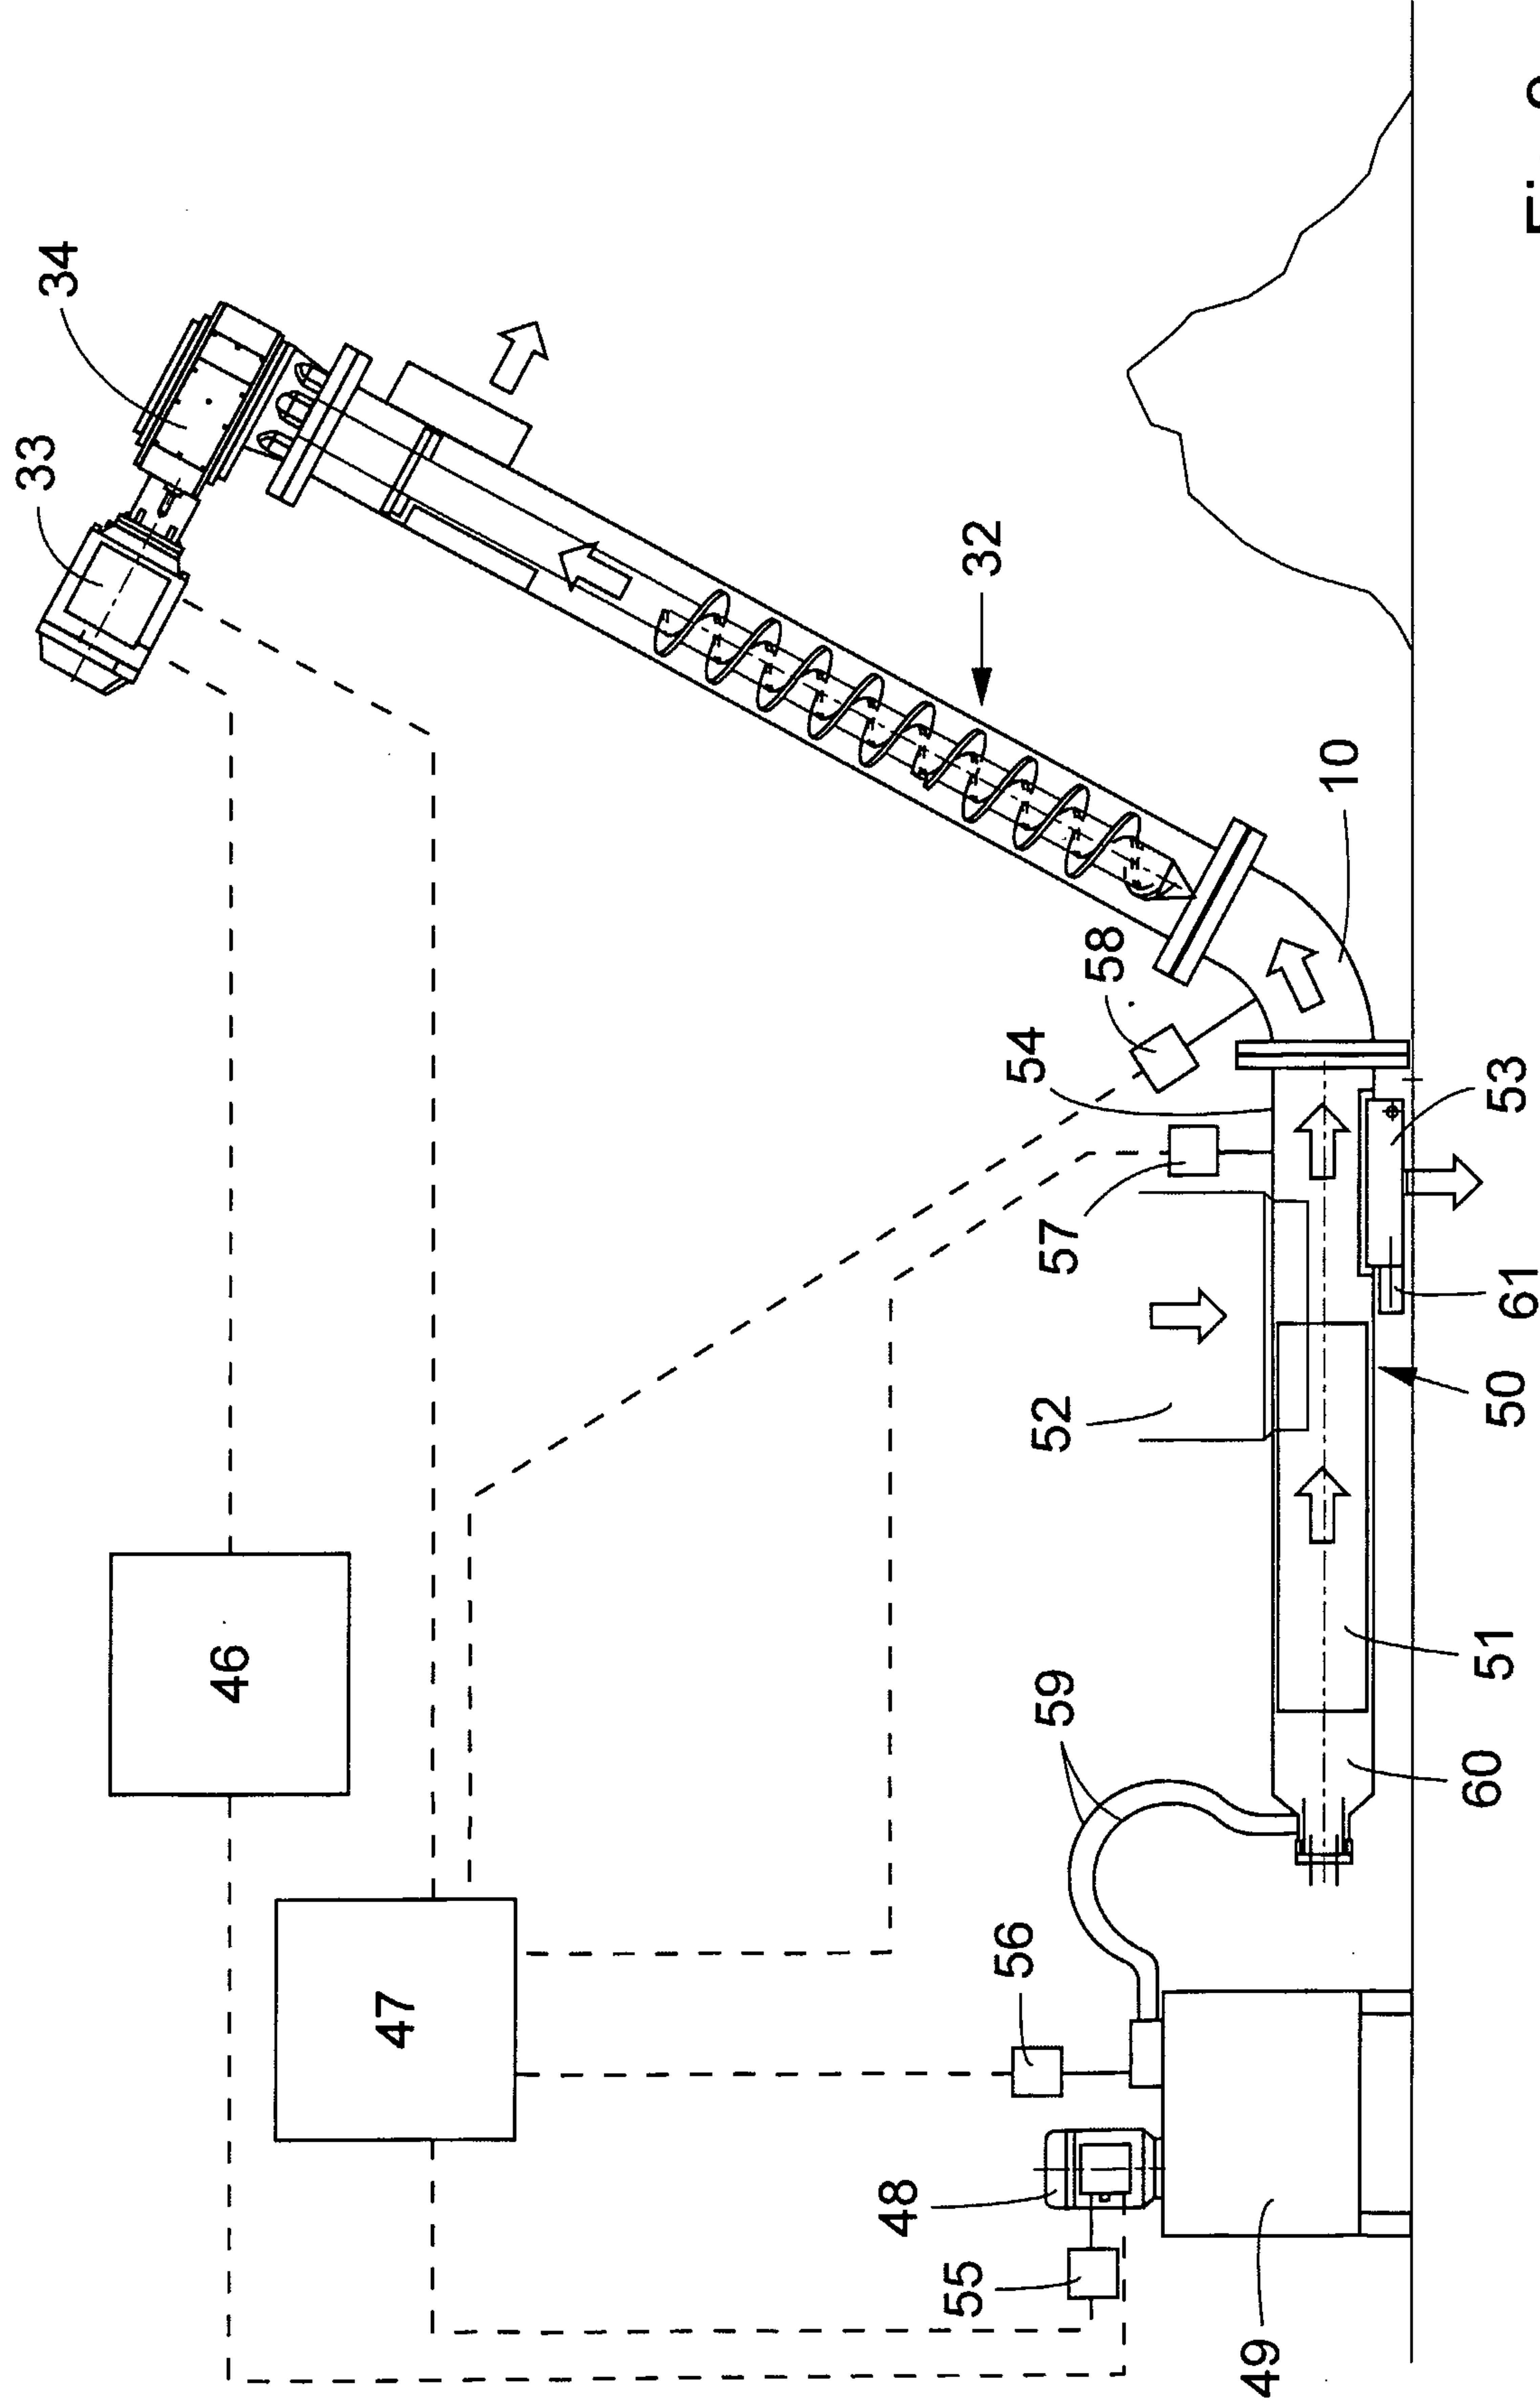


Fig.9

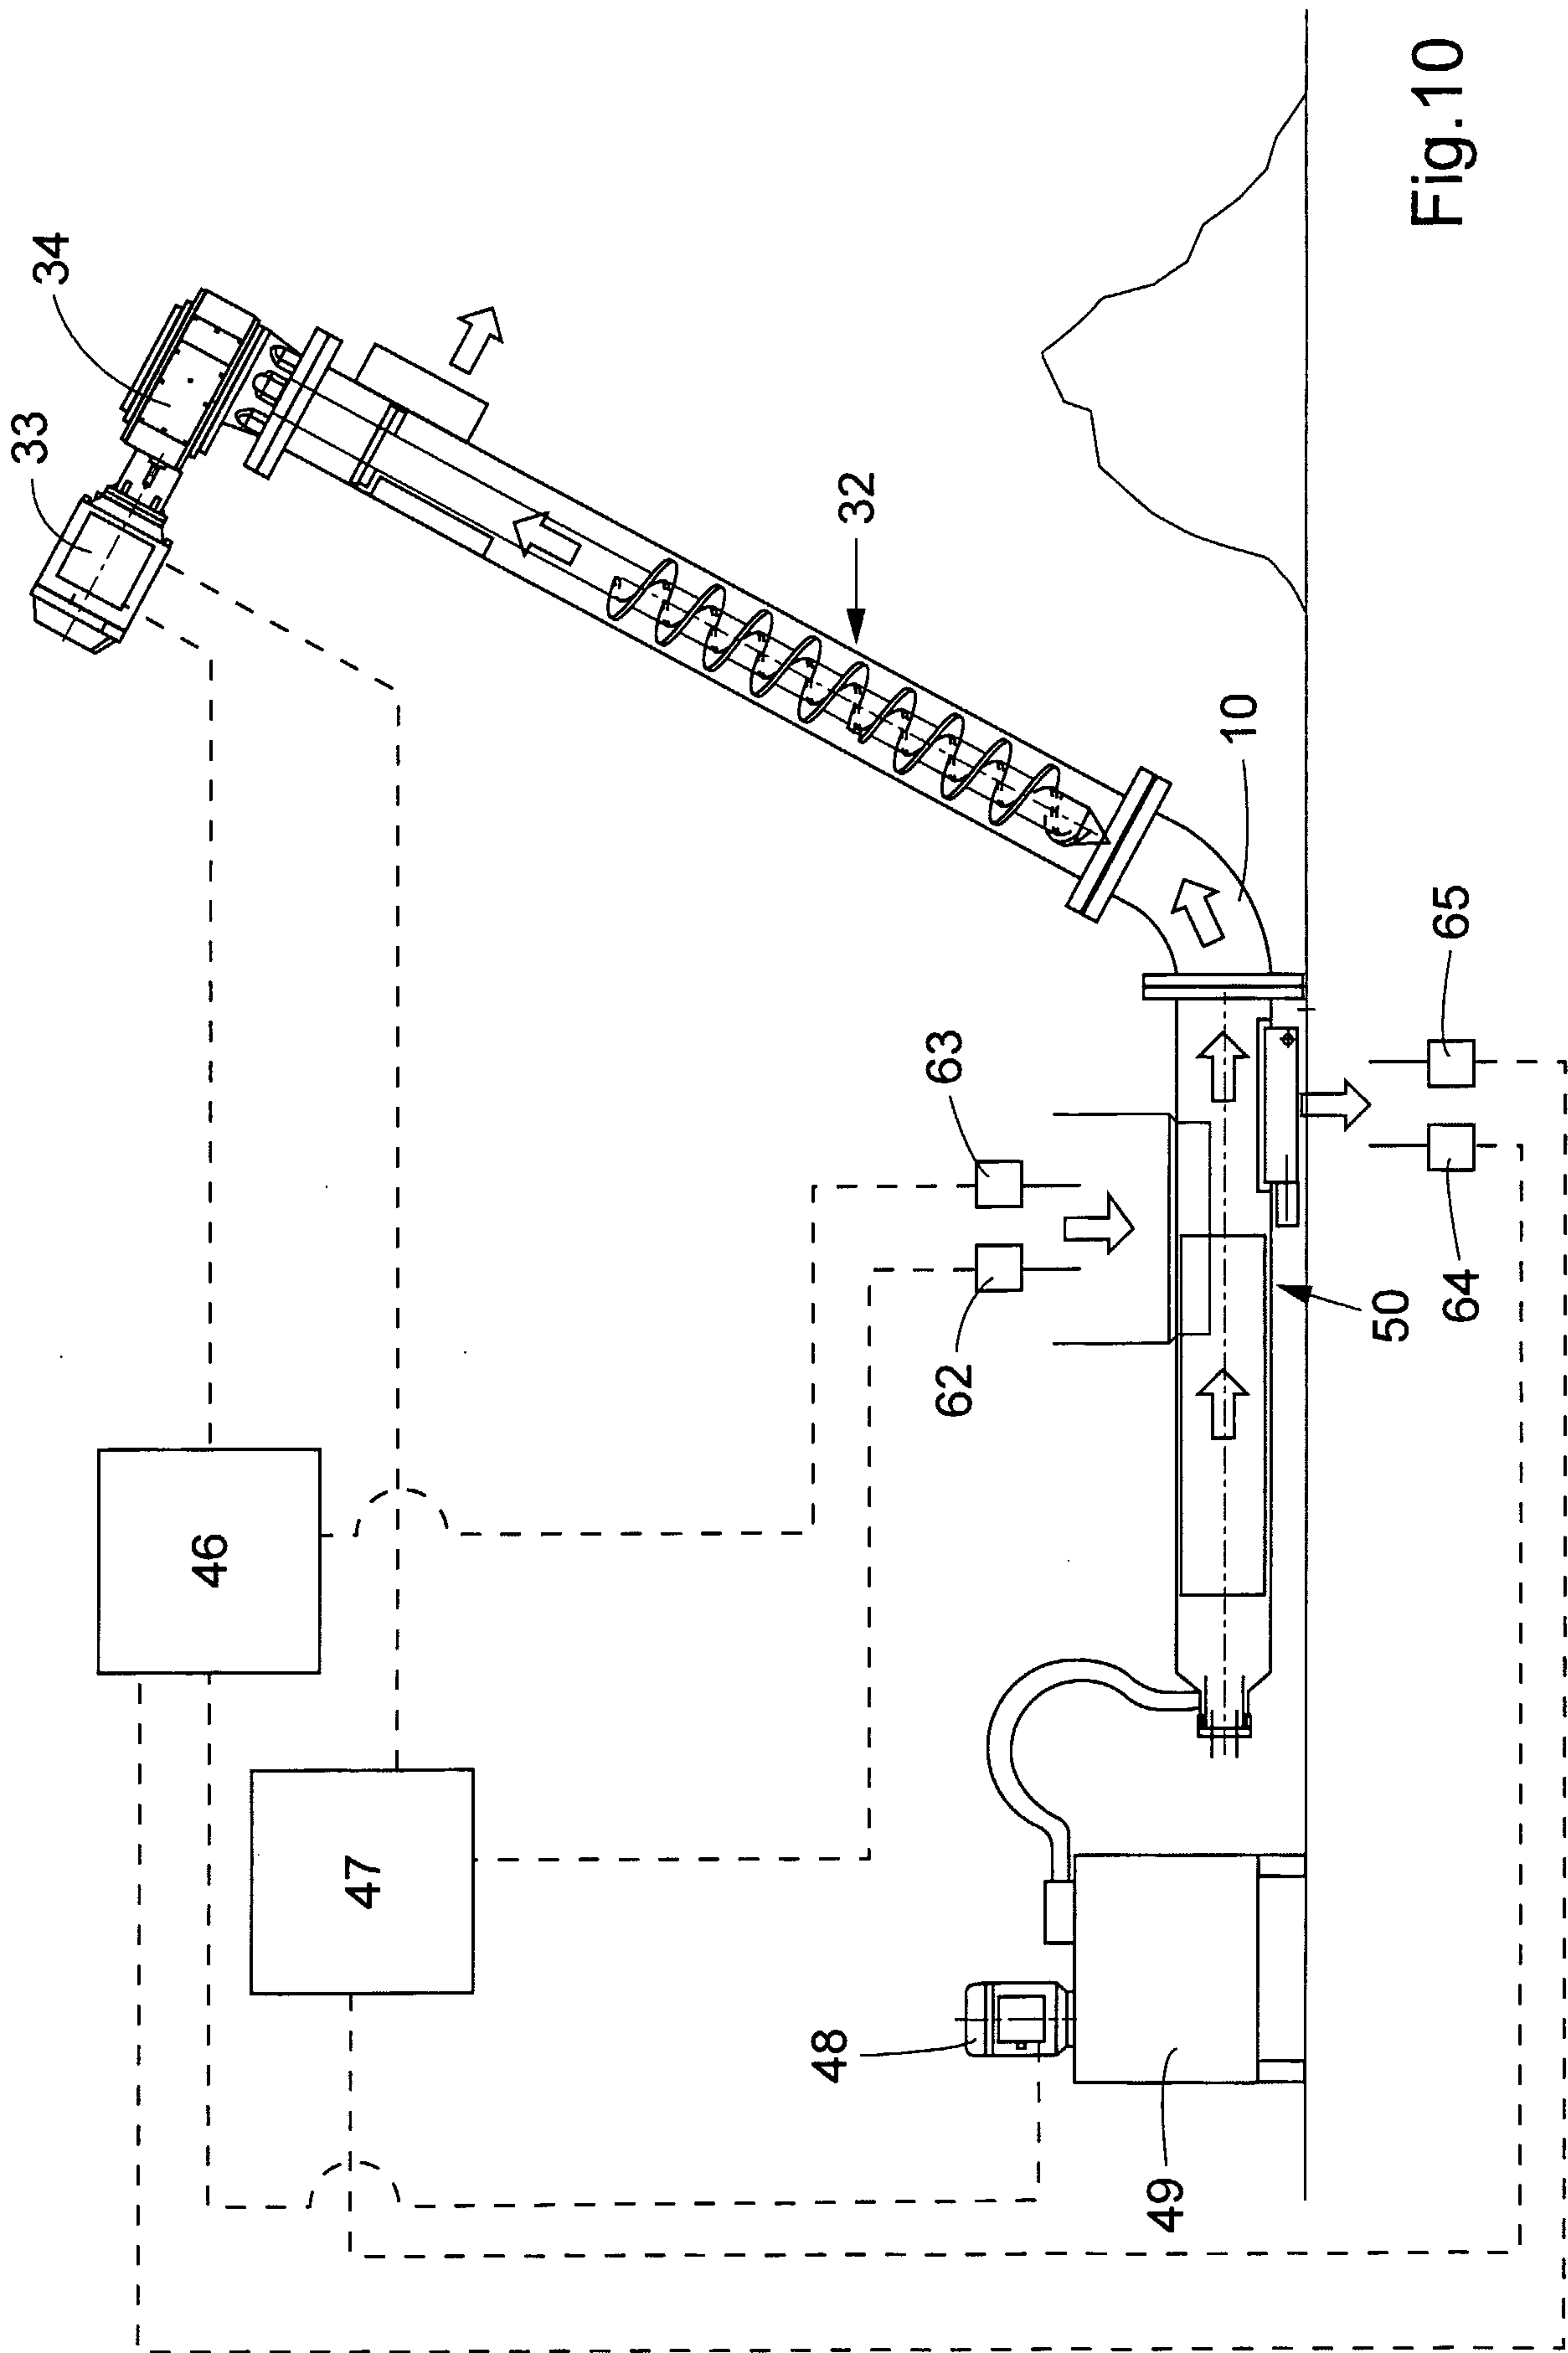


Fig.10

11/11

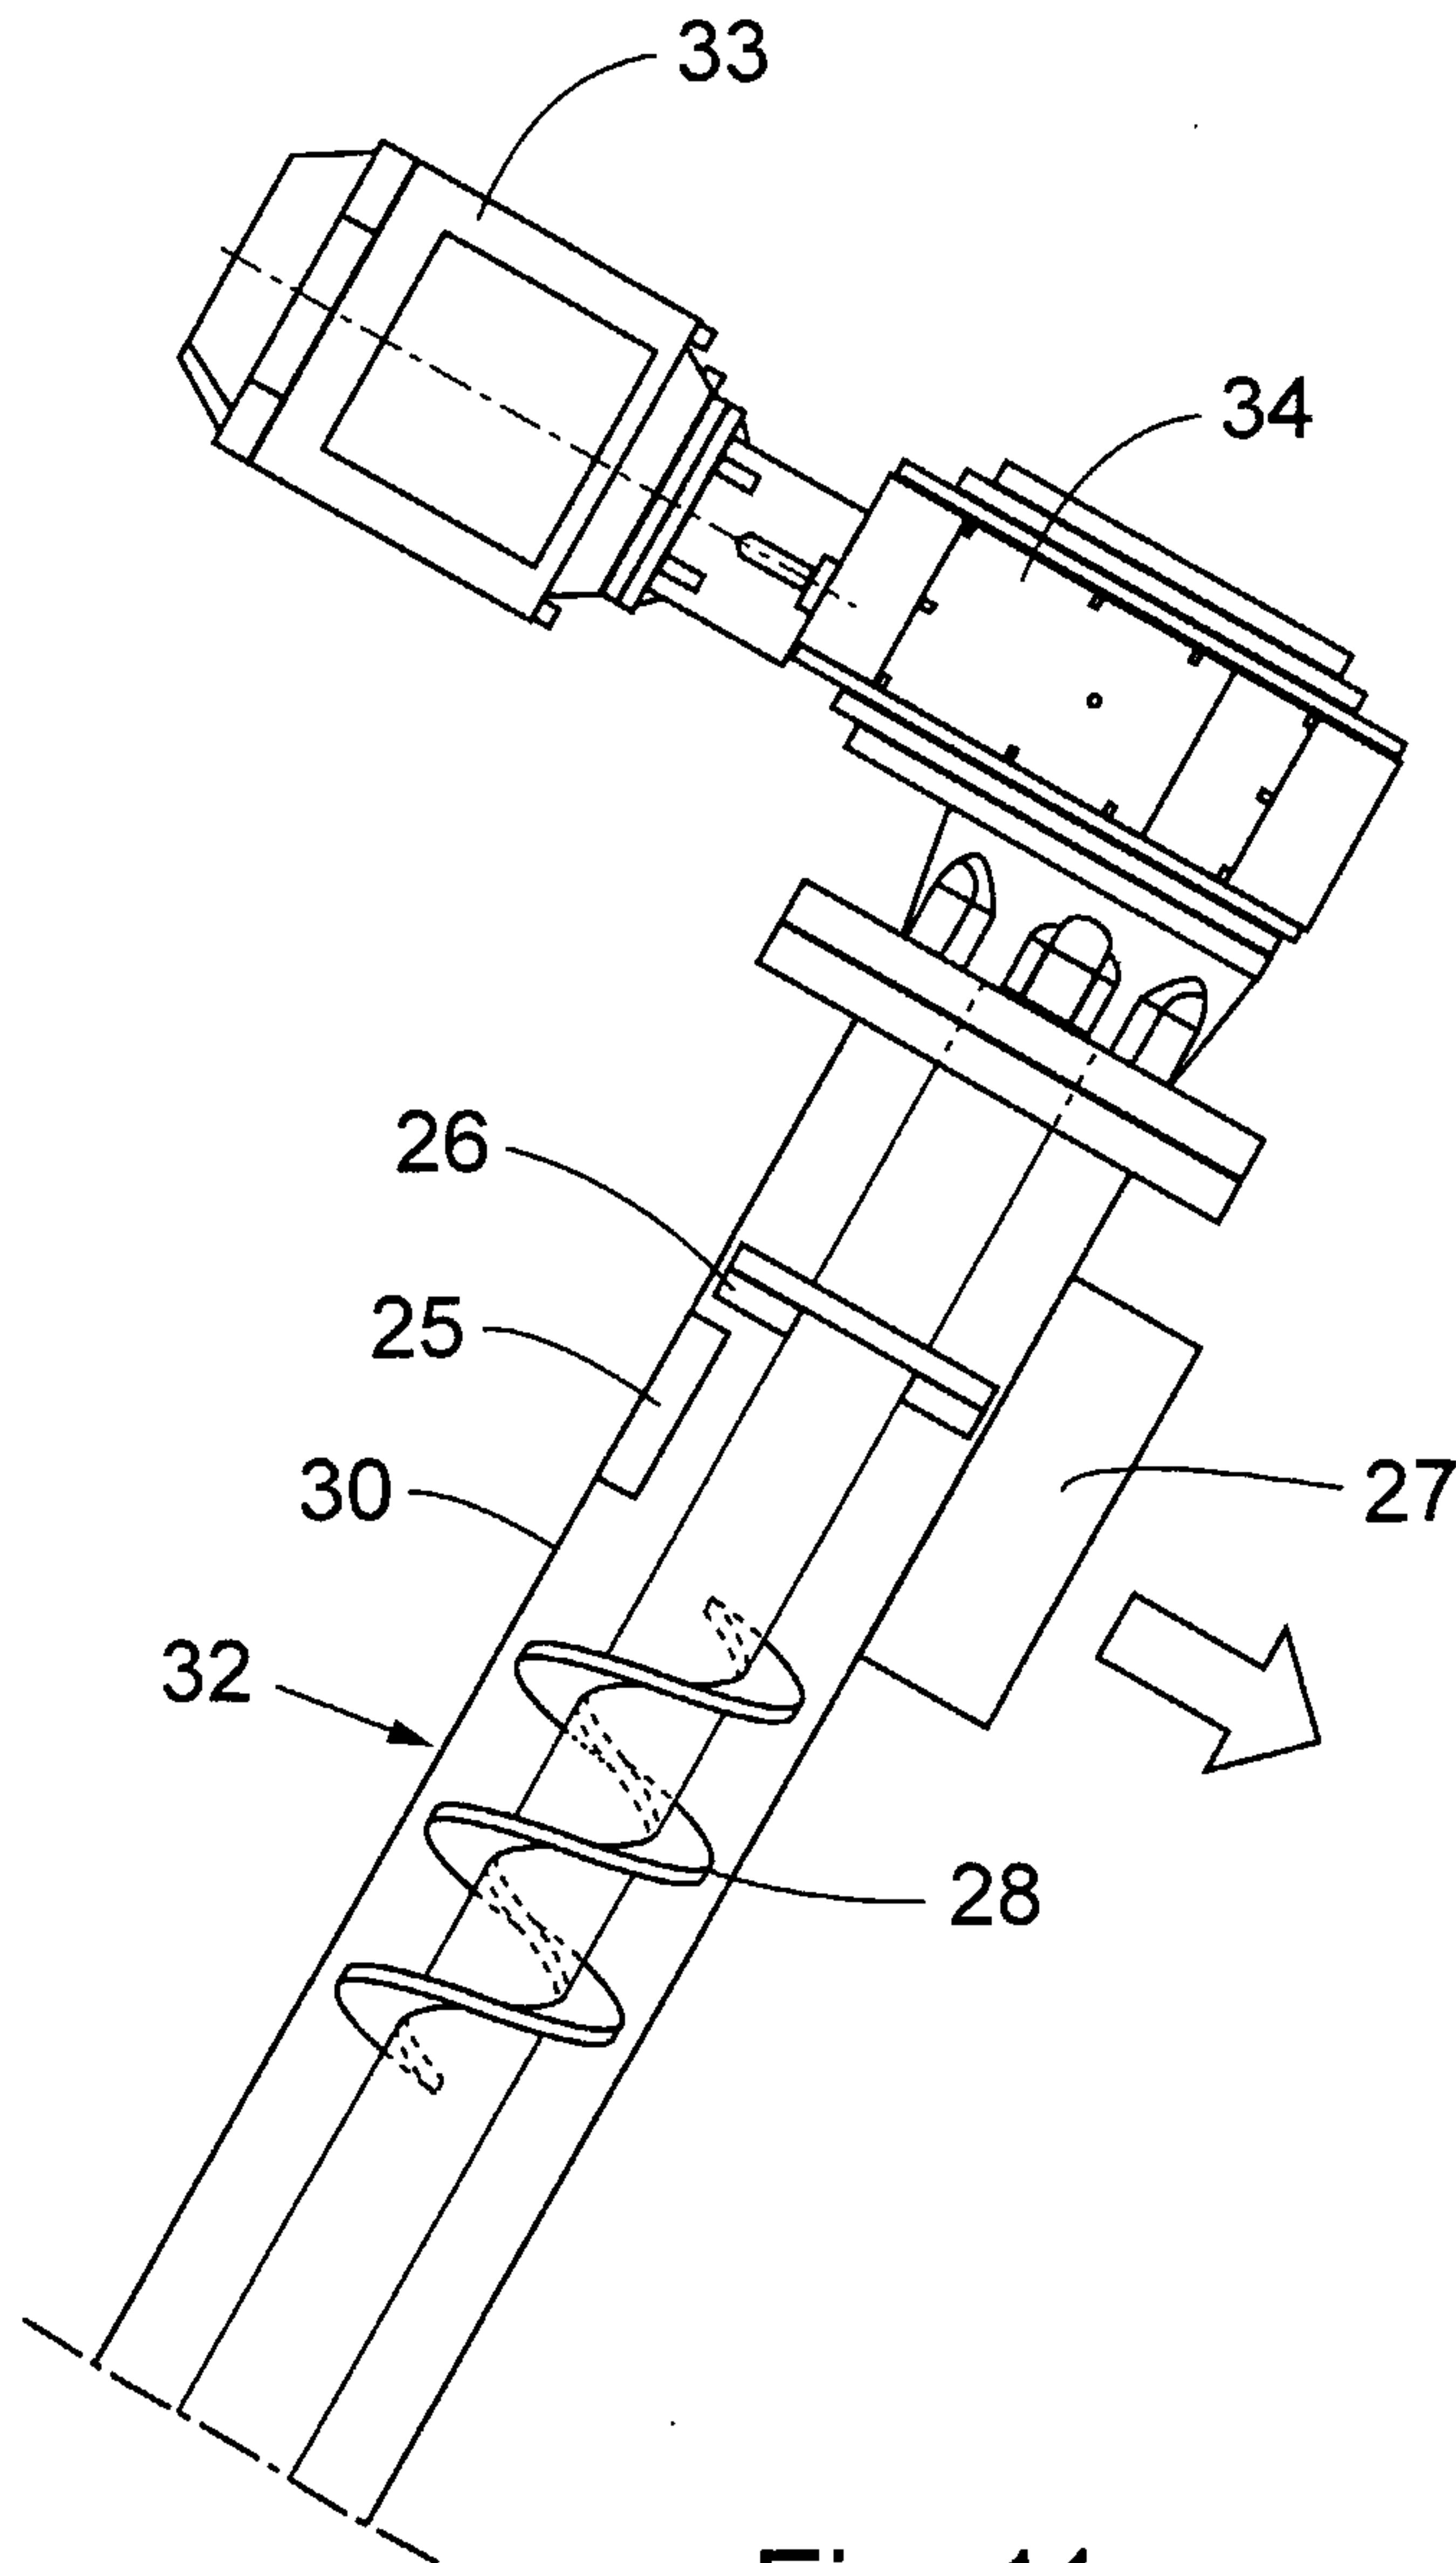


Fig. 11

