

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
17 April 2003 (17.04.2003)

PCT

(10) International Publication Number
WO 03/031713 A1

- (51) International Patent Classification⁷: **D04H 13/02**,
D01D 5/42, B29C 55/06, B32B 27/32, 27/08, 5/02, 31/16
- (21) International Application Number: PCT/US02/26508
- (22) International Filing Date: 20 August 2002 (20.08.2002)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
09/974,040 9 October 2001 (09.10.2001) US

(utility model), EE, ES, FI (utility model), FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK (utility model), SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VC, VN, YU, ZA, ZM, ZW.

- (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

- (71) Applicant: **3M INNOVATIVE PROPERTIES COMPANY** [US/US]; 3M Center, Post Office Box 33427, Saint Paul, MN 55133-3427 (US).
- (72) Inventors: **KODY, Robert, S.**; Post Office Box 33427, Saint Paul, MN 55133-3427 (US). **PEREZ, Mario, A.**; Post Office Box 33427, Saint Paul, MN 55133-3427 (US). **LONGABACH, John, W.**; Post Office Box 33427, Saint Paul, MN 55133-3427 (US). **KLEPZIG, Kimberley, D.**; Post Office Box 33427, Saint Paul, MN 55133-3427 (US). **SEBASTIAN, John, M.**; Post Office Box 33427, Saint Paul, MN 55133-3427 (US). **HOBBS, Terry, R.**; Post Office Box 33427, Saint Paul, MN 55133-3427 (US). **MICHEL, Matthew, J.**; Post Office Box 33427, Saint Paul, MN 55133-3427 (US). **LINDQUIST, Timothy, J.**; Post Office Box 33427, Saint Paul, MN 55133-3427 (US). **SURA, Ravi, K.**; Post Office Box 33427, Saint Paul, MN 55133-3427 (US).

Declarations under Rule 4.17:

- *as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii)) for the following designations AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VC, VN, YU, ZA, ZM, ZW, ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG)*
- *as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii)) for all designations*

- (74) Agents: **KOKKO, Kent, S.** et al.; Office of Intellectual Property Counsel, Post Office Box 33427, Saint Paul, MN 55133-3427 (US).
- (81) Designated States (*national*): AE, AG, AL, AM, AT (utility model), AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ (utility model), CZ, DE (utility model), DE, DK (utility model), DK, DM, DZ, EC, EE

Published:

- *with international search report*
- *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments*

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: MICROFIBER ARTICLES FROM MULTI-LAYER SUBSTRATES

(57) Abstract: Described are microfiber articles and methods and intermediates for their production, the microfiber articles being preferably produced from co-extruded multi-layer films, and the articles having a multi-layer construction that allows selection of the different layers to have different properties such that the article can have a desired combination of properties.



WO 03/031713 A1

MICROFIBER ARTICLES FROM MULTI-LAYER SUBSTRATES

Field of the Invention

5 The invention relates to multi-layer films that bear a microfiber surface, films and methods used to prepare them, and articles made from them.

Background

10 Polymeric materials that can be processed to form microfiber surfaces and microfiber articles have been identified, including mono-axially oriented films such as polypropylene. See United States Patent No. 6,110, 588. Such polymeric materials can be selected and processed using various techniques, to produce oriented films capable of being microfibrillated to a microfiber surface.

15 Multi-layer films are generally known, and include a huge variety of different combinations of layer composition, sizes, and methods of preparing the different layers into a multi-layer film, e.g., lamination, co-extrusion, the use of adhesives, etc.

20 Until now, there has been little if any recognition of the potential benefits and synergies that can be achieved using multi-layer films, particularly co-extruded multi-layer films, to form microfibers, microfiber surfaces, and microfiber articles.

Summary of the Invention

25 The invention identifies multi-layer films that bear very fine fibers, e.g., microfibers, and methods of preparing them from multi-layer film precursors, preferably co-extruded multi-layer film precursors.

30 Advantageously, the different layers of the multi-layer film can be selected based on the independent properties of the different layers to produce a multi-layer microfiber article having a combination of desired properties. For example, different layers of a multi-layer film can be independently selected to provide one or more layers that are hydrophobic; hydrophilic; oleophobic; oleophilic; dielectric; to exhibit certain physical properties such as rigidity, flexibility, high or low elasticity, high or low strength, tear or puncture resistance, stain resistance, breathability, and being waterproof; to give a desired frictional property such as a high or low coefficient of friction; to provide a desired color

or color combination; to provide a desired size of fibers, fibrils, or microfibers, or a desired surface area of a fiber or microfiber surface; to provide high or low temperature resistance or flame retardance; or a combination thereof.

5 As a particular example, one layer can be selected to give a hydrophilic surface, while another layer has an oleophilic surface. Using a multi-layer film to produce a microfiber film or fibrillated article, for example, can allow the production of various multi-surface articles such as pads, drapes, cloth-like wipes, microfiber mats, and a large variety of others, which contain layers of two or more different types of materials. This could be useful to make a wipe that is both water and oil absorbing, by starting from a film
10 with layers of polypropylene and a hydrophilic polymer.

In a different embodiment, layers can be selected to include one or more microfiber-forming layers and one or more layers that are not microfiber-forming layers, preferably to give a combination of properties from the different layers. The non-microfiber-forming layer can be selected to give a certain physical or chemical property
15 such as hydrophobicity, hydrophilicity, etc.; stain or water resistance; or a mechanical property such as rigidity, flexibility, tear or puncture resistance, breathability, strength, and elasticity. As an example, a multi-layer film can have a non-microfiber-forming inner layer of a plastic, a fluoropolymer, a hard yet flexible rubber or soft rubber, or an elastomer, and surface layers of a microfiber-forming polymer such as polypropylene.
20 The microfiber article may exhibit a combination of properties including properties of a waterproof elastomer and a microfiber surface, to give a microfiber article having combined properties of a flexible or stretchable microfiber-surface-bearing cloth.

In certain embodiments, the invention takes advantage of the understanding that films having multiple different layers with independently selected properties can be
25 efficiently co-extruded to form a multi-layer film, which can then be microfibrillated to produce a microfiber article having a desired combination of properties based on the composition and properties of the different layers of the co-extruded film. The preparation of a multi-layer film by co-extruding can realize processing advantages because co-extruding different layers into a single film can be more efficient and economical than
30 other possible (and still useful) methods of producing a multi-layer film, such as by separate production of individual layers and lamination or adhesion of those layers to one another.

According to preferred embodiments of the invention, oriented, multi-layer polymeric films can be transformed into microfiber mats, wipes, or other types of cloth-like materials using standard methods of microfibrillation, including hydroentanglement techniques using a hydroentangling machine. One or more layers of a multi-layer film, and different amounts or thicknesses of the one or more layers, may be microfibrillated to form microfibers.

An aspect of the invention relates to a multi-layer film comprising microfibers. The preferred films can be oriented to facilitate formation of microfibers. Preferred films can also include layers of different materials selected to provide a desired combination of properties in the film.

Another aspect of the invention relates to a microfiber article including one or more microfiber layers and a non-microfiber layer comprising a material selected from the group consisting of a polypropylene, a polyethylene, a styrene-ethylene/butylene-styrene block copolymer, a styrene-isoprene-styrene block copolymer, a polyurethane, and a fluoropolymer.

Another aspect of the invention relates to a co-extruded, oriented multi-layer film comprising one or more microfiber-forming layers.

Another aspect of the invention relates to a two-layer co-extruded film comprising one or two microfiber-forming layers.

Another aspect of the invention relates to a three-layer co-extruded film comprising two microfiber-forming layers sandwiching a non-microfiber core layer.

Another aspect of the invention relates to a multi-layer microfiber article that includes a first microfiber layer at a surface of the article, and second microfiber layer adjacent to the first microfiber-layer. Areas of the article surface are microfibrillated to form microfibers of only the first layer, and areas of the surface are microfibrillated through the first layer to form microfibers of the second layer.

Another aspect of the invention relates to a method of producing a microfiber-forming multi-layer film. The method includes providing an oriented polymeric film, casting a polymeric film onto the oriented film to produce a multi-layer film, and orienting the multi-layer film to produce a multi-layer film having one or more layers that can be microfibrillated to produce microfibers.

Another aspect of the invention relates to a method of producing a microfiber article. The method comprises providing a multi-layer film comprising at least one microfiber-forming layer, and microfibrillating the microfiber-forming layer to form microfibers.

5 Still another aspect of the invention relates to a method of producing a microfibrillated article. The method comprises co-extruding a multi-layer film having at least two layers, orienting the film to produce a microfiber-forming layer that can be microfibrillated to produce microfibers, and microfibrillating the microfiber-forming layer to form microfibers from the layer.

10 Yet another aspect of the invention relates to a method of producing a microfibrillated article. The method includes providing an oriented film, casting a polymeric film onto the oriented film to produce a multi-layer film, orienting the multi-layer film to produce a multi-layer film having one or more layers that can be microfibrillated to produce microfibers, and fibrillating the layer to form microfibers.

15

Brief Description of the Drawings

Figure 1 illustrates a cross-section of an embodiment of a multi-layer film of the invention having two layers.

20 Figure 1a illustrates a cross-section of an embodiment of a microfiber article of the invention.

Figure 1b illustrates a cross-section of an embodiment of a microfiber article of the invention.

Figure 2 illustrates a cross-section of an embodiment of a multi-layer film of the invention.

25 Figure 2a illustrates a cross-section of an embodiment of a microfiber article of the invention having a non-microfiber surface and a microfiber surface.

Figure 3 illustrates a cross-section of an embodiment of a multi-layer film of the invention having a core layer and two surface layers.

30 Figure 3a illustrates a cross-section of an embodiment of a microfiber article of the invention having a non-microfiber-forming core layer and two microfiber surfaces.

All drawings are not drawn to scale.

Detailed Description

The invention relates to multi-layer films that include at least one layer that can be microfibrillated to form microfibers on a microfiber surface, i.e., a "microfiber-forming layer." The multi-layer film will also include one or more additional layers, any of which
5 can be a microfiber-forming layer or a non-microfiber-forming layer, or another fiber-forming layer, etc. The terms "non-microfiber layer" and "non-microfiber-forming layer" refer to a layer that is not capable of being microfibrillated to produce microfibers, and that does not contain microfibers. The term "microfiber layer" refers to a layer that comprises microfibers, e.g., due to the layer being a microfibrillated microfiber-forming
10 layer. The multi-layer films can be processed by microfibrillating at least one microfiber-forming layer to produce a "microfiber article," which as used herein is a multi-layer article having at least one microfiber layer. (Generally herein, the terms "microfiber-forming layer" and "microfiber layer" refer to the same layer of a multi-layer film, the only difference being that the microfiber layer is a microfiber-forming layer that has been
15 microfibrillated. Thus, other than this difference, those two terms can normally be interchangeable.)

The use of multi-layer films to prepare microfiber articles allows preparation of microfiber articles that exhibit a combination of two or more desired properties (e.g., chemical, mechanical, physical, or aesthetic properties, etc.) in a single article, based on
20 the properties of the chosen layers. Almost any variety of different chemical, mechanical, physical, or aesthetic properties can be independently provided in a multi-layer film, depending on the choice of materials for the different layers. Examples of different properties include: attractive or repulsive properties with respect to different chemical materials such water and oil, e.g., by using materials or layers that are hydrophobic,
25 hydrophilic, oleophobic, oleophilic, etc., including the properties of being "water-resistant" or "water-proof"; electrically conductive or insulative properties such as a dielectric layer or an electrically conductive layer, or a layer that can retain an electric or electrostatic charge; breathability; inertness or stain resistance such as by inclusion of a fluoropolymer layer; desired mechanical properties such as a frictional property (high or
30 low coefficient of friction, especially a low coefficient of friction for wiping), high or low elasticity, high or low modulus, high or low strength, tear resistance, puncture resistance; high or low temperature resistance; flame retardance; desired aesthetic properties such as

color; a property of enabling a particular size of fiber, fibril, or microfiber, or a desired surface area of a fiber, fibril, or microfiber surface; electrostatic properties such as the ability to hold an electrostatic charge and attract dust or other relatively small particles; anti-microbial properties; or a combination thereof. These separate properties can be associated with one or more different layers of a multi-layer film to provide a desired combination of properties based on the combined properties of the different layers.

The term "multi-layer film" refers to films that include at least two layers, with (according to the invention) one or more layers being a microfiber-forming layer, and optionally one or more non-microfiber layers. Different properties, such as those discussed elsewhere within the present description, can be associated with either a microfiber-forming layer or a non-microfiber-forming layer. More specifically, "multi-layer" refers to films that include two or more layers of materials that may be the same, different, or similar, and which, according to the invention, may be used to prepare a microfiber article, for example a microfiber article including two or more layers of materials, at least one of which is a microfiber layer, and which different layers preferably independently provide useful or desirable properties to the microfiber article.

In general, the thickness of layers of a multi-layer film can be any useful thickness based on factors such as the composition of a layer and its desired function within a microfiber article. The total thickness of a multi-layer film useful according to the invention may also be based on factors such as the composition of the intended microfiber article, the composition of layers of the microfiber article, and the intended utility of the microfiber article. The term "multi-layer" films does not include films referred to as "microlayer films," as described in Assignee's copending United States patent application serial number 09/858,253, entitled "Fibrous Films and Articles from Microlayer Substrates," filed 5-15-01. Multi-layer films may, however, include such microlayer films as one or more layers within a multi-layer film.

The thickness of a layer of multi-layer film can be chosen based on overall product construction, which can relate to the total number of layers of a film and their purposes, as well as the composition and function of a layer. For example, a non-microfiber layer such as an elastomeric layer may be of a thickness that gives a desired mechanical property such as elasticity. The thickness required for a desired elasticity will depend on the material used for that layer of film. In an oriented film construction, prior to fibrillation,

useful non-microfiber layers generally can each be, e.g., of a thickness in the range from about 13 to about 10,160 micrometers, preferably from about 50 to about 2,540 micrometers. Certain useful elastomeric layers may each, for example, be in the range from about 25 to about 1,200 micrometers, preferably from about 50 to about 250 micrometers in thickness.

5

The microfiber-forming layers can be of a thickness to allow microfibrillation. Also, thickness of a microfiber-forming layer may be selected based on the degree of microfibrillation intended to occur in that layer, and whether that layer is adjacent to another microfiber-forming layer, which, perhaps, is intended to be microfibrillated through the first microfiber-forming layer. In some embodiments of the invention, a microfiber-forming layer may be of a thickness to allow microfibrillation fully through the microfiber-forming layer, e.g., to expose an adjacent layer of the film which may be a microfiber-forming layer that may also be fibrillated, or to expose a non-microfiber layer. The thickness of any particular microfiber-forming layer may also be influenced by the overall product construction and composition of the multi-layer film and its different layers. Typically, the thickness of a microfiber-forming layer of an oriented multi-layer film may be in the range from about 5 to about 2,540 micrometers, with thicknesses in the range from about 10 to about 508 micrometers sometimes being preferred.

10

15

20

25

Overall, multi-layer films useful according to the invention can have a number of layers each of a useful size (thickness) and composition to allow for the production of a useful microfiber article. Multi-layer films may include, for example, 2, 3, 4 to 8 to 10 layers, with the lower range, e.g., below 5 layers, being typical. The total thickness of a multi-layer film prior to fibrillation can be any thickness that will be useful in preparing a microfiber article as described herein, with exemplary thicknesses being in the range from about 25 to about 10,160 micrometers, e.g., in the range from about 50 to about 254 micrometers.

30

The composition of different layers of a multi-layer film can be chosen to provide different properties to a multi-layer film and a microfiber article prepared from the film. The composition of a layer may be any desired material, and often includes a polymeric material, sometimes a polymeric material that can be extruded as a single layer of material or that can be co-extruded as a layer of a co-extruded multi-layer film, and can also, according to the invention, be chosen either as a material that can produce microfibers or

one that cannot produce microfibers but that can preferably provide a microfiber article with a different desired property.

5 Typical or preferred properties of different layers of a multi-layer film used according to the invention are described generally above. Of these different properties, any can be associated with either of a microfiber-forming layer, a microfiber layer, or a non-microfiber layer. Examples of certain properties that can be associated with a microfiber-forming layer or a microfiber layer include properties of attracting or repelling water or oil; electrostatic or insulative properties; aesthetic properties such as colors; and properties of being capable of forming a particular size of microfiber or microfiber surface area. Examples of certain properties that can be associated with a non-microfiber layer can include electrically conductive or insulative properties; inertness or chemical resistance; mechanical properties such as strength, modulus, elasticity, or puncture or tear resistance; the ability to form fibrils or flakes that are not of the small size of microfibers; and aesthetic properties. Of course, these descriptions of exemplary properties of different types of film layers do not exclude any property from being associated with any type of layer of a multi-layer film, and the invention generally allows for any of these or other desired or useful properties to be associated with any layer of a multi-layer film.

15 Useful materials for a non-microfiber layer can include any material that can be used to produce a non-microfiber layer of a useful microfiber article. A non-microfiber layer can be included to provide a desired property, as described. As an example, a non-microfiber layer can provide mechanical support for a microfiber layer in a microfiber article. For example, a polymeric material such as high modulus poly(ethylene terephthalate) (PET) may function as a relatively stiff, high-strength support layer for a microfiber-forming layer.

25 Other non-microfiber layers can be prepared from materials chosen to provide a support property, but also to provide a property that is more than just the structural support of a microfiber layer, and therefore, many preferred materials for non-microfiber layers can be different from high modulus PET. For example, in addition to pure support, a non-microfiber layer can preferably, in some embodiments, have desired properties of puncture or tear resistance; elasticity; stain resistance; attraction or repulsion to water or oil; breathability; etc.

30

The term "elastomeric" refers to materials that are well-known in the film and polymeric material arts to exhibit elastomeric properties, for example that can be stretched easily to high extensions, e.g., 3 to 10 times their original dimensions, and rapidly recover their original dimensions when the applied stress is released. Exemplary materials considered to be elastomeric include butyl rubber, poly(isoprene), polyurethanes, and elastomeric polyolefins such as certain polypropylenes and polyethylenes. One specific useful elastomer includes the type of copolymers known generally as styrenic thermoplastic elastomeric block copolymers. Examples of specific block copolymers within this class include polystyrene-polyisoprene-polystyrene, polystyrene-polybutadiene-polystyrene, and polystyrene-poly(ethylene-butylene)-polystyrene based triblock copolymers. Such copolymers are commercially available from a variety of sources, for example under the brand-name Kraton™, from Shell, and from DEXCO, under the brand-name Vector™.

"High elastic modulus" materials include materials that are either glassy or at least partially crystalline. Examples of such materials can include, but are not limited to, nylons, fluoropolymers, polyesters, polystyrene, polycarbonate, polypropylene and polyethylene, particularly when highly oriented and crystalline.

A layer can be water resistant or waterproof, meaning in general that liquid water does not diffuse through the film layer. Water-resistant and water-proof materials include almost all non-porous, non-water-soluble polymers, but particularly include polypropylene, polyethylene, polystyrene, poly(ethylene terephthalate), fluoropolymers, polyurethane, tri-block copolymers with polystyrene end blocks and a rubbery poly(ethylene-butylene) or poly(isoprene) mid block, butyl rubber, and poly(isoprene).

A layer can be puncture resistant or tear resistant. The term "puncture resistant" refers to materials that require a significant amount of energy to puncture with a pointed or sharp object. Examples of materials considered to be puncture resistant include materials having a high friction or adhesive surface, such as tri-block copolymers with polystyrene end blocks and a rubbery poly(ethylene-butylene) mid block, butyl rubber, and polyethylene elastomers. The term "tear resistant" refers to materials that require a significant amount of energy to initiate and propagate a tear or crack. Examples of materials considered to be tear resistant include thermoplastics, especially modified thermoplastics and thermosets. Such materials include polypropylene, polyethylene,

impact modified polystyrene, rubber modified epoxies, and elastomers, such poly(butylenes), poly(isoprene), and tri-block copolymers with polystyrene end blocks and a rubbery poly(ethylene-butylene) or poly(isoprene) mid block.

5 A layer can be associated with the property of breathability. The term "breathability" or "breathable" refers to materials that allow gasses, specifically water vapor, to pass through them, especially where liquids such as liquid water cannot. Examples of materials considered to be breathable include polyurethanes, and porous polymer films. Examples of porous polymer films include polypropylene, polyethylene, and fluoropolymers that have been blended with particulate fillers or solvent fillers and
10 then oriented in a manner to create voids or pores in the film.

A layer can be associated with a property of high or low temperature resistance. This property refers to the ability to withstand extreme temperatures, for example in excess of 150°C or below -23°C. Examples of materials considered to be high temperature resistant include materials such as fluoropolymers, nylons, and polyolefins
15 such as highly crystalline polyester or propylene. Examples of materials considered to be low temperature resistant include materials such as polyethylenes, silicone rubbers, and highly crystalline polypropylenes that do not exhibit a significant glass transition.

A layer can be associated with a property of being flame retardant. Examples of materials considered to be flame retardant include materials such as halogenated polymers,
20 such as poly(vinyl chloride), and also a variety of polymers containing flame retardant additives. Examples of flame retardant blends include polypropylene and polyethylene that contain: inorganic additives such as aluminum trihydrate, antimony trioxide, magnesium hydroxide, aluminum hydroxide; phosphorus compounds such as ammonium polyphosphate, polyphazenes, and aluminum phosphates; nitrogen additives such as
25 melamine cyanurate and melamine phosphate; silicone polymer additives; halogenated additives like chlorinated compounds, brominated compounds, fluorinated compounds such as potassium perfluorobutanesulfonate; and other additives such as nano-clay particles, expandable graphite, silica gel, and potassium carbonate.

The multi-layer films according to the invention include at least one microfiber-
30 forming layer. Microfiber-forming materials, e.g., microfiber layers, microfiber-forming films, or microfiber-forming film layers, useful according to the invention can include any materials that can be processed to form microfibers. Several classes of such materials

exist and are known in the film and polymer arts. Examples of some of these materials, their methods of preparation, and methods of processing these materials to microfiber materials, are described in United States patent number 6,110,588; Assignee's United States patent number 6,331,343, entitled "Films Having a Fibrillated Surface and Method of Making"; United States patent application serial number 09/602,978, filed 6/23/00, entitled "Fibrillated Article and Method of Making"; and United States patent application serial number 09/746,355, filed 12/12/00, entitled "Microfibers, Microfibrillated Articles and Use Thereof".

Useful materials for a microfiber-forming layer can include any material that can be used to produce a microfiber-forming layer or microfiber layer of a microfiber article. Different properties can be associated with a microfiber layer. A microfiber-forming layer or microfiber layer can provide a microfiber surface having particular properties based on the size and composition of the microfibers. Additionally, a microfiber-forming layer or microfiber layer can provide properties that are independent of the presence or dimensions of the microfibers themselves, but relate to a property of the material that makes up the film or microfiber, for example properties that are mechanical, chemical, or aesthetic in nature, or otherwise are not based on the presence or dimensions of microfibers.

In addition to providing a microfiber surface, a microfiber-forming layer or microfiber layer can in some embodiments have desired mechanical properties such as high or low modulus; puncture and tear resistance; elasticity; stain resistance; attraction or repulsion to water or oil; breathability; etc., e.g., as discussed above.

A microfiber layer can exhibit attractive or repulsive forces with respect to certain chemical materials such as water or oil. Materials that exhibit such properties are often referred to as hydrophobic, hydrophilic, oleophobic, oleophilic, etc. These properties are well-known in the film and polymeric material arts. Exemplary materials considered to be hydrophobic, hydrophilic, oleophobic, oleophilic, etc., include the following, as well as others. Exemplary hydrophobic materials can include any one or more of a fluoropolymer or polyolefin such as polyethylene, polypropylene, or blends thereof, optionally containing other materials such as fillers or other hydrophobic polymers, such as fluoropolymers or thermoplastics.

Microfiber-forming layers and microfiber layers can also be: water resistant or waterproof, associated with a property of breathability, associated with a property of high or low temperature resistance, or associated with a property of flame retardance.

5 Of course, as will be understood by one of skill in the arts relating to polymeric materials and multi-layer materials, the multi-layer film can include other components such as layers that form fibers or fibrils that are not “microfibers”; or layers that serve the purpose of a tie-layer, to adhere two other layers together.

10 A layer of a multi-layer film may also have a coating or adhesive placed on a surface of the film, e.g., may include materials such as adhesives, primers, or protective coatings, etc., as desired. These “coatings” are not considered to be “layers” of a “multi-layer” film.

15 In accordance with the above description of properties related to a multi-layer film and layers thereof, multi-layer films that contain one or more microfiber-forming layers can be prepared from materials known in the polymeric material arts and other known methods.

20 In general, a “microfiber-forming material” is any material, especially a film or a layer of a multi-layer film, which is capable of being processed to form microfibers. Microfiber-forming materials are typically made of polymeric materials that can have a structure or morphology that includes features, which upon mechanical contact, will cause a microfiber to be formed from the polymeric film. Properties of a film that facilitate formation of microfibers, e.g., breaking or splitting of the film to form microfibers, can include structural features such as microvoids, spherulites, or other additives or disturbances in the polymer, e.g., calcium carbonate; orientation of the film, e.g., bi-axially, but especially mono-axially (uni-axial orientation); multiple layers, especially
25 where an interface at surfaces of different layers weakens the internal structure of a multi-layer film; and morphology, such as crystallinity. These features can be present alone in a film to allow microfibrillation. Alternatively, two or more of the different features can be present in combination. When combinations of different properties are present, the amount or severity of one or both properties may be reduced relative to the amount or
30 severity of that property that would be necessary to allow microfibrillation if only that single property were present.

Properties that may facilitate microfibrillation can be created in a film during manufacturing of the film to cause the film to be a microfiber-forming film. In general, the described properties and combinations of the properties can be produced in a polymeric film by selecting one or more of the composition of the film, processing
5 conditions, e.g., processing conditions during extrusion or co-extrusion of a film or multi-layer film, and processing conditions after extrusion or co-extrusion, possibly including individual steps or combinations of steps such as casting, quenching, annealing, calendering, orienting, solid-state drawing, roll-trusion, and the like.

Polymeric films typically comprise long molecular chains having a backbone of
10 carbon atoms. The facility with which the surface of a polymer film can be microfibrillated is often not realized due to random orientation and entanglement of the polymer chains. As one method of facilitating microfibrillation, polymer chains can be oriented to be relatively more parallel to one another and partially disentangled. The degree of molecular orientation is generally defined as the draw ratio, which is the ratio of
15 the final length to the original length. This orientation may be effected by a combination of techniques, including the steps of calendering and length orienting.

Microfibrillation of certain polymeric layers can be facilitated by orientation, especially with some films, uni-axial orientation. Uni-axial orientation means that the film is lengthened or stretched in one direction relatively more than it is stretched in another,
20 e.g., perpendicular, direction. By exemplary methods, a film can be stretched in a machine direction while its width is not held, and the film gets longer in length, thinner, and narrower in width. In another exemplary method, the width may be held constant while the length is stretched. In other words, sufficient orientation may be achieved for microfibrillation by inducing a relatively greater amount of orientation in one direction,
25 the machine direction, compared to a lesser degree of orientation in another direction, especially a perpendicular direction, such as the cross direction.

Bi-axial orientation of a film can also be used to provide microfibers. For example, a film can be oriented, e.g., stretched or lengthened, in two directions, with stretching or lengthening in one direction being sufficient to produce microfibers. (If not
30 sufficiently oriented, a bi-axially oriented film may alternatively be fibrillated to produce flakes or other fibrils that are not microfibers.) Preferably, to produce microfibers, a bi-axially oriented film can be oriented to a draw ratio of at least 4:1 or 5:1, in one direction.

Crystallinity also affects the ability of a film to form microfibers. A variety of semi-crystalline, crystalline, and highly-crystalline materials can be processed to form microfibers. Examples of polymeric materials for forming microfiber-forming films can include semicrystalline melt processed films having a maximized crystallinity induced in the polymeric film layer by an optimal combination of casting and subsequent processing such as calendering, annealing, stretching and recrystallizing. For polypropylene, as an example, preferred crystallinity can be above 60%, preferably above 70%, most preferably above 75%. The crystallinity may be measured by differential scanning calorimetry (DSC) and comparison with extrapolated values for 100% crystalline polymers. See, e.g., B. Wunderlich, Thermal Analysis, Academic Press, Boston, Mass., 1990.

Microfiber-forming materials and films also may contain spherulites and microvoids to facilitate microfibrillation. See, e.g., United States Patent Number 6,110,588.

Any suitable combination of polymer film composition and processing steps and conditions may be used to impart sufficient microscopic structure, e.g., crystallinity, microvoids, spherulites, multiple layers, orientation, etc., to produce a layer of a multi-layer film that will form microfibers upon microfibrillation. These conditions may include combinations of casting, quenching, annealing, calendering, orienting, solid-state drawing, roll-trusion, and the like.

Some specific examples of materials that can be used to prepare a microfiber-forming film layer are discussed, e.g., in United States patent number 6,110,588. Exemplary semicrystalline polymers include high and low density polyethylene, polypropylene, polyoxymethylene, poly(vinylidene fluoride), poly(methyl pentene), poly(ethylene-chlorotrifluoroethylene), poly(vinyl fluoride), poly(ethylene oxide), poly(ethylene terephthalate), poly(butylene terephthalate), poly(lactic acid), nylon 6, nylon 66, polybutene, and thermotropic liquid crystal polymers. Examples of suitable thermotropic liquid crystal polymers include aromatic polyesters that exhibit liquid crystal properties when melted and that can be synthesized from aromatic diols, aromatic carboxylic acids, hydroxycarboxylic acids, and other similar monomers. Typical examples include a first type consisting of parahydroxybenzoic acid (PHB), terephthalic acid, and biphenol; a second type consisting of PHB and 2,6-hydroxynaphthoic acid; and a third type consisting of PHB, terephthalic acid, and ethylene glycol. Preferred polymers

include polyolefins such as polypropylene and polyethylene which are readily available at low cost and can provide highly desirable properties in microfibrillated articles such as high modulus and high tensile strength.

Preferred semicrystalline polymers can include high density polyethylene, low
5 density polyethylene, polypropylene, polyoxymethylene, poly(vinylidene fluoride),
poly(methyl pentene), poly(ethylene-chlorotrifluoroethylene), poly(vinyl fluoride),
poly(ethylene oxide), poly(ethylene terephthalate), poly(ethylene naphthalate),
poly(butylene terephthalate), poly(lactic acid), nylon 612, nylon 6, nylon 66, polybutene, a
thermotropic liquid crystal polymer, a blend of one or more of these polymers with
10 another of these or another polymer, or a copolymer made from any of the listed
monomers, and any other listed monomer or a different monomer.

The molecular weight of the polymer can be chosen so that the polymer is melt
processable (i.e., extrudable or co-extrudable) under the processing conditions used in
extrusion and co-extrusion. For polypropylene and polyethylene, for example, the
15 molecular weight may be from about 5,000 to 499,000 and is preferably from about
100,000 to 300,000.

Referring again to the '588 patent, it describes that any suitable combination of
processing conditions may be used to impart crystallinity and orientation to a melt-
processed film. Starting with a melt-processed, cast film, for example, the film may be
20 calendered, stretched, oriented, cast, quenched, annealed, drawn, roll-truded, etc. Such
processing generally serves to increase the degree of crystallinity of the polymer film as
well as the size and number of spherulites.

The '588 patent describes additional details and recites examples of preferred
embodiments of materials and techniques, and optional processing steps, that may be used
25 to prepare useful microfiber-forming films. That description, along with the balance of the
present disclosure and knowledge available to a skilled artisan will enable the preparation
of multi-layer films as well as microfiber articles derived from the multi-layer films, as
described herein.

Another class of microfiber-forming materials that can be included as a microfiber-
30 forming layer of a multi-layer film as described herein, includes microfiber-forming
materials described in Assignee's copending patent application USSN 09/602,978,
"Fibrillated Article and Method of Making," filed on 6/23/2000. This patent application

describes high melt strength polypropylene foams prepared by extruding a foamable mixture comprising a high melt-strength polypropylene and a blowing agent, and orienting in at least one direction.

5 The high melt strength polypropylene includes homo- and copolymers containing 50 weight percent or more propylene monomer units, preferably at least 70 weight percent, and has a melt strength in the range of 25 to 60 cN at 190°C. Melt strength may be measured using an extensional rheometer by extruding the polymer through a 2.1 mm diameter capillary having a length of 41.9 mm at 190°C and at a rate of 0.030 cc/sec; the strand is stretched at a constant rate while measuring the force. Preferably the melt
10 strength of the polypropylene is in the range of 30 to 55 cN, as described in WO 99/61520.

The foamable polypropylene may consist of propylene homopolymers or may comprise a copolymer having 50 weight percent or more propylene monomer content. Further, the foamable polypropylene may comprise a mixture or blend of propylene homopolymers or copolymers with a homo- or copolymer other than propylene homo- or
15 copolymers.

A variety of blowing agents may be used, including physical blowing agents and chemical blowing agents. The amount of blowing agent incorporated into a foamable polymer mixture can be chosen to yield a foam having a void content in excess of 10%, and even in excess of 20%, as measured by density reduction; i.e., $1 - (\text{the ratio of the density of the foam to that of the neat polymer}) \times 100$. Generally, these greater foam void
20 contents can enhance microfibrillation and can produce a greater yield of a microfibrillated surface.

To facilitate microfiber-formation from a multi-layer film as described, the film (i.e., its polymer chains) may be oriented along at least one major axis. Suitable stretching
25 conditions can be used to increase the crystallinity of the polymer and the void volume of the foam.

Other components, e.g., non-polymeric materials, may be mixed into a polymeric material of a multi-layer film to facilitate microfiber formation, such as void-initiating components, calcium carbonate, or others, e.g., as described in Assignee's patent
30 6,331,343, "Films Having Fibrillated Surface and Method of Making".

Methods for producing multi-layer films are well known in the arts of polymeric materials and film processing, and materials such as those described herein can be used

with those methods to produce multi-layer films that contain at least one microfiber-forming layer, from those materials. Examples of useful techniques include casting, extrusion, co-extrusion, lamination, and other known methods of producing films that are well known and understood in the polymer film arts. Useful equipment for producing the films will also be apparent to those of ordinary skill and will include extruders, multi-cavity dies, multilayer feedblocks, laminators, as well as various other types of equipment known in the arts of films and film processing, some of them being mentioned herein. Also well known in the art of polymeric films are subsequent processing techniques for films such as casting, quenching, annealing, calendering, orienting, solid-state drawing, roll-trusion and the like. Using these techniques, suitable equipment, and the present disclosure, a skilled artisan will be able to prepare multi-layer microfiber-forming films and microfiber articles according to the invention.

The different steps of extrusion, casting, orienting, calendering, etc., can be done in any order that is useful for preparing a film as described herein. More than one of any step (e.g., two lengthening steps) may be used.

One example of a method of producing a multi-layer film of the invention is to co-extrude a multi-layer (e.g., 2 or 3 layer) film, then orient by calendering and/or lengthening, to produce at least one microfiber-forming layer.

Another exemplary method is to first extrude and orient a single layer of film. Onto that oriented film, one or more additional film layers can be cast. The multi-layer film can then be oriented to produce a multi-layer film having at least one microfiber-forming layer. As one specific example, a first layer can be extruded and oriented in a first direction. A second layer can then be cast onto the oriented film. The two-layer film can be oriented again in a second direction, e.g., perpendicular to the first orientation, to produce a two-layer film comprising one layer that is uni-axially oriented and one layer that is bi-axially oriented. At least one of the layers can be microfibrillated to produce microfibers. Calendering and other steps can optionally be included where appropriate or desired.

Still other combinations of these processing steps can be used in any variety to prepare multi-layer films as described herein.

Once a multi-layer film is prepared, a multi-layer film can be microfibrillated to produce a microfiber surface by any of a variety of methods known to be useful for microfibrillating.

5 The term "microfibrillation," as used herein, refers to methods of imparting energy to liberate microfibers from a polymeric film. Such methods are known in the art of processing polymeric materials, and include methods of imparting a gaseous fluid using, for example, ultrasound techniques, and methods of imparting liquid fluids such as water, for example using high-pressure water jets. Optionally, prior to microfibrillation, a film may be subjected to a conventional, mechanical, fibrillation step to produce macroscopic
10 fibers from the multi-layer film, such as by the use of a rotating drum or roller having cutting elements such as needles or teeth in contact with the moving film, or by twisting, brushing (as with a porcupine roller), rubbing, for example with leather pads, and flexing.

A microfibrillated surface is a surface that includes microfibers from one or more layers of a multi-layer film. The microfibers are portions of one or more multi-layer film
15 layer or layers that have been mechanically separated or fragmented from the continuous film, and are therefore typically relatively flat, thin, or elongate, e.g., "ribbon-shaped," with a typically rectangular cross section. The microfibers preferably remain attached to the film at one end, but may also become completely detached from the base film.

Microfibers typically have a rectangular cross section with a cross sectional aspect
20 ratio (transverse width to thickness) ranging from about 1.5:1 to about 20:1, preferably from 3:1 to 9:1. Preferred microfibers can also have one or more of the following features or dimensions: an average effective diameter of from 0.01 to 10 microns, preferably of less than 5 microns; an average cross-sectional area of $0.5 \mu^2$ to $3.0 \mu^2$, preferably from about $0.7 \mu^2$ to $2.1 \mu^2$. Further, the sides of the rectangular shaped microfibers are not
25 normally smooth, but may have a scalloped appearance in cross section. Certain preferred microfiber surfaces may exhibit a relatively high surface area, up to or exceeding 0.25 square meters per gram, as measured using an Quantachrome AUTOSORB 1-KR gas sorption instrument (available from Quantachrome Corp., Boyhton Beach, FL) with krypton adsorbate.

30 One method of microfibrillating a film surface is with fluid jets. In this process, one or more jets of a fine fluid stream impact the surface of a multi-layer film which may be supported by a screen or moving belt, thereby releasing microfibers from a film's

polymer matrix. The degree of microfibrillation is dependent on the exposure time of the film to the fluid jet, the pressure of the fluid jet, the cross-sectional area of the fluid jet, the fluid contact angle, the polymer properties and, to a lesser extent, the fluid temperature.

Any type of liquid or gaseous fluid may be used. Liquid fluids may include water or organic solvents such as ethanol or methanol. Suitable gases such as nitrogen, air, or carbon dioxide may be used, as well as mixtures of liquids and gases. Any such fluid is preferably non-swelling (i.e., is not absorbed by the film), which would reduce the orientation and degree of crystallinity of the microfibers. The fluid can preferably be water.

The fluid temperature may be elevated, although suitable results may be obtained using ambient temperature fluids. The pressure of the fluid should be sufficient to impart some degree of microfibrillation to at least a portion of the film, and suitable conditions can vary widely depending on the fluid, the nature of the polymeric material, including the composition and morphology, configuration of the fluid jet, angle of impact and temperature. Typically, the fluid can be water at room temperature and at pressures of at least 3400 kPa (500 psi), although lower pressure and longer exposure times may be used. Such fluid will generally impart a minimum of 5 watts/cm² or 10 W/cm² based on calculations assuming incompressibility of the fluid, a smooth surface, and no losses due to friction.

The jets may be configured such that all or part of the film surface is microfibrillated. Alternatively, the jets may be configured so that only selected areas of the film are microfibrillated. Certain areas of the film may be masked, using conventional masking agents, screens or films, to leave selected areas free from microfibrillation. Likewise, microfibrillation may be conducted so that the microfibrillated surface penetrates only partially, or fully through the thickness of a microfiber-forming layer of a multi-layer, or fully or partially through one or more adjacent microfiber-forming layers. When combined with masking different areas of a microfiber-forming film, penetrating different thicknesses of a multi-layer film can advantageously produce a microfiber article having different microfibers on different areas of a surface. If it is desired that the microfibrillation extend through the entire thickness of the multi-layer film, conditions may be selected so that the integrity of the article is maintained and the film is not severed

into individual yarns or fibers, for example by microfibrillating the multi-layer film only in selected regions.

A hydroentangling machine, for example, can be used to microfibrillate a surface by exposing the film to its fluid jets. Alternatively, a pressure water jet, with a swirling or oscillating head, may be used, which allows manual control of the impingement of the fluid jet. Such machines are commercially available.

Microfibrillation may be accomplished by other methods as well, as will be understood by the skilled artisan, e.g., by immersing a microfiber-forming material in a high energy cavitating medium, e.g., and achieving cavitation by applying ultrasonic waves to the fluid.

The multi-layer film, upon microfibrillation to produce at least one microfiber surface, becomes a multi-layer microfiber article. One example of a microfiber article of the invention is a microfiber article containing two layers that are both microfiber layers. Another example is a microfiber article that contains two layers, where one layer is a microfiber layer and one is a non-microfiber layer.

Microfiber articles of the invention may also contain three or more layers. In a three-layer microfiber article, one or more layer may be a microfiber layer at a surface of the article. A non-microfiber fiber layer may be included as a support layer and/or to exhibit a property other than support of a microfiber layer. A second microfiber layer may be present on the second surface of a microfiber article such that one or more non-microfiber layer is sandwiched between microfiber layers present at both surfaces of the microfiber article.

According to any of these or other embodiments of multi-layer microfiber articles, different materials used for different layers of a multi-layer film may be chosen to provide any desired combination of properties. Examples of desired combinations of materials used in different layers of a multi-layer film or microfiber article of the invention may include a hydrophilic surface layer opposite of an oleophilic surface layer; an elastomeric, soft-rubbery, or flexible non-microfiber (e.g., inner layer) and one or two microfiber-forming surface layers that are any of hydrophobic, hydrophilic, oleophobic, oleophilic; one surface with microfibers for picking up dust and an opposite surface with larger flakes, fibers, or fibrils, for picking up larger particles, etc. A non-microfiber layer may still be capable of being fibrillated to form fibrils that are not microfibers. Such a layer

could be used in combination with microfiber-forming layers or non-microfiber-forming layers to produce various product constructions such as a cloth with a microfiber surface on one side, e.g., for picking up dust, and a (non-microfiber) fibrous surface on the other side, e.g., for picking up other larger particles such as sand or sawdust; or, larger fibrils could be used to scrub and small microfibers could be used to polish.

Other examples of microfiber articles include cloths or cloth-like materials, e.g., for cleaning; tape backings; filter materials; fibrous mats; thermal and acoustical insulation; wipes; adhesive bandages; as well as others. Also, the multi-layer films, as well as microfiber articles made from the films, can be processed with other materials, including other microfiber-forming materials and other materials that are not microfiber-forming materials. See, e.g., Assignee's copending U.S. patent application Serial No. 09/858273, entitled "Microfiber-Entangled Products and Related Methods," filed 5-15-01.

One embodiment of a microfiber article of the invention is a two-layer microfiber article, wherein one layer is a microfiber layer and the other layer is either a microfiber layer or a non-microfiber layer.

Figure 1 shows two-layer co-extruded film 6 having layers 2 and 4, where each layer can be chosen to provide a property such that a microfiber article prepared from the film exhibits a desired combination of properties. Layer 2 is a microfiber-forming layer. Layer 4 can be a microfiber-forming layer or a non-microfiber-forming layer. In either case, layer 4 can be selected to provide a desired property in combination with properties of microfiber-forming layer 2. If layer 4 is chosen to be a microfiber-forming layer, it can be chosen to provide a property that is the same as or different from properties of microfiber-forming layer 2. If layer 4 is a non-microfiber layer, it can be chosen to provide a property that is or is not merely for support of microfiber-forming layer 2, e.g., non-microfiber layer 4 can be chosen to exhibit one or more desired properties in addition to performing the function of a support layer. For example, such a layer can be an elastomeric material or can exhibit any one or more of the properties of a non-microfiber layer discussed elsewhere in this description.

Exemplary combinations of materials of a two-layer film wherein both layers are microfiber layers include the following: a hydrophobic layer and a hydrophobic layer; a hydrophilic layer and an oleophilic layer.

In a specific embodiment of figure 1, a microfiber article can include exactly two layers, one of which comprises a microfiber surface and one of which is a non-microfiber layer. A non-microfiber layer may be a soft rubbery material, e.g., an elastomeric material. Exemplary materials for an elastomeric non-microfiber layer include butyl
5 rubber, poly(isoprene), polyurethanes, and elastomeric polyolefins such as certain polypropylenes and polyethylenes. One specific useful elastomer includes the type of copolymers known generally as styrenic thermoplastic elastomeric block copolymers. Examples of specific block copolymers within this class include polystyrene-polyisoprene-polystyrene, polystyrene-polybutadiene-polystyrene, and polystyrene-poly (ethylene-
10 butylene)-polystyrene based triblock copolymers. Such copolymers are commercially available from a variety of sources, for example under the brand-name Kraton, from Shell, and from DEXCO, under the brand-name Vector.

Exemplary combinations of materials of a two-layer film wherein one layer is a microfiber layer and the second layer is a non-microfiber layer, include the following: an
15 elastomeric non-microfiber layer in combination with a microfiber layer that is chosen from a hydrophilic, hydrophobic, oleophilic, or oleophobic layer; an elastomeric layer with a microfiber layer that attracts dust or particles; a microfiber layer with a non-microfiber layer that is flame retardant, puncture resistant, or tear resistant. As a more specific example, a two-layer film could include a microfibrillated polypropylene surface
20 on one side, and a blend containing polypropylene, sorbitan monolaurate and glycerol monolaurate on the other side to wipe up water.

Figure 1a illustrates an embodiment of a two-layer film, showing microfiber article 24 having non-microfiber layer 34, which can be, for example, an elastomeric layer, and microfiber layer 26 with microfiber surface 28. The materials of each of layers 34 and 26
25 can be chosen to provide a desired combination of properties.

Another embodiment of a two layer microfiber article includes two microfiber layers and two microfiber surfaces. The microfiber layers can be chosen to exhibit a useful combination of properties. An example of such an article is illustrated in Figure 1b, which shows microfiber article 30 having microfiber layers 32 and 36 and microfiber
30 surfaces 38 and 40, respectively.

While not shown in figure 1b, microfiber article 30 could be microfibrillated to cause microfiber formation down to any desired depth of either of layers 32 or 36, such as

microfibrillation of only the two surfaces; or microfibrillation of a surface of one of either layer, and microfibrillation fully through the other layer, optionally to cause microfibrillation of the internal surface of the first layer in contact with the second layer; or microfibrillation fully through both layers.

5 More generally, microfibrillation of any multi-layer film, e.g., a two-layer film like that of figure 1b, having two microfiber-forming layers, may be controlled to cause microfibrillation through a full layer and to a second microfiber-forming layer, to produce microfibers at the interface between the two layers and into the second layer, so that one or both types of microfibers can be present at a single microfiber surface. The other surface
10 may or may not be microfibrillated. This can produce an article with only one microfiber surface, with that microfiber surface having microfibers from both layers.

A different embodiment of a multi-layer film can have three or more layers, at least one of which is a microfiber-forming layer. For example, two layers may be microfiber-forming layers and a third layer (or more layers) may be a non-microfiber-forming layer.

15 Figure 2 shows an embodiment of a three-layer film wherein one surface includes a microfiber-forming layer and one surface includes a non-microfiber-forming layer. Film 8 includes layers 10, 12, and 14. In exemplary film 8, layer 10 can be a non-microfiber-forming layer, and layer 12 can be a microfiber-forming layer. Layer 14 can be either a
20 microfiber-forming layer or a non-microfiber layer.

20 In a version of the invention illustrated in figure 2a, microfiber-forming layers may be adjacent to one another and a non-microfiber layer may be adjacent to only one microfiber-forming layer. Figure 2a shows microfiber article 42 having non-microfiber layer 44 adjacent to microfiber-forming layer 46, which is adjacent to microfiber-forming layer 48. Microfiber article 42 has non-microfiber surface 56, and microfiber surface 54.
25 Microfiber-forming layer 48 has been microfibrillated to produce microfibers 50, and has been microfibrillated (at least at a portion of its area) fully through the microfiber forming layer 48. Over at least those portions of the area, microfiber-forming layer 46 has also been microfibrillated (through layer 48) to produce microfibers 52, so that both of
30 microfibers 50 and 52 make up the microfiber surface 54. While figure 2a illustrates microfiber article 42 with two adjacent microfiber layers 46 and 48, one of which can be fibrillated fully through and one of which can be fibrillated partially through, more than two microfiber layers may be used, with two or more being fibrillated fully through and

one (typically) being fibrillated at least partially through. Similarly, this could be done on two surfaces of a microfiber article, as well as one (as illustrated).

Exemplary combinations of materials of a three-layer film according to figure 2 wherein the middle layer 14 is a microfiber layer, include a construction according to
5 figure 2a, where layer 48 can be a microfibrillated polypropylene layer, layer 46 can be a microfibrillated blend containing polypropylene, sorbitan monolaurate and glycerol monolaurate, and layer 44 can be an elastomeric non-microfibrillated layer. This construction would be useful in applications where it is desired for water to be repelled from the top surface, but absorbed in the middle layer. An example of such an application
10 could be a dry-to-touch floor mat.

Figure 3 shows film 16 having a non-microfiber-forming core layer 18, such as an elastomeric polymer, and surface layers 20 and 22, which can be microfiber-forming layers, and can be the same or different. The combined properties of the three layers can be chosen as desired to provide a useful microfiber article. For example, the properties of
15 the three layers can combine to produce a flexible hard rubber or elastomeric cloth-like article with microfiber surfaces that might independently be hydrophobic, hydrophilic, oleophobic, oleophilic, etc. Or, the different layers may be chosen to have different microfiber surface properties, or preferred mechanical properties.

Exemplary combinations of materials of a three-layer film according to figure 23,
20 wherein the middle layer 14 is a non-microfiber layer, include the following: an elastomeric non-microfiber core layer with two microfiber skin layers, the microfiber layers being independently any of hydrophobic, hydrophilic, oleophobic, or oleophilic; a mechanically stiff non-microfiber core layer with two microfiber skin layers; or a water-proof and/or breathable non-microfiber core layer with two microfiber skin layers.
25 Another advantage of using a multi-layer film in which the two surface layers are fibrillated is the utility of having the core layer contain a tie layer, which can hold two microfiber layers together.

Other examples of three-layer films could include a fluoropolymer or elastomeric core, or a core of a more rigid solid plastic, and two microfibrillated surfaces, which may
30 be useful as a water-proof cloth, a rigid polishing or scrubbing pad, or possibly a surgical drape.

Another example of a multi-layer film of the invention incorporates the use of a multi-layer film that can be microfibrillated through one layer to a lower level, to produce microfibers from two or more layers of the film on a single surface of the film, with fibrillation of the surface in a pattern where different areas of the pattern are fibrillated to different depths to produce exposed microfibers from different layers of the multi-layer film.

Specifically, microfiber articles of the invention can be produced to include microfibers from different layers of a multi-layer film at a single surface of the microfiber article. Figure 2a shows multi-layer film 42 with microfibers 50 and 52 present at surface 54 of the film, originating from two different layers 46 and 48 of the multi-layer film. Thus, according to the invention, the surface 54 can include microfibers of different layers, and each the microfibers from each layer can be selected to have a different property, including any of the properties mentioned herein, or otherwise.

According to a specific embodiment of the invention, the surface of such a multi-layer article can be fibrillated in a pattern, to different degrees (or depths) to produce exposed microfibers from the different layers, and to cause the surface to have selected microfibers from the different layers over different areas of the article. For instance, referring to figure 2a, portions of surface 54 may be microfibrillated into only layer 48 such that those portions of the surface 54 include microfibers 50 from layer 48. These portions may be produced in any pattern, such as a strip, circle, rectangle, triangle, curves, or otherwise. Other areas of surface 54 can be fibrillated to produce microfibers from layer 46. By selective microfibrillation of different areas of surface 54 on multi-layer film 41, in some areas into only the outermost layer 48 and in some areas into a deeper layer 46, a microfiber article can include an area having microfibers 50 from only layer 48, and can have a second area having microfibers 52 of layer 46. In this embodiment, any microfibers 48 produced in the second area of microfibers 52 may preferably become unattached, leaving only microfibers 52 from layer 46 on that area.

The different layers 46 and 48 can be chosen to provide the first and second microfiber areas on the same surface, having a desired combination of first and second properties on surface 59 of the microfiber article. The surface can be of any pattern, as discussed, and can have different areas, in combination, chosen from microfibers that are hydrophilic, hydrophobic, oleophilic, oleophobic, stain resistant, temperature resistant, etc.

A preferred article, for instance, may have different microfiber areas in the combination of an area of hydrophilic microfibers and an area of oleophilic or hydrophobic microfibers.

Exemplary Microfibrillated Multi-Layer Film Preparation Processes

5

Process I – Casting of Multi-Layer Films

Multi-layer films were prepared by coextrusion of polymer melt streams through a 25.4 cm wide Cleoron 3-Layer coextrusion die, resulting in an A-B or A-B-C multi-layer film construction. The die was maintained at 243°C. The polymer melt stream for the A-layer of the multi-layer film was extruded into the 3-layer die using a 51 mm single screw extruder. The extruder temperature settings increased from 204°C to 260°C from the first heated section of the extruder to the die. The melt stream for the B-layer of the multi-layer film was extruded into the 3-layer die using a 25 mm twin-screw extruder. The extruder temperature settings increased from 204°C to 243° from the first heated section to the output of the extruder. The melt stream for the C-layer of the multi-layer film was extruded into the 3-layer die using a 38 mm single screw extruder. The extruder temperature settings increased from 204°C to 260° from the first heated section to the output of the extruder.

The output of the coextrusion die traveled over a single stainless-steel cast roll that was water heated to 99°C, with the A-layer of the resulting multi-layer cast film contacting and electrostatically pinned to the cast roll to help improve the quality of the film surface. The density of the resulting multi-layer cast film was determined as described in Test Procedure II below.

Process II – Calendering and Length Orienting of Multi-Layer Cast Films

Multi-layer cast films were calendered and length oriented on a series of rolls, including a calender. In this process, the cast film was fed from an unwind station through a series of idler rolls and into the compressive nip of a calender (rolls 1 and 2). The film exiting rolls 1 and 2 was further oriented as it passed over heated rolls 3 and 4 and cooled by traveling over an unheated roll 5. The resulting oriented film was wound onto a core under tension. For each of the films, the speed of roll 4 was set at a speed just below the speed at which the film would break. Test Procedure I described below was used to

determine the draw ratio of the resulting film. Test Procedure II described below was used to determine the density and void content of the resulting film.

Process III – Microfibrillation of Oriented Multi-Layer Films

5 Calendered and length-oriented multi-layer films were microfibrillated on one or both major surfaces in a hydroentangler (70 cm wide, manufactured by Honeycomb Systems Inc., Biddeford, Maine) using approximately 13.8 MPa water pressure, with multiple passes at a belt speed of 3.05 m/min, and a water jet strip having 15.75 holes/cm, with each hole having a diameter of 1.0 micron.

10

Test Procedures

Test Procedure I - Draw Ratio Measurement

 The draw ratio of calendered and length oriented films were calculated by dividing the roll 4 (described above) output speed by the input speed of the cast web into rolls 1 and 2 (described above).

15

Test Procedure II - Density Measurement and Void Content Determination

 Densities of cast films and films after calendering and orienting were measured at 23°C in deionized water according to the method of ASTM D792-86. Each film sample was weighed on a Mettler AG245 high precision balance (Mettler-Toledo, Inc., Highstown, NJ) and placed underwater. The mass of the water displaced was measured using the density measurement fixture. The volume of water displaced by the sample was thereby determined and, in combination with the sample weight, used to calculate the sample density. The void content was then calculated as follows:

20

25 Calculated Void content = $\{1 - (\text{final density}/\text{initial density})\} \times 100$ where the initial density is the density of the cast film before orientation, and the final density is the density of the oriented film.

Examples

30 Example 1

 An “A-B-C” 3-layer cast film was prepared according to Process I using polypropylene homopolymer (Fina 3271, available from Atofina Inc., Houston, TX) for

the A-layer melt stream, a tri-block copolymer with polystyrene end blocks and a rubbery poly(ethylene-butylene) mid block (Kraton G1657, available from Kraton Polymers, Houston TX) for the B-layer melt stream, and a polypropylene homopolymer (Fina 3271, available from Atofina Inc., Houston, TX) for the C-layer melt stream. The resulting 3-layer cast film had a thickness of 940 micrometer, a width of 241 mm, and a density of 0.9 gram/cm³.

The resulting cast film was calendered and length oriented according to Process II. The cast film was fed from an unwind station into the compressive nip of rolls 1 and 2 at a rate of 0.23 m/min. Rolls 1 and 2 each had surface speed of 0.91 m/min, a temperature of 120°C, and a gap between the rolls of 0.18 mm. Roll 3 had a surface speed of 2.97 m/min and a temperature of 120°C. Roll 4 had a surface speed of 3.27 m/min and a temperature of 145°C. The film was oriented to a draw ratio of 14.5:1 as determined by Test Procedure I. The resulting oriented film had a thickness of 100 micrometers, a width of 169.9 mm, and a density of 0.93 gram/cm³. Although the film appeared white and hence voided; the film was calculated to contain 0% voids.

Finally the oriented film was microfibrillated on both sides as described in Process III, by passing the film through the hydroentangler 6 times on each side. This resulted in a film with an elastomeric core layer and two microfibrillated surfaces. The properties of this film made it useful as a waterproof cloth-like film.

Example 2

An "A-B-C" 3-layer cast film was prepared according to Process I using polypropylene homopolymer (Fina 3271, available from Atofina Inc., Houston, TX) for the A-layer melt stream, a blend of 80% polypropylene homopolymer (Fina 3271, available from ATOFINA Inc., Houston, TX) and 20% of an ethylene vinyl acetate copolymer (Elvax 670, available from DuPont Chemical Co., Wilmington, DE) for the B-layer melt stream, and a polypropylene homopolymer (Fina 3271, available from Atofina Inc., Houston, TX) for the C-layer melt stream. The resulting cast film had a thickness of 880 micrometer, a width of 240 mm, and a density of 0.91 grams/cm³.

The resulting 3-layer cast film was calendered and length oriented according to Process II. The cast film was fed from an unwind station into the compressive nip of rolls 1 and 2 at a rate of 0.32 m/min. Rolls 1 and 2 each had surface speed of 0.91 m/min, a

temperature of 100°C, and a gap between the rolls of 0.18 mm. Roll 3 had a surface speed of 4.11 m/min and a temperature of 145° C. Roll 4 had a surface speed of 6.79 m/min and a temperature of 145°C. The film was oriented to a draw ratio of 21.4:1. The oriented film had a thickness of 121 micrometers, a width of 127 mm, and a density of 0.82 gram/cm³. The film was calculated to contain 10% voids.

The oriented film was microfibrillated on both sides as described in Process III, by passing the film through the hydroentangler 4 times on each side. The preparation of the resulting microfibrillated 3-layer film showed that the use of polypropylene protective A and C layers assisted in the orienting process and resulted in a film that was oriented to an extension ratio of 21.4:1, contained 10% by volume of voids, and was able to be fibrillated completely through the oriented film, without leaving an inner layer of film.

Example 3

An "A-B-C" 3-layer cast film was prepared according to Process I using a blend of 80% polypropylene homopolymer (Fina 3271, available from Atofina Inc., Houston, TX) and 20% of an ethylene vinyl acetate copolymer (Elvax 670, available from DuPont Chemical Co., Wilmington, DE) for the A-layer melt stream, polypropylene homopolymer (Fina 3271, available from Atofina Inc., Houston, TX) for the B-layer melt stream, and a blend of 80% polypropylene homopolymer (Fina 3271, available from Atofina Inc., Houston, TX) and 20% of an ethylene vinyl acetate copolymer (Elvax 670, available from DuPont Chemical Co., Wilmington, DE) for the C-layer melt stream. The resulting 3-layer cast film had a thickness of 920 micrometer, a width of 243mm, and a density of 0.91 grams/cm³.

The resulting 3-layer cast film was calendered and length oriented according to Process II. The cast film was fed from an unwind station into the compressive nip of rolls 1 and 2 at a rate of 0.31 m/min. Rolls 1 and 2 each had a surface speed of 0.91 m/min, a temperature of 100°C, and a gap between the rolls of 0.18 mm. Roll 3 had a surface speed of 4.11 m/min and a temperature of 145°C. Roll 4 had a surface speed of 4.94 m/min and a temperature of 145°C. The film was oriented to a draw ratio of 15.9:1. The oriented film had a thickness of 98 micrometers, a width of 165 mm, and a density of 0.87 gram/cm³. The film was calculated to contain 4% voids.

The oriented film was microfibrillated on both sides as described in Process III by passing the film through the hydroentangler 4 times on each side. The resulting 3-layer film, although microfibrillated on both surfaces, still contained a core layer of film. The film was oriented to an extension ratio of 15.9:1, contained 4% by volume of voids, and was not fibrillated completely through the film, leaving an inner layer of intact film. This shows that the use of polypropylene protective layers A and C in Example 2 assisted in increasing the extent of orientation, resulting in a film that was easier to microfibrillate than this 3-layer film of Example 3.

10 Example 4

An "A-B" 2-layer cast film was prepared according to Process I using a blend of 80% polypropylene homopolymer (Fina 3271, available from Atofina Inc., Houston, TX) and 20% of an ethylene vinyl acetate copolymer (Elvax 670, available from DuPont Chemical Co., Wilmington, DE) for both the A- and B-layer melt streams. The cast film had a thickness of 924 micrometer, a width of 241 mm, and a density of 0.91 grams/cm³.

The resulting cast film was calendered and length oriented according to Process II. The cast film was fed from an unwind station into the compressive nip of rolls 1 and 2 at a rate of 0.27 m/min. Rolls 1 and 2 each had surface speed of 0.91 m/min, a temperature of 100°C, and a gap between the rolls of 0.18 mm. Roll 3 had a surface speed of 3.66 m/min and a temperature of 145°C. Roll 4 had a surface speed of 5.49 m/min and a temperature of 145°C. The film was oriented to a draw ratio of 20.1:1. The oriented film had a thickness of 77 micrometers, a width of 152 mm, and a density of 0.91 gram/cm³. The resulting oriented 2-layer film was clear and was calculated to contain 0% voids.

The oriented 2-layer film was subjected to conditions for microfibrillation on both sides as described in Process III, by passing the film through the hydroentangler 4 times on each side. The resulting film, although microfibrillated on both surfaces, still contained internal portions of intact film. In comparison with the microfibrillated 3-layer film of Example 2, Example 4 resulted in a film that was oriented to an extension ratio of 20.1:1, contained 0% by volume of voids, and was not microfibrillated completely through, leaving an inner portion of intact film. This further shows that the use of polypropylene protective layers in Example 2 assisted in increasing the extent of orientation, resulting in

a more voided film and hence a more thoroughly microfibrillated film than this 2-layer film of Example 4.

Example 5

5 An "A-B-C" 3-layer cast film was prepared according to Process I using a blend of 80% by weight polypropylene homopolymer (Fina 3271, available from ATOFina Inc., Houston, TX) and 20% by weight of an ethylene vinyl acetate copolymer (Elvax 670, available from DuPont Chemical Co., Wilmington, DE) for the A-layer melt stream, a low density polyethylene (Eastman LDPE 1550P, available from Eastman Chemical Co., Kingsport, TN) for the B-layer melt stream, and a blend of 80% by weight polypropylene homopolymer (Fina 3271, available from ATOFina Inc., Houston, TX) and 20% by weight of an ethylene vinyl acetate copolymer (Elvax 670, available from DuPont Chemical Co., Wilmington, DE) for the C-layer melt stream. The resulting 3-layer cast film had a thickness of 926 micrometers, a width of 241mm, and a density of 0.92 grams/cm³.

15 The resulting cast film was calendered and length oriented according to Process II. The cast film was fed from an unwind station into the compressive nip of rolls 1 and 2 at a rate of 0.31 m/min. Rolls 1 and 2 each had a surface speed of 0.91 m/min, a temperature of 100°C, and a gap between the rolls of 0.18 mm. Roll 3 had a surface speed of 4.11 m/min and a temperature of 145°C. Roll 4 had a surface speed of 5.35 m/min and a temperature of 145°C. The film was oriented to a draw ratio of 17.2:1. The resulting oriented 3-layer film had a thickness of 144 micrometers, a width of 162 mm, and a density of 0.84 gram/cm³. The film was calculated to contain 8.7% voids.

20 The oriented 3-layer film was microfibrillated on both sides as described in Procedure III by passing the film through the hydroentangler 12 times on each side. This resulted in a film with a solid waterproof core layer and two microfibrillated surfaces.

Example 6

30 An "A-B-C" 3-layer cast film was prepared according to Process I using a polypropylene homopolymer (Fina 3271, available from Atofina Inc., Houston, TX) for the A-layer melt stream, a tri-block copolymer with polystyrene end blocks and a rubbery poly(ethylene-butylene) mid block (Kraton G1657, available from Kraton Polymers,

Houston TX) for the B-layer melt stream, and a polyethylene elastomer (Affinity 1845, available from Dow Plastics, Midland, MI) for the C-layer melt stream. The resulting 3-layer cast film had a thickness of 880 micrometer, a width of 241 mm, and a density of 0.88 gram/cm³.

5 The resulting cast film was calendered and length oriented according to Process II. The cast film was fed from an unwind station into the compressive nip of rolls 1 and 2 at a rate of 0.34 m/min. Rolls 1 and 2 each had surface speed of 0.61 m/min, a temperature of 80°C, and a gap between the rolls of 0.18 mm. Roll 3 had a surface speed of 2.44m/min and a temperature of 145°C. Roll 4 had a surface speed of 3.55 m/min and a temperature
10 of 145°C. The film was oriented to a draw ratio of 10.3:1. The resulting oriented 3-layer film had a thickness of 151 micrometers, a width of 160 mm, and a density of 0.9 gram/cm³. This film was clear and was calculated to contain 0% voids.

 Only the "A" side of the oriented 3-layer film was subjected to conditions for microfibrillation as described in Process III by passing the film through the hydroentangler
15 12 times. This resulted in a 3-layer puncture resistant film with one microfibrillated surface.

Example 7

 An "A-B" 2-layer cast film was prepared according to Process I using a
20 polypropylene homopolymer (Fina 3271, available from Atofina Inc., Houston, TX) for the A-layer melt stream, and a blend containing polypropylene homopolymers (22.5 weight % Fina 3445 with a melt flow index of 35 and 73.5 weight % Fina 3181 with a melt flow index of 0.75, both available from Atofina Inc., Houston TX), 1.3 weight % sorbitan monolaurate (SPAN 20 available from Uniqema, New Castle, DE), and 2.7
25 weight % glycerol monolaurate (Lauricidin available from Med-Chem Labs, Inc., Galena, IL) for the B-layer melt stream. The resulting two-layer cast film had a thickness of 876 micrometer, a width of 237 mm, and a density of 0.91 gram/cm³.

 The resulting 2-layer cast film was calendered and length oriented according to Process II. The cast film was fed from an unwind station into the compressive nip of rolls
30 1 and 2 at a rate of 0.3 m/min. Roll 1 had surface speed of 0.91 m/min, a temperature of 120°C. Roll 2 had surface speed of 1.6 m/min and a temperature of 120°C. The gap between rolls 1 and 2 was set to 0.2 mm. Rolls 3 and 4 each had a surface speed of 4.8

m/min and a temperature of 145°C. The film was oriented to a draw ratio of 15.8:1. The resulting oriented 2-layer film had a thickness of 93 micrometers, a width of 249 mm, and a density of 0.90 g/cm³. Although the film appeared white and hence voided; the film was calculated to contain only 0.2% voids.

5 The oriented 2-layer film was microfibrillated on both sides as described in Process III by passing the film through the hydroentangler 6 times on each side. The resulting 3-layer film, although microfibrillated on both surfaces, was not fibrillated completely through the film, leaving an inner portion of intact film in the core. This resulted in a microfibrillated film or non-woven cloth that was hydrophilic on one side and
10 hydrophobic and oleophilic on the other side.

Example 8

 An "A-B-C" 3-layer cast film was prepared according to Process I using a polypropylene homopolymer (Fina 3271, available from Atofina Inc., Houston, TX) for
15 the A-layer melt stream, a blend containing polypropylene homopolymers (22.5 weight % Fina 3445 with a melt flow index of 35 and 73.5 weight % Fina 3181 with a melt flow index of 0.75, available from Atofina Inc., Houston, TX), 1.3 weight % sorbitan monolaurate (SPAN 20 available from Uniqema, New Castle DE), and 2.7 weight % glycerol monolaurate (Lauricidin available from Med-Chem Labs, Inc., Galena, IL) for the
20 B-layer melt stream, and a polypropylene homopolymer (Fina 3271, available from Atofina Inc., Houston, TX) for the C-layer melt stream. The resulting 3-layer cast film had a thickness of 878 micrometers, a width of 238 mm, and a density of 0.9 gram/cm³.

 The resulting cast film was calendered and length oriented according to Process II. The cast film was fed from an unwind station into the compressive nip of rolls 1 and 2 at a
25 rate of 0.33 m/min. Rolls 1 and 2 each had a surface speed of 0.91 m/min and a temperature of 120°C. The gap between rolls 1 and 2 was set to 0.18 mm. Roll 3 had a surface speed of 4.57 m/min and a temperature of 145°C. Roll 4 had a surface speed of 6.17 m/min and a temperature of 145°C. The film was oriented to a draw ratio of 18.5:1. The oriented film had a thickness of 100 micrometers, a width of 152 mm, and a density of
30 0.80 gram/cm³. The film was calculated to contain 11% voids.

 The oriented film was microfibrillated on both sides as described in Process III by passing the film through the hydroentangler 6 times on each side. The preparation of the

5 resulting microfibrillated 3-layer film showed that the use of polypropylene protective A and C layers assisted in the orienting process and resulted in a film that was oriented to an extension ratio of 18.5:1, contained 11% by volume of voids, and was able to be microfibrillated completely through the oriented film, without leaving an inner portion of un-fibrillated film. Compared with the microfibrillated film of Example 7, this microfibrillated 3-layer film of Example 8 had an increased extent of orientation, an increased void volume per cent, and was more thoroughly microfibrillated. Similar to microfibrillated film of Example 7, this construction was also a non-woven cloth-like film with both hydrophilic and oleophilic surface properties.

10

Example 9

An "A-B-C" 3-layer cast film was prepared according to Process I using a polypropylene homopolymer (Fina 3271, available from Atofina Inc., Houston, TX) for the A-layer melt stream, a fluoropolymer (THV 220, available from Dyneon LLC, Oakdale, MN) for the B-layer melt stream, and a polypropylene homopolymer (Fina 3271, available from Atofina Inc., Houston, TX) for the C-layer melt stream. The resulting cast film had a thickness of 831 micrometer, a width of 222 mm, and a density of 1.1 grams/cm³.

15

The resulting 3-layer cast film was calendered and length oriented according to Process II. The cast film was fed from an unwind station into the compressive nip of rolls 1 and 2 at a rate of 0.48 m/min. Rolls 1 and 2 each had a surface speed of 0.91 m/min, a temperature of 80°C, and a gap between the rolls of 0.18 mm. Roll 3 had a surface speed of 4.57 m/min and a temperature of 120°C. Roll 4 had a surface speed of 4.65 m/min and a temperature of 145°C. The film was oriented to a draw ratio of 10.8:1. The resulting oriented 3-layer film had a thickness of 186 micrometers, a width of 143 mm, and a density of 0.86 gram/cm³. The film appeared white and hence voided; although there was some delamination between the layers.

20

25

The oriented 3-layer film was microfibrillated on both sides as described in Process III by passing the film through the hydroentangler 6 times on each side. This resulted in a film with a fluoropolymer core layer and two microfibrillated surfaces.

30

Example 10

An "A-B-C" 3-layer film was cast and oriented as in Example 8. A poly(vinylchloride) tape was applied to the top "A" layer to mask the film, leaving only one square region of the surface exposed. The masked film was microfibrillated on the masked "A" side through the "A" layer and into the underlying "B" layer as described in Process III, by passing the film through the hydroentangler 4 times, exposing only the unmasked portion of the "A" layer to the water jets. The masking tape was then removed from the "A" top layer. The result was a selectively microfibrillated, chemically differentiated sheet having a square region which contained microfibers of both the "A" and "B" layers surrounded by the unfibrillated region (masked area) of the top "A" layer. The microfibrillated region possessed a hydrophilic quality due to the presence of the fibers which originated from the underlying "B" layer, while the surrounding region was hydrophobic, because it was composed solely of the unfibrillated "A" top layer of polypropylene. These results show that a multilayer film, having a selected microfibrillated area of one property adjacent an unfibrillated area of another property.

Example 11

An "A-B-C" 3-layer film was cast and oriented as in Example 8. The oriented film was microfibrillated only partially through the top "A" layer as described in Process III, by passing the film through the hydroentangler one time, exposing only the "A" layer of the 3-layer film to the water jets. Then an aluminum plate having several circular holes was placed over the resulting top "A" layer to mask the film, leaving several circular regions of the film surface exposed. The masked film was then microfibrillated on the masked side as described in Process III, by passing the film through the hydroentangler three more times, exposing only the unmasked circular regions of the film to the water jets. The resulting construction had a chemically differentiated, selectively patterned fibrous surface having circular regions containing fibers of both the "A" layer and the "B" layer. These regions possessed a hydrophilic character and were surrounded by regions containing only fibers of the "A" layer which were hydrophobic in nature. These results show that a multilayer film, having selected microfibrillated areas of one property adjacent a microfibrillated area of another property, was formed.

Claims:

1. A multi-layer film comprising microfibers.
- 5 2. The film of claim 1 wherein the film is uni-axially oriented by stretching in one direction relatively more than stretching in a perpendicular direction.
3. The film of claim 1 comprising two opposing surfaces, each surface comprising microfibers.
- 10 4. The film of claim 3 wherein one surface is hydrophilic and one surface is hydrophobic.
5. The film of claim 1 comprising two opposing surfaces, one surface comprising microfibers and the other surface not comprising microfibers.
- 15 6. The film of claim 5 wherein a film layer having the surface not comprising microfibers exhibits a property selected from the group consisting of: elasticity, high or low modulus, puncture resistance, tear resistance, breathability, flame retardancy, high temperature resistance, low temperature resistance, and combinations thereof.
- 20 7. The film of claim 1 comprising a microfiber layer and a non-microfiber layer, the microfiber layer comprising a material that exhibits a property selected from the group consisting of hydrophobicity, hydrophilicity, oleophobicity, oleophilicity, a dielectric property, low coefficient of friction, stain resistance, flame retardance, high strength or modulus, an ability to produce a certain size microfiber, and combinations thereof, and
25 the non-microfiber layer comprising a material selected from the group consisting of a hydrophobic material, a hydrophilic material, an elastomeric material, a tear resistant material, a puncture resistant material, a high or low temperature resistant material, high strength, high modulus, adhesive properties, and a flame retardant material.
- 30

8. The film of claim 7 wherein the microfiber layer comprises a polypropylene.

9. The film of claim 7 wherein the non-microfiber layer comprises an elastomeric polymer.

5

10. The film of claim 1 wherein the multi-layer film is selected from the group consisting of:

a film consisting of two layers and a film consisting of three layers.

10

11. The film of claim 1 wherein the film comprises a non-microfiber layer comprising a material selected from the group consisting of a polypropylene, a polyethylene, a styrene-ethylene/butylene-styrene block copolymer, a styrene-isoprene-styrene block copolymer, a polyurethane, a fluoropolymer, poly(butylene), poly(isoprene), a nylon, and an adhesive.

15

12. The film of claim 1 wherein the film comprises two microfiber layers sandwiching a non-microfiber layer.

13. The film of claim 12 wherein the non-microfiber layer is elastomeric.

20

14. The film of claim 12 wherein the non-microfiber layer comprises a material selected from the group consisting of a polypropylene, a polyethylene, a styrene-ethylene/butylene-styrene block copolymer, a styrene-isoprene-styrene block copolymer, a polyurethane, a fluoropolymer, poly(butylene), poly(isoprene), a nylon, and an adhesive.

25

15. The film of claim 12 wherein a microfiber layer is a semicrystalline polymer selected from the group consisting of high and low density polyethylene, polypropylene, polyoxymethylene, poly(vinylidene fluoride), poly(methyl pentene), poly(ethylene-chlorotrifluoroethylene), poly(vinyl fluoride), poly(ethylene oxide), poly(ethylene terephthalate), poly(ethylene naphthalate), poly(butylene terephthalate), poly(lactic acid), nylon 6 12, nylon 6, nylon 66, polybutene, a thermotropic liquid crystal polymer, a blend of one or more of these polymers, or a copolymer of one or more the named monomers.

30

16. The film of claim 1 wherein the film is co-extruded.
17. The film of claim 1 wherein the film comprises from about 2 to about 5 layers.
- 5 18. The film of claim 1 wherein the film comprises from about 2 to about 5 layers, and the total film thickness prior to fibrillation is in the range from about 25 to about 10,160 microns.
19. The film of claim 1 consisting of a microfiber layer and a non-microfiber layer.
- 10 20. The film of claim 1 consisting of 2 microfiber layers.
21. The film of claim 1 consisting of 3 layers: one non-microfiber layer sandwiched by two microfiber layers.
- 15 22. The film of claim 1 wherein the microfibers have an average effective diameter of less than 20 microns and a transverse aspect ratio of from 1.5:1 to 20:1.
23. The film of claim 1 wherein the microfibers have an average effective diameter of
- 20 less than 5 microns.
24. The film of claim 1 wherein the microfibers have an average cross-sectional area of $0.7 \mu^2$ to $2.1 \mu^2$.
- 25 25. A multi-layer microfiber article comprising at least one microfiber layer and a non-microfiber layer comprising a material selected from the group consisting of a polypropylene, a polyethylene, a styrene-ethylene/butylene-styrene block copolymer, a styrene-isoprene-styrene block copolymer, a polyurethane, a fluoropolymer, poly(butylene), poly(isoprene), a nylon, and an adhesive.
- 30 26. The article of claim 25 wherein the non-microfiber layer is elastomeric.

27. The article of claim 25 wherein the non-microfiber layer exhibits a property selected from the group consisting of: elasticity, high or low modulus, puncture resistance, breathability, flame retardancy, temperature resistance, and combinations thereof.

5 28. The film of claim 25 wherein the microfiber layer comprises polypropylene.

29. A co-extruded, oriented, multi-layer film comprising one or more microfiber-forming layers.

10 30. The film of claim 29 consisting of two layers.

31. The film of claim 29 consisting of two microfiber-forming layers.

32. The film of claim 29 consisting of three layers.

15

33. The film of claim 29 comprising a non-microfiber-forming layer sandwiched between two microfiber-forming layers.

20 34. The film of claim 33 wherein one microfiber layer can be microfibrillated to a hydrophilic surface, and one microfiber layer can be microfibrillated to a hydrophobic surface.

35. A two-layer co-extruded film comprising one or two microfiber-forming layers.

25 36. A multi-layer microfiber article comprising a first microfiber layer at a surface of the article, and second microfiber layer adjacent to the first microfiber-layer, wherein areas of the surface are microfibrillated to form microfibers of only the first layer, and areas of the surface are microfibrillated through the first layer to form microfibers of the second layer.

30

37. The multi-layer microfiber article of claim 36 wherein a surface of the article includes a pattern comprising a first area of microfibers of one layer of the article, and a second area of microfibers of the second layer.

5 38. The article of claim 37 wherein an area of microfibers has a property selected from the group consisting of: hydrophobicity, hydrophilicity, oleophilicity, and oleophobicity.

39. A method of producing a microfiber-forming multi-layer film, the method comprising

10 providing an oriented film,
casting a polymeric film onto the oriented film to produce a multi-layer film,
orienting the multi-layer film to produce a multi-layer film having one or more
layers that can be microfibrillated to produce microfibers.

15 40. A method of producing a microfiber article, the method comprising:
providing a multi-layer film comprising at least one microfiber-forming layer, and
microfibrillating the microfiber-forming layer to form microfibers.

41. The method of claim 40 wherein the film is uniaxially-oriented.

20

42. The method of claim 40 wherein the film is co-extruded.

43. A method of producing a microfibrillated article, the method comprising
co-extruding a multi-layer film,

25

orienting the film,
and microfibrillating the layer to form microfibers from the layer.

44. A method of producing a microfibrillated article, the method comprising
providing an oriented film,

30

casting a polymeric film onto the oriented film to produce a multi-layer film,
orienting the multi-layer film to produce a multi-layer film having one or more

layers that can be microfibrillated to produce microfibers,
and microfibrillating the layer to form microfibers from the layer.



Fig. 1

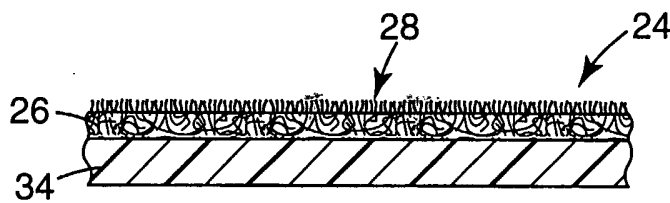


Fig. 1a

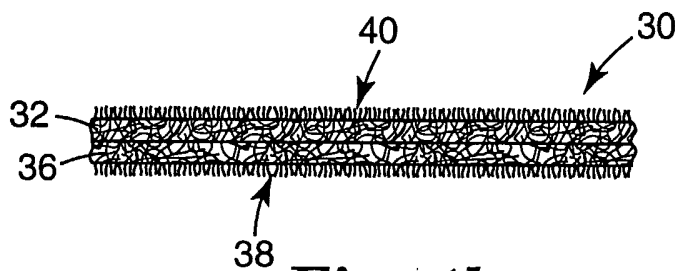


Fig. 1b

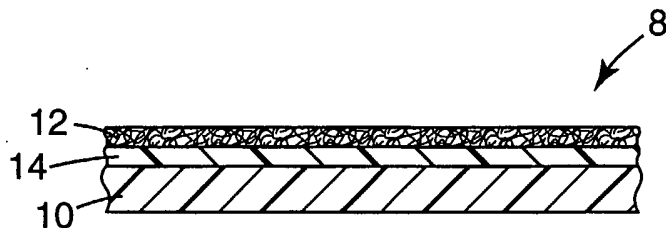


Fig. 2

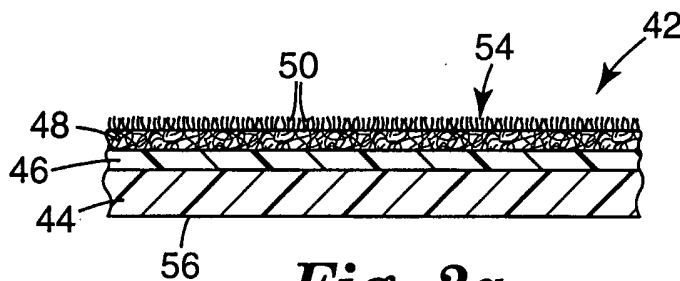


Fig. 2a

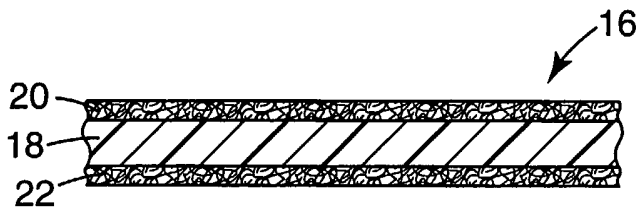


Fig. 3

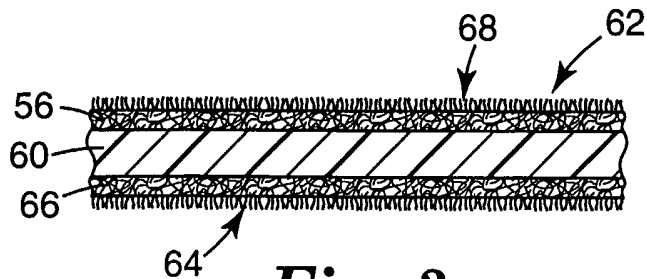


Fig. 3a

INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 02/26508

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 D04H13/02 D01D5/42 B29C55/06 B32B27/32 B32B27/08
 B32B5/02 B32B31/16

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 D04H D01D B29C B32B B05C

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 00 68301 A (3M INNOVATIVE PROPERTIES CO) 16 November 2000 (2000-11-16) cited in the application page 7, line 14 - line 17 page 8, line 19 - line 28 page 11, line 24 -page 12, line 21 page 14, line 7 -page 15, line 21 page 16, line 22 - line 31 page 20, line 11 - line 28 page 21, line 26 -page 22, line 25 examples 6,7	1-3, 5, 29, 30, 35, 40, 43
X	GB 1 244 860 A (PHILLIPS PETROLEUM CO.) 2 September 1971 (1971-09-02) page 1, line 16 -page 2, line 5 claims 1-7, 11-15	1, 2, 40, 41
	-/--	



Further documents are listed in the continuation of box C.



Patent family members are listed in annex.

° Special categories of cited documents :

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- * & * document member of the same patent family

Date of the actual completion of the international search

23 January 2003

Date of mailing of the international search report

10. 02. 03

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
 NL - 2280 HV Rijswijk
 Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
 Fax: (+31-70) 340-3016

Authorized officer

Lindner, T

INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 02/26508

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 3 003 304 A (OLE-BENDT RASMUSSEN) 10 October 1961 (1961-10-10) column 1, line 20 -column 2, line 41 claims 1,2,5,6 ---	1,2,41
A	EP 0 366 210 A (SHELL INT RESEARCH) 2 May 1990 (1990-05-02) page 2, column 2, line 23 - line 47 page 3, column 3, line 26 - line 32 ---	1,2,40, 41
A	US 3 496 260 A (GUENTHER LLOYD M ET AL) 17 February 1970 (1970-02-17) column 1, line 34 -column 2, line 46 ---	1,2,40, 41
X	US 5 939 339 A (DELMORE MICHAEL D ET AL) 17 August 1999 (1999-08-17) example 4 ---	1,7,11, 25,27
X	US 5 855 992 A (ETZOLD STEFAN) 5 January 1999 (1999-01-05) column 1, line 33 -column 2, line 25 column 3, line 38 - line 43 column 5, line 62 -column 6, line 3 ---	1,5-7,19
X	US 4 041 203 A (BROCK ROBERT J ET AL) 9 August 1977 (1977-08-09) examples I,II ---	1,5-8, 11,12, 14,15, 19,21, 25,27,28
X	US 5 639 541 A (ADAM GABRIEL HAMMAN) 17 June 1997 (1997-06-17) column 2, line 42 - line 54 column 7, line 26 -column 8, line 7 claims 1,2,4-8 ---	3,20
X	US 5 451 283 A (RACKOVAN MITCHELL J ET AL) 19 September 1995 (1995-09-19) column 9, line 8 -column 10, line 10; table 1 ---	1,3,40, 41,43,44
X	column 8, line 29 -column 9, line 7 ---	29,31-33
A	WO 99 43881 A (SOLIPAT AG ;STRAHM CHRISTIAN (CH)) 2 September 1999 (1999-09-02) claims 1-18 ---	40,44
X	EP 1 091 042 A (UNI CHARM CORP) 11 April 2001 (2001-04-11) paragraph '0066!; claims 1,4,5 ---	1,3
	-/--	

INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 02/26508

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 6 124 971 A (COBB JR SANFORD ET AL) 26 September 2000 (2000-09-26) cited in the application column 3, line 40 -column 4, line 13 ---	29
E	WO 02 092899 A (3M INNOVATIVE PROPERTIES CO) 21 November 2002 (2002-11-21) page 6, line 25 -page 7, line 22 page 8, line 1 - line 30 page 10, line 15 - line 21 page 11, line 23 - line 31 page 13, line 11 -page 14, line 28 page 17, line 11 - line 25 page 26, line 15 -page 28, line 18; example 6 -----	1,29,35
X		7,8,11, 19,25, 27,28

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US 02/26508

Box I Observations where certain claims were found unsearchable (Continuation of item 1 of first sheet)

This International Search Report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. Claims Nos.:
because they relate to subject matter not required to be searched by this Authority, namely:

2. Claims Nos.:
because they relate to parts of the International Application that do not comply with the prescribed requirements to such an extent that no meaningful International Search can be carried out, specifically:

3. Claims Nos.:
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

Box II Observations where unity of invention is lacking (Continuation of item 2 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:

see additional sheet

1. As all required additional search fees were timely paid by the applicant, this International Search Report covers all searchable claims.

2. As all searchable claims could be searched without effort justifying an additional fee, this Authority did not invite payment of any additional fee.

3. As only some of the required additional search fees were timely paid by the applicant, this International Search Report covers only those claims for which fees were paid, specifically claims Nos.:

1, 2, 3-6, 7-9, 11, 12-15, 19-21, 25-28, 29-35, 36-38, 39, 40, 41, 43, 44

4. No required additional search fees were timely paid by the applicant. Consequently, this International Search Report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:

Remark on Protest

- The additional search fees were accompanied by the applicant's protest.
- No protest accompanied the payment of additional search fees.

INTERNATIONAL SEARCH REPORT

International Application No. PCT/US 02 26508

FURTHER INFORMATION CONTINUED FROM PCT/ISA/ 210

This International Searching Authority found multiple (groups of) inventions in this international application, as follows:

1. Claims: 1,2,40,41

A multi-layer film comprising microfibers which is predominantly stretched in one direction (uni-axially oriented). Process for its manufacture.

2. Claims: 1,3-6

A multi-layer film comprising microfibers and having two opposing surfaces at least one of which comprises microfibers.

3. Claims: 1 7-9 11 12-15 19-21 25-28 36-38 40 43 44

A multi-layer film comprising at least one microfiber layer and the film further comprising or consisting of either another microfiber layer or a non-microfiber layer or another microfiber layer which sandwich a non-microfiber layer. Process for its manufacture.

4. Claims: 1,16,42,43

A multi-layer film comprising microfibers wherein the film is co-extruded. Process for its manufacture.

5. Claims: 1,10,17,18

A multi-layer film comprising microfibers and which film comprises a predetermined number of layers.

6. Claims: 1,22-24

A multi-layer film comprising microfibers and which film is further characterized by parameters of the microfibers.

7. Claims: 29-35,39

A co-extruded, optionally oriented, multi-layer film comprising one or more microfiber-forming layers and which preferably consists of two or three layers. This film is a precursor which does not yet comprise microfibers. Process for its manufacture.

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 02/26508

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
WO 0068301	A	16-11-2000	US 6331343 B1	18-12-2001
			AU 5905699 A	21-11-2000
			BR 9917290 A	19-02-2002
			CN 1352663 T	05-06-2002
			EP 1177244 A1	06-02-2002
			WO 0068301 A1	16-11-2000
			US 2002034610 A1	21-03-2002
GB 1244860	A	02-09-1971	BE 724832 A	03-06-1969
			DE 1812700 A1	28-08-1969
			FR 1604593 A	06-12-1971
US 3003304	A	10-10-1961	DE 1149325 B	30-05-1963
			FR 1340152 A	18-10-1963
EP 0366210	A	02-05-1990	US 5077121 A	31-12-1991
			AU 617549 B2	28-11-1991
			AU 4377589 A	03-05-1990
			BR 8905447 A	29-05-1990
			CA 2001556 A1	27-04-1990
			DE 68920545 D1	23-02-1995
			DE 68920545 T2	03-08-1995
			EP 0366210 A2	02-05-1990
			ES 2068886 T3	01-05-1995
			JP 2171241 A	02-07-1990
			JP 2894743 B2	24-05-1999
US 3496260	A	17-02-1970	BE 696195 A	01-09-1967
			CH 499639 A	30-11-1970
			DE 1704532 A1	25-05-1972
			DK 125751 B	30-04-1973
			ES 338749 A1	01-04-1968
			FR 1518108 A	22-03-1968
			GB 1128274 A	25-09-1968
			JP 51013770 B	04-05-1976
			NL 134100 C	
			NL 6704252 A	02-10-1967
			SE 332482 B	08-02-1971
US 5939339	A	17-08-1999	DE 69313860 D1	16-10-1997
			DE 69313860 T2	22-01-1998
			EP 0651628 A1	10-05-1995
			ES 2106359 T3	01-11-1997
			JP 7509157 T	12-10-1995
			WO 9402090 A1	03-02-1994
US 5855992	A	05-01-1999	DE 19642958 A1	23-04-1998
			AT 217539 T	15-06-2002
			CN 1182145 A ,B	20-05-1998
			DE 59707270 D1	20-06-2002
			DK 836877 T3	09-09-2002
			EP 0836877 A1	22-04-1998
			ES 2175242 T3	16-11-2002
			JP 10204765 A	04-08-1998
US 4041203	A	09-08-1977	NL 7315238 A ,B,	12-05-1975
US 5639541	A	17-06-1997	AU 1411097 A	17-07-1997

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 02/26508

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 5639541	A		CA 2238441 A1 WO 9723678 A1 ZA 9609677 A	03-07-1997 03-07-1997 12-06-1997
US 5451283	A	19-09-1995	AU 689122 B2 AU 7254594 A BR 9405546 A CA 2144650 A1 CN 1112782 A EP 0660772 A1 JP 8504700 T WO 9502506 A1 US 5585193 A US 5849419 A	26-03-1998 13-02-1995 08-09-1999 26-01-1995 29-11-1995 05-07-1995 21-05-1996 26-01-1995 17-12-1996 15-12-1998
WO 9943881	A	02-09-1999	EP 0937803 A1 AU 3140699 A WO 9943881 A1 EP 1058746 A1 US 6295706 B1	25-08-1999 15-09-1999 02-09-1999 13-12-2000 02-10-2001
EP 1091042	A	11-04-2001	JP 2001172851 A AU 4887500 A BR 0004139 A CN 1292446 A EP 1024225 A1 EP 1091042 A1 JP 2001172850 A TW 412411 B TW 475893 B	26-06-2001 12-04-2001 29-05-2001 25-04-2001 02-08-2000 11-04-2001 26-06-2001 21-11-2000 11-02-2002
US 6124971	A	26-09-2000	US 6262842 B1 US 2001008464 A1 AU 706253 B2 AU 5804296 A EP 0871923 A1 JP 11509331 T WO 9701788 A1	17-07-2001 19-07-2001 10-06-1999 30-01-1997 21-10-1998 17-08-1999 16-01-1997
WO 02092899	A	21-11-2002	US 2002187329 A1 WO 02092899 A1	12-12-2002 21-11-2002