United States Patent [19]

Perl

[11] **3,842,319**

[45] **Oct. 15, 1974**

[54] **GAS IGNITER**

[75] Inventor: **Richard L. Perl,** Mansfield, Ohio

[73] Assignee: **The Tappan Company,** Mansfield, Ohio

[22] Filed: **Sept. 18, 1972**

[21] Appl. No.: **290,256**

Related U.S. Application Data

[63] Continuation-in-part of Ser. No. 223,451, Feb. 4, 1972, abandoned.

[52] **U.S. Cl.** **317/98,** 219/270, 338/330, 431/262

[51] **Int. Cl.** **F23q 7/00**

[58] **Field of Search** 317/79, 98; 219/270, 553; 126/39; 123/145, 326; 338/330, 332; 431/262; 29/611

[56] **References Cited**

UNITED STATES PATENTS


2,205,145	6/1940	Klingner	317/98 X
2,404,841	7/1946	Hess et al.	317/98
2,708,701	5/1955	Viola	338/332 X
3,220,097	11/1965	Griest	29/611
3,269,806	8/1966	Fitzer et al.	338/330 X
3,372,305	3/1968	Mikulec	317/98
3,397,375	8/1968	Casper et al.	338/330
3,467,812	9/1969	Terrill	317/98 X
3,662,222	5/1972	Ray	317/98

Primary Examiner—Volodymyr Y. Mayewsky
Attorney, Agent, or Firm—Donnelly, Maky, Renner & Otto

[57] **ABSTRACT**

A solid-state silicon carbide gas igniter to which electrical leads are bonded for energization by flame or plasma spraying as used for hardfacing alloys, metals and ceramics, the leads being received in slots in the igniter terminal parts and the latter, with the thus inserted leads, encased or coated by the spray bonding material. In applying such material, the centerline of the spray is directed at an angle of approximately 45° toward the terminal end of the igniter while the latter is preferably relatively rotated to provide the material coating fully about the terminal parts of the igniter and the inserted leads.

5 Claims, 5 Drawing Figures

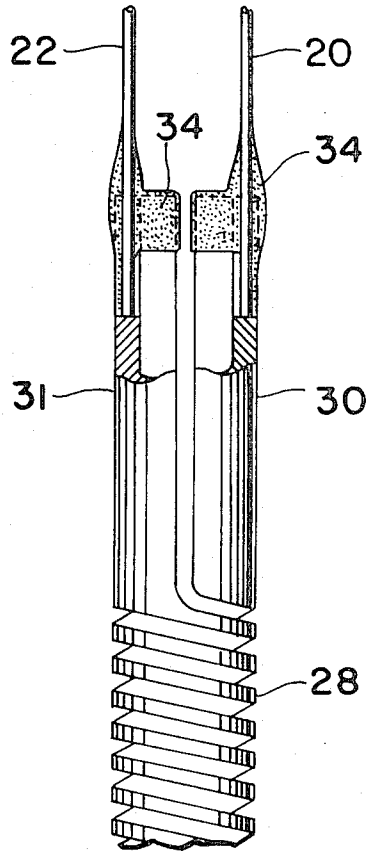

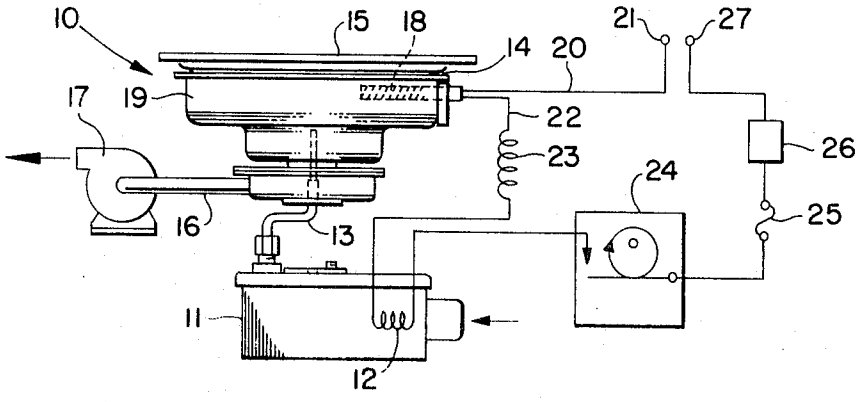


FIG. 1

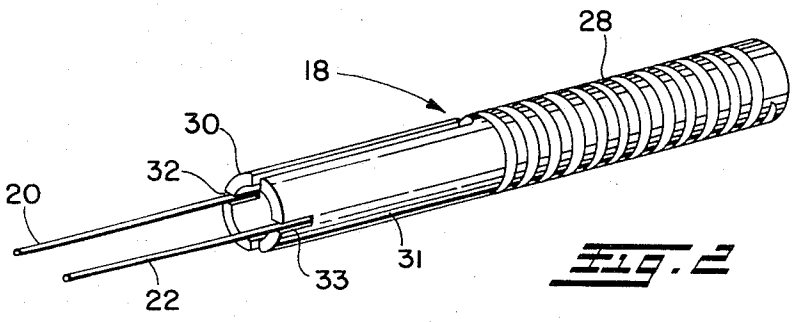


FIG. 2

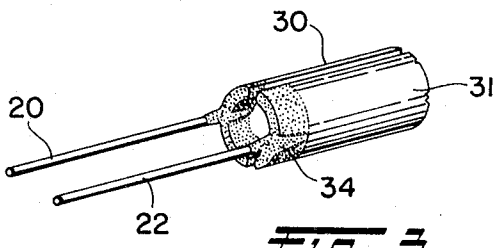


FIG. 3

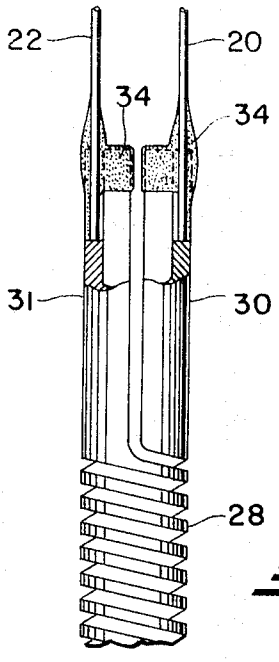


FIG. 4




FIG. 5

GAS IGNITER

This application is a continuation-in-part of my pending application Ser. No. 223,451, filed Feb. 4, 1972, now abandoned.

It is, more particularly, concerned with an improved solid-state silicon carbide gas igniter of the type shown in such co-pending application in which it is there shown in association with a particular type of gas stove burner assembly. However, it should be understood, and will become readily evident from the following, that the new igniter is not limited to use in such an appliance, but has wider applicability in gas-ignition systems in either cyclical or continuous operating modes.

The previously available silicon carbide igniters presented problems in the attachment of the leads or electrical connectors for energizing the same where such connections were exposed to fairly high temperatures, for example, on the order of 1,400°F, since the joints were effected by ordinary flame spraying of aluminum and failed under the noted high temperature exposure. Securing of the leads to the igniter by means of silver soldering over a thin nickel or stainless steel coating was found likewise unsatisfactory, in this case, because of the substantial difference in thermal expansion which occurred between the silicon carbide and the solder. For these reasons, as explained in the aforesaid co-pending application, high temperature plasma and flame spraying were tested and found successful, that is, as providing for the first time reliable connections of the leads to the igniter under the relatively severe operating temperatures required.

The technique of plasma spray coating is, of course, well-known and, briefly, comprises the injection of powders into an arc, together with a flow of gas through the arc region to carry the material to the surface on which deposition and bonding takes place. The powders are melted, vaporized and deposited on the substrate where they freeze and form a tightly bonded coat, the surface being effectively pre-roughened and the melt freezing into the surface imperfections, with some metallurgical bonding also occurring. For further details and illustration of typical plasma spray apparatus, reference may be had to the herein incorporated disclosure thereof found in "The Plasma State," by E. J. Hellund, published in 1961 by Reinhold Publishing Corp., N. Y., and particularly pages 167–170 of such work. High temperature flame spraying, for example, as carried out with apparatus available from METCO INC., Westbury, N. Y., which also supplies plasma spray equipment and coating materials for both methods, will provide like results, at a lower temperature than the latter but still well above the noted 1,400°F desired for the end coating.

The present improvement has as a further primary objective an improved configuration of the bond produced by such spray coating of the electrical leads to the igniter body.

An additional object is to provide such an igniter by using a preferred method for producing such a bonded electrical lead attachment thereto.

Other objects and advantages of the present invention will become apparent as the following description proceeds.

To the accomplishment of the foregoing and related ends the invention, then, comprises the features hereinafter fully described and particularly pointed out in the claims, the following description and the annexed drawing setting forth in detail a certain illustrative embodiment of the invention, this being indicative, however, of but one of the various ways in which the principle of the invention may be employed.

In said annexed drawing:

FIG.1 is a schematic diagram of gas burner apparatus using the improved igniter as shown in the above-referenced copending application;

FIG. 2 is a perspective view of the igniter body with its connecting leads in place but not yet bonded;

FIG. 3 is a fragmented comparable perspective of the igniter after bonding of the leads in accordance with the invention;

FIG. 4 is a fragmentary elevation of the completed igniter, with the attached lead end shown in cross section; and

FIG. 5 is an end view of the connector end of the new igniter.

Referring now to the drawing in detail, the illustrative range gas burner shown in FIG. 1 and designated generally by reference numeral **10** is fully described in the above-noted copending application and reference may be had thereto, if desired, for details of the internal construction of the burner and its operation. For present purposes, it will be pointed out that this burner receives the gaseous fuel to be combusted from an available source through a thermal fuel valve **11** having an electrical resistance element **12** as its actuator and a pipe **13** extending from the output side of the valve to the interior of the burner. Combustion air is supplied through a peripheral opening **14** about the top of the burner housing and beneath, in this assembly, a glass ceramic top **15** on which pots and pans and other utensils are supported for heating by the burner.

There is, moreover, an exhaust line **16** leading from the burner to a discharge blower **17,** so that this particular burner is of powered type operating under negative pressure.

The burner is ignited by a glow coil element **18** of solid state silicon carbide the terminal end of which extends as illustrated outside of the burner housing **19.** One lead or wire **20,** for example, of nichrome extends to a terminal **21** of an electrical energy source, while the other igniter connecting lead **22** is in electrical series with a ballast coil **23,** the resistance actuator element **12** of the thermal valve **11,** a variable duty cycle motor driven mechanical switch **24,** a fuse **25,** and an air switch **26** to the other energy source terminal **27.** The air switch in this system is intended and operative to preclude operation of the burner unless the exhaust blower is operating, as a safety interlock feature.

The igniter element **18** comprises in effect a helically wound body **28** of the silicon carbide, as a double helix, and has as terminal portions two semicircular and spaced apart extensions **30, 31.** This configuration of the element is known and available, for example, from the Carborundum Company.

However, in accordance with the present improvements, the ends of the terminal parts **30, 31** of the igniter are provided with diametrically opposite and centered slots **32, 33** into which the connecting leads **20** and **22** for energization are inserted. As indicated previously, this area of connection is in a fairly high temperature environment and the leads are bonded to the igniter body in such placement by high temperature

flame or plasma spraying. More particularly, the pre-assembly illustrated in FIG. 2 is subjected to such metallizing spray, with the centerline of the spray, which is typically cone shaped, directed at the terminal end of the body preferably at an angle of approximately 45° while the body with its inserted leads is rotated fully. This operation produces the bonding shown in the remaining figures, with a slight built-up of sprayed material 34 in the area of the igniter end about the leads and tapering longitudinally in both directions, as shown most clearly in FIG. 4. Moreover, the described application of the bonding material results in the same being adhered fully peripherally about the igniter terminals 30, 31, with the extent of the application to the interior surfaces as well as the exterior and the edges of such parts being achieved by the noted direction of the spray and of somewhat lesser longitudinal extent at the interior surfaces due to the partial shielding of the latter which occurs.

As shown most clearly in FIG. 5, the sprayed material 34 not only secures the inserted leads in place, but thus fully and continuously encases the terminal parts of the igniter for an extremely secure and reliable attachment of the leads.

Various powders for producing the sprayed coating are commercially available, with one found successful having a composition of nickel, chrome, and aluminum. This material is available from METCO INC. as METCO 443, METCO 450, and METCO 451, the last being somewhat more exothermic and the first (75 percent Ni; 19 percent Cr; 6 percent Al) most closely approximating expansivity of the particular silicon carbide tested.

Another source of apparatus and powders is Plasmadyne Division of Geotel, Inc., Santa Ana, Cal., and METCO INC. also supplies other powders specifically for the flame spraying technique in which, as is known, only oxygen and acetylene are used and the cost thus somewhat reduced as compared to plasma spraying. The aforenoted illustrative METCO powders can be used as well for flame spraying, although very high temperature materials must be plasma sprayed.

The disclosed high temperature spraying or metallizing fully meets the desideratum of withstanding temperatures on the order of 1,400°F or even higher, which cannot be realized with the conventional aluminum spray, and the total encasement of the leads eliminates any problem of failure, such as by spalling, due to differential thermal expansion of the materials.

Also unlike the conventional igniter, there is no need for clips between the leads and the igniter terminals.

The inserted leads instead of being round and straight as shown, can be of ribbon form and include a crimp or a rebent inner end adding a spring engagement in the slots to assist in holding them more firmly in place if needed during the metallizing operation.

It will also be clear to those skilled in the art that this improved igniter assembly can be used for long service life in all types of gas-fired domestic appliances, water heaters, laundry dryers, furnaces and the like and, additionally, as a source of infrared heat where spot or localized heating is desired. The igniters, as is known, can operate over a temperature range of about 2,100° to 2,400°F. The plasma arc spraying as described can be conducted with the igniter either pre-heated or at room temperature, with the leads ordinarily made of nichrome, as previously indicated in the different forms thereof. The igniter itself can be made of other materials than the described silicon carbide, e.g., molybdenum di-silicide or combinations of these and comparable available materials.

I, therefore, particularly point out and distinctly claim as my invention:

1. The improvement in high temperature gas igniters having discrete spaced-apart terminal parts for connection to a source of electric energy, which comprises a plurality of electrical leads positioned in conductive engagement with respective ones of said terminal parts, said electrical leads extending from said terminal parts for such connection of the igniter and said electrical leads being of low electrical resistance relative to that of the igniter, and respective metallized coatings having a coefficient of expansion approximating that of the terminal parts about the respective leads and terminal parts in such conductive engagement bonding the former to the latter respectively, while maintaining the spaced and hence electrically insulated relation thereof.

2. The improved gas igniter set forth in claim 1, wherein the metallized coatings extend substantially completely over at least the exterior and the interior surfaces of the interengaged igniter terminal parts and over the electrical leads to further enhance the bonding of the leads to the igniter in high temperature exposure of such connections thereof.

3. The improved gas igniter set forth in claim 2, wherein the metallized coatings fully continuously encase the terminal parts, including the side edges thereof, and the leads in engagement with the same.

4. The improved gas igniter set forth in claim 2, wherein the igniter is in coil form and made of a material having the properties of silicon carbide.

5. The improvement in high temperature gas igniters having discrete spaced-apart terminal parts for connection to a source of electric energy, which comprises electrical leads in conductive engagement with and extending from said terminal parts for such connection of the igniter, and metallized coatings about the leads and parts in such engagement bonding the former to the latter, respectively, while maintaining the spaced and hence electrically insulated relation thereof, the metallized coatings extending substantially completely over at least the exterior and the interior surfaces of the interengaged igniter terminal parts and over the electrical leads to further enhance the bonding of the leads to the igniter in high temperature exposure of such connections thereof, the igniter being in coil form and made of a material having the properties of silicon carbide, and wherein the igniter terminal parts are arcuate, at the same end thereof, the electrical leads being received in longitudinal slots formed therein, and the metallized coatings extending over the exterior and interior surfaces of said parts, thereby to enclose the leads within the terminal parts.

* * * * *