

PATENT REQUEST: STANDARD PATENT/PATENT OF ADDITION

We, being the persons identified below as the Applicant, request the grant of a patent to the person identified below as the Nominated Person, for an invention described in the accompanying standard complete specification.

Full application details follow.

[71] Applicant: DOW CORNING CORPORATION
Address: MIDLAND, STATE OF MICHIGAN 48686-0994, UNITED STATES OF AMERICA

[70] Nominated Person: DOW CORNING CORPORATION
Address: MIDLAND, STATE OF MICHIGAN 48686-0994, UNITED STATES OF AMERICA

[54] Invention Title: METHOD FOR CURING ORGANOSILOXANE COMPOSITIONS IN THE PRESENCE OF CURE INHIBITING MATERIALS

[72] Name(s) of actual inventor(s): CAROL ANNE HOAG and STEVEN WEST WILSON

[74] Address for service in Australia: c/o WATERMARK PATENT & TRADEMARK ATTORNEYS, of The Atrium, 290 Burwood Road, Hawthorn, Victoria 3122, Australia Attorney Code: WM


BASIC CONVENTION APPLICATION(S) DETAILS

[31] Application Number	[33] Country	Country Code	[32] Date of Application
088,955	UNITED STATES OF AMERICA	US	12 JULY 1993

Basic Applicant(s): CAROL ANNE HOAG and STEPHEN WEST WILSON

Drawing number recommended to accompany the abstract

By our Patent Attorneys,
WATERMARK PATENT & TRADEMARK ATTORNEYS


.....
Ian A. Scott
Registered Patent Attorney

DATED this 8th day of July 1994.

M057703 080794

AUSTRALIA

Patents Act 1990

NOTICE OF ENTITLEMENT


We, DOW CORNING CORPORATION, of Midland, State of Michigan 48686-0994, United States of America, being the applicant in respect of Application No. 67379/94 state the following:-

The Person nominated for the grant of the patent has entitlement from the actual inventors by assignment.

The Person nominated for the grant of the patent has entitlement from the applicants of the basic application listed on the patent request form by assignment.

The basic application listed on the request form is the first application made in a Convention country in respect of the invention.

By our Patent Attorneys,
WATERMARK PATENT & TRADEMARK ATTORNEYS

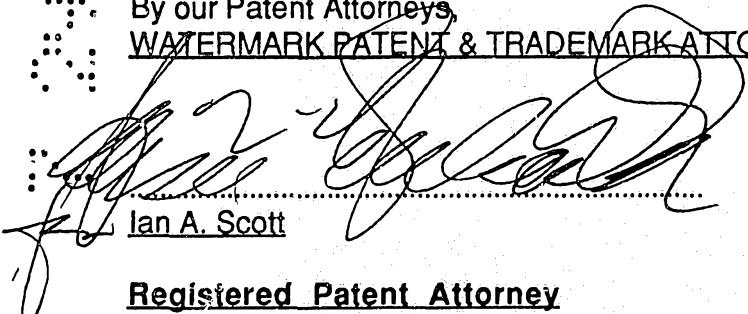
.....
Ian A. Scott

31 January 1997
.....

Registered Patent Attorney



AU9467379

(12) PATENT ABRIDGMENT (11) Document No. AU-B-67379/94
(19) AUSTRALIAN PATENT OFFICE (10) Acceptance No. 677666

- (54) Title
METHOD FOR CURING ORGANOSILOXANE COMPOSITIONS IN THE PRESENCE OF CURE INHIBITING MATERIALS
- (51)⁵ International Patent Classification(s)
C08G 077/38 C08F 283/12
- (21) Application No. : **67379/94** (22) Application Date : **08.07.94**
- (30) Priority Data
- (31) Number (32) Date (33) Country
088955 12.07.93 US UNITED STATES OF AMERICA
- (43) Publication Date : **19.01.95**
- (44) Publication Date of Accepted Application : **01.05.97**
- (71) Applicant(s)
DOW CORNING CORPORATION
- (72) Inventor(s)
CAROL ANNE HOAG; STEVEN WEST WILSON
- (74) Attorney or Agent
WATERMARK PATENT & TRADEMARK ATTORNEYS , Locked Bag 5, HAWTHORN VIC 3122
- (56) Prior Art Documents
US 4528243
EP 0471475
JP 63280766

(57) Claim

1. A method for curing an organosiloxane composition containing an organohydrogensiloxane as the curing agent when said composition is in contact with a substrate having on its surface a material comprising at least one cure-inhibiting component, said method comprising the sequential steps of

1) applying a layer of a liquid organosilicon compound containing at least two silicon-bonded hydrogen atoms per molecule to at least those portions of said substrate containing said cure-inhibiting component,

2) applying a curable organosiloxane composition over said layer of liquid organosilicon compound, the composition comprising

A) a polyorganosiloxane containing an average of at least two alkenyl radicals or silanol groups per molecule and exhibiting a viscosity greater than 0.1 Pa.s;


B) an amount of a liquid organohydrogensiloxane sufficient to cure said composition, where said organohydrogensiloxane contains an average of at least two silicon-bonded hydrogen atoms per molecule, with the proviso that the sum of the average number of alkenyl radicals or silanol groups per molecule present in said polyorganosiloxane together with the average number of silicon-bonded hydrogen atoms per molecule in said organo-

hydrogensiloxane is greater than 4, and the molar ratio of silicon-bonded hydrogen atom in said organohydrogensiloxane to alkenyl radicals or silanol groups in said polyorganosiloxane is from 0.3 to 20 and with the proviso that the organic groups present in the organohydrogensiloxane are substantially free of ethylenic or acetylenic unsaturation; and

C) an amount of a catalyst sufficient to provide a platinum group metal concentration of from 0.1 to 500 parts by weight of platinum group metal, or a compound of said metal, per one million parts by weight of the combined weight of A and B to promote curing of said composition; and

3) exposing said composition to conditions that promote curing of said composition in the presence of said catalyst, whereby curing of said composition in the presence of said cure-inhibiting component is enabled by the presence of said layer of a liquid organosilicon compound.

3. The method according to claim 1 where the polyorganosiloxane is a polydiorganosiloxane corresponding to the formula

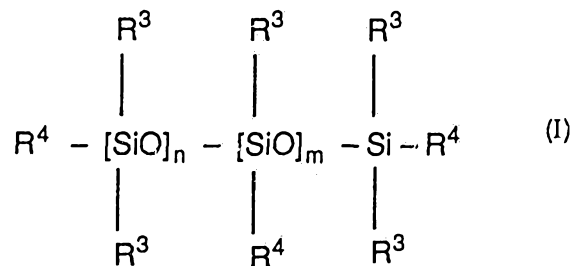


where each R^3 is individually selected from monovalent hydrocarbon radicals and monovalent halohydrocarbon radicals, R^4 represents an alkenyl radical or a hydroxyl group, m is 0 or a positive integer, the sum of m and n represents a degree of polymerization equivalent to a viscosity of at least 1000 centipoise (1 Pa·s).

5. A substrate coated with a cured organosiloxane composition, where the said substrate having on its surface at least one cure-inhibiting component, where the cured organosiloxane is prepared by the method of claim 1.

AUSTRALIA

Patents Act 1990

**ORIGINAL
COMPLETE SPECIFICATION
STANDARD PATENT**



Application Number:

Lodged:



Invention Title: METHOD FOR CURING ORGANOSILOXANE COMPOSITIONS IN THE
 PRESENCE OF CURE INHIBITING MATERIALS



The following statement is a full description of this invention, including the
best method of performing it known to us :-



METHOD FOR CURING ORGANOSILOXANE COMPOSITIONS IN THE
PRESENCE OF CURE INHIBITING MATERIALS

This invention relates to a method for curing organosiloxane compositions by a platinum group metal catalyzed hydrosilation reaction in the presence of cure-inhibiting impurities such as carboxylic acids. Our method is particularly useful for curing gels used as protective coatings for electronic components in the presence of "no-clean" solder fluxes containing carboxylic acids.

Organosiloxane materials, elastomers, resins and gels exhibit a number of physical, chemical and electrical properties that make them desirable for use as coatings, encapsulants and potting materials for electronic and electrical components.

In typical applications, curable organosiloxane compositions are applied to substrates such as printed circuit boards to which electronic components, such as transistors, integrated circuits and other solid state devices, have been attached by soldering. The organosiloxane composition is then cured by conventional procedures. In many applications, gels are more desirable than elastomeric or resinous materials based on their low modulus which allows these materials to expand in response to stresses resulting from heat-induced expansion of electronic components. If not relieved, these stresses are often sufficient to cause breakage of delicate wire bonds and other parts, resulting in malfunction of the component.

Organosiloxane compositions that cure by a hydrosilation reaction are preferred for protection of electrical and electronic circuits because they cure at relatively low temperatures and do not generate by-products during curing. The curing reaction involves alkenyl radicals such as vinyl and silicon-bonded hydrogen atoms.

One disadvantage of these compositions is the ability of silicon-bonded hydrogen atoms to react with water and organic compounds containing hydroxyl groups. These reactions reduce the number of silicon-bonded hydrogen atoms available to cure the organosiloxane composition. In particular, it has been difficult to completely cure organosiloxane compositions using a hydrosilation reaction or the reaction between silicon bonded hydrogen atoms and silanol ($\equiv\text{SiOH}$) groups in the presence of organic compounds such as alcohols and carboxylic acids.

A recent trend in the electronics industry has been to eliminate the organic solvents formerly used to remove fluxes that facilitate soldering of components to printed circuit boards. These fluxes contain relative large amounts of carboxylic acids. We have found that the acids present in the flux react with a portion of the silicon-bonded hydrogen atoms present in the curable composition, thereby reducing the amount of organohydrogensiloxane available for curing the organosiloxane composition. Because organohydrogensiloxane is distributed throughout the curable organosiloxane composition, it is difficult to estimate the amount of organohydrogensiloxane that will react with the solder flux. Adding an excess of the organohydrogensiloxane to the curable composition to compensate for the amount that will react can result in an excessive degree of crosslinking and a cured product that is too hard or brittle if not all of the excess reacts with the solder flux.

The solution achieved by this invention is to provide a method for curing organosiloxane compositions in the presence of "no-clean" solder fluxes, where the curing agent is an organohydrogensiloxane.

Our solution is attained by applying an organohydrogensiloxane containing at least two silicon-bonded hydrogen atoms per molecule as a primer over a solder flux or other material containing cure-inhibiting impurities such as carboxylic acids. When the substrate is subsequently coated with an organosiloxane composition containing an organohydrogensiloxane as the curing agent, the composition will cure uniformly without substantially affecting the extent of curing or physical properties of the cured material in the area of the solder flux. The present method is particularly applicable when the cured material is a gel that must remain relatively soft throughout its entire volume for extended periods of time.

The present method can also be used to cure organosiloxane compositions by the reaction between silicon-bonded hydrogen atoms and silicon-bonded hydroxyl groups, also referred to as silanol groups, when the substrate on which the compositions are to be cured contains a carboxylic acid.

This invention introduces a method for curing an organosiloxane composition containing an organohydrogensiloxane as the curing agent in the presence of a material comprising at least one cure inhibiting component, said method comprising the sequential steps of

- 1) applying, to at least those portions of the surface of said substrate containing said material, a layer of a liquid organosilicon compound containing at least two silicon-bonded hydrogen atoms per molecule,

- 2) applying a curable organosiloxane composition over the layer of liquid organosilicon compound, the composition comprising

A) an organosilicon compound containing an average of at least two alkenyl radicals or silanol groups per molecule;

B) an amount of an organohydrogensiloxane sufficient to cure said composition, where said organohydrogen-siloxane contains an average of at least two silicon-bonded hydrogen atoms per molecule, with the proviso that the sum of the average number of alkenyl radicals or silanol groups per molecule present in said polyorganosiloxane and the average number of silicon-bonded hydrogen atoms per molecule in said organohydrogensiloxane is greater than 4; and

C) an amount of a catalyst sufficient to promote curing of said composition, where said catalyst is a platinum group metal or a compound of said metal; and

3) exposing said composition to conditions that promote curing of said composition in the presence of said catalyst.

The novelty of our method resides in applying a layer of a liquid organosilicon compound containing at least two silicon-bonded hydrogen atoms per molecule over a material containing a carboxylic acid, such as a self-cleaning solder flux, prior to coating the substrate containing the material with a curable organosiloxane composition containing an organohydrogensiloxane as the curing agent.

Any organosilicon compound containing at least two, preferably at least three, silicon-bonded hydrogen atoms per molecule can be applied over the acid-containing material as a primer in accordance with the present method. Suitable organosilicon compounds include silanes and

organohydrogensiloxanes. When the organosilicon compound is an organohydrogensiloxane it can be linear or cyclic.

While not willing to be bound to this theory, it is believed that at least a portion of the silicon-bonded hydrogen atoms in the organosilicon compound used as the primer reacts with the carboxylic acid or other cure-inhibiting impurity on the substrate and a portion reacts with the alkenyl radicals or silanol groups of the polyorganosiloxane ingredient of the curable composition that is subsequently applied over the primer layer. The primer layer thus becomes part of the final crosslinked polymer network. Organohydrogensilanes and organohydrogensiloxanes containing only one silicon-bonded hydrogen atom per molecule are not capable of reacting in this manner.

The organosilicon compound used as our primer is ^{preferably} a liquid at 25°C. and can have a linear or branched structure. When this organosilicon compound is a silane it is represented by the formula $H_x R^{1(4-x)} Si$. When the compound is a siloxane, the siloxane units include $HR^{1_2} SiO_{1/2}$, $HR^{1_2} SiO$, $HSiO_{3/2}$ and, optionally, $R^{2_3} SiO_{1/2}$, $R^{2_2} SiO$ and $R^{2_3} SiO_{3/2}$. R^1 and R^2 represent monovalent hydrocarbon radicals that can be substituted or unsubstituted and x is ^{preferably} 2 or 3.

When more than one R^1 and/or R^2 are present in a single compound, the hydrocarbon radicals ^{preferably} can be identical or different. These hydrocarbon radicals ^{preferably} can contain from one up to ten or more carbon atoms, and include alkyl, such as methyl and ethyl; cycloalkyl such as cyclohexyl; aryl such as phenyl and naphthyl; alkaryl such as tolyl and aralkyl such as benzyl. Preferred hydrocarbon radicals are methyl, ethyl, phenyl and 3,3,3-trifluoropropyl.



Preferred organohydrogensiloxanes for use as primers in our method include polyorganohydrogensiloxanes, organohydrogensiloxane/diorganosiloxane copolymers and diorganohydrogensiloxane-terminated polydiorganosiloxanes, where the organic groups are one or more of the aforementioned hydrocarbon radicals.

The viscosity of the organohydrogensiloxane primer is limited only by the ability to apply the compound using conventional coating techniques, which include brushing, dipping and spraying. Viscosities of from 0.001 to 10 Pa·s are suitable.

Because the organosilicon compound used as the primer is a liquid, the compound can be applied over the acid containing material without the necessity of diluting it with miscible solvents such as liquid hydrocarbons or polydiorganosiloxanes free of any groups capable of reacting with the curable composition that is subsequently applied over the primer layer. The use of such solvents and diluents may be desirable for certain applications, for example to promote wetting of the substrate. Liquid triorganosiloxane terminated polydimethylsiloxanes are particularly suitable diluents.


In the present method, a priming layer of the organosilicon compound, containing silicon-bonded hydrogen atoms, is applied over the cure-inhibiting material, such as one of the commercially available "no-clean" solder fluxes, which is present on the substrate to be coated with the curable organosiloxane composition. The primer can be applied using any suitable technique, including brushing, dipping and spraying. For small areas, the primer can be applied dropwise on to the substrate from a suitable dispenser and allowed to flow out as a continuous

layer over the surface of the substrate. The primer layer should be as thin as possible, typically 0.001 inch (0.025 mm) or less.

The polyorganosiloxane, ingredient A, of our curable compositions which are applied over the primer layer must contain at least two silicon-bonded alkenyl radicals or silanol groups in each molecule. The alkenyl radicals ^{preferably} contain from 1 to 10 carbon atoms and are exemplified by vinyl, allyl and 5-hexenyl. The silicon-bonded organic groups ^(but not limited to) other than alkenyl radicals present in ingredient A are typically monovalent hydrocarbon and halogenated hydrocarbon radicals exemplified by alkyl radicals such as methyl, ethyl and propyl; aryl radicals such as phenyl; and halogenated alkyl radicals such as 3,3,3-trifluoropropyl.

The molecular structure of ingredient A is typically linear, however there can be some branching due to the presence of trivalent siloxane units within the molecule. The molecular weight of this ingredient should be sufficient to achieve a viscosity at 25°C. greater than 0.1 Pa·s. The upper limit for the molecular weight of ingredient A is not specifically restricted, and is typically limited only by the processability of the curable organosiloxane composition. The polyorganosiloxanes range from pourable liquids to gum type polymers that are typically characterized by Williams plasticity values.

Preferred embodiments of ingredient A are polydiorganosiloxanes represented by the general formula I

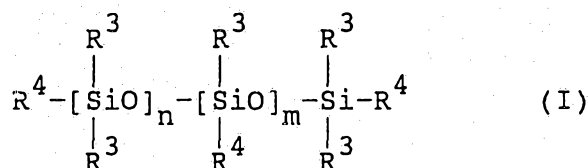

where each R^3 is individually selected from monovalent hydrocarbon radicals and monovalent halohydrocarbon radicals, R^4 represents a vinyl or other alkenyl radical or a hydroxyl group, m is 0 or a positive integer and the sum of m and n represents a degree of polymerization equivalent to a viscosity of at least 400 centipoise (0.4 Pa.s).

The two R^3 substituents on each of the silicon atoms in formula I can be identical or different, and can preferably contain from 1 to 20 carbon atoms. A range of from 1 to 10 carbon atoms is more preferred, based on the availability of the corresponding monomers. Most preferably, at least one of the hydrocarbon radicals on each silicon atom is methyl, and any remainder are vinyl, phenyl and/or 3,3,3-trifluoropropyl. This preference is based on the availability of the reactants typically used to prepare the polydiorganosiloxane and the properties of cured elastomers prepared from these polydiorganosiloxanes. For the same reasons, R^4 is preferably vinyl or 5-hexenyl.

Representative embodiments of ingredient A, containing ethylenically unsaturated hydrocarbon radicals only at the terminal positions, include dimethylvinylsiloxy-terminated polydimethylsiloxanes, dimethylvinylsiloxy-terminated polymethyl-3,3,3-trifluoropropylsiloxanes, dimethylvinylsiloxy-terminated-dimethylsiloxane/3,3,3-trifluoropropylmethylsiloxane copolymers and dimethylvinylsiloxy-terminated-dimethylsiloxane/methylphenylsiloxane copolymers.

Methods for preparing ingredient A of the present invention are by hydrolysis and condensation of the corresponding halosilanes or by condensation of the cyclic polydiorganosiloxanes. These procedures are sufficiently



disclosed in the patent and other literature such that a detailed description in this specification is not necessary.

The curable organosiloxane compositions contain at least one organohydrogensiloxane that functions as a crosslinker for ingredient A. In the presence of a hydrosilation catalyst, referred to herein as ingredient C, the silicon-bonded hydrogen atoms in ingredient B undergo an addition reaction, also referred to as hydrosilation, with the silicon-bonded alkenyl groups or silanol groups in ingredient A. The final result is crosslinking and curing of the composition.

Ingredient B must contain at least 2 silicon-bonded hydrogen atoms in each molecule. If ingredient A contains only two alkenyl radicals or silanol groups per molecule, ingredient B must contain an average of more than two silicon-bonded hydrogen atoms to achieve a crosslinked structure in the final cured product. The silicon-bonded organic groups present in ingredient B are selected from the same group of monovalent hydrocarbon and halogenated hydrocarbon radicals as the organic groups of ingredient A. This is subject to the proviso that the organic groups in ingredient B must be substantially free of ethylenic or acetylenic unsaturation. The molecular structure of ingredient B can be straight chain, branch-containing straight chain, cyclic, or network.

Ingredient B is selected from the same class of organohydrogensiloxanes as the compound using as a primer in accordance with our method.

While the molecular weight of ingredient B is not specifically restricted, viscosities in the range of 3 to 10,000 centipoise (0.003 to 10 Pa·s) at 25°C. are preferred.

The concentration of ingredient B is sufficient to provide a molar ratio of silicon-bonded hydrogen atoms to alkenyl radicals or silanol groups in the curable composition of from 0.3 to 20. A range of from 0.4 to 2 is preferred. When the cured product is a gel that cures by a platinum group metal catalyzed hydrosilation reaction, the curable composition contains a stoichiometric excess of alkenyl radicals or silicon-bonded hydrogen atoms. The unreacted ingredient provides the desired degree of hardness in the cured gel.

When the curable composition contains less than about 0.3 mole of silicon-bonded hydrogen atoms per mole of alkenyl radicals or silanol groups, the composition cannot be satisfactorily cured. Bubble formation resulting from the generation of hydrogen gas can occur when the composition contains more than about 20 silicon-bonded hydrogen atoms per alkenyl radical or silanol group.

Curing of the present compositions is catalyzed by a metal from the platinum group of the periodic table or a compound of such a metal. These metals include platinum, palladium and rhodium. Platinum and platinum compounds are preferred based on the high activity level of these catalysts in hydrosilation reactions.

Examples of preferred curing catalysts include platinum black, platinum metal on various solid supports, chloroplatinic acid, alcohol solutions of chloroplatinic acid, and complexes of chloroplatinic acid with liquid ethylenically unsaturated compounds, such as olefins, and organosiloxanes containing ethylenically unsaturated

hydrocarbon radicals bonded to silicon. Complexes of chloroplatinic acid with the aforementioned organosiloxanes containing ethylenically unsaturated hydrocarbon radicals are described in US-A 3,419,593. The relevant portions of that patent teach the preferred catalysts of this invention.

The concentration of ingredient C is preferably equivalent to a platinum concentration of from 0.1 to 500 parts by weight of platinum metal, more preferably from 1 to 50 parts by weight of platinum metal, per million parts (ppm), based on the combined weight of ingredients A and B.

Curing does not proceed satisfactorily at below 0.1 ppm of platinum, while using more than 500 ppm results in no appreciable increase in cure rate, and is therefore uneconomical.

Mixtures of the aforementioned ingredients A, B and C may begin to cure at ambient temperature. To obtain a longer working time or "pot life", the activity of the catalyst under ambient conditions can be retarded or suppressed by addition of a suitable inhibitor.

Known platinum catalyst inhibitors include the acetylenic compounds disclosed in US-A 3,445,420. Acetylenic alcohols, such as 2-methyl-3-butyn-2-ol, constitute a preferred class of inhibitors that will suppress the activity of a platinum-containing catalyst at 25°C. Compositions containing these catalysts typically require heating at temperatures of 70°C. and above to cure at a practical rate.

Amines will impart long-term storage stability to the present compositions relative to acetylenic compounds. Polyfunctional amines such as the N,N,N',N'-tetraalkyl-diamines are preferred for this purpose.

Another class of catalyst inhibitors are alkenyl substituted siloxanes of the type described in US-A 3,989,667. Cyclic methylvinylsiloxanes are preferred from this class.

Inhibitor concentrations as low as one mole of inhibitor per mole of platinum will in some instances impart satisfactory storage stability and cure rate. In other instances, inhibitor concentrations of 500 or more moles of inhibitor per mole of platinum are required. The optimum concentration for a given inhibitor in a given composition can readily be determined by routine experimentation and does not constitute part of this invention.

Some compositions may begin to cure under ambient conditions even when an inhibitor is present. One way to ensure storage stability is to package the ingredients of the curable composition in two or more containers, with the hydrosilation catalyst and the organohydrogensiloxane in separate containers. The contents of the containers are combined when it is desired to cure the composition.

One-part organosiloxane compositions having excellent long-term storage stability at temperatures of 50°C. or higher can be prepared by first microencapsulating the platinum-containing hydrosilation catalyst in a thermoplastic or thermosetting polymer. Curable organosiloxane compositions containing microencapsulated hydrosilation catalysts are described in US-A 4,766,176 and US-A 5,017,654. Suitable encapsulants include organosilicon resins and organic resins derived from ethylenically

unsaturated hydrocarbons and/or esters of ethylenically unsaturated carboxylic acids such as acrylic and methacrylic acids.

When it is desired to achieve high levels of tear strength and other physical properties in the cured elastomers of this invention, it may be desirable to include a reinforcing filler such as finely divided silica. Silica and other reinforcing fillers are often treated with one of more of the known filler treating agents to prevent a phenomenon referred to as "creping" or "crepe hardening" during processing of the curable composition.

Finely divided forms of silica are our preferred reinforcing fillers. Colloidal silicas are particularly preferred because of their relatively high surface area, which is typically at least 50 square meters per gram. Fillers having surface areas of at least 300 square meters per gram are more preferred for use in the present method. Colloidal silicas can be of the precipitated or a fume type. Both types of silica are commercially available.

The amount of finely divided silica or other reinforcing filler used in the present compositions is at least in part determined by the physical properties desired in the cured elastomer. Liquid or pumpable polyorganosiloxane compositions typically contain from 10 to 60 percent by weight of silica, based on the weight of polydiorganosiloxane. This value is preferably from 30 to 50 percent.

The filler treating agent can be any of the low molecular weight organosilicon compounds disclosed in the art as being suitable for preventing creping of organosiloxane compositions during processing. The treating agents are typically liquid hydroxyl terminated

polydiorganosiloxanes containing an average of from 2 to 20 repeating units per molecule and organosilicon compounds, such as hexaorganodisiloxanes and hexaorganodisilazanes, that hydrolyze under the conditions used to treat the filler to form compounds with silicon-bonded hydroxyl groups. Preferably at least a portion of the silicon bonded hydrocarbon radicals present on the treating agent are identical to a majority of the hydrocarbon radicals present in ingredients A and B. A small amount of water can be added together with the silica treating agent(s) as a processing aid.

It is believed that the treating agents function by reacting with silicon-bonded hydroxyl groups present on the surface of the silica or other filler particles to reduce interaction between these particles.

When a silica filler is used, it is preferably treated in the presence of at least a portion of the other ingredients of the present compositions by blending these ingredients together until the filler is completely treated and uniformly dispersed to form a homogeneous material.

The ingredients that are present during treatment of the filler typically include the silica treating agents and at least a portion of the polydiorganosiloxane(s) referred to herein as ingredient A.

The present organosiloxane compositions can contain one or more additives that are conventionally present in curable compositions of this type to impart or enhance certain physical properties of the cured composition, such as adhesion, heat stability and flame retardancy, or to facilitate processing of the curable composition.

Typical additives include non-reinforcing fillers, such as quartz, hydrated alumina, mica and calcium carbonate; pigments such as carbon black and titanium dioxide; dyes; flame retardants and heat and/or ultraviolet light stabilizers. Resinous organosiloxane copolymers can be used in place of or in combination with one or more reinforcing fillers to improve the physical properties of the cured organosiloxane composition.

A preferred type of resinous copolymer contains repeating units of the general formula $\text{SiO}_{4/2}$ in addition to triorganosiloxyl units of the general formula $\text{R}^{10}_3\text{SiO}_{1/2}$ and diorganovinylsiloxyl units of the general formula $\text{CH}_2=\text{CH}(\text{R}^{11})_2\text{SiO}_{1/2}$. In these formulae R^{10} and R^{11} are individually monovalent hydrocarbon or substituted monovalent hydrocarbon radicals as previously defined for the R^8 radicals of ingredient A.

The molar ratio of the combination of triorganosiloxyl units and diorganovinylsiloxyl units to $\text{SiO}_{4/2}$ units in the resinous copolymer is from 0.7 to 1.2, inclusive. The vinyl-containing units constitute from 2 to 8 percent by weight of the copolymer, which preferably contains at least two vinyl radicals per molecule. In preferred embodiments of the copolymer the ranges for the molar ratio of diorganovinylsiloxyl: triorganosiloxyl: $\text{SiO}_{4/2}$ units is 0.08-0.1 : 0.06-1 : 1.

The resinous copolymers can be prepared as described in US-A 2,676,182. The copolymers described therein contain from 2 to 23 percent by weight of hydroxyl groups, which is considerably above the maximum level of 0.8 weight percent preferred for precursors of the present copolymers. The hydroxyl content of the precursor can be

conveniently reduced to the desired level by employing a higher concentration of triorganosiloxy units than the concentration range taught by that document.

Briefly, the method of US-A 2,676,182 comprises reacting a silica hydrosol under acidic conditions with the appropriate amount of hexamethyldisiloxane or trimethylchlorosilane. The resinous copolymers used to prepare the present elastomers can be obtained by reacting those products with the required amount of a hexaorganodisilazane or a hexaorganodisiloxane wherein each silicon atom contains a vinyl radical and two methyl or other hydrocarbon radicals represented by R^1 and R^2 in the above formulae.

The compositions of this invention can be prepared by combining all of ingredients at ambient temperature. Any of the mixing techniques and devices described in the prior art can be used for this purpose. The particular device used will be determined by the viscosity of the ingredients and the final curable composition. Suitable mixers include paddle type mixers, kneader type mixers and two- and three-roll rubber mills,

Cooling of the ingredients during mixing may be desirable to avoid premature curing of the composition.

To maximize storage stability, the curable compositions are preferably kept in closed containers until used. If greater storage stability is desired, the compositions can be packaged in two or more containers with the organohydrogensiloxane (ingredient B) and the platinum group metal catalyst in separate containers.

Depending upon the types and concentrations of ingredients A and B, cured organosiloxane materials can vary in properties from brittle resins to elastomers to gels. In the present method, our curable composition is applied over

a layer of organohydrogensiloxane covering the solder flux or other acid-containing material.

These organosiloxane compositions are applied over a layer of organohydrogensiloxane as a coating or as an uncured molded or extruded article. Unfilled organosiloxane compositions are particularly useful as gels, adhesives, protective coatings, encapsulants and potting compositions. They protect delicate electronic devices, such as transistors and integrated circuits, from damage by moisture and other materials present in the environment that can adversely affect operation of the device. The compositions can be used to coat either the individual devices or a circuit board containing a number of these devices to form an electronic component.

The curable compositions can be applied to substrates by pouring, spraying, dipping, extrusion or by the use of a brush, roller or coating bar. The selection of a particular application method will be determined at least in part by the viscosity of the curable composition. The viscosity of the composition can be reduced using suitable solvents or reactive diluents known in the art.

Curing of the present compositions commences when ingredients A, B and C are combined. Preferred compositions cure over a period of several hours under ambient conditions. As is true for other compositions that cure by a platinum-catalyzed hydrosilation reaction, curing can be accelerated by heating. Curing temperatures of from 25 to 80°C. are preferred.

The following example describes preferred embodiments of the present method and compositions useful in accordance with this method. Unless otherwise specified all

parts and percentages in the example are by weight and viscosities were measured at 25°C.

Example 1

This example demonstrates the effect of placing a layer of an organohydrogensiloxane between a "no-clean" solder paste containing a carboxylic acid and an organosiloxane composition that is curable by a platinum catalyzed hydrosilation reaction.

The curable organosiloxane composition was prepared by blending the following ingredients to homogeneity:

98.5 parts of a dimethylvinylsiloxyl-terminated polydimethylsiloxane having a viscosity of 0.4 Pa·s at 25°C.;

1.1 parts of a trimethylsiloxyl-terminated polydiorganosiloxane having an average of five methylhydrogen-siloxane units and three dimethylsiloxane units per molecule with a silicon-bonded hydrogen atom content of 0.8 weight percent;

0.3 part of a liquid dimethylhydrogensiloxyl-terminated polydimethylsiloxane containing 0.16 weight percent of silicon-bonded hydrogen atom;

0.15 part of a reaction product of hexachloroplatinic acid and sym-tetramethyldivinylsiloxane that had been diluted with a liquid dimethylvinylsiloxyl terminated polydimethylsiloxane in an amount sufficient to achieve a platinum content of 0.7 weight percent; and

0.01 part of 2-phenyl-3-butyn-2-ol and 0.001 part of N,N,N',N'-tetramethylethylenediamine as platinum catalyst inhibitors.

Coatings of two different acid-containing solder pastes, referred to hereinafter as X and Y, available as

7
no
allow

types RMA390-HRFM6 and RMA390-DH4 from Alpha Metals were applied over about one quarter of one surface of two types of substrates. Typical solder pastes contain about 90 weight percent of solder, 6 weight percent of rosin, 2 weight percent of a glycol ether type solvent, 1 percent of a thickener and 1 weight percent of a carboxylic acid and other modifiers. Flux X contained a lower concentration of low molecular weight carboxylic acids than flux Y.

One substrate (A) was a planar sintered aluminum oxide sheet measuring 9 by 4 cm that had a printed electrical circuit on one surface. The second substrate (B) was a epoxy/fiberglass type of printed circuit board identified as an "FR-4 Board". All of the samples were then heated at 225°C for 2.5 minutes to cause flowing of the solder, and allowed to cool to ambient temperature.

A layer of one of three liquid polydiorgano-siloxanes containing silicon-bonded hydrogen atoms was then applied as a primer over the entire surface containing the solder flux by applying several drops of the polydiorgano-siloxane onto the surface and allowing the drops to flow and coalesce into a continuous coating. The thickness of the coating was 0.0013 mm.

For comparative purposes, one sample of each type of substrate was not coated with primer prior to application of the curable composition. The curable composition was in the form of a liquid that was poured over the primer layer and over the solder flux on the comparative samples. The compositions was cured by heating the coated test samples for 30 minutes at 120°C.

The three organohydrogensiloxanes evaluated as primers were:

I = a liquid trimethylsiloxy-terminated polymethylhydrogensiloxane containing an average of 37 repeating units per molecule and 1.6 percent of silicon-bonded hydrogen;

II = a trimethylsiloxy-terminated polydiorganosiloxane containing an average of five methylhydrogensiloxane units and three dimethylsiloxane units per molecule and 0.8 percent of silicon-bonded hydrogen; and

III = a liquid dimethylhydrogensiloxy-terminated polydimethylsiloxane containing an average of 20 repeating units per molecule and 0.16 weight percent of silicon-bonded hydrogen.

The extent of curing of the compositions in the area over and immediately adjacent to the solder flux was evaluated and rated in accordance with the following scale:

1 = complete cure with adhesion over 100 percent of surface, no uncured or partially cured material present.

2 = complete cure with adhesion over greater than 90 percent of the surface, partial curing on remainder.

3 = complete cure with adhesion over 60 to 90 percent of surface, partial curing on remainder.

4 = less than 60% of composition cured, cured material not adhered to substrate.

The results of the evaluation are recorded in the following table:

Flux	Primer	Cure Rating	
		Substrate A	Substrate B
X	I	1	1
X	II	1	1
X	III	2	1
X	None*	2	2
Y	I	2	3
Y	II	1	1
Y	III	3	3
Y	None*	4	3

* = Comparative Example

The data in this table demonstrate the improved curing that occurs using a primer containing at least two silicon-bonded hydrogen atoms per molecule according to our method.

THE CLAIMS DEFINING THE INVENTION ARE AS FOLLOWS:

1. A method for curing an organosiloxane composition containing an organohydrogensiloxane as the curing agent when said composition is in contact with a substrate having on its surface a material comprising at least one cure-inhibiting component, said method comprising the sequential steps of


1) applying a layer of a liquid organosilicon compound containing at least two silicon-bonded hydrogen atoms per molecule to at least those portions of said substrate containing said cure-inhibiting component,

2) applying a curable organosiloxane composition over said layer of liquid organosilicon compound, the composition comprising

A) a polyorganosiloxane containing an average of at least two alkenyl radicals or silanol groups per molecule and exhibiting a viscosity greater than 0.1 Pa·s;

B) an amount of a liquid organohydrogensiloxane sufficient to cure said composition, where said organohydrogensiloxane contains an average of at least two silicon-bonded hydrogen atoms per molecule, with the proviso that the sum of the average number of alkenyl radicals or silanol groups per molecule present in said polyorganosiloxane together with the average number of silicon-bonded hydrogen atoms per molecule in said organohydrogensiloxane is greater than 4, and the molar ratio of silicon-bonded hydrogen atom in said organohydrogensiloxane to alkenyl radicals or silanol groups in said polyorganosiloxane is from 0.3 to 20 and with the proviso that the organic groups present in the organohydrogensiloxane are substantially free of ethylenic or acetylenic unsaturation; and


C) an amount of a catalyst sufficient to provide a platinum group metal concentration of from 0.1 to 500 parts by weight of platinum group metal, or a compound of said metal, per one million parts by weight of the combined weight of A and B to promote curing of said composition; and



3) exposing said composition to conditions that promote curing of said composition in the presence of said catalyst, whereby curing of said composition in the presence of said cure-inhibiting component is enabled by the presence of said layer of a liquid organosilicon compound.

2. The method according to claim 1 where said cure inhibiting component is a solder paste and said organosilicon compound is a polyorgano-hydrogensiloxane containing at least 3 silicon-bonded hydrogen atoms per molecule.

3. The method according to claim 1 where the polyorganosiloxane is a polydiorganosiloxane corresponding to the formula

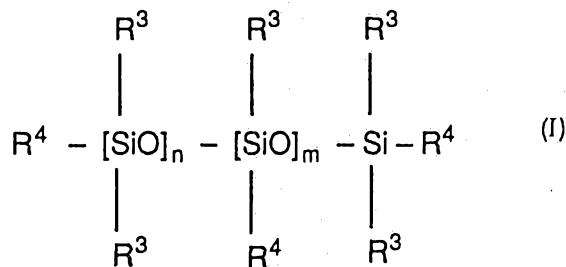

where each R^3 is individually selected from monovalent hydrocarbon radicals and monovalent halohydrocarbon radicals, R^4 represents an alkenyl radical or a hydroxyl group, m is 0 or a positive integer, the sum of m and n represents a degree of polymerization equivalent to a viscosity of at least 1000 centipoise (1 Pa·s).

4. The method according to claim 3 where R^3 is alkyl or haloalkyl radical containing from 1 to 10 carbon atoms or phenyl, R^4 is vinyl or 5-hexenyl and said organosiloxane composition cures to form a gel.



5. A substrate coated with a cured organosiloxane composition, where the said substrate having on its surface at least one cure-inhibiting component, where the cured organosiloxane is prepared by the method of claim 1.

DATED this 31st day of January, 1997.

DOW CORNING CORPORATION

WATERMARK PATENT & TRADEMARK ATTORNEYS
290 BURWOOD ROAD
HAWTHORN VICTORIA 3122
AUSTRALIA

IAS/JGC/ML[JL] DOC 10 AU6737994.WPC

2
3
4
5

6
7
8

9



METHOD FOR CURING ORGANOSILOXANE COMPOSITIONS IN THE
PRESENCE OF CURE INHIBITING MATERIALS

ABSTRACT

The inability of organosiloxane compositions containing an organohydrogensiloxane as the curing agent and a platinum group metal-containing catalyst to cure completely on substrates containing residues of solder fluxes or other cure-inhibiting materials is remedied by coating at least that portion of the substrate containing the residue with a layer of an organosilicon compound containing at least two silicon-bonded hydrogen atoms per molecule prior to application of the curable organosiloxane composition.