



(86) Date de dépôt PCT/PCT Filing Date: 2006/07/07
(87) Date publication PCT/PCT Publication Date: 2007/03/01
(45) Date de délivrance/Issue Date: 2013/09/24
(85) Entrée phase nationale/National Entry: 2008/02/13
(86) N° demande PCT/PCT Application No.: CA 2006/001105
(87) N° publication PCT/PCT Publication No.: 2007/022614
(30) Priorité/Priority: 2005/08/22 (US11/161,914)


(51) Cl.Int./Int.Cl. *F02M 21/02* (2006.01),
F16K 31/40 (2006.01)

(72) Inventeurs/Inventors:
WANG, WEI-CHING, CA;
WANG, CHIA-PING, CA;
WANG, YU-CHING, CA

(73) Propriétaires/Owners:
WANG, WEI-CHING, CA;
WANG, YU-CHING, CA;
WANG, CHIA-PING, CA

(74) Agent: RIDOUT & MAYBEE LLP

(54) Titre : ELECTROVANNE D'ISOLATION
(54) Title: SOLENOID ISOLATION VALVE

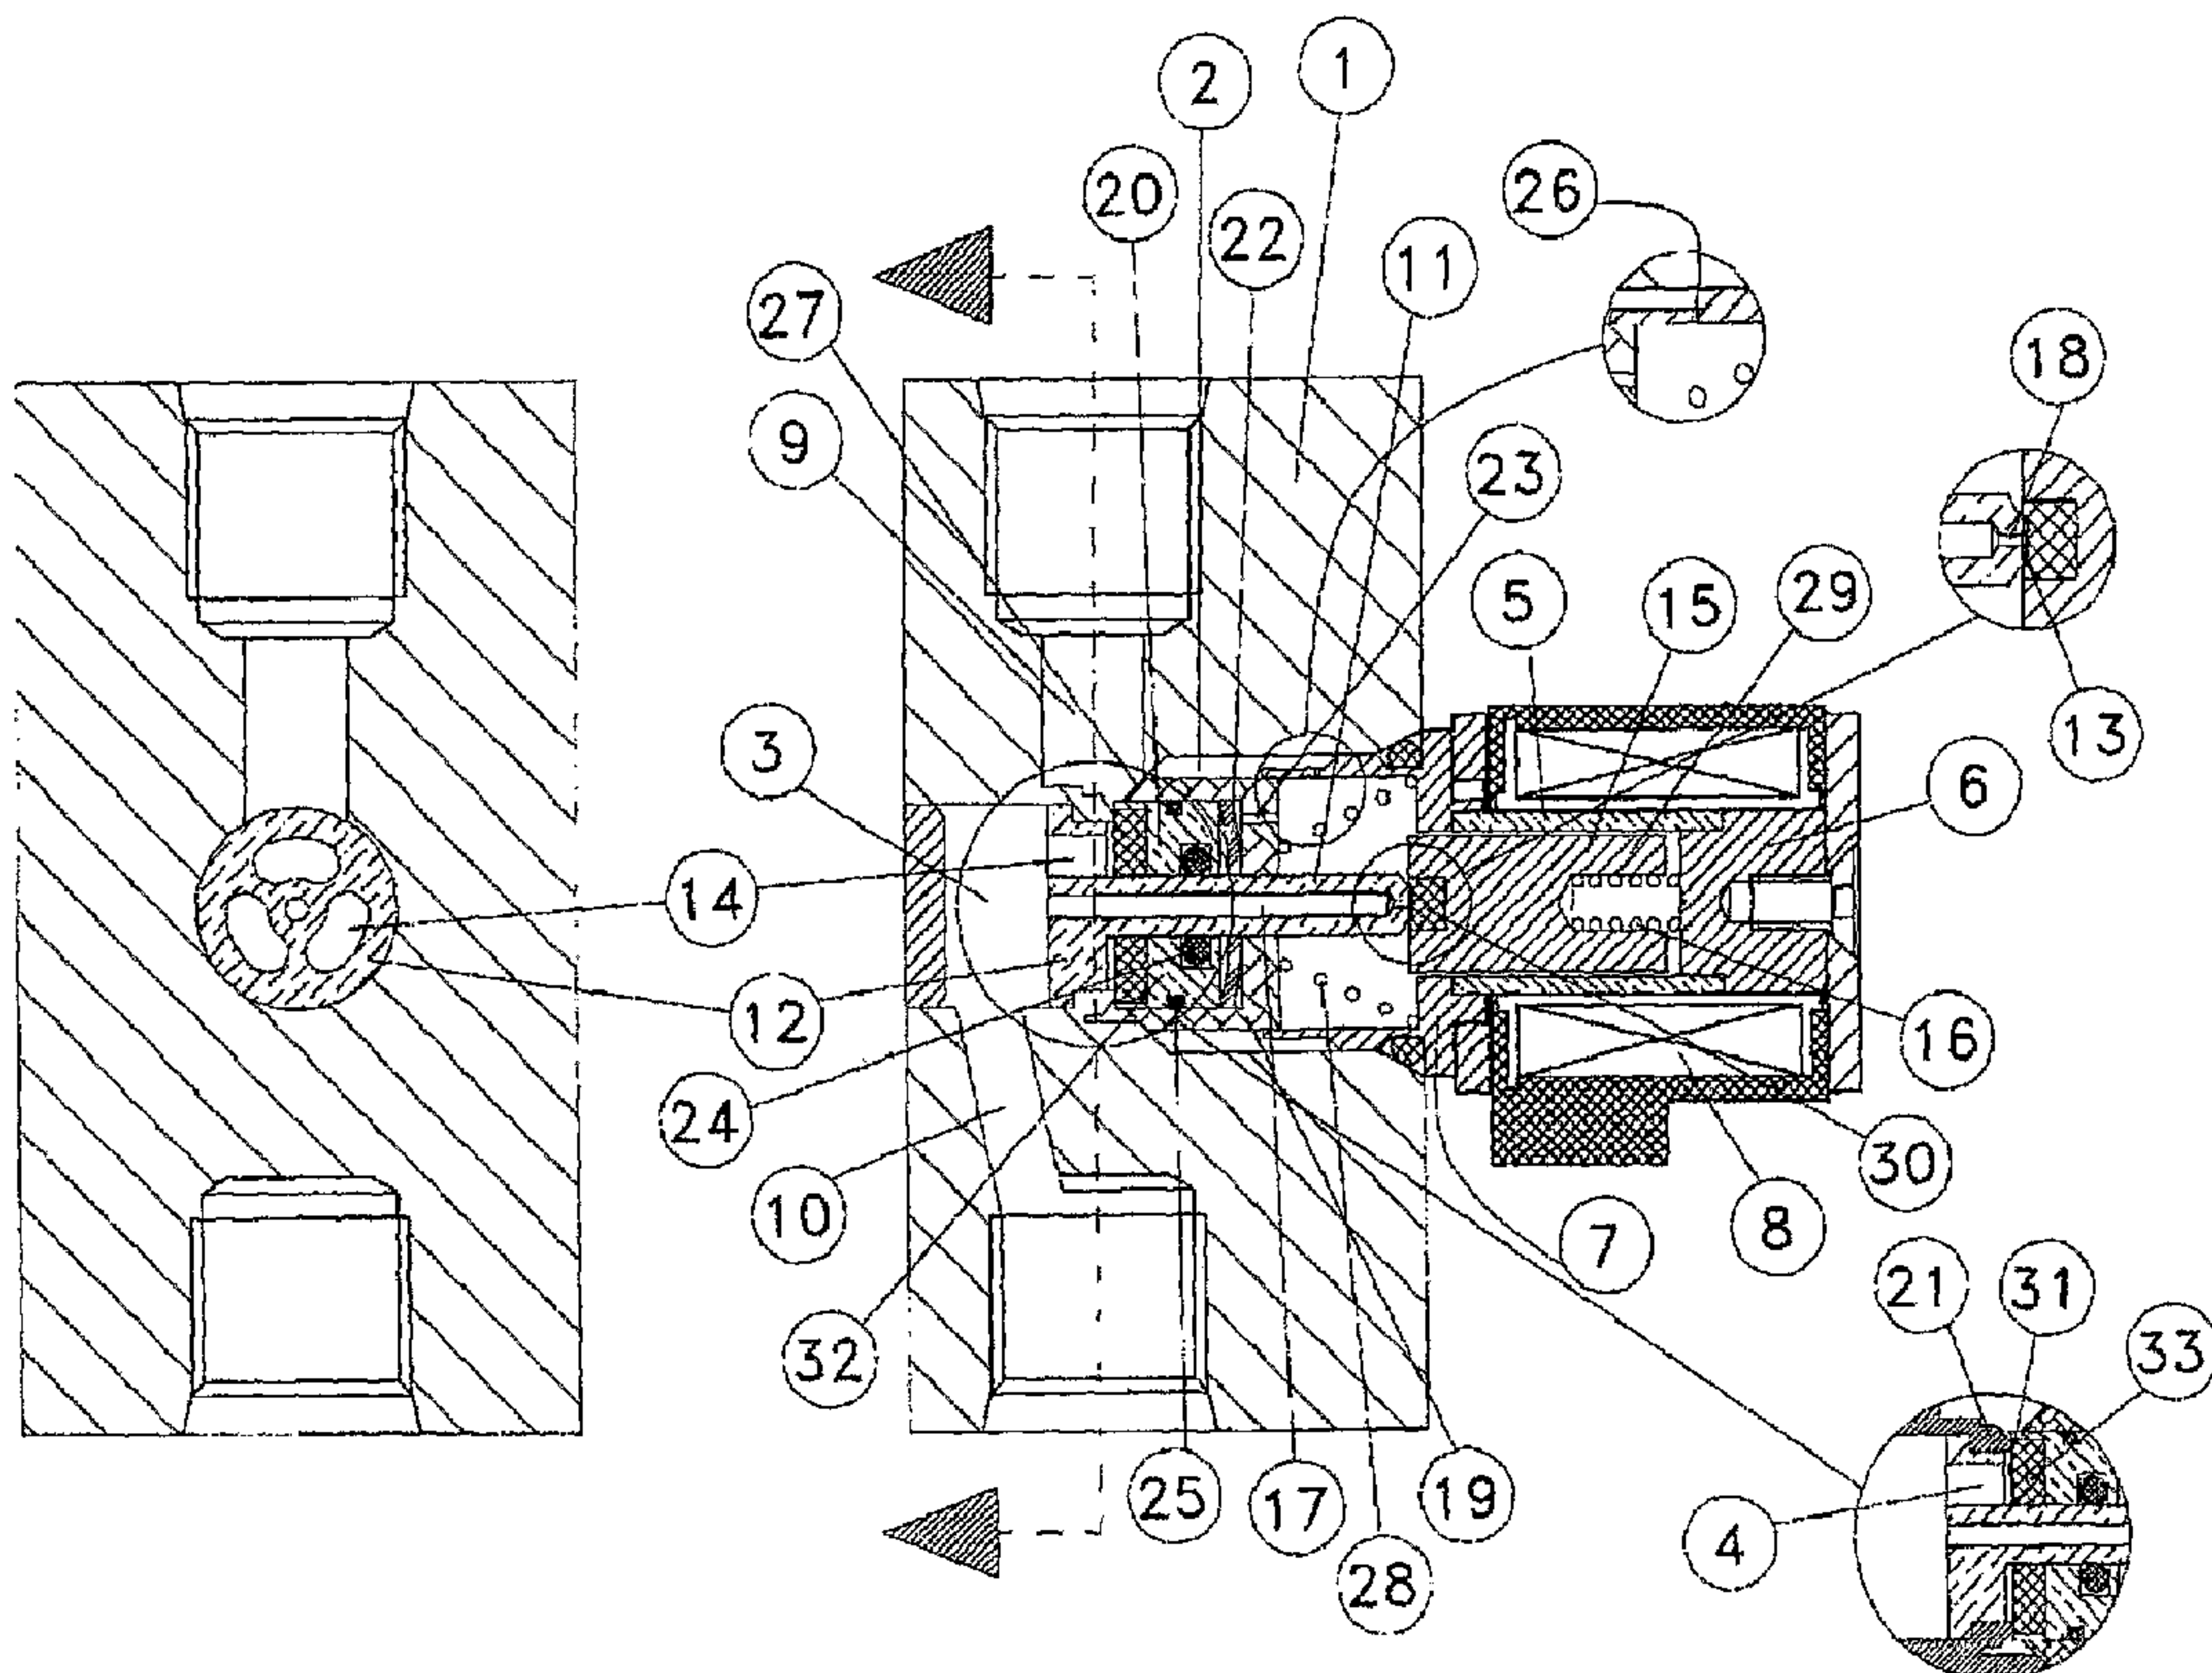

(57) Abrégé/Abstract:

The valve has a fluid passage which avoids the need for drilling a hole in the primary piston. A primary piston assembly has a movable seat having a circumferential surface matching the valve body chamber to restrict fluid and produce a pressure difference



(57) **Abrégé(suite)/Abstract(continued):**

to induce the valve to open when the solenoid is energized initially. A channel hole in a flange of the sleeve assembly supplies gas into the chambers of the back side of the primary piston assembly. The diameter of the channel hole is not critical; as long as the size of the hole is smaller than that of the bleed hole, it can maintain pressure difference between the front side and back side of primary piston during valve opening operation. Since the pilot piston and the primary piston assembly operate independently, the travel stroke of the primary piston assembly is unconstrained by the input electrical power.

ABSTRACT

The valve has a fluid passage which avoids the need for drilling a hole in the primary piston. A primary piston assembly has a movable seal having a circumferential surface matching the valve body chamber to restrict fluid and produce a pressure difference to induce the valve to open when the solenoid is energized initially. A channel hole in a flange of the sleeve assembly supplies gas into the chambers of the back side of the primary piston assembly. The diameter of the channel hole is not critical; as long as the size of the hole is smaller than that of the bleed hole, it can maintain pressure difference between the front side and back side of primary piston during valve opening operation. Since the pilot piston and the primary piston assembly operate independently, the travel stroke of the primary piston assembly is unconstrained by the input electrical power.

PCT/CA 2006/001105

INVENTION TITLE

21 JUNE 2007 21-06-07

Solenoid isolation valve

DESCRIPTION**FIELD OF THE INVENTION**

[Para 1] The primary application field of the invention relates to fuel systems for compressed natural gas (CNG) vehicles or the like. It may be use for other applications, such as high pressure gas filling station.

BACKGROUND OF THE INVENTION

[Para 2] When compressed natural gas or compressed hydrogen gas is stored in cylinders at pressure as high as 6,000 psig, an electrical solenoid is used to control fuel flow to quickly start and stop the fueling process. There exist some problems in the current electrically operated pilot-type, "instant-on" solenoid valves, especially during the opening and closing stage of the valve. In the prior arts US patent #5,762,087 and #6,540,204, a ring segregates the primary piston to form a front side and a back side, where the front side is in the direction of the outlet. When the solenoid is energized, a pressure difference is created between the front side and the back side and it overcomes the biasing elements to open the solenoid valve. During the opening process, a small ratio of the amount of gas of inlet to outlet of the back side of the primary piston is desired, because it helps to open the valve. However, in this case, such ratio is rather critical and it can not be easily determined. During the valve close procedure, as the pilot piston is trying to adjust itself to a seal position, the amount of gas leaking from the back side of the primary piston to the outlet of the valve may be higher than that of supplying from the front side. Hence, the pressure won't be able to build up in the back side. Under this circumstance, because the spring

AMENDED SHEET

PCT/CA 2006/001105

21 JUNE 2007 21-06-07

force can not overcome the pressure difference between the back side and the front side of the primary piston, the valve might not close eventually.

[Para 3] In this invention, two matching surfaces between the primary piston assembly and valve body chamber is designed in such a way that the gas flow is restrained from the front side to back side of the primary piston assembly to create a pressure difference when the solenoid energizes, so that the valve open instantly. A channel hole is introduced to maintain the pressure difference between the front side and the back side of the primary piston assembly while when the valve opens. Unlike the prior arts, during the closing process and when the pilot piston adjusts itself to a seal position, the amount of gas entering the back side of the primary piston assembly is faster than the amount of gas leaking and that since a certain pressure difference is maintained, the valve can be closed quickly. In either case, the ratio of the amount of gas is not critical.

[Para 4] Another feature disclosed in the present invention is that an axial center column mounting in the housing of the valve provides a bleed hole seat and an axial passage being in communication fluid with the outlet chamber. The magnetic field generated by the permissible electrical power of the solenoid will determine the maximum travel stroke of the pilot piston. In this invention, since the pilot piston does not sit on the primary piston assembly, the stroke of the primary piston is not limited under such permissible condition.

SUMMARY OF THE INVENTION

[Para 5] Accordingly, it is an object of the present invention to provide a solenoid isolation valve of the above mentioned general type which avoids the disadvantages of the prior art.

[Para 6] It is also an object of the present invention to provide a solenoid isolation valve that will virtually open instantaneously, by introducing two special matching and contacting

PCT/CA2006/00105
2.1 JUNE 2007 21-06-07

surfaces on the movable seal piston and the primary piston chamber to restrain gas flow communicating with gas inlet when the pilot piston starts to open.

[Para 7] It is also an object of the present invention to avoid the difficulty in determining the ratio of gas flow in and out of the chambers proximate the pilot piston for opening and closing the valve.

[Para 8] It is also an object of the present invention to provide a solenoid isolation valve in which the stroke of primary piston is not limited by the stroke of the pilot piston, by introducing an axial center column mounted in the housing of the valve.

[Para 9] In keeping with these objects and with others which will become apparent hereinafter, one feature of present invention resides, briefly stated in a solenoid isolation valve which has a housing defining a primary piston chamber and an outlet chamber. Both chambers are in gas communication with a primary channel. Both chambers also are in gas communication with a gas inlet and a gas outlet respectively. An axial center column is in the primary piston chamber to provide the bleed seal seat, the axial passage, the vent holes, and the slide able support of both the seal piston and the primary piston. A tubular sleeve assembly with a magnetic closure at one end and connects to the hollow cylindrical flange provides the room for the slide of the pilot piston, the seal piston and the primary piston. The primary piston is received in the seal piston, and both move axially in the empty space of the flange. A special outer surface is designed at the open side of the seal piston being in perfect contact with the inner surface of the housing, to restrain the gas flow from the inlet to create a pressure difference between the front side and the of the back side of the primary piston. The valve opens instantly.

[Para 10] When the gas fills into the empty valve, the seal piston moves up slightly to allow gas flow into the chambers of valve, providing an equalization of pressures in chambers and sealing the valve and spring force resumes the seal piston to a closed position. When the solenoid is energized, pilot piston is moved to open the bleed orifice.

PCT/CA2006/001105
21 JUNE 2007 21-06-07

The seal piston restrains the gas flow to decrease the gas pressure in the chambers, so that an instant opening of the valve to a wide-open position is ensured. While the valve is opened, the bleed orifice drains gas faster than in-flow in via the channel hole provided in the flange, to maintain the same pressure difference, so that the valve stays open. When the solenoid is de-energized, as the pilot piston adjusts itself to close the bleed orifice, there will be enough supply of gas via the channel hole to build up the gas pressure to close the valve.

[Para 11] The novel features which are considered as characteristics for the present invention are set forth in particular in the appended claims. The invention itself, however, both as to its construction and its method of operation, together with additional objects and advantages thereof, will be best understood from the following description of specific embodiments when read in connection with the accompanying drawing.

BRIEF DESCRIPTION OF THE DRAWINGS

[Para 12] Fig. 1 is a cross-sectional view of a solenoid isolation valve of configuration 1 at closed state.

[Para 13] Fig. 2 is a cross-sectional view of a solenoid isolation valve of configuration 1 at opened state.

[Para 14] Fig. 3 is a cross-sectional view of a solenoid isolation valve of configuration 2 at closed state.

DESCRIPTION OF PREFERRED EMBODIMENT

[Para 15] Attention is first directed to figure 1, which shows a solenoid isolation valve in section view. In housing 1, it provides the primary piston chamber 2 and the outlet chamber 3; both chambers are in gas communication with each other through the primary channel 4.

PCT/CA2006/001105
21 JUNE 2007 21-06-07

The primary piston chamber 2 connects to the gas inlet 9. The outlet chamber 3 connects the gas outlet 10.

[Para 16] A non-magnetic tubular sleeve 5 with a magnetic closure 6 at one end connects to a magnetic hollow cylindrical flange 7. An electrical coil 8 around the tubular sleeve 5 for generating the magnetic field.

[Para 17] An axial center column 11 with a circular disk 12 at one end, and a bleed hole seat 13 at another end. There are vent holes 14 through the circular disk 12, parallel to the axis of the axial center column 11. The axial center column 11 mounts into the primary channel 4 with external threads on the circular disk 12. The column portion of the axial center column 11 sits in the primary piston chamber 2. Then, the primary piston chamber 2 is in gas communication with the outlet chamber 3 through the vent holes 14 of the circular disk 12.

[Para 18] A pilot piston 15 is received and axially movable within the tubular sleeve 5. The pilot piston 15 has a sufficiently loose fit within the tubular sleeve 5, to allow gas from one end of the pilot piston 15 to reach the other end. The pilot piston 15 is comprised of a magnetic pilot piston body 29 and a pilot seal 30 mounted at the end of piston body 29 to achieve a gas-tight seal against the bleed hole seat 13. The pilot seal 30 is made of soft rubber. A compression spring 16 urges the pilot piston 15 away from the magnetic closure 6 against the bleed hole seat 13 of the axial center column 11 towards the pilot piston closed position. An axial passage 17 within the axial center column 11 connects to a bleed orifice 18, close to the bleed hole seat 13. The axial passage 17 communicates remote from chambers proximate the pilot piston 15 with the outlet chamber 3.

[Para 19] A bowl-like seal piston 19 has a front side and a back side. The seal piston 19 is open at the front side, and a primary piston 20 is received within the seal piston 19. Both the primary piston 20 and the seal piston 19 are axially movable within the hollow cylindrical flange 7, and also slide able along the axial center column 11. Since the bowl-

PCT/CA2006/001105
21 JUNE 2007 21-06-07

like seal piston 19 is made of soft plastic, having a close fit within the hollow cylindrical flange 7, it restrains the passage of gas axially between the seal piston 19 and the hollow cylindrical flange 7, when the seal piston 19 moves axially within the flange 7. A conical compression spring 28 urges the bowl-like seal piston 19 and the primary piston 20 towards the closed position.

[Para 20] A primary seal seat 21 and a primary orifice 31 locate at the boundary between the primary piston chamber 2 and the primary channel 4. A curved spring washer 22 locates in a chamber between the bowl-like seal piston 19 and the primary piston 20, urging the primary piston 20 towards the closed position. The primary piston 20 is comprised of the primary piston body 32 and a primary seal 33 mounted at the end of the front side of the primary piston 20. The primary seal 33 is made of plastic. The primary piston 20 operates an opened and a closed position within the bowl-like seal piston 19. The primary piston 20 has a front side and a back side. The back side is near the chamber between the seal piston 19 and the primary piston 20. When the primary piston 20 is at the closed position, it stops gas flow from the primary piston chamber 2 to the vent holes 14 of the circular disk 12 through the primary orifice 31. The seal piston 19 and the primary piston 20 are collectively known as primary piston assembly.

[Para 21] A bowl channel hole 23 is at the bottom side of the bowl-like seal piston 19, communicating the gas between the empty space of the hollow cylindrical flange 7 and the chamber in between the seal piston 19 and the primary piston 20. A primary peripheral seal 24 locates between the primary piston 20 and the axial center column 11, acting to restrain the passage of gas axially between the primary piston 20 and the axial center column 11. The primary peripheral seal 24 is achieved by an o-ring element located in a circumferential recess in an inner cylindrical portion of the primary piston body 32. The secondary peripheral seal 25 locates between the primary piston 20 and the bowl-like seal piston 19, acting to restrain the passage of gas axially between the seal piston 19 and the primary

PCT/CA 2006/001105

21 JUNE 2007 21-06-07

piston 20. The secondary peripheral seal 25 is achieved by an o-ring element located in a circumferential recess in an outer cylindrical portion of the primary piston body 32.

[Para 22] A channel hole 26, located in the cylindrical portion of the hollow cylindrical flange 7, perpendicular to the central axis of the flange 7. It communicates gas into the empty space of the flange 7. The outer surface 27 of the bowl-like seal piston 19, located at the front end, and the inner surface of the primary piston chamber 2 are in perfect contact with each other so that initially the gap between two surfaces restrains gas from the gas inlet 9 to the primary piston chamber 2 when the electrical coil 8 is not activated.

[Para 23] Referring to the figure 1, initially, the inlet gas pressurizes the valve. The pressured gas pushes up the bowl-like seal piston 19 to fill all empty chambers in the valve. The gas pressure in the valve is then in equilibrium. The two compression springs 16, 28 and the spring washer 22 push the pilot piston 15, the seal piston 19 and the primary piston 20 toward the closed position.

[Para 24] Referring to the figure 2, when the electrical coil 8 generates a magnetic field, the pilot piston 15 moves towards the closure. The gas reserved in the chambers of the valve is released to the outlet chamber 3 via the axial passage 17 and vent holes 14 of the axial center column 11, and the gas in the chambers of the valve drains instantly. It reduces the pressure in the chambers, the pressure difference overcomes the spring forces exerted by items 28 and 22, then, both the seal piston 19 and the primary piston 20 open to allow the gas inlet 9 communicate directly with outlet chamber 3. Since the size of the channel hole 26 is smaller than that of the bleed orifice 18, the gas pressure is not able to build up in the chambers in valve during the valve open operation because the amount of gas exiting the chambers is more than entering. The valve keeps open.

[Para 25] When the magnetic field ceases, the compression spring 16 pushes the pilot piston 15 to the sealed position. During the sealing procedure, the gas via the channel hole 26 and can supply enough gas to build up the gas pressure in the chambers near the pilot

PCT/CA 2006/001105
21 JUNE 2007 21-06-07

piston 15. The pilot piston 15 adjusts itself to seal the bleed orifice 18 completely. The gas pressure builds up and is in equilibrium in the chambers of the valve. All compression springs 16, 23 and spring washer 22 push the primary piston 20 towards the closed position.

[Para 26] Attention is also directed to figure 3, which shows another kind of configuration of a solenoid isolation valve in section view. In this configuration, the seal piston 19 is a hollow cylinder, and a primary piston 20 is received in the seal piston. The compression springs 22 pushes the seal piston 19 and the compression 22 pushes the primary piston 20 towards the closed position respectively. The method of operation procedure is similar to the above-mentioned for figure 1 and 2.

[Para 27] It will be understood that each of the elements described above, or two or more together, may also find a useful application in the other types of constructions differing from the types described above.

[Para 28] While the invention has been illustrated and described as embodied in solenoid isolation valve, it is not intended to be limited to the detail shown, since various modifications and structural changes may be made without departing in any way from the operating principle of the present invention.

PCT/CA 2006/001105What is claimed is: ²¹ JUNE 2007 21-06-07

[Claim 1] A solenoid isolation valve assembly for controlling the flow of gas from a source of gas to a demand comprising: (a) a housing extending along a central axis, defining a primary piston chamber and an outlet chamber; the primary piston chamber being in gas communication with the outlet chamber through a primary channel; (b) a tubular sleeve assembly being comprised of a non-ferromagnetic tubular sleeve, having at one end a ferromagnetic closure preventing the escape of gas; at the other end, said non-ferromagnetic tubular sleeve connecting a hollow cylindrical ferromagnetic flange with external threads mounting into said primary piston chamber; an electrical coil around the tubular sleeve assembly for generating a magnetic field; a solenoid being comprised of the tubular sleeve assembly and the electrical coil; (c) the primary piston chamber defining a gas inlet extending perpendicular to the central axis for directing gas into the housing; said outlet chamber defining a gas outlet to the demand; (d) an axial center column with a circular disk at one end; a bleed hole seat being defined by the axial center column at the other end; the circular disk defining vent holes parallel to the axis of the axial center column; the axial center column mounting into said primary channel with external threads on the circular disk; the axis of the axial center column being parallel to the axis of said housing; one end of the axial center column with the bleed hole seat sitting in said primary piston chamber; the primary piston chamber being in gas communication with the outlet chamber through the vent holes of the circular disk; (e) a pilot piston received and axially movable within said non-ferromagnetic tubular sleeve for movement towards and away from the ferromagnetic closure; the pilot piston having a sufficiently loose fit within the tubular sleeve to allow gas from one end of the pilot piston to reach the other end thereof; a pilot biasing element urging the pilot piston away from said ferromagnetic closure against the bleed hole seat of the axial center column towards a closed position; (f) said axial center

PCT/CA 2006/001105
21 JUNE 2007 21-06-07

column defining an axial passage coaxially; the axial passage including a bleed orifice proximate to the bleed hole seat, the axial passage communicating gas remote from chambers near the pilot piston with said outlet chamber; (g) a primary piston assembly being comprised of a seal piston and a primary piston; the primary piston being received within the seal piston; both the seal piston and the primary piston axially movable within the hollow cylindrical ferromagnetic flange, and slideable along said axial center column; the seal piston made of a material selected from the class of materials known as soft plastic; the seal piston having a close fit within the hollow cylindrical ferromagnetic flange to sufficiently restrain the passage of gas axially between the seal piston and the hollow cylindrical ferromagnetic flange; primary biasing elements urging the primary piston assembly towards the closed position; (h) the primary piston chamber defining a primary seal seat and a primary orifice located at the boundary of the primary piston chamber and the primary channel; the primary piston operating an opened and a closed position within the seal piston; the primary piston assembly having a front side and a back side; the back side of the primary piston assembly facing in the direction of an empty space of a hollow cylindrical flange; the primary piston assembly stopping gas flow from the primary piston chamber to the vent holes of the circular disk through the primary orifice when the primary piston assembly is at the closed position; (i) a primary peripheral seal between the primary piston and the axial center column, acting to restrain the passage of gas axially between the primary piston and the axial center column; (j) a secondary peripheral seal between the seal piston and the primary piston, acting to restrain the passage of gas axially between the seal piston and the primary piston; (k) the hollow cylindrical ferromagnetic flange defining a channel hole in the cylindrical portion, perpendicular to the central axis for communicating gas into the empty space of the hollow cylindrical ferromagnetic flange; (l) one end of said seal piston proximate the front side of the primary piston assembly having a circumferential outer surface matching and contacting with an inner surface being defined by the primary

PCT/CA2006/001105
21 JUNE 2007 21-06-07

piston chamber, a pair of matching surfaces, for restraining the source of gas from the gas inlet to the primary piston chamber when the solenoid isolation valve starts to open.

[Claim 2] The solenoid isolation valve assembly of Claim 1, wherein the axis of translational displacement defined by the primary piston assembly is parallel to the axis of translational displacement defined by the pilot piston.

[Claim 3] The solenoid isolation valve assembly of Claim 1, wherein: (a) the pilot piston including a pilot piston body and a pilot seal mounted at one side of the piston body to achieve a gas-tight seal against said bleed hole seat; (b) the pilot seal made of a material selected from the class of material known as soft elastomers.

[Claim 4] The solenoid isolation valve assembly of claim 1, wherein: (a) the primary piston including a primary piston body and a primary seal mounted at the end of the primary piston body facing in the direction of the primary seal seat; (b) the primary seal made of a material selected from the class of material known as plastic; (c) said primary peripheral seal is achieved by an o-ring element located in a circumferential recess in an inner cylindrical portion of the primary piston body; (d) said secondary peripheral seal is achieved by an o-ring element located in a circumferential recess in an outer cylindrical portion of the primary piston body.

[Claim 5] The solenoid isolation valve assembly of Claim 1, wherein the pilot biasing element is a compression spring.

[Claim 6] The solenoid isolation valve assembly of Claim 1, wherein the primary biasing elements are a compression spring and a spring washer or two compression springs.

[Claim 7] The solenoid isolation valve assembly of claim 1, wherein the end of the seal piston having a tapered circumferential outer surface to achieve gas-restraining by matching the inner surface of the primary piston chamber.

//

AMENDED SHEET

1/3

PCT/CA2006/001105
21 JUNE 2007 21-06-07

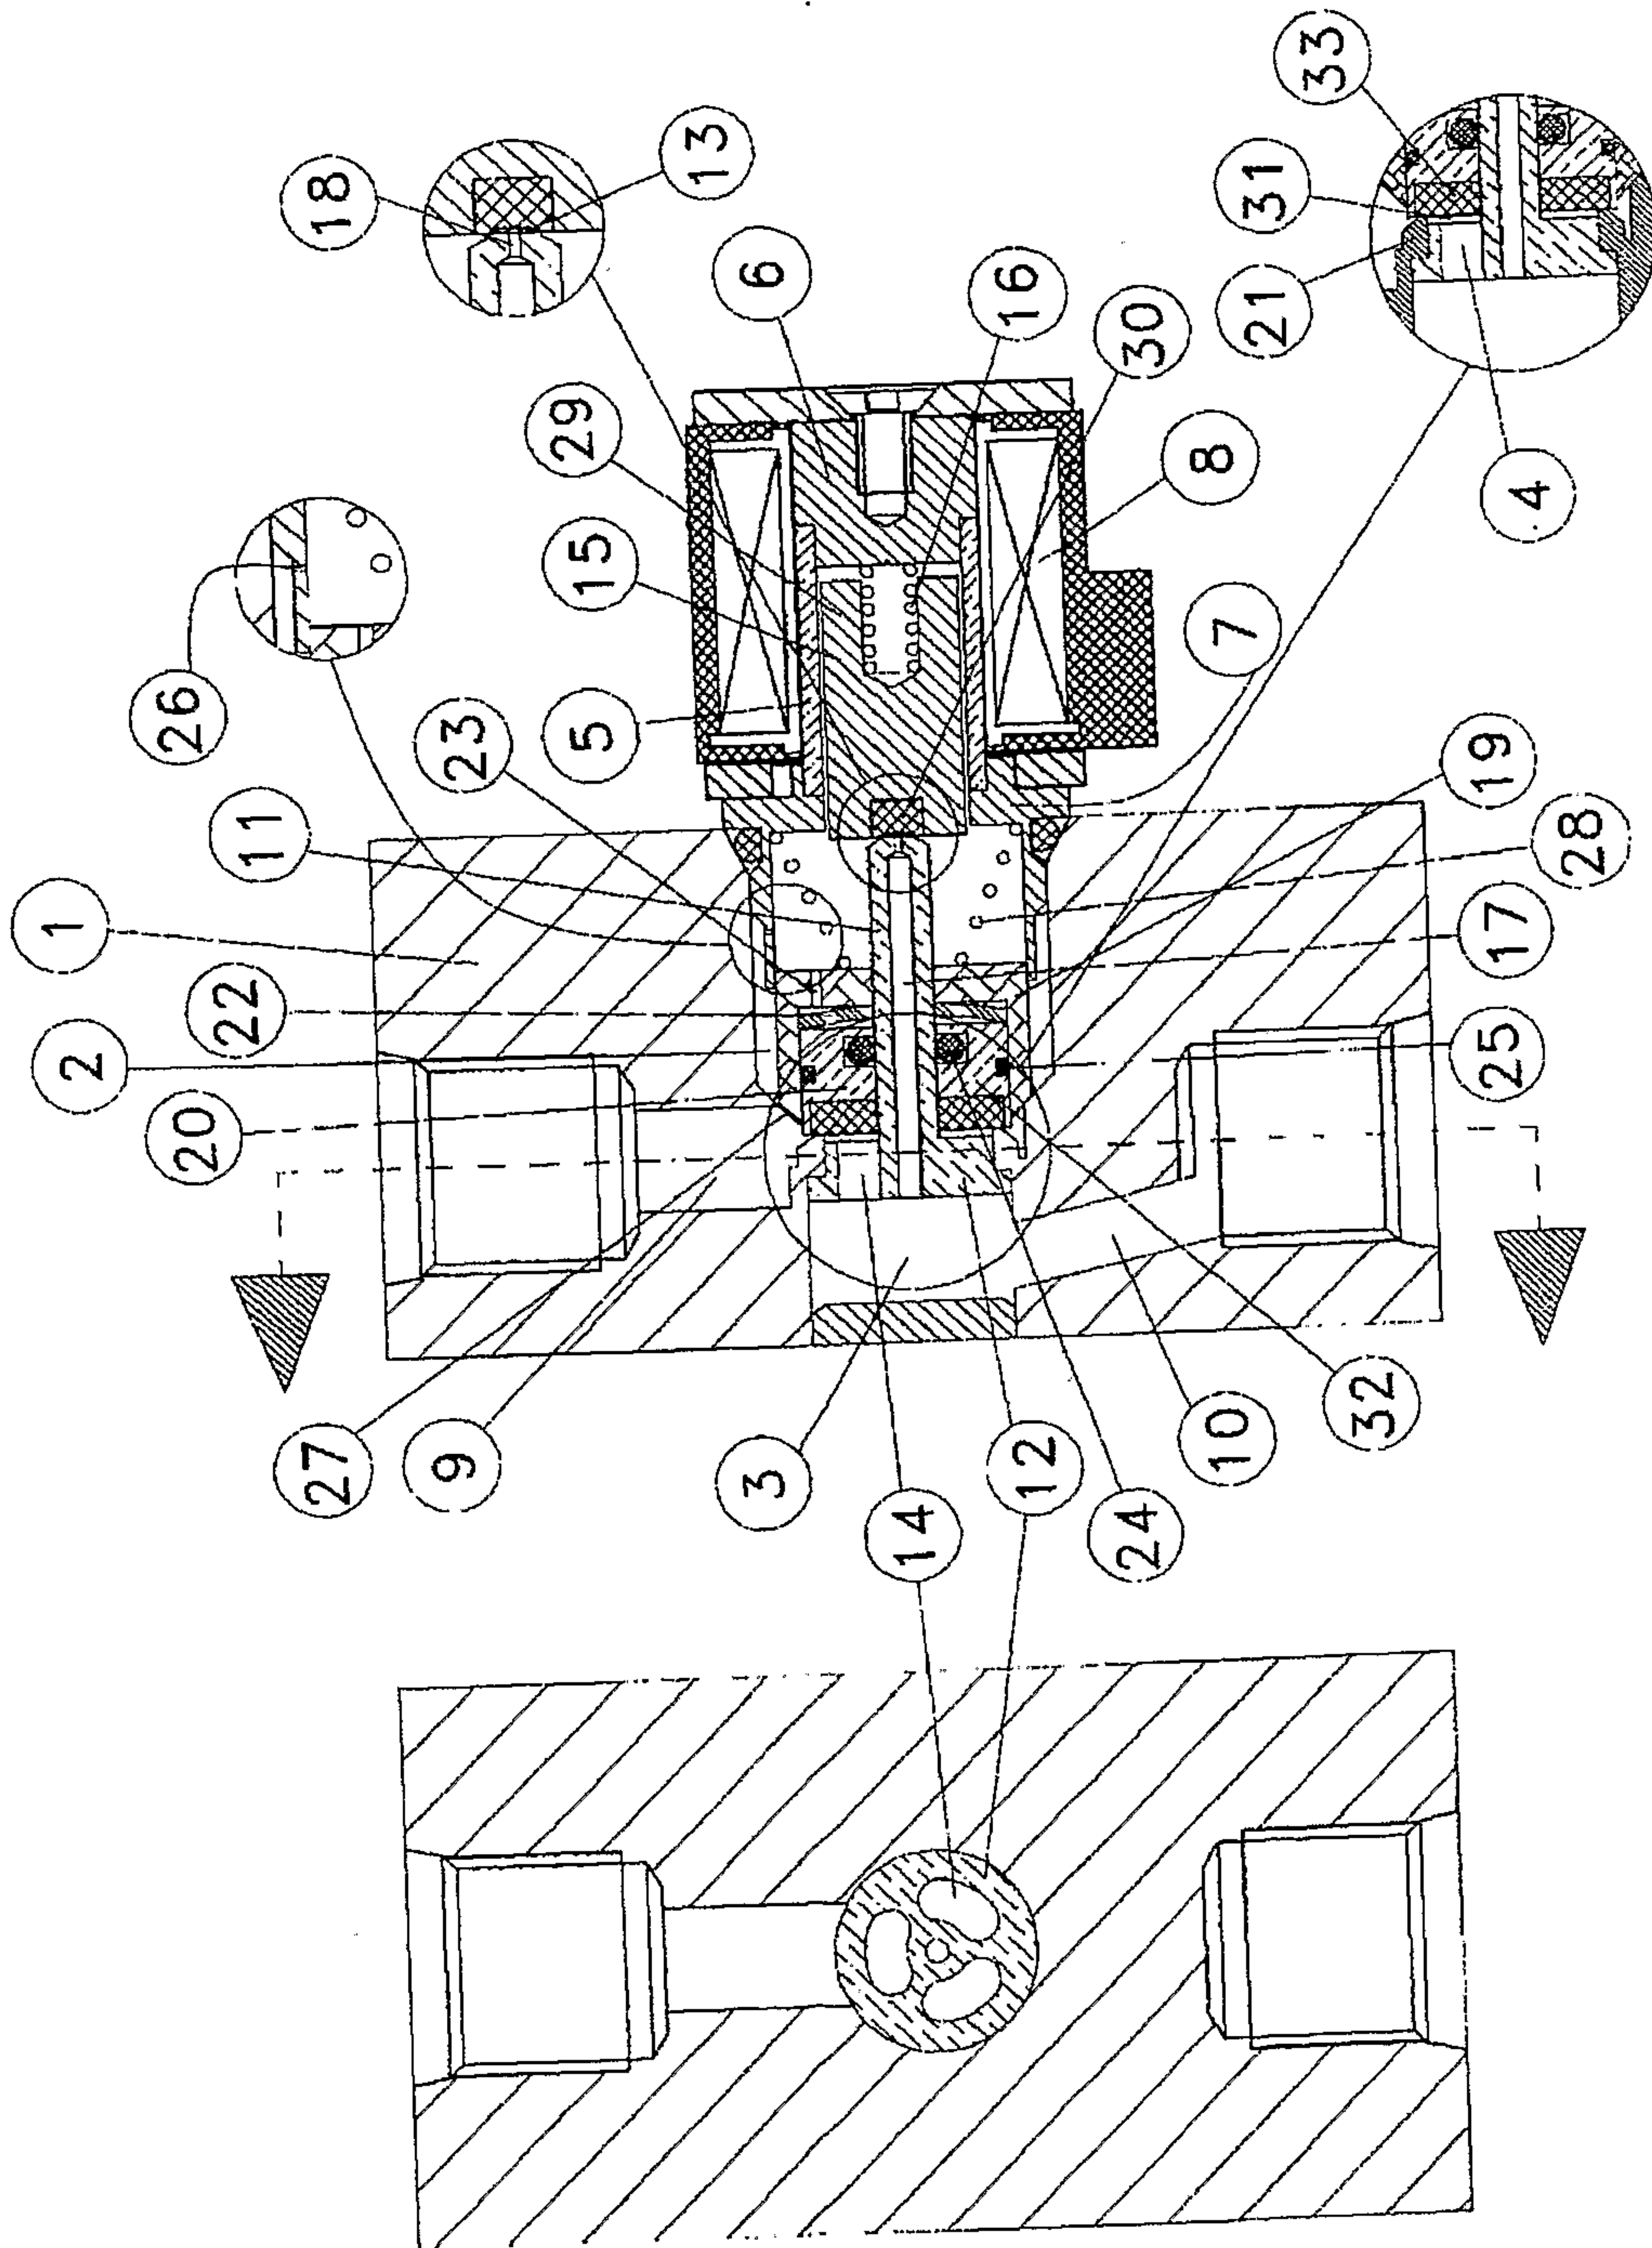


Figure 1

AMENDED SHEET

2/3

PCT/CA2006/001105

2:1 JUNE 2007 21-06-07

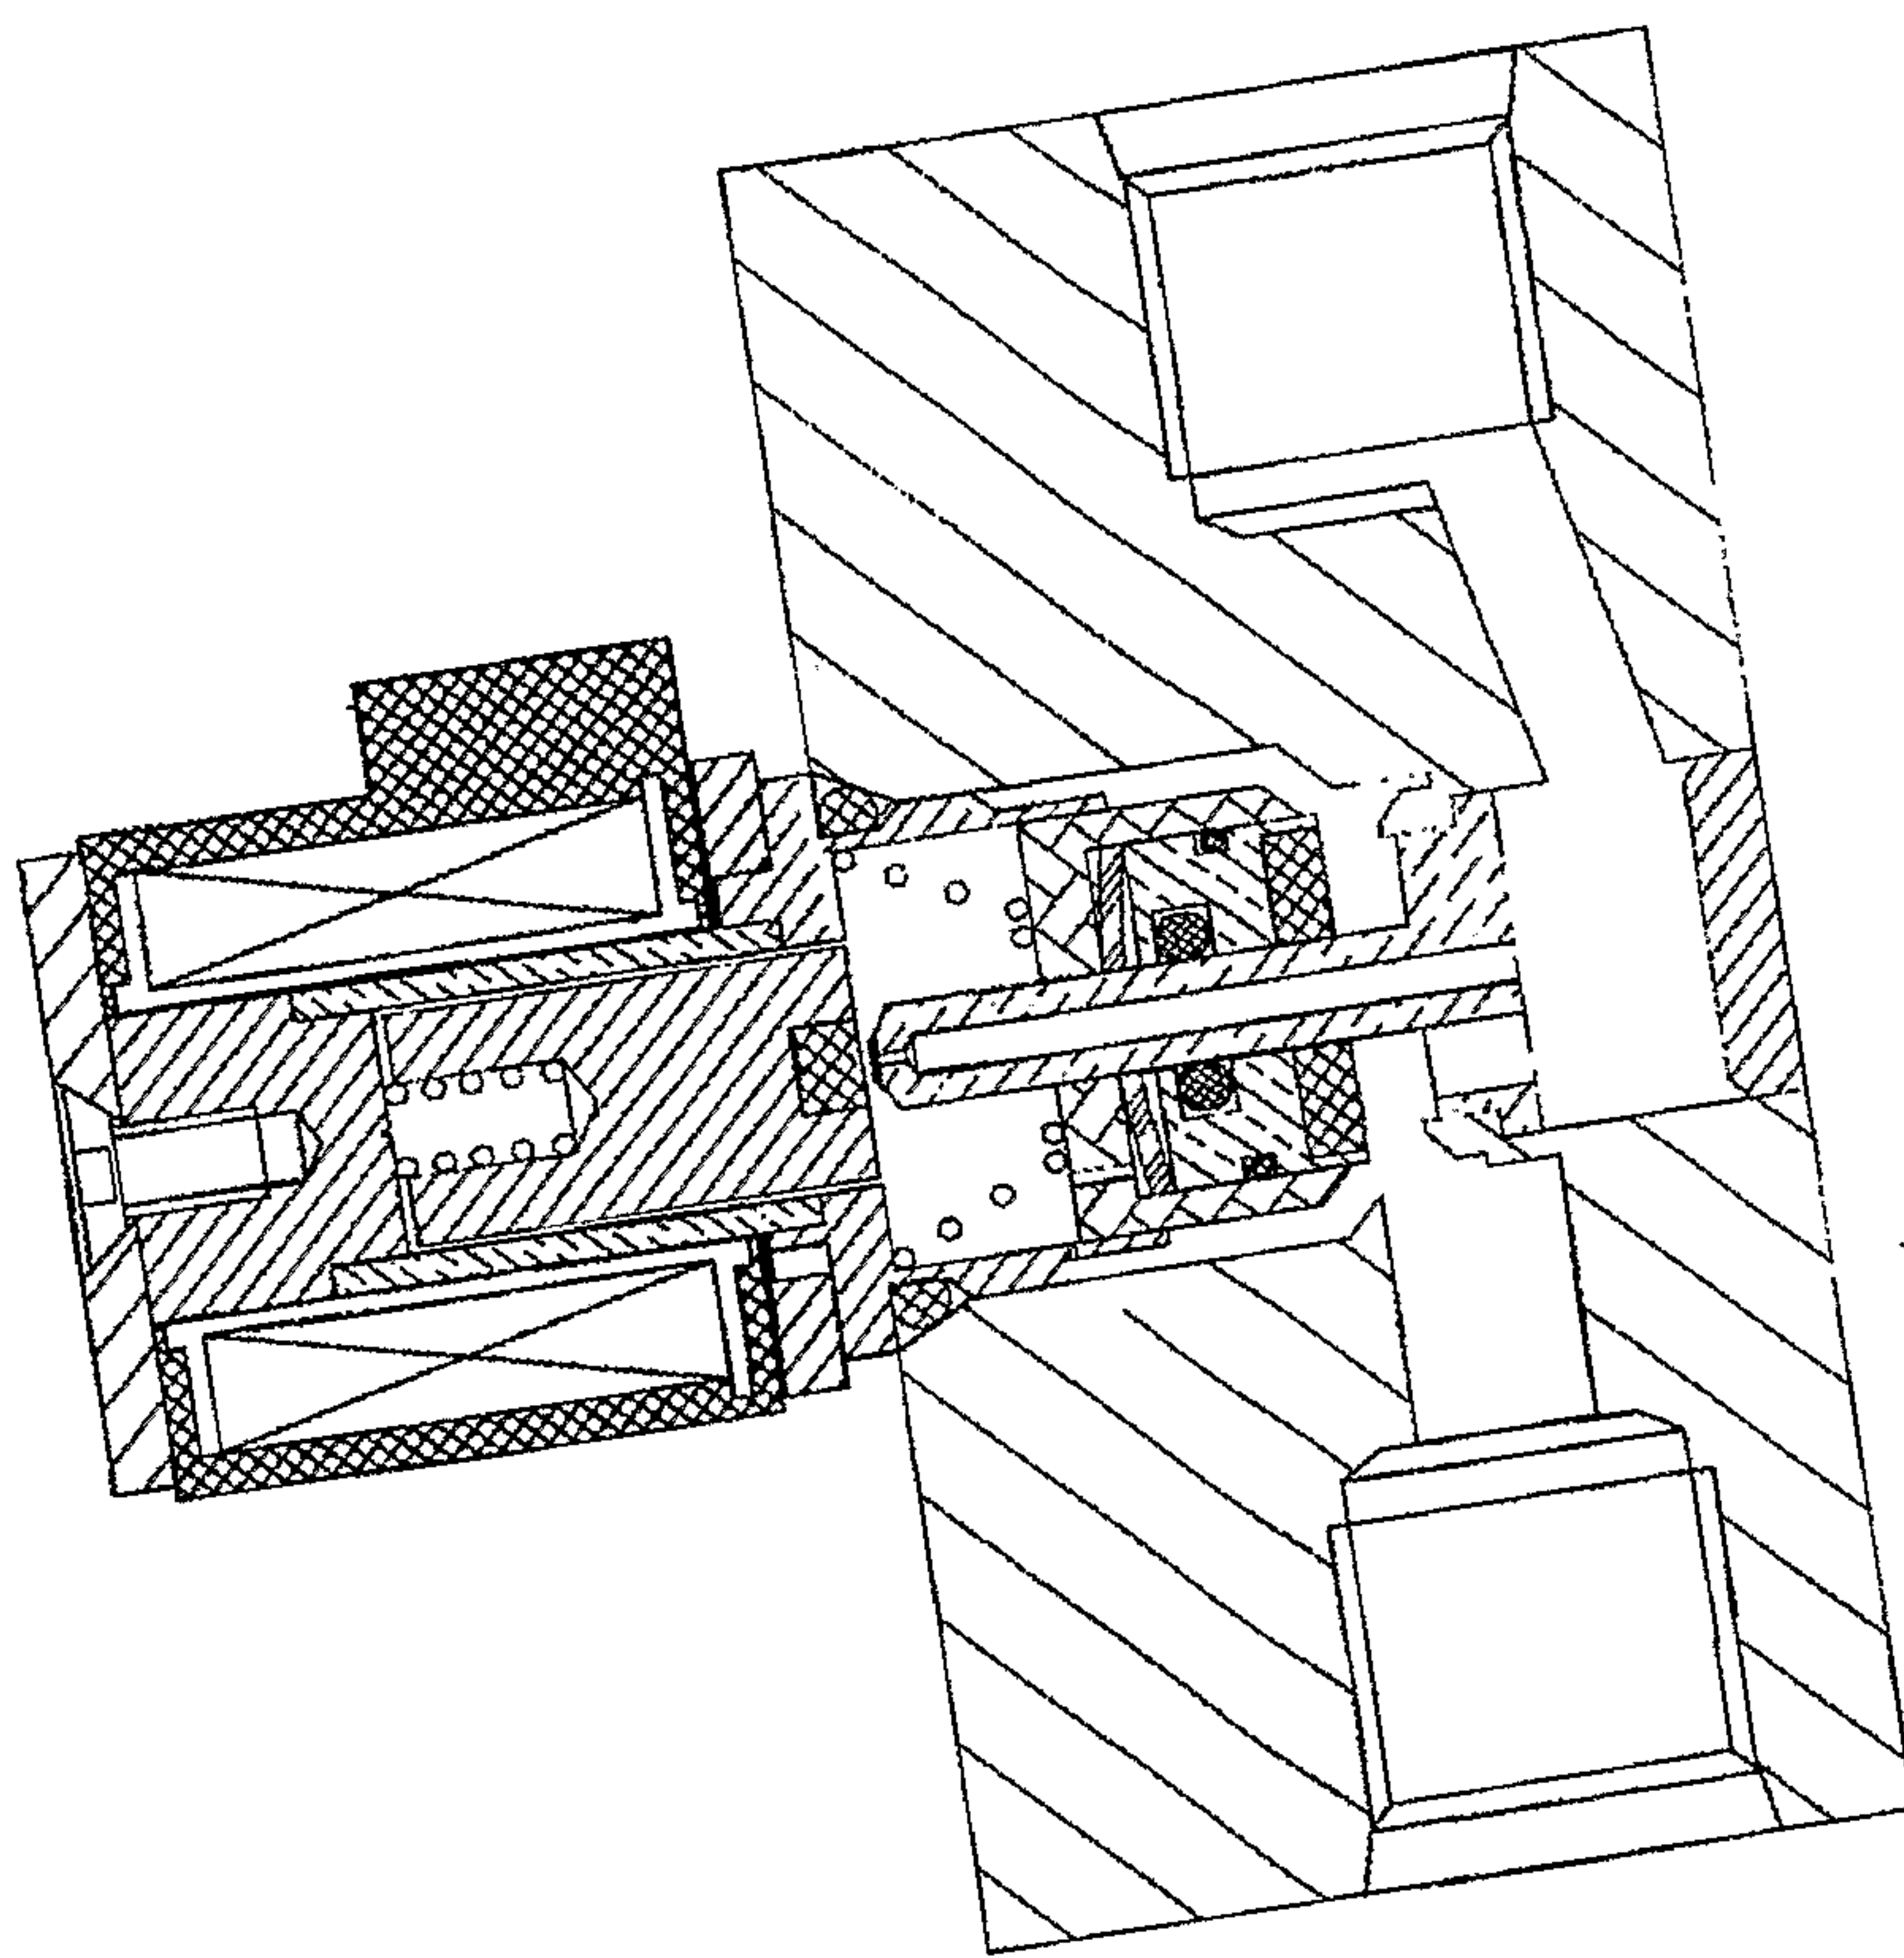


Figure 2

AMENDED SHEET

3/3

PCT/CA2006/001105

21 JUNE 2007 21-06-07

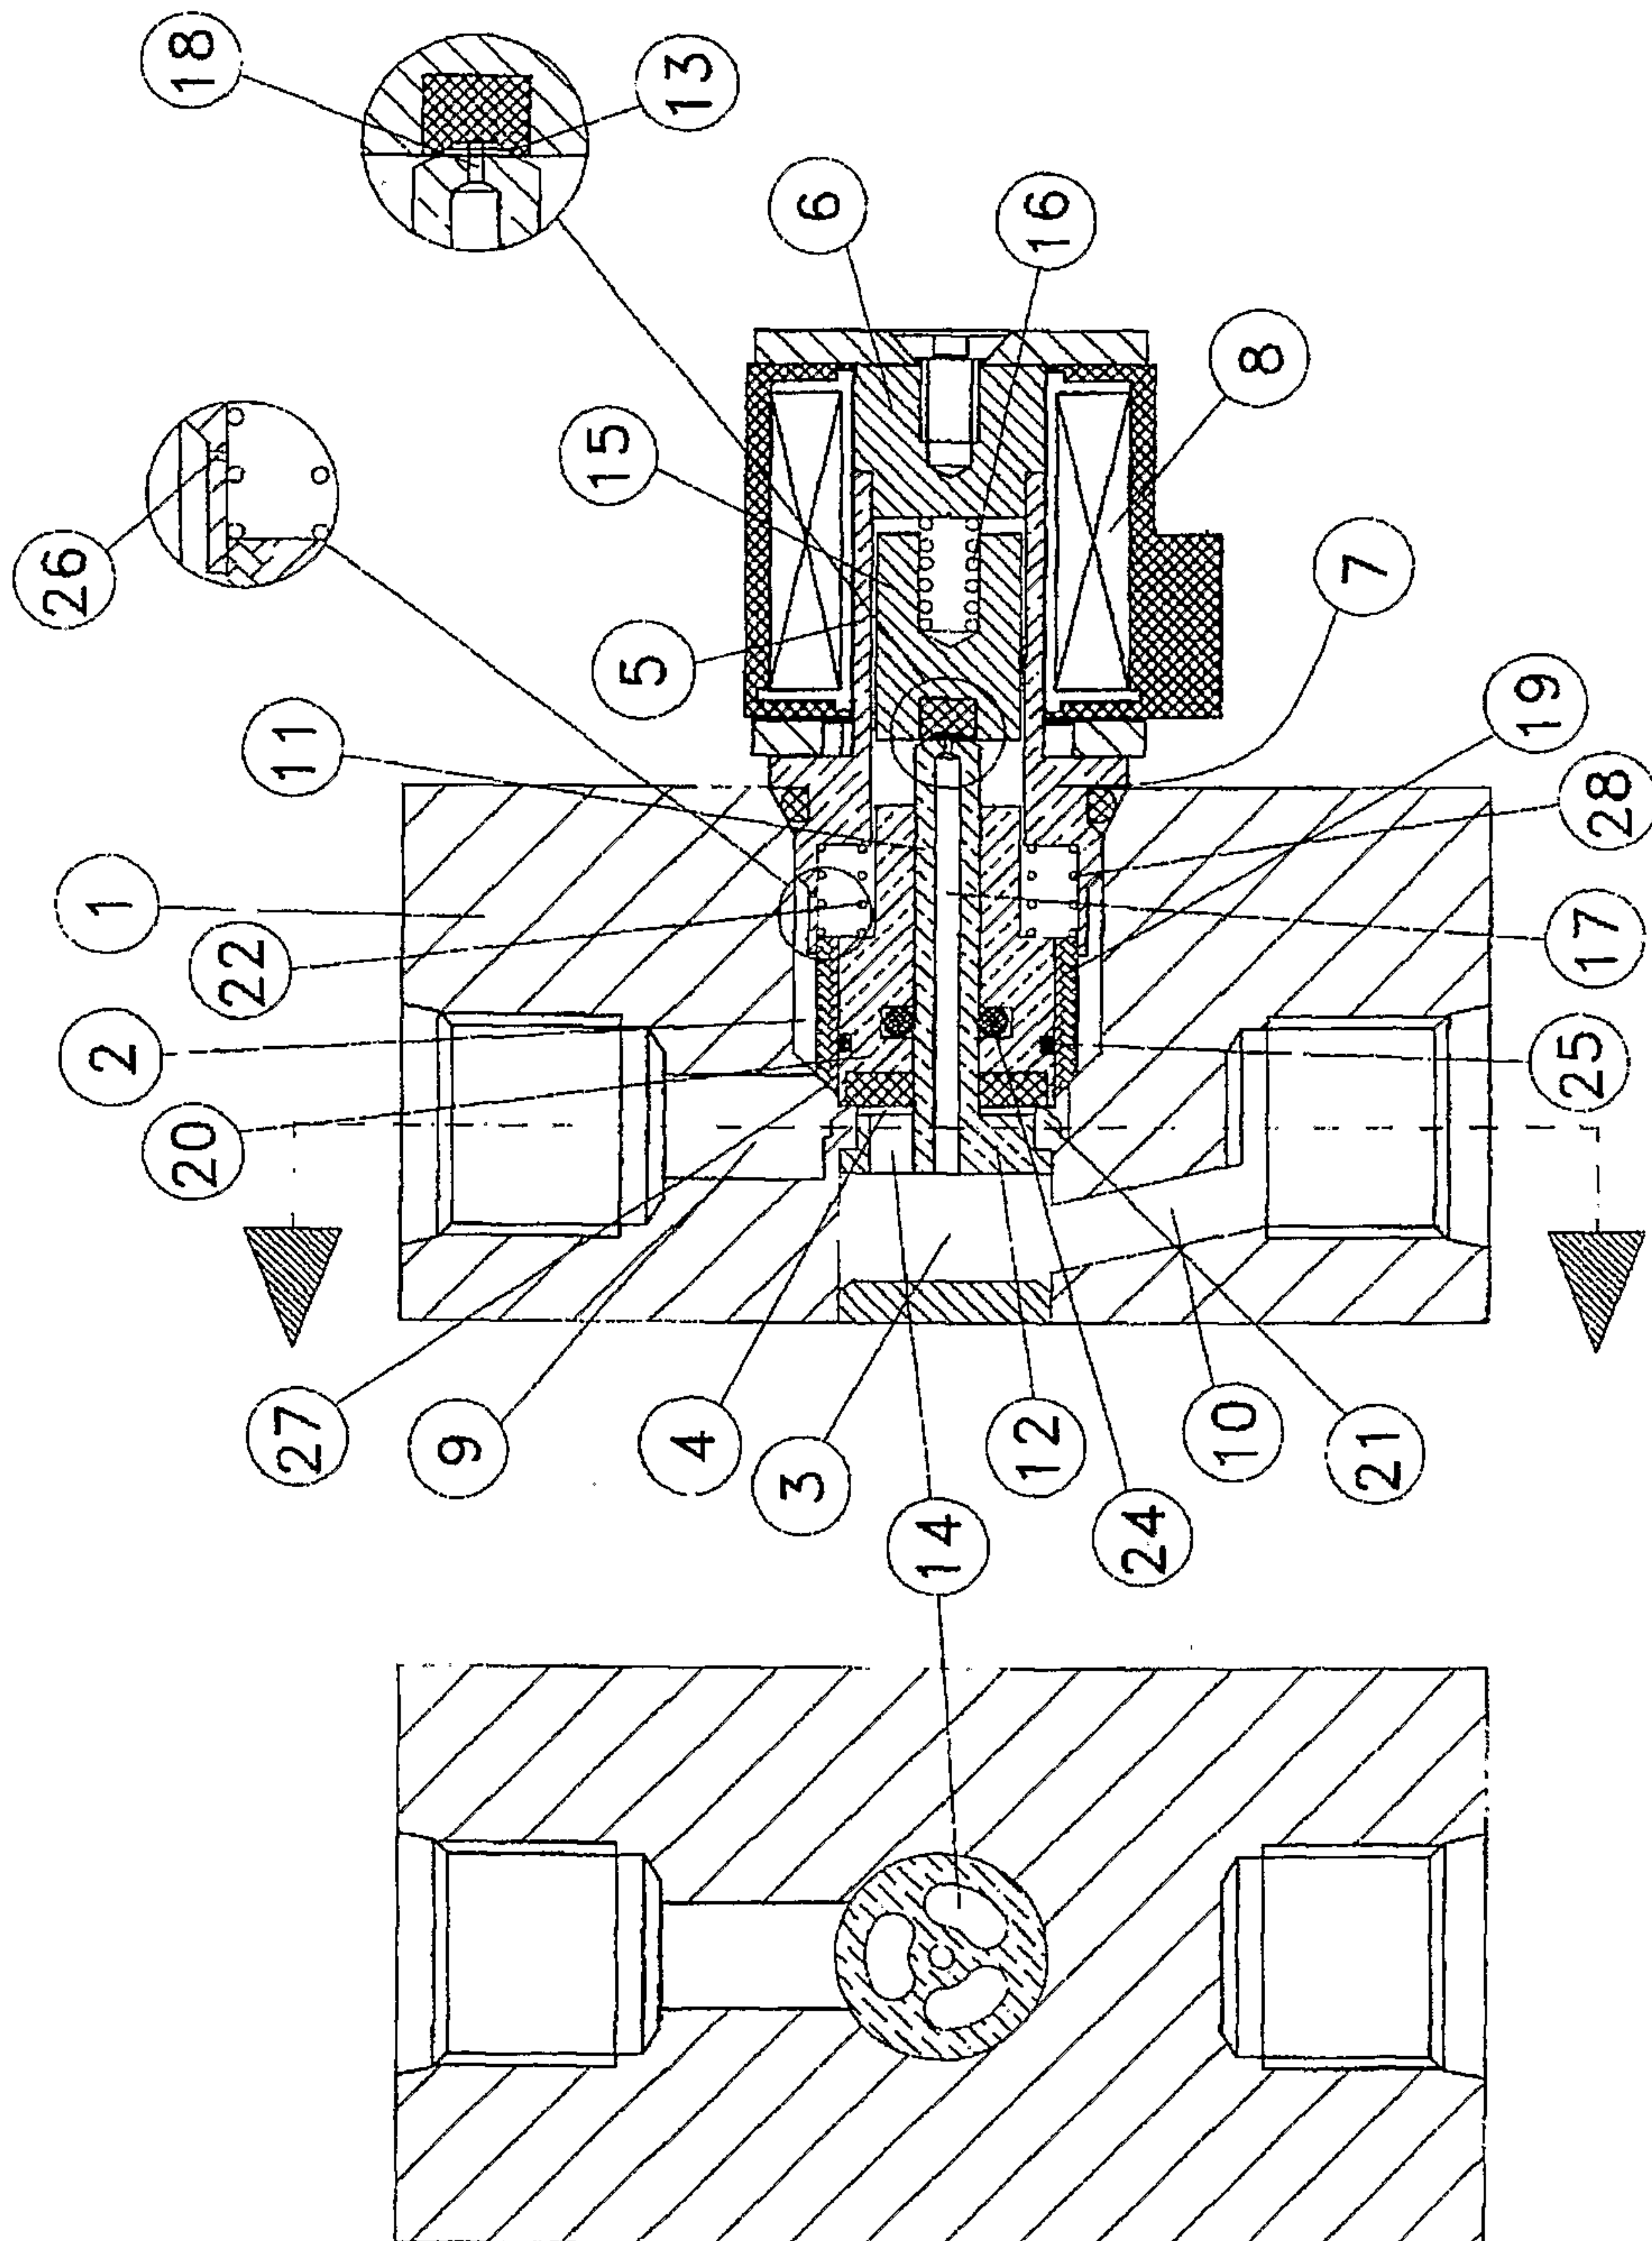


Figure 3

