



US 20190077694A1

(19) **United States**(12) **Patent Application Publication** (10) **Pub. No.: US 2019/0077694 A1**
(43) **Pub. Date: Mar. 14, 2019**

(54) **NON-OPAQUE ARSENIC-FREE
BETA-SPODUMENE GLASS CERAMIC
EXHIBITING BROWN-GREY COLORATION**(30) **Foreign Application Priority Data**

Feb. 28, 2013 (FR) 1351769

(71) Applicant: **EUROKERA**, Chateau-Thierry (FR)**Publication Classification**(72) Inventors: **Marie Jacqueline Monique Comte**,
Fontenay aux Roses (FR); **Cecile**
Jousseau, Asnieres Sur Seine (FR);
Philippe Lehuède, Dammarie-les-Lys
(FR); **Kamila Plevacova**, Paris (FR)(51) **Int. Cl.****C03B 32/02** (2006.01)
C03C 10/00 (2006.01)
C03C 4/02 (2006.01)
H05B 3/74 (2006.01)
C03C 3/087 (2006.01)
C03C 3/085 (2006.01)
F24C 15/10 (2006.01)(73) Assignee: **EUROKERA**, Chateau-Thierry (FR)(52) **U.S. Cl.**CPC **C03B 32/02** (2013.01); **C03C 10/0027**
(2013.01); **C03C 4/02** (2013.01); **F24C 15/10**
(2013.01); **C03C 3/087** (2013.01); **C03C 3/085**
(2013.01); **C03C 2204/00** (2013.01); **H05B**
3/74 (2013.01)(21) Appl. No.: **16/190,870**(22) Filed: **Nov. 14, 2018****Related U.S. Application Data**(62) Division of application No. 15/416,034, filed on Jan.
26, 2017, now Pat. No. 10,160,685, which is a divi-
sion of application No. 14/193,868, filed on Feb. 28,
2014, now Pat. No. 9,593,040.(60) Provisional application No. 61/770,499, filed on Feb.
28, 2013.

(57)

ABSTRACTMethods, compositions, and articles provide for LAS-type
glass-ceramics having specific thermo-mechanical, optical
and coloration characteristics to yield generally brown-grey
products. The glass-ceramic materials may include as colo-
rants iron oxide, vanadium oxide, chromium oxide, cobalt
oxide, nickel oxide and/or cerium oxide.

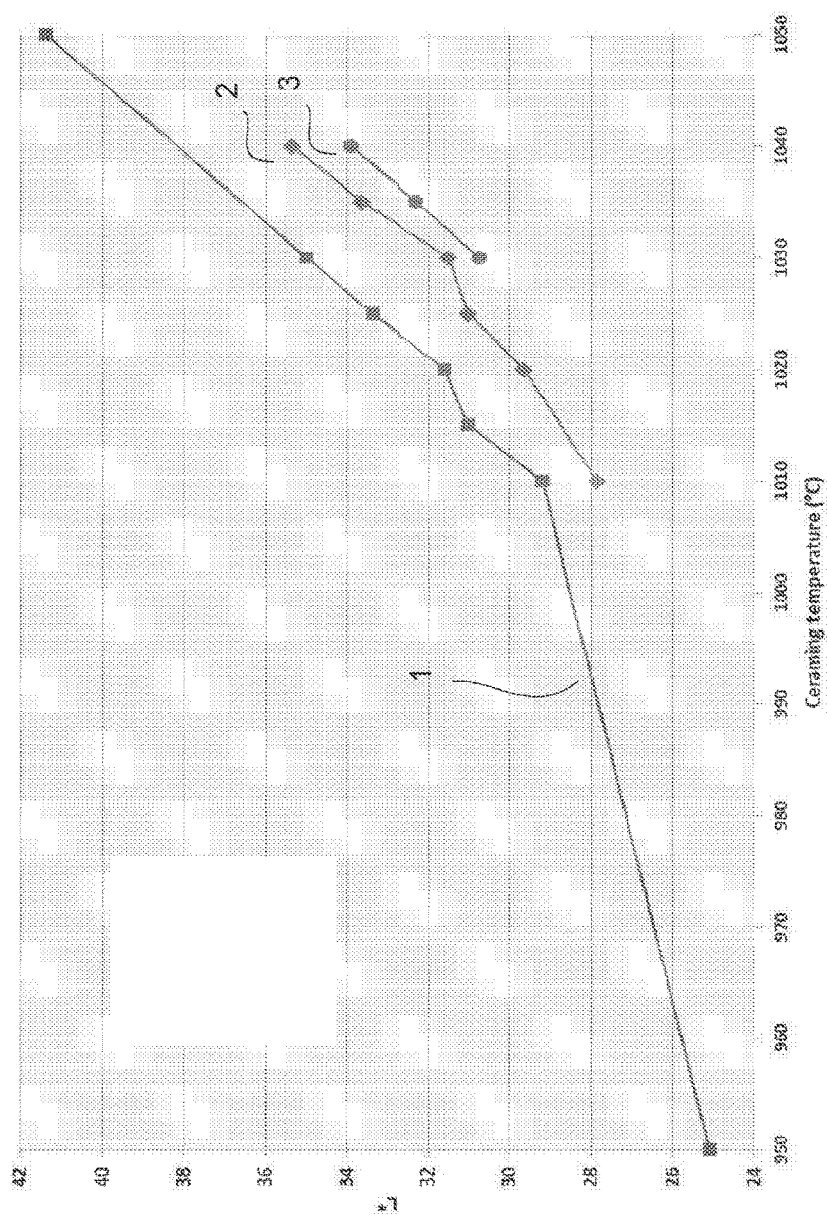


FIG. 1

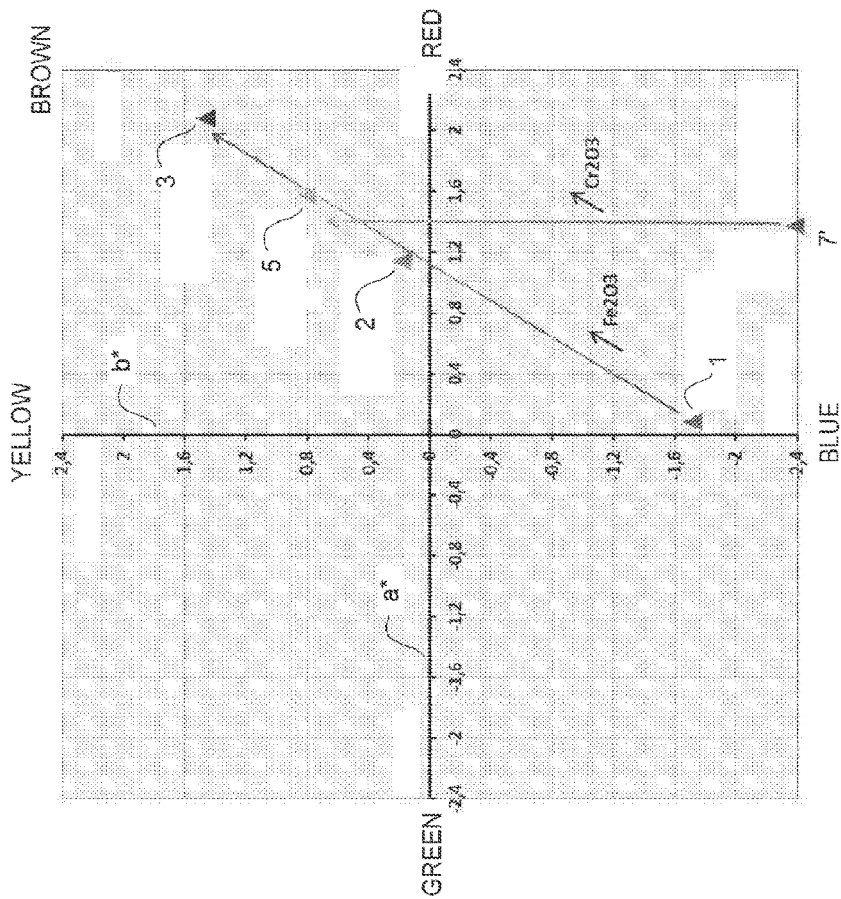


FIG. 2

**NON-OPAQUE ARSENIC-FREE
BETA-SPODUMENE GLASS CERAMIC
EXHIBITING BROWN-GREY COLORATION**

**CROSS-REFERENCE TO RELATED
APPLICATIONS**

[0001] This application is a divisional and claims the benefit of priority under 35 U.S.C. § 120 of U.S. application Ser. No. 15/416,034 filed on Jan. 26, 2017, which is a divisional of and claims the benefit of priority under 35 U.S.C. § 120 of U.S. application Ser. No. 14/193,868 filed on Feb. 28, 2014, which claims the benefit of priority under 35 U.S.C. § 119 of U.S. Application Ser. No. 61/770,499 filed on Feb. 28, 2013, and French Patent Application Serial No. FR 1351769 filed on Feb. 28, 2013, the entire contents of which are hereby incorporated by reference.

BACKGROUND

[0002] The present disclosure relates to glass-ceramics of the lithium aluminosilicate (LAS) type, having a generally brown-grey color and containing a solid solution of beta-spodumene as the predominant crystalline phase. The disclosure also relates to articles made from such glass-ceramics, precursor glasses for such glass-ceramics, and methods for obtaining such glass-ceramics and related articles.

SUMMARY

[0003] One of the desirable properties of glass-ceramic materials is their thermo-mechanical ability to sustain repeated and rapid temperature changes up to very high temperatures, which can be as high as 600-800° C. Although originally developed for other purposes, LAS type glass-ceramics have become the material of choice for certain products in the domestic market, such as glass-ceramic cooktops. The thermo-mechanical properties of LAS type glass ceramics dovetail nicely with the use of this material in cooktop applications.

[0004] Many such cooktops employ radiant elements or other heating elements beneath a top surface of the glass-ceramic. Consequently, to be effective, the glass-ceramic material should exhibit the additional properties of: good transmission efficiency in the visible and infrared spectrums, very low coefficient of thermal expansion (CTE), and optionally particular coloration properties in reflection (defined by the parameters L^* , a^* and b^*).

[0005] Thus, properties of a viable glass-ceramic material for use in the domestic market, such as for cooktops, involve aesthetic considerations. Although aesthetics are often dismissed as unimportant by some, such considerations are as important as performance characteristics so far as marketability is concerned. For example, in the domestic market, the color of a glass-ceramic material may be the deciding factor as to whether a product is commercially sustainable.

[0006] In terms of aesthetic considerations, specifically color, the state of the cooktop art offers three options: transparent black glass-ceramic (with lightness, L^* , below 25), white glass-ceramic (with lightness L^* higher than 60), and non-colored transparent glass-ceramic with an opaque decorative layer on a backside thereof to provide a desirable color and/or to obscure internal components, such as electrical components, beneath the cooktop. Notably, however, until now there have been no commercial products exhibiting a generally brown-grey coloration with a range of

lightness L^* between about 25 to 45, good transmission efficiency in the visible and infrared spectrums, and a very low coefficient of thermal expansion (CTE).

[0007] It is noted that although cooktops are one use for the one or more glass-ceramic embodiments disclosed herein, the contemplated applications may extend to other areas, including cooking utensils, cookware, pots, pans, microwave oven floors, etc., as well as to packaging for consumer electronics, for example. Optionally, a cooktop comprising the glass-ceramic may be coated or partially coated with an enamel décor.

[0008] Accordingly, there are needs in the art for new methods and apparatus for providing glass-ceramic of desirable aesthetic and performance characteristics.

BRIEF DESCRIPTION OF THE FIGURES

[0009] For the purposes of illustration, there are forms shown in the drawings that are presently preferred, it being understood, however, that the embodiments disclosed and described herein are not limited to the precise arrangements and instrumentalities shown.

[0010] FIG. 1 is a chart illustrating the relationship between lightness L^* of the glass ceramic materials produced and the specific maximum ceramming temperature employed in forming same in accordance with one or more embodiments described and/or disclosed herein.

[0011] FIG. 2 is a chart illustrating the relationship between the blue-yellow hue and the green-red hue in glass ceramic materials as a function of the quantities of iron oxide (Fe_2O_3) and chromium oxide (Cr_2O_3) in accordance with one or more embodiments described and/or disclosed herein.

DETAILED DESCRIPTION

General Considerations

[0012] The present disclosure relates to the field of glass-ceramics. It relates more particularly to glass-ceramics exhibiting a specific appearance in reflection and also a controlled transmittance curve, and also to articles made of such glass-ceramics, in particular cooktops, and to the precursor glasses of such glass-ceramics.

[0013] While the production of glass ceramics has been carried out for many years, the engineering parameters for producing a generally brown-grey glass ceramic of specific lightness, L^* , transmission, and coefficient of thermal expansion (CTE) have until now been elusive in the art. In this regard, a discussion is provided herein of the requisite processes, compositions, and/or other parameters for producing the aforementioned glass-ceramics.

[0014] A glass-ceramic is a polycrystalline material produced via a ceramming process (i.e., a controlled rather than spontaneous crystallization) of a precursor glass. The general process for producing a glass-ceramic material involves three basic steps: (i) forming a precursor glass via appropriate melting (and fining) processes: (ii) cooling and shaping the precursor glass into a desired form: and (iii) ceramming (heat treatment), wherein the precursor glass partly crystallizes and forms a glass-ceramic.

[0015] In an application as a cooktop, in particular for heating devices of the radiant type, it may be desirable for the cooktop to meet certain requirements with regard to its optical properties, both in the visible region and in the

infrared region. For instance, it may be desirable for the heating elements to be concealed when not operating but to be clearly visible when they are operating. The energy efficiency of the device is important in order to reduce as much as possible the time for cooking and energy consumption. The esthetic appearance of the cooktop is also a parameter to be taken into account, in particular for a cooktop to be fully integrated in consumer kitchens.

[0016] Conventional glass-ceramic cooktops on the market are glass-ceramics of the lithium aluminosilicate type comprising a crystal phase essentially composed of a solid solution of β -quartz. They are typically transparent but have a very low light transmittance and exhibit a black appearance, which is compatible with the majority of kitchens. It can be advantageous, in order to further improve this incorporation, to have available cooktops exhibiting other appearances. In particular, cooktops having a grey color may be desired.

[0017] Transparent glass-ceramics comprising a solid solution of β -quartz as a main crystal phase have proved to be unsuited to the achievement of such optical appearances because of their very low light transmittance (set by the application). Such materials appear black, whatever their true color in transmittance.

[0018] In order to obtain other colors, one possible approach is to coat a surface (e.g., a lower surface) of a clear glass-ceramic with a colored coating, for example made of a heat-resistant resin or enamel. However, few resins are compatible with the high temperatures experienced by the cooktop in the case of radiant heating. In addition, the deposition of resin or enamel involves a costly additional step in the process for the manufacture of the cooktops. There thus exists a need to have available cooktops which are suitable for radiant heating and which exhibit the desired optical appearance without having to add a resin or an enamel over the whole surface of the cooktop.

Glass-Ceramic System

[0019] A wide variety of glass-ceramic systems exist, e.g., the $\text{Li}_2\text{O} \times \text{Al}_2\text{O}_3 \times \text{nSiO}_2$ -System (LAS system), the $\text{MgO} \times \text{Al}_2\text{O}_3 \times \text{nSiO}_2$ -System (MAS system), and the $\text{ZnO} \times \text{Al}_2\text{O}_3 \times \text{nSiO}_2$ -System (ZAS system), to name a few.

[0020] The system used in connection with the embodiments disclosed herein is the $\text{Li}_2\text{O} \times \text{Al}_2\text{O}_3 \times \text{nSiO}_2$ -System (LAS system). The LAS system mainly refers to a mix of lithium oxide, aluminum oxide, and silicon oxide with additional components, e.g., glass-phase forming agents such as ZrO_2 , TiO_2 , MgO , ZnO , BaO , SrO , CaO , K_2O , Na_2O , P_2O_5 , B_2O_3 , V_2O_5 , Fe_2O_3 , Cr_2O_3 , CoO , NiO , CeO_2 , MnO , Bi_2O_3 and/or SnO_2 .

[0021] In most cases, nucleation agents and fining agents are added to the precursor glass composition. Nucleation agents aid and control the crystallization process and the fining agents are employed to remove gas bubbles from the glass melt. By way of example, one or more embodiments herein may employ ZrO_2 and/or TiO_2 as nucleation agents in the precursor glass process.

[0022] Many conventional precursor glass compositions may employ arsenic oxide (As_2O_3) and/or antimony oxide (Sb_2O_3) as fining agents during the step of melting a vitrifiable load of raw materials into a precursor glass. In connection with the protection of the environment, it is desired to avoid the use of As_2O_3 and Sb_2O_3 , which are highly toxic compounds. Some prior work has been done in

connection with producing glass-ceramics without arsenic and/or antimony in the composition, at processing temperatures, times, atmospheres, etc., suitable to achieve desirable transmission, lightness, CTE, etc. However, one skilled in the art will learn from the disclosure herein that one cannot indiscriminately substitute fining agents and expect that the coloration of the resultant glass-ceramic will not be affected. Indeed, significant care must be taken as to process parameters and compositions in order to arrive at a desired brown-grey coloration.

[0023] By way of example, one or more embodiments herein may employ tin oxide (SnO_2) as a fining agent in the precursor glass process. Tin oxide is a more powerful reducing agent than alternatives such as arsenic trioxide and antimony trioxide, and therefore its influence on the coloration and optical transmission properties of the glass-ceramic is different from that of the other compounds. Indeed, although SnO_2 may have an initial function as a fining agent, the presence of the compound may indirectly affect coloring and light transmission of the glass-ceramic by reducing colorants such as vanadium oxide (V_2O_5) and iron oxide (Fe_2O_3) present during ceramming. It is advisable to minimize, indeed even to avoid, any phenomenon of devitrification and to control the influence of SnO_2 on the optical transmittance and the optical reflection. The effects of V_2O_5 and Fe_2O_3 on coloration will be discussed in more detail later herein.

[0024] It is not excluded from the composition of the glass-ceramics to comprise, in a more or less significant amount, in addition to V_2O_5 , Fe_2O_3 , MnO , Bi_2O_3 and Cr_2O_3 , at least one additional colorant, such as CoO , CuO , MnO_2 , NiO or CeO_2 . However, the presence of such an additional colorant should not significantly influence the targeted optical transmittance curve and the targeted appearance in reflection.

[0025] Thus, CoO can a priori be present only in a very low amount in so far as this component strongly absorbs in the infrared and not insignificantly at 625 nm and confers a blue coloring in reflection. In embodiments, the chemical composition of the glass-ceramic comprises less than 200 ppm, e.g., less than 100 ppm, 50 ppm, 30 ppm or 0 ppm of cobalt oxide.

[0026] Likewise, the NiO content is at most 500 ppm, in particular 200 ppm, indeed even zero, with the exception of inevitable traces. The CeO_2 content is at most 0.5%, in particular 0.1%, indeed even zero, except for inevitable impurities. The MnO_2 content is at most 0.5%, in particular 0.1%, indeed even zero, except for inevitable impurities. The CuO content is preferably at most 500 ppm, in particular 200 ppm, indeed even zero, except for inevitable impurities.

[0027] In embodiments, the composition of the glass-ceramics does not comprise refining aids, such as F and Br. With the exception of inevitable traces, it does not comprise F or Br. This is particularly advantageous in the light of the price and toxicity of these compounds.

[0028] After crystallization, the dominant crystal-phase in LAS type glass-ceramic is a high-quartz solid solution, and when the glass-ceramic is subjected to a more intense heat treatment, the high-quartz solid solution transforms into a keatite-solid solution (which is sometimes called beta-spodumene). This transition is non-reversible and reconstructive, which means that bonds in the crystal-lattice are broken and new bonds are arranged.

[0029] In an LAS type glass-ceramic, it is possible to adjust the coefficient of thermal expansion (CTE) over a wide range by adjusting the initial glass composition, the nature and amount of the crystalline phases and the amount and composition of the residual glass. For purposes of one or more embodiments herein, a low or even zero CTE is desired, which may be obtained by controlling the ceramming heat treatment process to balance the negative and positive CTE contributions of the dominant crystalline phase of the LAS glass-ceramic and residual glass phase(s). Once again, however, one cannot indiscriminately adjust the ceramming temperatures to account for desired CTE without considering the effect that such may have on the coloration and/or transmission of the resultant glass-ceramic. Indeed, it has been discovered that the ceramming temperatures have a significant effect on the lightness, L^* , and the color of the resultant glass-ceramic.

[0030] In view of the foregoing, various embodiments have been discovered that provide for glass-ceramics, free of arsenic and/or of antimony, having very desirable integrated visible transmission, optical transmission, infra-red transmission, coefficient of thermal expansion, lightness, and coloration.

[0031] To this end, the subject matter of the disclosure, according to embodiments, relates to a glass-ceramic of the lithium aluminosilicate type comprising a solid solution of β -spodumene and exhibiting, for a thickness of 4 mm:

[0032] a light transmittance within a range extending from 0.3 to 2% or from 0.3 to 6%, in particular from 0.6 to 1.7%,

[0033] an optical transmittance for a wavelength of 625 nm of greater than 1.0%, or 2.0%, in particular of greater than 3.0%,

[0034] an optical transmittance for a wavelength of 950 nm within a range extending from 35 to 75% or from 50 to 75%,

[0035] an optical transmittance for a wavelength of 1600 nm of at least 45%, in particular at least 50%, and

[0036] L^* , a^* , b^* colorimetric coordinates in diffuse reflection for an illuminant D65 and a reference observer at 2° such that: $15.0 \leq L^* \leq 40.0$, $-3.0 \leq a^* \leq 3.0$ and $-10.0 \leq b^* \leq 3.0$.

[0037] In embodiments, the glass-ceramic has an optical transmittance for a wavelength of 450 nm of less than 0.1%.

[0038] Such glass-ceramics may comprise the following constituents, varying within the limits by weight defined below:

SnO ₂	0.2-0.6%, e.g., 0.25-0.5%;
V ₂ O ₅	0.015-0.06%, e.g., 0.015-0.05%;
Cr ₂ O ₃	0.01-0.04% or Bi ₂ O ₃ 0.05-3.0% or MnO 0-1%;
Fe ₂ O ₃	0.05-0.15%; and
As ₂ O ₃ + Sb ₂ O ₃	<0.1%, e.g., <0.05%.

[0039] In embodiments, the solid solution of β -spodumene represents at least 20% by weight, in particular 30% by weight or 40% by weight, of the total crystalline fraction. The glass-ceramic comprises a solid solution of β -spodumene as main crystal phase. In some cases, the solid solution of β -spodumene can represent more than 50% by weight, in particular 60% by weight and even 70% by weight or 80% by weight of the total crystalline fraction. The glass-ceramic can even sometimes comprise a solid solution of β -spodumene as the sole crystal phase, though in addition

to the solid solution of β -spodumene, the glass-ceramic can comprise a solid solution of β -quartz. The crystalline fraction can thus, in embodiments, comprise a mixture of a solid solution of β -spodumene and of a solid solution of β -quartz, in proportions by weight of at least 20:80, in particular 40:60, indeed even 50:50 and even 60:40 or 70:30. In some cases, this proportion can even be at least 80:20, 90:10 or 95:5. The amounts of a given crystal phase can be determined in x-ray diffraction by the Rietveld method. The crystal fraction normally represents at least 60% by weight, in particular 70% by weight and even 75% by weight of the glass-ceramic.

EXPERIMENTS

[0040] In connection with the development of the embodiments herein, a number of experiments were conducted on numerous samples of material. In particular, a number of glass samples of varying composition were subject to ceramming at different temperatures in order to evaluate the aforementioned characteristics.

Glass Compositions

[0041] The specific glass compositions utilized to produce the precursor glasses, and/or glass-ceramic materials of the examples herein are listed in the table shown in FIG. 1. The compositions all belong to the LAS system with the following preferred composition ranges (in weight %): 60-72% SiO₂, 18-23% Al₂O₃, 2.5-4.5% Li₂O, 0-2.5% ZrO₂, 1.5-4% TiO₂, 0-3% MgO, 0-3% ZnO, 0-5% BaO, 0-5% SrO (with $0 \leq \text{BaO} + \text{SrO} \leq 5$), 0-2% CaO, 0-1.5% K₂O, 0-1.5% Na₂O (optionally with $0 \leq \text{CaO} + \text{K}_2\text{O} + \text{Na}_2\text{O} \leq 1.5$ or 1.25 or 1.0), 0-5% P₂O₅, 0-2% B₂O₃, 0-0.3% V₂O₅, 0.12-0.4% Fe₂O₃, 0.01-0.04% Cr₂O₃, 0-0.05% CoO, 0-0.3% NiO, 0-1% MnO, 0.05-3% Bi₂O₃, 0-0.2% CeO₂, and/or 0-0.6% SnO₂.

[0042] Further example composition ranges (in weight %) include: 60-72% SiO₂, 18-23% Al₂O₃; 2.5-4.5% Li₂O; 0-3% MgO; 1-3% ZnO; 1.5-4% TiO₂; 0-2.5% ZrO₂; 0-5% BaO; 0-5% SrO; with BaO+SrO 0-5%; 0-2% CaO; 0-1.5% Na₂O; 0-1.5% K₂O; 0-5% P₂O₅; and 0-2% B₂O₃.

[0043] The ZrO₂ and TiO₂ components are used for nucleation, and the SnO₂ is used as a fining component.

[0044] The content by weight of MgO, if used, is at most 2%, e.g., at most 1%. If used, the content by weight of CaO is at most 1%. The sum of contents by weight of Na₂O and K₂O is, in embodiments, at most 1%, e.g., at most 0.5%. The content by weight of BaO, if used, is at most 3%, e.g., at most 2% or at most 1%. These different example ranges, alone or in combination, may be employed to decrease the thermal expansion coefficient of the glass-ceramic.

[0045] The V₂O₅, Fe₂O₃, Cr₂O₃, CoO, NiO, MnO, Bi₂O₃ and/or CeO₂ are used for coloring. Fe₂O₃ and Cr₂O₃ were specifically chosen to develop a brown-grey coloration after ceramming.

[0046] Table 4 is a table of compositions suitable for use as a glass precursor, and/or a glass-ceramic material in accordance with one or more embodiments described and/or disclosed herein.

TABLE 4

Oxides (Weight)	Exam- ple 1	Exam- ple 2	Exam- ple 3	Exam- ple 4	Exam- ple 5	Exam- ple 6	Exam- ple 7	Exam- ple 8	Exam- ple 9	Exam- ple 10	Exam- ple 11	Exam- ple 12
SiO ₂	64.81	64.62	64.62	64.65	64.61	65.57	65.57	65.62	67.16	67.22	66.52	67.52
Al ₂ O ₃	20.8	20.8	20.8	20.8	20.8	20.8	20.8	20.8	19.2	19.2	20.8	20.8
Li ₂ O	3.8	3.8	3.8	3.8	3.8	3.8	3.8	3.8	3.5	3.5	3.8	3.8
MgO	0.35	0.35	0.35	0.35	0	0.35	0.35	0.35	1.3	1.3	0.35	0.35
ZnO	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.7	1.7	1.5	1.5
BaO	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5	1.8	1.8	1.5	0.5
TiO ₂	3	3	3	3	3	3	3	3	3	3	3	3
ZrO ₂	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4
SnO ₂	0.35	0.35	0.35	0.35	0.35	0.35	0.35	0.35	0.35	0.35	0.35	0.35
K ₂ O	0.25	0.25	0.25	0.25	0.25				0.1	0.1		
Na ₂ O	0.6	0.6	0.6	0.6	0.6				0.2	0.2		
CaO	0.4	0.4	0.4	0.4	0.4	0.4	0.4	0.4			0.4	0.4
V ₂ O ₅	0.062	0.167	0.11	0.13	0.167	0.062	0.062	0.062			0.072	0.072
CoO	0.0013	0.0013	0.0013	0.0013	0.0013				0.025	0.015		
Fe ₂ O ₃	0.160	0.250	0.300	0.250	0.250	0.250	0.250	0.200	0.250	0.200	0.280	0.280
Cr ₂ O ₃	0.0173	0.0173	0.0173	0.0173	0.021	0.0173	0.022	0.022	0.2	0.2	0.26	0.26
NiO												
CeO ₂												

[0047] Notably, the compositions of Table 4 contain SnO₂ as a fining agent. The amount of SnO₂ present may be significant in order to achieve the desired fining functionality; however, any devitrification should be minimized or even avoided and the influence of the SnO₂ on the integrated optical transmission should be controlled. Indeed, SnO₂ is capable of reducing the vanadium oxide and the iron oxide present during ceramming, although due to the high raw material cost for SnO₂, its use is advantageously minimized. A SnO₂ content of up to about 0.6%, e.g., from about 0.1% to 0.4% by weight may be used. Embodiments herein contain one of: (i) from about 0.1% to about 0.3% by weight

ceramic. It may incidentally be noted that the precursor glasses may exhibit an optical transmittance, for any wavelength between 1000 and 2500 nm, of greater than 60% for a thickness of 3 mm.

[0050] In embodiments, the sum of the contents of SiO₂, Al₂O₃, Li₂O, MgO, ZnO, TiO₂, ZrO₂, BaO, SrO, CaO, Na₂O, Li₂O, K₂O, P₂O₅, B₂O₃, SnO₂, V₂O₅, Fe₂O₃, Cr₂O₃, MnO and Bi₂O₃ in the glass-ceramic is at least 98%, in particular 99%.

[0051] Table 1 summarizes further example glass compositions according to various embodiments. Composition C1 (comparative) comprises neither Bi₂O₃ nor Cr₂O₃.

TABLE 1

	C1	S1	S2	S3	S4	S5	S6	S7
SiO ₂	65.53	65.45	65.02	65.20	65.59	65.57	65.55	65.49
Al ₂ O ₃	20.48	20.65	20.48	20.48	20.48	20.69	20.68	20.48
Li ₂ O	3.75	3.75	3.75	3.75	3.75	3.76	3.76	3.75
Na ₂ O	0.56	0.60	0.56	0.56	0.28	0.3	0.6	0.28
K ₂ O	0.23	0.22	0.23	0.23	0.12	0.12	0.22	0.12
MgO	0.24	0.37	0.24	0.24	0.24	0.37	0	0.24
ZnO	1.51	1.52	1.51	1.51	1.51	1.52	1.52	1.51
BaO	2.55	2.46	2.55	2.55	2.55	2.46	2.46	2.55
CaO	0.36	0.45	0.36	0.36	0.36	0.45	0.45	0.36
TiO ₂	3.02	2.96	3.02	3.02	3.02	2.97	2.97	3.02
ZrO ₂	1.35	1.30	1.35	1.35	1.35	1.3	1.3	1.35
SnO ₂	0.29	0.31	0.29	0.29	0.29	0.31	0.31	0.29
V ₂ O ₅	0.0171	0.0355	0.0200	0.0200	0.0200	0.0355	0.0355	0.02
Fe ₂ O ₃	0.0804	0.1220	0.1200	0.1200	0.1200	0.1220	0.1220	0.12
Cr ₂ O ₃		0.0215		0.0200	0.0200	0.0215	0.0215	0.02
Bi ₂ O ₃			0.50	0.30	0.30			
CoO	0.0289	0.0015				0.0015	0.0015	
MnO								0.4

of SnO₂; (ii) from about 0.2% to about 0.3% by weight of SnO₂; and (iii) about 0.2% to about 0.4% by weight.

[0048] Accordingly, the disclosed glass-ceramics contain neither As₂O₃ nor Sb₂O₃ in any significant amount (i.e., they may contain only traces of one and/or the other of these toxic compounds). If traces of one or the other are present, then such may likely be quantified as As₂O₃+Sb₂O₃ is less than about 1000 ppm, i.e., less than 500 ppm.

[0049] In embodiments, the glass precursor compositions exhibit the bulk composition of the corresponding glass-

Processing Conditions

[0052] Each of the samples was subject to the following basic process. First the raw materials were melted by pre-heating in a furnace at 1550° C., followed by heating for 30 minutes at 1550° C., heating for 60 minutes from 1550° C. to 1650° C., and heating for 360 minutes at 1650° C. Next, the glass was rolled to a thickness of between about 4-6 mm, and then annealed at 650° C. for about 1 hour.

[0053] Finally, the samples were cerammed in a static furnace in accordance with the following cycle: (i) rapid

heating from room temperature to about 655° C. for about 20 to 40 minutes; (ii) nucleation from about 650° C. to about 820° C. for about 15 to 30 minutes; (iii) heating from about 820° C. to the maximum ceramming temperature for about 10 to 20 minutes (notably, the maximum ceramming temperature can vary from about 950° C. to about 1060° C.); (iv) crystallization at the maximum ceramming temperature for about 5 to 15 minutes; and (v) rapid cooling from about 20 to 40 minutes to room temperature.

[0054] By way of further specifics, the thermal cycle may be: (i) rapid heating from room temperature to about 655° C. for about 25 minutes; (ii) heating from about 650° C. to about 820° C. for about 24 minutes; (iii) heating from about 820° C. to the maximum ceramming temperature for about 12 to 15 minutes; (iv) crystallization at the maximum ceramming temperature for about 8 minutes; (v) rapid cooling down to about 900° C. for about 5 minutes; and (vi) rapid cooling (from about 20 to 40) minutes to room temperature.

[0055] The ceramization is carried out at temperatures that make possible the development of a solid solution of β -spodumene. The ceramization temperature, which can vary as a function of the glass matrix, can be chosen using differential thermal analysis, which can be used to determine the crystallization temperature of the β -quartz phase and then, at a higher temperature, of the temperature at which the transformation (irreversible) of β -quartz into β -spodumene takes place. The ceramization temperature, according to various embodiments, is at least 950° C., e.g., 970° C., 1000° C. or 1020° C.

Experimental Results

[0056] Table 5 is a table showing certain characteristics of each glass-ceramic sample as well as the associated maximum ceramming temperature. Notably, the maximum ceramming temperature varied between about 1025-1040° C. Given the glass composition system discussed above, and given that the ceramming treatment used thermal cycles higher than 950° C., the resulting material of all the samples presented a crystallographic structure that was mainly composed of beta-spodumene glass-ceramic.

[0057] Additional glass-ceramic results for the glass compositions from Table 1 are summarized in Tables 2 and 3. Data in Table 2 (as in Table 5) include the type of glass used for the ceramization, the ceramization temperature (denoted T and expressed in ° C.), the stationary-state time at the ceramization temperature (denoted t and expressed in minutes), the thickness of the plate (denoted th and expressed in mm), the transmittance properties at the true thickness calculated from a transmittance spectrum recorded by spectrophotometry, including the light transmittance within the meaning of the standard EN 410 (denoted LT), and the transmittances for a wavelength of 625 nm (denoted T625), of 950 nm (denoted T950) and of 1600 nm (denoted T1600), the L*a*b* colorimetric coordinates in diffuse reflection, calculated from a diffuse reflection spectrum, obtained using a spectrophotometer equipped with an integrating sphere under perpendicular incidence and after subtraction of the specular reflection and of a base line obtained by the same measurement carried out on Spectralon®, and the type of crystals, where Q denotes β -quartz as main crystal phase and S denotes the significant presence of β -spodumene as crystal phase.

TABLE 2

	A	B	C	D	E
Glass	S1	S1	S1	C1	S2
T(° C.)	930	1020	1020	1020	1020
t(min)	4	10	12	10	10
th(mm)	4.08	3.90	3.90	4.21	4.24
LT(%)	1.1	0.85	0.62	0.86	0.40
T625(%)	3.6	3.3	3.8	34.6	22.1
T950(%)	61.1	60.9	59.7	66.3	51.5
T1600(%)	65.4	64.9	64.9	62.7	66.3
L*	1.7	22.6	23.2	20.9	38.4
a*	0.1	-0.5	-0.5	7.7	1.8
b*	-0.6	-2.5	-2.6	-19.4	-7.8
Crystals	Q	S	S	S	S

	F	G	H	I	J
Glass	S3	S4	S5	S6	S7
T(° C.)	1020	1020	1020	1020	1020
t(min)	10	10	10	10	10
th(mm)	3.67	4.14	3.89	3.82	4

TABLE 5

Properties		Example 1	Example 2	Example 3	Example 4	Example 5	Example 6	Example 7	Example 8	Example 9	Example 10	Example 11	Example 12
Ceramming temperature (° C.)		1040° C.	1035° C.	1025° C.	1035° C.	1035° C.	1030° C.	1040° C.	1030° C.	1025° C.	1030° C.	1045° C.	1045° C.
CTE (×10 ⁻⁷ /° C.)			13				9.4					8.5	7.2
Reflected	L*	33.94	33.64	33.38	31.31	33.3	29.83	32	28.93	33.3	35.15	30.24	27.3
Color	a*	0.24	0.82	1.14	0.37	0.93	0.82	1.05	0.37	0.25	0.15	0.92	0.54
Thickness	b*	-0.22	1.17	2.3	-0.06	1.27	-0.42	0.43	-0.87	0.24	1.49	-1.29	-1.47
5.2 mm													
Reflected	L*	35.1	32.64	34.4	31.46	32.34	30.36						
Color	a*	0.05	1.03	2.08	0.8	1.57	3.4						
Thickness	b*	-1.63	0.18	1.46	-0.96	0.8	0.62						
4 mm													
Transmission	T1	0.49	0.98	3.84	1.06	1.69	4.87					3.34	2.92
(%)	625 nm	2.09	4.18	12.67	4.33	6.66	12.86					10.19	9.20
Thickness	950 nm	53.65	50.3	54.77	53.98	53.88	55.36					51.79	52.62
4 mm	1600 nm	61.49	52.64	49.61	56.88	54.19	52.19					46.06	46.39

TABLE 2-continued

LT(%)	1.90	1.12	0.67	1.04	0.45
T625(%)	37.8	29.6	2.4	3.7	1.7
T950(%)	65.9	59.7	60.1	64.3	52
T1600(%)	70.1	67.3	65.9	68.9	50.9
L*	25.3	29.9	17.0	20.1	16.5
a*	0.8	-1.5	1.4	1.0	0.5
b*	-6.8	-2.6	-6.6	-7.9	-4.3
Crystals	S	S	S	S	S

[0058] Comparative example A exhibits a black appearance in reflection. As a result of a ceramization temperature which is too low to make possible the growth of crystals of β -spodumene, it is crystallized essentially in the 3-quartz form. When the same glass composition is ceramized at a higher temperature (Examples B and C), the transmittance properties are substantially retained but the appearance in diffuse reflection is completely modified, as is evidenced by the higher L* value. These samples exhibit the desired grey color.

[0059] In the case of comparative example D, the glass-ceramic having the comparative composition C1, even when ceramized so as to bring about the growth of β -spodumene, the glass-ceramic exhibits a blue color in reflection, characterized by a very negative b* value and an excessively high a* value.

[0060] In comparison with examples B and C, example E has both a lower light transmittance and a lighter grey color in reflection. Examples F to I are other examples according to various embodiments.

[0061] A further example glass-ceramic (sample R231) was ceramized at a maximum ceramming temperature of 1020° C. for 10 min. The glass-ceramic has the following optical properties and composition (in wt. %): LT: 1.04%, T625: 3.95%, T950: 60.95%, T1600: 65%. L*: 21.64, a*: -0.38, b*: -1.31, SiO₂: 64.91%, Al₂O₃: 20.73%, Li₂O: 3.75%, BaO: 2.45%, ZnO: 1.51%, CaO: 0.44%, MgO: 0.37%, K₂O: 0.22%, Na₂O: 0.59%, Fe₂O₃: 0.1248%, Cr₂O₃: 0.0233%, V₂O₅: 0.055%, ZrO₂: 1.3%, TiO₂: 2.96%, SnO₂: 0.31% and As₂O₃+Sb₂O₃: 0.083%.

Coefficient of Thermal Expansion

[0062] As noted above, one of the desired characteristics of the glass-ceramic is a coefficient of thermal expansion (CTE) of lower than about $15 \times 10^{-7}/K$, e.g., lower than about $10 \times 10^{-7}/K$ (measured between about 20° C. to about 700° C.). As shown in Table 5, the achieved CTE was indeed less than about $15 \times 10^{-7}/K$. Such a CTE, however, is higher than for beta-quartz glass ceramic material (which is generally obtained using lower ceramming temperatures). In general, beta-quartz glass ceramic material exhibits a CTE close to zero. It has been discovered that in order to obtain a CTE of less than about $15 \times 10^{-7}/K$, or less than about $11 \times 10^{-7}/K$, in a beta-spodumene glass-ceramic, the content of the Na₂O, K₂O and/or CaO can be minimized as evidenced by comparing Examples 2 and 6.

Lightness L*

[0063] Additionally and/or alternatively, another of the desired characteristics of the glass-ceramic is a lightness L* between about 15-40, e.g., 20-40 or 25-40. By way of example, the lightness L* may be measured in reflection using a white background with illuminant D65 at 10° observer conditions. As illustrated in FIG. 1, it has been

discovered that the glass-ceramic materials formed from the glass compositions of Table 4 and Table 1 will exhibit a lightness L* that varies as a function of ceramming temperature. Indeed, as shown in FIG. 1, Example 1 (labeled "1") shows that if the ceramming temperature is varied between about 950° C. to about 1060° C. the lightness L* values will vary from about 25 to about 45. The relationship between lightness L* and ceramming temperature is also exhibited in Examples 2 and 3 in FIG. 1. The increasing value of the lightness L* is caused by a resultant increase of the diffusion back-scattering of the light by the material arising from the increase of the ceramming temperature. Thus, using a ceramming temperature of less than about 950° C. produces a glass-ceramic material with a lightness L* of less than 25 and using a ceramming temperature of greater than 1060° C. produces a glass-ceramic that is too opaque, having a lightness of greater than 45.

Light Transmission Characteristics

[0064] Additionally and/or alternatively, other characteristics of the glass-ceramics are related to certain light transmission characteristics, which may be quantified, for example, using the known illuminant D65, 2° observer test on, for example, 4-5.5 mm thick samples. Such transmission characteristics include integrated visible transmission (TI), which may be measured between about 380-780 nm; optical transmission measured at about 625 nm; optical transmission measured at about 950 nm; and/or infra-red optical transmission, which may be measured at about 1600 nm.

[0065] By way of example, the integrated visible transmission (TI) may be one of: (i) between about 0.3% to about 6%; (ii) between about 0.4% to about 5%; (iii) between about 0.5% to about 5%; (iv) between about 0.6% to about 4%; (v) between about 0.7% to about 3%; (vi) between about 0.8% to about 2%; (vii) between about 0.3% to about 2%; (viii) between about 0.6% to about 1.7%; (ix) between about 1% to about 1.7%; and (x) between about 1.1% to about 1.6%. Notably, the range of 0.8% to about 2% is preferred when, for example, one wishes to permit an observer to see with some level of clarity, for example, heating elements glowing below a radiant cooktop without being distracted or overwhelmed by them. Indeed, in some embodiments it may be desirable to permit some level of light transmission for seeing through the glass-ceramic (e.g., for control panel displays), but not too much light transmission, e.g., providing limited clarity of vision at items behind the glass-ceramic. For instance, for low light transmittances, the heating elements (in particular of the radiant type) are not visible when they are in use, which presents safety problems. On the other hand, when the light transmittance is too high, the heating elements are visible even when not in use, which presents an esthetic problem.

[0066] It has been discovered that MnO, Bi₂O₃, Fe₂O₃, CoO, Cr₂O₃, NiO and CeO₂ may be used to tune the characteristic of the integrated visible transmission (TI) of the glass-ceramic material. At least one of these oxides may be used to reach the desired value of the integrated visible transmission. Notably, the Fe₂O₃ content and the V₂O₅ content (although both are primarily employed for coloration) have a relationship to one another as concerns the integrated visible transmission (TI). Indeed, it has been found that the amount of Fe₂O₃ may be increased in the

composition as the V_2O_5 increases in order to obtain a material with an integrated visible transmission of greater than about 0.5%.

[0067] It has been found that in order to achieve the desired integrated visible transmission (TI) of the glass-ceramic material, in addition to Fe_2O_3 and Cr_2O_3 , at least one of the following oxides may be used: V_2O_5 , CoO , NiO , MnO , Bi_2O_3 and CeO_2 . Thus, as can be seen in Table 4, each sample includes at least one of the aforementioned oxides.

[0068] Additionally and/or alternatively, the optical transmission (measured at about 625 nm) may be one of: (i) higher than about 1%; (ii) higher than about 2%; (iii) higher than about 3%; (iv) higher than about 3.5%; (v) higher than about 4%; and (vi) higher than about 5%. For example, an optical transmission (at about 625 nm) of greater than about 2%, e.g., greater than about 3.5%, may be suitable for radiant cook-top applications. The optical transmission (at about 625 nm) is typically at most 5%. Additionally, such characteristic would permit one to see through the ceramic material in applications where there were red LEDs behind the material.

[0069] In some embodiments, such as when certain types of electronic controls are employed in a product (e.g., IR touch controls), it may be desirable to control the optical transmission (measured at about 950 nm). For example, the optical transmission (measured at about 950 nm) may be one of: (i) between about 35-75%; (ii) between about 50-70%; and (iii) between about 45-55%. Further example optical transmission ranges (measured at about 950 nm) include 50-75% and 55-70%. In addition to providing good performance for cooktop applications in general, the preferred range of between about 50%-70% would permit the use of infrared (IR) touch controls on a product, such as on a cooktop appliance.

[0070] Additionally and/or alternatively, the infra-red optical transmission (e.g., measured at about 1600 nm) may be one of: (i) between about 45-80%; (ii) between about 50-75%; and (iii) between about 45-60%. Further example IR transmission ranges (measured at about 1600 nm) include greater than 45%, i.e., 55-80% and 60-75%. An example range of between about 50%-75% provides good heating performance in a cooktop application. In a cooktop application, it has been found that an infra-red optical transmission of less than about 50% begins to show signs of reduced ability to heat an item placed thereon, and an infra-red optical transmission of more than about 75% can begin to show signs of excessive heating of materials located in proximity of, but outside, a desired heating zone.

Color Characteristics

[0071] As discussed above, an aspect of the embodiments herein are their color characteristics. Indeed, for commercial purposes it may be desirable to achieve a glass-ceramic having the aforementioned functional properties as well as certain coloration, specifically in the grey family, such as brown-grey.

[0072] In this regard, reference is now made to FIG. 2, which is a graph on a Cartesian coordinate system illustrating the effect of certain coloring agents within the glass compositions of the embodiments herein. The y-axis (ordinate) represents the hue (b^*), blue-yellow component of color, while the x-axis (abscissa) represents the hue (a^*), green-red component of color. The color values on the graph may be quantified, for example, using the known illuminant

D65, 10° observer test, which was used to measure color of the 4 mm thick and 5.2 mm thick samples herein. The a^* and b^* coordinates are typically measured simultaneously with the L^* value.

[0073] The primary contributors to variations in the color of the resultant glass-ceramic are vanadium oxide (V_2O_5), chromium oxide (Cr_2O_3) or bismuth oxide (Bi_2O_3) or manganese oxide (MnO), and iron oxide (Fe_2O_3). This combination of coloring agents permits relatively high quantities of Cr_2O_3 and Fe_2O_3 without incurring significant cost insofar as iron and chromium are readily available at low cost.

[0074] V_2O_5 , in the presence of SnO_2 , significantly darkens the glass during ceramming, as V_2O_5 is responsible for absorption of light having wavelengths mainly below 700 nm. Yet, even in the presence of V_2O_5 and SnO_2 it is possible to retain sufficiently high optical transmission at 650 nm, 950 nm and in the infra-red optical transmission frequencies (e.g., 1600 nm). In accordance with embodiments herein, an amount of V_2O_5 may be one of: (i) between about 0% to 0.3%; (ii) between about 0.005% to 0.2%; (iii) between about 0.05% to 0.1%; (iv) between about 0.015% to 0.060%; (v) between about 0.015 to 0.050%; and (vi) between about 0.015% and 0.035%.

[0075] Chromium oxide (Cr_2O_3) has been found to be suitable for providing a darkening function of wavelengths within the visible range (e.g., between about 400-60 nm) while retaining high transmission in the wavelengths between about 600 and 800 nm. In accordance with embodiments herein, an amount of Cr_2O_3 may be one of: (i) between about 0.01% to 0.04%; (ii) between about 0.01% to 0.02%; (iii) between about 0.016% to 0.018%; (iv) between about 0.02% to 0.03%; (v) between about 0.015% to 0.035%; (vi) between about 0.02% to 0.035%; (vii) between about 0.015% to 0.025%; and (viii) between about 0.01% to 0.03%. Due to the presence of Cr_2O_3 in the composition, the glass-ceramic shows low transmission in the blue range.

[0076] Bismuth oxide (Bi_2O_3) may be used as an alternative or complement to chromium oxide. The content by weight of Bi_2O_3 is within a range extending from 0.05 to 3.0%, in particular from 0.1 to 1.5%, 0.1 to 2.0%, 0.1 to 1.0%, indeed even from 0.2 or 0.3 to 0.5% or 1.0%.

[0077] Iron oxide (Fe_2O_3) leads to absorption mainly in the infra-red wavelengths, however, iron oxide is also involved in the visible wavelengths and affects the coloration of the glass-ceramic. In accordance with embodiments herein, an amount of Fe_2O_3 may be one of: (i) between about 0.12% to 0.4%; (ii) between about 0.15% to 0.35%; (iii) between about 0.16% to 0.25%; (iv) between about 0.07% to 0.12%; (v) between about 0.05% to 0.15%; and (vi) between about 0.05% to 0.4%. Notably, the effect of Fe_2O_3 within the listed compositions may be adjusted by varying the vanadium oxide content. For example, at Fe_2O_3 content greater than about 0.15%, transmission in the visible range is slightly increased (probably because SnO_2 preferentially reduces Fe_2O_3 and, as a consequence, the amount of reduced vanadium is lower). Such lightening of the glass-ceramic may then be compensated by a greater V_2O_5 content (however remaining within the range indicated above).

[0078] With reference still to FIG. 2, as the content of Cr_2O_3 is increased, the hue (b^*) moves from negative levels (blue) to positive levels (yellow). Comparative Example 7 (labeled "7") is depicted for illustration. As the content of Fe_2O_3 is increased, the hue (a^*) moves from low positive levels (green) to higher positive levels (red), and the hue

(b*) moves from negative levels (blue) to positive levels (yellow). A number of samples are shown on the illustrated plot. A first sample (labeled “1” and corresponding to Example 1 of Table 4) was of a base composition within the ranges discussed above, including 0.0173% Cr₂O₃ and 0.16% Fe₂O₃. Such a composition is clearly on the blue side of the coloration scale illustrated. A second sample (labeled “2” and corresponding to Example 2 of Table 4) was also of a base composition within the desired ranges, including 0.0173% Cr₂O₃ and 0.25% Fe₂O₃. The composition exhibited movement in both the yellow and red directions (i.e., towards brown) of the coloration scale illustrated. A third sample (labeled “5” and corresponding to Example 5 of Table 4) was also of a base composition within the desired ranges, including 0.021% Cr₂O₃ and 0.25% Fe₂O₃. The composition exhibited further movement in both the yellow and red directions of the coloration scale illustrated. A fourth sample (labeled “3” and corresponding to Example 3 of Table 4) was also of a base composition within the desired ranges, including 0.0173% Cr₂O₃ and 0.3% Fe₂O₃. The composition exhibited a coloration even closer to a red-brown. Taking the above into consideration, along with one or more other characteristics discussed above, in accordance with one or more desired embodiments, the hue (a*) may be one of: (i) between about 0 to +4; (ii) +0 to +3; (iii) +0 to +2; (iv) -3 to +3; and (v) -3 to +4. Additionally and/or alternatively, the hue (b*) may be one of: (i) between about -2 to +4; (ii) -1 to +3; (iii) 0 to +2; (iv) -10 to +3; and (v) -10 to +4.

[0079] In embodiments, the colorimetric coordinates observe at least one of the following inequalities, indeed even two or three of these inequalities:

$$20.0 \leq L^* \leq 30.0,$$

$$-1.5 \leq a^* \leq 1.5,$$

$$-5.0 \leq b^* \leq 1.0,$$

[0080] In further embodiments, the colorimetric coordinates observe at least one of the following inequalities, indeed even two or three of these inequalities:

$$15.0 \leq L^* \leq 40.0,$$

$$-3 \leq a^* \leq 4,$$

$$-10.0 \leq b^* \leq 4.0,$$

[0081] The colorimetric coordinates are calculated from a diffuse reflection spectrum, obtained using a spectrophotometer equipped with an integrating sphere, under perpendicular incidence and after subtraction of the specular reflection and of a baseline obtained by the same measurement carried out on Spectralon®.

[0082] With reference to Table 6 a number of samples were prepared having differing compositions as compared with the samples of Table 4. Table 7 is a table of characteristics of the glass-ceramic materials produced using the compositions of Table 6 after a glass ceramming process. It was found that the compositions of comparative examples 1, 2, 3, and 4 were undesirable because the level of Fe₂O₃ was too low and yielded unacceptable values of the integrated optical transmission (TI). It was found that the composition of comparative example 5 was undesirable because it did not contain any Cr₂O₃ and therefore did not yield satisfactory coloration. A similar issue existed for comparative example 7 as it also did not contain any Cr₂O₃. With reference to FIG. 2, the data point for comparative example 7 is shown (see label number 7'), which exhibits a hue (b*) significantly toward blue. When a small amount of Cr₂O₃ is added (see Example 5 or Example 2 of Table 4), the color shifted toward positive values of hue (b*) as shown in FIG. 2 by label number 2 or label number 5. Comparative example 6 is undesirable because it does not include at least one of the oxides (V₂O₅, CoO, NiO, Bi₂O₃, MnO and CeO₂) and therefore does not exhibit satisfactory integrated optical transmission (TI).

TABLE 6

Oxides (weight %)	Comp. Example 1	Comp. Example 2	Comp. Example 3	Comp. Example 4	Comp. Example 5	Comp. Example 6	Comp. Example 7
SiO ₂	64.9	64.6	64.7	67.4	67.2	67.2	64.6
Al ₂ O ₃	20.8	20.8	20.8	19.2	19.2	19.2	20.8
Li ₂ O	3.8	3.8	3.8	3.5	3.5	3.5	3.8
MgO	0.35	0.35	0.35	1.3	1.3	1.3	0.35
ZnO	1.5	1.5	1.5	1.7	1.7	1.7	1.5
BaO	2.5	2.5	2.5	1.8	1.8	1.8	2.5
TiO ₂	3	3	3	3	3	3	3
ZrO ₂	1.4	1.4	1.4	1.4	1.4	1.4	1.4
SnO ₂	0.3	0.35	0.35	0.35	0.35	0.35	0.35
K ₂ O	0.25	0.25	0.25	0.1	0.1	0.1	0.25
Na ₂ O	0.6	0.6	0.6	0.2	0.2	0.2	0.6
CaO	0.4	0.4	0.4				0.4
V ₂ O ₅	0.057	0.167	0.167	0.027	0.027		0.167
CoO	0.0013	0.0013	0.0013				0.0013
Fe ₂ O ₃	0.094	0.037	0.037	0.037	0.250	0.250	0.250
Cr ₂ O ₃		0.0173	0.0173			0.02	
NiO		0.25					
CeO ₂			0.15				

TABLE 7

Properties		Comp. Example 1	Comp. Example 2	Comp. Example 3	Comp. Example 4	Comp. Example 5	Comp. Example 6	Comp. Example 7
Ceramming temperature		1035° C.	1035° C.	1035° C.	1050° C.	1050° C.	1030° C.	1035° C.
CTE ($\times 10^{-7}/^{\circ}\text{C.}$)							9	
Reflected	L*	34.74	27.63	27.71	27.35	34.42	37.04	34.04
Color	a*	0.51	0.49	0.43	2.19	1.02	1.63	1.07
Thickness	b*	-0.92	-3.16	-1.72	11.31	-9.08	5.18	-2.05
5.2 mm								
Reflected	L*	35.96	27.53	28.46				35.09
Color	a*	-0.5	0.61	0.33				1.37
Thickness	b*	-1.54	-2.89	-1.78				-2.39
4 mm								
Transmission	T1	0.36	0.01	0.05				1.22
(%)								
	625 nm	1.54	0.02	0.24				5
	950 nm	58.39	20.54	45.1				52.24
	1600 nm	68.96	22.85	73				52.41

[0083] Within the scope of the disclosed embodiments, it is contemplated that the composition of the glass-ceramic contains, in addition to Fe_2O_3 and Cr_2O_3 , at least one further coloring agent. However, it is important to keep in mind that the presence of one or more further coloring agents may have an influence on the targeted optical transmission characteristics discussed above. Therefore, attention should be paid to possible interactions, even with relatively low levels of such further coloring agents. For example, CoO may only be tolerable in very small amounts because CoO strongly absorbs light in the infra-red wavelengths and in a non-negligible way at wavelengths of about 625 nm.

Variations and Embodiments

[0084] Although the above discussion has been presented primary in terms of obtaining a glass-ceramic for a cooktop, skilled artisans will appreciate that the embodiments herein may be applied to many other products.

[0085] Although the above discussion has been primarily directed to glass compositions, and glass-ceramic properties, skilled artisans will appreciate that the discussion has been provided in significant detail to enable any number of methods and processes to fabricate such glass and glass-ceramic materials and resultant products. In essence, the base process steps may include the heat treatment of a vitrifiable load of raw materials under conditions which successively ensure melting, fining and then ceramming.

The load is a precursor of a glass for producing the glass-ceramic materials discussed above, advantageously having the base composition specified above.

[0086] Although the disclosure herein has been described with reference to particular embodiments, it is to be understood that these embodiments are merely illustrative of the principles and applications of the embodiments herein. It is therefore to be understood that numerous modifications may be made to the illustrative embodiments and that other arrangements may be devised without departing from the spirit and scope of the present application.

What is claimed is:

1. A glass precursor composition, which when subject to ceramming exhibits a lithium aluminosilicate characteristic, containing beta-spodumene as a predominant crystalline phase, the glass precursor comprising, (in weight %):

60-72% SiO_2 , 18-23% Al_2O_3 , and 2.5-4.4% Li_2O ; and 0-0.3% V_2O_5 , 0.05-0.4% Fe_2O_3 , 0.01-0.04% Cr_2O_3 , 0-0.05% CoO, 0-0.3% NiO, and 0-0.2% CeO_2 .

2. The glass precursor of claim 1, further comprising (in weight %): 0-2.5% ZrO_2 , and 1.5-4% TiO_2 .

3. The glass precursor of claim 1, further comprising (in weight %): 0-3% MgO , 0-3% ZnO , 0-5% BaO , 0-2% CaO , 0-1.5% K_2O , 0-1.5% Na_2O .

4. The glass precursor of claim 1, further comprising (in weight %): 0-0.6% SnO_2 .

* * * * *