

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
27 October 2005 (27.10.2005)

PCT

(10) International Publication Number
WO 2005/100727 A1

(51) International Patent Classification⁷:
E05D 15/06

E06B 3/92,

(81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(21) International Application Number:

PCT/IT2005/000203

(22) International Filing Date: 12 April 2005 (12.04.2005)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:

MI 2004 U 000170 15 April 2004 (15.04.2004) IT

(71) Applicant (*for all designated States except US*): UNIFOR S.P.A. [IT/TT]; Via Isonzo 1, I-22078 Turate (IT).

(72) Inventor; and

(75) Inventor/Applicant (*for US only*): MOLTENI, Piero [IT/TT]; Via Visconti di Modrone 38, I-20122 Milano (IT).

(74) Agent: PELLEGGATTA, Ottorino; c/o Calvani, Salvi & Veronelli S.r.l., Piazza Duca d'Aosta, 4, I-20124 Milano (IT).


(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: MULTIPANEL SLIDING DOOR

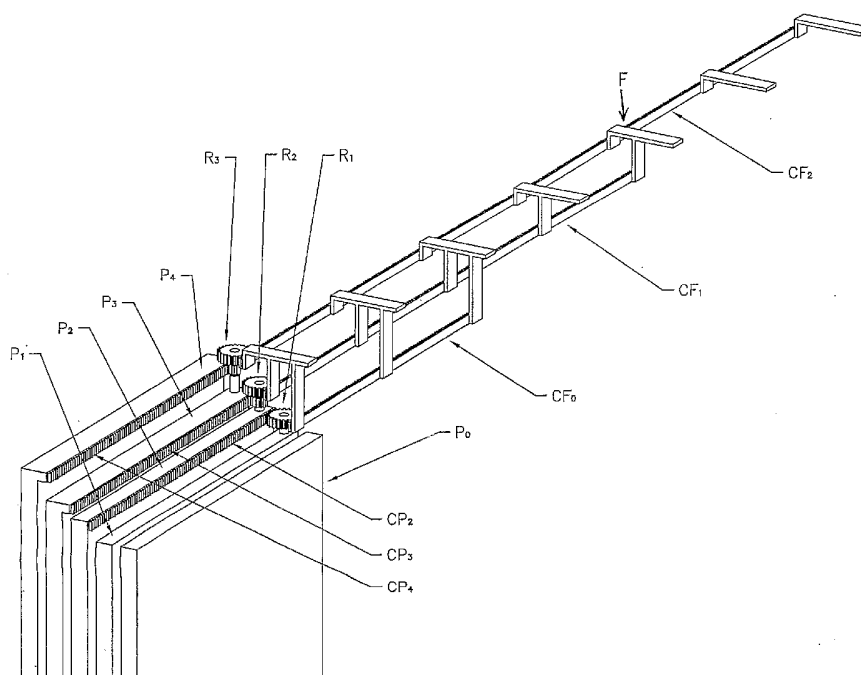

(57) Abstract: The multipanel sliding door comprises at least two panels which are supported for travel in substantially parallel planes along runners, and is characterised in that a rack and wheelwork arrangement is provided for the movement of the door panels.

Description

Improvements in or relating to multipanel sliding doors

Technical Field

5 The present invention relates to multipanel sliding doors, such as those used for providing a controlled access to an entranceway or the like in a wall or similar building structure.

Background Art

10 Multipanel sliding doors of the kind mentioned above generally comprise two or more panels which are supported for travel in substantially parallel planes along runners. In a known arrangement, the door panels are caused to move in a stepwise manner, i.e. the door panels are interconnected to each other in such a way that, in closing
15 the door, a first panel is caused to move in one direction and, once it has covered a certain distance, said first panel engages a second panel and pulls it along in its movement. The second panel, in turn, after having covered a certain distance, engages a third panel, and so on until all the panels of the door are drawn out to the full extension. In
20 opening the door, the panels are moved in the same sequence as described above, but in an opposite direction.

 An arrangement of this kind has at least two significant disadvantages in operation. The first is concerned with the noise produced by the knocking of a moving panel against a stationary
25 panel, when the former is moved into engagement with the latter.

A second disadvantage is that opening and closing of the door is achieved through a number of steps each requiring a pulling or pushing effort which increases with the number of panels which are operated.

5

Disclosure of Invention

The present invention is directed to an improvement to a multipanel sliding door of the kind mentioned above so that said disadvantages are avoided and the operation of the door panels is synchronised.

10

The invention achieves this object by providing a multipanel sliding door comprising at least two panels which are supported for travel in substantially parallel planes along runners, characterised in that a rack and wheelwork arrangement is provided for the movement of the door panels.

15

Brief Description of Drawings

The invention will now be elucidated in connection with the figures of the accompanying drawings, wherein:

20

Fig. 1 is a perspective partial view of a first preferred embodiment of the multipanel sliding door according to the present invention;

Fig. 2 is a side partial view of the multipanel sliding door of Fig. 1;

Fig. 3 is a perspective partial view of a second preferred embodiment of the multipanel sliding door according to the present invention;

Fig. 4 is an exploded perspective partial view of the multipanel sliding door of Fig. 3;

Fig. 5 is a perspective partial view of a third preferred embodiment of the multipanel sliding door according to the present invention; and

Fig. 6 is an exploded perspective partial view of the multipanel sliding door of Fig. 5.

Best Mode for Carrying out the Invention

Referring to Figs. 1 and 2 of the drawings, a first embodiment of the multipanel sliding door is comprised of a door header F extending parallel to a door runner not shown, which may be of any suitable kind known in the art, and a set of adjacent panels $P = \{P_0, P_1, P_2, P_3, P_4\}$, whereof a panel P_0 is stationary and the remaining panels P_1 - P_4 are supported for travel in planes substantially parallel thereto. Panels P_0 - P_4 have preferably equal width L .

For the movement of the panels an arrangement is provided which is comprised of a first set of racks $CF = \{CF_0, CF_1, CF_2\}$ which are fixedly supported by door header F, a second set of racks $CP = \{CP_2, CP_3, CP_4\}$ which are attached to or formed unitarily with panels P_2, P_3, P_4 , respectively, and a set of wheelworks $R = \{R_1, R_2, R_3\}$

which are rotatably mounted on panels P_1, P_2, P_3 , respectively, and are designed to mesh together with first CF and second CP set of racks.

The length of racks CF_0, CF_1, CF_2 is equal to $L, 2L, 3L$, respectively, whereas the length of racks CP_2, CP_3, CP_4 is equal to L .

5 Set of wheelworks R includes wheelwork R_1 formed of a single toothed wheel which is meshed together with rack CF_0 of set CF and with rack CP_2 of set CP, and wheelworks R_2, R_3 each formed of two coaxial and co-rotating toothed wheels, whereof a first larger diameter toothed wheel is meshed together with rack CF_1, CF_2 , respectively, of
 10 set CF and a second smaller diameter toothed wheel is meshed together with rack CP_3, CP_4 , respectively, of set CP.

The selection of a suitable ratio of the diameters of the toothed wheels forming wheelworks of set R is made under the criterion of providing a kinematical link whereby the displacement of the k -th
 15 panel P_k is in any time k times the displacement of panel P_1 .

In fact, in a multipanel sliding door as described above, comprising a set of panels P having each a width L , the door shall reach its full extension when panel P_1 has travelled a distance L , panel P_2 a distance $2L$, panel P_3 a distance $3L$, with respect to fixed panel P_0 .

20 This may be formulated explicitly and generally by the rule that the displacement s_k of the k -th panel P_k is proportional to k , where subscript $k \geq 1$.

For determining in a general way the ratio of the diameters of the toothed wheels forming the k -th wheelwork R_k of set R , one may

note that when panel P_k covers a distance s_k , panel P_{k+1} which is adjacent thereto overtakes the former by a distance which is equal to:

$$s_{k+1} - s_k = \pi n_k d_k \quad (1)$$

5

where n_k is the rotational speed of wheelwork R_k , and d_k is the diameter of the smaller toothed wheel of wheelwork R_k .

The rotational speed of the k -th wheelwork R_k of set R is given by the relationship:

10

$$n_k = s_k / (\pi D_k) \quad (2)$$

where D_k is the diameter of the larger toothed wheel of wheelwork R_k .

Substituting eq. 2 for n_k in eq. 1 gives:

15

$$s_{k+1} - s_k = \pi s_k d_k / D_k \quad (3)$$

Under the general rule that the displacement s_k of the k -th panel P_k , where subscript $k \geq 1$, is proportional to k , eventually the following relationship is obtained:

20

$$D_k / d_k = k \quad (4)$$

Thus, by applying eq. 4 in the case of the multipanel sliding door shown in Figs. 1 and 2, one obtains the following ratios:

25

Wheelwork R_k	Ratio of wheel diameters
	D_k/d_k
R_1	1 ^(*)
R_2	2
R_3	3

(*) Clearly, this corresponds to having a single wheel of diameter D_1 .

By using the above ratios in the design of wheelworks R_k of set R , the displacement s_k of the k -th panel P_k is proportional to k , where
 5 subscript $k \geq 1$, and the extension of the multipanel sliding door may range from L to $(\text{number of panels} + 1) \times L$, L being the width of each panel as mentioned above.

Referring to Figs. 3 and 4 of the drawings, a second embodiment of the multipanel sliding door is comprised of a set of
 10 adjacent panels $P = \{P_0, P_1, P_2, P_3, P_4\}$, whereof a panel P_0 is stationary and the remaining panels P_1 - P_4 are supported for travel in planes substantially parallel thereto. Panels P_0 - P_4 have preferably equal width L . Panels P_0, P_1, P_2 have an extension arm B_0, B_1, B_2 , respectively, at their top which extends in the direction of travel of the
 15 panels.

For the movement of the panels an arrangement is provided which is comprised of a first set of racks $CS = \{CS_0, CS_1, CS_2\}$ which are attached to or formed unitarily with the extension arms B_0, B_1, B_2 of panels P_0, P_1, P_2 , respectively, a second set of racks $CD = \{CD_2,$
 20 $CD_3, CD_4\}$ which are attached to or formed unitarily with panels $P_2,$

P₃, P₄, respectively, and a set of wheelworks $R = \{R_1, R_2, R_3\}$ which are rotatably mounted on panels P₁, P₂, P₃, respectively, and are designed to mesh together with first CS and second CD set of racks.

Racks CS₀, CS₁, CS₂ are facing towards panels P₁, P₂, P₃,
 5 respectively, whereas racks CD₂, CD₃, CD₄ are facing towards panels P₁, P₂, P₃, respectively.

Also in this second embodiment it is desirable that a kinematical link be provided whereby the displacement of the k -th panel P _{k} is in any time k times the displacement of panel P₁.

10 In the second embodiment, one may observe that when panel P _{k} travels a distance s_k , panel P _{$k+1$} adjacent thereto overtakes the former by a distance which is equal to:

$$s_{k+1} - s_k = \pi n_k D_k \quad (5)$$

15

where n_k is the rotational speed of wheelwork R _{k} , and D_k is the diameter of the toothed wheel of wheelwork R _{k} .

The rotational speed of the k -th wheelwork R _{k} of set R is given by the relationship:

20

$$n_k = (s_k - s_{k-1}) / (\pi D_k) \quad (6)$$

Substituting eq. 6 for n_k in eq. 5 gives:

25

$$s_{k+1} - s_k = s_k - s_{k-1} \quad (7)$$

and thus:

$$s_{k+1} = 2s_k - s_{k-1} \quad (8)$$

5 where subscript $k \geq 1$.

Considering that $s_0 = 0$ because panel P_0 is stationary, from eq.
8 one obtains:

Panel P_{k+1}	Displacement s_{k+1}
P_2	$s_2 = 2s_1$
P_3	$s_3 = 2s_2 - s_1 = 3s_1$
P_4	$s_4 = 2s_3 - s_2 = 4s_1$

10 Thus, also with the arrangement of the second embodiment the desired kinematical link is obtained, i.e. the displacement of the k -th panel P_k is in any time k times the displacement of panel P_1 .

Both first and second embodiments include an end panel P_0 which is stationary and the movement of the remaining panels P_1 - P_4
15 occurs always in a certain given direction with respect to the stationary panel.

This limitation can be overcome with the following third embodiment illustrated in Figs. 5 and 6, wherein all the panels are supported for travel in substantially parallel planes and the multipanel
20 sliding door can be extended in either direction desired, depending on which end panel is kept in a fixed position.

Referring to Figs. 5 and 6 of the drawings, the third embodiment of the multipanel sliding door is comprised of a set of adjacent panels $P = \{P_0, P_1, P_2, P_3, P_4\}$, which are supported for travel in substantially parallel planes and have preferably equal width L.

5 For the movement of the panels an arrangement is provided which includes a first set of racks $CS = \{CS_0, CS_1, CS_2\}$ which are attached to or formed unitarily with panels P_0, P_1, P_2 , a second set of racks $CD = \{CD_2, CD_3, CD_4\}$ which are attached to or formed unitarily with panels P_2, P_3, P_4 , respectively, and a set of pairs of
10 wheelworks $R = \{(RS_1, RD_1), (RS_2, RD_2), (RS_3, RD_3)\}$ which are rotatably mounted on panels P_1, P_2, P_3 , respectively, and are designed to mesh together with first CS and second CD set of racks.

Racks CS_0, CS_1, CS_2 are facing towards panels P_1, P_2, P_3 , respectively, whereas racks CD_2, CD_3, CD_4 are facing towards panels
15 P_1, P_2, P_3 , respectively.

Each pair of wheelworks $(RS_1, RD_1), (RS_2, RD_2), (RS_3, RD_3)$ includes a first wheelwork RS_1, RS_2, RS_3 designed to mesh together with rack CD_2, CD_3, CD_4 , respectively, of second set of racks CD and a second wheelwork RD_1, RD_2, RD_3 designed to mesh with rack $CS_0,$
20 CS_1, CS_2 , respectively, of first set of racks CS.

The first and second wheelwork of each pair of wheelworks $(RS_1, RD_1), (RS_2, RD_2), (RS_3, RD_3)$ are interlinked with one another by a transmission T_1, T_2, T_3 , respectively, in order to rotate at the same rotational speed. In the embodiment shown, transmission T_1, T_2, T_3 is
25 formed of an endless belt.

In order to understand the operation of the third embodiment, one may consider for instance panel P_0 as a stationary panel and the remaining panels P_1 - P_4 supported for travel in planes substantially parallel thereto.

5 Also in this third embodiment it is desirable that a kinematical link be provided whereby the displacement of the k -th panel P_k is in any time k times the displacement of panel P_1 .

In the third embodiment, one may observe that when panel P_k travels a distance s_k , panel P_{k+1} adjacent thereto overtakes the former
10 by a distance which is equal to:

$$s_{k+1} - s_k = \pi n_k D_k \quad (9)$$

where n_k is the rotational speed of wheelwork R_k , and D_k is the
15 diameter of the toothed wheel of wheelwork R_k .

The rotational speed of the k -th wheelwork R_k of set R is given by the relationship:

$$n_k = (s_k - s_{k-1}) / (\pi D_k) \quad (10)$$

20

Substituting eq. 10 for n_k in eq. 9 gives:

$$s_{k+1} - s_k = s_k - s_{k-1} \quad (11)$$

25

and thus:

$$s_{k+1} = 2s_k - s_{k-1} \quad (12)$$

5 where subscript $k \geq 1$.

Considering that $s_0 = 0$ because panel P_0 is assumed to be the stationary end panel, from eq. 12 one obtains:

Panel P_{k+1}	Displacement s_{k+1}
P_2	$s_2 = 2s_1$
P_3	$s_3 = 2s_2 - s_1 = 3s_1$
P_4	$s_4 = 2s_3 - s_2 = 4s_1$

10 Thus, also with the arrangement of the third embodiment the desired kinematical link is obtained, i.e. the displacement of the k -th panel P_k is in any time k times the displacement of panel P_1 assuming that P_0 designates the end panel which is kept in a fixed position.

CLAIMS

1. A multipanel sliding door comprising at least two panels which are supported for travel in substantially parallel planes along runners, characterised in that a rack and wheelwork arrangement is provided for the movement of the door panels.
2. The multipanel sliding door of claim 1, characterised in that it is comprised of:
 - a door header F extending parallel to the door runners,
 - a set of n adjacent panels $P = \{P_0, P_1, \dots, P_{n-1}\}$, whereof a panel P_0 is stationary and the remaining $n-1$ panels $P_1, P_2, \dots, P_{n-1}$ are supported for travel in planes substantially parallel thereto, the n panels $P_0, P_1, \dots, P_{n-1}$ of set P having equal width L ,
 - a first set of $n-2$ racks $CF = \{CF_0, CF_1, \dots, CF_{n-3}\}$ which are fixedly supported by door header F, the length of racks $CF_0, CF_1, \dots, CF_{n-3}$ of set CF being equal to $L, 2L, \dots, (n-2)L$, respectively,
 - a second set of $n-2$ racks $CP = \{CP_2, CP_3, \dots, CP_{n-1}\}$ which are attached to or formed unitarily with panels $P_2, P_3, \dots, P_{n-1}$, respectively, of set P , the length of racks $CP_2, CP_3, \dots, CP_{n-1}$ of set CP being equal to L ,
 - a set of $n-2$ wheelworks $R = \{R_1, R_2, \dots, R_{n-2}\}$ which are rotatably mounted on $n-2$ panels $P_1, P_2, \dots, P_{n-2}$,

respectively, of set P and are designed to mesh together with first CF and second CP set of racks,

set R including:

- a wheelwork R_1 formed of a single toothed wheel which is meshed together with rack CF_0 of set CF and with rack CP_2 of set CP, and
- $n-3$ wheelworks $R_2, R_3, \dots, R_{n-2}$ each formed of two coaxial and co-rotating toothed wheels, whereof a first larger diameter toothed wheel is meshed together with rack $CF_1, CF_2, \dots, CF_{n-3}$, respectively, of set CF and a second smaller diameter toothed wheel is meshed together with rack $CP_3, CP_4, \dots, CP_{n-1}$ of set CP, wherein the ratio of the diameter D_k of the larger toothed wheel to the diameter d_k of the smaller toothed wheel of k -th wheelwork R_k is equal to $k = 2, 3, \dots, n-2$.

3. The multipanel sliding door of claim 1 characterised in that it is comprised of:

- a set of n adjacent panels $P = \{P_0, P_1, \dots, P_{n-1}\}$, whereof a panel P_0 is stationary and the remaining $n-1$ panels $P_1, P_2, \dots, P_{n-1}$ are supported for travel in planes substantially parallel thereto, the n panels $P_0, P_1, \dots, P_{n-1}$ of set P having equal width L , and $n-2$ panels $P_0, P_1, \dots, P_{n-3}$ of set P having an extension arm $B_0, B_1, \dots, B_{n-3}$, respectively, at

their top extending in the direction of travel of the panels,

- a first set of $n-2$ racks $CS = \{CS_0, CS_1, \dots, CS_{n-3}\}$ which are attached to or formed unitarily with extension arms $B_0, B_1, \dots, B_{n-3}$, of $n-2$ panels $P_0, P_1, \dots, P_{n-3}$, respectively, of set P,
- a second set of $n-2$ racks $CD = \{CD_2, CD_3, \dots, CD_{n-1}\}$ which are attached to or formed unitarily with panels $P_2, P_3, \dots, P_{n-1}$, respectively, of set P,
- a set of $n-2$ wheelworks $R = \{R_1, R_2, \dots, R_{n-2}\}$ which are rotatably mounted on $n-2$ panels $P_1, P_2, \dots, P_{n-2}$, respectively, of set P and are designed to mesh together with first CS and second CD set of racks.

4. The multipanel sliding door of claim 1, characterised in that it is comprised of:

- a set of n adjacent panels $P = \{P_0, P_1, \dots, P_{n-1}\}$, which are supported for travel in substantially parallel planes and have equal width L ,
- a first set of $n-2$ racks $CS = \{CS_0, CS_1, \dots, CS_{n-3}\}$ which are attached to or formed unitarily with $n-2$ panels $P_0, P_1, \dots, P_{n-3}$, respectively, of set P,
- a second set of $n-2$ racks $CD = \{CD_2, CD_3, \dots, CD_{n-1}\}$ which are attached to or formed unitarily with $n-2$ panels $P_2, P_3, \dots, P_{n-1}$, respectively, of set P,

- a set of $n-2$ pairs of wheelworks $R = \{(RS_1, RD_1), (RS_2, RD_2), \dots, (RS_{n-2}, RD_{n-2})\}$ which are rotatably mounted on $n-2$ panels $P_1, P_2, \dots, P_{n-1}$, respectively, each pair of wheelworks $(RS_1, RD_1), (RS_2, RD_2), \dots, (RS_{n-2}, RD_{n-2})$ including a first wheelwork $RS_1, RS_2, \dots, RS_{n-2}$ designed to mesh together with rack $CD_2, CD_3, \dots, CD_{n-1}$, respectively, of second set of racks CD and a second wheelwork $RD_1, RD_2, \dots, RD_{n-2}$ designed to mesh with rack $CS_0, CS_1, \dots, CS_{n-3}$, respectively, of first set of racks CS , the first and second wheelwork of each pair of wheelworks $(RS_1, RD_1), (RS_2, RD_2), \dots, (RS_{n-2}, RD_{n-2})$ of set R being interlinked with one another by a transmission $T_1, T_2, \dots, T_{n-2}$, respectively, in order to rotate at the same rotational speed.

15

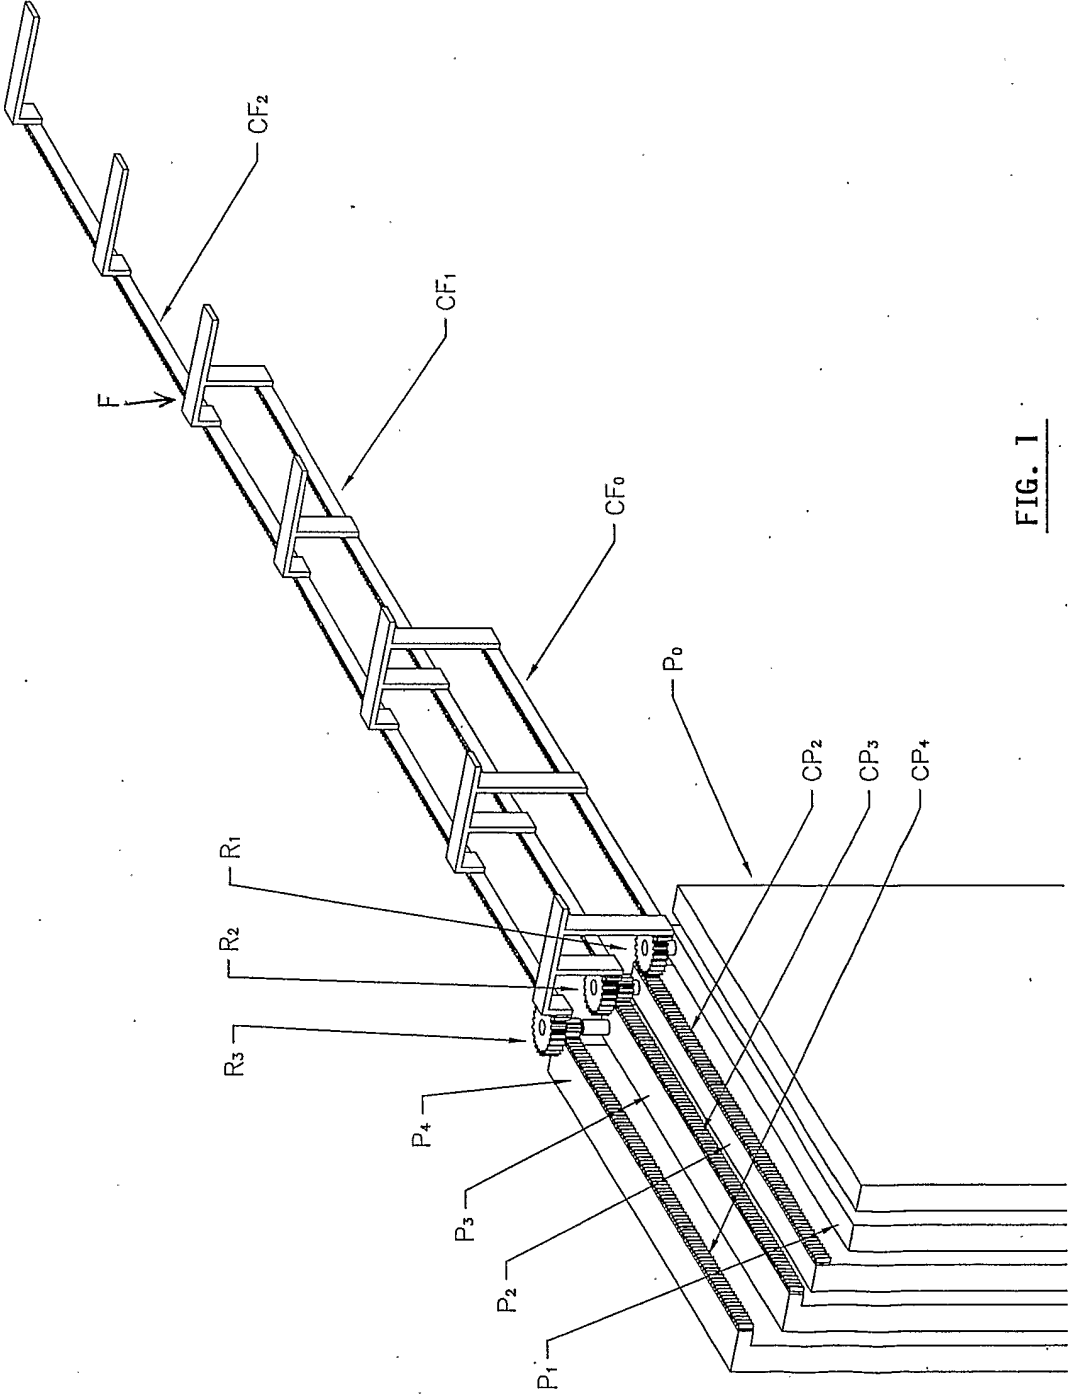


FIG. 1

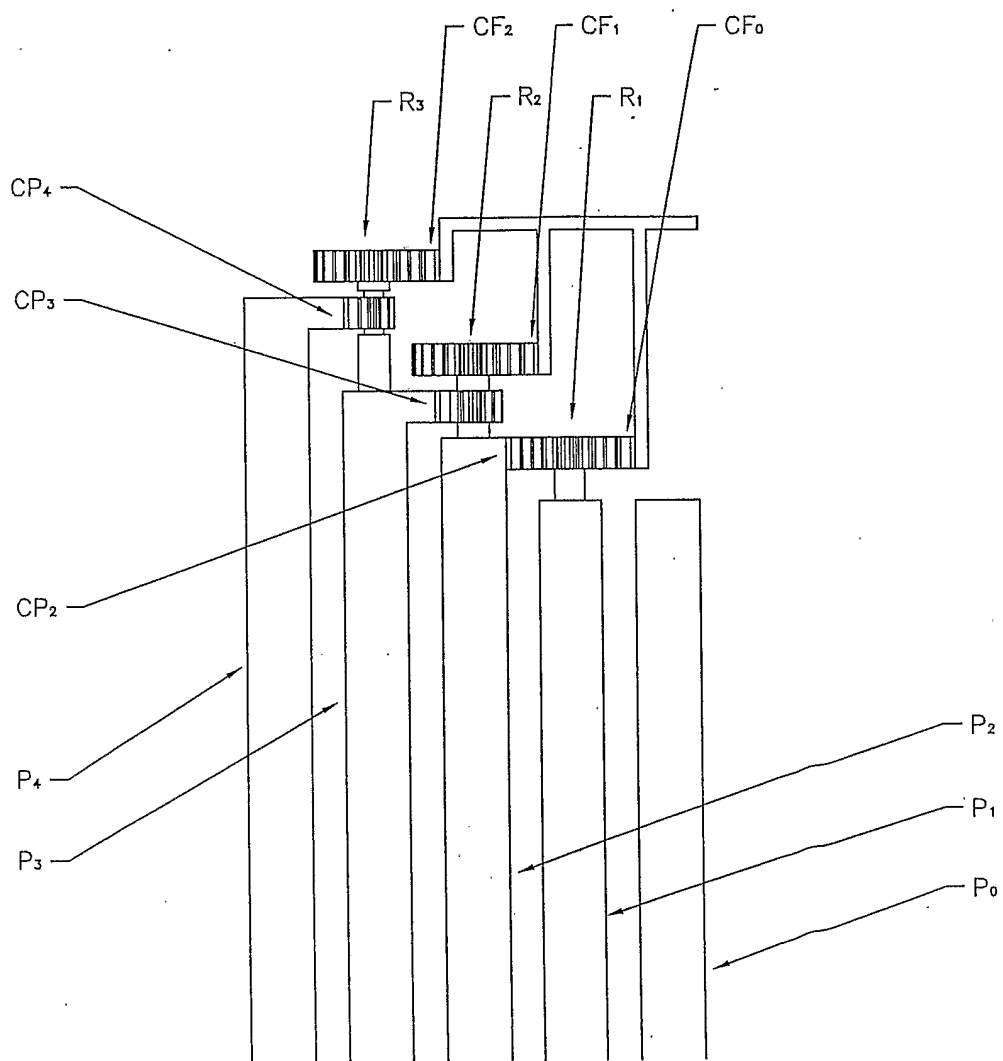


FIG. 2

3 / 6

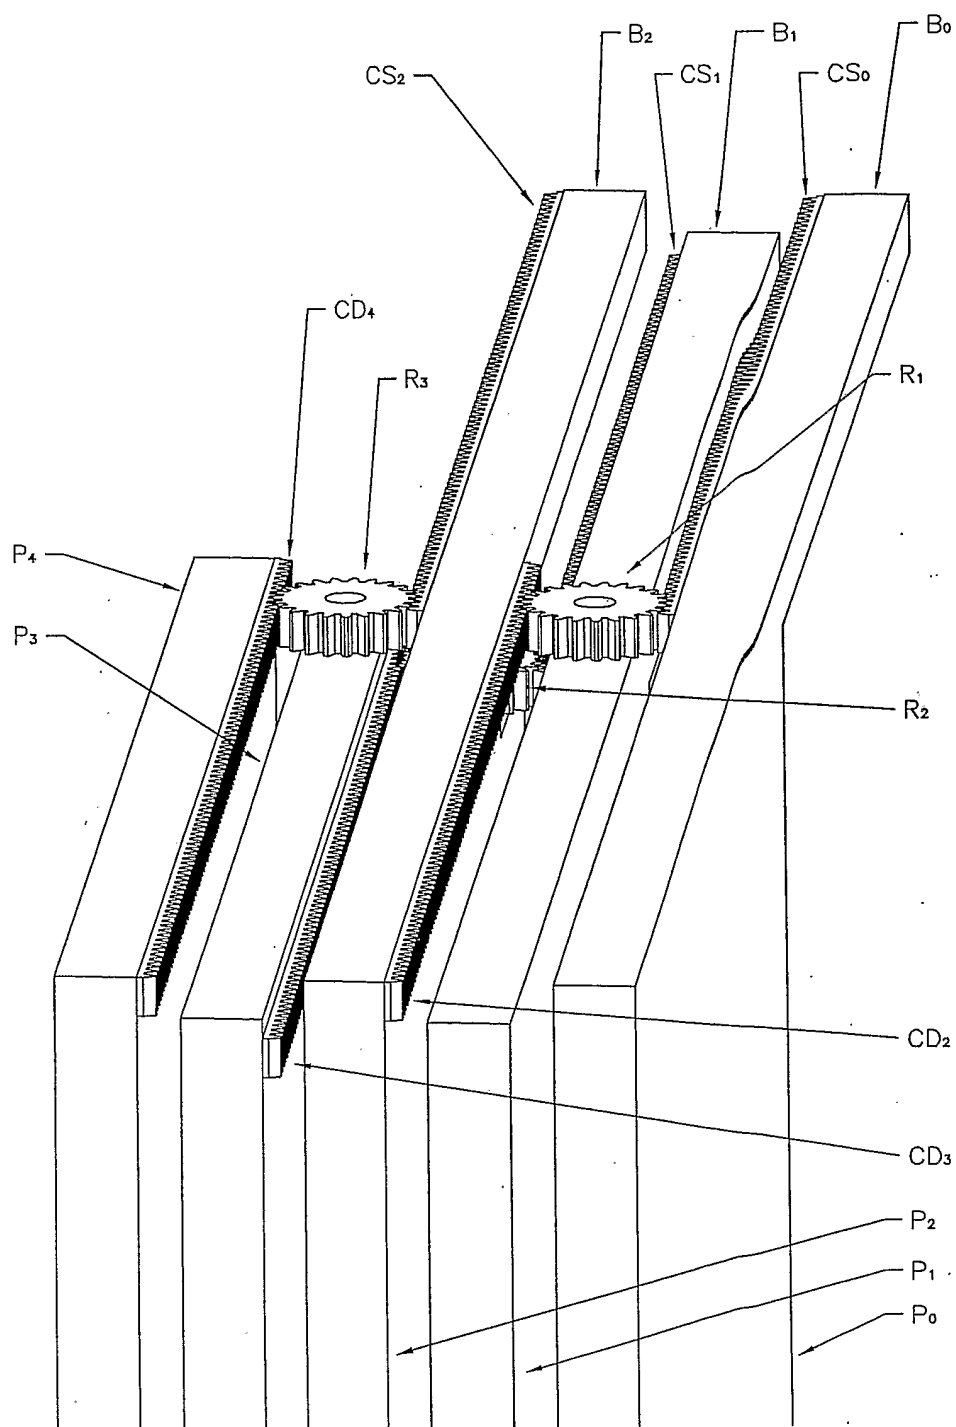


FIG. 3

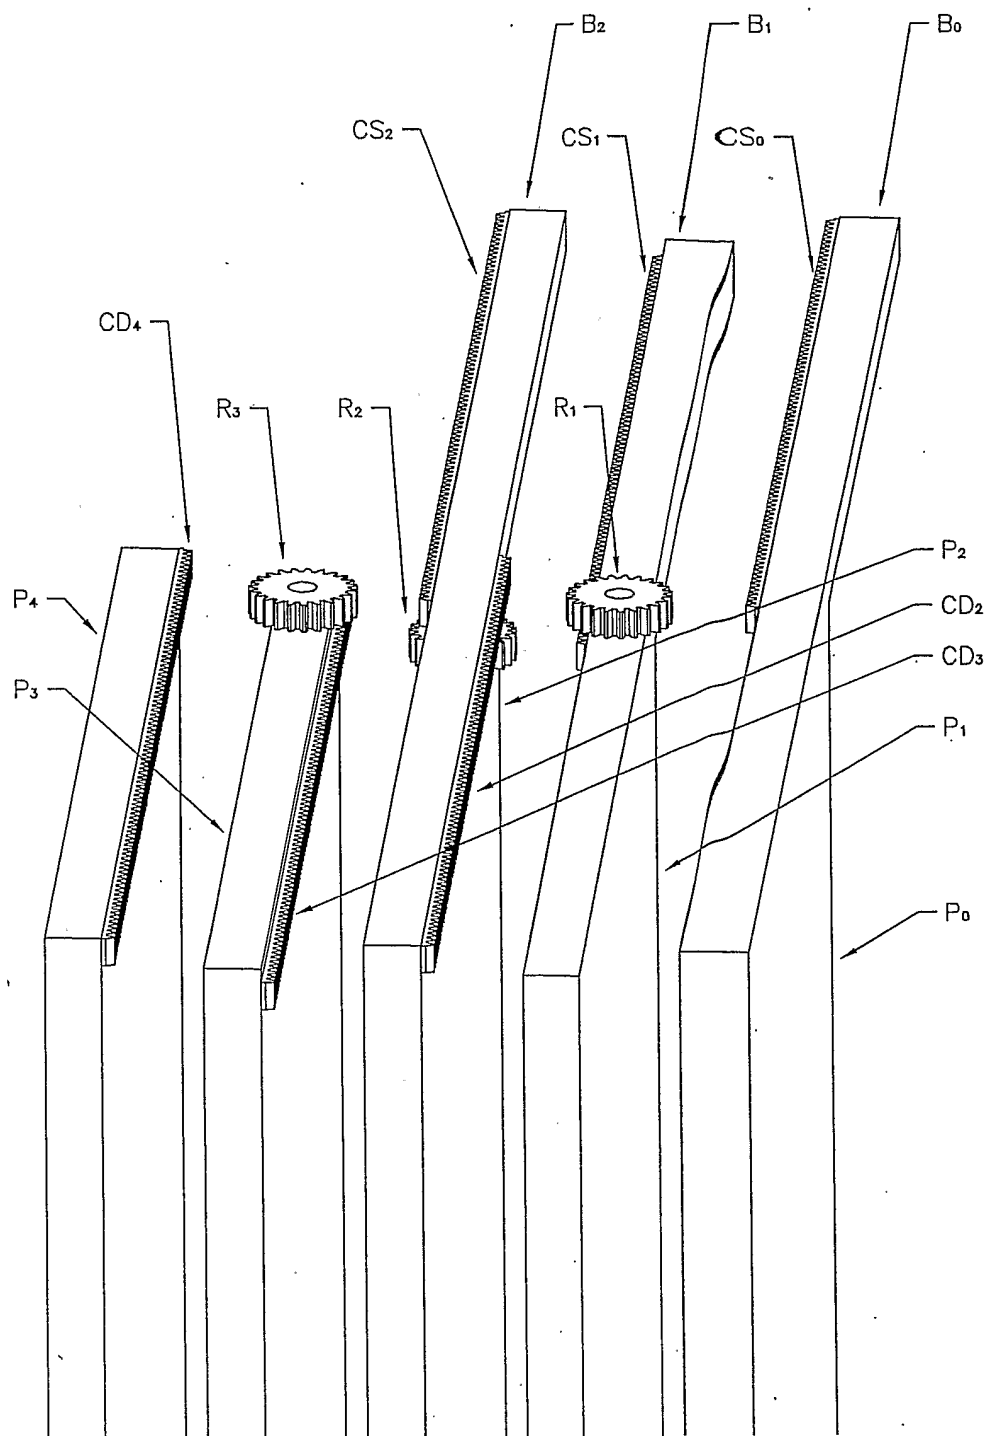


FIG. 4

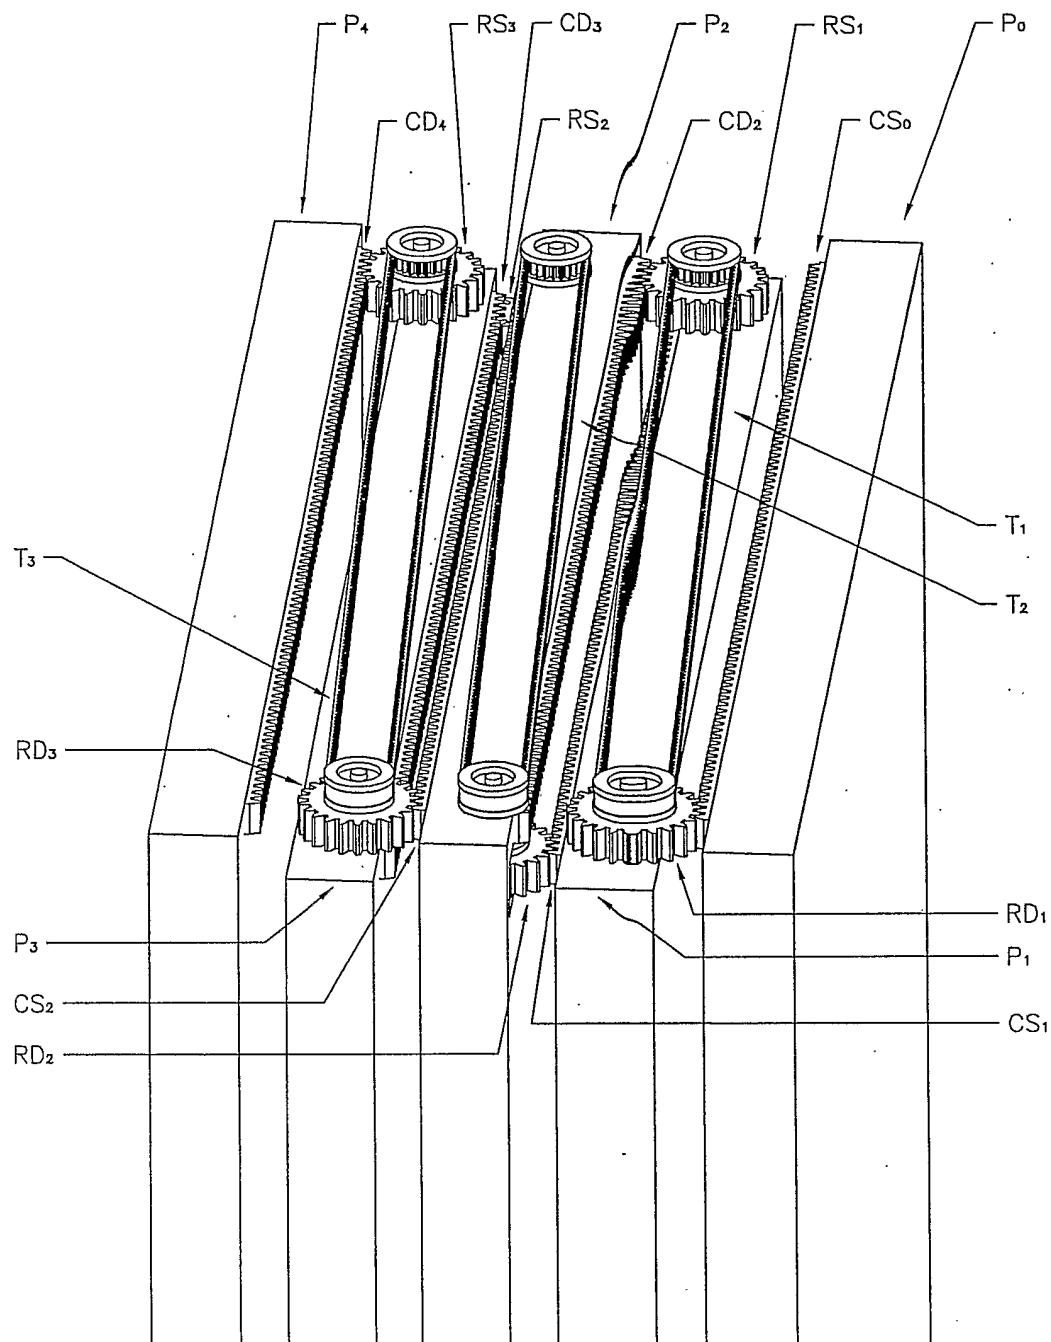


FIG. 5

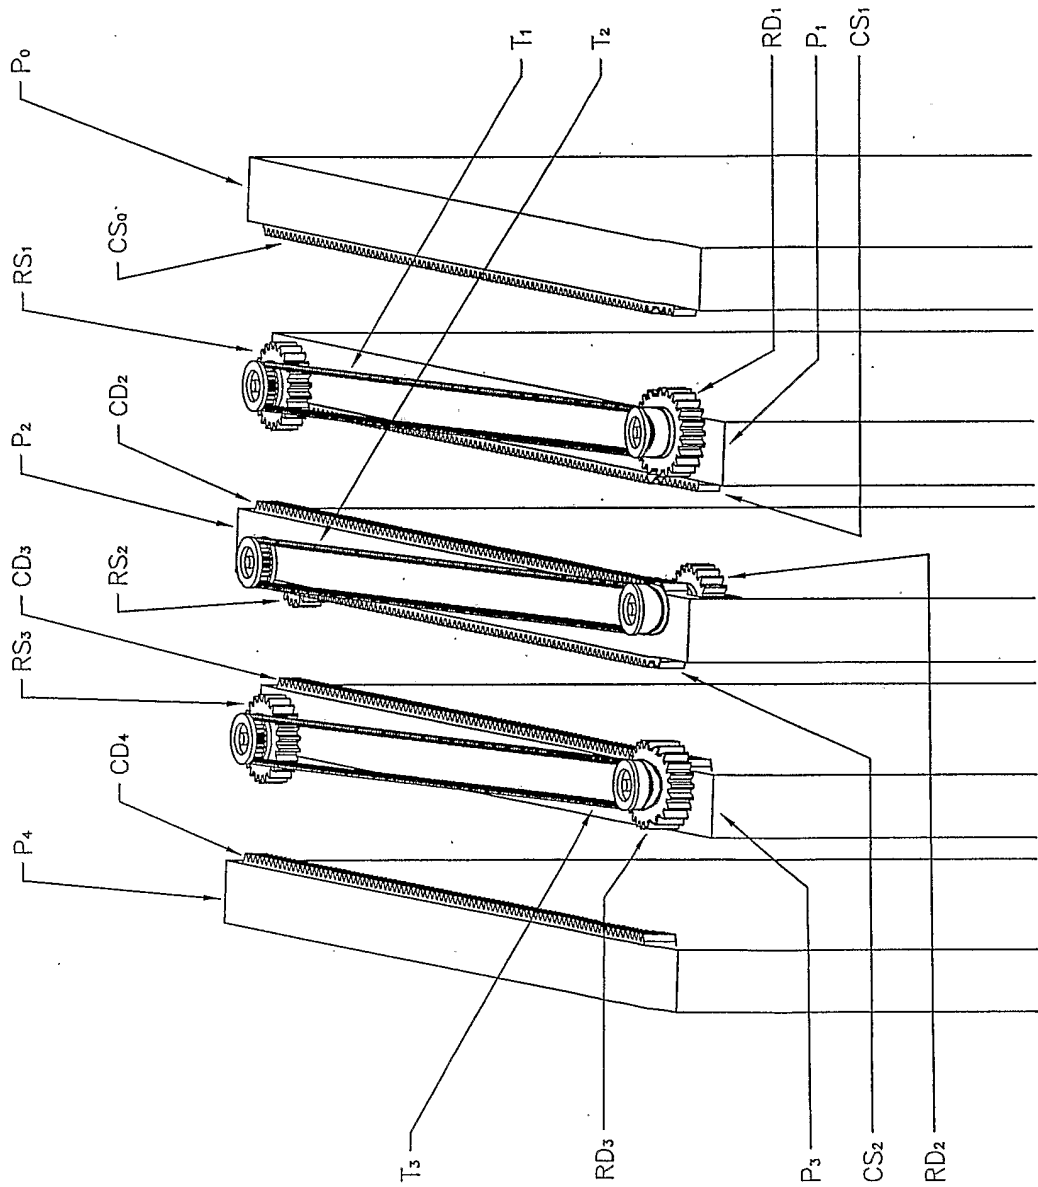


FIG. 6

INTERNATIONAL SEARCH REPORT

International Application No
PCT/IT2005/000203

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 E06B3/92 E05D15/06

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
IPC 7 E06B E05D

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	DE 90 13 808 U1 (EISENBACH, BERNHARD, 6259 BRECHEN, DE) 6 December 1990 (1990-12-06) page 11, paragraph 3 - page 12, paragraph 2; figures 5-7	1
X	DE 41 37 442 A1 (ERDETSCHNIG, ALFRED) 30 July 1992 (1992-07-30) claim 5; figure 5	1

☐ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents :

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- * & * document member of the same patent family

Date of the actual completion of the international search

8 July 2005

Date of mailing of the international search report

02/08/2005

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Knerr, G

INTERNATIONAL SEARCH REPORT

International Application No
PCT/IT2005/000203

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
DE 9013808	U1	06-12-1990	NONE
DE 4137442	A1	30-07-1992	AT 396000 B 26-04-1993
		AT 19091 A 15-09-1992	
		CH 684018 A5 30-06-1994	