

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
26 July 2007 (26.07.2007)

PCT

(10) International Publication Number  
**WO 2007/084150 A2**

- (51) International Patent Classification:  
*B32B 15/04* (2006.01)
- (21) International Application Number:  
PCT/US2006/007305
- (22) International Filing Date: 1 March 2006 (01.03.2006)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:  
60/657,298 1 March 2005 (01.03.2005) US
- (71) Applicant (for all designated States except US): **UNIVERSITY OF MISSISSIPPI MEDICAL CENTER** [US/US];  
2500 North State Street, Jackson, MS 39216 (US).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): **TAYLOR, S., Ray** [US/US]; 603 Gordon Place, Madison, Mississippi 39110 (US). **CHAMBERS, Brian** [US/US]; Apt. 204, 5000 Ridgewood Road, Jackson, Mississippi 39211 (US).
- (74) Agent: **MYERS JR., Richard**; Stites & Harbison PLLC, Suite 1800, 424 Church Street, Nashville, Tennessee 37219 (US).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, LY, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Published:**  
— without international search report and to be republished upon receipt of that report
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.



**WO 2007/084150 A2**

(54) Title: SYNERGISTIC COMBINATIONS OF CHROMATE-FREE CORROSION INHIBITORS

(57) Abstract: An anti-corrosive composition, comprising a combination of at least two of the following materials: vanadates, molybdates, tungstates, silicates, phosphates, borates, Ce cations, Y cations, La cations, Eu cations, Gd cations, Nd cations, and reaction products thereof.

## SYNERGISTIC COMBINATIONS OF CHROMATE-FREE CORROSION INHIBITORS

### Government Support

5           This invention was made with assistance from the Department of Defense Subcontract No. GG10306-120476 and Air Force Office of Scientific Research Contract Number F49620-01-1-0352. The United States Government may have rights to the present invention.

### Field of the Invention

10           The present invention generally relates to the field of corrosion inhibitors. More specifically, embodiments of the present invention relate to synergistic combinations of vanadates, molybdates, tungstates, silicates, phosphates, borates and the rare earth cations of Ce, Y, La, Eu, Gd, and Nd. The combinations of the present invention have been discovered to behave synergistically for corrosion inhibition of metals, including aluminum alloys. Other embodiments  
15 of the present invention include corrosion inhibitors for aerospace alloys such as aluminum alloy 2024-T3, corrosion inhibitive pigments for aerospace paints, conversion coatings, and corrosion protection of other metals in cooling water applications, surface finishing baths, cutting fluids for tools and machinery, and other areas where corrosion inhibition and protection is required. The corrosion inhibitors of the present invention are chrome-free, which is very desirable for health  
20 and environmental reasons.

### Background of the Invention

Aluminum and its alloys have found increasing use in recent years in many industrial and consumer applications due to their light weight and high strength properties. Aircraft airframes  
25 and outer skins are among the more demanding applications for aluminum and its alloys. In order

to preserve the large capital investment in aircraft, it is necessary to protect the aircraft from corrosion that is frequently initiated by environmental factors, such as water, oxygen, and chloride or other ions, that react with aluminum to produce a corrosion product with resultant weakening of the aluminum or aluminum alloy structure. To prevent or minimize corrosion, the metal structure is usually provided with a protective coating that is usually applied in one or more layers. In the case of multi-layer coatings, the first layer is a chromate conversion coating made with a Hexavalent chromium-containing bath chemistry. The second or primer layer that is tenaciously adherent to the conversion coating, typically includes an organic polymer within which is dispersed chromate corrosion-inhibiting compounds. Other layer(s) are then applied over the primer layer. These layer(s) may also be polymer-based and may include colored pigments to produce decorative effects, such as the airline colors. In certain instances, a unilayer coating ("unicoat") is applied which contains the corrosion inhibiting compound and any optional coloring pigments.

Recently hexavalent chromate ions have been the subject of health concerns. As a result of these concerns, the United States Environmental Protection Agency (EPA) has promulgated regulations to phase out the use of chromate-type corrosion inhibitors. As a result, alternatives must be found.

There exists a need for a coating that contains a chromate-free corrosion inhibiting compound or mixture that may be coated over substrates of aluminum and its alloys to protect the substrate from corrosion. More specifically, for the aircraft industry, the corrosion inhibitors and coating materials must meet high performance criteria. The corrosion inhibitor and conversion coating materials must be able to prevent detectable pitting corrosion after an aluminum or aluminum alloy substrate, coated with a composition that includes the corrosion inhibitor, has been exposed to a salt spray for 3,000 hours. Moreover, the corrosion inhibitor and conversion

coating material should not pose the health and environmental hazards that currently raise concerns about chromate inhibitors.

### Summary of the Invention

5           The invention provides chromate-free, corrosion-inhibition of aluminum, aluminum alloys, and other metals and alloys when in solution, within coating mixtures, and coatings formed from the coating mixtures or, when released from other containment vehicles of any size. Embodiments of the corrosion-inhibiting compounds of the present invention do not pose the health hazards associated with hexavalent chromium compounds. In addition, coatings that  
10           contain the invention have “active corrosion protection” in that the inhibitors of the coating have sufficient inhibitor efficiency and diffusive capability so as to migrate into damaged areas of the coating to protect the bared substrate area from corrosion.

          As stated above, embodiments of the present invention include combinations of two or more materials that comprise the compositions of the present invention, such as at least binary  
15           combinations of vanadates, molybdates, tungstates, silicates, phosphates, borates and the rare earth cations of Ce, Y, La, Eu, Gd, and Nd.

          More specifically, embodiments of the present invention include anti-corrosive compositions, comprising: a combination of at least two of the following materials: vanadates, molybdates, tungstates, silicates, phosphates, borates, Ce cations, Y cations, La cations, Eu  
20           cations, Gd, cations, Nd cations; provided that combinations that consist of two or more of the following materials are excluded: vanadates, borates, Ce cations, Y cations, La cations. That is, combinations that consist of vanadates, borates, Ce cations, Y cations, La cations are excluded as embodiments of the compositions of the present invention.

          The combinations specifically include binary combinations and combinations of three or  
25           more materials.

The following combinations are non-limiting examples of binary combinations of chemical species of the present invention that show synergy at some or all of the ratios of the constituents examined:

- 5 • Sodium Metavanadate and Sodium Metatungstate
- Sodium Metavanadate and Sodium Metasilicate
- Sodium Metavanadate and Sodium Phosphate
- Sodium Metavanadate and Sodium Molybdate
- Barium Metaborate and Sodium Metatungstate
- Barium Metaborate and Sodium Metasilicate
- 10 • Cerium Chloride and Sodium Metatungstate
- Cerium Chloride and Sodium Metasilicate
- Cerium Chloride and Sodium Molybdate
- Yttrium Chloride and Sodium Metatungstate
- Yttrium Chloride and Potassium Phosphate
- 15 • Yttrium Chloride and Sodium Phosphate
- Yttrium Chloride and Sodium Metasilicate
- Yttrium Chloride and Sodium Molybdate
- Europium Chloride and Sodium Molybdate
- Gadolinium Chloride and Sodium Molybdate
- 20 • Neodymium Chloride and Sodium Molybdate
- Sodium Metatungstate and Potassium Phosphate
- Sodium Metatungstate and Lanthanum Chloride
- Sodium Metatungstate and Sodium Metasilicate
- Sodium Metatungstate and Sodium Molybdate
- 25 • Potassium Phosphate and Lanthanum Chloride
- Potassium Phosphate and Sodium Molybdate
- Lanthanum Chloride and Sodium Metasilicate
- Lanthanum Chloride and Sodium Phosphate
- Lanthanum Chloride and Sodium Molybdate
- 30 • Sodium Metasilicate and Sodium Phosphate
- Sodium Metasilicate and Sodium Molybdate
- Sodium Phosphate and Sodium Molybdate.

The following combinations are non-limiting examples of ternary combinations of chemical species of the present invention that show synergy at some or all of the ratios of the constituents examined:

- 40 • Sodium Metavanadate and Sodium Metasilicate and Sodium Molybdate
- Sodium Metavanadate and Sodium Metasilicate and Sodium Phosphate
- Sodium Metavanadate and Sodium Phosphate and Sodium Molybdate
- Cerium Chloride and Lanthanum Chloride and Sodium Metasilicate.
- sodium metavanadate, sodium metasilicate, lanthanum chloride.

- sodium metavanadate, sodium molybdate, lanthanum chloride.
- cerium chloride, lanthanum chloride, sodium metavanadate.
- cerium chloride, lanthanum chloride, sodium molybdate.
- cerium chloride, sodium metasilicate, sodium molybdate.

5

Embodiments of the present invention are non-chromate corrosion inhibitors to protect aluminum, aluminum alloys, and other metals and alloys and can be used as inhibitive pigments for aerospace coatings, compounds in conversion coating fabrication, corrosion protection of metals and alloys in cooling water applications, surface finishing baths, cutting fluids for tools and machinery, and other areas where corrosion inhibition is required. The materials of these

10  
embodiments may be used, among other things, to inhibit corrosion for military and civilian applications for aircraft, land vehicles, ships, bridges, and any other engineered structure used in corrosive environments.

10

The present invention is also directed to compounds that contain the anions and cations covered herein. Additionally, embodiments of the present invention can be packaged and/or delivered in a number of ways. For example, many of the compounds and/or compositions of the present invention are very soluble in water. Consequently, such compounds and/or compositions must be wrapped, contained, or packaged in a way to control their solubility so that they can be used in paints and prevent osmotic blisters. These chemical species can also exist in less soluble

15  
20  
compounds.

20

Another embodiment of the present invention is a high throughput screening method for corrosion inhibitor discovery related to cyclic voltammetry detection, including cyclic voltammetry detection of surface enhanced copper on AA2024-T3 and other Al-Cu alloys.

Another embodiment of the present invention is related to fluorometric assessment of corrosion products, including fluorometric assessment of corrosion products of AA2024-T3 and other metals for high throughput screening of corrosion inhibitors.

25

Another embodiment of the present invention is a high throughput screening method for corrosion inhibitor discovery related to DC methods, including DC polarization for the determination of polarization resistance on AA2024-T3 and other metals.

Another embodiment is method of making anti-corrosive compositions. Another  
5 embodiment is method of making conversion coatings on a substrate.

### Brief Description of the Drawings

Figure 1 is the metallography of 2024 sheet (top left and right), cross-section of 2024 wire (bottom right), longitudinal cross-section of 2024 wire (bottom left).

10 Figure 2 is a schematic of a two-electrode array of AA2024 wires and reaction frame.

Figure 3 shows corrosion resistance versus time as determined by EIS (electrochemical impedance spectroscopy) of AA2024-T3 sheet in 3.4 mM inhibitor + 0.6 M NaCl solution adjusted to pH 7.<sup>8,26</sup>

15 Figure 4 is a graph showing an example of MMA (multiple micro-electrode analyzer) output –  $I_{2024/2024}$  – 100 mV bias of AA2024 electrodes exposed to 3.4 mM  $\text{Na}_3\text{PO}_4$  in 0.6 M NaCl solution adjusted to pH 7.

Figure 5 is a graph showing a comparison of inhibitor performance in EIS and 100 mV DC bias rapid screening for 11 different chemistries.

Figure 6 is a plot showing a current of 3.4 mM  $\text{KH}_2\text{PO}_4/\text{YCl}_3$ , 0.6 M NaCl (pH 7)

20 Figure 7 is a plot showing a current of 3.4 mM  $\text{Na}_2\text{SiO}_3/\text{YCl}_3$ , 0.6 M NaCl (pH 7).

Figure 8 is a plot showing a current of 3.4 mM  $\text{NaVO}_3/\text{CeCl}_3$ , 0.6 M NaCl (pH 7).

Figure 9 is a plat showing a current of 3.4 mM  $\text{NaVO}_3/\text{Na}_3\text{PO}_4$ , 0.6 M NaCl (pH 7).

Figure 10 is a graph showing the inhibiting efficiency of embodiments of the present invention.

Figure 11 shows current from MMA testing of 3.4 mM  $\text{NaVO}_3/\text{Na}_2\text{SiO}_3$  varying pH 2-12.

Figure 12 is a table that summarizes synergy behavior based on measured surface enhanced copper on the surface of an aerospace alloy (AA2024-T3).

Figure 13 is a table that summarizes synergy behavior based on measured surface enhanced copper on the surface of an aerospace alloy (AA2024-T3) and on the corrosion current.

Figure 14 is a bar chart of the corrosion currents measured for the ternary mixture of sodium metavanadate/sodium metasilicate/sodium molybdate.

Figure 15 is a bar chart of the corrosion currents measured for the ternary mixture of sodium metavanadate/sodium metasilicate/sodium phosphate.

Figure 16 is a bar chart of the corrosion currents measured for the ternary mixture of sodium metavanadate/sodium phosphate/sodium molybdate.

Figure 17 is a bar chart of the corrosion currents measured for the ternary mixture of cerium chloride/lanthanum chloride/sodium metasilicate.

Figure 18 shows an example of the high throughput methods of the present invention.

Figures 19-24 show coating examples of the present invention, including a substrated sequenced exposure of components of the compositions of the present invention.

## 20 Description of the Invention

The corrosion inhibition by numerous compounds has been examined through the years with the hope of providing a chromate replacement. These compounds include molybdates, vanadium-based compounds, boron-based compounds, and rare earth salts. Recently, many of



these compounds have been examined for inhibitor efficacy on aerospace aluminum alloys. However, no single compound has yet demonstrated an effective corrosion inhibition power (efficiency at specified concentration) on these aerospace alloys that compares to chromate-based inhibitors.

5           The present inventors have discovered an alternative to the use of a single inhibitor species is that of using synergistic combinations of two or more compounds. Synergy occurs when inhibition by the combination exceeds the arithmetic sum of the inhibition by individual components. Synergistic combinations of inhibitors have been examined extensively for steel in acidified and neutral aqueous environments, as well as for copper in neutral aqueous  
10 environments.

Examples of the present invention include 1:1 ratios of these materials, ratios other than 1:1, and many different concentrations. Additionally, the substrate may be exposed to these compounds either simultaneously or in a sequence. The predictive abilities and fundamental understanding of molecular systems with more than two different atomic species remains  
15 extremely limited, so that one is faced with an expansive matrix of experiments to identify the optimum inhibitor combination under a wide range of test conditions (e.g. pH, T, choice of A and B, ratio of A and B, concentration of A+B, etc.).

Therefore, other aspects of the present invention include approaches to increase the rate of material discovery through combinatorial approaches. Combinatorics, initially utilized in  
20 electronics development, has been more commonly associated with automated synthesis and high throughput screening for pharmaceuticals. In the combinatorial process, large arrays of material or chemical variables can be produced and screened to identify the optimum process or condition of interest. Creation of the combinatorial library is typically straightforward. However, the identification of a rapid evaluation method that can sensitively detect changes in the relevant  
25 parameter is not to be assumed and is often the rate limiting process in rapid discovery. This idea

of rapid detection of corrosion inhibitors is further complicated by the time variation in inhibitor performance.

The corrosion protection properties of inhibitors can be electrochemically quantified in many different ways, however there are presently no specified electrochemical methods that can be implemented in a rapid fashion (i.e. within minutes) in the laboratory to predict long-term (i.e. 5 years) corrosion protection. Yet, the long-term desire is to screen thousands of chemical compounds with an infinite number of chemical combinations in a vast number of environmental conditions (temperature, pH, concentration, etc.). The idea of "screening" for rapid discovery must be emphasized. Once large numbers of materials and test conditions have been examined 10 and promising target compounds have been identified, a more rigorous scheme of testing can then be implemented to more carefully document the inhibition properties of these targets.

Examples of the present invention may be made by several methods. One such method comprises the steps of providing a mixture that contains one or more of the target species described herein, or any compound or mixture derived from any other compound or mixture that 15 contains the designated target species. For example, a component can contain one or more of the target species and will be designated by number; 1, 2, 3, etc.

*Procedure 1:* Mix component 1 with one or more additional components in a common medium (e.g., water, organic resin, oil, etc.) and expose the mixed components to the metal either by immersion, spray, etc. Any combination of components, any concentration, and any time can 20 be used.

*Procedure 2:* Mix component 1 in a medium (e.g., water, organic resin, oil, etc.). Mix component 2 in a separate medium, and any other component in a separate medium. Expose the metal to each mixture in series, in any order, at any concentration, and for any time duration.

The compositions of the present invention may be used as coatings or within coatings as known in the art. For example, the coatings may be applied to a surface as described in US Patent Numbers 6,077,885; 5,866,652; and other documents cited herein.

5

#### Examples of the Present Invention

The following, and all examples herein, are specifically not intended to be limiting of the present invention.

10

The method of this example demonstrates a method to determine potential inhibitor combinations and compare their performance in short-term testing to the performance of chromate for the mitigation of corrosion on AA2024-T3 substrates. Additionally, this example demonstrates corrosion inhibition by the synergistic combinations of the present invention.

#### Materials

15

Aluminum alloy 2024 wire (California Fine Wire) with a diameter of 1.59 mm (1/16") was obtained for use as electrodes in electrochemical testing. Metallography was carried out on the AA2024 wire to examine the differences in grain structure and intermetallic particle distribution between the AA2024 wire and AA2024 sheet. Optical microscopy (Figure 1) revealed that the 2024 wire microstructure was qualitatively similar to that found in 2024 sheet used on aircraft.

20

#### Electrochemical Testing

High-throughput testing of multiple electrochemical cells was accomplished by the use of the multichannel microelectrode analyzer (MMA) (Scribner, Associates, Southern Pines, NC) in combination with an array of electrochemical cells established through the use of a conventional 8 X 12 reaction frame and fabricated top to contain the wire electrodes. The MMA is a group of 10

25

modules of 10 zero resistance ammeters (100 total ZRA's) that can be used for current or potential measurement of electrodes. The modules may be changed out to allow measurement of different current ranges. The range used for these experiments allowed clear measurement between 1 nanoamp and 10 microamps. The MMA is computer controlled and is attached to the electrodes in the reaction frame by means of an adapter.

50 cells of the conventional 8 X 12 reaction frame were used to house 50 independent chemistries. Two AA2024 wire electrodes were plugged into electrical contacts contained in the fabricated top for each of the 50 cells, totaling 100 wire electrodes connected to the MMA. The fabricated top is then placed on the reaction frame (not air-tight) containing the chemistries of interest. Each module on the MMA can then be set to establish a potential of one wire electrode vs. the other. A schematic of the reaction frame setup is shown in Figure 2.

Previously, testing of a series of inhibitors was conducted by electrochemical impedance spectroscopy to obtain information on inhibitor performance on AA2024-T3 sheet exposed to chloride. The testing was conducted by placing an AA2024-T3 coupon in 3.4 mM inhibitor and 0.6 M NaCl solution. These are very harsh conditions, but represent the type of environment in which chromates can and do perform. EIS was conducted on the samples at initial exposure and exposures of 1,3,5 and 10 days. The results of the EIS testing for neutral pH solutions are presented in Figure 3. It can be seen in this Figure that the trendlines fluctuate significantly at early times and are not at steady state even at 10 days. Nonetheless, there were certain inhibitors that demonstrated consistent ordinal ranking of corrosion resistance (polarization resistance,  $R_p$ , minus the diffusional impedance,  $R_D$ ) over all 10 days of testing and were selected as target data for this study. Three compounds were selected for testing along with the control (no inhibitor): cerium chloride, yttrium chloride, and sodium metatungstate. These data are emboldened in Figure 3.

Since earlier EIS testing indicated that the corrosion resistance was a suitable indicator of inhibitor performance, initial experiments with the MMA have focused on the DC acquisition of the polarization resistance. While the MMA is fully capable of performing 3-electrode potentiostatic and potentiodynamic experiments, the initial experiments performed here have

5 focused on more simple methods that are rapid and amenable to the idea of high-throughput experimentation. A crude form of the polarization resistance was obtained through a low amplitude DC bias applied between two electrodes. Two-electrode DC bias measurements were performed using two 4.45 cm (1.75") long AA2024 wire electrodes attached to the reaction frame. This allowed 3.3 cm (1.3") of length and 1.65 cm<sup>2</sup> (0.255")<sup>2</sup> of surface area to be exposed to

10 solution. One electrode in each cell was polarized 100 mV (to -425 mV<sub>SHE</sub>) with respect to the other electrode, which was maintained at a potential of -525 mV<sub>SHE</sub>, corresponding to the open circuit potential of the control. The resulting current between the two electrodes was measured over a time period of 9 hours. The MMA device measured the current between the paired electrodes using an in-line ZRA. 100 mV bias was used to ensure that the nanoampere limitation

15 on measurement would not interfere with evaluation of effective inhibitors and combinations. Other potential screening methods could include a lower DC polarization, possibly 10-50 mV, cyclic voltammetry, or fluorometric methods of assaying corrosion product concentrations.

Cells of the reaction frame were filled with a solution containing 3.4 mM inhibitor and 0.6 M NaCl adjusted to pH 7 to match the chemistries used in the previous EIS study. The change of

20 solution pH due to solution chemistry changes caused by electrode corrosion was not monitored. 1.75 mL of solution was pipetted into each test cell of the reaction frame. The experimental method listed above was modified slightly for screening of potential inhibitor synergies after the initial experiments discussed above proved promising. Two-electrode DC bias measurements were performed as above but using 2.54 cm (1") 2024 wires as electrodes on the reaction frame.

25 1.7 cm (0.67") of the length and 0.85 cm<sup>2</sup> (0.13") of surface area of the AA2024 wire were exposed to the solution in the testing cell. One electrode in each cell was again polarized 100 mV

(to  $-425 \text{ mV}_{\text{SHE}}$ ) with respect to the other electrode, which was maintained at a potential of  $-525 \text{ mV}_{\text{SHE}}$ , corresponding to the open circuit potential of the control. 50 cells of the reaction frame were used in each testing interval to maximize throughput in the screening for potential inhibitor synergies. Again, the current established between two-wire electrodes biased 100 mV apart was  
5 measured over a time period of 9 hours.

Cells of the reaction frame in the synergy screening experiments were filled with 2 mL of 3.4 mM total inhibitor in 0.6 M NaCl solution. Forty-four inhibitor combinations were tested in this stage of the screening process and were adjusted to pH 7 by addition of HCl or NaOH. Screening was performed on solutions containing 0.2 mM (5.9%), 0.7 mM (20.6%), 1.2 mM  
10 (35.3%), 1.7 mM (50%), 2.2 mM (64.7%), 2.7 mM (79.4%), and 3.2 mM (94.1%) of inhibitor A with the balance of the 3.4 mM total inhibitor comprised of inhibitor B for all 44 inhibitor combinations.

One advantage of high throughput screening process of the present invention is the potential to explore numerous variables, e.g. pH, temperature, concentration, and others. In this  
15 example, the variables examined were actual inhibitor in the mixture, ratio of inhibitors, and pH.

### Individual Inhibitor Testing

Results from the DC polarization tests for the individual inhibitors were plotted to examine the current change over the course of the 9 hour test. An example of data from the 100  
20 mV polarization high throughput screening experiments is shown in Figure 4.

As can be seen, the data from these polarization experiments changes significantly at early times (1-6 hours) and tends to become more stable in overall behavior near the 7<sup>th</sup> hour. While additional time may (or may not) lead to steady-state behavior, a decision was made to collect current data from each cell for 2 hours, from the 7<sup>th</sup> hour to the 9<sup>th</sup> hour to provide the

characteristic data for any particular inhibitor. This decision was a compromise between possible increased accuracy by extending the time of measurement to more closely approach steady state and speed of data acquisition to facilitate the theme of high throughput screening. In addition to general current trendline, a more detailed observation of the current for each inhibitor showed that  
5 noise was present in all of the cells tested. This was believed to be electrochemical noise as the amount varied depending on the inhibitor chemistry of the cell. Noise analysis represents yet another approach that might be examined for high throughput screening .

The ordinal ranking of inhibitor performance using the 100 mV polarization screening results correlated 100% with the ordinal ranking of the EIS and statistical pit analysis for the four  
10 chemistries selected, i.e. cerium chloride > yttrium chloride > control > sodium metatungstate.

Comparison of 100 mV DC bias screening results and 10 day electrochemical impedance testing of 11 single corrosion inhibitors is shown in Figure 5. A linear regression between  $1/R_C$  and  $i_{corr}$  was used to compare data collected by the two different test methods, EIS (previous tests) and the HTS. This comparison was selected due to the widely known correlation  $R_p = B/I_{corr}$ . A  
15  $R^2$  value of 0.86 was determined when the data point marked by the arrow was excluded from the regression.

#### Examples of Inhibitor Combinations of the Present Invention

With respect to the present invention, synergy is said to occur, for iso-concentration  
20 comparisons, when any combination of more than one inhibitor produces a lower current than any of the chemical constituents alone. This definition of synergy differs slightly from synergy calculations of others where inhibition efficiencies are compared between exact chemical composition of each constituent and combination as shown in the formula below for chemical composition: x mM chemical A + y mM chemical B:

$$\text{Synergy Parameter (S}_{AB}) = 1 - \frac{[(\text{IE}_{(x \text{ mM } A)} + \text{IE}_{(y \text{ mM } B)}) - (\text{IE}_{(x \text{ mM } A)} \times \text{IE}_{(y \text{ mM } B)})]}{[1 - \text{IE}_{(x \text{ mM } A + y \text{ mM } B)}]}$$

where:

$$5 \quad \text{Inhibition efficiency (I.E.)} = [1 - (I_{\text{inhibited}}/I_{\text{uninhibited}})] \times 100\%$$

With respect to the present invention, the currents measured for any and all inhibitor experiments was always compared to the same set (n=200+) of pooled control (no inhibitor) results. Efficiency is used here because good inhibitors are represented with high values.

10 Using the definition of synergy above, where the synergy is said to occur at any current lower than the best inhibitor alone, boundary lines of synergy and antagonism were created in each system. The synergy line is merely the best performing single inhibitor and the antagonism line is the worst performing single inhibitor for that system. Confidence in these boundary lines is high, as the single inhibitor currents are averaged from at least 25 separate test cells for each  
 15 inhibitor. The largest standard deviation for the single inhibitor values of current was 3% of the mean current. Standard deviations are shown for the remaining data points.

Screening of potential inhibitor synergies using the method of the present invention reveals several types of inhibitor combination behavior. Some of the inhibitor combinations examined exhibit no apparent benefit of mixing the inhibitors. The current from testing of these  
 20 mixtures is not lower than the better inhibitor alone at the same total inhibitor concentration or higher than the worse inhibitor alone. An example of this lack of benefit behavior may be seen in the results of testing a mixture of potassium phosphate and yttrium chloride shown in Figure 6. Figure 6 shows that the resulting current when using any ratio of potassium phosphate and yttrium



chloride falls between the current for each inhibitor alone at 3.4 mM total inhibitor concentration. This type of behavior was observed in approximately 20% of the combinations tested here.

Another type of behavior observed in about 35% of the inhibitor mixtures tested is the presence of both synergy and antagonism (i.e., the opposite of synergy) across the ratio of concentration of the two inhibitors. An example of such a mixture is that of sodium metasilicate and yttrium chloride shown in Figure 7. In Figure 7, the mixtures of 0.2 mM  $YCl_3$ /3.2 mM  $Na_2SiO_3$ , 0.7 mM  $YCl_3$ /2.7 mM  $Na_2SiO_3$ , 2.2 mM  $YCl_3$ /1.2 mM  $Na_2SiO_3$ , and 2.7 mM  $YCl_3$ /0.7 mM  $Na_2SiO_3$  exhibited synergy, since the current at each mixture was lower than  $YCl_3$  alone. Interestingly, the combinations of 1.7 mM  $YCl_3$ /1.7 mM  $Na_2SiO_3$  and 3.2 mM  $YCl_3$ /0.2 mM  $Na_2SiO_3$  exhibited antagonism, where the currents at each of these combinations was higher than that of  $Na_2SiO_3$  alone.

Yet another type of behavior observed from the testing of mixtures is antagonism at some or all ratios of the inhibitors. The behavior of limited-range antagonism, arbitrarily defined as the occurrence of antagonism in less than half of the ratios for any given inhibitor mixture. This behavior was observed in less than 10% of the inhibitor mixtures examined. Approximately 10% of the inhibitor mixtures examined showed antagonism at all ratios. The mixture of sodium metavanadate and cerium chloride is an example of a mixture that exhibited antagonism at all ratios of the inhibitors and is shown in Figure 8. In Figure 8 it can be readily observed that the current from any ratio of the two inhibitors results in an increased current over either of the inhibitors alone. The behavior of this mixture is interesting because each inhibitor alone is ranked among the best of the non-chromate inhibitors for AA2024 but combined they are more detrimental to the alloy.

Finally, the most sought after behavior that was observed in testing of the inhibitor mixtures is the presence of synergy across some or all ratios of the inhibitors. The behavior of limited-range synergy, arbitrarily defined as having less than half of the ratios of the inhibitor

mixture exhibit synergy, was observed in approximately 20% of the forty-four inhibitor mixtures examined at pH 7. Broad-range synergy, in which synergy was demonstrated at all concentrations tested was observed in less than 10% of the 44 mixtures tested. The mixture of sodium phosphate and sodium metavanadate is an example of a mixture that exhibited synergy at all tested ratios of the inhibitors and may be seen in Figure 9. Mixtures exhibiting synergy at all ratios of the combined inhibitors are considered the safest to implement in a coating system. If a non-ideal ratio of the inhibitors is released from the coating, no detrimental effects from that mixture of inhibitors should exist.

A summary of the observed behavior of the forty-four inhibitor mixtures tested at pH 7 is presented in Table 1 below. The percentage of points exhibiting either synergy or antagonism is based on a comparison of the current of the mixture to the constituents of the mixture alone. For example, testing of 3.4mM mixtures: 0.2 mM of compound A balance of compound B, 0.7 mM of A balance of B, 1.2 mM of A balance of B, 1.7 mM of A balance of B , 2.2 mM of A balance of B, 2.7 mM of A balance of B, 3.2 mM of A balance of B, represents 7 different mixtures to be considered. If two of these points fall below the current of the best single inhibitor present in that system, then 2 of the 7 points are said to exhibit synergy, leading to a value of 28.6% of the points exhibiting synergy. A mixture current less than the control refers to a mixture where all of the ratios of that mixture exhibit inhibition, regardless of any synergy present. Finally, the percentage of ratios of the mixture tested with currents under 0.6 microamps refers to mixtures that present more inhibition than the best non-chromate inhibitor tested here.

Inhibitor A	Inhibitor B	Behavior Observed	Percentage Points Exhibiting Synergy	Percentage Points Exhibiting Antagonism	All Mixture Currents Less than Control?	Percentage Points with Currents Under 0.6 microamps
NaVO3	BaB2O4	Mild Synergy	14.3%	0.0%	yes	14.3%
NaVO3	CeCl3	Antagonism	0.0%	100.0%	yes	0.0%
NaVO3	YCl3	Synergy	100.0%	0.0%	yes	100.0%
NaVO3	NaWO4-3WO3	Lack of Benefit	0.0%	0.0%	yes	0.0%
NaVO3	KH2PO4	Lack of Benefit	0.0%	0.0%	yes	0.0%
NaVO3	LaCl3	Antagonism	0.0%	100.0%	yes	0.0%
NaVO3	Na2SiO3	Synergy	100.0%	0.0%	yes	100.0%
NaVO3	Na3PO4	Synergy	100.0%	0.0%	yes	100.0%
NaVO3	Na2MoO4	Synergy	100.0%	0.0%	yes	100.0%
BaB2O4	CeCl3	Mild Synergy	42.9%	0.0%	no	42.9%
BaB2O4	YCl3	Synergy	71.4%	0.0%	no	0.0%
BaB2O4	NaWO4-3WO3	Synergy and Antagonism	28.6%	28.6%	no	0.0%
BaB2O4	KH2PO4	Antagonism	0.0%	71.4%	no	0.0%
BaB2O4	LaCl3	Mild Synergy	14.3%	0.0%	no	14.3%
BaB2O4	Na2SiO3	Lack of Benefit	0.0%	0.0%	no	0.0%
BaB2O4	Na3PO4	Synergy and Antagonism	14.3%	71.4%	no	0.0%
BaB2O4	Na2MoO4	Mild Antagonism	0.0%	42.9%	no	0.0%
CeCl3	YCl3	Synergy and Antagonism	28.6%	28.6%	no	0.0%
CeCl3	NaWO4-3WO3	Mild Synergy	28.6%	0.0%	no	0.0%
CeCl3	KH2PO4	Synergy and Antagonism	14.3%	14.3%	no	0.0%
CeCl3	LaCl3	Synergy and Antagonism	42.9%	14.3%	yes	71.4%
CeCl3	Na2SiO3	Synergy	71.4%	0.0%	yes	57.1%
CeCl3	Na3PO4	Mild Synergy	28.6%	0.0%	no	14.3%
CeCl3	Na2MoO4	Synergy and Antagonism	28.6%	28.6%	no	28.6%
YCl3	NaWO4-3WO3	Mild Synergy	14.3%	0.0%	no	0.0%
YCl3	KH2PO4	Lack of Benefit	0.0%	0.0%	no	0.0%
YCl3	LaCl3	Lack of Benefit	0.0%	0.0%	yes	0.0%
YCl3	Na2SiO3	Synergy and Antagonism	57.1%	28.6%	no	14.3%
YCl3	Na3PO4	Synergy and Antagonism	14.3%	42.9%	no	0.0%
YCl3	Na2MoO4	Synergy and Antagonism	28.6%	57.1%	no	14.3%
NaWO4-3WO3	KH2PO4	Synergy and Antagonism	14.3%	14.3%	no	0.0%
NaWO4-3WO3	LaCl3	Lack of Benefit	0.0%	0.0%	no	0.0%
NaWO4-3WO3	Na2SiO3	Mild Antagonism	0.0%	14.3%	no	0.0%
NaWO4-3WO3	Na3PO4	Lack of Benefit	0.0%	0.0%	no	0.0%
NaWO4-3WO3	Na2MoO4	Lack of Benefit	0.0%	0.0%	no	0.0%
KH2PO4	LaCl3	Synergy and Antagonism	28.6%	14.3%	no	28.6%
KH2PO4	Na2SiO3	Synergy and Antagonism	14.3%	85.7%	no	0.0%
KH2PO4	Na2MoO4	Synergy and Antagonism	28.6%	28.6%	no	0.0%
LaCl3	Na2SiO3	Mild Synergy	42.9%	0.0%	no	42.9%
LaCl3	Na3PO4	Mild Antagonism	0.0%	42.9%	no	0.0%
LaCl3	Na2MoO4	Synergy and Antagonism	28.6%	28.6%	no	28.6%
Na2SiO3	Na3PO4	Synergy	71.4%	0.0%	no	0.0%
Na2SiO3	Na2MoO4	Antagonism	0.0%	85.7%	no	0.0%
Na3PO4	Na2MoO4	Synergy and Antagonism	42.9%	14.3%	no	0.0%

**Table 1.** Inhibitor mixture behavior observed from 100 mV polarization high throughput screening testing

5

Synergy between the oxyanions of V, Mo, and P is noted. Molecular combinations of these oxyanions form high molecular weight supramolecular anions claimed to inhibit pitting. Investigation of these alone represents ideal application of this combinatorial analysis of the present invention.

Combinations of  $\text{NaVO}_3/\text{KH}_2\text{PO}_4$  and  $\text{NaVO}_3/\text{Na}_3\text{PO}_4$  when adjusted to neutral pH have, in principle, the same mix of  $\text{VO}_3^-$ ,  $\text{PO}_4^{3-}$ ,  $\text{HPO}_4^{2-}$ , and  $\text{H}_2\text{PO}_4^-$ . Without being bound by theory, the fact that the synergies differ suggest either the K cation influences the inhibition or kinetically determined different macromolecular species form depending on whether the neutral pH is

5 approached from the acid side ( $\text{NaVO}_3:\text{KH}_2\text{PO}_4$ ) or the basic side ( $\text{NaVO}_3:\text{Na}_3\text{PO}_4$ ). The latter is most likely but its investigation remains beyond the scope of this report.

Inhibition efficiency was calculated for all inhibitors and combinations of inhibitors using the 100 mV polarization screening data. Efficiency calculations assume a uniform current density across the sample surface, but have also been applied to systems undergoing localized corrosion

10 due to ease of calculation and need for comparison<sup>15, 42-45</sup>. Inhibition efficiency was calculated using the formula below:

$$\text{Inhibition efficiency (I.E.)} = [1 - (I_{\text{inhibited}}/I_{\text{uninhibited}})] \times 100\%$$

15

The best inhibiting efficiencies found in all of the inhibitors and binary combinations tested are shown in Figure 10. The ratio with the best inhibitor efficiency was used for each combination listed. Some combinations are limited-range synergies but demonstrate strong

20 synergy at certain ratios.

A significant advantage of the high throughput screening approach used here is the ability to survey inhibitor performance over a range of test conditions within a single experiment. The ideal inhibitor should perform well over a wide pH range, as well as temperatures. A 50 cell array was employed to test nine inhibitor ratios at pH 2, 4, 7, 10 and 12. An example of this large

25 matrix of experiments is shown in Figure 11 for the mixture of sodium metavanadate and sodium metasilicate. Figure 11 shows the utility of the proposed high throughput screening method. This

plot can be interpreted similarly to a phase diagram. The x axis provides information on the chemical make-up of the inhibitor. On the left side, one has a solution of 100% compound A; on the right side one has a solution of 100% compound B. The points in between the left and right are proportionally different amounts of A and B. The ionic concentration in all cases is 3.4 mM.

5 The initial pH of the test solution is adjusted to the pH value indicated on the vertical axis. The color designates the corrosion current under the specified conditions. So depending on the inhibitor ratio and pH, different corrosion protection performance occurs. For the inhibitor combinations tested, it is clear that synergistic ratios that exist at one pH do not necessarily hold for other pHs. Synergies are clearly observed in the plot of current for 1.7 mM (50%) of each  
10 inhibitor at pH 12, and for 3.2 mM sodium metavanadate, 0.2 mM sodium metasilicate at pH 7. These results are repeatable and reinforce the need for high throughput experimentation for the discovery and characterization of corrosion inhibitors.

Evaluation of ten inhibitors for AA2024 was conducted using a 9 hour 100 mV DC bias screening method under the control of the MMA. Hours 7-9 of this test were found to exhibit  
15 stable currents that were averaged for evaluation of the inhibitors. Confidence in this 100 mV screening method was established from correlating results with corrosion resistance evaluated using electrochemical impedance on AA2024-T3. Screening of inhibitor combinations was conducted using the 100 mV DC bias screening method. Four types of inhibitor combination behavior were observed using this method; no benefit of the mixture, antagonism, synergy, and a  
20 mix of antagonism and synergy across the ratio of the mixture. Some of these mixtures showed only limited range behavior where the behavior was limited to certain ratios of the inhibitors while others exhibited broad range behavior. 44 inhibitor combinations were examined at pH 7 but the 100 mV screening method has been shown capable of examining a variety of testing conditions.

DC polarization between two AA2024 wire electrodes using a multiple-electrode testing system appears to be a suitable method for rapid screening of corrosion inhibitors and inhibitor combinations. Comparison of single inhibitor performance between the 100 mV DC bias (between two AA2024 electrodes) screening method and electrochemical impedance testing on

5 AA2024-T3 has shown that:

- The ordinal correlation between short-term (2 hour) and long-term (10 day) electrochemical data was 100% when using 100 mV DC polarization of AA2024 wire for the inhibitors cerium chloride, yttrium chloride, sodium metatungstate and control that were the most consistent over the long-term testing
- 10 • 100 mV DC bias testing of 50 cells of independent chemistries allows high throughput for screening potential synergies between inhibitors at various ratios, pH, etc.
- Synergies between different non-chromate corrosion inhibitors at various ratios have been discovered with inhibiting efficiencies up to 93%
- The inhibiting efficiency of combinations of inhibitors varies greatly depending on pH, 15 ratio of concentration of inhibitors, overall concentration of inhibitors, etc.
- These simple DC polarization tests may provide one avenue for the rapid discovery of effective corrosion inhibitors using combinatorial methods.

As stated above, another embodiment of the present invention is a high throughput screening method for corrosion inhibitor discovery related to cyclic voltammetry detection, including cyclic voltammetry detection of surface enhanced copper on AA2024-T.

Aluminum alloy 2024-T3 possesses a high strength to weight ratio for its use in aerospace and other commercial applications. This high strength is achieved mainly through the presence of Cu, which forms with the other alloying elements to form strengthening precipitates in the alloy. Though high strength is achieved, the difference in potentials of the copper rich precipitates allows galvanic cells to form between the precipitates and the aluminum rich matrix of the alloy. In particular, S-phase ( $\text{Al}_2\text{CuMg}$ ) particles have been shown to be anodic compared to the open circuit potential of the AA2024-T3 matrix and are one of the primary sites of pitting corrosion in AA2024-T3.

Dissolution of S-phase particles proceeds by dealloying of the aluminum and magnesium, leaving behind nanoporous copper that detaches and is oxidized in solution and reduced back on the surface of the alloy by a mechanism described by Buchheit et.al. Observations of the dissolution of S-phase particles and localized corrosion that lead to the enrichment of copper on the surface of AA2024-T3 have been noted by many researchers. Measurement of the amount of surface copper using cyclic voltammetry has been used to assess the level of corrosion damage on AA2024-T3 exposed to various aggressive solutions. This cyclic voltammetry method for assessing surface copper on AA2024-T3 will be used in the present work to evaluate corrosion damage and inhibition in 0.6 M sodium chloride.

Related to this embodiment, aluminum alloy 2024-T3 wire (All Metal Sales), with a diameter of 1.59 mm (1/16"), was obtained for use as electrodes in electrochemical testing. The wire was cut to 2.54 cm (1") lengths and degreased by ultrasonic exposure to acetone and methanol respectively for 10 minutes each.

The AA2024-T3 electrodes were exposed to inhibitor solution (3.4 mM total inhibitor concentration, 0.6 M NaCl) by immersing 1.2 cm of the electrode in the solution. Cells of the

reaction frame were filled with 1.8 mL of 3.4 mM total inhibitor in 0.6 M NaCl solution. Forty-four inhibitor combinations were tested in this stage of the screening process and were adjusted to pH 7 by addition of HCl or NaOH. Screening was performed on solutions containing 0.2 mM (5.9%), 0.7 mM (20.6%), 1.2 mM (35.3%), 1.7 mM (50%), 2.2 mM (64.7%), 2.7 mM (79.4%), and 3.2 mM (94.1%) of inhibitor A, with the balance of the 3.4 mM total inhibitor comprised of inhibitor B for all 44 inhibitor combinations. The combinations of inhibitors were comprised of the following inhibitors: sodium metavanadate, cerium chloride, barium metaborate, yttrium chloride, sodium metatungstate, potassium phosphate, lanthanum chloride, sodium metasilicate, sodium phosphate, and sodium molybdate.

96 electrodes, connected to a reaction frame lid, were immersed in 96 independent cells containing solution of a standard 8 X 12 reaction frame. The electrodes were exposed to the inhibitor solution, which was open to air for 24 hours. After the 24 hour exposure, the reaction frame lid housing the electrodes was disconnected from the reaction frame and the electrodes were rinsed with deionized water. The electrodes housed in the reaction frame lid were then placed in a special reaction frame setup containing pH 8.4 borate buffer (4.31 g/L  $\text{Na}_2\text{B}_4\text{O}_7$  + 7.07 g/L  $\text{H}_3\text{BO}_3$ ) in the cells of the reaction frame. The bottom of the reaction frame in this setup was removed by drilling so that a borate buffer agar gel (4.31 g/L  $\text{Na}_2\text{B}_4\text{O}_7$  + 7.07 g/L  $\text{H}_3\text{BO}_3$  + 10 g Agar) could serve as the bottom of the reaction frame and could connect each cell to a common counter and reference electrode also placed in the borate buffer agar gel.

Cyclic voltammetry was performed on the 96 electrodes using a multichannel microelectrode analyzer (MMA) (Scribner, Associates, Southern Pines, NC) to control the potential and record current. The MMA is a group of 10 modules of 10 zero resistance ammeters that can be used for current or potential measurement of electrodes. The modules may be changed out to allow measurement of different current ranges. The range used for these experiments allowed clear measurement between 1 nanoamp and 1 microamp. The MMA is computer controlled and is attached to the electrodes in the reaction frame by means of an adapter. The



MMA also controls a common reference and counter electrode for potentiodynamic experiments. A saturated calomel electrode (0.241 V vs. NHE) and platinum mesh were used as the reference and counter electrodes in this experimental setup. A schematic diagram of the experimental setup is presented in Figure 18.

5           The cyclic voltammetry was conducted by sweeping the potential from -700 mV<sub>SCE</sub> to 300 mV<sub>SCE</sub> and back to -1200 mV<sub>SCE</sub>. The range of this sweep is in the range for copper oxidation/reduction but not for the corrosion of the base material. Three potential sweeps were conducted and the third cyclic voltammogram was used for evaluation of the copper content on each electrode surface. Prior to each sweep a potential hold at -700 mV<sub>SCE</sub> was performed (5  
10 minutes prior to sweep 1, 10 minutes prior to sweep 2, and 20 minutes prior to the third and final sweep).

Examples of the present invention include DC polarization testing of samples in parallel. To show an embodiment of this method, 1.8 mL of test solution was transferred or mixed in each of 50 cells of a conventional 2 mL 8 X 12 reaction frame. Each cell may contain an independent  
15 test solution. Two AA2024-T3 wire electrodes were plugged into electrical contacts contained in the fabricated top for each cell, totaling 100 wire electrodes connected to the multichannel microelectrode analyzer (MMA).

The fabricated top was then placed on the reaction frame containing the chemistries of interest and the system was left open to air. Half of the electrodes, one per cell, were set to a  
20 potential 100 mV above the base potential determined by the second wire electrode of the pair. The current average was calculated using measured currents from 7 to 9 hours of DC polarization. This current average was used to quantify the corrosion protection.

For an example of the determination of Surface Copper on AA2024-T3 for Estimating Corrosion Damage, 1.8 mL of test solution was transferred or mixed in each cell (96 cells) of a  
25 conventional 2 mL 8 X 12 reaction frame. Each cell may contain an independent test solution. One AA2024-T3 wire electrode was plugged into an electrical contact contained in the fabricated

top for each cell, totaling 96 wire electrodes connected to the multichannel microelectrode analyzer (MMA).

The fabricated top was then placed on the reaction frame containing the chemistries of interest and the system was left open to air. After an exposure time (e.g., 24 hours), the reaction  
5 frame lid holding the electrodes was removed from the reaction frame, and the electrodes were rinsed with deionized water. The electrodes, still held in the reaction frame lid, were then placed into a special reaction frame modified for conducting cyclic voltammetry on the electrodes in parallel.

As an example of the setup for the special reaction frame - For this special reaction  
10 frame, a hole was drilled into the bottom of each well of a standard 8 X 12 reaction frame. The reaction frame was then partially immersed into a borate buffer agar gel (4.31 g/L  $\text{Na}_2\text{B}_4\text{O}_7$  + 7.07 g/L  $\text{H}_3\text{BO}_3$  + 10 g/L Agar). This gel provided ionic continuity between each well and a universal counter and reference electrode also immersed into the gel. After solidification of the agar gel, each well was filled with 1.2 mL of pH 8.4 borate buffer (4.31 g/L  $\text{Na}_2\text{B}_4\text{O}_7$  + 7.07 g/L  $\text{H}_3\text{BO}_3$ ).  
15 A cyclic voltammetry was conducted by sweeping the potential at a rate of 1 mV/s from -700 mV<sub>SCE</sub> to 300 mV<sub>SCE</sub> and back to -1200 mV<sub>SCE</sub>. Prior to each sweep, a potential hold at -700 mV<sub>SCE</sub> was performed (5 minutes prior to sweep #1, 10 minutes prior to sweep #2, and 20 minutes prior to the third and final sweep). Three potential sweeps were conducted, and the third cyclic voltammogram was used for quantifying the amount of copper on each electrode surface. The  
20 extent of corrosion for any given test solution was estimated by the height of the first oxidation peak ( $\text{Cu} \rightarrow \text{Cu}^+$ ).

A schematic of this embodiment is shown as Figure 18.

Another embodiment of the present invention is related to fluorometric assessment of corrosion products, including fluorometric assessment of corrosion products of AA2024-T3 for high throughput screening of corrosion inhibitors

AA2024-T3 consists of approximately 93% Al. Al is the primary constituent involved in dissolution of the alloy in corrosive solutions. The corroded aluminum typically takes the form of aluminum oxide or aluminum hydroxide. While some of the corrosion products adhere to the surface of the alloy, the rest dissolve in the surrounding solution. Detection of the amount of aluminum in solution may be carried out through the use of a fluorescent dye sensitive to the presence of aluminum. Lumogallion is one such dye that is sensitive to aluminum ions and has a limited number of interferences from other ions. Lumogallion has been shown to be sensitive to aluminum in solution resulting from the corrosion of AA2024-T3. See Sibi, M.P., Zong, Z., "Determination of corrosion of aluminum alloy under protective coatings using fluorescent probes," *Progress in Organic Coatings* 47, 8-15 (2003).

Estimation of the extent of aluminum dissolution of an aluminum alloy in the presence of aggressive ions and corrosion inhibitor species is another high throughput screening method for determining the efficacy of inhibitor species.

Related to this embodiment, a Spectramax M2 Plate Reader was used to carry out fluorescence detection of lumogallion solutions. All fluorescence detection of solutions was carried out using a 96 well, costar black clear bottom plate for optical assay. Optimization of the excitation and emission was performed and the optimum values were determined to be 491 nm excitation wavelength and 610 nm emission wavelength. A 590 nm wavelength cutoff filter was employed by the instrument to reduce signal from the excitation source in the emission measurement. Solutions containing different concentrations of aluminum up to 39.2  $\mu\text{M}$  aluminum chloride, 51.1  $\mu\text{M}$  lumogallion, and 0.2 M sodium acetate buffer (pH 5.2) were tested to verify the sensitivity of lumogallion fluorescence to the presence of aluminum.

Sensitivity of lumogallion fluorescence to other species of interest in exposure experiments on AA2024-T3 was then carried out. The species of interest included chloride (aggressive ion) and possible inhibitor species: sodium metavanadate, cerium chloride, barium metaborate, yttrium chloride, sodium metatungstate, potassium phosphate, lanthanum chloride, sodium metasilicate, sodium phosphate, sodium molybdate, europium chloride, gadolinium chloride, and neodymium chloride. Solutions of 0.03 M NaCl, 51.1  $\mu$ M lumogallion, 0.2 M sodium acetate buffer (pH 5.2), and concentrations of AlCl<sub>3</sub> varying from 0 to 32.66  $\mu$ M were tested for fluorescence emission. Solutions of single inhibitors and binary combinations of inhibitors were tested at 0.17 mM total inhibitor concentration according to the following combinations: component A tested at 0.01 mM, 0.035 mM, 0.06 mM, 0.085 mM, 0.11 mM, 0.135 mM, and 0.16 mM with balance of the 0.17 mM total comprised of component B. The test solution comprised of 0.17 mM total inhibitor, 0.03 M NaCl, 51.1  $\mu$ M lumogallion and 0.2 M sodium acetate buffer (pH 5.2).

AA2024-T3 electrodes were exposed to inhibitor solution (3.4 mM total inhibitor concentration, 0.6 M NaCl) by immersing 1.2 cm of the electrode in the solution. Cells of the reaction frame were filled with 1.8 mL of 3.4 mM total inhibitor in 0.6 M NaCl solution. Desired pH of the solutions was obtained by addition of HCl or NaOH prior to exposure. Screening was performed on solutions containing 0.2 mM (5.9%), 0.7 mM (20.6%), 1.2 mM (35.3%), 1.7 mM (50%), 2.2 mM (64.7%), 2.7 mM (79.4%), and 3.2 mM (94.1%) of inhibitor A with the balance of the 3.4 mM total inhibitor comprised of inhibitor B. The combinations of inhibitors were comprised of the following inhibitors: sodium metavanadate, cerium chloride, barium metaborate, yttrium chloride, sodium metatungstate, potassium phosphate, lanthanum chloride, sodium metasilicate, sodium phosphate, sodium molybdate, europium chloride, gadolinium chloride, and neodymium chloride.

96 electrodes, connected to a reaction frame lid, were immersed in 96 independent cells containing solution of a standard 8 X 12 reaction frame. The electrodes were exposed to the

inhibitor solution, which was open to air, for 24 hours. After the 24 hour exposure, the reaction frame lid housing the electrodes was disconnected from the reaction frame and the remaining solution was acidified to ensure dissolution of any aluminum containing deposits that had precipitated from solution during the exposure period.

5           The resulting test solution was then mixed with acetate buffer and lumogallion to obtain the desired fluorometric assay solution. 0.1 mL of the test solution was added to 1.8 mL 0.2 M sodium acetate buffer (pH 5.2) and 0.1 mL 1.02 mM lumogallion. The resulting solution was 0.17 mM total inhibitor, 0.03 M NaCl, 0.19 M sodium acetate buffer, 51.1  $\mu$ M lumogallion and an unknown concentration of aluminum that was 5% of that resulting from the previous exposure.

10   200  $\mu$ L of this fluorometric solution was then transferred into our fluorometric assay plate for quantification of emission from the solution.

As an example of the determination of Aluminum Concentration for Estimating Corrosion Damage in AA2024-T3 Samples Tested in Parallel, 1.8 mL of test solution was transferred or mixed in each cell (96 cells) of a conventional 2 mL 8 X 12 reaction frame. Each cell may contain an independent test solution. One AA2024-T3 wire electrode was plugged into an electrical contact contained in the fabricated top for each cell, totaling 96 wire electrodes connected to the multichannel microelectrode analyzer (MMA). The fabricated top was then placed on the reaction frame containing the chemistries of interest and the system was left open to air.

15

20           After an exposure time (e.g., 24 hours), the reaction frame lid holding the electrodes was removed from the reaction frame, and the test solutions contained in the reaction frame were each dosed with HCl drop wise. The resulting test solution was mixed with acetate buffer and fluorescent dye (lumogallion or morin) to obtain the desired fluorometric assay solution. Typical test solutions were diluted by taking 100  $\mu$ L test solution and adding to it 100  $\mu$ L 1.02 mM lumogallion or 200  $\mu$ L 510  $\mu$ M morin and the balance 0.2 M sodium acetate buffer to reach 2 mL of total solution. The resulting solution was 0.17 mM total inhibitor, 0.03 M NaCl, 0.19 M

25

sodium acetate buffer, 51  $\mu\text{M}$  lumogallion or morin and an unknown concentration of aluminum that was 5% of that resulting from the previous exposure. Further dilutions included 5  $\mu\text{L}$ , 25  $\mu\text{L}$ , and 50  $\mu\text{L}$  test solution with the remainder of the 100  $\mu\text{L}$  added in 0.6 M NaCl to maintain a consistent  $[\text{Cl}^-]$  of 0.03 M in the fluorescence assay.

5           200  $\mu\text{L}$  of this fluorometric solution was then transferred into a fluorometric assay plate for quantification of emission from the solution. The emission of lumogallion fluorometric solutions was determined using a 491 nm excitation wavelength, a 590 nm cutoff filter, recording at a 610 nm emission wavelength. The emission of morin fluorometric solutions was determined using a 418 nm excitation wavelength, a 495 nm cutoff filter, recording at a 517 nm emission  
10 wavelength.

Aluminum concentration was determined by calculation from the emission and the calibration curves for each fluorescent dye. Standard deviations in the aluminum concentrations were estimated by taking the positive standard deviation in the emission value and determining the aluminum concentration at that value.

15           Another embodiment of the present invention is methods of coating a substrate with the materials described herein in sequential order. Examples of this embodiment are shown in Figures 19-24. The sequenced exposure of a metal to the relevant chemical species can provide even greater benefit and even more unexpected results than their simultaneous combination. That is, if  
20 compound A is placed in one container and compound B (and C, etc. ) is placed in another container, and then the metal is exposed to compound A and then B, or B and then A, or exposed multiple times, a very beneficial results can be obtained.

In Figures 19, 21, and 23, AA2024-T3 samples were exposed to cerium ions and metavanadate ions in either a simultaneous fashion where the ions existed together in the same  
25 bath, or sequentially where cerium ions were in one bath and metavanadate ions were in another. In the simultaneous experiments, the total molar concentration was always maintained to 3.4 mM.

In the sequenced exposure, again, the molar concentration always totaled 3.4 mM. If the cerium content was 1.7 mM, then the metavanadate concentration was 1.7 mM.

The horizontal axis of the figures is the mole percent of cerium in the mixture. The vertical axis is the measured quantity to determine the extent of corrosion. Figure 19 shows the result for aluminum ions released. Figure 3 shows the amount of surface copper. Figure 23 shows the DC current passed upon 100 mV polarization. In each case, larger values indicate more corrosion.

As can be seen in Figure 19, 21, and 27, the sequenced exposure of AA2024-T3 to cerium and metavanadate shows dramatic improvement in the corrosion protection provided by these materials. The sequenced exposure is synergistic at all conditions. More importantly, this result is unpredictable, since the simultaneous combination of these compounds results in an antagonistic interaction, just the opposite of what is observed by the sequenced exposure.

In Figures 20, 22, and 24, AA2024-T3 samples were exposed to lanthanum ions and molybdate ions in either a simultaneous fashion where the ions existed together in the same bath, or sequentially where lanthanum ions were in one bath and molybdate ions were in another. In the simultaneous experiments, the total molar concentration was always maintained to 3.4 mM. In the sequenced exposure, again, the molar concentration always totaled 3.4 mM. If the lanthanum content was 1.7 mM, then the molybdate concentration was 1.7 mM.

The horizontal axis of the figures is the mole percent of lanthanum in the mixture. The vertical axis is the measured quantity to determine the extent of corrosion. Figure 20 shows the result for aluminum ions released. Figure 4 shows the amount of surface copper. Figure 24 shows the DC current passed upon 100 mV polarization. In each case, larger values indicate more corrosion. As can be seen in Figure 20, 22, and 24, the sequenced exposure of AA2024-T3 to lanthanum and molybdate shows very different results in the corrosion protection provided by these materials. The sequenced exposure is antagonistic at all conditions. This result is not

predicted, since the simultaneous combination of these compounds results in a synergistic interaction.

5

### References

Throughout this application, and including the list below, various publications are referenced. All such publications are incorporated by reference herein in their entirety.

- 10 M. Stern, *J. Electrochem. Soc.* **24**:787-806 (1958).  
D. Bienstock and H. Field, *Corrosion*, **17**:87-90 (1961).  
N. R. Whitehouse, *Polymer Paint and Colour J.* **178**:239 (1984).  
J. Boxall, *Polymers, Paints and Colour J.* **174**:382-384 (1984).  
D. Bienstock and J. H. Field, *Corrosion* **17**:87-90 (1961).
- 15 B.R.W. Hinton, *Metal Finishing Sept. '91, Oct. '91*, 55-61, 15-20 (1991).  
H.E. Hager, C.J. Johnson, K.Y. Blohowiak, C.M. Wong, J.H. Jones, S.R. Taylor, R.L. Cook, Jr., *U.S. Patent 5,866,652* (The Boeing Company, U.S.A., 1999).  
R.L. Cook and S.R. Taylor, *Corrosion* **56**:321-333 (2000).  
Y. Feng, K.S. Siow, K.T. Teo, and A.K. Hsieh, *Corr. Sci.* **41**:829-852 (1999).
- 20 S. Sayed Azim, S. Muralidharan S. V. Iyer, B. Muralidharan, and T. Vasudevan, *Br. Corr. J.* **33**:297 (1998).  
M. Mustafa, S.M. Shahinoor, and I. Dulal, *Br. Corrosion J.* **32**:133-137 (1997).  
S. Sayed Azim, S. Muralidharan, S. Venkatkrishna Iyer, *J. of Appl. Electrochem.* **25**:495-500 (1995).
- 25 D.D.N. Singh and A.K. Dey, *Corrosion* **49**:594-600 (1993).  
M.A. Quraishi, J. Rawat, and M. Ajmal, *Corrosion* **55**:919-923 (1999).  
G.N. Mu, T.P. Zhao, and T. Gu, *Corrosion* **52**:853-856 (1996).  
M.A. Quraishi, S. Ahmed, and M. Ansari, *Br. Corrosion J.* **32**, 297-300 (1997).  
J.M. Abd El Kader, A.A. Warraky, and A.M. Abd El Aziz, *Br. Corr. J.* **33**:152-157
- 30 (1998).  
S. Rajendran, B.V. Apparao, and N. Palaniswamy, *Electrochem. Acta* **44**:533-537 (1998).



- T. Suzuki, H. Nishihara, and K. Aramaki, *Corr. Sci.* **38**:1223-1234 (1996).
- Y. Gonzalez, M.C. LaFont, N. Pebere, and F. Moran, *J. of Appl. Electrochem.* **26**:1259-1265 (1996).
- Y. Feng, K.S. Siow, W.K. Teo, K.L. Tan, and A.K. Hsieh, *Corrosion* **53**:546-555 (1997).
- 5 S. Gonzalez, M.M. Laz, R.M. Souto, R.C. Salvarezza, and A.J. Arvia, *Corrosion* **49**:450-456 (1993).
- K.T. Carron, M.L. Lewis, J. Dong, J. Ding, G. Xue, and Y. Chen, *J. Matl. Sci.* **28**:409-4103 (1993).
- K. Aramaki and N. Hackerman, *J. Electrochem. Soc.* **116**:558 (1969).
- 10 N. Shikai and L. Yefen, Study of the Synergy Mech. of Acidic Inh., 8th Europ. Symp. on Corr. Inh. (1995).
- S.A. Hodges, W.A. Uphues, and M.T. Tran, *Surf. Coatings Australia* **34**: 24-30 (1997).
- A.T. Evans, J.D. Scantlebury, and L.M. Callow, The Adhesion and Corrosion of Chromate Cont. Coatings on Al, J.D. Scantlebury, and M.W. Kendig, Ed., Adv. In Corr. Prot. By Org. Coatings II (ECS, Pennington, NJ, 1995).
- 15 R.L. Cook, Jr. M.S., University of Virginia (1995).
- S. R. Taylor, An Examination of Possible Synergy Between Paired Combinations of Transition and Rare Earth Metal Salts, 197th Meeting of the ECS, Toronto, CAN (ECS, Pennington NJ, 2000).
- 20 E.W. MacFarland and W.H. Weinberg, *Trends in Biotechnology* **17**:107-115 (1999).
- B. Jandeleit, D.J. Schaefer, T.S. Powers, et. al., *Angew. Chem. Intl. Ed.* **38**:2494 (1999).
- J.C. Meredith, A. Karim, and E.J. Amis, *Macromolecules* **33** (2000).
- J.J. Hank, *J. Mater. Sci.* **2**:964-971 (1970).
- Maria Posada, L.E. Murr, C.S. Niou, D. Roberson, D. Little, Roy Arrowood, and Debra George, Exfoliation and Related Microstructures in 2024 Aluminum Body Skins on Aging Aircraft, *Materials Characterization* **38**: 259-272 (1997).
- K. Aramaki and N. Hackerman, *J. Electrochem Soc.* **116**, 568 (1969).
- K. Aramaki, M. Hagiwara, and H. Nishihara, *Corros. Sci.* **27**, 487 (1987).
- T. Suzuki, H. Nishihara, and K. Aramaki, *Corros. Sci.* **38**, 1223 (1996).
- 30 M. A Quraishi, J. Rawat, and M. Ajmal, *Corrosion* **55**, 919 (1999).
- S. Syed Azim, S. Muralidharan, S. Venkatakrisna Iyer, *J. Applied Electrochem.* **25**, 495 (1995).
- S. Syed Azim, S. Muralidharan, S. Venkatakrisna Iyer, B. Muralidharan, T. Vasudevan, *British Corrosion Journal* **33**, 297 (1998).

Kendig, Martin, US Patent Application 20030019391.

W.A. Badawy, F.M. Al-Kharafi, and A.S. El-Azab, Electrochemical behaviour and corrosion inhibition of Al, Al-6061 and Al-Cu in neutral aqueous solutions, *Corrosion Science* 41 (1999) 709-727.

5        Sayed S. Abdel, Hamdi H. Hassan and Mohammed A. Amin, Corrosion and corrosion inhibition of Al and some alloys in sulphate solutions containing halide ions investigated by an impedance technique, *Applied Surface Science* 187 (28 February 1999) 279-290.

M.A. Arenas, A. Conde, and J.J de Damborena, Cerium: A suitable green inhibitor for tinplate, *Corrosion Science* 44 (2002) 511-520.

10        H.B. Shao, J.M. Wang, Z. Zhang, J.Q. Zhang, and C.N. Cao, The cooperative effect of calcium ions and tartrate ions on the corrosion inhibition of pure aluminum in an alkaline solution, *Materials Chemistry and Physics* 77 (2002) 305-309.

R.G. Buchheit, R.P. Grant, P.F. Hlava, B. Mckenzie, and G.L. Zender, "Local Dissolution Phenomena Associated with S Phase (Al<sub>2</sub>CuMg) Particles in Aluminum Alloy 2024-T3," *J. Electrochem. Soc.* **144**, No. 8, August 1997.

G.S. Chen, M. Gao, R.P. Weir, "Microconstituent-Induced Pitting Corrosion in Aluminum Alloy 2024-T3," *Corrosion*, **52**, No 1, January 1996, 8-15.

20        R.G. Buchheit, M.A. Martinez, and L.P. Montes, "Evidence for Cu Ion Formation by Dissolution and Dealloying the Al<sub>2</sub>CuMg Intermetallic Compound in Rotating Ring-Disk Collection Experiments," *J. Electrochem. Soc.* **147**, (1) 119-124 (2000).

N. Dimitrov, J.A. Mann, and K. Sieradski, "Copper Redistribution during Corrosion of Aluminum Alloys," *J. Electrochem. Soc.* **146**, (1) 98-102 (1999).

Alison J. Davenport and Bin Liu, "Copper Accumulation during Cleaning of Al-Cu Alloys," *Electrochemical Society Proceedings*, Vol. 2000-23, p.41-46

25        D.A. Little, J.R. Ferrell, and J.R. Scully, "The Effect of Pretreatment and Temper on the Under-Paint Corrosion of AA2024", *Corrosion/2004*, paper no. 04277, NACE, Houston, TX (2004)

D.A. Little and J.R. Scully, "The Effect of Alloy Composition and Pretreatment on the Under-Paint Corrosion of Copper Bearing Aluminum Alloys," in *Proceedings of the 2003 Tri-Service Corrosion Conference*, Organized by AFOSR/AFRL (Tri-Services Committee on Corrosion, U.S. Department of Defense), Las Vegas, NV, Nov 17 -21, 2003.

30        D.A. Little, M.A. Jakab, and J.R. Scully, "The Effect of Pretreatment on the Under-Paint Corrosion of AA2024-T3 at Various Temperatures," *Corrosion*, (submitted).

M.A. Jakab, F. Presuel-Moreno, and J.R. Scully, "Critical Concentrations Associated with Cobalt, Cerium, and Molybdenum Inhibition of AA2024-T3: Delivery from Al-Co-Ce(-Mo) Alloys," *Corrosion* (in press).

5

The invention thus being described, it will be apparent to those skilled in the art that various modifications and variations can be made in the present invention without departing from the scope or spirit of the invention. All such modifications and variations are included in the scope of this invention. As one specific example, aluminum alloy 2024 is discussed for exemplary purposes only, and should not be construed as being limiting of the present invention.

10

Unless otherwise indicated, all numbers expressing quantities of ingredients, properties such as reaction conditions, and so forth used in the Specification and Claims are to be understood as being modified in all instances by the term "about." Accordingly, unless indicated to the contrary, the numerical parameters set forth in the Specification and Claims are approximations that may vary depending upon the desired properties sought to be determined by the present invention.

15

Notwithstanding that the numerical ranges and parameters setting forth the broad scope of the invention are approximations, the numerical values set forth in the experimental or example sections are reported as precisely as possible. Any numerical value, however, inherently contain certain errors necessarily resulting from the standard deviation found in their respective testing measurements.

20

We claim:

1. An anti-corrosive composition, comprising:

a combination of at least two of the following materials: vanadates, molybdates, tungstates, silicates, phosphates, borates, Ce cations, Y cations, La cations, Eu cations, Gd cations, Nd cations, and reaction products thereof;

provided that combinations that consist of two or more of the following materials are excluded: vanadates, borates, Ce cations, Y cations, La cations.

2. The anti-corrosive composition of claim 1, comprising a binary combination.

3. The anti-corrosive composition of claim 1, comprising a combination of three or more materials.

4. An anti-corrosive composition, comprising at least one of the following binary combinations: sodium metavanadate and sodium metatungstate, sodium metavanadate and sodium metasilicate, sodium metavanadate and sodium phosphate, sodium metavanadate and sodium molybdate, barium metaborate and sodium metatungstate, barium metaborate and sodium metasilicate, cerium chloride and sodium metatungstate, cerium chloride and sodium metasilicate, cerium chloride and sodium molybdate, yttrium chloride and sodium metatungstate, yttrium chloride and potassium phosphate, yttrium chloride and sodium phosphate, yttrium chloride and sodium metasilicate, yttrium chloride and sodium molybdate, europium chloride and sodium molybdate, gadolinium chloride and sodium molybdate, neodymium chloride and sodium molybdate, sodium metatungstate and potassium phosphate, sodium metatungstate and lanthanum chloride, sodium metatungstate and sodium metasilicate, sodium metatungstate and sodium

molybdate, potassium phosphate and lanthanum chloride, potassium phosphate and sodium molybdate, lanthanum chloride and sodium metasilicate, lanthanum chloride and sodium phosphate, lanthanum chloride and sodium molybdate, sodium metasilicate and sodium phosphate, sodium metasilicate and sodium molybdate, sodium phosphate and sodium molybdate.

5

5. The anti-corrosive composition, comprising at least one of the following combinations:

sodium metavanadate, sodium metasilicate, sodium molybdate;

sodium metavanadate, sodium metasilicate, sodium phosphate;

sodium metavanadate, sodium phosphate, sodium molybdate;

10 cerium chloride, lanthanum chloride, sodium metasilicate;

sodium metavanadate, sodium metasilicate, lanthanum chloride;

sodium metavanadate, sodium molybdate, lanthanum chloride;

cerium chloride, lanthanum chloride, sodium metavanadate;

cerium chloride, lanthanum chloride, sodium molybdate;

15 cerium chloride, sodium metasilicate, sodium molybdate;

lanthanum chloride, sodium metasilicate, sodium molybdate;

cerium chloride, sodium metasilicate, lanthanum chloride, sodium molybdate.

6. A method of high-throughput screening of potential corrosion inhibitors, comprising:

20 providing a metal sample;

contacting the metal sample with a sample corrosion inhibitor;

subjecting said sample to DC polarization, open circuit conditions followed by cyclic voltammetry, corrosive exposure followed by fluorometric measurements, or any other electrochemical, chemical, or optical method or their combination thereof.

- 5 7. A method of coating a substrate, comprising exposing the substrate to a composition that comprises at least one of the following materials: vanadates, molybdates, tungstates, silicates, phosphates, borates, Ce cations, Y cations, La cations, Eu cations, Gd cations, Nd cations; and exposing the substrate to a second composition that comprises one of the following materials: vanadates, molybdates, tungstates, silicates, phosphates, borates, Ce cations, Y cations, 10 La cations, Eu cations, Gd cations, Nd cations.
8. A method of coating a substrate, comprising exposing a substrate to at least one of the following binary combinations: sodium metavanadate and sodium metatungstate, sodium metavanadate and sodium metasilicate, sodium metavanadate and sodium phosphate, sodium 15 metavanadate and sodium molybdate, barium metaborate and sodium metatungstate, barium metaborate and sodium metasilicate, cerium chloride and sodium metatungstate, cerium chloride and sodium metasilicate, cerium chloride and sodium molybdate, yttrium chloride and sodium metatungstate, yttrium chloride and potassium phosphate, yttrium chloride and sodium phosphate, yttrium chloride and sodium metasilicate, yttrium chloride and sodium molybdate, europium 20 chloride and sodium molybdate, gadolinium chloride and sodium molybdate, neodymium chloride and sodium molybdate, sodium metatungstate and potassium phosphate, sodium metatungstate and lanthanum chloride, sodium metatungstate and sodium metasilicate, sodium metatungstate and sodium molybdate, potassium phosphate and lanthanum chloride, potassium phosphate and sodium molybdate, lanthanum chloride and sodium metasilicate, lanthanum chloride and sodium

phosphate, lanthanum chloride and sodium molybdate, sodium metasilicate and sodium phosphate, sodium metasilicate and sodium molybdate, sodium phosphate and sodium molybdate;


wherein said exposure includes introducing the substrate to the first member of the binary combination, followed by introducing the substrate to the second member of the binary combination.

5

9. A substrate comprising a coating, the coating comprising a combination of at least two of the following materials: vanadates, molybdates, tungstates, silicates, phosphates, borates, Ce cations, Y cations, La cations, Eu cations, Gd cations, Nd cations, and reaction products thereof;

10

provided that combinations that consist of two or more of the following materials are excluded: vanadates, borates, Ce cations, Y cations, La cations.

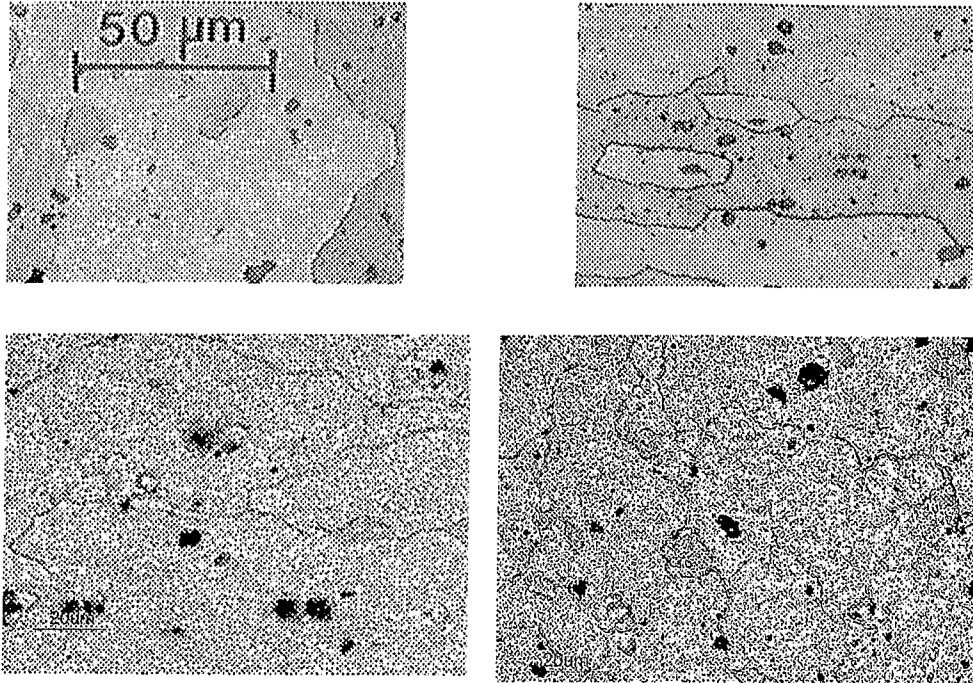

**Figure 1.** Metallography of 2024 sheet<sup>34</sup> (top left and right), cross-section of 2024 wire (bottom right), longitudinal cross-section of 2024 wire (bottom left); (images to scale)





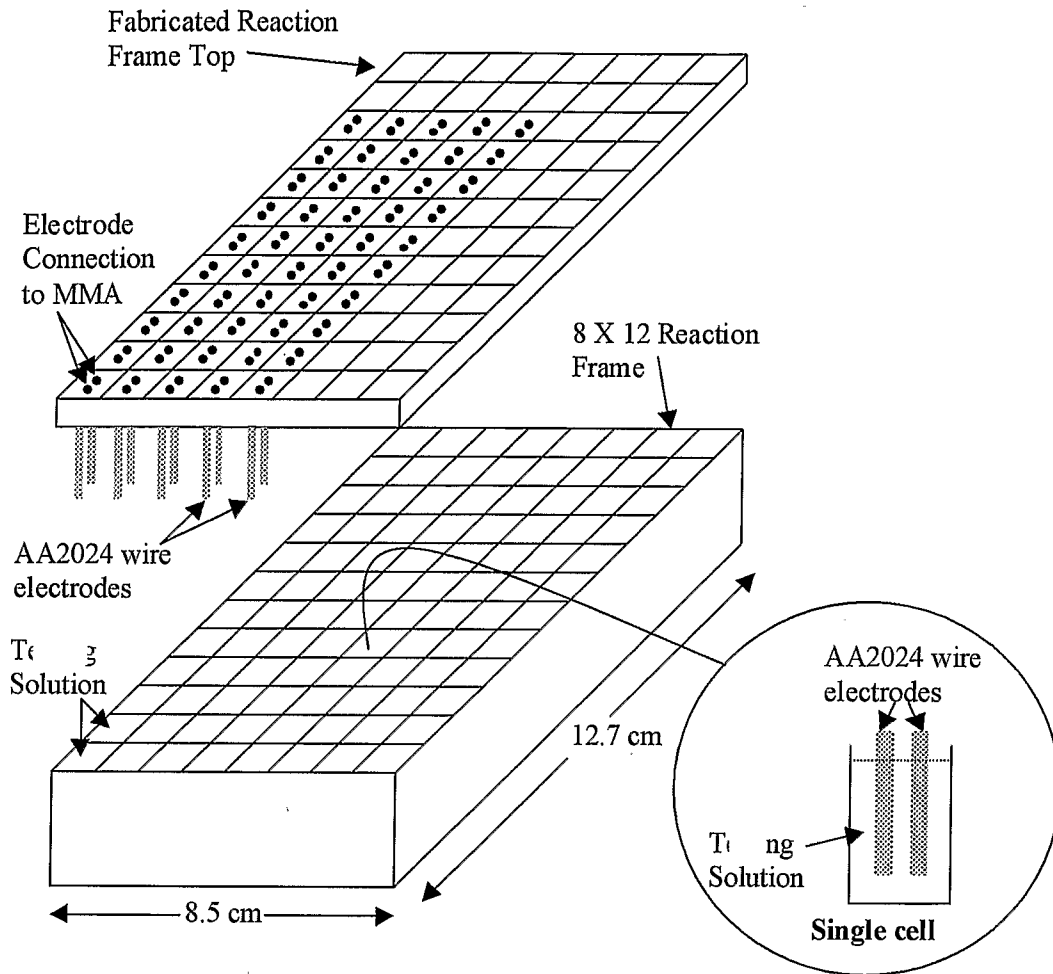


Figure 2. Schematic of two-electrode array of AA2024 wires and reaction frame

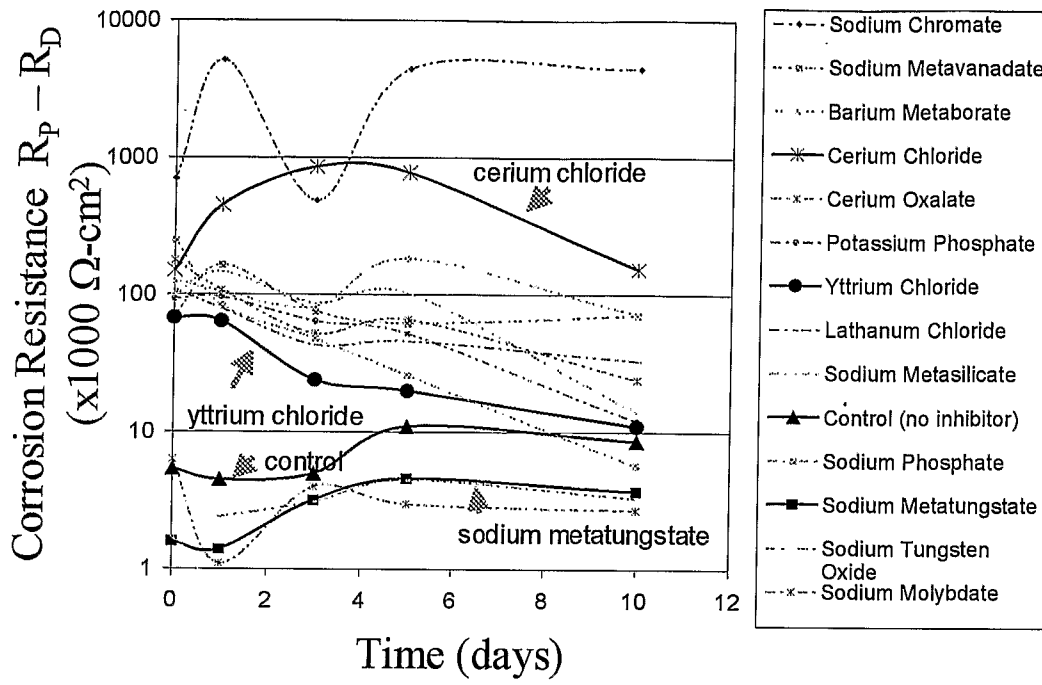

**Figure 3.** Corrosion resistance versus time as determined by EIS of AA2024-T3 sheet in 3.4 mM inhibitor + 0.6 M NaCl solution adjusted to pH 7.<sup>8,26</sup>

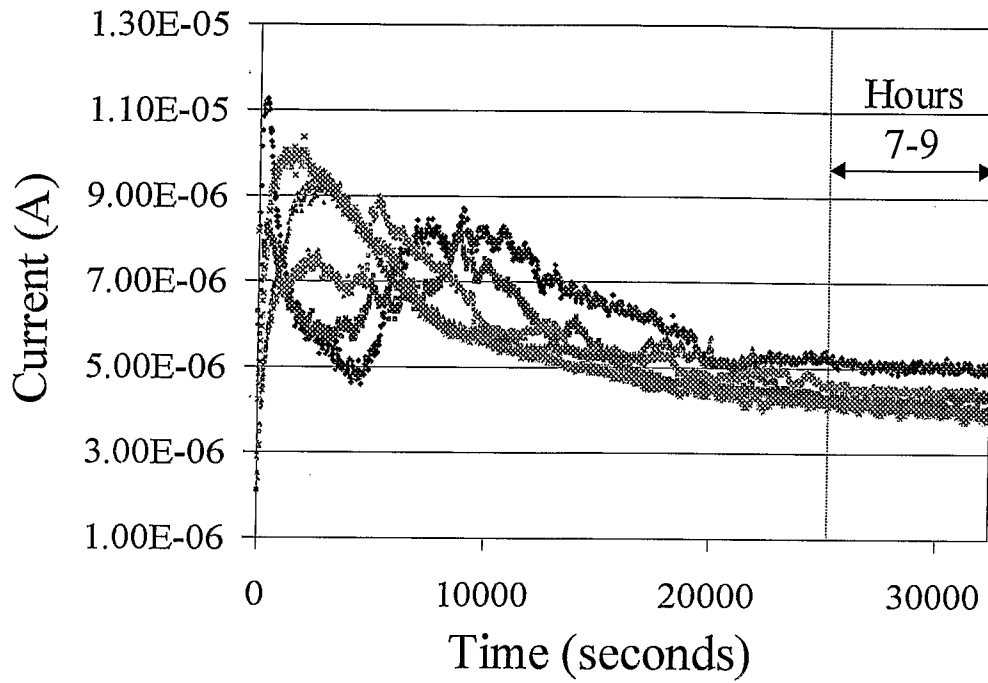

**Figure 4.** Example MMA output –  $I_{2024/2024}$  – 100 mV bias of AA2024 electrodes exposed to 3.4 mM  $\text{Na}_3\text{PO}_4$  in 0.6 M NaCl solution adjusted to pH 7

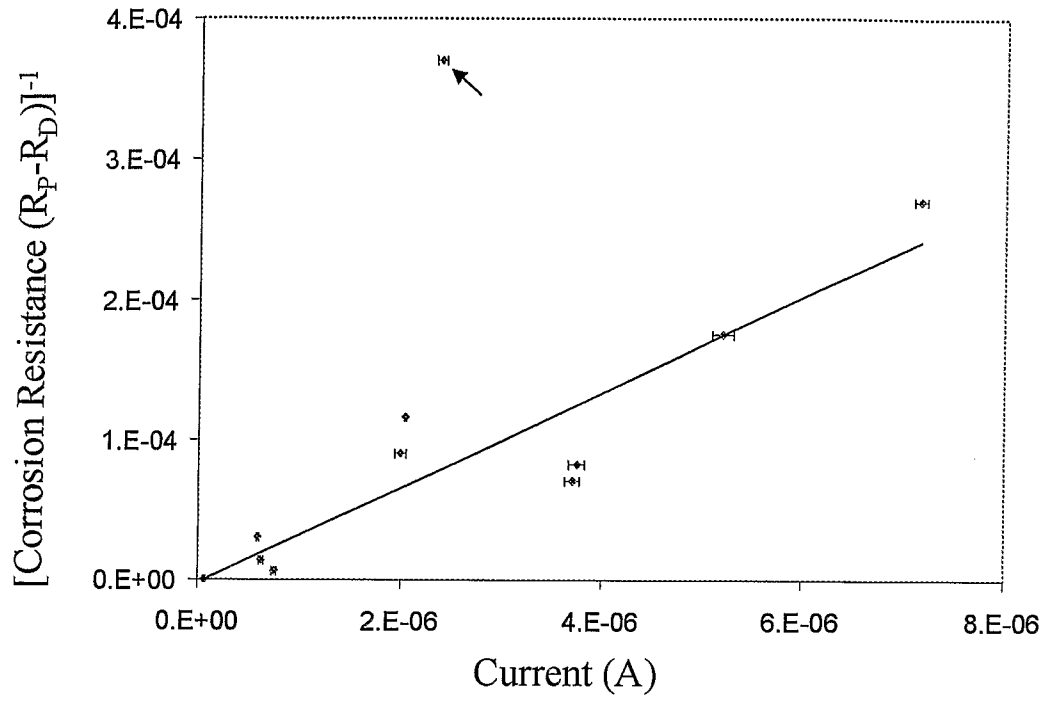


Figure 5. Comparison of inhibitor performance in EIS and 100 mV DC bias rapid screening for 11 different chemistries

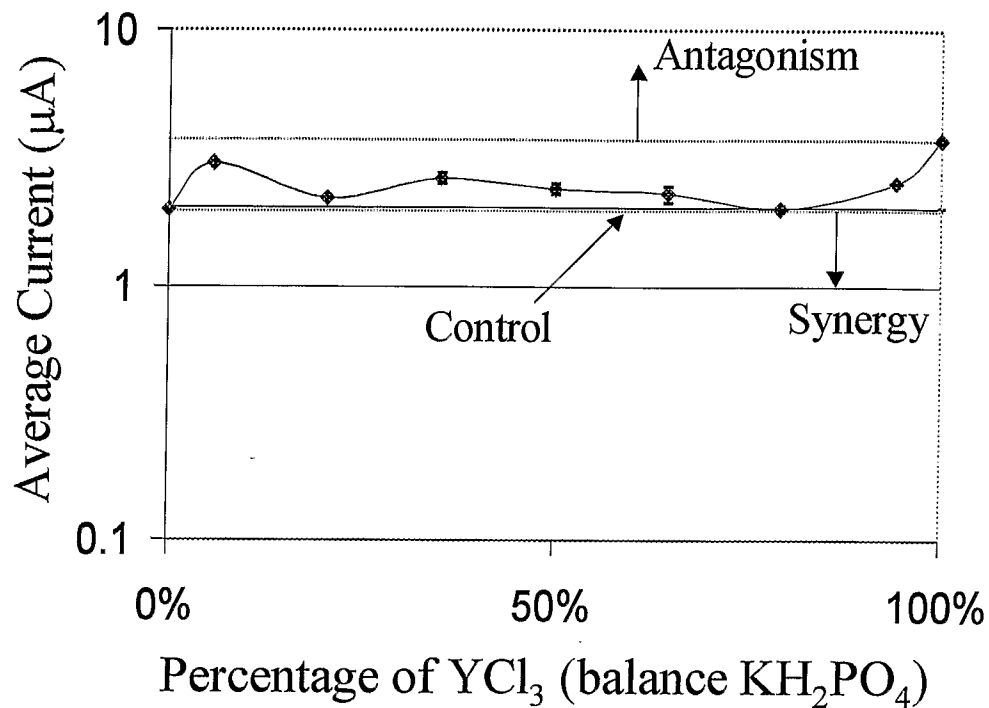


Figure 6. Plot of current of 3.4 mM KH<sub>2</sub>PO<sub>4</sub>/YCl<sub>3</sub>, 0.6 M NaCl (pH 7)


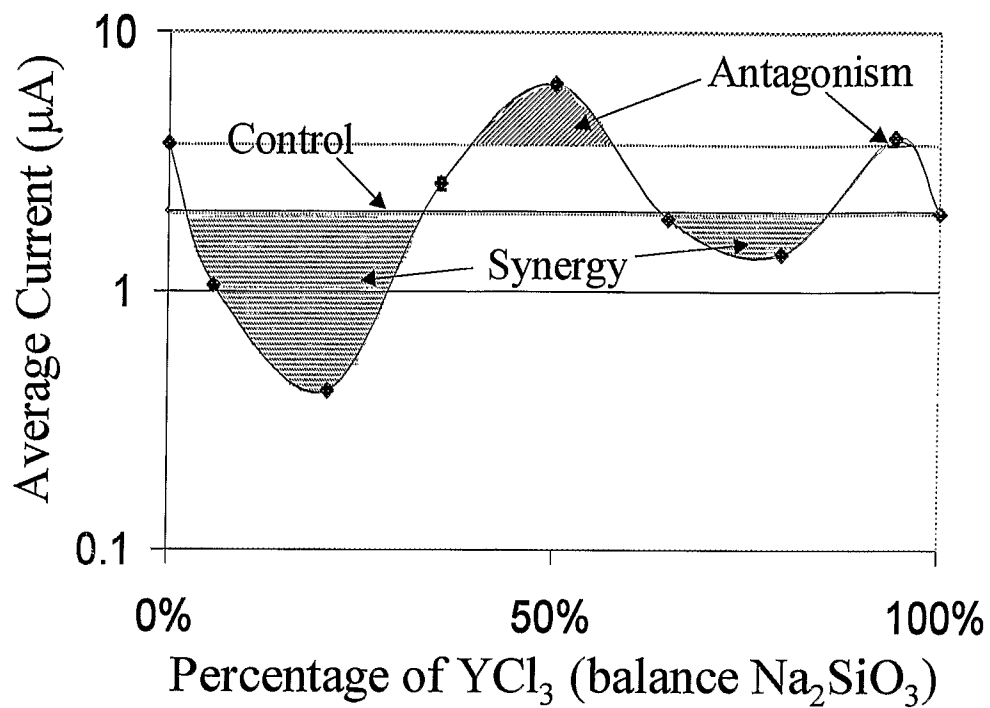



Figure 7. Plot of current of 3.4 mM  $\text{Na}_2\text{SiO}_3/\text{YCl}_3$ , 0.6 M NaCl (pH 7)

8/24

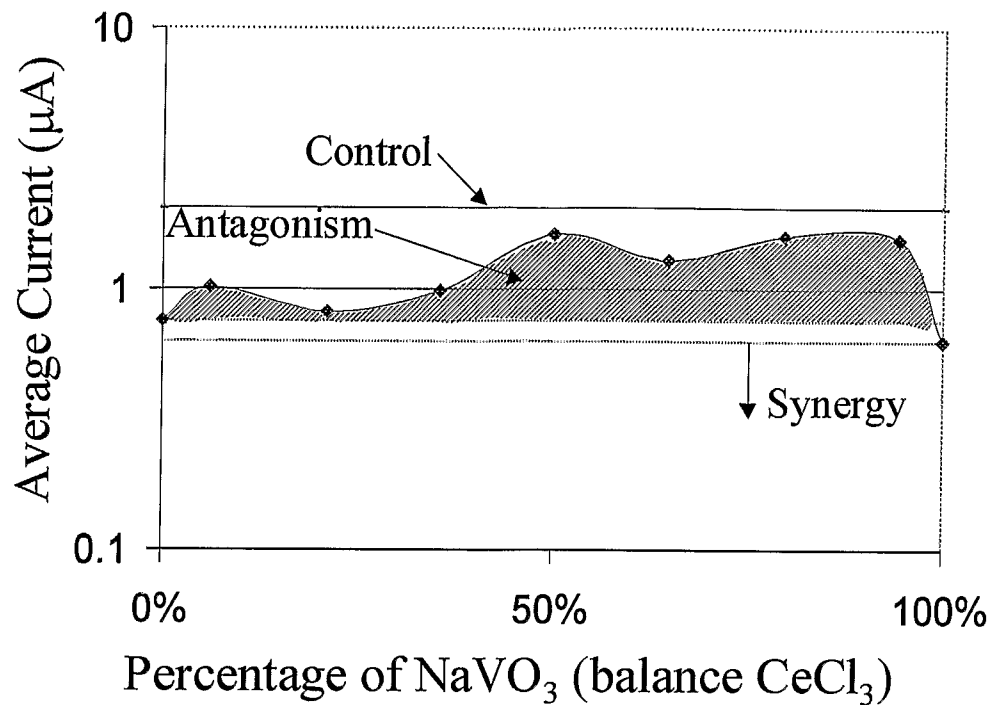

**Figure 8.** Plot of current of 3.4 mM  $\text{NaVO}_3/\text{CeCl}_3$ , 0.6 M  $\text{NaCl}$  (pH 7)

9/24

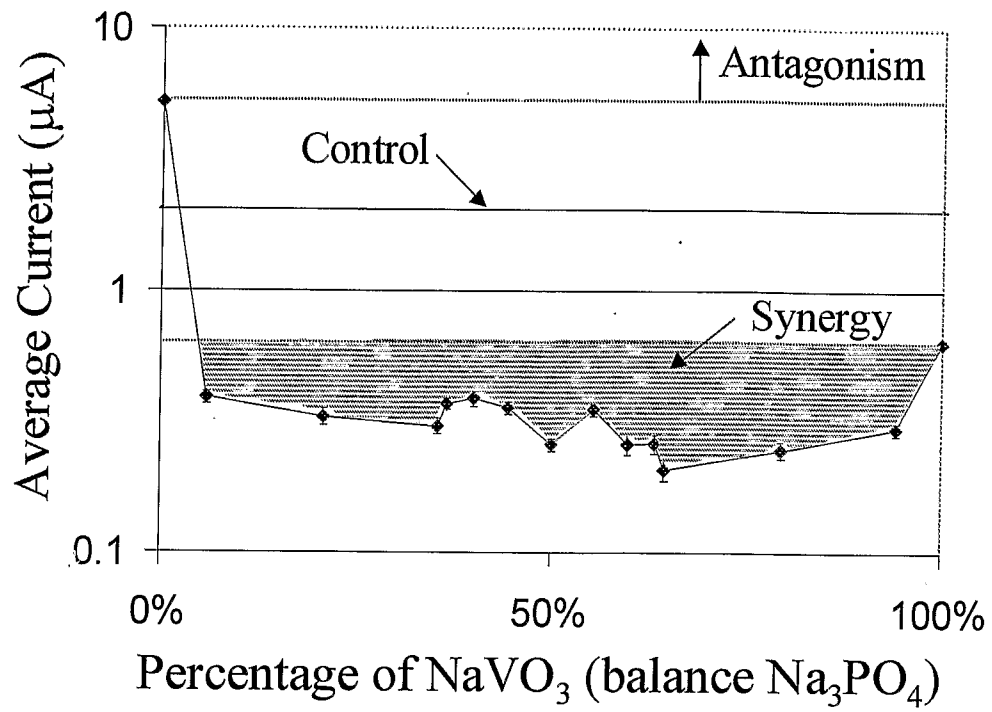

**Figure 9.** Plot of current of 3.4 mM NaVO<sub>3</sub>/Na<sub>3</sub>PO<sub>4</sub>, 0.6 M NaCl (pH 7)



10/24


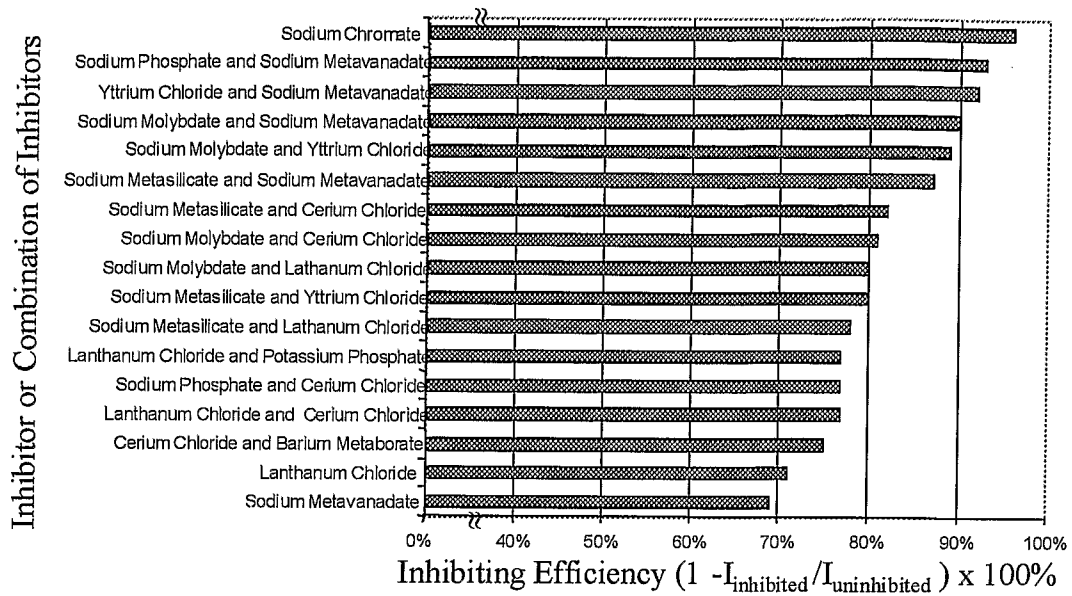


Figure 10. Inhibiting efficiency of the most effective inhibitors or combinations tested

11/24

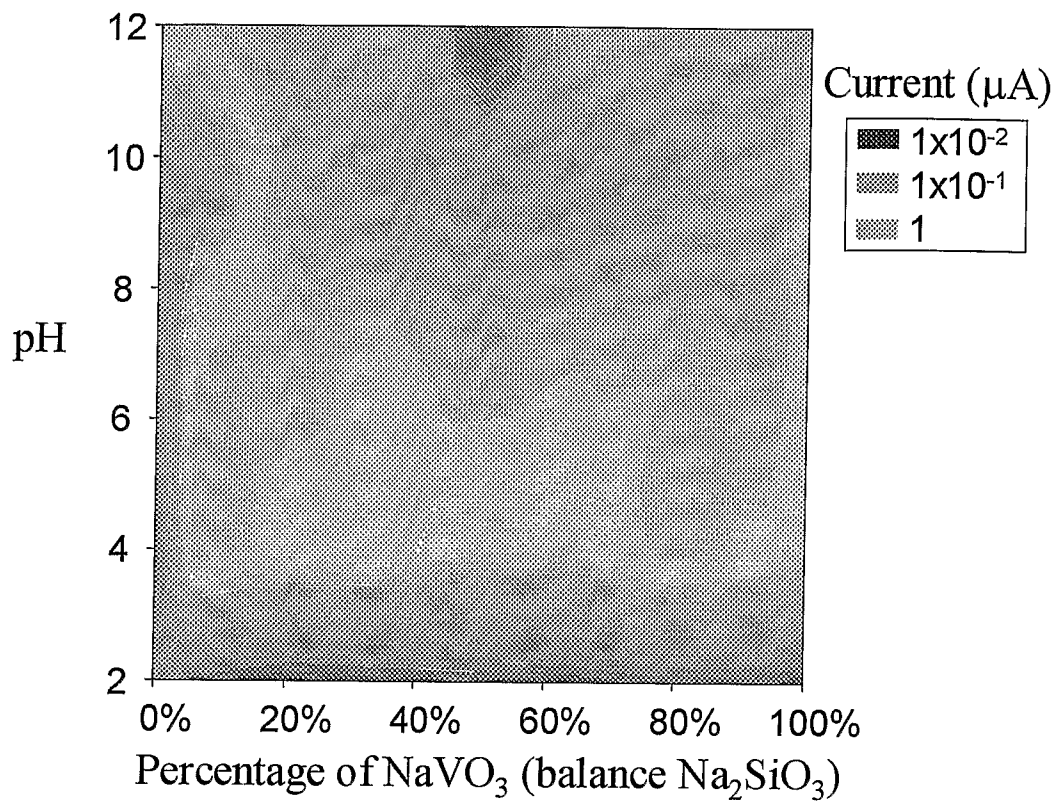


**Figure 11.** Current from MMA testing of 3.4 mM NaVO<sub>3</sub>/Na<sub>2</sub>SiO<sub>3</sub> varying pH 2-12.

Inhibitor A	Inhibitor B	Percentage Points Exhibiting Synergy	Percentage Points Exhibiting Antagonism	All Mixture Currents Less than Control?	Percentage Points with Currents Under $5 \times 10^{-8}$ A	Percentage Points with Currents Under $1 \times 10^{-7}$ A	Behavior Observed
NaVO3	BaB2O4	57.1%	0.0%	yes	42.9%	100.0%	Synergy
NaVO3	CeCl3	0.0%	85.7%	yes	0.0%	85.7%	Antagonism
NaVO3	YCl3	28.6%	28.6%	yes	14.3%	71.4%	Synergy and Antagonism
NaVO3	NaWO4-3WO3	57.1%	0.0%	no	57.1%	85.7%	Synergy
NaVO3	KH2PO4	14.3%	0.0%	yes	0.0%	100.0%	Lack of Benefit
NaVO3	LaCl3	28.6%	42.9%	yes	28.6%	85.7%	Synergy and Antagonism
NaVO3	Na2SiO3	28.6%	0.0%	yes	28.6%	100.0%	Mild Synergy
NaVO3	Na3PO4	0.0%	0.0%	yes	0.0%	85.7%	Lack of Benefit
NaVO3	Na2MoO4	71.4%	0.0%	yes	71.4%	85.7%	Synergy
BaB2O4	CeCl3	71.4%	0.0%	yes	71.4%	71.4%	Synergy
BaB2O4	YCl3	100.0%	0.0%	yes	42.9%	100.0%	Synergy
BaB2O4	NaWO4-3WO3	28.6%	14.3%	no	0.0%	0.0%	Synergy and Antagonism
BaB2O4	KH2PO4	0.0%	0.0%	yes	0.0%	0.0%	Lack of Benefit
BaB2O4	LaCl3	85.7%	0.0%	yes	71.4%	100.0%	Synergy
BaB2O4	Na2SiO3	28.6%	14.3%	yes	0.0%	14.3%	Synergy and Antagonism
BaB2O4	Na3PO4	0.0%	14.3%	yes	0.0%	0.0%	Mild Antagonism
BaB2O4	Na2MoO4	0.0%	0.0%	yes	0.0%	0.0%	Lack of Benefit
CeCl3	YCl3	28.6%	0.0%	yes	57.1%	100.0%	Mild Synergy
CeCl3	NaWO4-3WO3	71.4%	0.0%	yes	71.4%	85.7%	Synergy
CeCl3	KH2PO4	0.0%	42.9%	no	0.0%	42.9%	Antagonism
CeCl3	LaCl3	14.3%	28.6%	yes	42.9%	100.0%	Synergy and Antagonism
CeCl3	Na2SiO3	57.1%	0.0%	yes	57.1%	100.0%	Synergy
CeCl3	Na3PO4	0.0%	57.1%	no	0.0%	42.9%	Antagonism
CeCl3	Na2MoO4	85.7%	0.0%	yes	85.7%	85.7%	Synergy
YCl3	NaWO4-3WO3	85.7%	0.0%	yes	85.7%	85.7%	Synergy
YCl3	KH2PO4	28.6%	28.6%	no	0.0%	28.6%	Synergy and Antagonism
YCl3	LaCl3	0.0%	100.0%	yes	0.0%	0.0%	Antagonism
YCl3	Na2SiO3	100.0%	0.0%	yes	71.4%	100.0%	Synergy
YCl3	Na3PO4	28.6%	57.1%	no	0.0%	28.6%	Synergy and Antagonism
YCl3	Na2MoO4	100.0%	0.0%	yes	100.0%	100.0%	Synergy
NaWO4-3WO3	KH2PO4	85.7%	0.0%	yes	0.0%	0.0%	Synergy
NaWO4-3WO3	LaCl3	85.7%	0.0%	yes	28.6%	85.7%	Synergy
NaWO4-3WO3	Na2SiO3	85.7%	0.0%	yes	0.0%	71.4%	Synergy
NaWO4-3WO3	Na3PO4	0.0%	71.4%	no	0.0%	0.0%	Antagonism
NaWO4-3WO3	Na2MoO4	28.6%	71.4%	no	0.0%	0.0%	Synergy and Antagonism
KH2PO4	LaCl3	28.6%	28.6%	no	14.3%	28.6%	Synergy and Antagonism
KH2PO4	Na2SiO3	0.0%	0.0%	yes	0.0%	0.0%	Lack of Benefit
KH2PO4	Na2MoO4	42.9%	42.9%	no	0.0%	0.0%	Synergy and Antagonism
LaCl3	Na2SiO3	71.4%	0.0%	yes	71.4%	100.0%	Synergy
LaCl3	Na3PO4	28.6%	57.1%	no	14.3%	28.6%	Synergy and Antagonism
LaCl3	Na2MoO4	100.0%	0.0%	yes	100.0%	100.0%	Synergy
Na2SiO3	Na3PO4	28.6%	0.0%	yes	0.0%	0.0%	Mild Synergy
Na2SiO3	Na2MoO4	42.9%	0.0%	yes	0.0%	0.0%	Mild Synergy
Na3PO4	Na2MoO4	85.7%	0.0%	yes	0.0%	0.0%	Synergy

Figure 12. Chart of Synergy Behavior based on Peak 1 Values from Cyclic Voltammetry Testing (24 hour exposure)



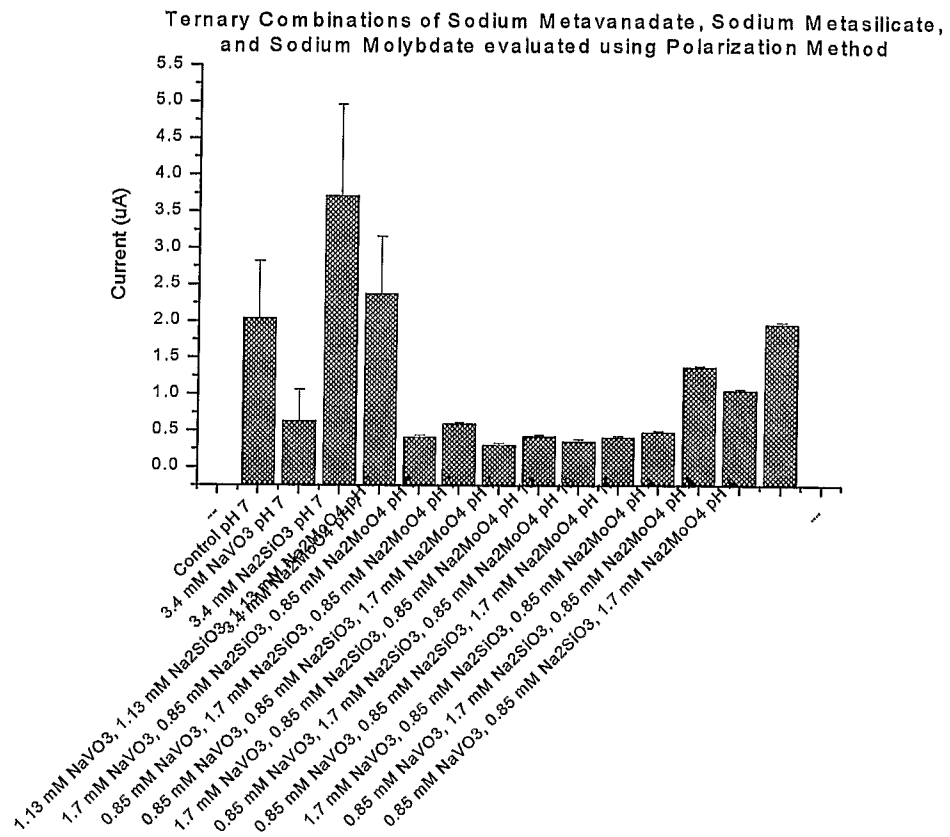

**Figure 14**

Ternary Combinations of Sodium Metavanadate, Sodium Metasilicate, and Sodium Phosphate evaluated using Polarization Method

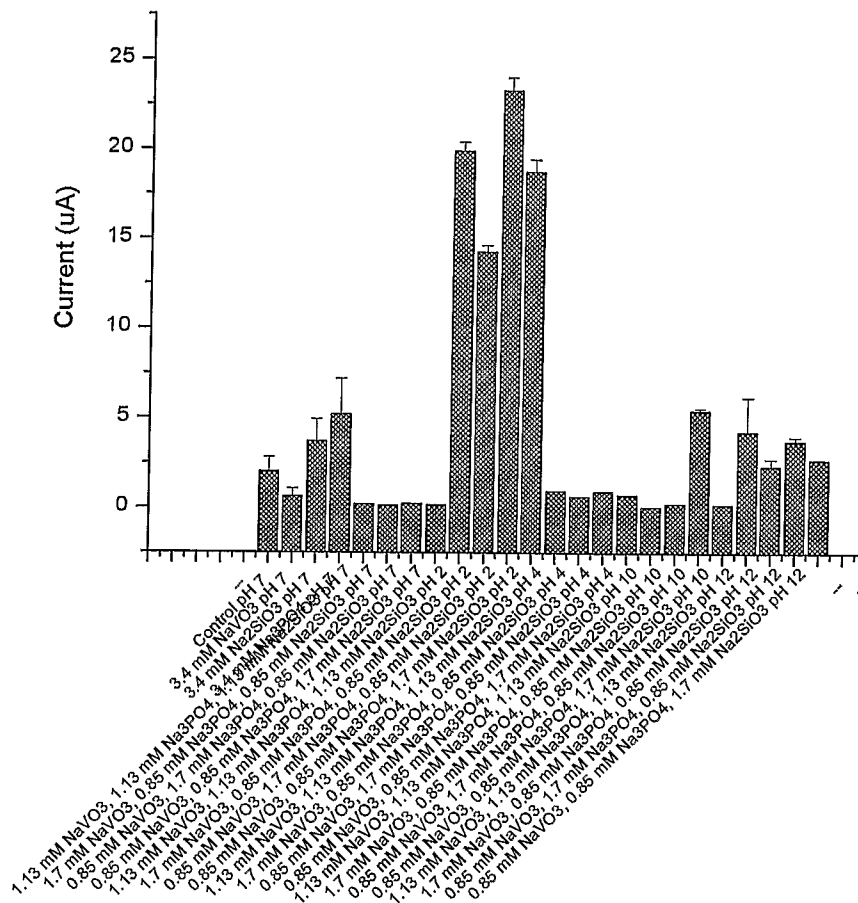


Figure 15

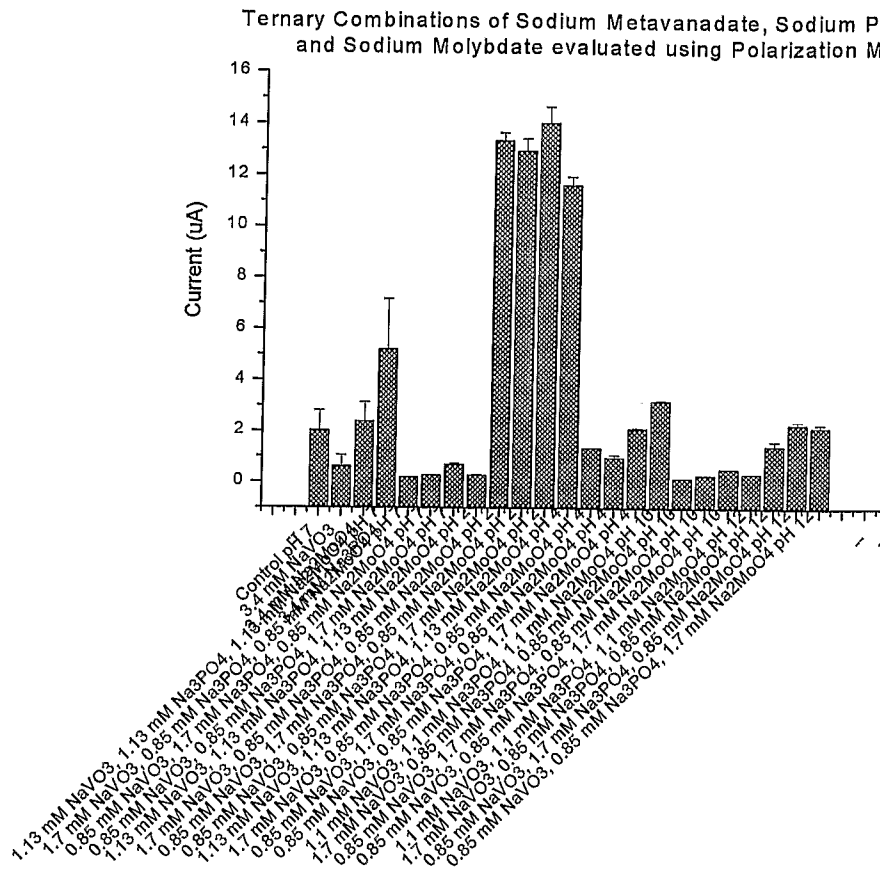


Figure 16


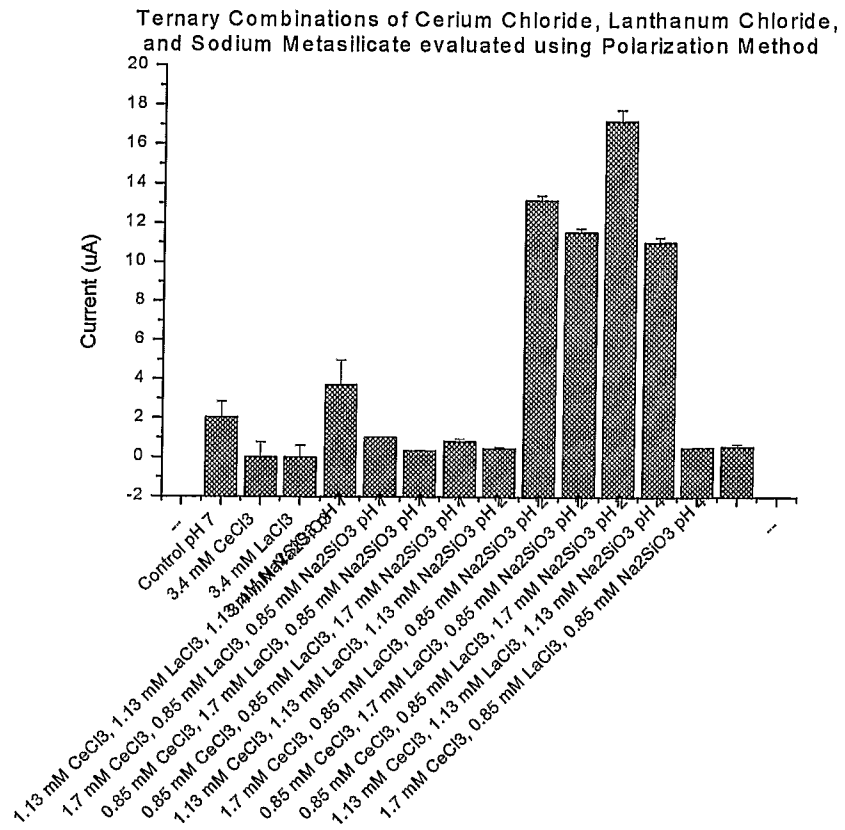



Figure 17



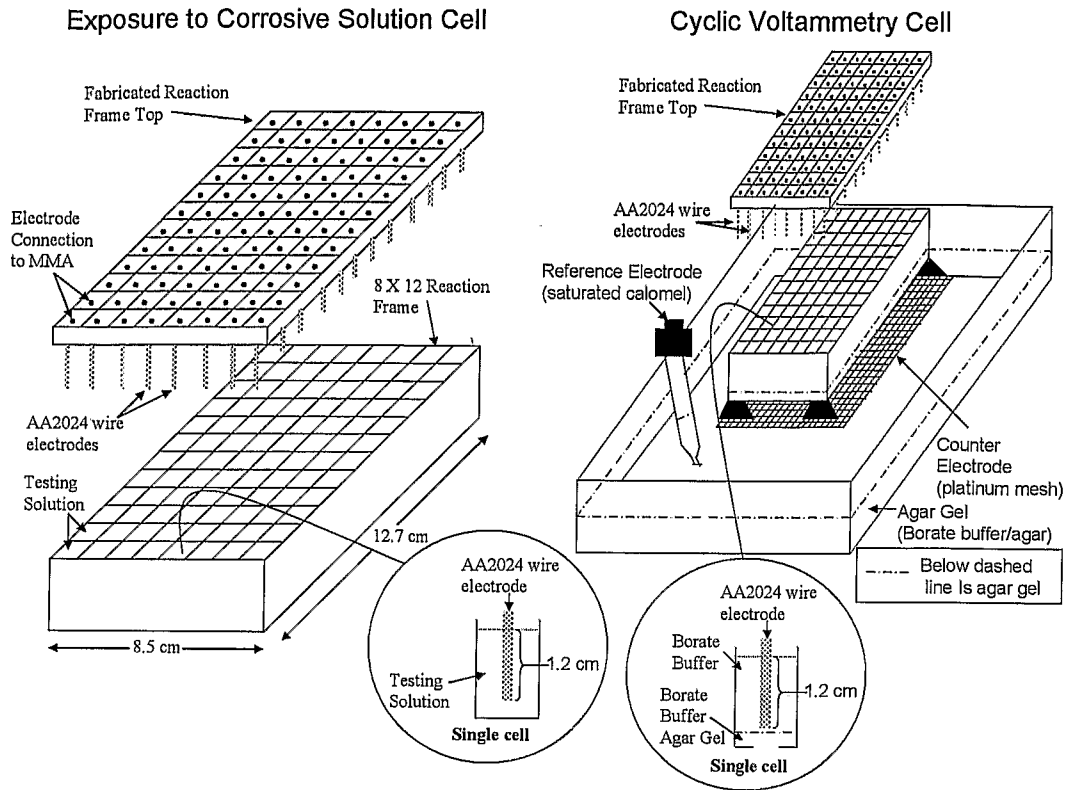


**Figure 18.** Schematic of Cells used for exposure of AA2024-T3 wire to 3.4 mM total inhibitor, 0.6 M NaCl (left) and for cyclic voltammetry of corroded AA2024-T3 in borate buffer using common counter and reference electrodes (right)

### Al<sup>3+</sup> Concentration Simultaneous and Sequenced Exposure of AA2024-T3 to Mixtures of Cerium and Metavanadate

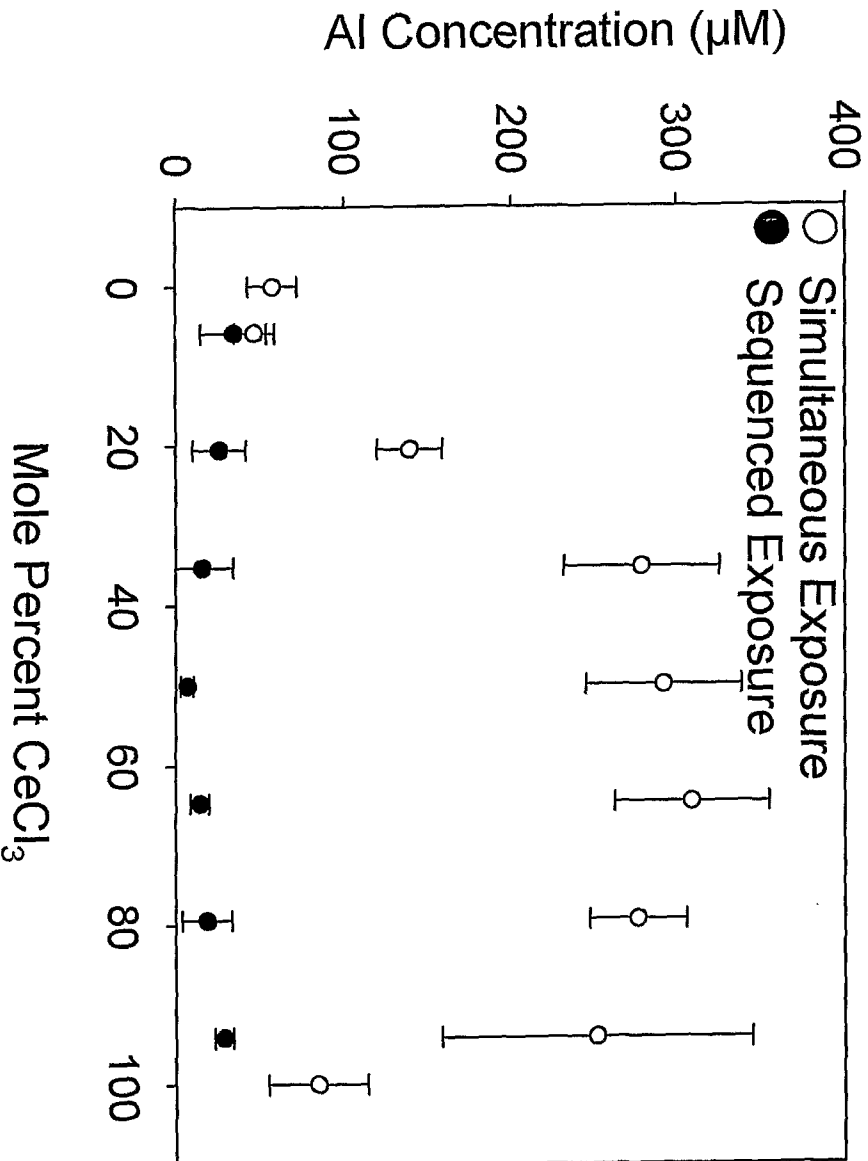

AA2024-T3 exposed to 3.4 mM total CeCl<sub>3</sub> + NaVO<sub>3</sub> in 0.6 M NaCl for 24 hours  
Sequenced exposure - AA2024-T3 immersed in CeCl<sub>3</sub> (A) in 0.6 M NaCl for 24 hours, then  
moved to NaVO<sub>3</sub> (B) on 0.6 M NaCl solution for 24 hours. A + B = 3.4 mM


### Al<sup>3+</sup> Concentration Simultaneous and Sequenced Exposure of AA2024-T3 to Mixtures of Lanthanum and Molybdate

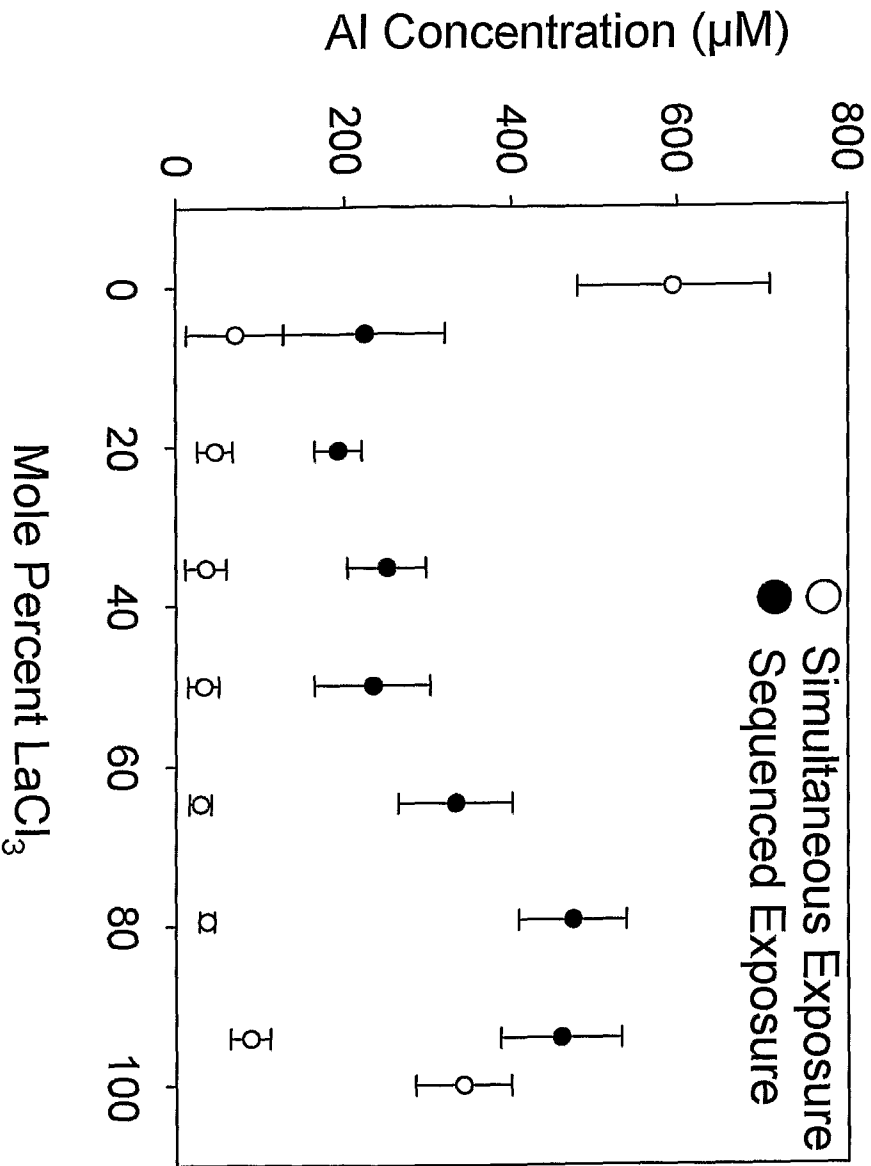

AA2024-T3 exposed to 3.4 mM total LaCl<sub>3</sub> + Na<sub>2</sub>MoO<sub>4</sub> in 0.6 M NaCl for 24 hours  
Sequenced exposure - AA2024-T3 immersed in LaCl<sub>3</sub> (A) in 0.6 M NaCl for 24 hours, then  
moved to Na<sub>2</sub>MoO<sub>4</sub> (B) on 0.6 M NaCl solution for 24 hours. A + B = 3.4 mM

FIGURE 20

### Surface Copper Simultaneous and Sequenced Exposure of AA2024-T3 to Mixtures of Cerium and Metavanadate

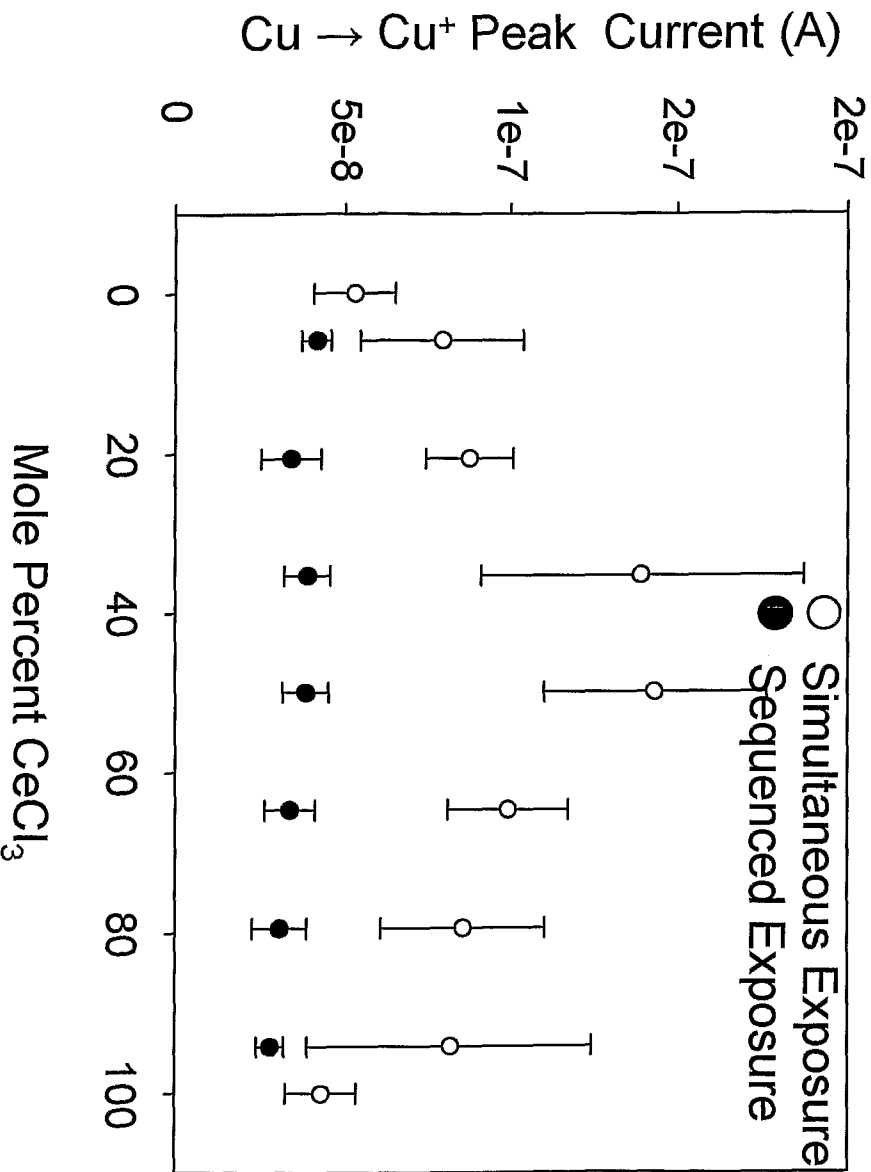


AA2024-T3 exposed to 3.4 mM total CeCl<sub>3</sub> + NaVO<sub>3</sub> in 0.6 M NaCl for 24 hours  
Sequenced exposure - AA2024-T3 immersed in CeCl<sub>3</sub> (A) in 0.6 M NaCl for 24 hours, then  
moved to NaVO<sub>3</sub> (B) on 0.6 M NaCl solution for 24 hours. A + B = 3.4 mM

FIGURE 21

### Surface Copper


#### Simultaneous and Sequenced Exposure of AA2024-T3 to Mixtures of Lanthanum and Molybdate

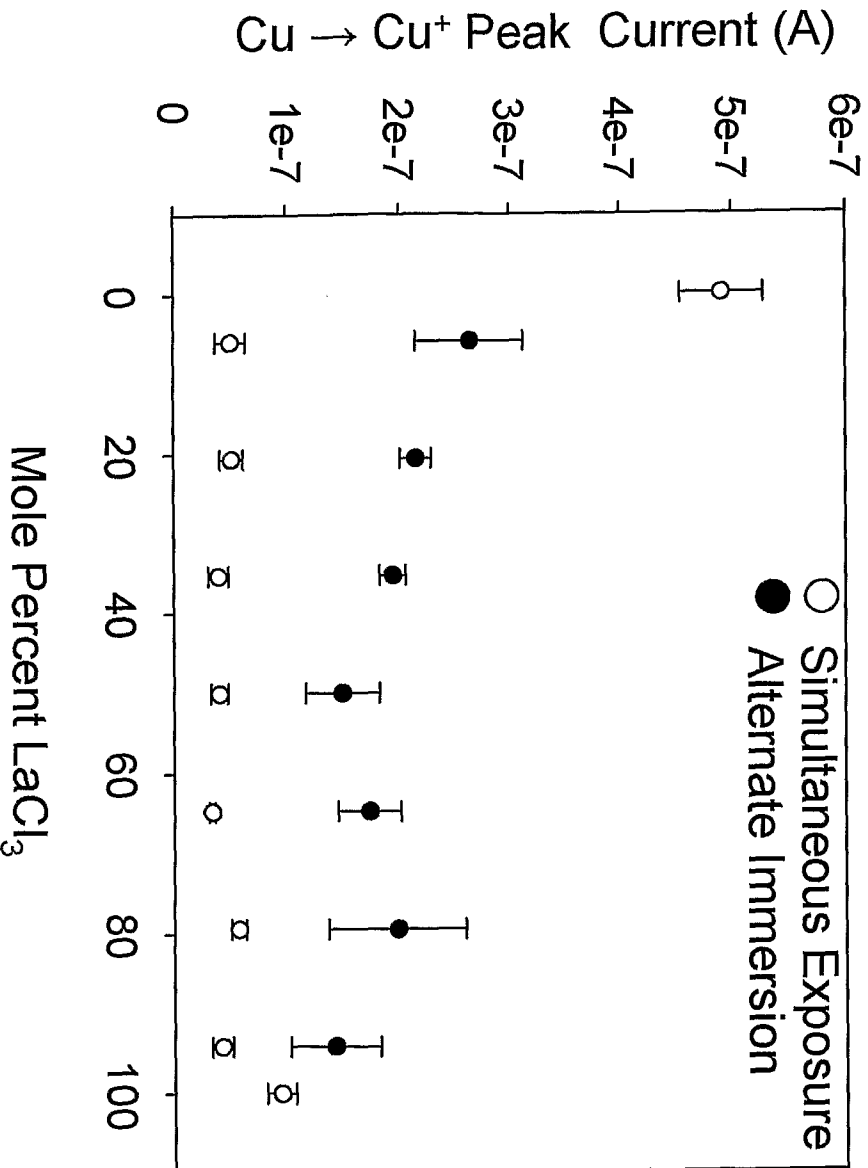

AA2024-T3 exposed to 3.4 mM total LaCl<sub>3</sub> + Na<sub>2</sub>MoO<sub>4</sub> in 0.6 M NaCl for 24 hours Sequenced exposure - AA2024-T3 immersed in LaCl<sub>3</sub> (A) in 0.6 M NaCl for 24 hours, then moved to Na<sub>2</sub>MoO<sub>4</sub> (B) on 0.6 M NaCl solution for 24 hours. A + B = 3.4 mM

FIGURE 22


### DC Polarization Currents Simultaneous and Sequenced Exposure of AA2024-T3 to Mixtures of Cerium and Metavanadate

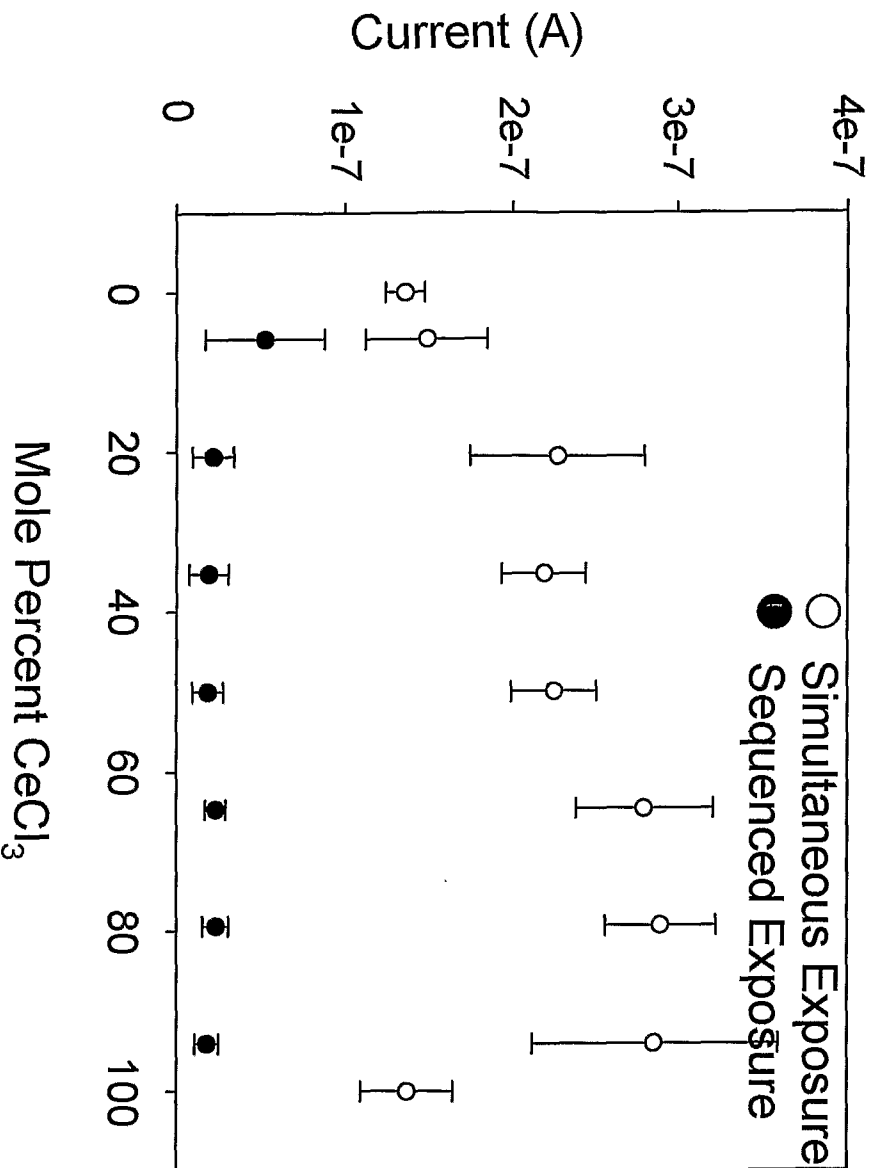

AA2024-T3 exposed to 3.4 mM total CeCl<sub>3</sub> + NaVO<sub>3</sub> in 0.6 M NaCl for 24 hours  
Sequenced exposure - AA2024-T3 immersed in CeCl<sub>3</sub> (A) in 0.6 M NaCl for 24 hours, then  
moved to NaVO<sub>3</sub> (B) on 0.6 M NaCl solution for 24 hours. A + B = 3.4 mM

FIGURE 23

### DC Polarization Currents Simultaneous and Sequenced Exposure of AA2024-T3 to Mixtures of Lanthanum and Molybdate

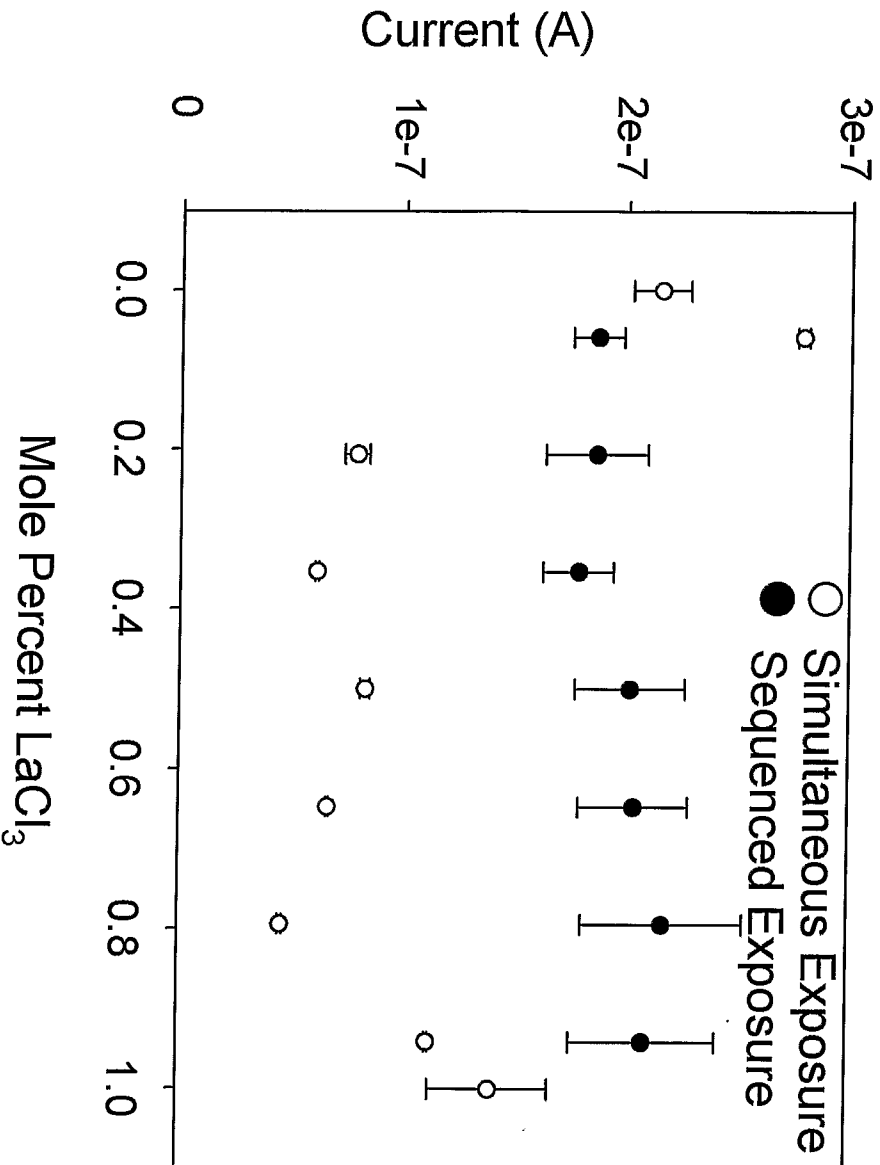

AA2024-T3 exposed to 3.4 mM total LaCl<sub>3</sub> + Na<sub>2</sub>MoO<sub>4</sub> in 0.6 M NaCl for 24 hours  
Sequenced exposure - AA2024-T3 immersed in LaCl<sub>3</sub> (A) in 0.6 M NaCl for 24 hours, then  
moved to Na<sub>2</sub>MoO<sub>4</sub> (B) on 0.6 M NaCl solution for 24 hours. A + B = 3.4 mM

FIGURE 24