



(51) International Patent Classification:

F21S 8/00 (2006.01) *F21V 15/01* (2006.01)
F21S 8/04 (2006.01) *G06F 3/01* (2006.01)
F21S 8/06 (2006.01) *G06T 19/20* (2011.01)

(21) International Application Number:

PCT/US2017/027371

(22) International Filing Date:

13 April 2017 (13.04.2017)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

15/369,799 05 December 2016 (05.12.2016) US
15/478,209 03 April 2017 (03.04.2017) US

(71) Applicant: **YOUSPACE, INC.** [US/US]; 2177 Leghorn
Street, Mountain View, CA 94043 (US).

(72) Inventors: **BRUNNER, Ralph**; 14660 Hancock Ct, Los
Gatos, CA 95032-1715 (US). **CHIEN, Hsin-Yi**; 10210
Stern Ave, Cupertino, CA 95014 (US). **STODDARD,**
John, Philip; 833 Rebecca Drive, Boulder Creek, CA
95006 (US). **CHEN, Po-Jui**; 415 Bundy Avenue, San Jose,
CA 95117 (US). **BRUNNER, Vivi**; 14660 Hancock Ct, Los
Gatos, CA 95032-1715 (US).

(74) Agent: **SKELLEY, James**; 2005 California Street #6,
Mountain View, CA 94040 (US).

(81) Designated States (*unless otherwise indicated, for every
kind of national protection available*): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ,
CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO,
DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN,
HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KH, KN, KP, KR,
KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG,
MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM,
PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC,

(54) Title: INTERACTIVE SYSTEMS FOR DEPTH-BASED INPUT

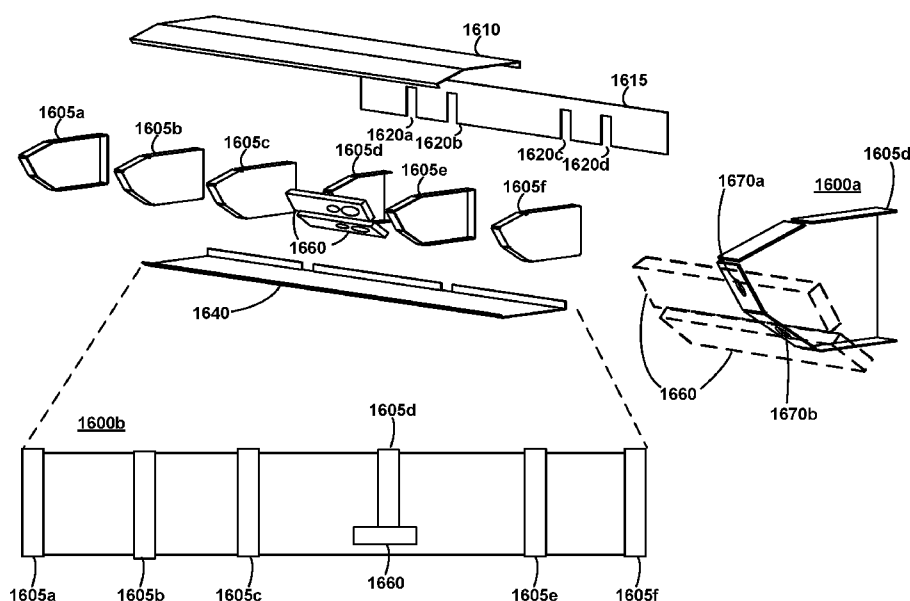


FIG. 16

(57) Abstract: Various of the disclosed embodiments present depth-based user interaction systems. By anticipating various installation constraints and factors into the interface's design, various of the disclosed embodiments facilitate benefits such as complementary depth fields of view and display orientation flexibility. Some embodiments include a frame housing for the depth sensors. Within the housing, depth sensors may be affixed to a mount, such that each sensor's field of view is at a disparate angle. These disparate angles may facilitate gesture recognitions that might otherwise be difficult or impossible to achieve. When mounted in connection with a modular unit, the housing may provide a versatile means for integrating multiple module units into a composite interface.

SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR,
TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

- (84) Designated States** (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

INTERACTIVE SYSTEMS FOR DEPTH-BASED INPUT

CROSS-REFERENCE TO RELATED APPLICATIONS

[0001] This application claims the benefit of and priority to U.S. Nonprovisional Patent Application 15/369,799, filed December 5, 2016, entitled “CALIBRATION SYSTEMS AND METHODS FOR DEPTH-BASED INTERFACES WITH DISPARATE FIELDS OF VIEW” and the benefit of and priority to U.S. Nonprovisional Patent Application 15/478,209, filed April 3, 2017, entitled “INTERACTIVE SYSTEMS FOR DEPTH-BASED INPUT”, the contents of each of which are incorporated by reference herein in their entireties for all purposes.

TECHNICAL FIELD

[0002] Various of the disclosed embodiments relate to optimizations and improvements for depth-based human-computer interactions.

BACKGROUND

[0003] Human-computer interaction (HCI) systems are becoming increasingly prevalent in our society. With this increasing prevalence has come an evolution in the nature of such interactions. Punch cards have been surpassed by keyboards, which were themselves complemented by mice, which are themselves now complemented by touch screen displays, etc. Various machine vision approaches may even now facilitate visual, rather than the mechanical, user feedback. Machine vision allows computers to interpret images from their environment to, e.g., recognize users' faces and gestures. Some machine vision systems rely upon grayscale or RGB images of their surroundings to infer user behavior. Some machine vision systems may also use depth-based sensors, or rely exclusively upon depth based sensors, to recognize user behavior (e.g., the Microsoft Kinect™, Intel RealSense™, Apple PrimeSense™, Structure Sensor™, Velodyne HDL-32E LiDAR™, Orbbec Astra™, etc.).

[0004] Depth-based user interface systems can be exceptionally challenging to install in a consistently effective manner. This challenge is due at least in part to the

variety of limitations and benefits associated with various depth sensors, displays, and computer systems, in conjunction with the environments in which the system will be installed and the gesture interactions which will be recognized. To be successful, systems must often comply with a variety of constraints, such as complementary depth fields of view, display orientation flexibility, diverse installation orientations, etc. In some instances, the depth sensors may be sensitive to physical damage and require a suitable protective housing, while still permitting adequate depth fields of view. While some of these challenges may be addressed by an installation technician on-site, systems that can accommodate these constraints ex ante, or at least assist the technician with the installation, may provide for easier and more consistent installations. Accordingly, there exists a need for systems and structures that facilitate flexible but effective interface installation.

BRIEF DESCRIPTION OF THE DRAWINGS

[0005] Various of the embodiments introduced herein may be better understood by referring to the following Detailed Description in conjunction with the accompanying drawings, in which like reference numerals indicate identical or functionally similar elements:

[0006] FIG. 1 is a series of use case diagrams illustrating various situations in which various of the disclosed embodiments may be implemented;

[0007] FIG. 2 is a perspective use case diagram illustrating an example user interaction with an example display structure as may occur in some embodiments;

[0008] FIG. 3 is a series of perspective and side views of example depth data as may be used in some embodiments;

[0009] FIG. 4 is a series of views illustrating data isolation via plane clipping as may be applied to the depth data of FIG. 3 in some embodiments;

[0010] FIG. 5 is an example component classification as may be applied to the isolated data of FIG. 4 in some embodiments;

[0011] FIG. 6 is a flow diagram illustrating some example depth data processing operations as may be performed in some embodiments;

[0012] FIG. 7 is a hardware block diagram illustrating an example hardware

implementation which may be used to perform depth data processing operations in some embodiments;

[0013] FIG. 8 is a schematic diagram of an example wide-screen display with a multi-angled depth sensor housing as may be implemented in some embodiments;

[0014] FIG. 9 is a schematic diagram of an example projected display with a multi-angled depth sensor housing as may be implemented in some embodiments;

[0015] FIG. 10 is a schematic diagram of an example composite display with a multi-angled depth sensor housing as may be implemented in some embodiments;

[0016] FIG. 11 is a schematic diagram of the composite display with a multi-angled depth sensor housing of FIG. 10, including a turnaround of a modular component in the system as may be implemented in some embodiments;

[0017] FIG. 12A is a head-on schematic view of the composite display with a multi-angled depth sensor housing of FIG. 10 as may be implemented in some embodiments; FIG. 12B is a top-down schematic view of the composite display with a multi-angled depth sensor housing of FIG. 10 as may be implemented in some embodiments; FIG. 12C is a side schematic view of the composite display with a multi-angled depth sensor housing of FIG. 10 as may be implemented in some embodiments;

[0018] FIG. 13A is an exploded, schematic view of components in the frame of a multi-angled depth sensor housing, as may be implemented in some embodiments; FIG. 13B is an assembled schematic view of components in the frame of a multi-angled depth sensor housing, as may be implemented in some embodiments;

[0019] FIG. 14A is a view of the spacer component of FIG. 13A as may be implemented in some embodiments, from two perspectives; FIG. 14B is a view of the mirrored spacer component of FIG. 13A as may be implemented in some embodiments, from two perspectives;

[0020] FIG. 15 is a view of the brace bracket component of FIG. 13A as may be implemented in some embodiments, from two perspectives;

[0021] FIG. 16 is an exploded, schematic view of components in the frame of a multi-angled depth sensor housing, including a sensor-pair-receiving brace bracket spacer, as may be implemented in some embodiments;

[0022] FIG. 17 is a schematic view of a possible sensor-placement configuration in

the multi-angled depth sensor housings of an example user interface, as may be implemented in some embodiments;

[0023] FIG. 18 is a plurality of schematic views of an alternative bracket mounting component as may be used in some embodiments;

[0024] FIG. 19A is a perspective schematic view of portions of the alternative bracket mounting component of FIG. 18 in an exploded, unassembled state, as may be implemented in some embodiments; FIG. 19B is a perspective schematic view of portions of the alternative bracket mounting component of FIG. 18 wherein the bracing support is coupled with the sensor mount, as may be implemented in some embodiments; FIG. 19C is a perspective schematic view of portions of the alternative bracket mounting component of FIG. 18 wherein the bracing support and sensor mount are coupled with example depth sensors, as may be implemented in some embodiments;

[0025] FIG. 20A is a “see-through” view of a housing frame of a multi-angled depth sensor housing comprising depth sensors attached via “standalone mounts”, rather than brackets, as may be implemented in some embodiments; FIG. 20B is a schematic view of a horizontal sensor mount as may be implemented in some embodiments; FIG. 20C is a schematic view of a vertical sensor mount as may be implemented in some embodiments; FIG. 20D is a schematic view of the varied depth region fields of view achieved using a sensor mount of FIG. 20B or FIG. 20C as may occur in some embodiments;

[0026] FIG. 21A is a schematic view of an example multi-angled standalone depth sensor mount with transparent depth sensor representations in their relative positions, as may be implemented in some embodiments; FIG. 21B is a schematic view of a multi-angled depth sensor mount without depth sensors, as may be implemented in some embodiments;

[0027] FIG. 22 is a schematic side view of various dimensions of an example multi-angled standalone depth sensor mount, as may be implemented in some embodiments;

[0028] FIG. 23 is an exploded, schematic view of components in the frame of a multi-angled depth sensor housing, including exclusively standalone mounted sensor pairs, as well as schematic top-down cutaway view of the assembled structure, as may

be implemented in some embodiments;

[0029] FIG. 24 is an exploded, schematic view of components in the frame of a multi-angled depth sensor housing, including both standalone mounted and bracket-mounted sensor pairs, as well as schematic top-down cutaway view of the assembled structure, as may be implemented in some embodiments;

[0030] FIG. 25A is a side view of various dimensions for an example interaction system with a multi-angled depth sensor housing, as may be implemented in some embodiments; FIG. 25B is a schematic side view of the combined viewing angles for the system of FIG. 25A;

[0031] FIG. 26 is a “see-through” view of a frame for a multi-angled depth sensor housing, wherein both depth sensors and visual image sensors are installed, as may be implemented in some embodiments;

[0032] FIG. 27A is a schematic view of a modular system unit’s depth field of view, where the depth sensors have no range limitation, as may occur in some embodiments; FIG. 27B is a schematic view of a modular system unit’s depth field of view, where the depth sensors have a range limitation, as may occur in some embodiments; FIG. 27C is a schematic view of a modular system unit’s depth field of view, where the depth sensors have a range limitation, as well as a composite spread beyond the width of the modular system unit, as may occur in some embodiments; FIG. 27D is a schematic view of a composite modular system composed of three units such as are depicted in FIG. 27B and the corresponding composite depth field of view, as may occur in some embodiments; FIG. 27E is a schematic view of a composite modular system composed of two units such as are depicted in FIG. 27C and the corresponding composite depth field of view, as may occur in some embodiments;

[0033] FIG. 28A is a schematic view of a user interacting with a composite modular system composed of three units arranged in a “tri-fold” orientation, as may be implemented in some embodiments; FIG. 28B is a schematic top-down view of the user interacting with the composite modular system of FIG. 28A;

[0034] FIG. 29A is a schematic view of a user interacting with a composite modular system composed of six units arranged in a “ring” orientation, as may be implemented in some embodiments; FIG. 29B is a schematic top-down view of the user interacting

with the composite modular system of FIG. 29A;

[0035] FIG. 30A is a schematic view of the clock and bus relations between a central computer system and one or more of depth sensors, as may be implemented in some embodiments; FIG. 30B is a schematic view of the depth frame arrival queues at the user interface computer system as may occur in some embodiments;

[0036] FIG. 31 is a flow diagram illustrating features of an example process for coordinating depth frames received at the computer system of FIG. 30A from the one or more depth sensors of FIG. 30A, as may be implemented in some embodiments;

[0037] FIG. 32A is a schematic view of a “corridor” composite modular system, as may be implemented in some embodiments; FIG. 32B is a schematic top-down view of the composite modular system of FIG. 32A; FIG. 32C is a schematic view of an end unit from the composite modular system of FIG. 32A, the end unit having a longitudinal depth sensor as may be implemented in some embodiments; FIG. 32D is a schematic view of a the varied depth region fields of view achieved using the sensor mount of FIG. 32C as may occur in some embodiments;

[0038] FIG. 33A is a schematic view of a modular system unit having multiple sensor additions, as may be implemented in some embodiments; FIG. 33B is a schematic view of a the varied depth region fields of view achieved using the sensor mount of FIG. 33A as may occur in some embodiments; and

[0039] FIG. 34 is a block diagram of an example computer system as may be used in conjunction with some of the embodiments.

[0040] The specific examples depicted in the drawings have been selected to facilitate understanding. Consequently, the disclosed embodiments should not be restricted to the specific details in the drawings or the corresponding disclosure. For example, the drawings may not be drawn to scale, the dimensions of some elements in the figures may have been adjusted to facilitate understanding, and the operations of the embodiments associated with the flow diagrams may encompass additional, alternative, or fewer operations than those depicted here. Thus, some components and/or operations may be separated into different blocks or combined into a single block in a manner other than as depicted. The intention is not to limit the embodiments to the

particular examples described or depicted. On the contrary, the embodiments are intended to cover all modifications, equivalents, and alternatives falling within the scope of the disclosed examples.

DETAILED DESCRIPTION

Example Use Case Overview

[0041] Various of the disclosed embodiments may be used in conjunction with a mounted or fixed depth camera system to detect, e.g. user gestures. FIG. 1 is a series of use case diagrams illustrating various situations **100a-c** in which various of the disclosed embodiments may be implemented. In situation **100a**, a user **105** is standing before a kiosk **125** which may include a graphical display **125a**. Rather than requiring the user to physically touch items of interest on the display **125a** the system may allow the user to “point” or “gesture” at the items and to thereby interact with the kiosk **125**.

[0042] A depth sensor **115a** may be mounted upon or connected to or near the kiosk **125** so that the depth sensor’s **115a** field of depth capture **120a** (also referred to as a “field of view” herein) encompasses gestures **110** made by the user **105**. Thus, when the user points at, e.g., an icon on the display **125a** by making a gesture within the field of depth data capture **120a** the depth sensor **115a** may provide the depth values to a processing system, which may infer the selected icon or operation to be performed. The processing system may be configured to perform various of the operations disclosed herein and may be specifically configured, or designed, for interfacing with a depth sensor (indeed, it may be embedded in the depth sensor). Accordingly, the processing system may include hardware, firmware, software, or a combination of these components. The processing system may be located within the depth sensor **115a**, within the kiosk **125**, at a remote location, etc. or distributed across locations. The applications running on the kiosk **125** may simply receive an indication of the selected icon and may not be specifically designed to consider whether the selection was made via physical touch vs. depth based determinations of the selection. Thus, the depth sensor **115a** and the processing system may be an independent product or device from the kiosk **125** in some embodiments.

[0043] In situation **100b**, a user **105** is standing in a domestic environment which may include one or more depth sensors **115b**, **115c**, and **115d** each with their own corresponding fields of depth capture **120b**, **120c**, and **120d** respectively. Depth sensor **115b** may be located on or near a television or other display **130**. The depth sensor **115b** may be used to capture gesture input from the user **105** and forward the depth data to an application running on or in conjunction with the display **130**. For example, a gaming system, computer conferencing system, etc. may be run using display **130** and may be responsive to the user's **105** gesture inputs. In contrast, the depth sensor **115c** may passively observe the user **105** as part of a separate gesture or behavior detection application. For example, a home automation system may respond to gestures made by the user **105** alone or in conjunction with various voice commands. In some embodiments, the depth sensors **115b** and **115c** may share their depth data with a single application to facilitate observation of the user **105** from multiple perspectives. Obstacles and non-user dynamic and static objects, e.g. couch **135**, may be present in the environment and may or may not be included in the fields of depth capture **120b**, **120c**.

[0044] Note that while the depth sensor may be placed at a location visible to the user **105** (e.g., attached on top or mounted upon the side of televisions, kiosks, etc. as depicted, e.g., with sensors **115a-c**) some depth sensors may be integrated within another object. Such an integrated sensor may be able to collect depth data without being readily visible to user **105**. For example, depth sensor **115d** may be integrated into television **130** behind a one-way mirror and used in lieu of sensor **115b** to collect data. The one-way mirror may allow depth sensor **115d** to collect data without the user **105** realizing that the data is being collected. This may allow the user to be less self-conscious in their movements and to behave more naturally during the interaction.

[0045] While the depth sensors **115a-d** may be positioned parallel to a wall, or with depth fields at a direction orthogonal to a normal vector from the floor, this may not always be the case. Indeed, the depth sensors **115a-d** may be positioned at a wide variety of angles, some of which place the fields of depth data capture **120a-d** at angles

oblique to the floor and/or wall. For example, depth sensor **115c** may be positioned near the ceiling and be directed to look down at the user **105** on the floor.

[0046] This relation between the depth sensor and the floor may be extreme and dynamic in some situations. For example, in situation **100c** a depth sensor **115e** is located upon the back of a van **140**. The van may be parked before an inclined platform **150** to facilitate loading and unloading. The depth sensor **115e** may be used to infer user gestures to direct the operation of the van (e.g., move forward, backward) or to perform other operations (e.g., initiate a phone call). Because the van **140** regularly enters new environments, new obstacles and objects **145a,b** may regularly enter the depth sensor's **115e** field of depth capture **120e**. Additionally, the inclined platform **150** and irregularly elevated terrain may often place the depth sensor **115e**, and corresponding field of depth capture **120e**, at oblique angles relative to the "floor" on which the user **105** stands. Such variation can complicate assumptions made regarding the depth data in a static and/or controlled environment (e.g., assumptions made regarding the location of the floor).

[0047] Various of the disclosed embodiments contemplate user interactions with a feedback system comprising two or more depth sensors. The depth sensor devices may also include visual image sensors, e.g., RGB sensors, in some embodiments. For example, FIG. 2 is a perspective use case diagram illustrating an example user interaction **200** with an example display structure **205** as may occur in some embodiments. The display structure **205** may be placed in a mall, shopping center, grocery, check-in line, etc. In some embodiments, the height **220a** is at least as large as a user **210** or slightly larger, e.g., 7-10 feet. The length **220b** may be several times the user's **210** width, e.g., to facilitate an interaction as the user **210** walks the length of the display structure **205**.

[0048] The example display structure **205** includes a screen **230**. The screen **230** may comprise a single large screen, multiple smaller screens placed adjacent to one another, a projection, etc. In one example interaction, the user may gesture **215** at a portion of the screen and the system may present a visual feedback, such as a cursor **230b** at a location corresponding to the gesture's projection **225** upon the screen. The

display structure **205** may monitor the user's **210** movement and gestures using one or more of one or more depth sensors **C₁, C₂, . . . , C_N**. In the example depicted in FIG. 2, at least three cameras are present. The ellipses **245** indicate that more than three cameras may be present in some embodiments, and the length **220b** of the display structure **205** may be adjusted accordingly. In this example, the sensors are evenly spaced across the top of the display structure **205**, though in some embodiments they may be unevenly spaced.

[0049] Though the terms “camera” and “sensor” may be used interchangeably in this application, one will recognize that the depth sensor need not be or facilitate the “camera capture” of optical images, e.g., RGB or grayscale images, though the depth sensor may additionally include that functionality. In some embodiments, the computer system **250** may take a variety of forms, e.g., a preprogrammed chip, circuit, Field Programmable Gate Array (FPGA), mini-computer, etc. One will recognize that “computer system”, “processing system”, and the like may be used interchangeably herein. Similarly, one will readily appreciate that the training system employed to create a system for recognizing gestures may, but need not be, the same system as the testing system that performs the on-site recognition. Accordingly, in some embodiments, the “system” may be a computer distinct from the interfaces of FIGs. 1 and 2, residing, e.g., off-site from where the in-situ classification occurs.

Example Depth Data

[0050] Analogous to common optical image cameras, depth sensors **115a-e, C₁, C₂, . . . , C_N** may capture individual “frames” of depth data over time. Each “frame” may comprise a collection of three-dimensional values for depths measured in the field of view (though one will readily recognize multiple ways to represent, e.g., a time of flight analysis for depth determination). These three-dimensional values may be represented, e.g., as points in three-dimensional space, as distances for rays emitted at various angles from the depth sensor, etc. FIG. 3 is a series of perspective **300a** and side **300b** views of example depth data **305** as may be used in some embodiments. In this example, a user is pointing at the depth sensor with his right hand while standing in front of a wall. A table to his left has also been captured in the field of view. Thus,

depth values associated with the user **310** include a portion associated with the user's head **310a** and a portion associated with the user's extended right arm **310b**. Similarly, the background behind the user is reflected in the depth values **320**, including those values **315** associated with the table.

[0051] To facilitate understanding, the side view **300b** also includes a depiction of the depth sensor's field of view **335** at the time of the frame capture. The depth sensor's angle **330** at the origin is such that the user's upper torso, but not the user's legs have been captured in the frame. Again, this example is merely provided to accommodate the reader's understanding, and the reader will appreciate that some embodiments may capture the entire field of view without omitting any portion of the user. For example, the embodiments depicted in FIGs. 1A-C may capture less than all of the interacting user, while the embodiments of FIG. 2 may capture the entirety of the interacting user (in some embodiments, everything that is more than 8cm off the floor appears in the depth field of view). Of course, the reverse may be true depending upon the orientation of the system, depth camera, terrain, etc. Thus, one will appreciate that variations upon the disclosed examples are explicitly contemplated (e.g., classes referencing torso components are discussed below, but some embodiments will also consider classifications of legs, feet, clothing, user pairings, user poses, etc.).

[0052] Similarly, though FIG. 3 depicts the depth data as a "point cloud", one will readily recognize that the data received from a depth sensor may appear in many different forms. For example, a depth sensor, such as depth sensor **115a** or **115d**, may include a grid-like array of detectors. These detectors may acquire an image of the scene from the perspective of fields of depth captures **120a** and **120d** respectively. For example, some depth detectors include an "emitter" producing electromagnetic radiation. The travel time from the emitter to an object in the scene, to one of the grid cell detectors may correspond to the depth value associated with that grid cell. The depth determinations at each of these detectors may be output as a two-dimensional grid of depth values. A "depth frame" as used herein may refer to such a two-dimensional grid, but can also refer to other representations of the three-dimensional depth data acquired from the depth sensor (e.g., a point cloud, a sonographic image, etc.).

Example Depth Data Clipping Methodology

[0053] Many applications would like to infer the user's gestures from the depth data **305**. Accomplishing this from the raw depth data could be quite challenging and so some embodiments apply preprocessing procedures to isolate the depth values of interest. For example, FIG. 4 is a series of views illustrating data isolation via plane clipping as may be applied to the depth data **305** of FIG. 3 in some embodiments. Particularly, perspective view **405a** and side view **410a** illustrate the depth data **305** (including portions associated with the user **310** and portions associated with the background **320**). Perspective view **405b** and side view **410b** show the depth data **305** relative to a floor plane **415**. The floor plane **415** is not part of the depth frame data **305**. Rather, the floor plane **415** may be assumed based upon context or estimated by the processing system.

[0054] Perspective view **405c** and side view **410c** introduce a wall plane **420**, which may also be assumed or estimated by the processing system. The floor and wall plane may be used as "clipping planes" to exclude depth data from subsequent processing. For example, based upon the assumed context in which the depth sensor is used, a processing system may place the wall plane **420** halfway to the maximum range of the depth sensor's field of view. Depth data values behind this plane may be excluded from subsequent processing. For example, the portion **320a** of the background depth data may be excluded, but the portion **320b** may be retained as shown in perspective view **405c** and side view **410c**.

[0055] Ideally, the portion **320b** of the background would also be excluded from subsequent processing, since it does not encompass data related to the user. Some embodiments further exclude depth data by "raising" the floor plane **415** based upon context to a position **415a** as shown in perspective view **405d** and side view **410d**. This may result in the exclusion of the portion **320b** from future processing. These clipping operations may also remove portions of the user data **310d** which will not contain gestures (e.g., the lower torso). As mentioned previously, the reader will appreciate that this example is provided merely to facilitate understanding and that in some embodiments (e.g., those of systems as appear in FIG. 2) clipping may be omitted entirely, or may occur only very close to the floor, so that leg and even foot data are

both still captured. Thus, only the portion **310c** remains for further processing. One will recognize that FIG. 4 simply depicts one possible clipping process for a given context. Different contexts, for example, situations where gestures include the user's lower torso, may be addressed in a similar fashion. Many such operations may still require an accurate assessment of the floor **415** and wall **420** planes to perform accurate clipping.

Example Depth Data Classification Methodology

[0056] Following the isolation of the depth values (which may not occur in some embodiments), which may contain gesture data of interest, the processing system may classify the depth values into various user portions. These portions, or "classes", may reflect particular parts of the user's body and can be used to infer gestures. FIG. 5 is an example component classification as may be applied to the isolated data of FIG. 4 in some embodiments. Initially **500a**, the extracted data **310c** may be unclassified. Following classification **500b**, each of the depth values may be associated with a given classification. The granularity of the classification may reflect the character of the gestures of interest. For example, some applications may be interested in the direction the user is looking, and so may break the head into a "head" class **515** and a "nose" class **520**. Based upon the relative orientation of the "head" class **515** and the "nose" class **520** the system can infer the direction in which the user's head is turned. Since the chest and torso are not generally relevant to the gestures of interest in this example, only broad classifications "upper torso" **525** and "lower torso" **535** are used. Similarly, the details of the upper arm are not as relevant as other portions and so a single class "right arm" **530c** and a single class "left arm" **530b** may be used.

[0057] In contrast, the lower arm and hand may be very relevant to gesture determination and more granular classifications may be used. For example, a "right lower arm" class **540**, a "right wrist" class **545**, a "right hand" class **555**, a "right thumb" class **550**, and a "right fingers" class **560** may be used. Though not shown, complementary classes for the left lower arm may also be used. With these granular classifications, the system may be able to infer, e.g., a direction the user is pointing, by comparing the relative orientation of the classified depth points.

Example Depth Data Processing Pipeline

[0058] FIG. 6 is a flow diagram illustrating some example depth data processing operations **600** as may be performed in some embodiments. At block **605**, the processing system may receive a frame of depth sensor data (e.g., a frame such as frame **305**). Generally speaking, the data may then pass through “Pre-Processing” **610**, “Classification” **615**, and “Application” **620** stages. During “Pre-Processing” **610**, the processing system may perform “plane detection” at block **625** using the frame data or based upon assumptions or depth camera configuration details (though again, in many embodiments preprocessing and plane detection may not be applied). This may include, e.g., the clipping planes discussed with respect to FIG. 4, such as the floor **415** plane and wall plane **420**. These planes may be used, e.g., to isolate the depth values of interest at block **630**, e.g., as described above with respect to FIG. 4.

[0059] During Classification **615**, the system may associate groups of depth values with one class (or in some embodiments, multiple classes) at block **635**. For example, the system may determine a classification using classes as discussed with respect to FIG. 5. At block **640**, the system may determine per-class statistics (e.g., the number of depth values associated with each class, the effect upon ongoing system training and calibration, etc.). Example classes may include: Nose, Left Index Finger, Left Other Fingers, Left Palm, Left Wrist, Right Index Finger, Right Other Fingers, Right Palm, Right Wrist, and Other.

[0060] During the Application **620** operations, the system may use the class determinations to infer user-behavior relevant to a particular application objective. For example, an HCI interface may seek to determine where the user is presently pointing their hand. In this example, at block **645**, the system will select / isolate the depth values classified as being associated with the “hand” and/or “fingers”. From these depth values (and possibly depth values associated with the user’s arm) the system may estimate the direction in which the user is pointing in this particular frame at block **650** (one will recognize that other gestures than this pointing example may also be performed). This data may then be published to an application program, e.g., a kiosk operating system, a game console operating system, etc. At block **655**, the operations may be performed again for additional frames received. One will recognize that the process may be used to infer gestures across frames by comparing, e.g., the

displacement of classes between frames (as, e.g., when the user moves their hand from left to right).

[0061] FIG. 7 is a hardware block diagram illustrating an example hardware implementation **705** which may be used to perform depth data processing operations in some embodiments. A frame reception system **710** may receive a depth frame from a depth sensor. The frame reception system **710** may be firmware, software, or hardware (e.g., an FPGA implementation, system-on-a-chip, etc.). The frame may be directly passed, or cached and subsequently passed, to a pre-processing module **715**. Pre-processing module **715** may also be firmware, software, or hardware (e.g., an FPGA implementation, system-on-a-chip, etc.). The pre-processing module may perform the Preprocessing operations **610** discussed in FIG. 6. The pre-processing results (e.g., the isolated depth values **310c**) may then be provided to the Classification module **720**. The Classification module **720** may be firmware, software, or hardware (e.g., an FPGA implementation, system-on-a-chip, etc.). The Classification module **720** may perform the Classification operations **615** discussed in FIG. 6. The classified depth values may then be provided to a Publishing module **725**. The Publishing module **725** may be configured to package the classification results into a form suitable for a variety of different applications (e.g., as specified at **620**). For example, an interface specification may be provided for kiosk operating systems, gaming operating systems, etc. to receive the classified depth values and to infer various gestures therefrom.

Example Interactive System Form Factors

[0062] Various embodiments may include a housing frame for one or more of the depth sensors. The housing frame may be specifically designed to anticipate the inputs and behaviors of the users. In some embodiments, the display system may be integrated with the housing frame to form modular units. FIG. 8 is a schematic diagram of an example widescreen display with a multi-angled depth sensor housing as may be implemented in some embodiments. For example, the system may include a large, single display **835** with which a user **840** may interact via various spatial, temporal, and spatial-temporal gestures **830** using, e.g., their hands **845**, arms or entire body. For example, by pointing with the finger of their hand **845**, the user may direct the motion of

a cursor **825**. The display **835** may be in communication with a computer system **805** via, e.g., a direct line connection **810a**, wireless connections **815c** and **815a**, or any other suitable means for communicating the desired display output. Similarly, the computer system **805** may be in communication with one or more depth sensors contained in housing frames **820a-c** via a direct line connection **810b**, wireless connections **815b** and **815a**, or any other suitable means for communicating the desired display output. Though shown separately in this example, in some embodiments, the computer system **805** may be integrated with either the housing frames **820a-c** or display **835**, or be contained off-site.

[0063] Each of housing frames **820a-c** may contain one or more depth sensors as described elsewhere herein. The computer system **805** may have transforms available to relate depth data acquired at each sensor to a global system of coordinates relative to display **835**. These transforms may be achieved using a calibration process, or may, e.g., be preset with a factory default. Though shown here as separate frames, in some embodiments the frames **820a-c** may be a single frame. The frames **820a-c** may be affixed to the display **835**, to a nearby wall, to a separate mounting platform, etc.

[0064] While some embodiments specifically contemplate providing a display system connected with the housing frames, one will readily appreciate that systems may be constructed in alternative fashions to achieve substantially the same function. For example, FIG. 9 is a schematic diagram of an example projected display with a multi-angled depth sensor housing frames **920a-c** as may be implemented in some embodiments. Here, the frames **920a-c** have been affixed to a wall **935**, e.g., a wall in the user's **940** office, home, or shopping environment. A projector **950** (one will appreciate that rear projection from behind the wall **935** may also be used in some embodiments if the wall's **935** material is suitable). As indicated by ellipses **955a-c**, the wall **935** may extend well beyond the interaction area in many directions. The projector **950** may be positioned so as to project the desired images upon the wall **935**. In this manner, the user may again use their hand **945** to gesture **930** and thereby direct the motion of a cursor **925**. Similarly, the projector **950** may be in communication with a computer system **905** and the depth sensors in frames **920a-c** via direct line connections **910a**, **910b**, wireless connections **915a-c**, or any other suitable

communication mechanism.

[0065] While FIGs. 8 and 9 describe example embodiments with “monolithic” displays, in some embodiments, the displays and frame housing may be designed so to form “modular” units that may be integrated into a whole. For example, FIG. 10 is a schematic diagram of an example composite display **1035** with a collection of multi-angled depth sensor housing frames as may be implemented in some embodiments. Again, the user **1040** may use hand **1045** gestures **1030** to interact with displayed items, e.g., cursor **1025**. A computer system **1050** (here shown on-site and separate from the other components) may be in communication with the depth sensors and display via direct line connections **1010a**, **1010b**, wireless communications **1015a**, **1015b**, **1015c**, or any other suitable communications method.

[0066] However, in this example embodiment, each vertical segment of the composite system **1035** may include a separate module. For example, one module **1060** may comprise the depth sensor housing frame **1020a** and three displays **1035a-c**. The computer system **1050** may employ the individual displays of each vertical module to generate a collective, composite image spanning one or more of them. The remaining depth sensor housing frames **1020b,c** may similarly be associated with their own displays. One will appreciate that in some embodiments each module will have its own computer system, while, as shown here, in some embodiments there may be a single computer system associated with several or all of the modules. The computer system(s) may process depth data and provide images to the displays on their respective module(s).

Example Modular Interactive System Dimensions

[0067] FIG. 11 is a schematic diagram of the composite display with a multi-angled depth sensor housing of FIG. 10, including a turnaround of a modular component **1110c** in the system as may be implemented in some embodiments. Particularly, the modular component **1110c** is shown from perspective **1115a**, front-on **1115b**, and side **1115c** views. A computer system **1105** may be used to control the displays and process data for all the components **1110a-c** or only a single component, e.g., component **1110c**.

[0068] FIGs. 12A-C provide greater detail regarding the specific dimensions of a

particular example composite display. Particularly, FIG. 12A is a head-on schematic view of the composite display with a multi-angled depth sensor housing of FIG. 10 as may be implemented in some embodiments. In this example the modules are arranged to create a grid of displays **1240** together having a composite width **1215d** of approximately 365 centimeters in some embodiments and height **1215b** of approximately 205 centimeters in some embodiments. In some embodiments, the depth sensor housing height **1215a** may be approximately 127mm. The individual displays may have a width **1215c** of approximately 122 centimeters in some embodiments and a height **1215f** of approximately 69 centimeters in some embodiments. In some embodiments, the displays may be HDMI displays with resolutions of 1920x1080 pixels. The displays **1240** may be elevated off the ground **1225** a distance **1215e** of approximately 10 centimeters in some embodiments via a support structure **1245**. Atop the displays **1240** may be a depth sensor housing frame or frames **1205**, here shown transparently to reveal one or more of depth sensors **1210a-c**.

[0069] FIG. 12B is a top-down schematic view of the composite display with a multi-angled depth sensor housing of FIG. 10 as may be implemented in some embodiments. Note that the depth sensors and housing are no longer shown to facilitate understanding. Within the region **1225d** the depth sensors may be able to collect depth data. Accordingly, a user **1235** would stand within this region when interacting with the system. The region may have a distance **1230f** of approximately 300 centimeters in some embodiments in front of the display **1240** and be approximately the width **1215d** of the display. In this embodiment, side regions **1225a** and **1225c** may be excluded from the interaction. For example, the user may be informed to avoid attempting to interact within these regions, as they comprise less optimal relative angles to depth sensors distributed across the system (in some embodiments, these regions may simply originate too much noise to be reliable). The installing technician may mark or cordon off the areas accordingly. These regions **1225a** and **1225c** may include a length **1230b**, **1230g** from a wall **1250** of approximately 350 centimeters in some embodiments and a distance **1230a**, **1230h** from the active region **1225d** of approximately 100 centimeters in some embodiments. A region **1225b**

may be provided between the support structure **1245** and a wall support structure **1250** or other barrier, to facilitate room for one or more computing systems. Here, a distance **1230d** of approximately 40 centimeters in some embodiments may be used and a length **1215d** reserved for this computing system space. In some embodiments, the support structure **1245** may extend throughout the region **1225b** and the computer system may rest on or within it.

[0070] FIG. 12C is a side schematic view of the composite display with a multi-angled depth sensor housing of FIG. 10 as may be implemented in some embodiments.

[0071] One will appreciate that the example dimensions provided above are merely used in connection with this specific example to help the user appreciate a specific embodiment. Accordingly, the dimensions may readily be varied to achieve substantially the same purpose.

Example Depth Sensor Frame for Modular Systems – Bracket-Mounted

[0072] The housing frame used to protect the depth sensors may take a variety of forms in different embodiments. FIG. 13A is an exploded, schematic view of components in the frame of a multi-angled depth sensor housing frame, as may be implemented in some embodiments. FIG. 13B is an assembled schematic view of components in the frame of a multi-angled depth sensor housing, as may be implemented in some embodiments.

[0073] The frame may comprise an upper cover **1310**, a back cover **1315**, a bottom panel **1340**, and two sensor view panels **1355a** and **1355b** (illustrated in FIG. 13B, but not FIG. 13A, for visual economy). View panels **1355a** and **1355b** may be screwed into place (e.g., screwed into one or more of bracket spacers **1305a-f** with, e.g., a washer securing the screw on the opposing side), clamped, or otherwise mechanically coupled to the housing, and may also be held in place by angled portions **1335** and **1340a**. The upper cover **1310** may have a length **1360b** of approximately 1214mm in some embodiments, and a width **1360a** of approximately 178mm in some embodiments. In some embodiments, the height **1360c** may be approximately 127mm.

[0074] End panels **1305a** and **1305f** may be constructed in anticipation of the desired angles for upper cover **1310**, a back cover **1315**, and two sensor view panels

1355a and **1355b**. Particularly, the angle **1370a** may be approximately 25° in some embodiments, the angle **1370b** may be approximately 35° in some embodiments, and the angle **1370c** may be approximately 30° in some embodiments. To clarify, the upper cover **1310** and bottom panel **1340** are substantially parallel in the depicted embodiment. Accordingly, in this example, the angles between the top panel **1310** and back panel **1315** may be approximately 90°. Similarly, the angles between bottom panel **1340** and back panel **1315** may be approximately 90°. Not only may these angles present a more aesthetically pleasing design, but by conforming to the spacer dimensions, they may facilitate improved structural integrity of the housing as a whole.

[0075] The length **1375a** may be approximately 97mm in some embodiments, the length **1375b** may be approximately 89mm in some embodiments, the length **1375c** of the cover ridge **1335** may be approximately 6mm in some embodiments, the length **1375d** of sensor view panel **1355a** may be approximately 56mm in some embodiments, and the length **1375e** of sensor view panel **1355b** may be approximately 54mm in some embodiments, and the length **1375f** may be approximately 10mm in some embodiments.

[0076] Upper cover **1310**, may include a portion **1325** substantially parallel with the bottom panel portion **1340**, an angled portion **1330**, and an angled retaining portion **1335** for retaining upper sensor view panel **1355a**.

[0077] Back panel **1315** may include four cut-out grooves or insets **1320a**, **1320b**, **1320c**, and **1320d**. As discussed herein, these grooves may be present in some embodiments to receive the spacers **1305b-e**, thereby ensuring their being fixed in a desired location within the housing. One will appreciate that the number of grooves may or may not be the same as the number of spacers, as it may be desirable to fix only some of the spacers.

[0078] Bottom panel **1345** may include an angled front **1340a** (tab or fold) and angled rear portion **1340b** for retaining, at least in part, the adjacent panels. Bottom panel **1345** may include two cut-out insets **1350a** and **1350b** on its angled rear portion **1340b**. This may result in “raised” portions **1345a**, **1345b**, and **1345c** of the angled rear portion **1340b**.

[0079] Within the frame may be one or more of spacer brackets **1305a-f** (also

referred to simply as “spacers” or “brackets”). While spacers **1305a** and **1305f** may serve as end panels, spacers **1305b-e** may be entirely or substantially within the housing frame. Spacer brackets **1305a-f** need not be of the same dimensions. For example, brace bracket **1305d** may have a shorter length than spacer brackets **1305b, c, e**. As discussed below, spacer brackets **1305a-c, e**, and **f** may be used to ensure the structural integrity of the housing even when, e.g., a load is placed on top of portion **1325**. Brace bracket **1305d**, being shorter, provides space for mounting a sensor pair, but may also contribute to the housing’s structural integrity. In some embodiments, the brace bracket **1305d** may be secured by screws to the bottom panel **1340** and upper cover **1310**.

[0080] FIG. 14A is a view of a spacer component of FIG. 13A, e.g., component **1305a** or **1305e**, as may be implemented in some embodiments, from two perspectives **1405a** and **1405b**. The perspective **1405a** is rotated substantially 90° relative to the perspective **1405b**, thereby presenting a concave portion formed by the extensions **1425a-f**. The extensions **1425a-f** may themselves be separated by spaces **1410a-f**. FIG. 14B is a view of the mirrored spacer component of FIG. 13A, e.g., component **1305b** or **1305f**, as may be implemented in some embodiments, from two perspectives **1420a** and **1420b**. The perspective **1420b** is rotated substantially 90° relative to the perspective **1420a**, thereby presenting a concave portion formed by the extensions **1430a-f**. The extensions **1430a-f** may themselves be separated by spaces **1415a-f**.

[0081] FIG. 15 is a view of the brace bracket component of FIG. 13A, e.g., component **1305d**, as may be implemented in some embodiments, from two perspectives **1505a** and **1505b**. The perspective **1505a** is rotated substantially 90° relative to the perspective **1505b**, thereby presenting a concave portion formed by the extensions **1520a-e**. The extensions **1520a-e** may themselves be separated by spaces **1515a-d**.

[0082] FIG. 16 is an exploded, schematic view of components in the frame of a multi-angled depth sensor housing, including a sensor-pair-receiving brace bracket spacer, as may be implemented in some embodiments. Again, though a specific number of spacers are shown in the image to facilitate understanding, one will appreciate that in different embodiments there may be more or fewer spacers present

than those depicted here. As discussed above, the housing may comprise an upper panel **1610**, back panel **1615**, and bottom panel **1640** (the sensor view panels are not shown for visual economy). While spacers **1605a,b,c,e** and **f** provide structural support to the housing, the brace spacer bracket **1605d** may be shorter and recessed relative to the other spacers **1605a,b,c,e** and **f** so as to accommodate a coupling to a pair of depth sensors **1660**. In this example, the brace spacer bracket **1605d**, shown in isolated view **1600a** has two holes **1670a,b** for receiving a screw, nail, bolt, or other device for affixing the depth sensors **1660** to the brace spacer bracket **1605d**. For example, the depth sensors **1660** may themselves include mounting holes through which a screw may be passed to fix the sensor in place (e.g., as is the case for some versions of the RealSense™ depth sensor system).

[0083] In some embodiments, while spacers **1605a** and **1605f** are affixed to each end of the housing, the spacers **1605b-e** may move freely within the housing. In this manner, it may be possible for an installation technician to configure the system to the particular circumstances of the system's environment and planned usage. In some embodiments, however, the grooves **1620a-d** may receive each of spacer brackets **1605b-e**, thereby ensuring their placement in a specific location within the housing. This predetermined positioning may be useful, e.g., when the housing is shipped as one housing in a collection of housings to be installed as part of a composite installation. In some embodiments, the grooves may accommodate only a specific spacer, thereby forcing the technician to install a specific configuration. In some embodiments, however, e.g., as shown here, each groove may be able to receive any one of the four spacers. In these embodiments, the technician may thereby have the freedom to select at which of the four positions the depth sensors are best situated so as to achieve their task. Thus, in the schematic top down view **1600b** shown here, the spacer **1605d** and affixed sensor pair **1660** may be located at a position offset from the center of the housing.

[0084] To further clarify the possible motivations for the spacer placement discussed with reference to FIG. 16, FIG. 17 is a schematic view of a possible sensor-placement configuration in the multi-angled depth sensor housings of an example user

interface, as may be implemented in some embodiments. Particularly, the user interface **1700** includes three units **1705a-c** in series. Each unit may include three vertically adjacent displays and a corresponding sensor housing **1710a-c**. Within each sensor housing **1710a-c**, the spacer positions may be configured in anticipation of the housing's depth sensors' roles in the user interface as a whole. For example, the position of the sensor pairs may vary slightly between each module as the optical spacing of the depth sensors is different from the spacing each of the display screens.

[0085] Thus, as shown in the schematic, top-down, cut-away view **1715b** for the center sensor housing **1710b**, the shortened brace bracket **1720b** and corresponding depth sensor pair may be positioned in the center of the housing **1710b**. In contrast, as shown in the schematic, top-down, cut-away view **1715c** for the right sensor housing **1710c**, the shortened brace bracket **1720c** and corresponding depth sensor pair may be positioned at an offset **1725b** relative to the center of the housing **1710c**. Similarly, as shown in the schematic, top-down, cut-away view **1715a** for the left sensor housing **1710a**, the shortened brace bracket **1720a** and corresponding depth sensor pair may be positioned at an offset **1725a** relative to the center of the housing **1710a**.

Example Depth Sensor Frame for Modular Systems – Alternative Bracket Mount

[0086] FIG. 18 is a plurality of schematic views of an alternative bracket mounting component as may be used in some embodiments. Some sensor systems, e.g., the RealSense™ 300 may have mounting points better accommodated by certain form factors. The bracket mounting component of FIG. 18 may better facilitate the mounting of such systems.

[0087] Particularly, as shown in side view **1800a**, a spacer bracket **1805** may include a plurality of extensions. These extensions may include the extension **1805a** having a lip for retaining, at least in part, the upper viewing panel **1825a** and the extension **1805b** including a lip for retaining, at least in part, the lower viewing panel **1825b**. As discussed, these extensions may form an enclosure. Within this enclosure may be placed a bracing support **1820**. The bracing support may include a flat, planar side **1820d** adjacent to, or forming a portion of, the surface of the spacer bracket **1805**. A top planar portion **1820b** and a lower planar portion **1820c** extending from the planar

side **1820d** may be used to secure the bracing support **1820** within the bracket spacer **1805**. Frontal view **1800b** (i.e., the perspective of one standing in front of the depth sensors **1815a** and **1815b**) removes the spacer bracket **1805** and viewing panels **1825a,b** shown in side view **1800a** and shows the bracing support **1820** from a “frontal view”. Accordingly, it may be easier for the reader to discern the top planar portion **1820b** and the lower planar portion **1820c** extended from the planar side **1820d** of bracing support **1820** in the view **1800b**.

[0088] The top planar portion **1820b** and a lower planar portion **1820c** may be used to secure the bracing support **1820** in a variety of manners. For example, a screw may pass through the extension **1805a** and top planar portion **1820b**, though friction alone may suffice in some embodiments.

[0089] The bracing support **1820** may also include an extended planar surface **1820a**. The extended planar surface **1820a** may be used to couple bracing support **1820** with a sensor mount **1810**. The views **1800f** of the bracing support **1820** remove the other components (spacer bracket **1805**, sensor mount **1810**, viewing panels **1825a,b**). Accordingly surface **1820a** may be more readily discernible in this view (the dashed lines in the of **1800b** indicate that, from the front, portions of the surface **1820a** and sensor mount **1810** may be occluded by the sensors **1815a,b**).

[0090] The sensor mount **1810** may provide a stable fixture for receiving the depth sensor systems **1815a** and **1815b**. View **1800c** provides a view from the right side of the sensor mount **1810** (“right” when looking at the portion of the sensor mount **1810** receiving the depth sensor systems **1815a** and **1815b**). View **1800d** provides a view from the left side of the sensor mount **1810**. View **1800e** provides a view from the front of the sensor mount **1810**. The sensor mount **1810** may include a plurality of holes for receiving screws or other fixation devices, to join the viewing panels **1825a,b**, depth sensor systems **1815a** and **1815b**, sensor mount **1810**, and bracing support **1820** into a composite structure.

[0091] Particularly, the depicted example has eight holes for securing the composite structure. Bracket holes **1830c** and **1830d** may be used to secure the sensor mount **1810** to the bracing support **1820** via surface **1820a**. Viewing panel hole **1830a** may be used to secure the upper viewing panel **1825a** to the sensor mount **1810**,

and viewing panel hole **1830b** may be used to secure the lower viewing panel **1825b** to the sensor mount **1810**. Sensor holes **1830f** and **1830e** may be used to secure the upper depth sensor system **1815a** to the sensor mount **1810**. Similarly, sensor holes **1830h** and **1830g** may be used to secure the lower depth sensor system **1815b** to the sensor mount **1810**.

[0092] FIG. 19A is a perspective schematic view of portions of the alternative bracket mounting component of FIG. 18 in an exploded, unassembled state, as may be implemented in some embodiments. In the unassembled state, the sensor mount **1810**, the bracing support **1820**, and depth sensor systems **1815a** and **1815b** may be unconnected. FIG. 19B illustrates how the sensor mount **1810** and the bracing support **1820** may be coupled by inserting screws, pins, or other coupling mechanisms via holes **1830c** and **1830d**. FIG. 19C is a perspective schematic view of the sensor mount **1810**, the bracing support **1820**, and depth sensor systems **1815a** and **1815b** all coupled together. As indicated, screws, pins, or other coupling mechanisms may be inserted through holes **1830f** and **1830e** to enter the securing mechanisms **1905a** and **1905b** respectively of the depth sensor system **1815a** (though not visible in the diagram one will appreciate that screws, pins, or other coupling mechanisms may similarly be inserted through holes **1830h** and **1830g** visible in FIG. 18, though not identified in FIG. 19C) into the securing mechanisms of the sensor system **1815b**). The upper viewing panel **1825a** may then be secured by passing a screw, pin, or other coupling mechanism through upper viewing panel **1825a** and into hole **1830a**. Similarly, the lower viewing panel **1825b** may then be secured by passing a screw, pin, or other coupling mechanism through viewing panel **1825b** and into hole **1830b**. Friction or grooves may be used, e.g., to ensure a secure fit in each of holes **1830a-h** for the respective screw, pin, or other coupling mechanism.

Example Depth Sensor Frame for Modular Systems – “Standalone” Mounting

[0093] Rather than affix one or more depth sensor pairs to one or more brace brackets as described above, various of the embodiments may affix depth sensor pairs to the housing directly, or to fixed mounting structures within the housing. For example, FIG. 20A is a “see-through” view of a housing frame **2005** of a multi-angled depth

sensor housing comprising depth sensors attached via “standalone mounts”, rather than brackets, as may be implemented in some embodiments. Particularly, within the frame **2005** may be placed one or more paired sensor arrangements **2010a** and **2010b**. In this example, the depth sensors again resemble the form factor of the RealSense™ depth sensor system, though one will readily appreciate variations employing other depth sensors. As indicated by ellipses **2015**, more than the two illustrated sensor mounts may be present and the mounts may be arranged in a substantially linear arrangement.

[0094] The mounts themselves may generally comprise two sensors at different angles and a mounting bracket. For example, FIG. 20B is a schematic view of a horizontal sensor mount as may be implemented in some embodiments. A top depth sensor system **2020** may be mounted above and at an angle relative to depth sensor system **2030**. Each sensor may (as in the example of the RealSense™ depth sensor system) include, e.g., an infrared emitter **2020c**, an infrared receiver **2020b** (e.g., some embodiments may operate in approximately the 850nm range), and a connection **2020a** (e.g., an USB connection, FireWire™ connection, wireless Bluetooth™ connection, etc.) to a computer system managing a modular unit or the display system as a whole. Some depth sensors additional include an RGB sensor, as discussed in greater detail below, though, as illustrated here, that need not be the case in all embodiments. For a horizontal mount, an extension **2025b** may attach the mount **2025a** to the frame housing or to the scaffold supporting the display system. FIG. 20C is a schematic view of a vertical sensor mount as may be implemented in some embodiments. For a horizontal mount, an extension **2030b** may attach the mount **2030a** to the frame housing or to the scaffold supporting the display system. Screw holes for receiving either the extension **2025b** or the extension **2030b** may be provided in the same mount in some embodiments to permit the installation technician flexibility in their construction.

[0095] FIG. 20D is a schematic view of a the varied depth region fields of view achieved using a sensor mount of FIG. 20B or FIG. 20C as may occur in some embodiments. Though shown here as non-overlapping to facilitate understanding, one will appreciate that in some embodiments, e.g., as shown in FIGs. 25A and 25B, the fields of view for each sensor in a sensor pair may overlap substantially (this may be

true for any of the disclosed mount types, including, e.g., bracket mounts, stand-alone mounts, etc.). Particularly, given depth sensors **2050a** and **2050b**, the angles precipitated by installation using the mounts of FIGs. 20B or 20C may result in corresponding fields of view **2055a** and **2055b** relative to floor **2040**.

[0096] FIG. 21A is a schematic view of an example multi-angled standalone depth sensor mount **2105** with transparent depth sensor representations **2110a**, **2110b** in their relative positions, as may be implemented in some embodiments. FIG. 21B is a schematic view of a multi-angled depth sensor mount **2105** of FIG. 21A without depth sensors, as may be implemented in some embodiments. As illustrated, the mount **2105** may include a retaining extension **2115** including angled portions **2115a** and **2115b** configured to receive and retain the depth sensors **2110a**, **2110b**. However, as discussed herein, various embodiments may use screws, clamps, or other fixation devices to couple the sensors with the mount, in lieu of, or in addition to, a retaining extension **2115**.

[0097] For example, FIG. 22 is a schematic side view of various dimensions of an example multi-angled standalone depth sensor mount, as may be implemented in some embodiments. Complementing side view **2205a** of the mount **2210** is a projected view **2205b** upon a plane beneath the mount. As indicated, this mount **2210** may be mounted to the housing via a vertical screw entering receiver **2240** (e.g., passing through the bottom of the housing). The regions **2220a** and **2220b** indicate where each of the first and second depth sensor systems may reside on the mount (though, as discussed herein, both positions need not be filled in every embodiment). Each sensor system may have a receiver to accept a mounting screw, pinion, or other fixation mechanism. Access pathways **2215a** and **2215b** permit such fixation mechanisms to enter the receivers and thereby couple the depth sensor systems to the mount **2210**. These may enter at positions from the mount corresponding to distance **2230a** and **2230b** (approximately half the width of the depth sensor system in this embodiment). The distances **2230a** and **2230b** may be substantially 5mm in some embodiments. The angle **2245** may be substantially 25° in some embodiments. The lengths **2225a** and **2225d** may be substantially 12mm in some embodiments. The lengths **2225b** and **2225c** may be substantially 38mm in some embodiments.

[0098] Thus, in some embodiment the depth sensor system pairing may be mounted to a standalone mount or coupled with a brace bracket. In some embodiments, the pair may be bolted directly to the housing panels (e.g., without a holder). One will appreciate that various embodiments may use a particular sensor placement mechanism exclusively, or may use combinations of mechanisms within the housing.

[0099] For example, FIG. 23 is an exploded, schematic view of components in the frame of a multi-angled depth sensor housing, including exclusively standalone mounted sensor pairs, as well as schematic top-down cutaway view of the assembled structure, as may be implemented in some embodiments. Within the housing formed by upper cover **2310**, back panel **2315**, bottom panel **2340** and the viewing panels (not shown), may be one or more standalone mounted depth sensor pairs **2360a-e** (when standalone brackets are used, grooves **1620a-d** may be omitted from the back panel **2315** in some embodiments). The pairs may be separated by zero or more spacers **2305a-e**. The number of intervening spacers **2305b-d** may be determined based, e.g., upon the materials used for the housing and the desired structural integrity of the housing for the anticipated deployment environment.

[00100] In contrast to the exclusively standalone mounts of FIG. 23, FIG. 24 is an exploded, schematic view of components in the frame of a multi-angled depth sensor housing, including both standalone mounted and bracket-mounted sensor pairs, as well as schematic top-down cutaway view of the assembled structure, as may be implemented in some embodiments. Again, the housing may comprise back **2415**, top **2410**, and bottom **2440** panels. Between spacers **2405a-c,e,f** may be placed both standalone mounted depth sensor pairs **2460a,b,d** and bracket mounted depth sensor pairs **2460c** (mounted, e.g., to brace bracket **2405d**). In this example, the mounts have all their possible attachment points filled with sensors, however, less than all points may be used in some embodiments. Additionally, there is one mount per interval between spacers. One will appreciate that in some embodiments, more than one mount may be placed in an interval and some intervals may have no mounts. Additionally, though not shown here, one will appreciate that some or all of the depth sensor pairs may be mounted directly to the sensor view panels **1355a** and **1355b** or to the remainder of the

housing.

[00101] FIG. 25A is a side view of various dimensions for an example interaction system with a multi-angled depth sensor housing **2520**, as may be implemented in some embodiments. FIG. 25B is a schematic side view of the combined viewing angles for the system of FIG. 25A. Note that the depth field results depicted in FIGs. 25A and 25B may be achieved using depth sensor pairings mounted to the housing, standalone mounts, brace brackets, etc. Angle **2505a** reflects the angle of the sensor view panel **1355a** relative to the floor plane and may be approximately 65° in some embodiments. Angle **2505b** reflects the angle of the sensor view panel **1355b** relative to the floor plane and may be approximately 30° in some embodiments. The upper sensor within the housing **2520** may have a field of view **2510a** of approximately 60° in some embodiments. The lower sensor within the housing **2520** may also have a field of view **2510b** of approximately 60° in some embodiments. The upper depth sensor may be a height **2515a** from the floor **2530** (in some embodiments, approximately 2.065 meters) and the lower depth sensor may be a height **2515b** from the floor **2530** (in some embodiments, approximately 2.019 meters). In this example, the active area for interaction with the interface system may extend a distance **2525a** from the display (in some embodiments, approximately 3 meters).

[00102] Together, the fields of view **2510a** and **2510b** may precipitate a composite field of view **2510**, which may be approximately 95° in some embodiments.

Example Depth Sensor Frame for Modular Systems – RGB Camera Variation

[00103] FIG. 26 is a “see-through” view of a housing frame for a multi-angled depth sensor housing **2605**, wherein both depth sensors and visual image sensors are installed, as may be implemented in some embodiments. For example, depth sensor system **2620a** may have a depth sensor emitter **2625b** and depth sensor receiver **2625a** (depth sensor system **2620b** may likewise have corresponding emitters and receivers). While the depth sensor view panels **2640b** and **2640a** may permit, e.g., infrared frequencies to pass-through, both when emitted from the depth sensor emitter **2625b** and when received at the depth sensor receiver **2625a**, the view panels **2640b** and **2640a** may be opaque to visual frequencies (e.g., as an aesthetic or functional

desire to prevent users from seeing the depth sensors). Accordingly, some embodiments contemplate incorporating holes, or alternative materials, into depth sensor view panels **2640b** and **2640a** at the locations **2635a-d** to facilitate the capture of images in the visual range of wavelengths. For example, as in the case of the RealSense™ depth sensor, an RGB camera **2630a**, **2630b** may already be integrated into the depth sensor system. In some embodiments, independent RGB cameras **2630c** and **2630d**, dedicated exclusively for visual image capture may be used. The mounts may be adapted and reused for these RGB exclusive sensors to help ensure that they achieve the same or similar field of view as various of the depth sensors. In some embodiments, sensors exclusively dedicated to depth capture information, such as sensor **2645** may also be present within the housing frame. Consequently, as indicated by ellipses **2610a** and **2610b**, more mounts and sensors may be present within the housing than are shown here.

Example Depth Sensor Frame for Modular Systems – Fields of View

[00104] FIG. 27A is a schematic view of a modular system unit's **2705a** depth field of view **2710a**, where the depth sensors have no range limitation, as may occur in some embodiments. For example, the facilitate understanding, were there no limitations on the depth sensors' fields of view for a modular unit **2705a**, then it would be possible for the field of view active area **2710a** to extend to the furthest occluding object, e.g., the floor.

[00105] Often, however, the depth sensors will not have such an extensive range. FIG. 27B is a schematic view of a modular system unit's **2705b** depth field of view **2710b**, where the depth sensors have a range limitation, as may occur in some embodiments. In these embodiments, the depth sensors may be limited to a particular range. Beyond this limit, the acquired data may be insufficiently accurate for desirable or effective gesture determination.

[00106] While FIGs. 27A and 27B show fields of view that emit within the width of the modular unit, in some embodiments, the depth sensors' fields of view expand beyond this width. Consequently, FIG. 27C is a schematic view of a modular system unit's **2705c** depth field of view **2710c**, where the depth sensors have a range limitation,

as well as a composite spread beyond the width of the modular system unit, as may occur in some embodiments. Data from this region may introduce noise and so in some embodiments the user may be forbidden from entering the regions **1225a** and **1225c**. In some embodiments, the system may instead filter edge data to exclude these potentially noisy regions.

[00107] FIG. 27D is a schematic view of a composite modular system composed of three units **2705d**, **2705e**, **2705f** such as are depicted in FIG. 27B (e.g., unit **2705b**) and the corresponding composite depth field of view **2710d**, as may occur in some embodiments. When units such as **2705c** are instead used, each sensor's field of view may overlap with its neighbor.

[00108] FIG. 27E is a schematic view of a composite modular system composed of two units **2705g** and **2705h** such as are depicted in FIG. 27C (e.g., unit **2705c**) and the corresponding composite depth field of view **2710e**, as may occur in some embodiments.

Example Depth Sensor Frame for Modular Systems – Example Configurations and Variations

[00109] Composite depth fields of view may be used in a variety of applications. For example, composite fields may facilitate gesture identifications that would not be possible with a single unit in isolation. For example, some two-handed gestures may not be visible from a single unit.

[00110] FIG. 28A depicts one example application availing itself of a composite field of view. Particularly, FIG. 28A is a schematic view of a user **2815** interacting with a composite modular system composed of three units **2805a**, **2805b**, and **2805c** arranged in a “tri-fold” orientation, as may be implemented in some embodiments. FIG. 28B is a schematic top-down view of the user interacting with the composite modular system of FIG. 28A. In this orientation, the user may be able to stand in locations facilitating viewing by one, two, or all three of the units' fields of view **2810a**, **2810b**, and **2810c**. In the depicted example, the user **2815** is standing at a location wherein their feet are visible to all three fields of view **2810a**, **2810b**, and **2810c**. The user's right and left hands are both visible in field of view **2810b**, but only the left hand is visible within field of view **2810a** and only the right hand is visible in field of view **2810c**.

[00111] FIG. 29A is another example applications, illustrating a schematic view of a user **2915** interacting with a composite modular system composed of six units **2910a-f** arranged in a “ring” orientation, as may be implemented in some embodiments. FIG. 29B is a schematic top-down view of the user interacting with the composite modular system of FIG. 29A. Again, in the depicted example, the user **2915** is standing at a location wherein their feet are visible to all six fields of view **2910a-f**. The user’s right and left hands are both visible in fields of view **2910b** and **2910e**, but only the left hand is visible in fields of view **2910a**, **2910d** and only the right hand is visible in fields of view **2910a**, **2910d**. By providing a back-side view of the user, the composite system may recognize more complicated gestures and relay more comprehensive information than might otherwise be possible. For example, a three-dimensional representation of the user may now be represented at a variety of locations with the additional back-side information. Gestures that may have been occluded by the user’s torso from the perspective of unit **2905b**, may now be visible from unit **2905e**. Such information may be used in generating the image of the display on **2905b** even though it is not visible from that display (e.g., when the user makes a gesture behind their back).

Example Multi-Sensor Integration Methods

[00112] To take advantage of the disparate or composite fields of view provided by various embodiments described herein, the computer system managing the user interface may. For example, FIG. 30A is a schematic view of the clock and bus relations between a central computer system **3030** and one or more of depth sensors **3010a-d**, as may be implemented in some embodiments.

[00113] The computer system **3030**, which may be the same as computer system **1050**, may be connected via a wired or wireless bus **3025** with one or more of depth sensors **3010a-d** on one or more units. The computer system **3030** may include system clock **3035**. Similarly, each depth sensor system, as in the case of the RealSense™ depth sensor system, may include an internal clock. For example, sensor system **3010a** is the upper sensor in a two-bracket sensor mount. Internally sensor system **3010a** carries clock **3005a**. Beneath sensor system **3010a** in this figure, on the same mount in the system, is sensor system **3010b** with internal clock **3005b**. Sensor

system clock **3010c** may be associated with internal clock **3005d** and reside on a separate two-sensor mount, etc. As indicated by ellipses **3015**, these sensor system – internal clock relationships may continue for many different sensors in the user interface system (lower sensor system **3010d** may be associated with internal clock **3005d**).

[00114] In accordance with their corresponding internal clocks, the depth sensor systems may generate depth frames for transmission on the bus **3025**. For example, sensor system **3010a** may generate frames **3020a**, sensor system **3010b** may generate frames **3020b**, sensor system **3010c** may generate frames **3020c**, and sensor system **3010d** may generate frames **3020d**, etc. In some embodiments, the clocks **3005a-d** may be more accurate and consistent than the system clock **3035**. In some embodiments, the clocks **3005a-d** may begin counting from 0 at the time they are activated, while in some embodiments system clock **3035** may measure its time from, e.g., the Unix epoch time. As the system clock **3035** may be used for a variety of purposes, it may be less accurate than the clocks **3005a-d**.

[00115] FIG. 30B is a schematic view of the depth frame arrival queues **3050a-c** for three depth sensor systems at the user interface computer system as may occur in some embodiments. For example, with reference to the queue **3050a**, at system time 1489958962 (e.g., a date measured relative to the Unix epoch in milliseconds) the computer system received a frame from the depth sensor timestamped with the time 400. Based upon these depth sensor timestamp – system time correspondences between each of the sensors the system may determine that the frames arrived at correspondences **3050a**, were “simultaneously” captured. These frames may not literally be simultaneous, but may be substantially close that considering their values as being capture at the same time suffices for the computer system’s **3030** processing purposes. For example, the system may determine that the frames associated with correspondences **3060a-c** were simultaneously captured. An example process for making this determination at the computer system is provided below with respect to FIG. 31.

[00116] FIG. 31 is a flow diagram illustrating features of an example process for coordinating depth frames received at the computer system **3030** of FIG. 30A from the one or more depth sensors **3010a-d** of FIG. 30A, as may be implemented in some

embodiments. At block **3105**, the computer system **3030** may receive a time-stamped depth frame from a depth sensor on the bus **3025**. At block **3110**, the computer system **3030** may store the current system clock value with the time stamped frame, e.g., in a queue as depicted in FIG. 30B. Once the computer system **3030** has received a sufficient number of depth frames for each sensor (e.g., as determined via factory settings based upon general experience with the depth sensor and system clock disparities) at block **3115**, the system may determine which frames from the sensors are “simultaneous” at block **3120**. For example, in some embodiments the system may wait until at least five consecutive frames have been received for each depth sensor.

[00117] Once the computer system **3030** determines the simultaneous frames, they may be output at block **3125** for use by the active application (e.g., a program to recognize gestures). At block **3130**, the queues of depth frames may be flushed and the process repeated for the next frames incoming to computer system **3030**.

Embodiment Variations

[00118] One will readily appreciate that individual interface units may be arranged in a variety of fashions. This section provides some example variations to ensure the reader’s appreciation of these possibilities. For example, FIG. 32A is a schematic view of a “corridor” composite modular system, as may be implemented in some embodiments. FIG. 32B is a schematic top-down view of the composite modular system of FIG. 32A. The “corridor” may encompass a series of units **3205a** and series of units **3205b** arranged opposite one another so as to provide a complementary depth fields of view. Through three units are here shown in each series, ellipses **3210a** and **3210b** here indicate the possibility of the series being more or less than three units.

[00119] At the end of the corridor formed by the series of units **3205a** and series of units **3205b** may be placed one or more end units **3205e**. The depth fields of view **3215a-c** and **3215d** may correspond to the fields of view for the units along one side of the corridor, i.e., the units in series **3205a** and the unit **3205d**. Similarly, the depth fields of view **3215f** and **3215g-i** may correspond to the fields of view for the units along the other side of the corridor, i.e., the unit **3205c** and the units in series **3205b**. These fields of view may overlap in the regions **3250a-d**, as indicated, providing opposing depth

frames of a user walking down the corridor. Such complementary frames may facilitate the identification of spatial-temporal gestures from the user as they traverse the length of the corridor. Unfortunately, being orthogonal to the user's walking path, they may not identify aspects of gestures occurring in front of the user. For example, it may be readily apparent from the user's side that they are raising a hand and pointing a finger, but without a frontal depth-frame view, it may not be clear which finger the user is extending.

[00120] Consequently, the one or more end units **3205e** may be specifically configured to provide an extended field of view **3215e** down the length of as much of the corridor as possible. In some embodiments, this may be achieved by modifying the one or more end units **3205e** to include an additional directional depth sensor placed to more readily identify frontal features. For example, FIG. 32C is a schematic view of an end unit from the composite modular system of FIG. 32A, where the end unit has a longitudinal depth sensor **3225** as may be implemented in some embodiments. Particularly, the longitudinal depth sensor **3225** may be placed between the displays **3220a** and **3220b**. A screen may be placed before the sensor, which is opaque to human vision, but permits, e.g., infrared emissions from the depth sensor. In some embodiments, the longitudinal depth sensor **3225** may be placed behind a portion of the screen, or pixels in the screen removed to facilitate, e.g., infrared emission and detection, without substantially affecting the user's perception of a seamless display.

[00121] In contrast to the broader, wider fields of view of other sensors in the unit, the longitudinal depth sensor **3225** may be specifically selected for a narrower, but longer, field of view, to complement the length of the corridor. Particularly, FIG. 32D is a schematic view of varied depth region fields of view achieved using the sensor mount of FIG. 32C as may occur in some embodiments. As previously described, the two sensor systems **3230a** and **3230b** in the upper housing frame may provide complementary fields of view **3235a** and **3235b** (again, though not shown here overlapping, one will appreciate that the fields of view **3235a** and **3235b** overlap in some embodiments). Fields of view **3235a** and **3235b** may even be angled so as to capture portions of the floor **3240**. In contrast, the field of view **3235c** associated with the longitudinal sensor system **3225** may be more narrowly focused, in anticipate of its

role to provide a frontal counterpart to as many of the fields of view overlaps **3250a-d** as possible.

[00122] In some embodiments, it may be helpful not only to capture depth frames above and before the user, but also beneath the user. For example, some gestures may involve actions occluded by hands and torsos from above or before the user (e.g., wrapping one's thumb under one's hand when pointing forward). By placing depth sensor systems at the base of a unit, or below the unit's mid-height point, it may be possible to acquire depth frames of these otherwise occluded regions. FIG. 33A is a schematic view of a modular system unit **3305** having multiple sensor additions, as may be implemented in some embodiments. Particularly in addition to an upper frame housing **3310a** containing depth sensor mountings **3325a** (again one or many sensors may be present as indicated by ellipses **3330a**) as described herein, as well as a mid-height sensor **3320** being placed between (as shown) or behind displays **3315a** and **3315b**, the unit **3305** may also include a lower housing frame **3310b** for depth sensors at its base. Like the upper frame housing **3310a**, the lower housing frame for depth sensors may include one or more depth sensor mountings **3325b** as indicated by ellipses **3330b**. Unlike the upper frame housing **3310a**, however, the mountings **3325b** may be rotated 180° to point upward.

[00123] FIG. 33B is a schematic view of the varied depth region fields of view achieved using the sensor mount of FIG. 33A as may occur in some embodiments. Particularly, the sensor systems **3335a** and **3335b** on mount **3325a** may have fields of view **3340a** and **3340b** as described elsewhere herein. Similarly, the mid-height sensor **3320** may have a field of view **3340c**. The addition of the base housing **3310b** and sensor systems **3335d** and **3335e**, however, have now made additional fields of view **3335d** and **3335e** available to the system. Like field of view **3340c**, these fields of view **3340d** and **3340e** may not include the floor **3350**.

Computer System

[00124] FIG. 34 is a block diagram of an example computer system as may be used in conjunction with some of the embodiments. The computing system **3400** may include an interconnect **3405**, connecting several components, such as, e.g., one or more

processors **3410**, one or more memory components **3415**, one or more input/output systems **3420**, one or more storage systems **3425**, one or more network adaptors **3430**, etc. The interconnect **3405** may be, e.g., one or more bridges, traces, busses (e.g., an ISA, SCSI, PCI, I2C, Firewire bus, etc.), wires, adapters, or controllers.

[00125] The one or more processors **3410** may include, e.g., an Intel™ processor chip, a math coprocessor, a graphics processor, etc. The one or more memory components **3415** may include, e.g., a volatile memory (RAM, SRAM, DRAM, etc.), a non-volatile memory (EPROM, ROM, Flash memory, etc.), or similar devices. The one or more input/output devices **3420** may include, e.g., display devices, keyboards, pointing devices, touchscreen devices, etc. The one or more storage devices **3425** may include, e.g., cloud based storages, removable USB storage, disk drives, etc. In some systems memory components **3415** and storage devices **3425** may be the same components. Network adapters **3430** may include, e.g., wired network interfaces, wireless interfaces, Bluetooth™ adapters, line-of-sight interfaces, etc.

[00126] One will recognize that only some of the components, alternative components, or additional components than those depicted in FIG. 34 may be present in some embodiments. Similarly the components may be combined or serve dual-purposes in some systems. The components may be implemented using special-purpose hardwired circuitry such as, for example, one or more ASICs, PLDs, FPGAs, etc. Thus, some embodiments may be implemented in, for example, programmable circuitry (e.g., one or more microprocessors) programmed with software and/or firmware, or entirely in special-purpose hardwired (non-programmable) circuitry, or in a combination of such forms.

[00127] In some embodiments, data structures and message structures may be stored or transmitted via a data transmission medium, e.g., a signal on a communications link, via the network adapters **3430**. Transmission may occur across a variety of mediums, e.g., the Internet, a local area network, a wide area network, or a point-to-point dial-up connection, etc. Thus, "computer readable media" can include computer-readable storage media (e.g., "non-transitory" computer-readable media) and computer-readable transmission media.

[00128] The one or more memory components **3415** and one or more storage devices **3425** may be computer-readable storage media. In some embodiments, the one or more memory components **3415** or one or more storage devices **3425** may store instructions, which may perform or cause to be performed various of the operations discussed herein. In some embodiments, the instructions stored in memory **3415** can be implemented as software and/or firmware. These instructions may be used to perform operations on the one or more processors **3410** to carry out processes described herein. In some embodiments, such instructions may be provided to the one or more processors **3410** by downloading the instructions from another system, e.g., via network adapter **3430**.

Remarks

[00129] The above description and drawings are illustrative. Consequently, neither the description nor the drawings should be construed so as to limit the disclosure. For example, titles or subtitles have been provided simply for the reader's convenience and to facilitate understanding. Thus, the titles or subtitles should not be construed so as to limit the scope of the disclosure, e.g., by grouping features which were presented in a particular order or together simply to facilitate understanding. Unless otherwise defined herein, all technical and scientific terms used herein have the same meaning as commonly understood by one of ordinary skill in the art to which this disclosure pertains. In the case of conflict, this document, including any definitions provided herein, will control. A recital of one or more synonyms herein does not exclude the use of other synonyms. The use of examples anywhere in this specification including examples of any term discussed herein is illustrative only, and is not intended to further limit the scope and meaning of the disclosure or of any exemplified term.

[00130] Similarly, despite the particular presentation in the figures herein, one skilled in the art will appreciate that actual data structures used to store information may differ from what is shown. For example, the data structures may be organized in a different manner, may contain more or less information than shown, may be compressed and/or encrypted, etc. The drawings and disclosure may omit common or well-known details in order to avoid confusion. Similarly, the figures may depict a

particular series of operations to facilitate understanding, which are simply exemplary of a wider class of such collection of operations. Accordingly, one will readily recognize that additional, alternative, or fewer operations may often be used to achieve the same purpose or effect depicted in some of the flow diagrams. For example, data may be encrypted, though not presented as such in the figures, items may be considered in different looping patterns ("for" loop, "while" loop, etc.), or sorted in a different manner, to achieve the same or similar effect, etc.

[00131] Reference in this specification to "one embodiment" or "an embodiment" means that a particular feature, structure, or characteristic described in connection with the embodiment is included in at least one embodiment of the disclosure. Consequently, the phrase "in one embodiment" in various places in the specification is not necessarily referring to the same embodiment in each of those various places. Separate or alternative embodiments may not be mutually exclusive of other embodiments. One will recognize that various modifications may be made without deviating from the scope of the embodiments.

CLAIMS

We claim:

1. A depth-sensor housing frame comprising:
 - a back panel;
 - a top panel;
 - a bottom panel;
 - a first frequency-permissive panel, the first frequency-permissive panel configured to substantially permit the passage of radiation associated with a depth sensor, but to not substantially permit the passage of visual frequency radiation;
 - a second frequency-permissive panel, the first frequency-permissive panel configured to substantially permit the passage of radiation associated with a depth sensor, but to not substantially permit the passage of visual frequency radiation;
 - one or more of depth sensor mounts; and
 - one or more of spacers, the one or more spacers located within an enclosure formed by the back panel, top panel, bottom panel, first frequency-permissive panel, and the second frequency-permissive panel, wherein
 - each of the one or more depth sensor mounts are located between at least two spacers of the one or more spacers, and wherein
 - each depth sensor mount of the one or more depth sensor mounts is configured to receive two depth sensors such that a field of view associated with each depth sensor passes through at least one of the two frequency-permissive panels.
2. The depth-sensor housing frame of Claim 1, wherein the top cover comprises:
 - a first portion substantially parallel to the bottom panel; and
 - a second portion at an angle of substantially 25° from the first portion towards the bottom panel.

3. The depth-sensor housing frame of Claim 2, wherein the second portion of the top cover comprises a cover ridge, the cover ridge configured to receive a portion of the first frequency-permissive panel.

4. The depth-sensor housing frame of Claim 1, wherein the first frequency-permissive panel is adjacent the second frequency-permissive panel at an angle of substantially 35°.

5. The depth-sensor housing frame of Claim 4, wherein at least one of the spacers comprises six extensions, wherein

the first extension is oriented at a substantially 90° angle relative to the second extension,

the second extension is oriented at a substantially 90° angle relative to the third extension,

the third extension is oriented at an angle greater than 90° relative to the fourth extension,

the fourth extension is oriented at an angle greater than 90° relative to the fifth extension,

the fifth extension is oriented at an angle less than 90° relative to the sixth extension, and

the sixth extension is oriented at an angle greater than 90° relative to the fifth extension, and wherein

the six extensions together form a concave region.

6. The depth-sensor housing frame of Claim 5, wherein at least one of the spacers comprises no more than five extensions and has a length less than at least one spacer of Claim 5.

7. The depth-sensor housing frame of Claim 5, wherein the second portion of the top cover comprises a cover ridge, the cover ridge configured to receive a portion of the first frequency-permissive panel.

8. A modular depth interface unit comprising:

one or more of displays; and

a depth-sensor housing frame, the frame comprising:

a back panel;

a top panel;

a bottom panel;

a first frequency-permissive panel, the first frequency-permissive panel configured to substantially permit the passage of radiation associated with a depth sensor, but to not substantially permit the passage of visual frequency radiation;

a second frequency-permissive panel, the first frequency-permissive panel configured to substantially permit the passage of radiation associated with a depth sensor, but to not substantially permit the passage of visual frequency radiation;

one or more of depth sensor mounts; and

one or more of spacers, the one or more spacers located within an enclosure formed by the back panel, top panel, bottom panel, first frequency-permissive panel, and the second frequency-permissive panel, wherein

each of the one or more depth sensor mounts are located between at least two spacers of the one or more spacers, and wherein

each depth sensor mount of the one or more depth sensor mounts is configured to receive two depth sensors such that a field of view associated with each depth sensor passes through at least one of the two frequency-permissive panels.

9. The modular depth interface unit of Claim 8, wherein the one or more displays comprises:

a first display substantially vertically adjacent and above a second display; and
the second display substantially vertically adjacent and above a third display,
wherein the depth-sensor housing frame is substantially vertically adjacent and above a
first display.

10. The modular depth interface unit of Claim 8, wherein the top cover comprises:

a first portion substantially parallel to the bottom panel; and
a second portion at an angle of substantially 25° from the first portion towards the
bottom panel.

11. The modular depth interface unit of Claim 10, wherein the second portion
of the top cover comprises a cover ridge, the cover ridge configured to receive a portion
of the first frequency-permissive panel.

12. The modular depth interface unit of Claim 8, wherein the first frequency-
permissive panel is adjacent the second frequency-permissive panel at an angle of
substantially 35°.

13. The modular depth interface unit of Claim 12, wherein at least one of the
spacers comprises six extensions, wherein

the first extension is oriented at a substantially 90° angle relative to the second
extension,

the second extension is oriented at a substantially 90° angle relative to the third
extension,

the third extension is oriented at an angle greater than 90° relative to the fourth
extension,

the fourth extension is oriented at an angle greater than 90° relative to the fifth
extension,

the fifth extension is oriented at an angle less than 90° relative to the sixth
extension, and

the sixth extension is oriented at an angle greater than 90° relative to the fifth extension, and wherein

the six extensions together form a concave region.

14. The modular depth interface unit of Claim 13, wherein at least one of the spacers comprises no more than five extensions and has a length less than at least one spacer of Claim 13.

15. The modular depth interface unit of Claim 13, wherein the second portion of the top cover comprises a cover ridge, the cover ridge configured to receive a portion of the first frequency-permissive panel.

16. A depth-based interface system comprising:
at least one processor;
one or more of displays; and
one or more of depth-sensor housing frames, at least one frame of the one or more frames comprising:

a back panel;

a top panel;

a bottom panel;

a first frequency-permissive panel, the first frequency-permissive panel configured to substantially permit the passage of radiation associated with a depth sensor, but to not substantially permit the passage of visual frequency radiation;

a second frequency-permissive panel, the first frequency-permissive panel configured to substantially permit the passage of radiation associated with a depth sensor, but to not substantially permit the passage of visual frequency radiation;

one or more of depth sensor mounts; and

one or more of spacers, the one or more spacers located within an enclosure formed by the back panel, top panel, bottom panel, first frequency-permissive panel, and the second frequency-permissive panel, wherein

each of the one or more depth sensor mounts are located between at least two spacers of the one or more spacers, and wherein

each depth sensor mount of the one or more depth sensor mounts is configured to receive two depth sensors such that a field of view associated with each depth sensor passes through at least one of the two frequency-permissive panels.

17. The depth-based interface system of Claim 16, wherein the one or more displays comprises a 3 x 3 grid of substantially adjacent displays.

18. The depth-based interface system of Claim 17, wherein the one or more depth-sensor housing frames comprises:

a first depth sensor housing frame above the top-left display of the 3 x 3 grid;

a second depth sensor housing frame above the top-middle display of the 3 x 3 grid;


a third depth sensor housing frame above the top-right display of the 3 x 3 grid.

19. The depth-based interface system of Claim 18, wherein the top cover comprises:

a first portion substantially parallel to the bottom panel; and

a second portion at an angle of substantially 25° from the first portion towards the bottom panel.

20. The depth-based interface system of Claim 19, wherein the second portion of the top cover comprises a cover ridge, the cover ridge configured to receive a portion of the first frequency-permissive panel.

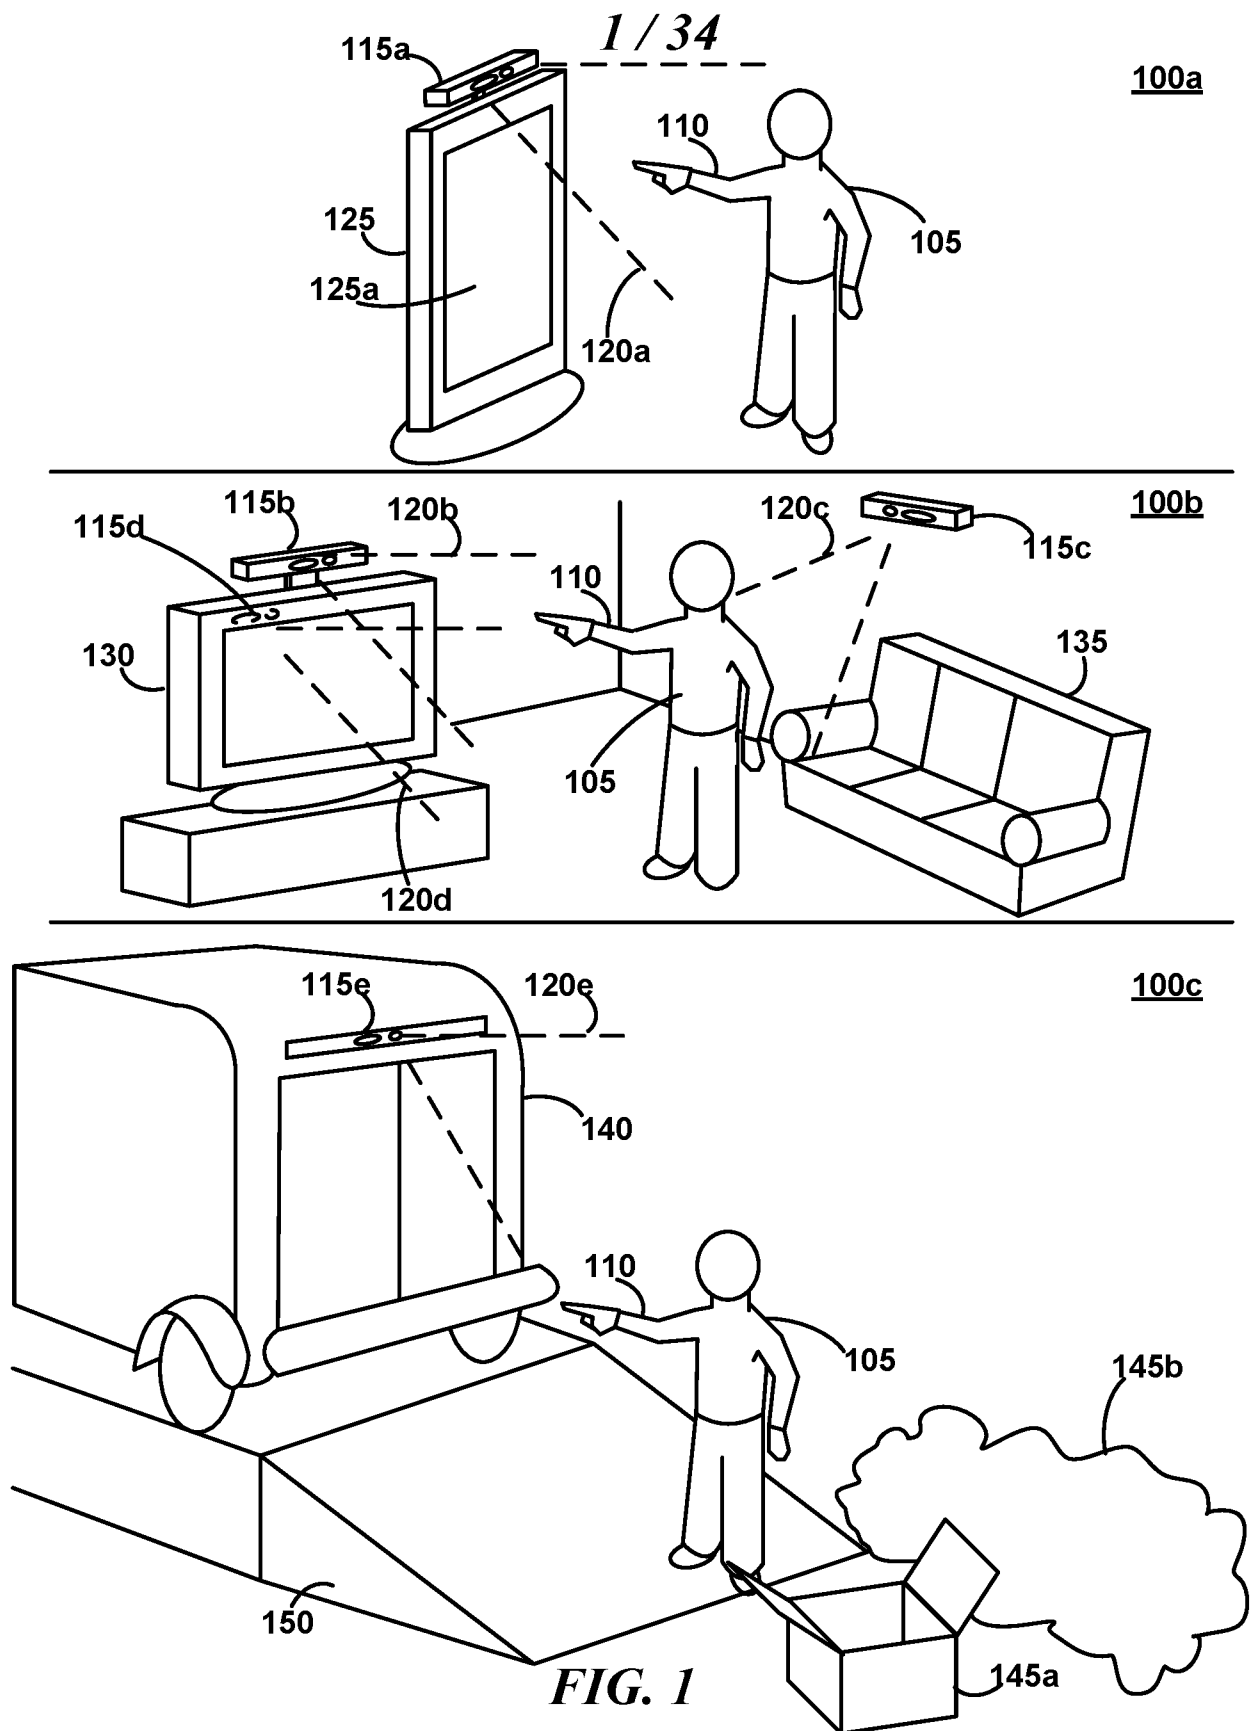

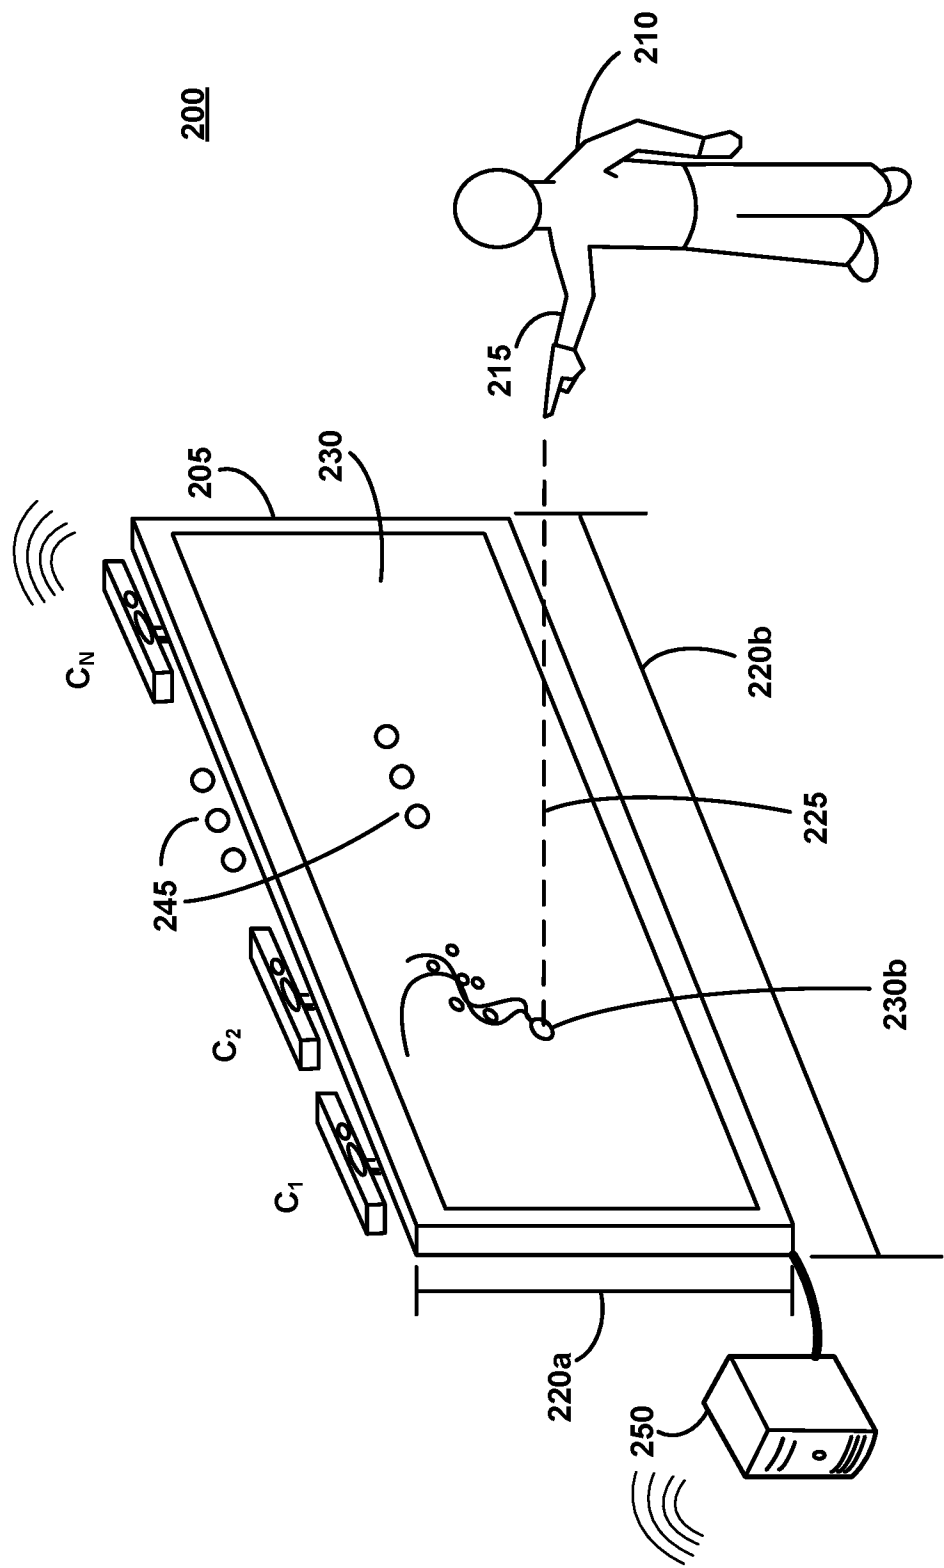
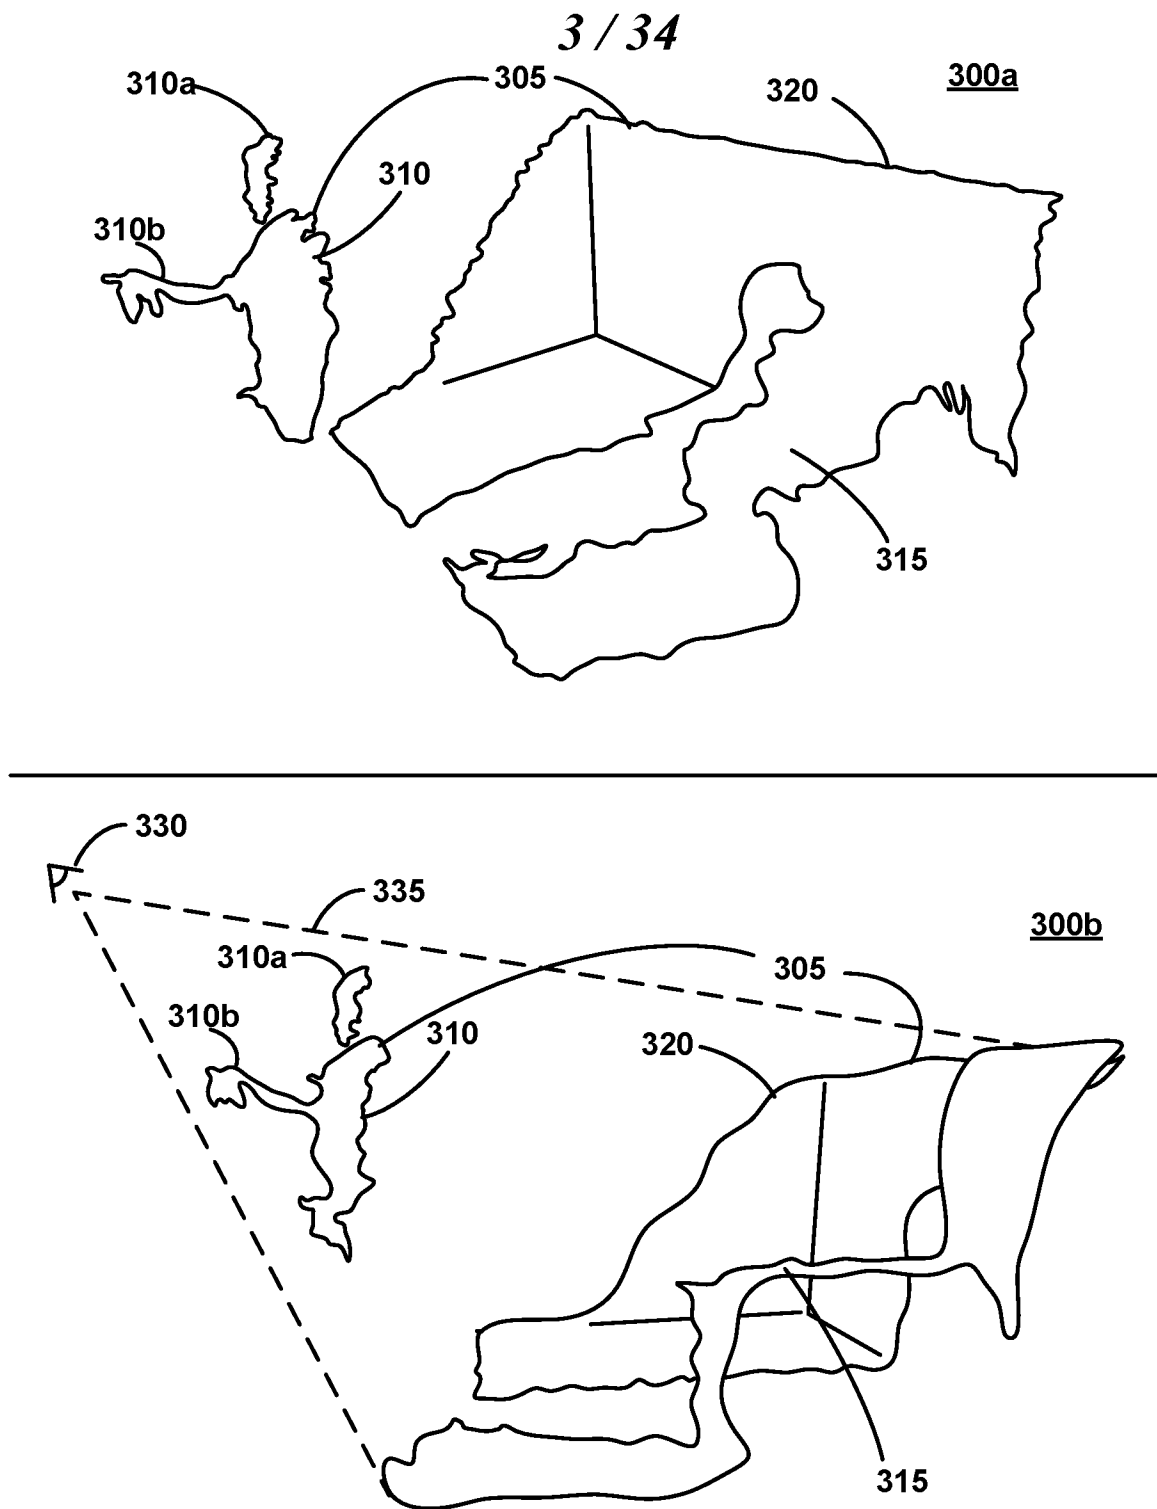


FIG. 2

**FIG. 3**

4 / 34

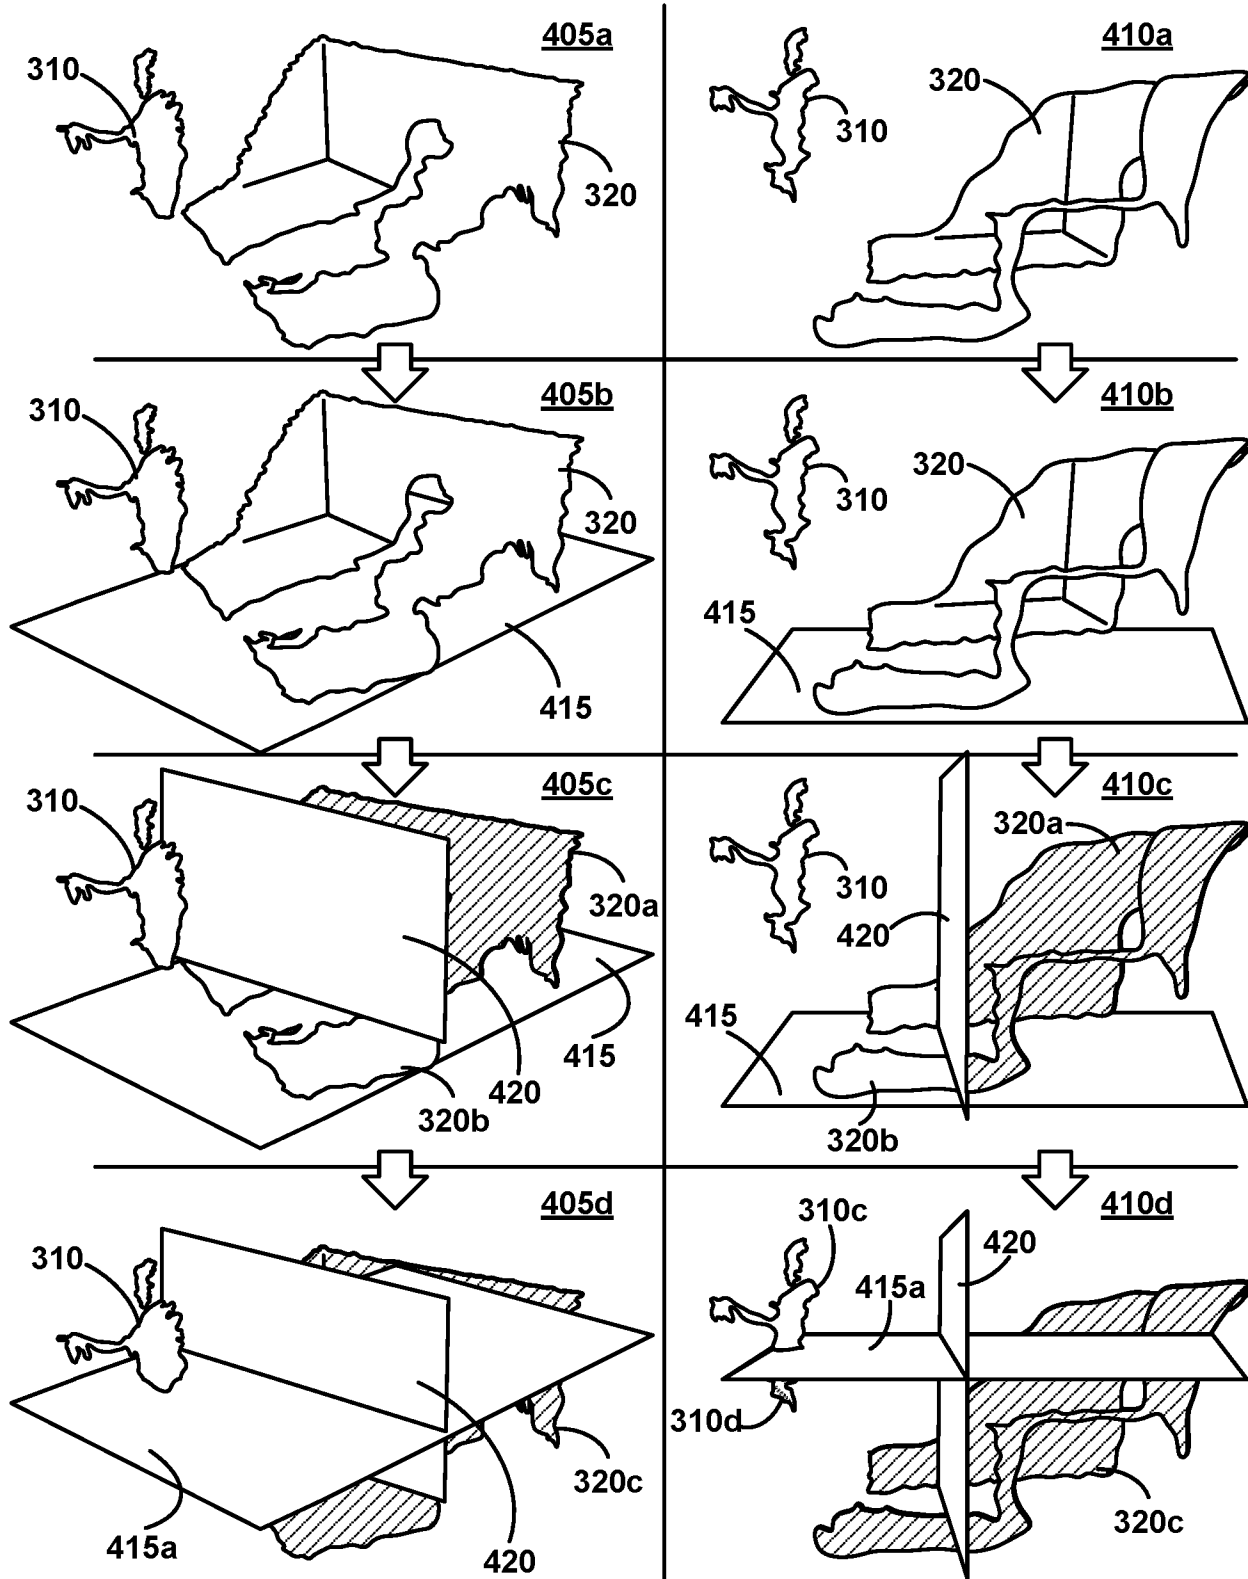


FIG. 4

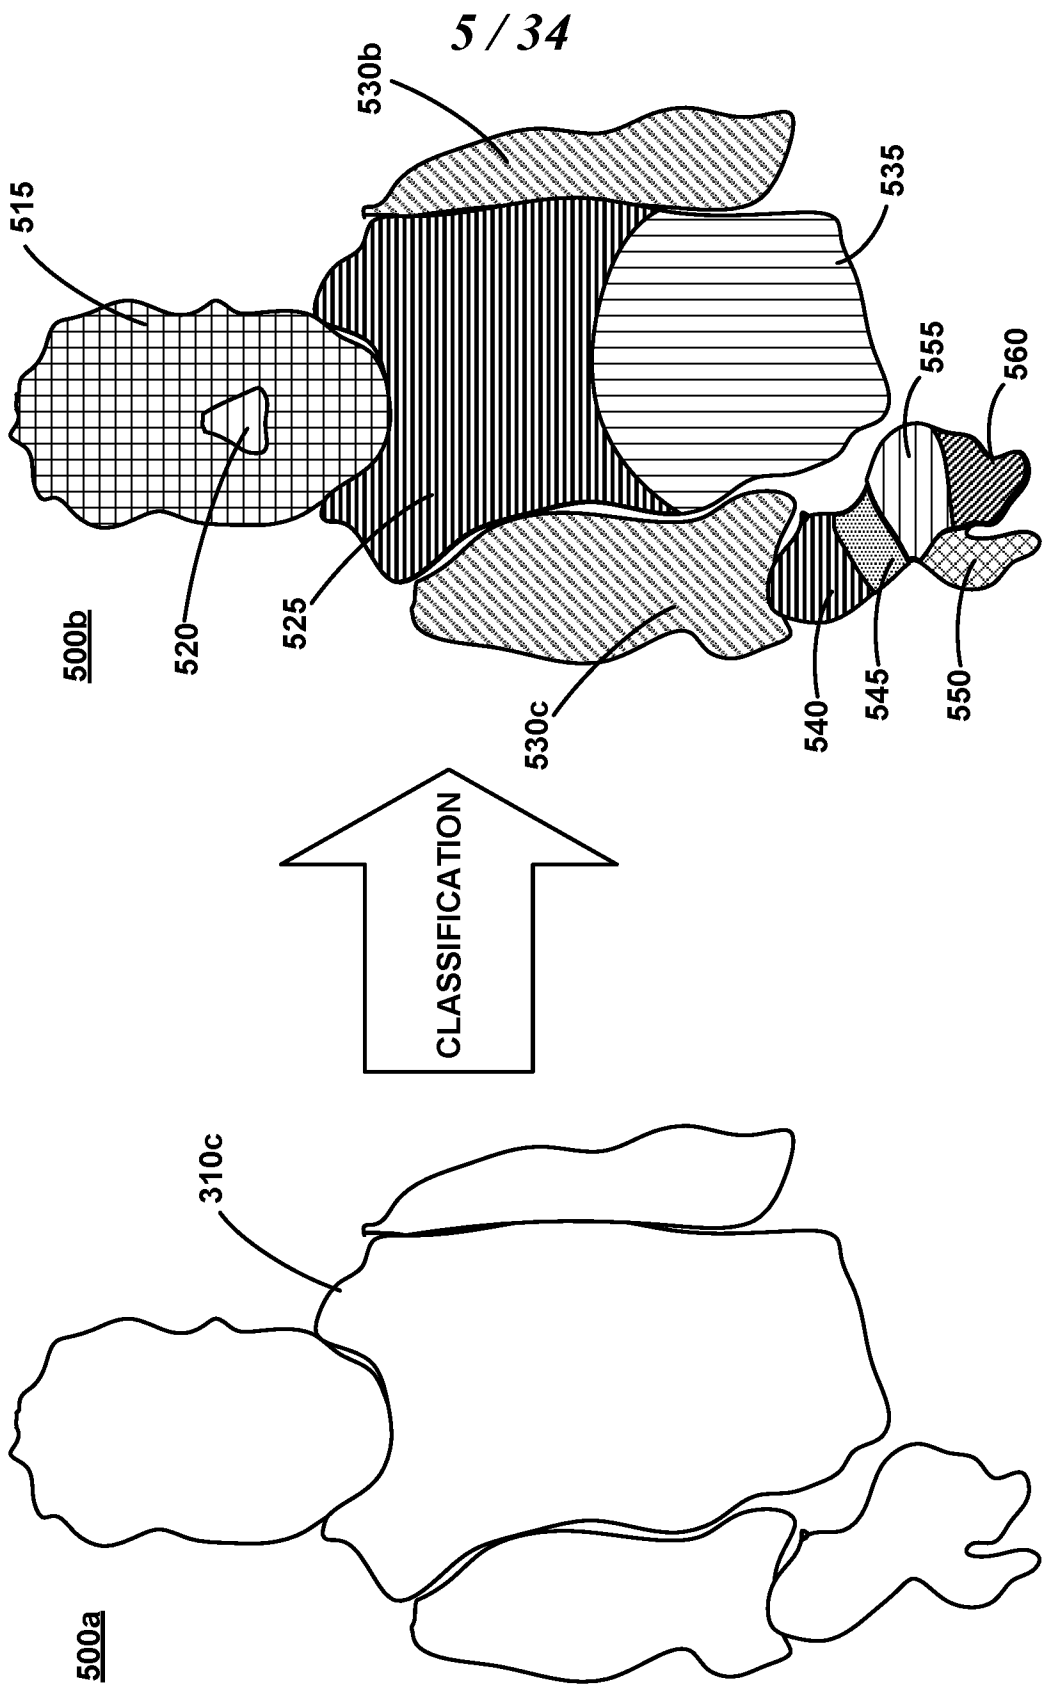
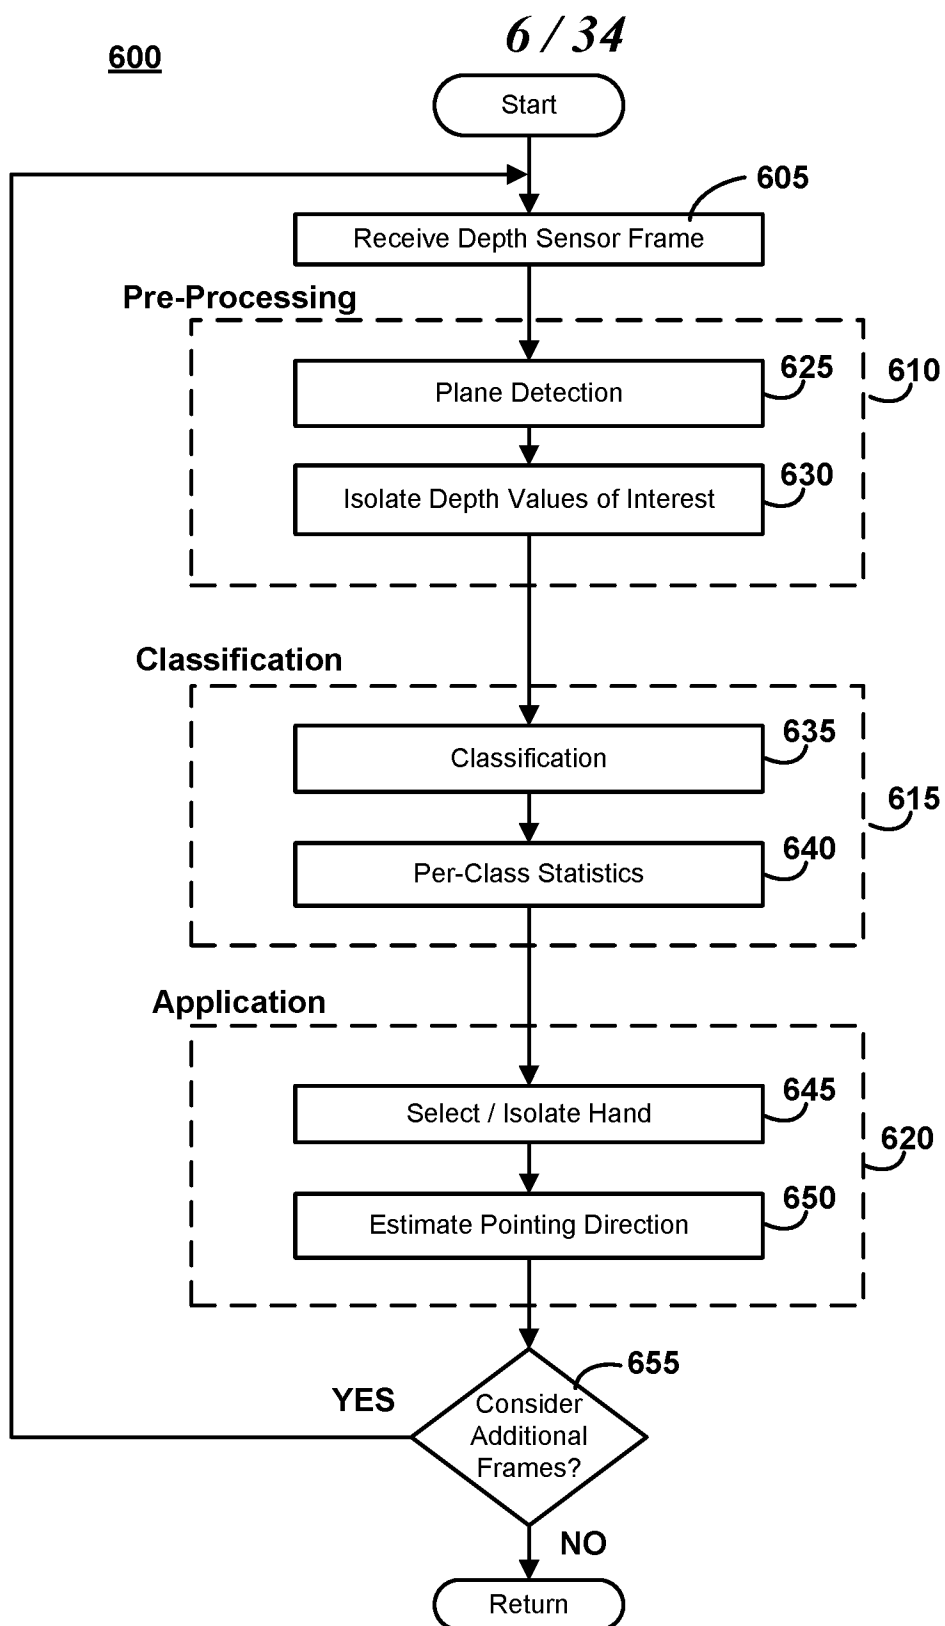


FIG. 5



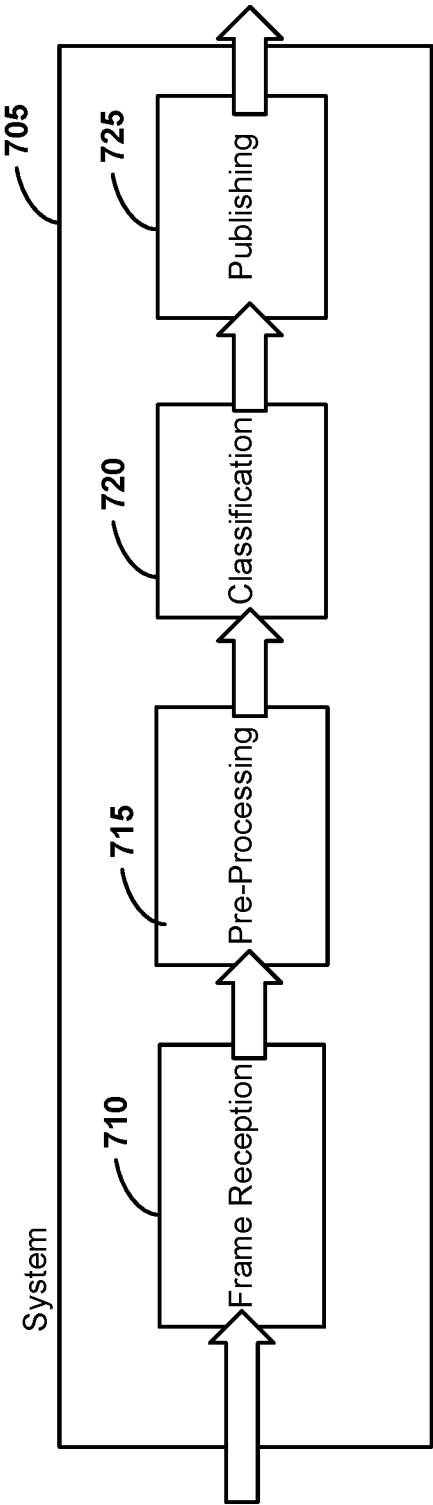


FIG. 7

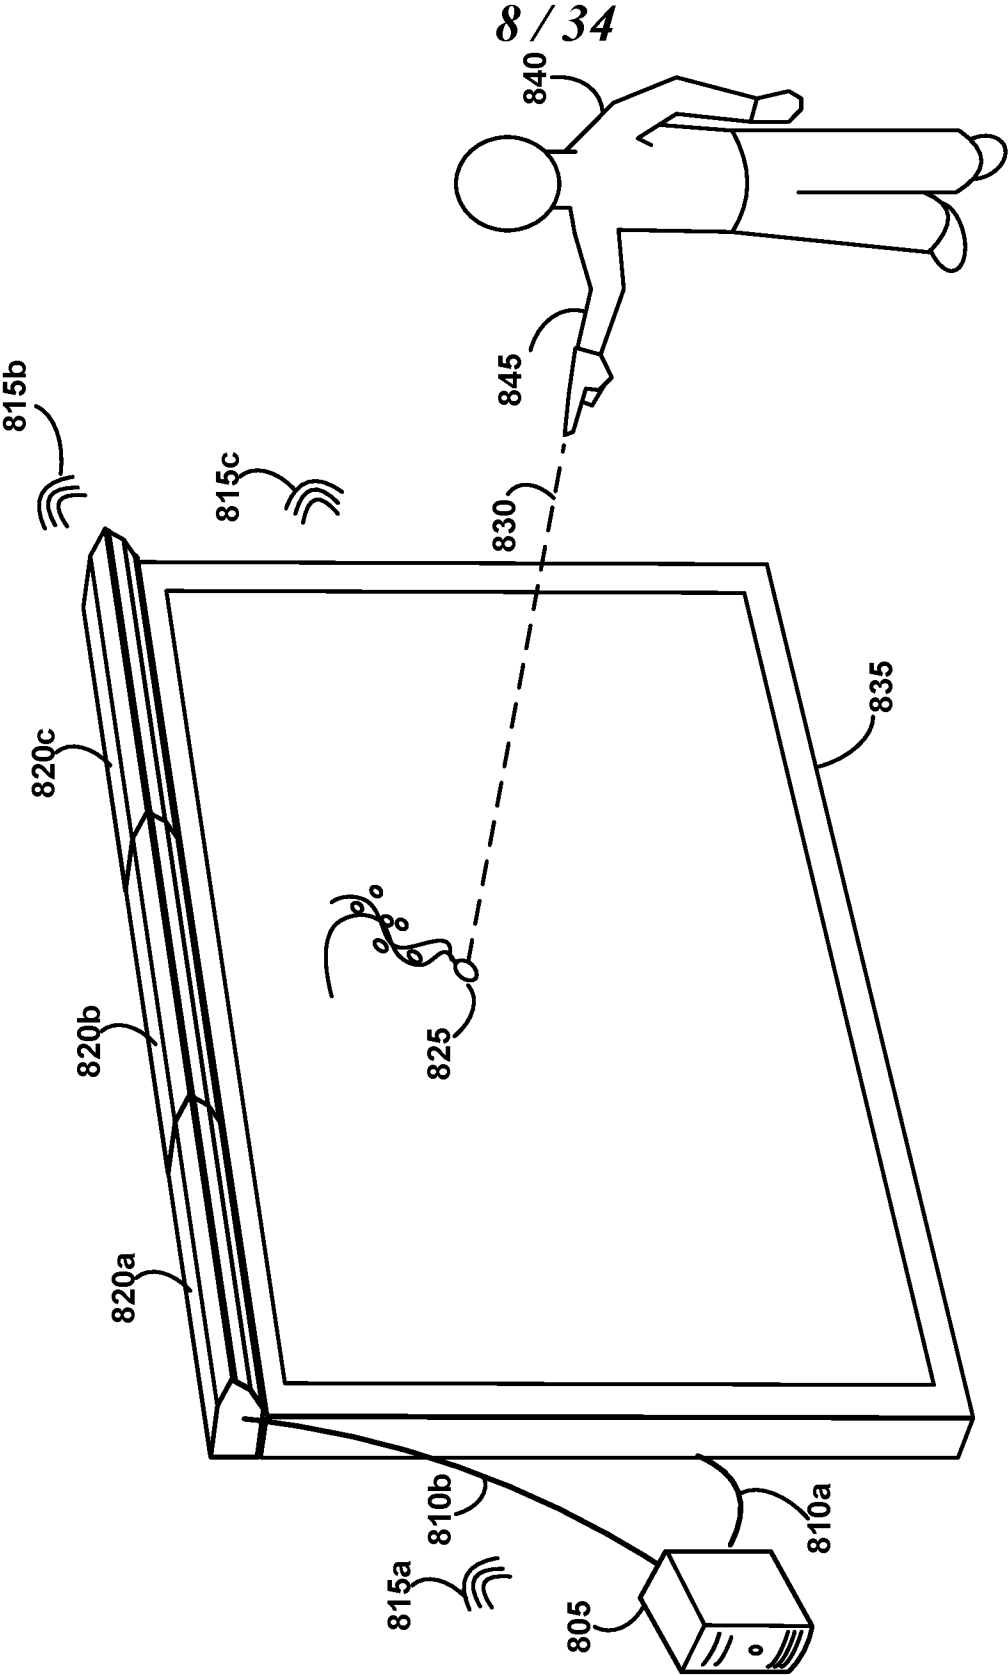
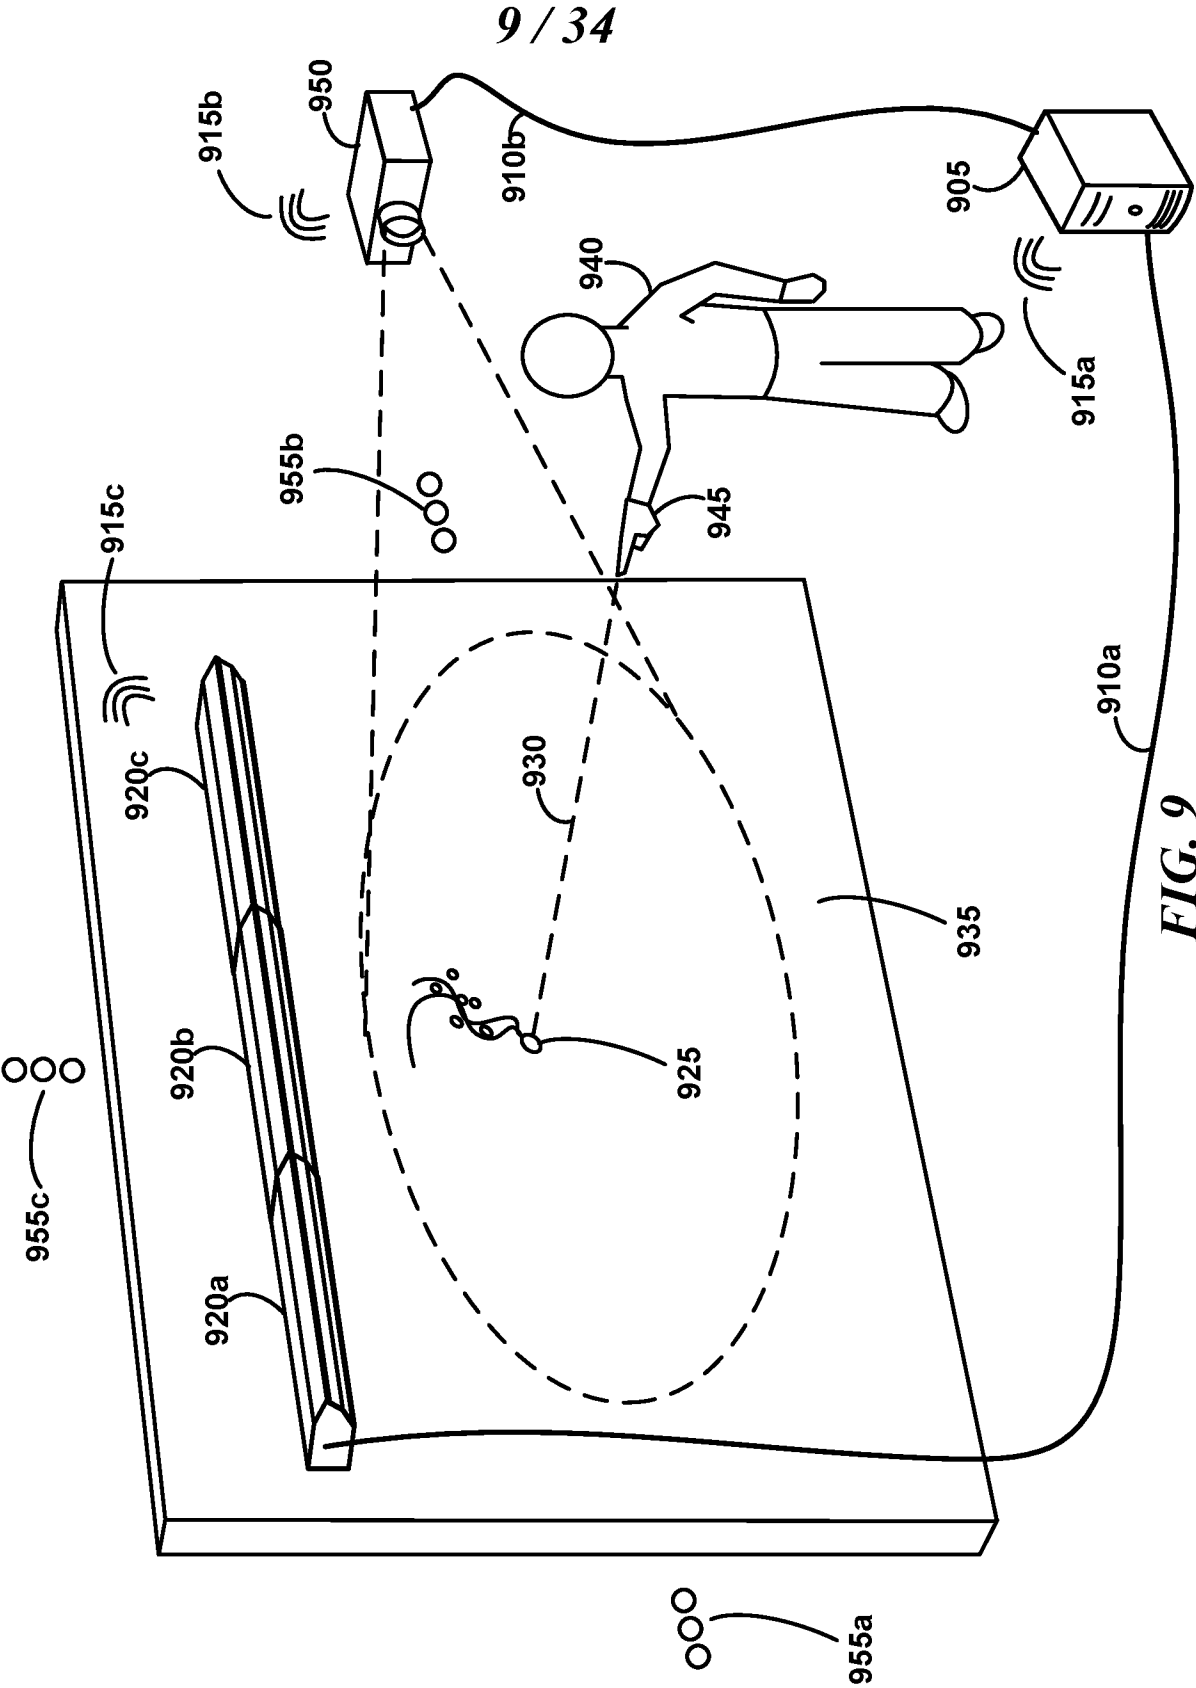


FIG. 8



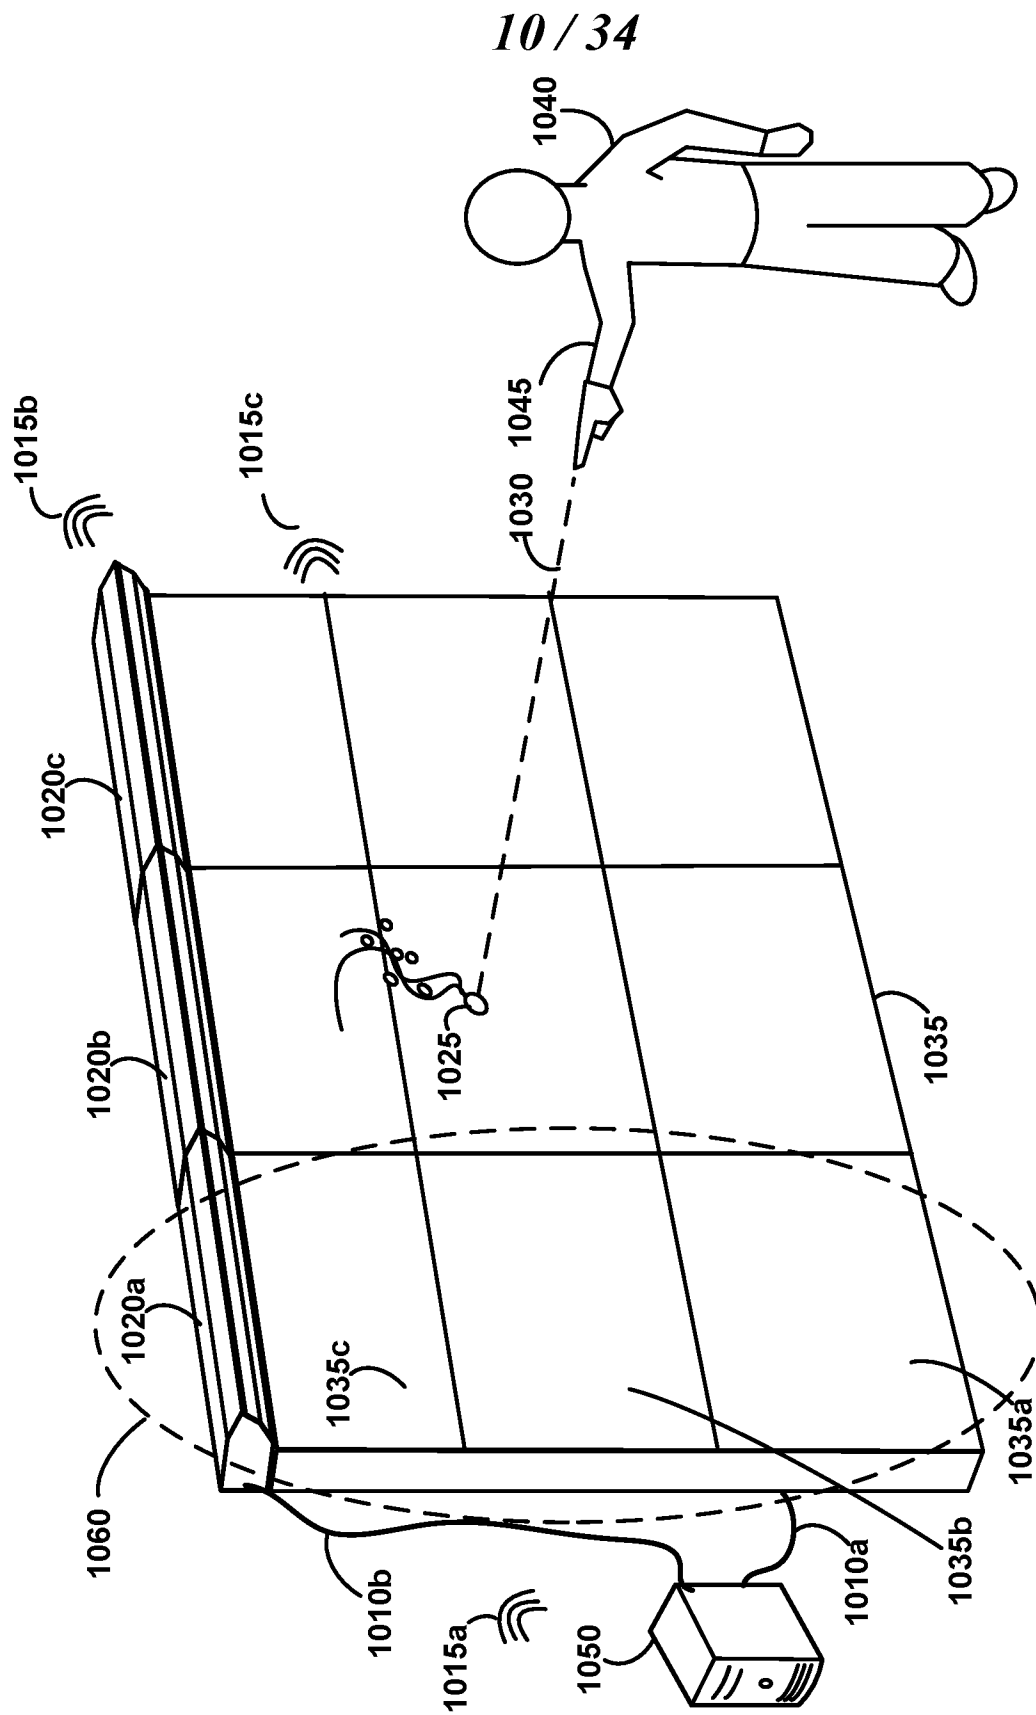
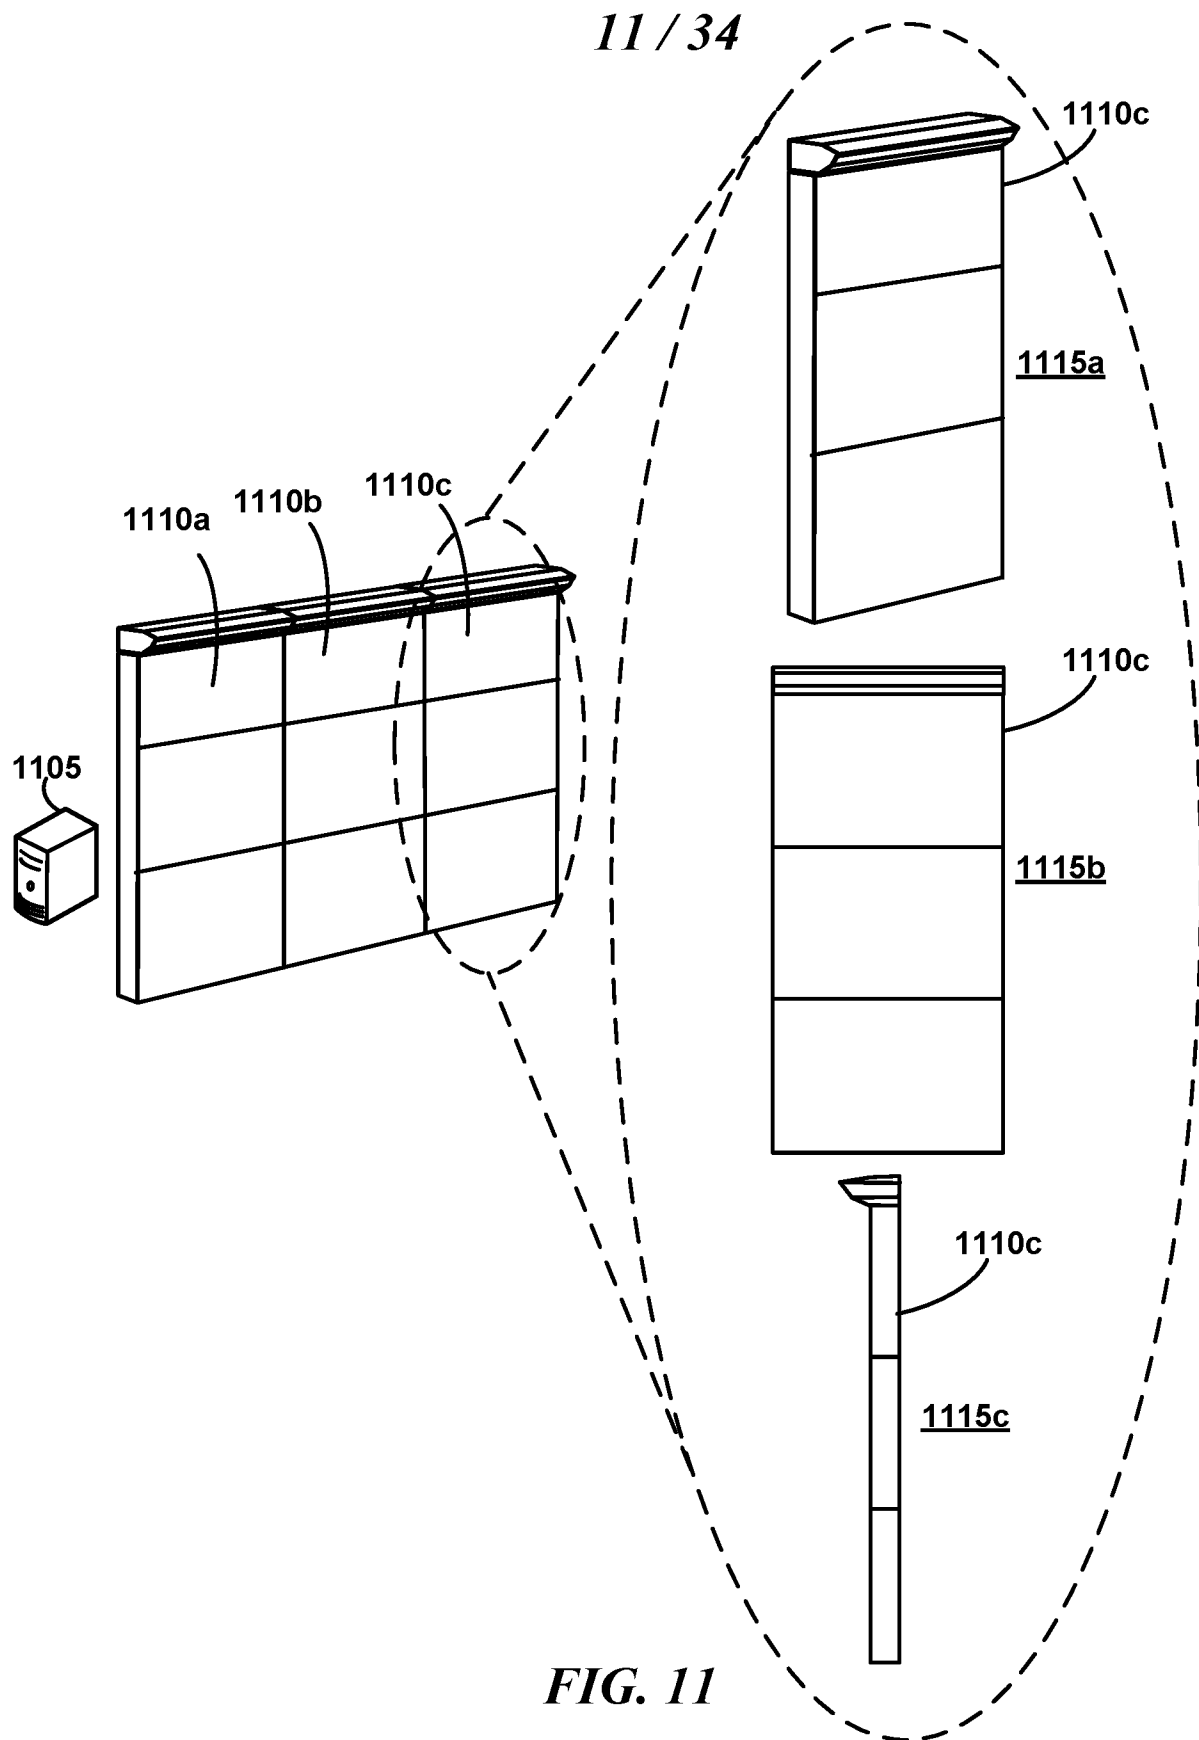
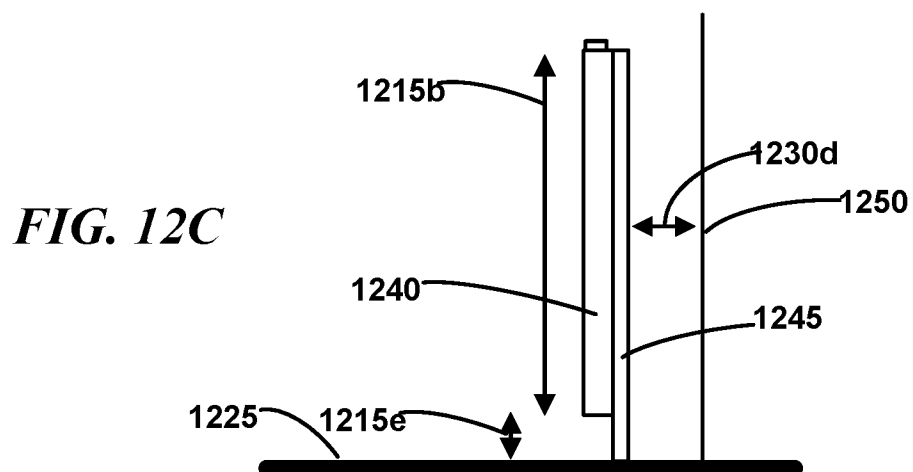
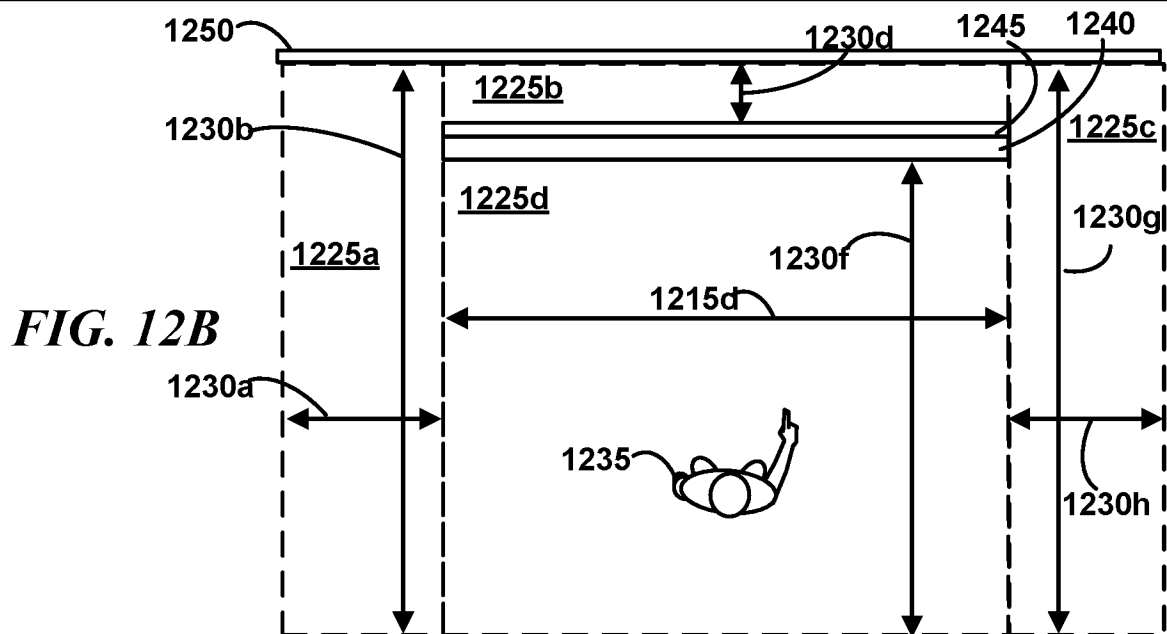
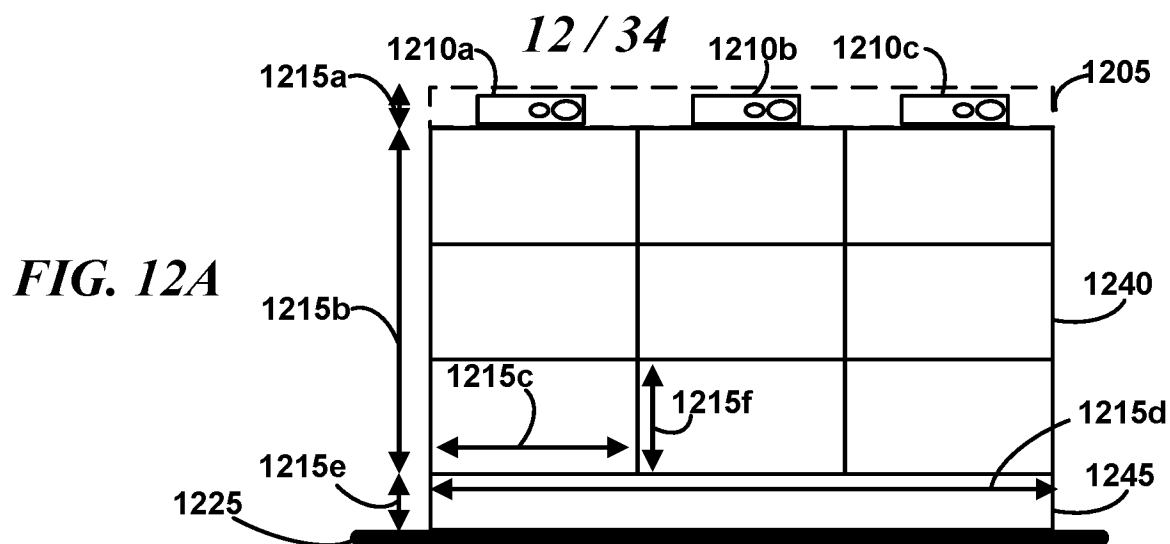


FIG. 10





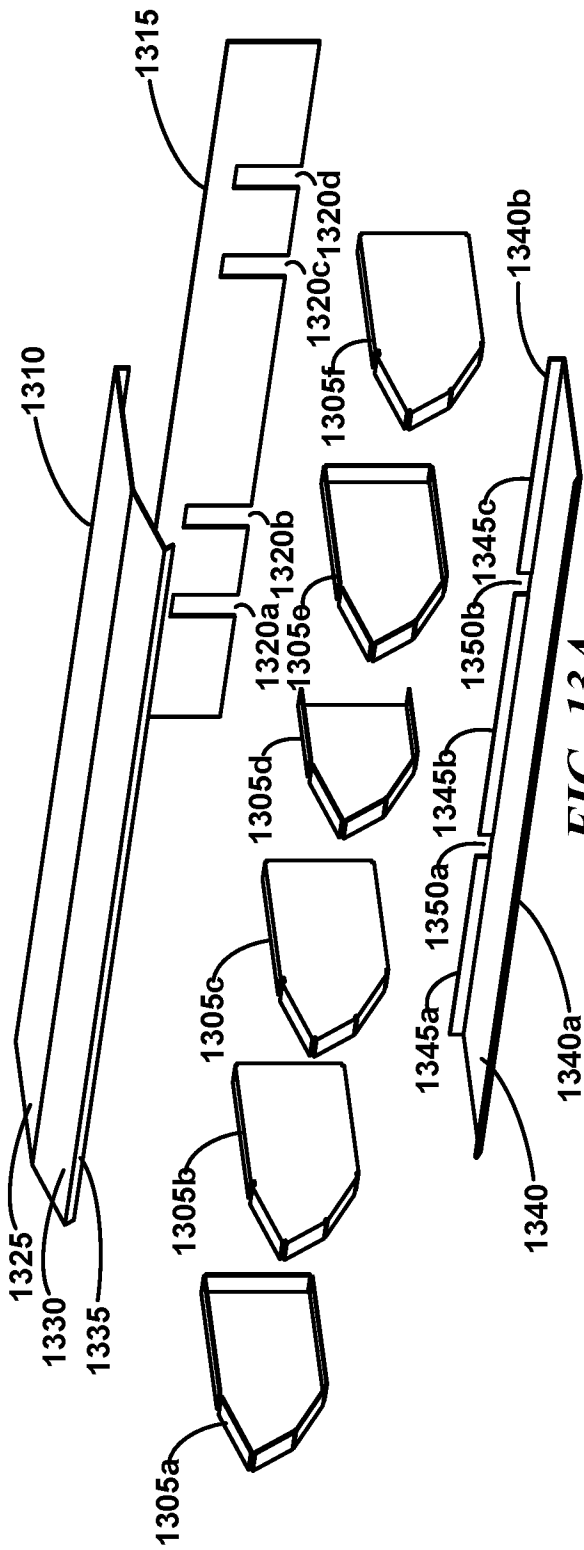


FIG. 13A



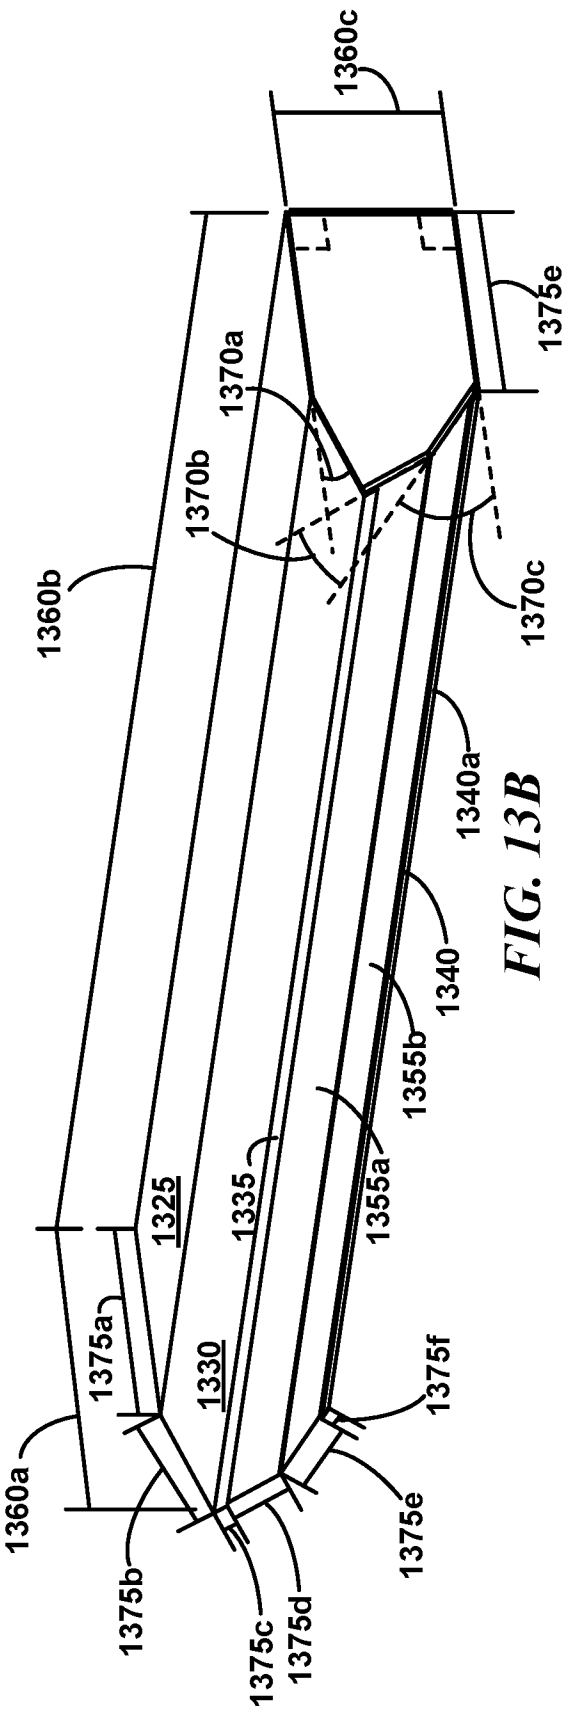


FIG. 13B

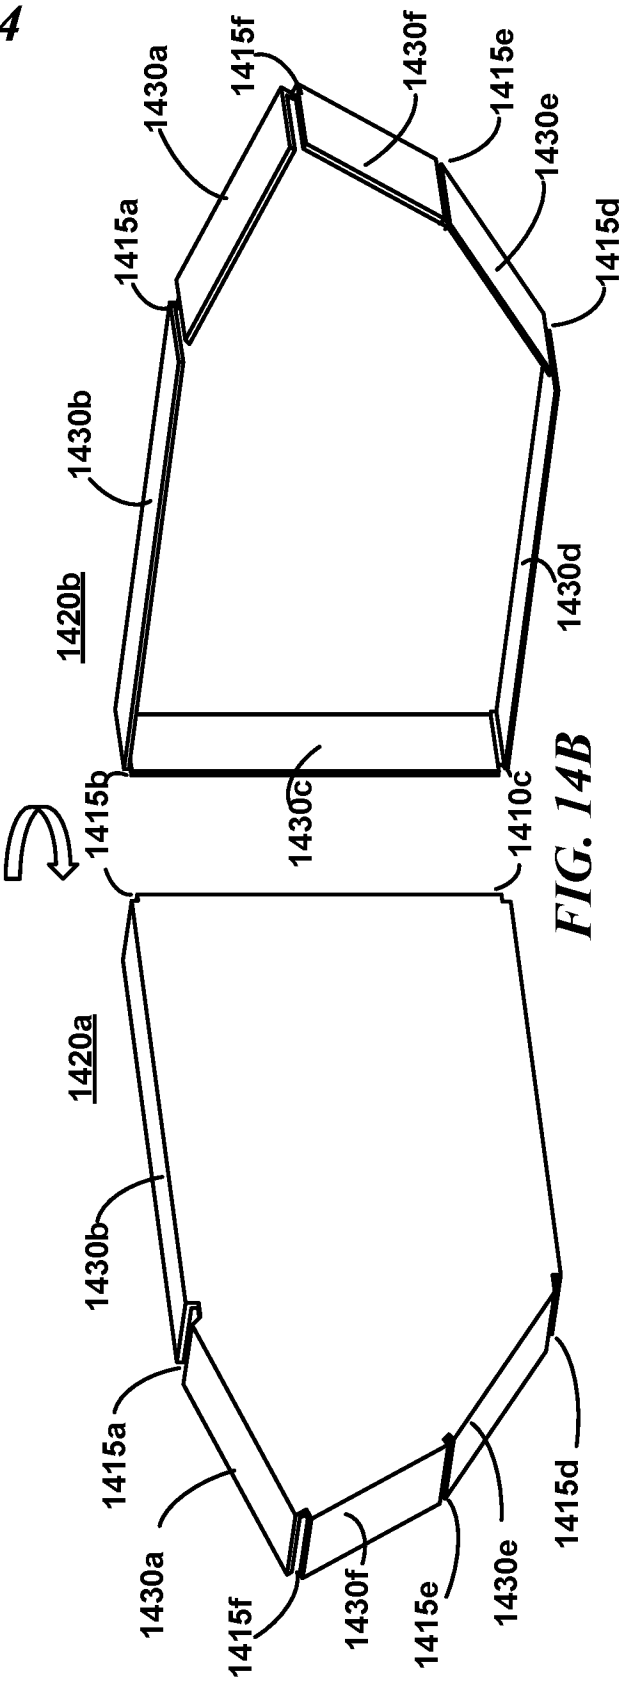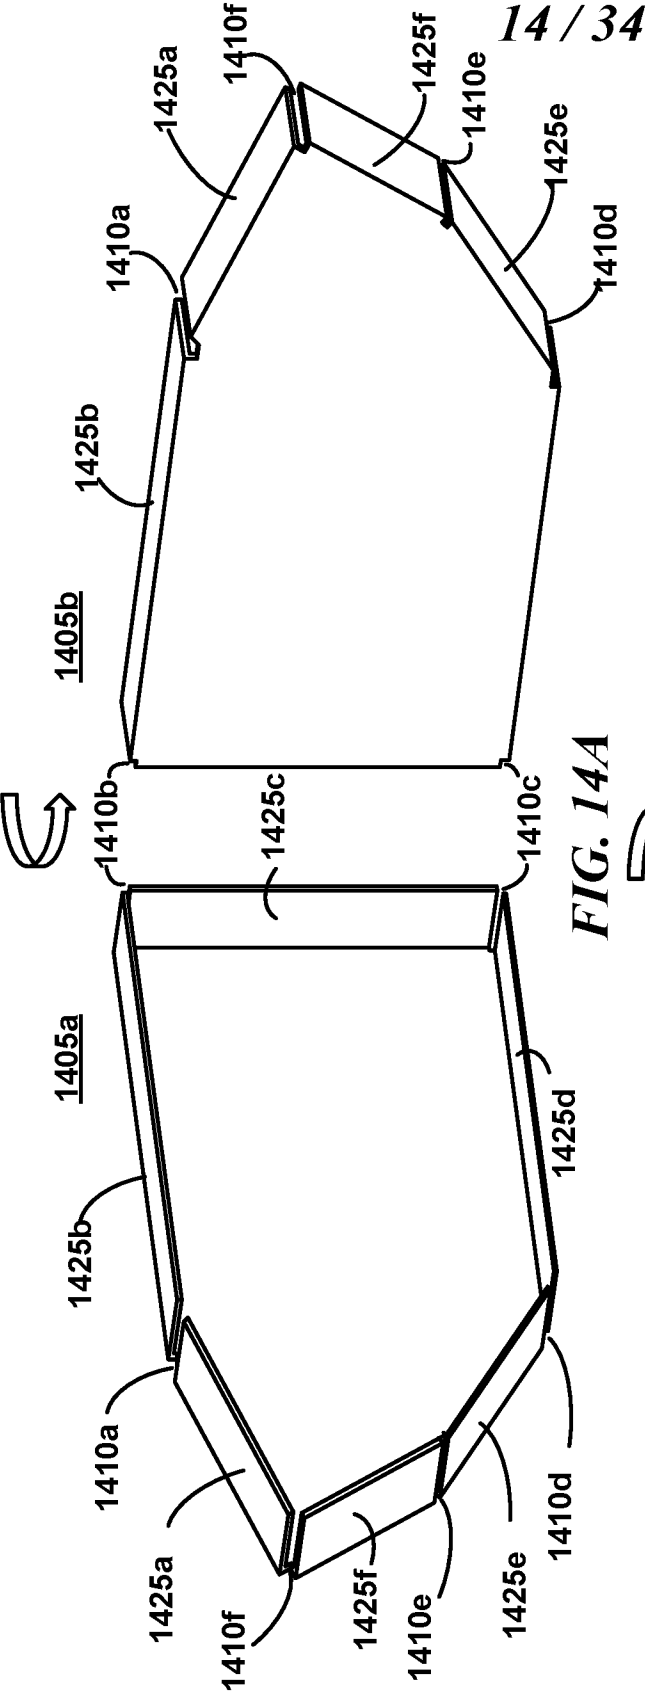

15 / 34

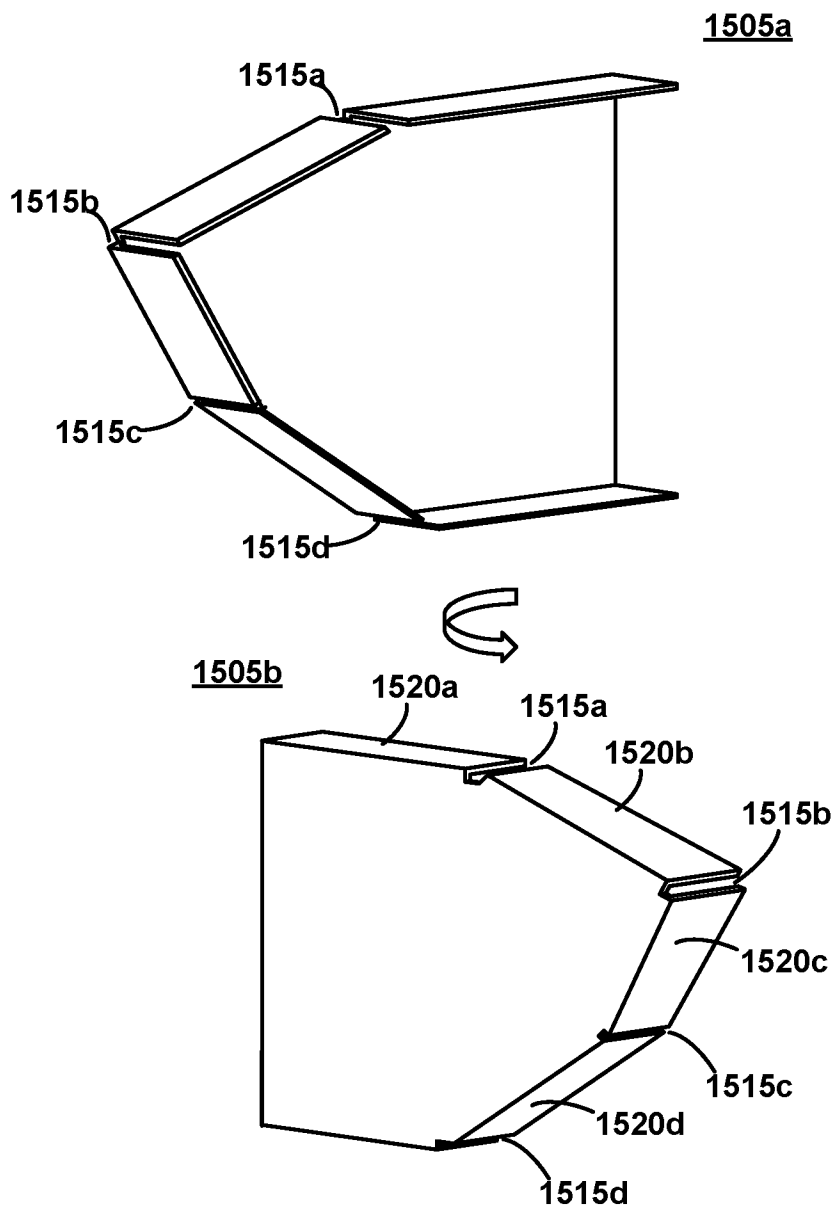


FIG. 15



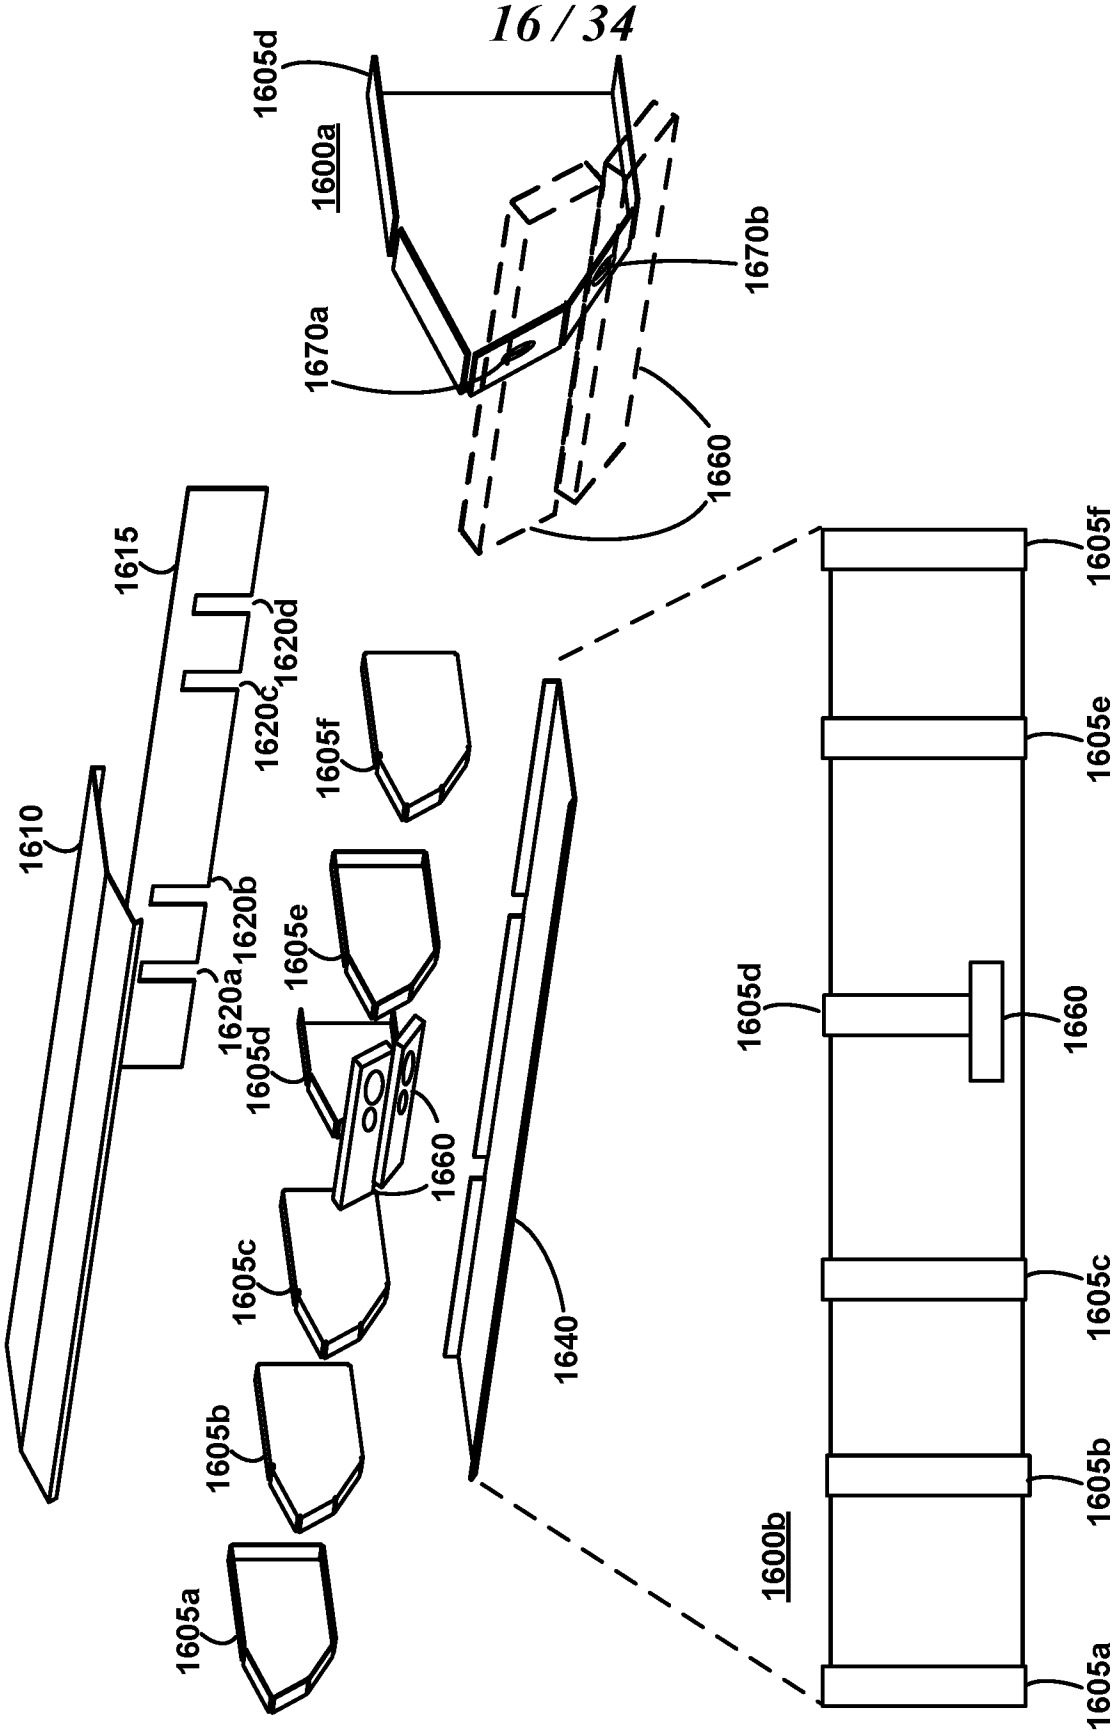


FIG. 16

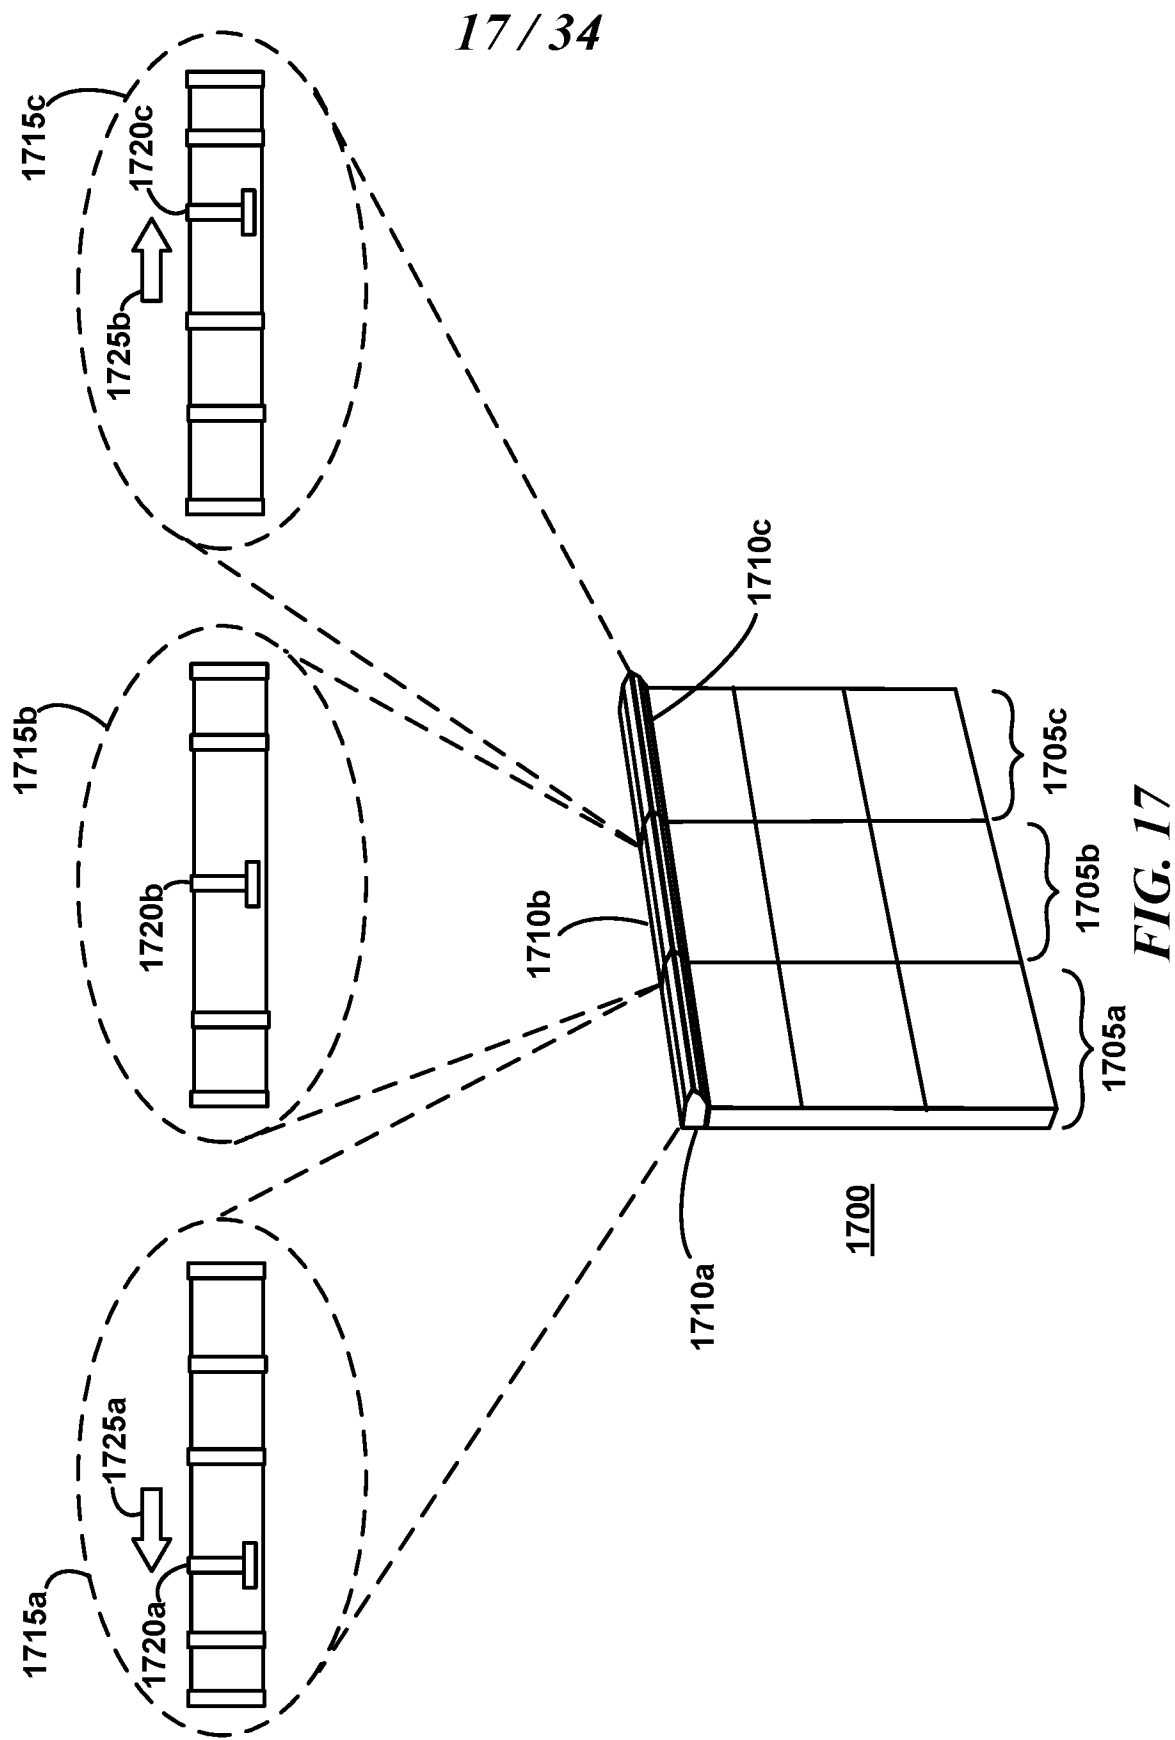

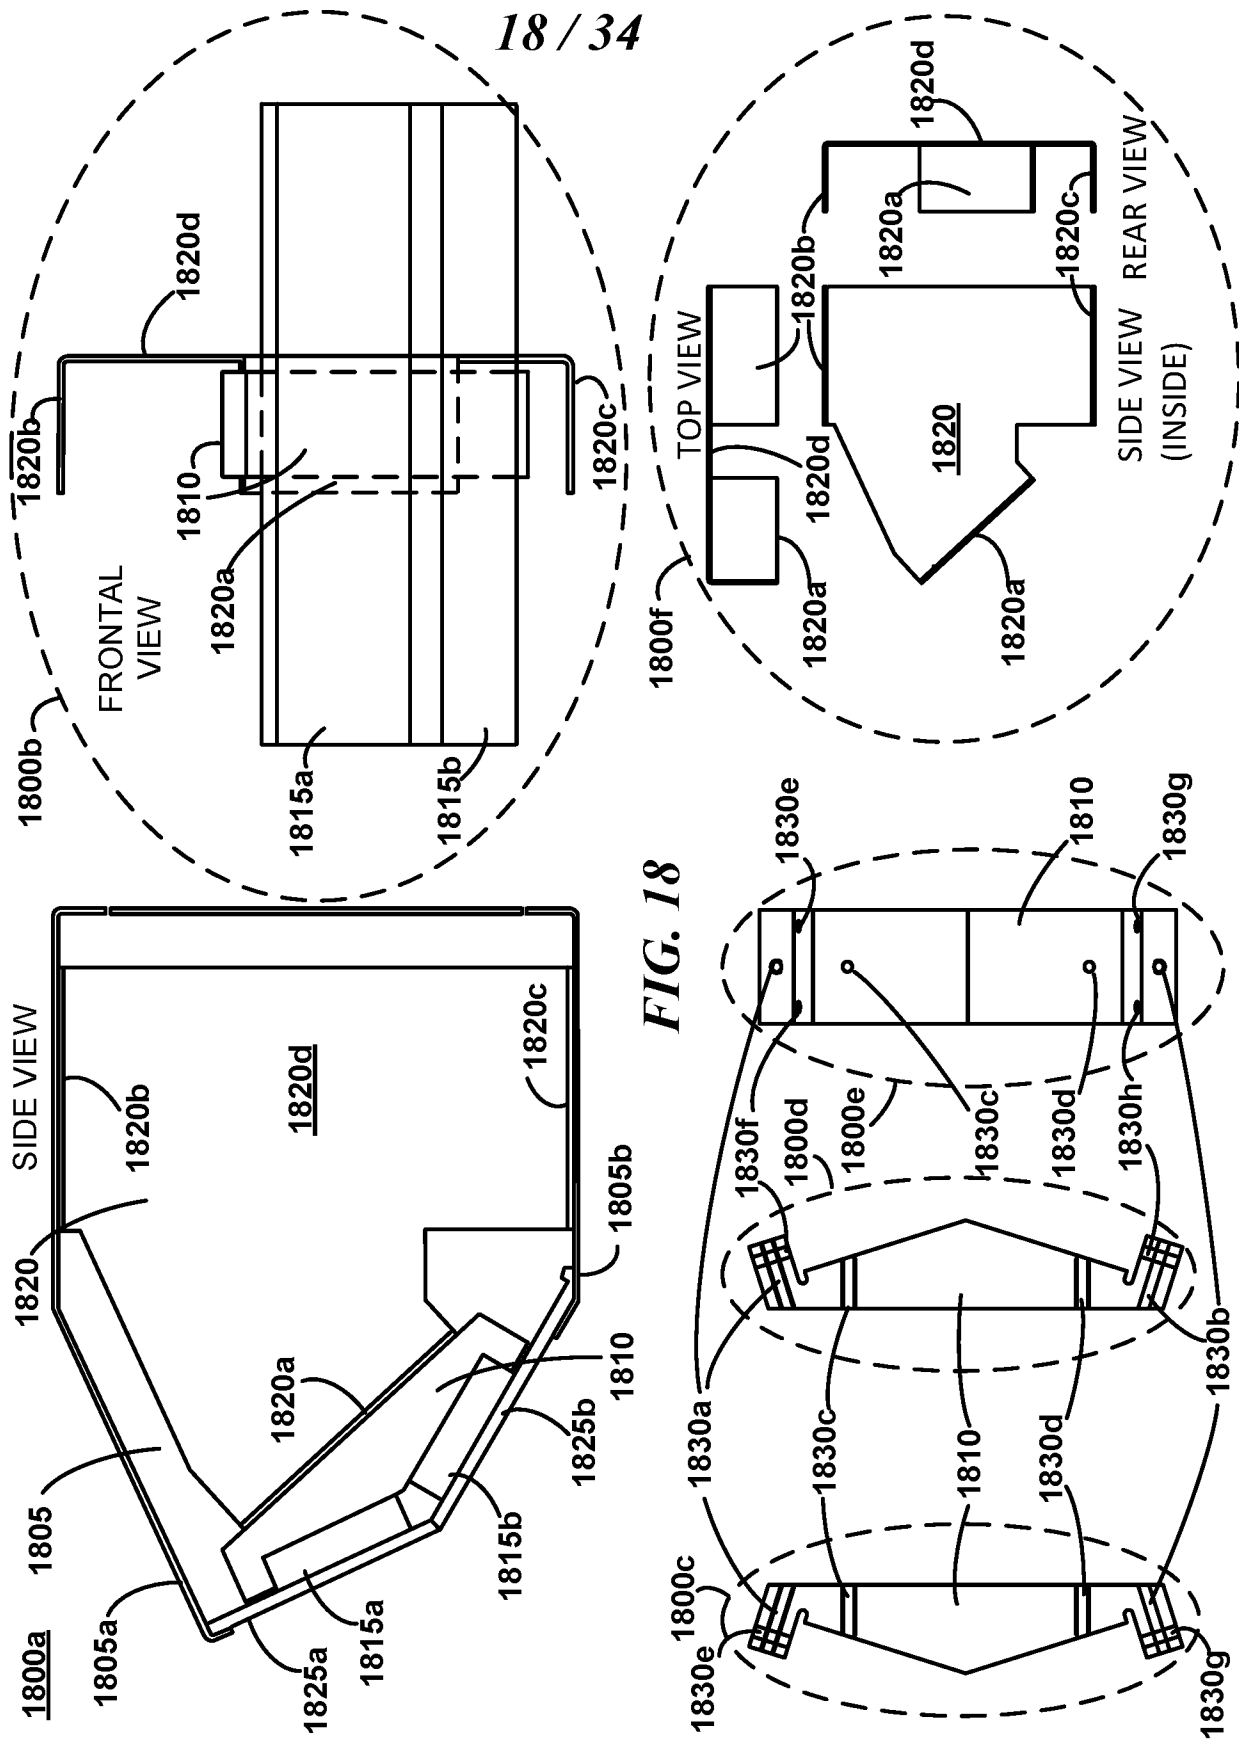

19 / 34

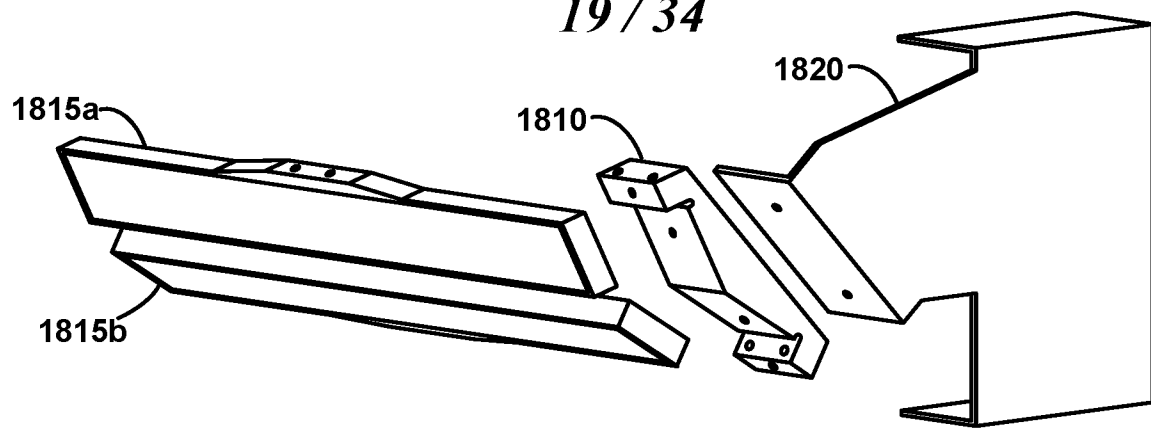


FIG. 19A

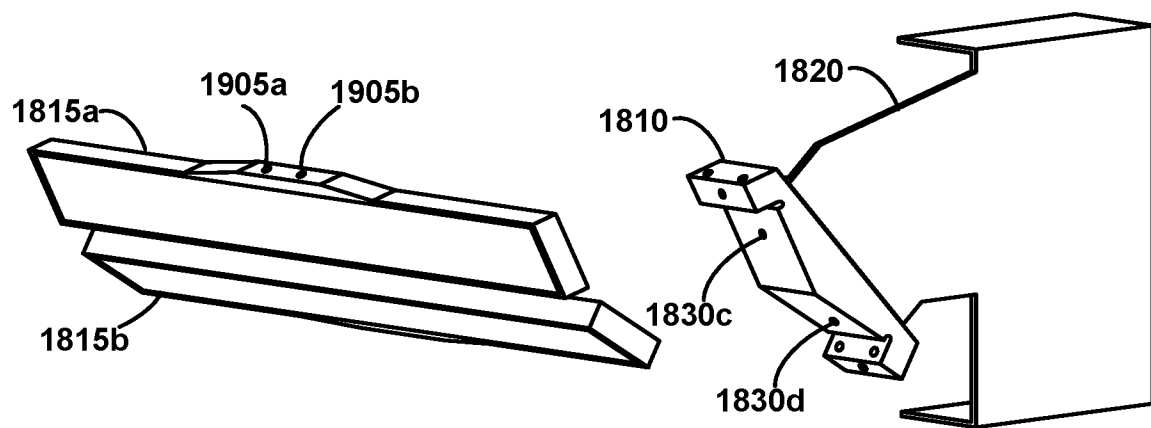


FIG. 19B


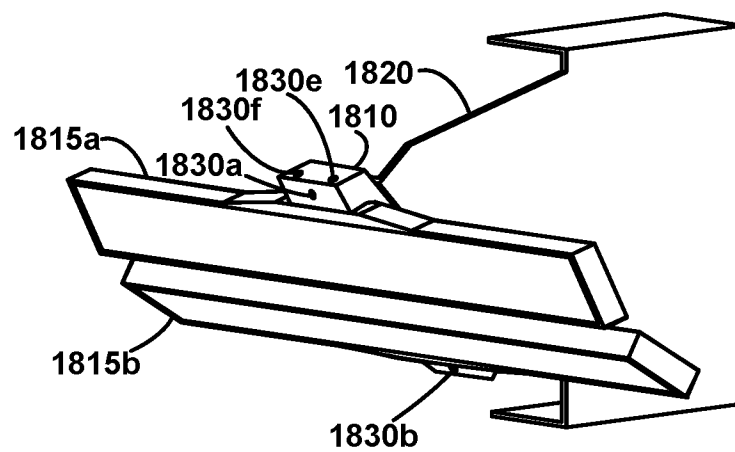


FIG. 19C

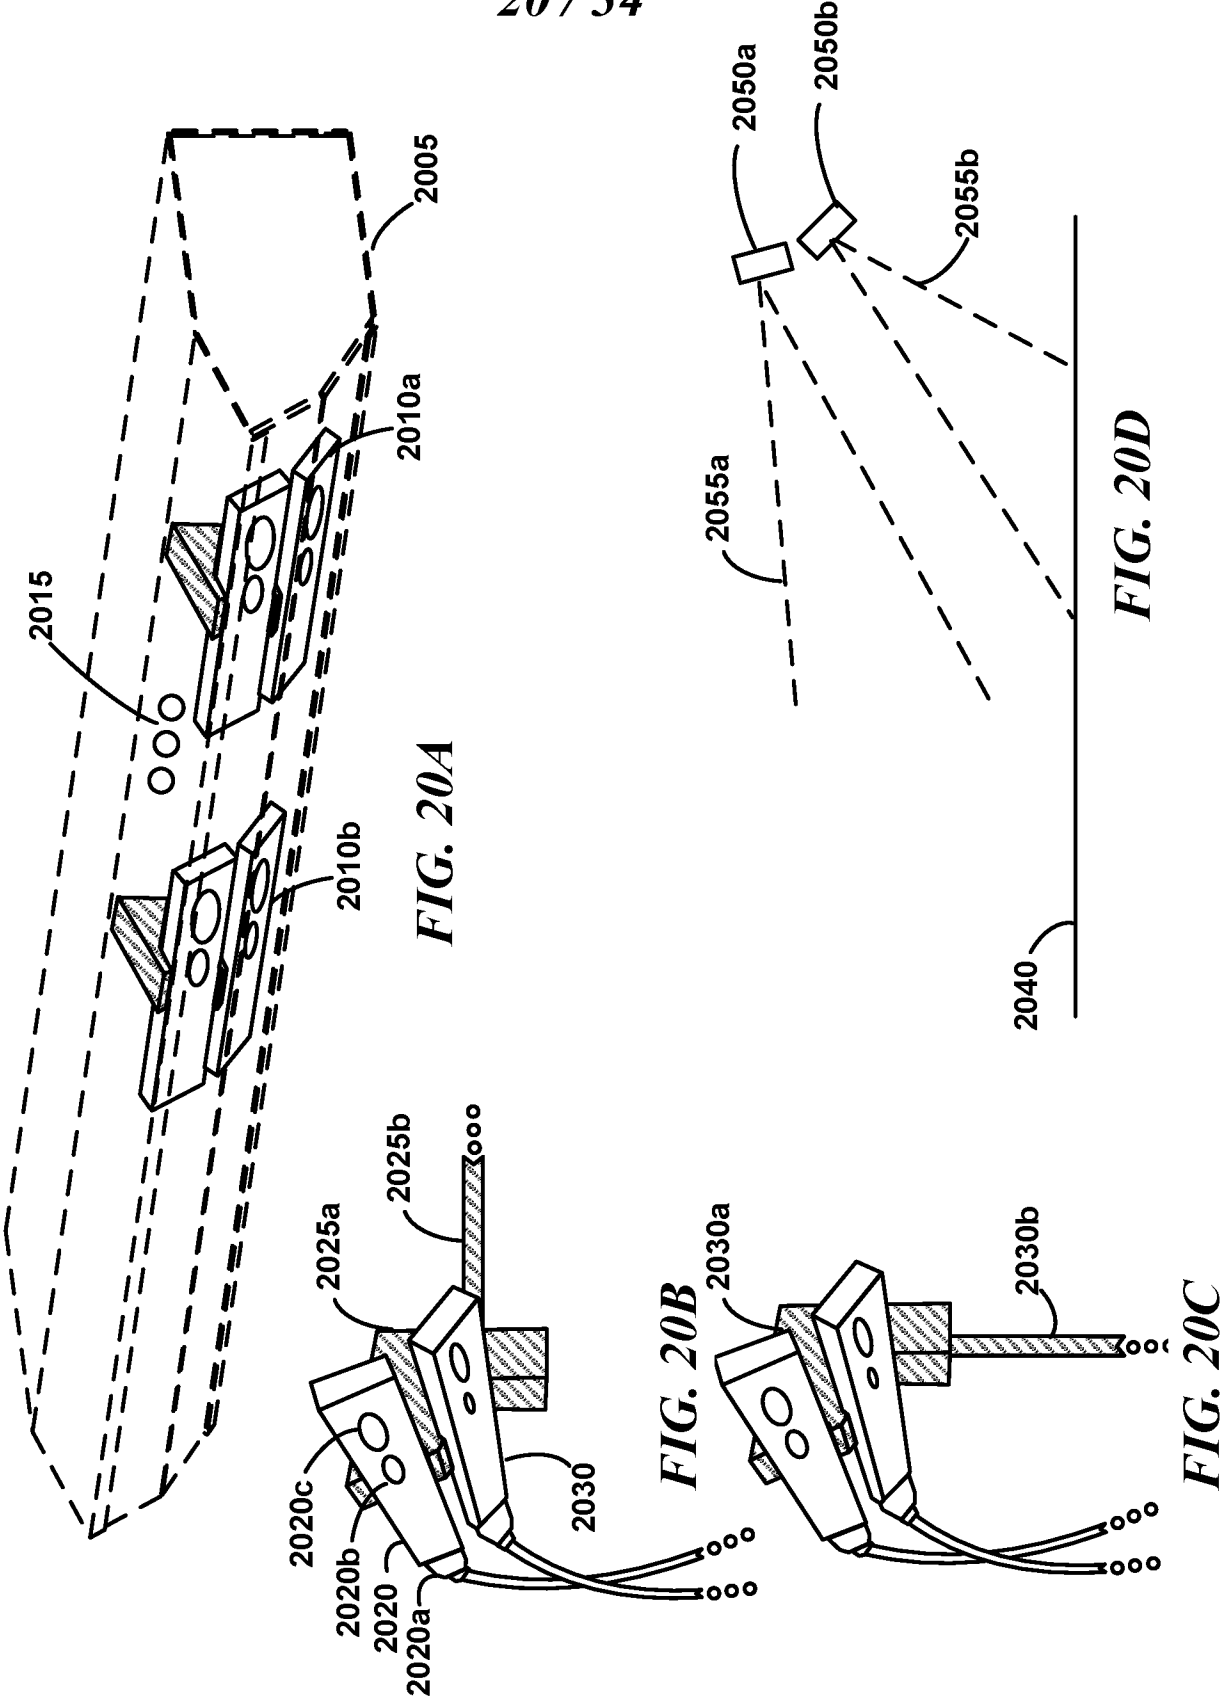

21 / 34

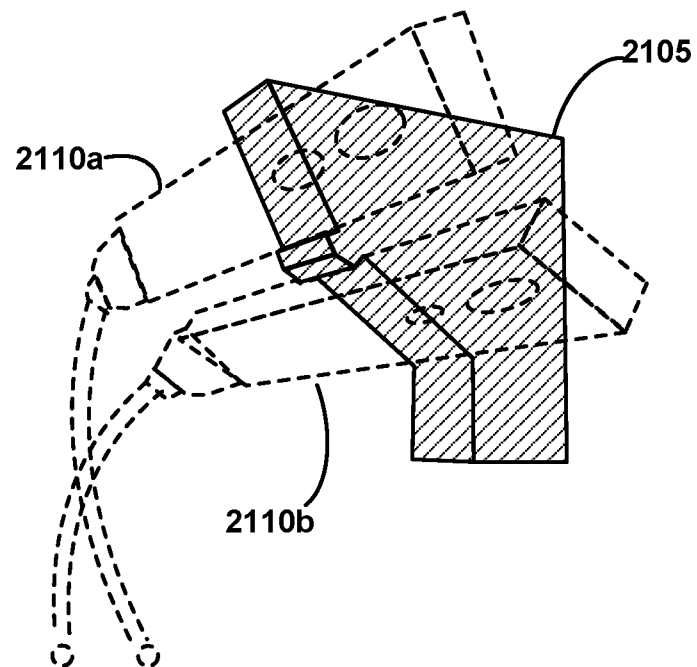


FIG. 21A

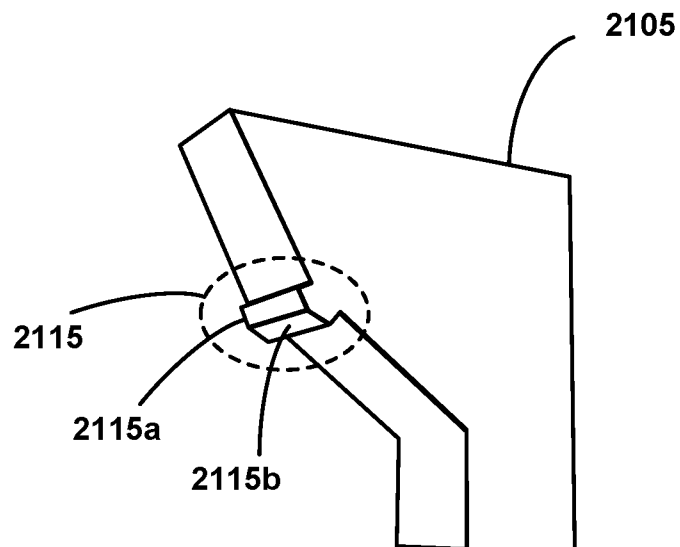
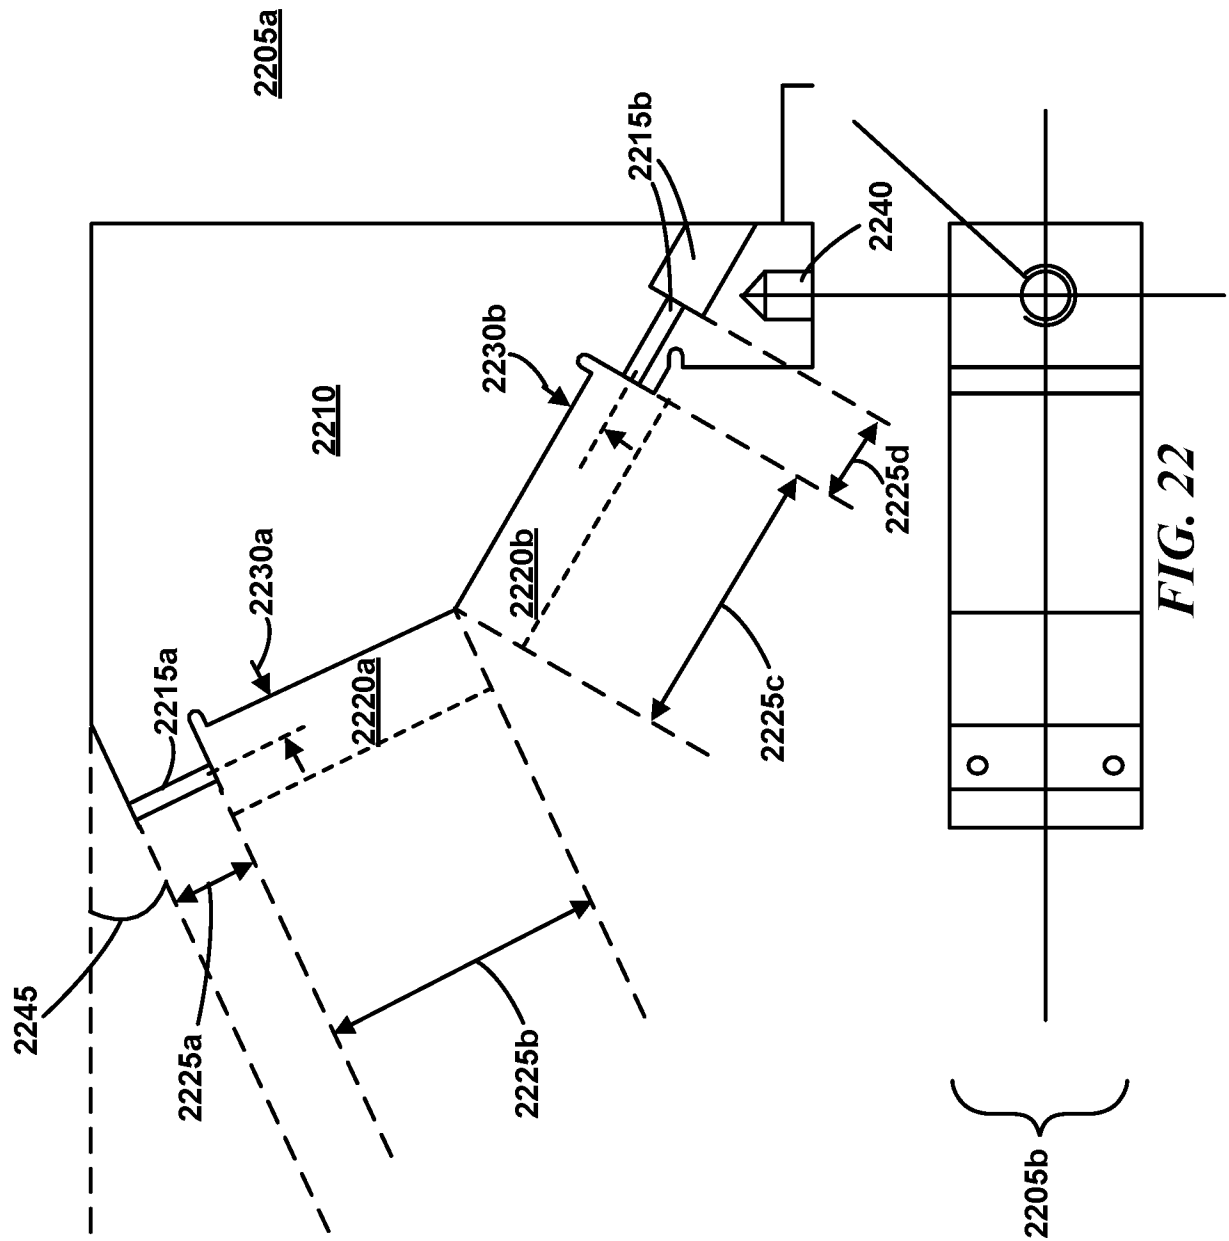


FIG. 21B



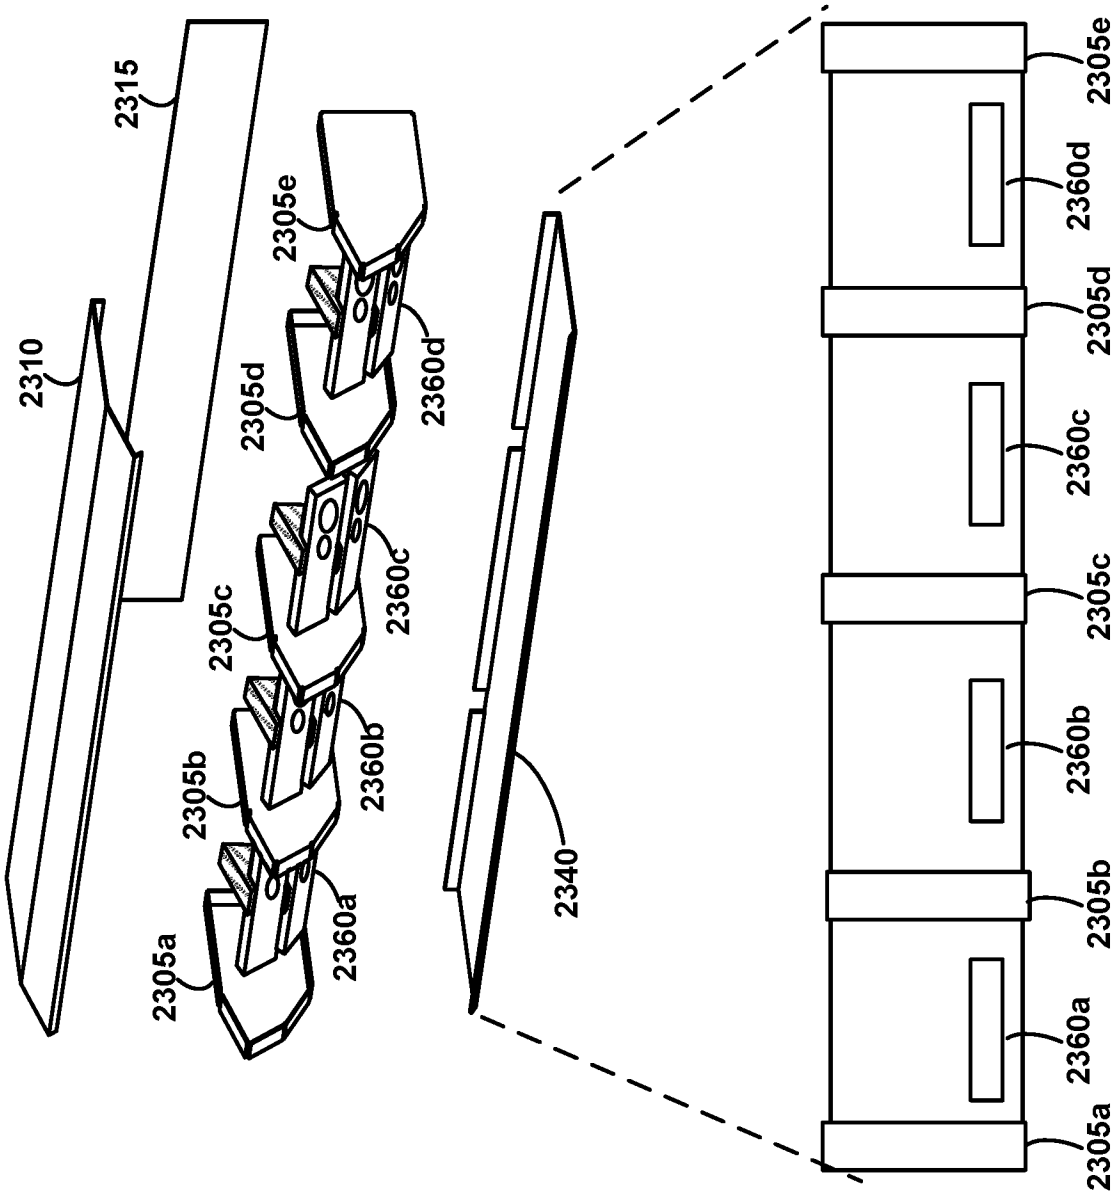


FIG. 23

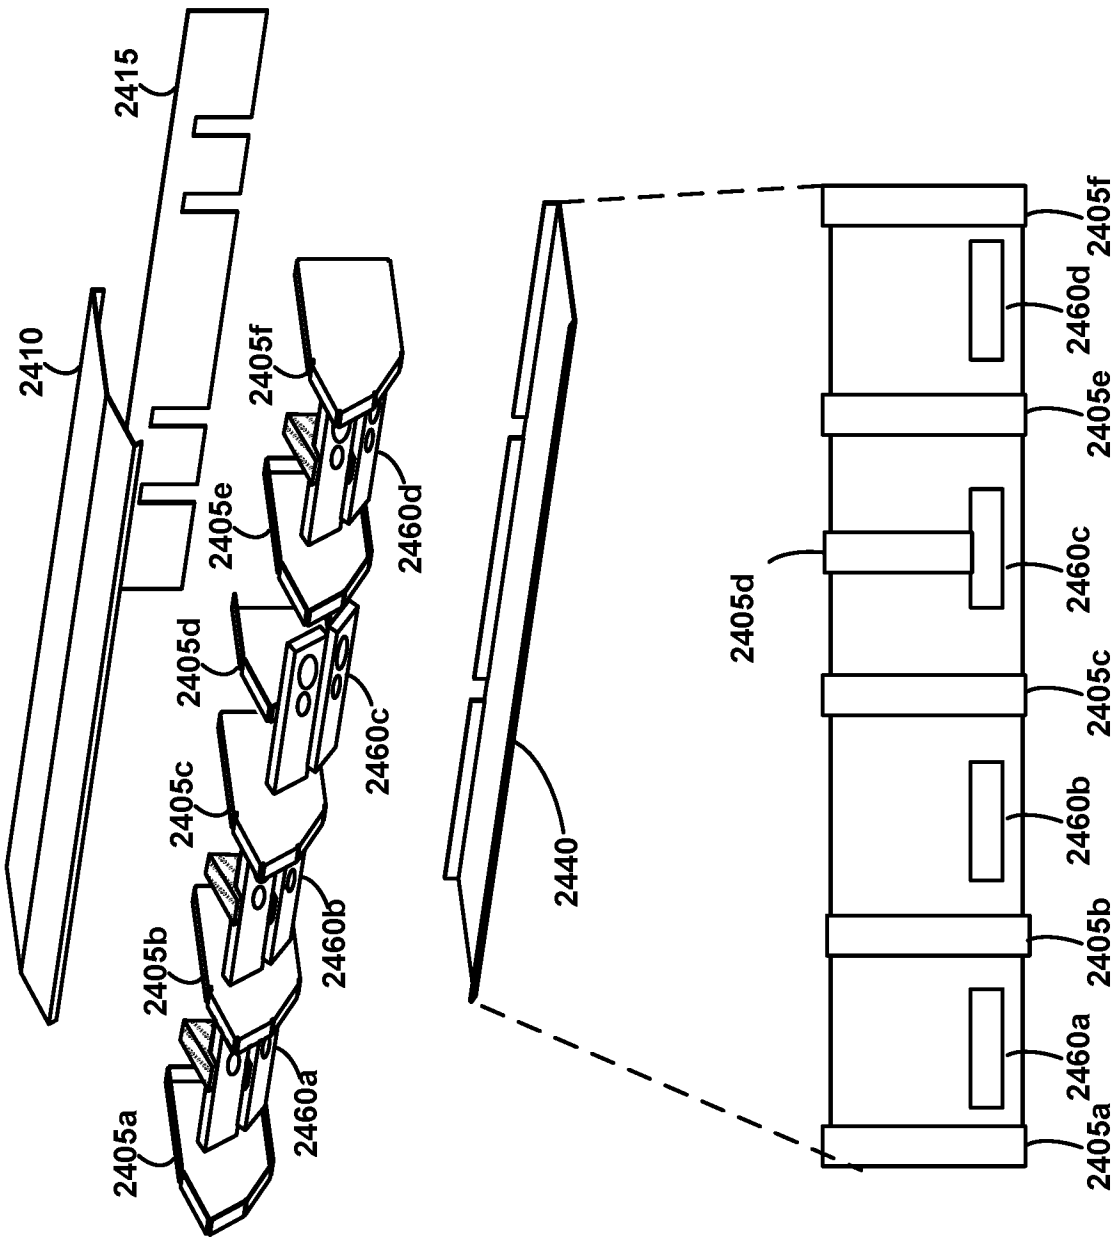


FIG. 24

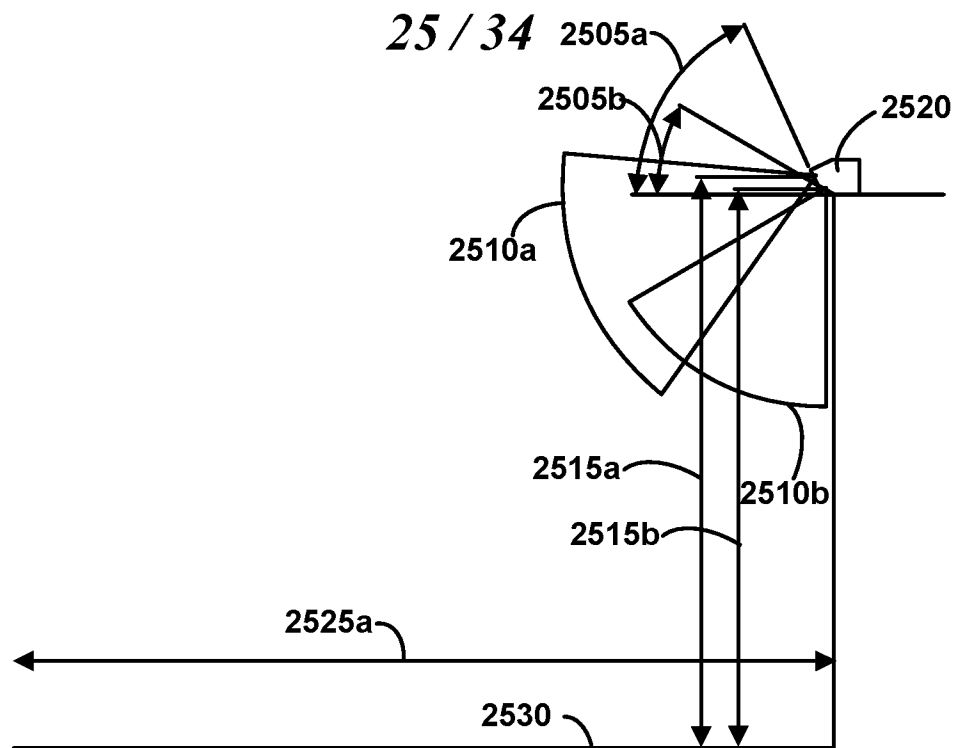


FIG. 25A

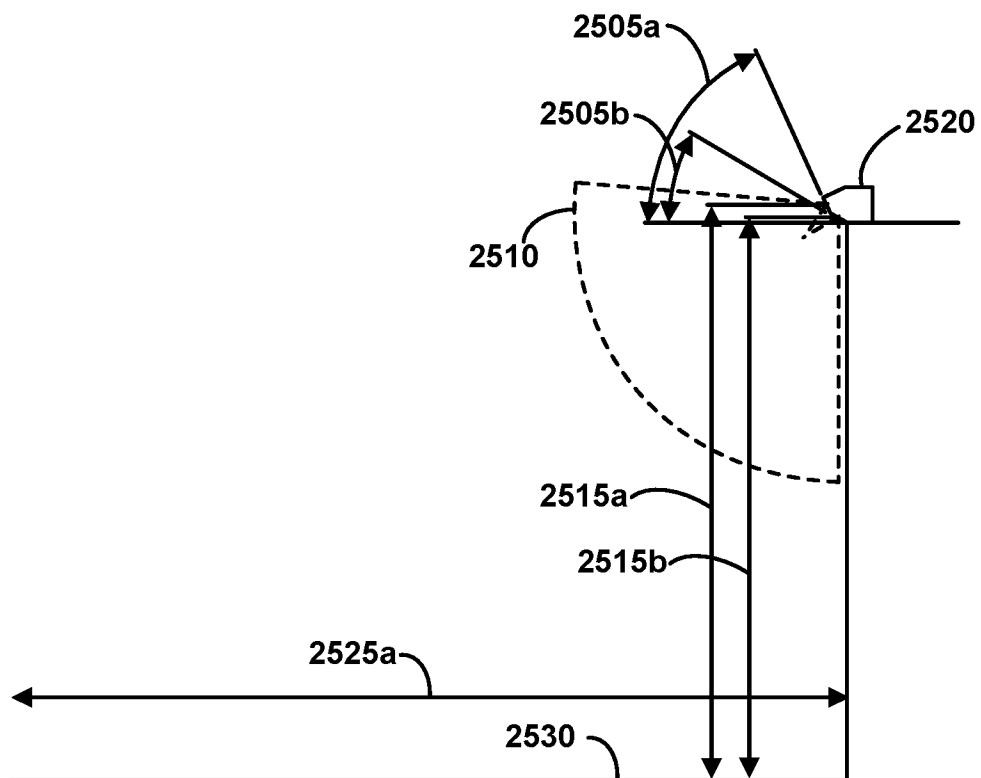


FIG. 25B

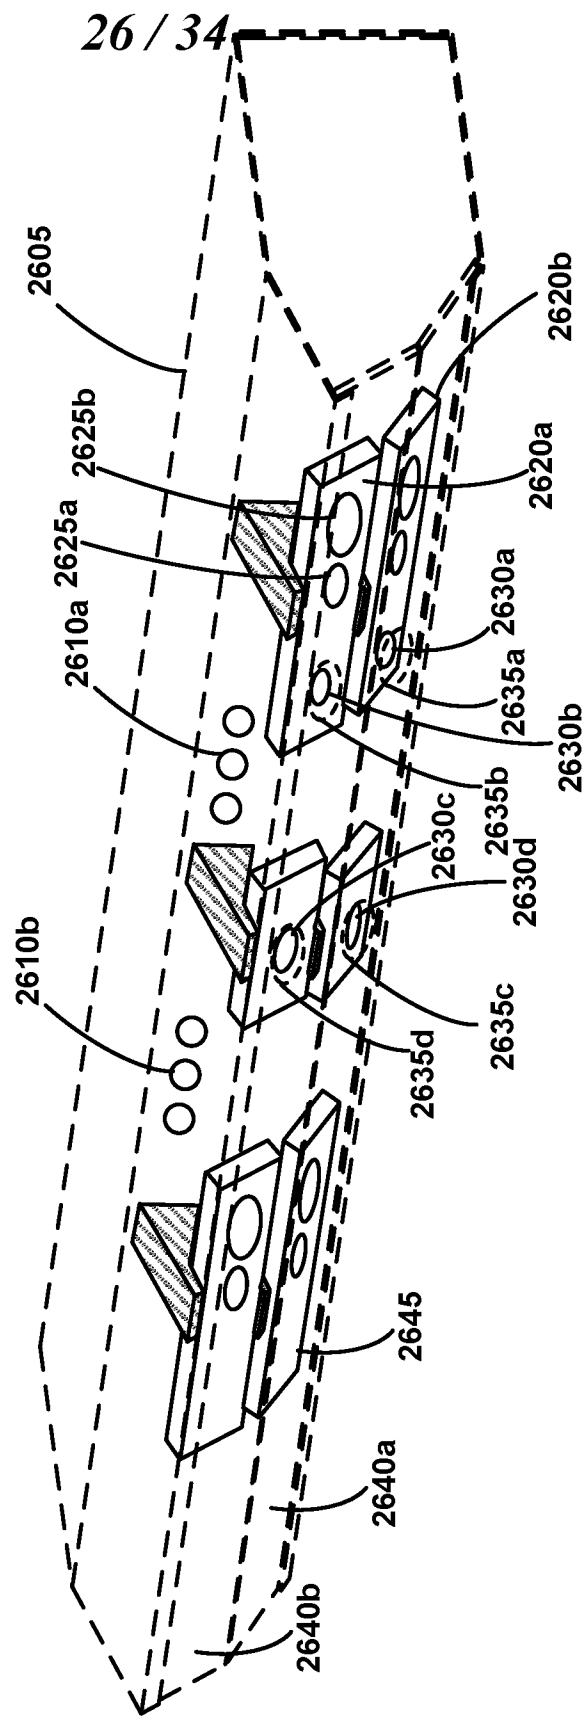
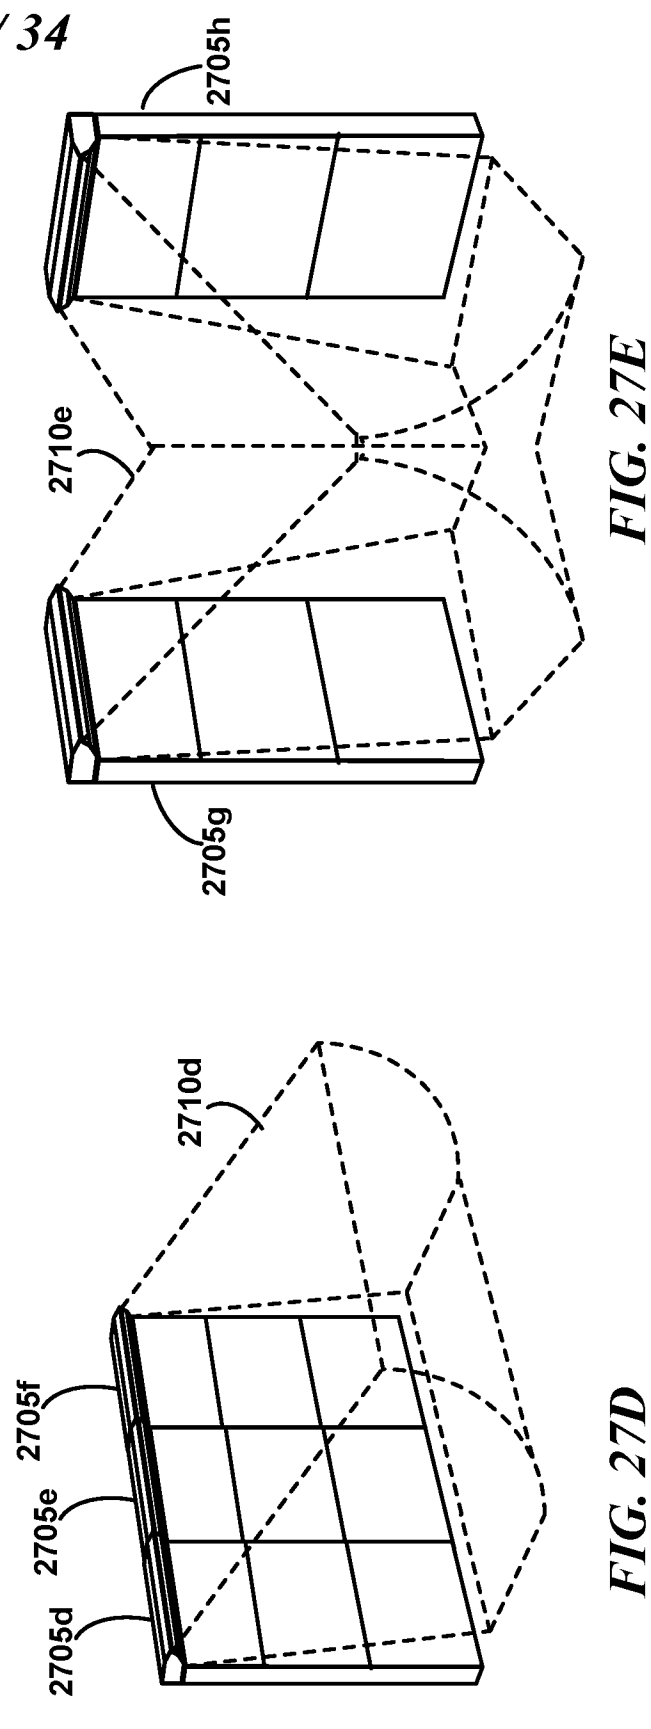
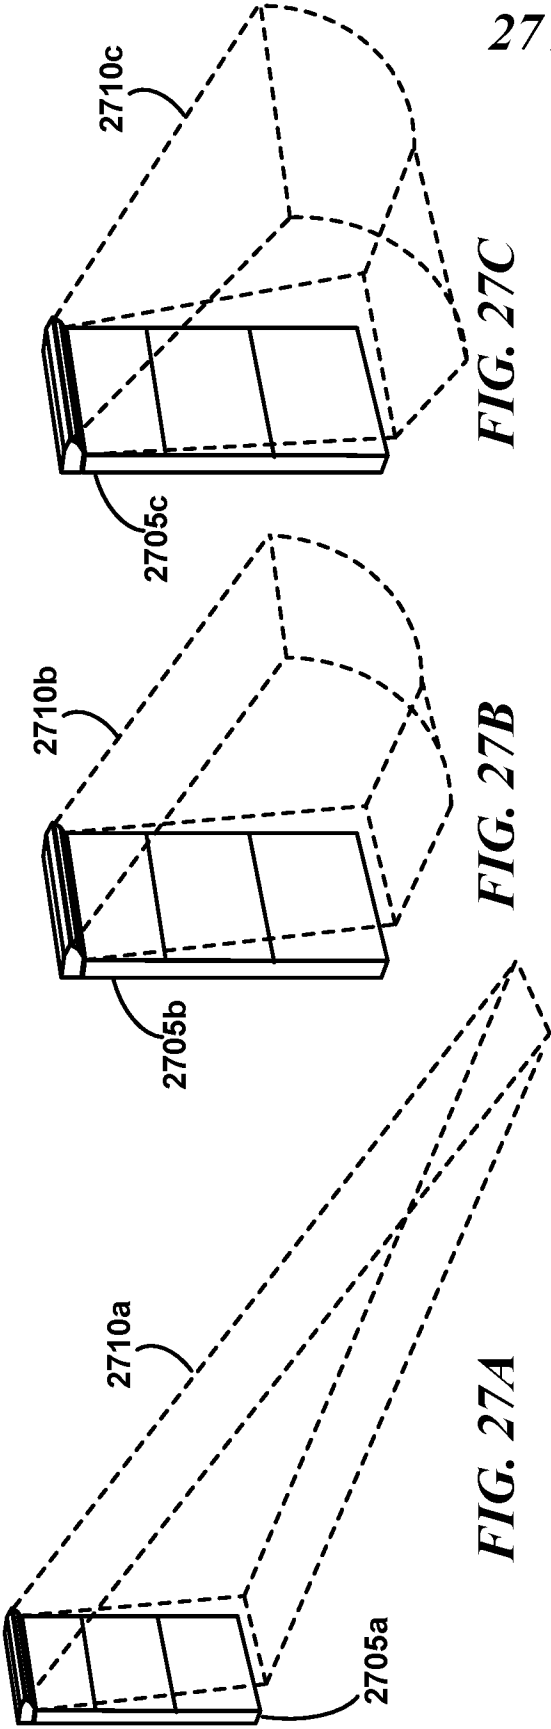


FIG. 26



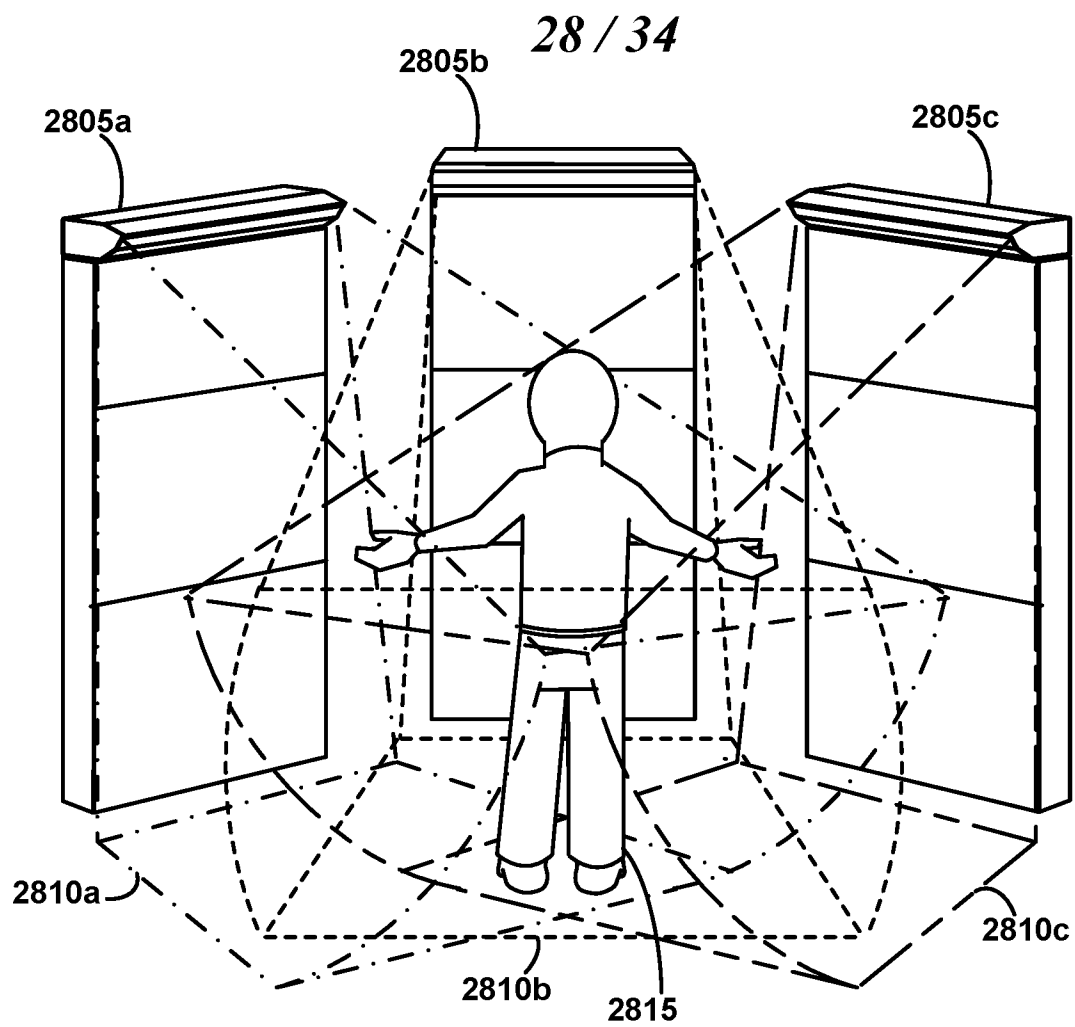


FIG. 28A




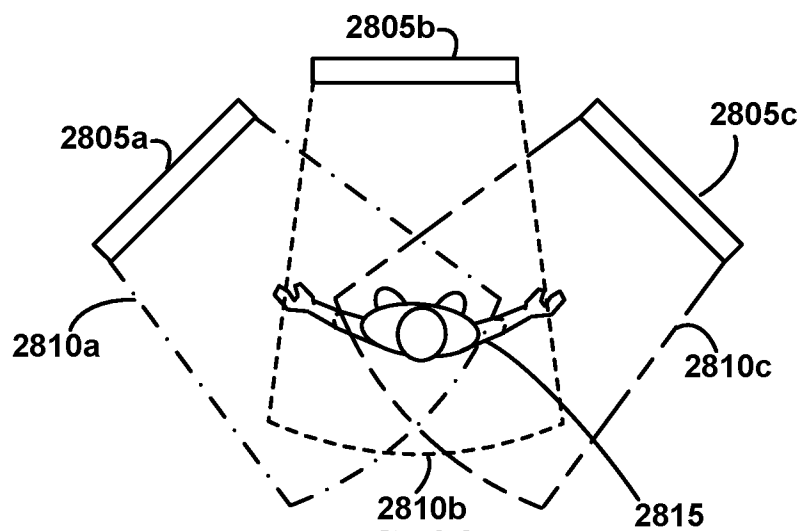


FIG. 28B

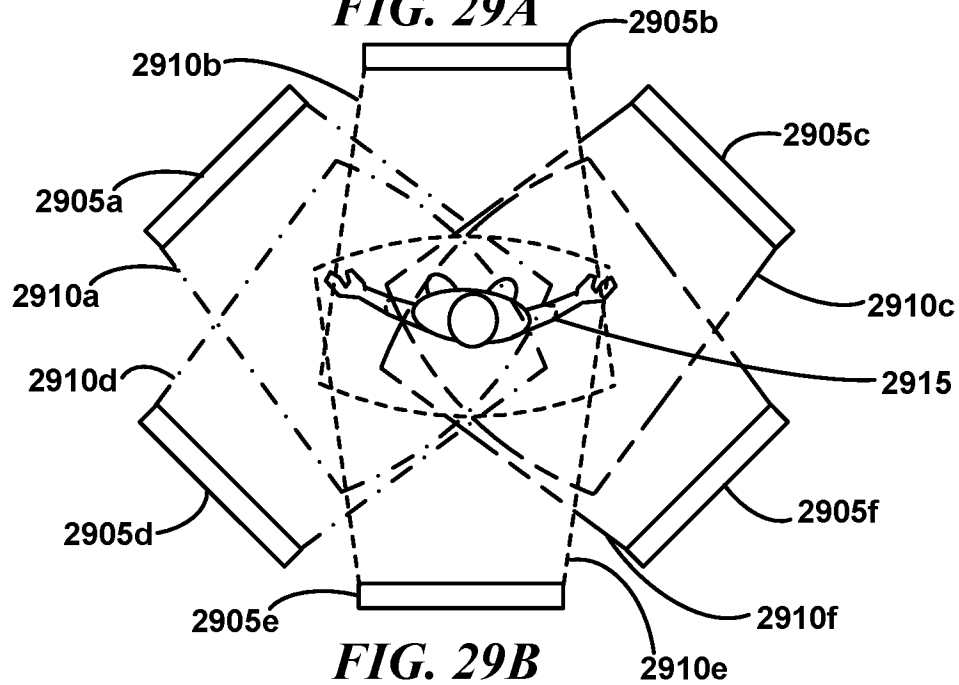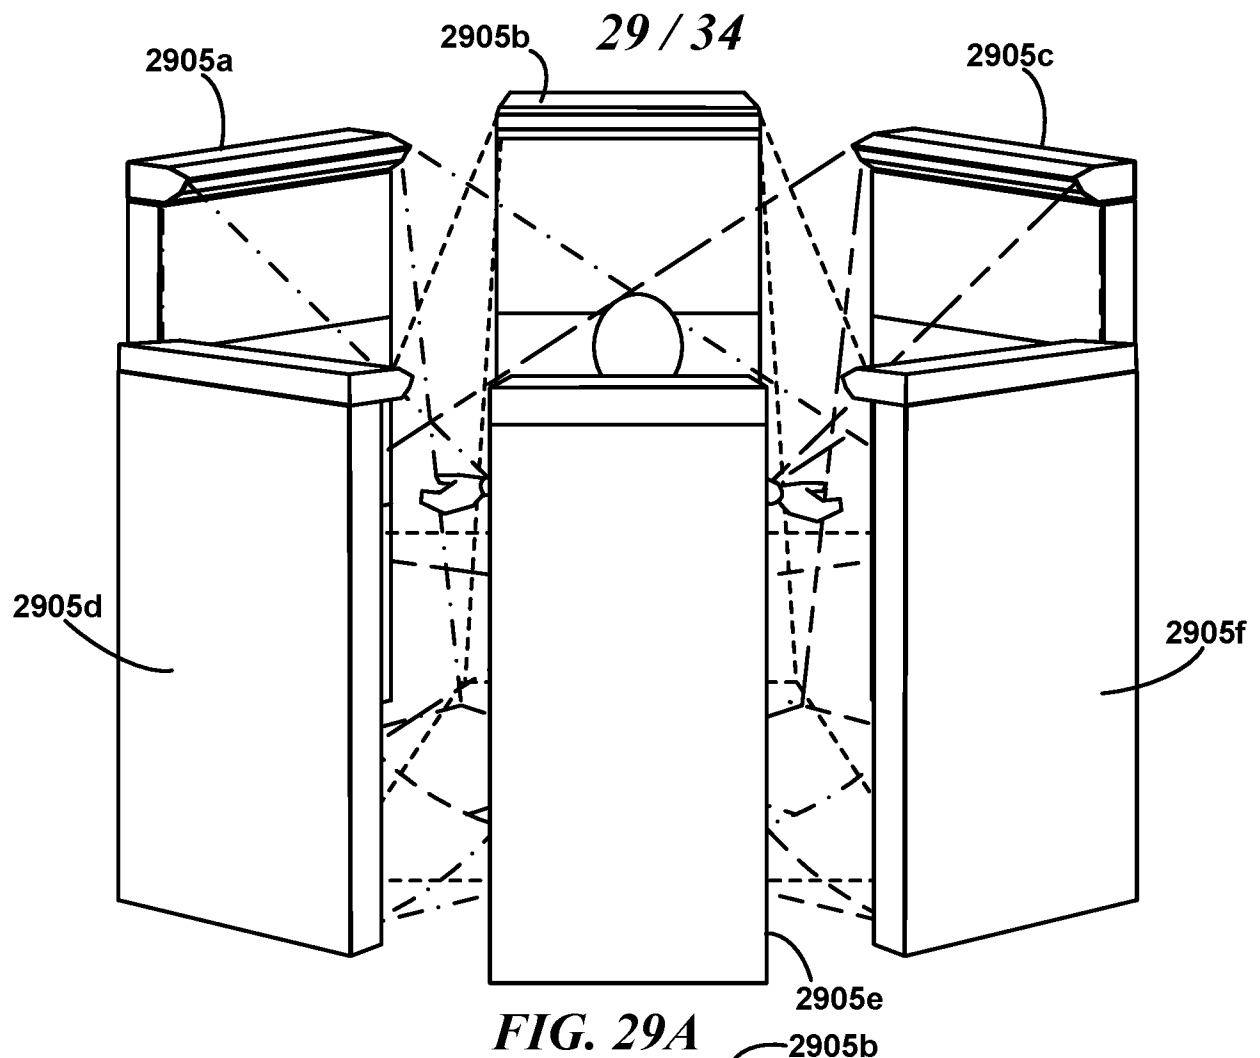


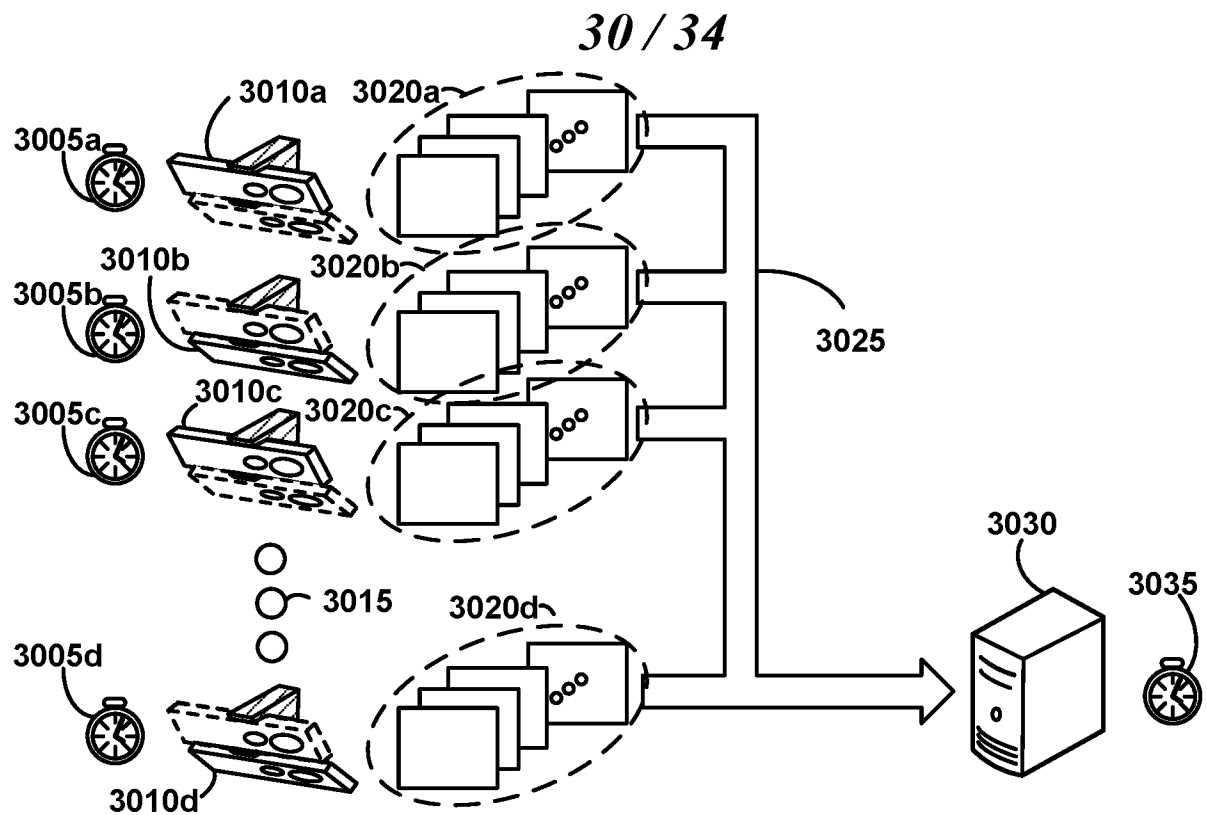

3050a		3050b		3050c	
DEPTH SENSOR A FRAME TIMESTAMPS		DEPTH SENSOR B FRAME TIMESTAMPS		DEPTH SENSOR C FRAME TIMESTAMPS	
	SYSTEM CLOCK ARRIVAL TIME		SYSTEM CLOCK ARRIVAL TIME		SYSTEM CLOCK ARRIVAL TIME
150	1489955861	158	1489955263	25	1489955221
200	1489955922	208	1489957082	125	1489955342
250	1489956282	258	1489958922	225	1489955422
300	1489957121	308	1489960012	325	1489955532
350	1489958177	358	1489962033	425	1489955822
400	1489958962	408	1489962872	525	1489956367
450	1489959822	458	1489975899	625	1489956512

3060a 3060b 3060c

FIG. 30B

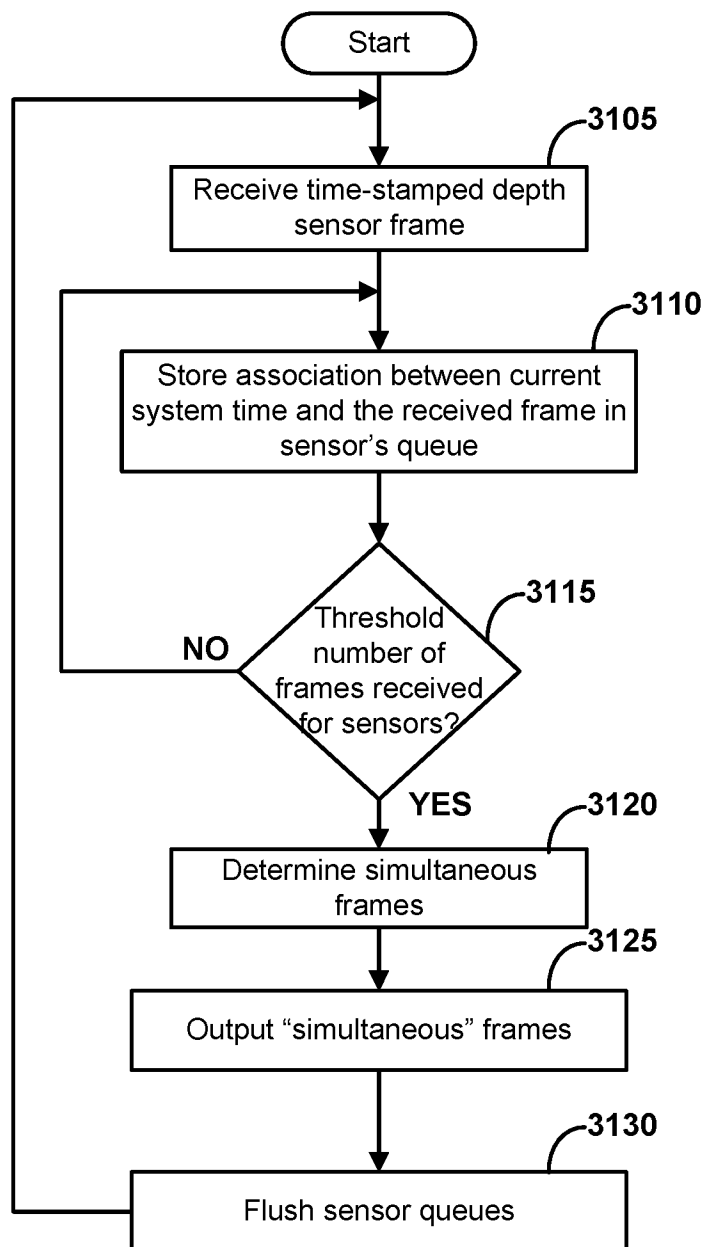31 / 34*FIG. 31*

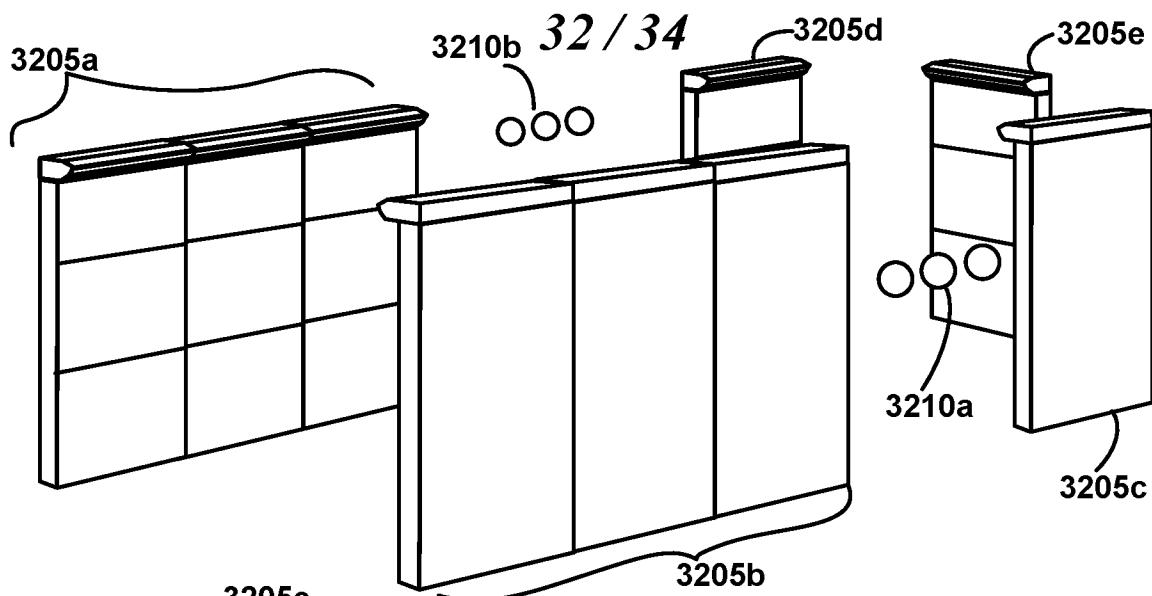


FIG. 32A

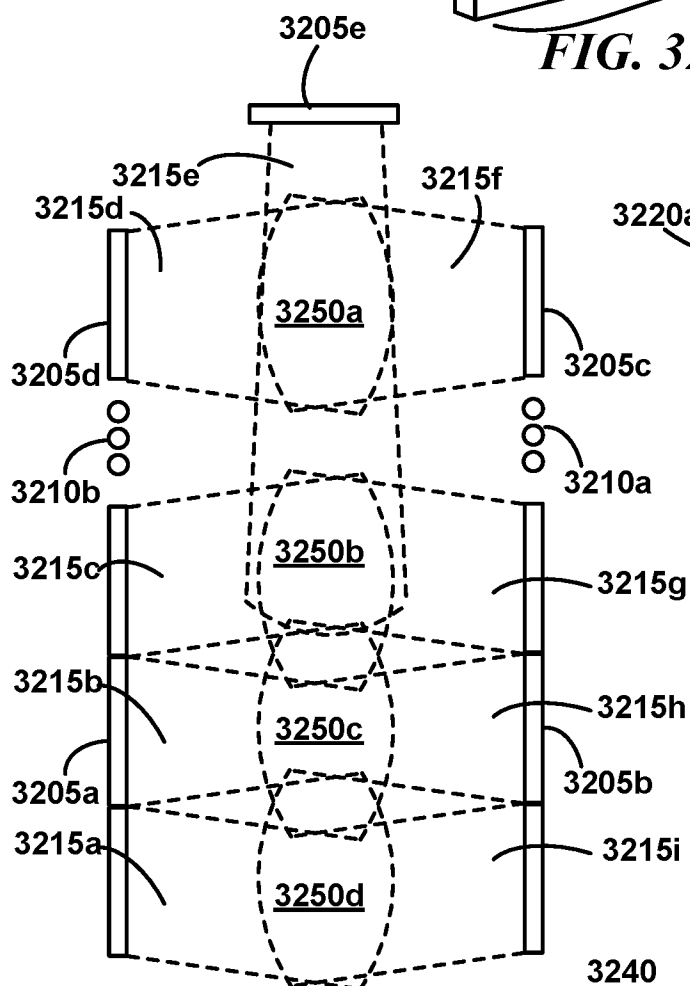


FIG. 32B

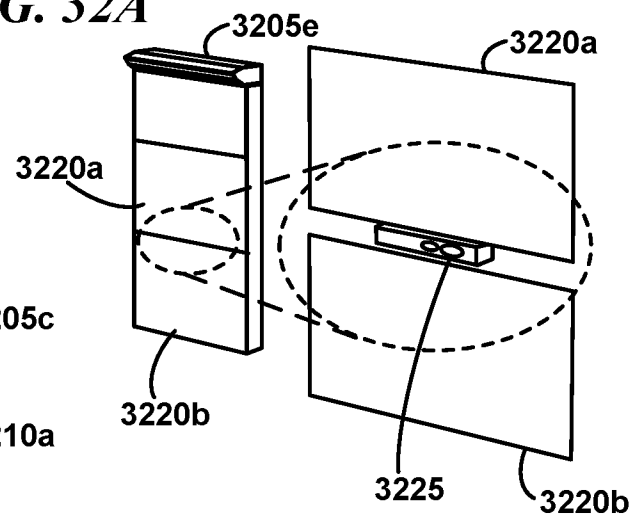


FIG. 32C

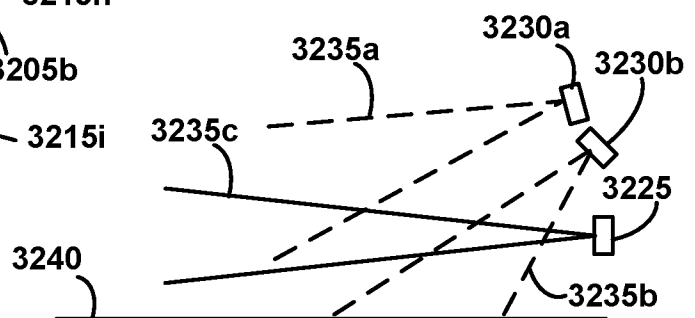
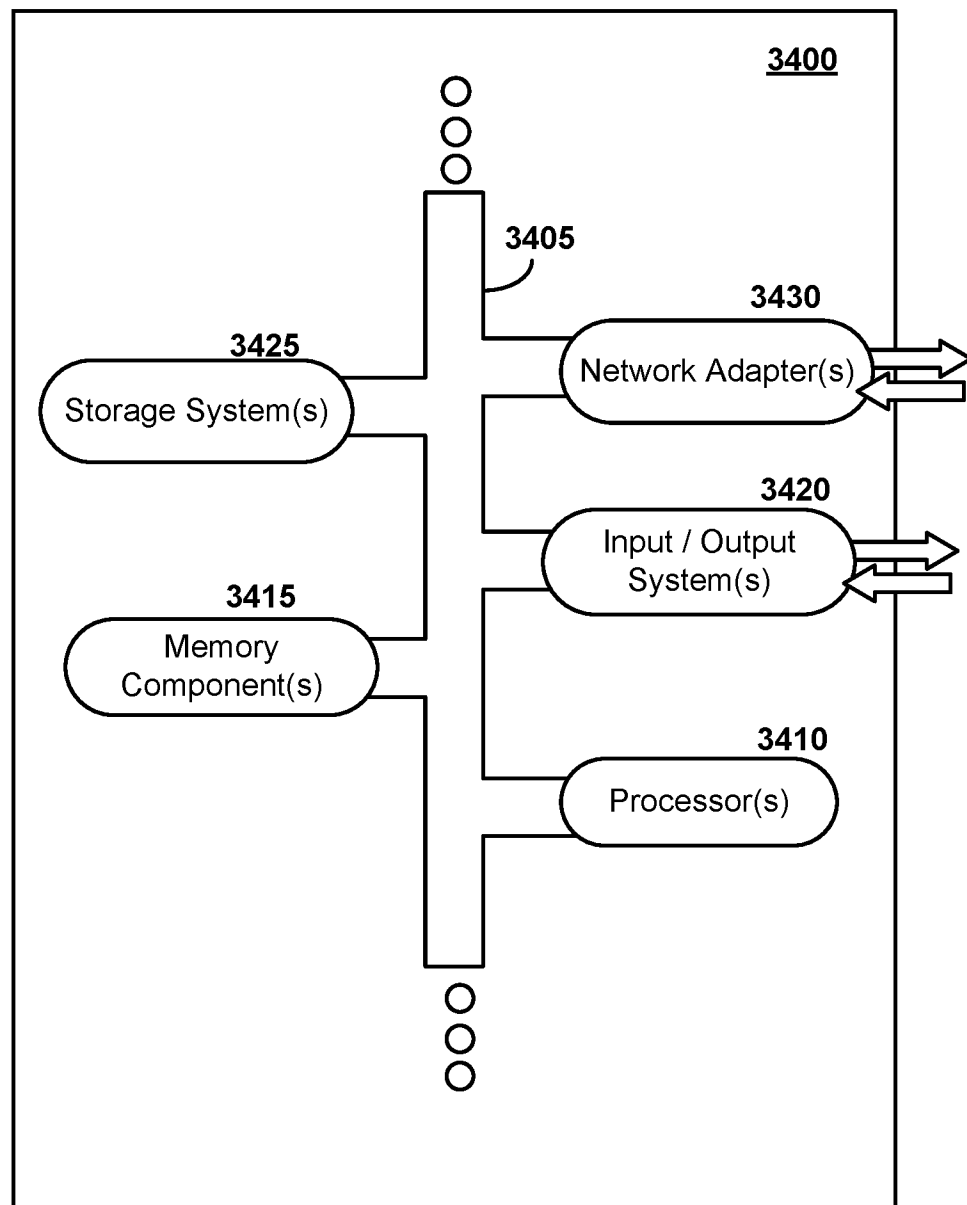


FIG. 32D

34 / 34**FIG. 34**

INTERNATIONAL SEARCH REPORT

International application No.

PCT/US17/27371

A. CLASSIFICATION OF SUBJECT MATTER

IPC - F21S8/03, F21S8/04, F21S8/06, F21V15/01, G06F3/01, G06T19/20 (2017.01)

CPC - F21S8/031, F21S8/033, F21S8/036, F21S8/0343, F21V15/012, G06F3/011, G06F3/017, G06F3/04815, G06F3/04847, G06F3/0482, G06F3/0487, G06F3/0488, G06T19/003, G06T19/006

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

See Search History document

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

See Search History document

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

See Search History document

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 2011/0090147 A1 (GERVAIS, W et al.) 21 April 2011, Fig. 5-9, para. [0026], [0056], [0060], [0063], [0064]	1-20
A	US 6,130,663 A (NULL, N) 10 October 2000, Fig. 1-8, 9A-9D, 11-13, col. 5 ln. 7-61, col. 6 ln. 4-22, col. 6 ln. 51-59, col. 7 ln. 11-29, col. 8 ln. 5-25, col. 9 ln. 8-12	1-20
A	US 2016/0209655 A1 (RICCOMINI, R et al.) 21 July 2016, Fig. 8A, 8B, para. [0044]	1-20
A	US 9,429,833 B1 (RAWLES LLC) 30 August 2016, entire document	1-20
A	US 2011/0288964 A1 (LINDER, N et al.) 24 November 2011, entire document	1-20

☐ Further documents are listed in the continuation of Box C.☐ See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

21 June 2017 (21.06.2017)

Date of mailing of the international search report

07 JUL 2017

Name and mailing address of the ISA/

Mail Stop PCT, Attn: ISA/US, Commissioner for Patents
P.O. Box 1450, Alexandria, Virginia 22313-1450

Facsimile No. 571-273-8300

Authorized officer

Shane Thomas

PCT Helpdesk: 571-272-4300

PCT OSP: 571-272-7774