




- (51) International Patent Classification:  
A61F 2/24 (2006.01)
- (21) International Application Number:  
PCT/IL2014/050087
- (22) International Filing Date:  
23 January 2014 (23.01.2014)
- (25) Filing Language:  
English
- (26) Publication Language:  
English
- (30) Priority Data:  
61/756,049 24 January 2013 (24.01.2013) US  
61/756,034 24 January 2013 (24.01.2013) US
- (71) Applicant: MITRALTECH LTD. [IL/IL]; 3 Ariel Sharon Avenue, 60376 Or Yehuda (IL).
- (72) Inventors: HAMMER, Tal; 129 Hazon Ish, 52370 Ramat Gan (IL). ZIPORY, Yuval; 40 Nahal Meron Street, 71701 Modi'in (IL). REICH, Tal; 19130 Moshav Moledet (IL). HERMAN, Yaron; 4 HaArava Street, 67808 Givat Ada (IL). HACOHEN, Gil; 32a HaTarnegol Street, P.O. Box 3256, 45930 Ramot HaShavim (IL). MILLER, Eran; 546 Hateena Street, 76803 Moshav Beit Elazari (IL). NEE-MAN, Rotem; HaGolan 83, 4480500 Yeshuv Nirit (IL). KRUGLOVA, Natalia; 39 Kehilat Varsha Street, 69700 Tel Aviv (IL).

- (74) Agents: SANFORD T. COLB & CO. et al.; P.O. Box 2273, 76122 Rehovot (IL).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, QA, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:  
— without international search report and to be republished upon receipt of that report (Rule 48.2(g))

(54) Title: VENTRICULARLY-ANCHORED PROSTHETIC VALVES

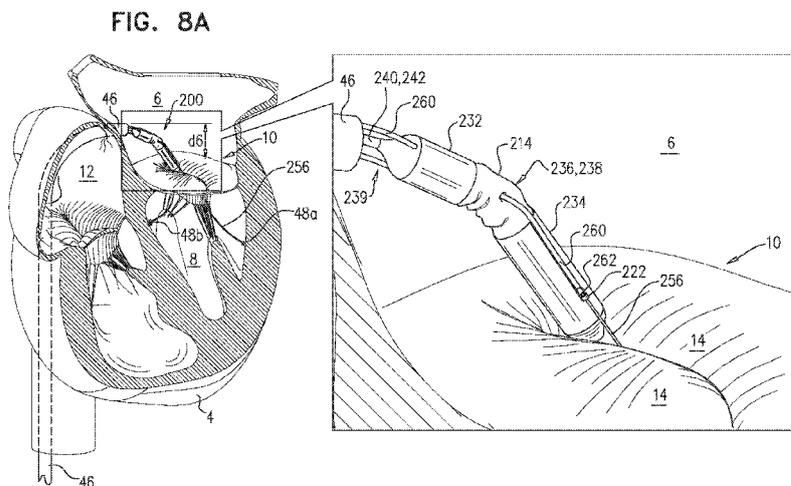

(57) Abstract: Apparatus is provided, including: (A) a valve body (204) including a first frame (206) shaped to define a lumen therethrough, and a valve member (205) disposed within the lumen, (B) an upstream support (210), configured to be placed against an upstream surface of a native heart valve, and (C) a flexible sheet (214) that couples the upstream support to the valve body. The valve body has a compressed state in which the first frame has a first diameter, and an expanded state in which the first frame has a second diameter that is greater than the first diameter. The support includes a second frame (212) that has a compressed state, and an expanded state in which the second frame is annular, has an inner perimeter that defines an opening through the second frame, and has an outer perimeter. Other embodiments are also described.

WO 2014/115149 A2

VENTRICULARLY-ANCHORED PROSTHETIC VALVES**CROSS-REFERENCES TO RELATED APPLICATIONS**

The present application claims priority from US provisional patent application 61/756,049 to HaCohen et al., filed January 24, 2013, and entitled "Ventricularly-  
5 anchored prosthetic valve support"; and US provisional patent application 61/756,034 to HaCohen et al., filed January 24, 2013, and entitled "Tissue-engaging elements", and is related to:

US patent application publication 2012/0022639 to Hacoheh et al., filed July 21, 2010;

10 US patent application publication 2012/0022640 to Gross et al., filed February 24, 2011;

US patent application 13/811,308 to Gross et al., filed January 21, 2013, which published as US 2013/0172992;

15 US patent application 13/412,814 to Gross et al., filed March 6, 2012, which published as US 2013/0035759;

PCT patent application IL2012/000292 to Gross et al., filed August 5, 2012, which published as WO/2013/021374;

PCT patent application IL2012/000293 to Gross et al., filed August 5, 2012, which published as WO/2013/021375; and

20 a US patent application to HaCohen et al., entitled "Anchoring of prosthetic valve supports", filed on even date herewith,

all of which are incorporated herein by reference.

**FIELD OF THE INVENTION**

Some applications of the present invention relate in general to valve replacement.  
25 More specifically, some applications of the present invention relate to prosthetic cardiac valves and techniques for implantation thereof.

**BACKGROUND**

Ischemic heart disease causes regurgitation of a heart valve by the combination of ischemic dysfunction of the papillary muscles, and the dilatation of the ventricle that is

present in ischemic heart disease, with the subsequent displacement of the papillary muscles and the dilatation of the valve annulus.

Dilation of the annulus of the valve prevents the valve leaflets from fully coapting when the valve is closed. Regurgitation of blood from the ventricle into the atrium results in increased total stroke volume and decreased cardiac output, and ultimate weakening of the ventricle secondary to a volume overload and a pressure overload of the atrium.

### SUMMARY OF THE INVENTION

For some applications of the invention, tissue anchors coupled to tethers are transluminally anchored to ventricular tissue of a native valve. A prosthetic valve component, such as a prosthetic valve assembly, a prosthetic valve body, or a support, is transluminally slid along a guide member coupled to the tethers, and is anchored to the tethers.

For some applications, a prosthetic valve assembly comprises (1) a valve body shaped to define a lumen therethrough, and a valve member disposed within the lumen, (2) an upstream support configured to be placed against an upstream surface of a native heart valve, and (2) a flexible sheet that couples the upstream support to the valve body.

For some applications, the prosthetic valve assembly comprises eyelets to facilitate sliding along the guide member.

For some applications, the prosthetic valve assembly has a compressed delivery state in which the valve body and the upstream support are articulatably coupled to each other by the sheet. For such applications, a delivery tool houses the prosthetic valve assembly such that the valve body and upstream support are articulatable with respect to each other during transluminal delivery.

For some applications, the prosthetic valve assembly comprises tethers that, when tensioned, move the valve body closer to the support. For such applications, the assembly typically comprises tissue-engaging elements that protrude from the valve body, and the tethers are tensioned to sandwich tissue of the native valve between the tissue-engaging elements and the support.

For some applications, one or more forces is measured during implantation, and distributed among various anchoring elements. For some such applications, an intracorporeal spring is used that is extracorporeally observable using imaging techniques. For some such applications, the spring facilitates force distribution.

For some applications, a prosthetic valve assembly comprises a flexible sheet forms a pocket between the sheet and a frame of the assembly, and facilitates sealing between the assembly and tissue of the native valve.

For some applications of the invention, tissue anchors coupled to longitudinal members that are reversibly couplable to wires are transluminally advanced to the ventricle downstream of a native heart valve, and are anchored there. A prosthetic valve support comprising an upstream support portion is slid, in a compressed delivery configuration, over the wires and part of each longitudinal member, and into an atrium upstream of the native valve where it is deployed (e.g., expanded) and placed against an upstream surface (e.g., an atrial surface) of the native valve. A locking member is also slid over the wires and part of each longitudinal member, and locks to the longitudinal member, thereby securing the prosthetic valve support against the upstream surface of the native valve. A prosthetic valve is subsequently transluminally advanced to the native valve, and is implanted by coupling the prosthetic valve to leaflets of the native valve and to the prosthetic valve support.

For some applications of the invention, a tubular member is slidable over the wire and the longitudinal member, and when disposed over the wire and the long member, inhibits decoupling of the wire from the longitudinal member. For such applications, the prosthetic valve support and the locking member are typically slidable over the tubular member.

For some applications of the invention, a control rod, reversibly coupled to the locking member, is slid over the tubular member so as to push the locking member and the prosthetic valve support over the tubular member. For some such applications, the control rod is used to lock the locking member to the longitudinal member.

There is therefore provided, in accordance with an application of the present invention, apparatus for use with a native valve of a heart of a subject, the apparatus including:

a valve body:

including (1) a first frame shaped to define a lumen therethrough, and (2) a valve member disposed within the lumen,

having a compressed state in which the first frame has a first diameter, and

having an expanded state in which the first frame has a second diameter that is greater than the first diameter;

an upstream support:

configured to be placed against an upstream surface of the native valve,

5 including a second frame,

having a compressed state, and

having an expanded state in which the second frame is annular, has an inner perimeter that defines an opening through the second frame, and has an outer perimeter; and

10 a flexible sheet that couples the upstream support to the valve body.

In an application, the upstream support is coupled to the valve body only via the sheet.

In an application:

the valve body has an upstream end, a downstream end, and a longitudinal axis  
15 therebetween along which the lumen is defined, and

when the valve body is in the expanded state thereof and the upstream support is in the expanded state thereof:

the first frame is attached to the second frame at the inner perimeter of the second frame, and

20 the sheet is attached to the valve body and to the upstream support in a manner that defines a pocket region between the sheet and at least the inner perimeter of the second frame, the sheet not being attached to the first frame or the second frame in the pocket region.

In an application, the sheet provides fluid communication between the opening and  
25 the lumen.

In an application, the sheet is not attached to the inner perimeter of the second frame.

In an application, the sheet is not attached to an upstream end of the valve body.

In an application, the sheet is generally annular when the valve body is in the  
30 expanded state thereof and the upstream support is in the expanded state thereof.

In an application, the sheet is generally frustoconical when the valve body is in the expanded state thereof and the upstream support is in the expanded state thereof.

In an application, the sheet is attached to the inner perimeter of the second frame.

In an application, the sheet is circumferentially attached to the second frame at a radius that is greater than a radius of the inner perimeter.

5 In an application, the sheet is circumferentially attached to the second frame at the outer perimeter of the second frame.

In an application, the sheet is attached to an upstream end of the valve body.

In an application, the first frame is generally cylindrical in both the compressed state thereof and the expanded state thereof.

10 In an application, the second frame is generally cylindrical in the compressed state thereof.

In an application, the valve body includes at least one downstream anchor, configured such that, in the expanded configuration of the valve body, the anchor protrudes radially outward from the first frame.

15 In an application, the apparatus further includes at least one tensioning element, coupled to the valve body and to the upstream support, a length of the tensioning element between the valve body and the upstream portion being adjustable such that a distance between the first frame and the second frame is adjustable.

In an application, the at least one tensioning element includes a tether.

20 In an application, the at least one tensioning element is coupled to the first frame, and slidably coupled to the second frame.

In an application, the valve body, the upstream support and the sheet together define a prosthetic valve assembly, the prosthetic valve assembly:

having an expanded state in which the valve body is in the expanded state thereof and the second frame of the upstream support is in the expanded state thereof,

25 having a compressed state in which:

the prosthetic valve assembly has a longitudinal axis,

the valve body is in the compressed state thereof at a first zone of the longitudinal axis,

30 the upstream support is in the compressed state thereof at a second zone of the longitudinal axis, and

the prosthetic valve assembly defines an articulation zone, between the first zone and the second zone, in which at least part of the sheet is disposed, in which neither the first frame nor the second frame is disposed, and about which the valve body and the upstream support are articulatable with respect to each other.

5 In an application, the apparatus further includes a delivery tool:

including a first housing configured to house and maintain at least part of the upstream support in the compressed state thereof, and defining a first housing orifice through which the at least part of the upstream support is removable from the first housing,

10 including a second housing configured to house and maintain at least part of the valve body in the compressed state thereof, and defining a second housing orifice through which the at least part of the valve body is removable from the second housing,

having a contracted state in which the second housing is disposed at a first distance from the first housing, and in which the delivery tool is configured to transluminally advance the prosthetic valve assembly in the compressed state thereof, to the native valve, and

having an extended state in which the second housing is disposed at a second distance from the first housing, the second distance being greater than the first distance, and the apparatus is configured such that, when the at least part of the upstream support is housed by the first housing and the at least part of the valve body is housed by the second housing, transitioning of the delivery tool from the contracted state into the extended state exposes at least part of at least one component selected from the group consisting of: the valve body and the upstream support, from the housing that houses the selected component.

25 In an application:

the apparatus is configured to be used with at least two guide members,

the prosthetic valve assembly includes at least two eyelets, each eyelet being slidable over a respective one of the guide members, and

the apparatus is configured such that the eyelets of the prosthetic valve assembly protrude radially outward and radially beyond an outer surface of the second housing while: (1) the at least part of the valve body, in the compressed state thereof, is housed by the second housing, and (2) the at least part of the upstream support, in the compressed state thereof, is housed by the first housing.

In an application, the eyelets are pivotably coupled to the valve body.

In an application, the delivery tool further includes at least two reference-force tubes, each reference-force tube configured (1) to be slidable over a respective one of the guide members, and (2) to apply a distally-directed force to the prosthetic valve assembly.

5 In an application, in the compressed state of the prosthetic valve assembly, each reference-force tube extends distally (1) through a lumen defined by the second frame of the upstream support, (2) through the sheet, and (3) along an outside of at least part of the valve body.

In an application, the apparatus further includes at least two locking members, each  
10 locking member:

having an unlocked state in which the locking member is slidable along a respective one of the guide members,

being transitionable into a locked state in which (1) the locking member is locked to the respective one of the guide members, and (2) the sliding of the eyelet over the guide  
15 member is inhibited.

In an application, the apparatus further includes the at least two guide members:  
each guide member includes:

a tubular member, shaped to define a lumen therethrough,

a tether, coupled at a distal end thereof to a tissue anchor configured to be  
20 anchored to ventricular tissue of the heart, at least a proximal portion of the tether being disposed within the lumen of the tubular member, and

a pull-wire, coupled at a distal portion thereof to the proximal portion of the tether, at least the distal portion of the pull-wire being disposed within the lumen of the tubular member,

25 the tubular member inhibits decoupling of the pull-wire from the tether while the distal portion of the pull-wire and the proximal portion of the tether are disposed within the lumen of the tubular member, and

while the tubular member of each guide member is disposed within the respective locking member, the tubular member inhibits transitioning of the locking member into the  
30 locked state.

In an application, the apparatus is configured such that, for each respective guide member and locking member, while (1) the tubular member is disposed within the locking member, (2) the distal portion of the pull-wire and the proximal portion of the tether are

disposed within the lumen of the tubular member, and (3) the tissue anchor is coupled to the ventricular tissue:

proximal sliding of the tubular member with respect to the tether facilitates automatic transitioning of the locking member into the locked state, and

5 further proximal sliding of the tubular member with respect to the tether facilitates decoupling of the pull-wire from the tether.

In an application, at least one housing selected from the group consisting of: the first housing and the second housing has a lateral wall that is shaped to define at least two slits, the eyelets being configured to protrude radially outward from the delivery tool via  
10 the slits.

In an application, each slit of the at least one selected housing is continuous with the orifice of the at least one selected housing.

In an application, the eyelets are coupled to and protrude radially outward from the valve body.

15 In an application, the eyelets are pivotably coupled to the valve body.

In an application:

the articulation zone defined by the prosthetic valve assembly includes a first articulation zone, and

while (1) the at least part of the valve body, in the compressed state thereof, is  
20 housed by the second housing, (2) the at least part of the upstream support, in the compressed state thereof, is housed by the first housing, and (3) the delivery tool is in the contracted state thereof, the apparatus defines a second articulation zone at a longitudinal zone of the apparatus (a) between the second housing and the first housing, and (b) in which is disposed at least part of the first articulation zone.

25 In an application, the delivery tool further includes a housing-control rod that extends through the first housing and is coupled to the second housing such that a first portion of the housing-control rod is disposed within the first housing, a second portion of the housing-control rod is disposed within the second housing, and a third portion of the housing-control rod (1) is disposed within the second articulation zone, and (2) is more  
30 flexible than at least one portion of the housing-control rod selected from the group consisting of: the first portion and the second portion.

In an application:

the delivery tool further includes (1) a control rod assembly including at least a first housing-control rod coupled to the first housing, and (2) a second housing-control rod, more flexible than the first housing-control rod, extending through the first housing-control rod, extending through the second articulation zone, and coupled to the second housing.

In an application, the second housing orifice faces the first housing orifice.

In an application:

the delivery tool further includes a flexible control rod assembly including (1) a first housing-control rod coupled to the first housing, (2) a second housing-control rod coupled to the second housing, and (3) a prosthesis-control rod reversibly couplable to the prosthetic valve assembly,

longitudinal movement of the second housing-control rod with respect to the first housing-control rod transitions the delivery tool between the contracted state and the extended state thereof, and

the valve body is removable from the second housing by moving the second housing-control rod with respect to the prosthesis-control rod.

In an application, the prosthesis-control rod is reversibly couplable to the prosthetic valve assembly by being reversibly couplable to the valve body.

In an application, at least part of the second housing-control rod is disposed within and slidable through the prosthesis-control rod, and at least part of the prosthesis-control rod is disposed within and slidable through the first housing-control rod.

In an application, the outer perimeter of the second frame has a third diameter that is greater than the second diameter.

In an application, the inner perimeter has a fourth diameter that is greater than the second diameter.

In an application, when the valve body is in the expanded state thereof and the upstream support is in the expanded state thereof, a gap is defined between the first frame and the second frame, the sheet spanning the gap.

In an application, no metallic structure is disposed within the gap.

In an application, the sheet is configured to inhibit expansion of the second frame.

In an application, the apparatus is configured such that when the second frame expands from the compressed state thereof toward the expanded state thereof, the sheet retains the second frame in a generally frustoconical shape by inhibiting expansion of at least the outer perimeter of the second frame.

5 In an application, the sheet extends over at least part of the second frame to serve as a covering of the upstream support.

In an application, the covering defines a tissue-contacting surface of the upstream support.

10 In an application, the sheet extends over at least part of the first frame to serve as a covering of the valve body.

In an application, the covering is disposed on an inner surface of the first frame.

There is further provided, in accordance with an application of the present invention, apparatus for use with a native valve of a heart of a subject, the apparatus including:

15 a prosthetic valve, configured to be percutaneously delivered to the native valve;  
an annular upstream support, configured to be placed against an upstream surface of the native valve, and to support the prosthetic valve at the native valve;

a tissue anchor, including a tissue-engaging element configured to be anchored to ventricular muscle tissue of the heart;

20 a tether, coupled to the tissue anchor; and

a spring, couplable to the tether so as to elastically couple the tissue-engaging element to the prosthetic valve.

In an application, the spring is shaped to define a repeating pattern.

In an application, the spring is pre-loaded.

25 In an application, the spring is a constant-force spring.

In an application, the spring is configured to facilitate extracorporeal fluoroscopic observation of a state of the spring.

30 In an application, the spring is coupled to a plurality of radiopaque markers such that a juxtaposition of the markers changes as the state of the spring changes, the juxtaposition of the markers being extracorporeally fluoroscopically observable.

In an application, the spring is coupled to at least one radiopaque marker, and the apparatus further includes an intracorporeal reference, a juxtaposition between the radiopaque marker and the intracorporeal reference being extracorporeally fluoroscopically observable.

- 5 In an application, the intracorporeal reference includes a scale including a plurality of radiopaque markers.

In an application, the plurality of radiopaque markers includes a first plurality of radiopaque markers, and the at least one radiopaque marker includes a second plurality of radiopaque markers.

- 10 In an application, the spring is configured to provide distinct indication that is observable using fluoroscopy, when the spring is experiencing a force that is within a margin force from a target force.

In an application, the spring is configured to provide the distinct indication when the spring experiences a force that is above 300 g force.

- 15 In an application, the spring is configured to provide the distinct indication when the spring experiences a force that is above 400 g force.

In an application, the spring is configured to provide the distinct indication when the spring experiences a force that is about 500 g force.

- 20 In an application, the spring is coupled to the prosthetic valve, and is intracorporeally lockable to the tether subsequently to anchoring of the tissue anchor to the ventricular muscle tissue.

In an application, the spring is slidable along at least part of the tether, and is intracorporeally couplable to the tether by inhibiting the sliding.

- 25 In an application, the prosthetic valve includes a generally cylindrical valve body having an upstream end, and the spring includes an elastically-deformable appendage that protrudes laterally from the valve body.

In an application:

the prosthetic valve includes a generally cylindrical valve body having an upstream end, a downstream end, and a longitudinal lumen therebetween, and

the spring (1) includes a compression spring having a longitudinal axis, and (2) is disposed laterally from, the valve body such that the longitudinal axis of the spring is generally parallel with the longitudinal lumen.

In an application, the prosthetic valve includes:

5 a generally cylindrical valve body having an upstream end, a downstream end, and a longitudinal lumen therebetween; and

one or more tissue-engaging legs, protruding laterally outward from the valve body, and configured to be placed against a ventricular surface of the native valve.

10 In an application, the prosthetic valve is couplable to the upstream support intracorporeally by being expanded within an opening defined by the upstream support while the upstream support is disposed against the upstream surface.

In an application, the apparatus is configured such that the coupling of the prosthetic valve to the upstream support couples the tether to the prosthetic valve.

15 In an application, the apparatus is configured to sandwich a portion of the native valve between the tissue-engaging legs and the upstream support by providing a space having a height between the tissue-engaging legs and the upstream support.

In an application, the apparatus is configured to facilitate altering the height without altering a force on the spring.

20 In an application, the apparatus is configured such that altering the height automatically alters a force on the spring.

In an application, the apparatus is configured to facilitate altering the height by moving the valve body through the opening defined by the upstream support.

There is further provided, in accordance with an application of the present invention, apparatus for use with a native heart valve of a subject, the apparatus including:

25 a valve body:

having an upstream end, a downstream end, and a longitudinal axis therebetween,

including a lateral wall that circumscribes the longitudinal axis and defines a longitudinal lumen, and

30 including a valve member disposed within the lumen;

an upstream support having an inner perimeter couplable to the valve body at a first longitudinal position of the valve body, the upstream support being configured to extend radially outward from the valve body and the inner perimeter; and

5 a flexible sheet defining a first aperture, a second aperture and a lateral wall therebetween, a first portion of the sheet that defines the first aperture being circumferentially attached to the upstream support portion at a radius that is greater than a radius of the inner perimeter, and a second portion of the sheet that defines the second aperture being circumferentially attached to the valve body at a second longitudinal position of the valve body, such that a pocket region is defined between the sheet and at  
10 least the first longitudinal position.

In an application, the second longitudinal position is closer to the downstream end of the valve body than is the first longitudinal position.

In an application, the first aperture is larger than the second aperture.

In an application, the sheet is attached to the upstream support at an outer  
15 perimeter of the upstream support.

In an application, the sheet assumes a frustoconical shape.

In an application, the sheet assumes a funnel shape.

In an application, the apparatus is provided with the inner perimeter of the upstream support pre-coupled to the valve body at the first longitudinal position of the  
20 valve body.

In an application, the apparatus is configured such that the inner perimeter of the upstream support is intracorporeally couplable to the valve body at the first longitudinal position of the valve body.

There is further provided, in accordance with an application of the present  
25 invention, apparatus for use with a native heart valve disposed between an atrium and a ventricle of a heart of a subject, the apparatus including:

an annular upstream support defining an opening therethrough, and configured to be placed against an upstream surface of the native heart valve;

a tubular valve body having an upstream end, a downstream end and a lumen  
30 therebetween, the lumen having a first diameter, and the valve body being separated from

the upstream element by a gap between the upstream end of the valve body and the upstream element;

one or more tissue-engaging elements that protrude radially outward from the valve body so as to define a second diameter that is greater than the first diameter; and

5 a flexible sheet shaped to define a conduit, a downstream portion of the sheet being coupled to the valve body, an upstream portion of the sheet being coupled to the upstream element, and the sheet spanning the gap.

In an application, the apparatus further includes at least one tether, a first portion of the tether being coupled to the valve body and a second portion of the tether being coupled  
10 to the upstream support, such that tensioning of at least a portion of the tether reduces the gap.

In an application, the apparatus is configured such that tensioning of at least the portion of the tether rumples the sheet.

There is further provided, in accordance with an application of the present  
15 invention, apparatus for use with a native heart valve disposed between an atrium and a ventricle of a heart of a subject, the apparatus including:

an annular upstream element defining an opening therethrough, and configured to be placed against an upstream surface of the native heart valve;

20 a flexible sheet, shaped to define a conduit, and coupled to the upstream element such that the conduit is in fluid communication with the opening; and

a valve body, coupled to the flexible sheet such that the conduit provides fluid communication between the prosthetic valve and the upstream element.

In an application, the valve body includes:

25 a generally cylindrical frame shaped to define a lumen therethrough, and a valve member coupled to the frame and disposed within the lumen.

In an application, the frame is separated from the upstream element by a gap, and the conduit spans the gap.

There is further provided, in accordance with an application of the present invention, apparatus, for use with a guide member that extends into a subject, the  
30 apparatus including:

a delivery tool, including a housing, the housing:

being transluminally advanceable into the subject,  
shaped to define an orifice at an end of the housing, and  
having a lateral wall shaped to define a slit that is continuous with the  
orifice;

5 an implant:

configured to be housed by the housing, and

including an eyelet that (1) is slidable over the guide member, and (2) when  
the implant is housed by the housing, extends through the slit and radially beyond  
the lateral wall such that the eyelet facilitates transluminal sliding of the implant  
and the housing along the guide member and into the subject,

10

the apparatus being configured such that, while (1) the implant remains within the subject,  
and (2) the guide member remains disposed through the eyelet, (1) the implant is  
removable from the housing via the orifice, and (2) the housing is removable from the  
subject.

15

In an application, the implant is configured to be implanted by being  
intracorporeally locked to the guide member.

In an application, the implant has a compressed state and an expanded state, is  
configured to be housed by the housing while in the compressed state, and is configured to  
automatically expand toward the expanded state when removed from the housing.

20

There is further provided, in accordance with an application of the present  
invention, a method for use with a native valve of a heart of a subject, the method  
including:

transluminally anchoring a tissue anchor to ventricular tissue of a subject using an  
anchor-manipulation tool, the tissue anchor being coupled to a first portion of a tether;

25

transluminally delivering an annular upstream support and a prosthetic valve to the  
heart, the prosthetic valve including (1) a valve body shaped to define a lumen  
therethrough, and (2) one or more tissue-engaging legs configured to protrude laterally  
outward from the valve body;

30

pressing the tissue-engaging legs in an upstream direction against a ventricular  
surface of the native valve by applying a force to the prosthetic valve while measuring the  
force;

applying, to the tether, a tension that changes a shape of a spring coupled to the  
tether, while observing the shape of the spring using imaging; and

at least in part responsively to the observed shape of the spring, facilitating holding of the upstream support against an upstream surface of the native valve by locking a second portion of the tether to at least one component selected from the group consisting of: the prosthetic valve and the upstream support.

5 In an application, measuring the force includes measuring the force using an extracorporeal force meter.

In an application, measuring the force includes observing a shape of the tissue-engaging legs using imaging.

10 In an application, applying the tension includes applying the tension while applying the force.

In an application, locking the second portion to the selected component includes locking the second portion to the prosthetic valve.

In an application, locking the second portion to the selected component includes locking the second portion to the upstream support.

15 In an application, locking the second portion includes locking the second portion when the observed shape indicates that the spring is experiencing between 400 g force and 600 g force.

20 In an application, locking the second portion includes locking the second portion subsequently to applying the tension, and applying the force includes applying the force subsequently to locking the second portion.

In an application:

anchoring the tissue anchor coupled to the tether includes anchoring a first tissue anchor coupled to a first tether, and applying the tension includes applying a first tension that changes a shape of a first spring coupled to the first tether,

25 the method further includes:

anchoring a second tissue anchor to the ventricular tissue, the second tissue anchor being coupled to a first portion of a second tether; and

30 applying, to the second tether, a second tension that changes a shape of a second spring coupled to the second tether, while observing the shape of the second spring using imaging, and

facilitating holding of the prosthetic valve against the upstream surface includes, at least in part responsively to the observed shape of the second spring, facilitating holding

of the prosthetic valve against the upstream surface by locking a second portion of the second tether to the selected at least one component.

In an application, facilitating holding includes locking the second portion of the first tether and the second portion of the second tether to the selected at least one component, at least in part responsively to a ratio between tension in the first tether and tension in the second tether, the ratio being derived from the observed shape of the first spring and the observed shape of the second spring.

In an application, locking includes locking the second portion to the at least one component at least in part responsively to the observed shape.

In an application, locking includes locking the second portion to the at least one component at least in part responsively to the measured force.

In an application, applying the force includes moving the valve body in an upstream direction through an opening defined by the upstream support, and the method further includes coupling the prosthetic valve to the upstream support by expanding the valve body within the opening.

In an application, coupling the prosthetic valve to the upstream support includes coupling the prosthetic valve to the upstream support at least in part responsively to the measured force.

There is further provided, in accordance with an application of the present invention, a method, including:

transluminally advancing a plurality of tissue anchors, coupled to a respective plurality of springs, into a body of a subject;

anchoring the plurality of tissue anchors to tissue of the subject;

tensioning at least one of the springs;

using imaging, while the tension is applied to the at least one spring, observing a state of the at least one spring; and

at least in part responsively to the observed state of at least one spring, adjusting a tension on at least one of the springs.

There is further provided, in accordance with an application of the present invention, a method, for use with a native valve of a heart of a subject, the method including:

applying a first tension to a tether that couples (a) a tissue anchor anchored to ventricular tissue of a subject, to (b) a prosthetic valve body, the tether having a length between the tissue anchor and the valve body;

by applying an atrially-directed force to the prosthetic valve body, pressing,  
5 against tissue of the native valve, a tissue-engaging element that protrudes radially from the valve body

transluminally advancing a prosthetic valve body to a native valve of the subject;  
while applying the atrially-directed force, measuring:

a pressing force of the tissue-engaging element against the tissue of the  
10 native valve, and

a second tension on the tether, the second tension differing from the first  
tension at least in part due to the atrially-directed force; and

at least in part responsively to the measured pressing force and the measured  
second tension, performing an action selected from the group consisting of: adjusting the  
15 length of the tether between the tissue anchor and the valve body, and locking the valve  
body to the tether.

There is further provided, in accordance with an application of the present  
invention, a method for use with a native valve of a heart of a subject, the method  
including:

20 transluminally delivering a tissue anchor to a ventricle of the heart, and anchoring  
the tissue anchor to ventricular muscle tissue of the subject;

transluminally delivering an upstream support to an atrium of the heart, and  
placing the upstream support against an upstream surface of an annulus of the native  
valve; and

25 changing a shape of the upstream support by tensioning a tether coupled to  
upstream support and to the tissue anchor; and

extracorporeally fluoroscopically observing the shape change of the upstream  
support.

In an application, tensioning the tether coupled to the upstream support includes  
30 tensioning a tether that is coupled to a valve body coupled to the upstream support.

In an application, before the tensioning, the upstream support is generally flat  
annular, and changing the shape includes making the support assume a frustoconical  
shape.

In an application, before the tensioning, the upstream support is frustoconical, and changing the shape includes changing a slant of the frustoconical shape.

There is further provided, in accordance with an application of the present invention, apparatus for use with a valve of a heart of a subject, the apparatus including:

5 a transluminally-deliverable tissue anchor;

a tether, a first end thereof coupled to the tissue anchor; and

a delivery tool, including:

a steerable catheter having a longitudinal axis, and being transluminally deliverable to the valve, and

10 an obstructing element:

disposed at a longitudinal site of the catheter,

configured to extend laterally outward from the catheter, and

dimensioned, when extending laterally outward from the catheter,

to inhibit movement of at least the longitudinal site through the valve by abutting tissue of the valve, and

15

an anchor manipulator:

reversibly couplable to the tissue anchor,

slidable through the catheter, and

configured to drive the anchor into ventricular tissue of the heart of

20

the subject.

In an application, the anchor manipulator is slidably coupled to the catheter such that a distal end of the anchor manipulator is slidable distally no more than a pre-determined distance from the longitudinal site.

25 In an application, the apparatus further includes an implant, intracorporeally lockable to the tether.

In an application, the apparatus further includes a guide member, reversibly couplable to the tether, and the implant is intracorporeally slidable along the guide member toward the tether and the implant.

30 In an application, the tether has exactly one locking site at which the implant is lockable to the tether.

In an application, the exactly one locking site is disposed at a pre-determined distance from the anchor that is pre-determined at least in part dependently on a distance between the longitudinal site and a distal end of the catheter.

There is further provided, in accordance with an application of the present invention, a method, including:

transluminally anchoring a tissue anchor to tissue of a subject using an anchor-manipulation tool;

subsequently applying to the anchor a pulling force having a given magnitude;

using imaging, observing a movement of the tissue anchor in response to the pulling force; and

at least in part responsively to the observed movement, performing an action selected from the group consisting of: de-anchoring the tissue anchor from the tissue, and decoupling the anchor-manipulation tool from the tissue anchor.

There is further provided, in accordance with an application of the present invention, apparatus, for implantation at a native valve of a heart of a subject, the native valve being disposed between an atrium and a ventricle of the heart, the apparatus including:

a tubular valve body:

having an upstream portion, configured to be disposed in the atrium of the heart of the subject,

having a downstream portion, configured to be disposed in the ventricle of the subject,

having an elastic portion, disposed between the upstream portion and the downstream portion, and elastically coupling the upstream portion to the downstream portion, and

shaped to define a continuous lumen through the upstream portion, the elastic portion, and the downstream portion; and

at least one valve member, disposed in the lumen of the valve body, and configured to facilitate flow of blood of the subject from the upstream portion of the valve body to the downstream portion of the valve body, and to inhibit flow of the blood from the downstream portion of the valve body to the upstream portion of the valve body.

In an application, the at least one valve member is coupled to the downstream portion of the valve body.

In an application, the native valve includes a plurality of native leaflets, and the downstream portion of the valve body is configured to be coupled to the native leaflets.

5 In an application, the apparatus further includes a plurality of clips, configured to facilitate the coupling of the downstream portion of the valve body to the native leaflets.

In an application, each clip:

includes at least two clip arms, articulatably coupled to each other, and is reversibly closeable.

10 In an application, the clips are coupled to the downstream portion of the valve body, and the downstream portion of the valve body is configured to be coupled to the native leaflets by the clips being coupled to the native leaflets.

In an application, each clip of the plurality of clips is articulatably coupled to the downstream portion of the valve body.

15 In an application, the native valve includes an annulus having an upstream surface, and the apparatus further includes a prosthetic valve support:

including (1) an upstream support portion, configured to be placed against the upstream surface of the annulus of the native valve, and (2) the plurality of clips, coupled to the upstream support portion,

20 shaped to define an opening therethrough that is configured to receive the prosthetic valve,

and the clips are configured to facilitate the coupling of the downstream portion of the valve body to the native leaflets by coupling the prosthetic valve support to the native leaflets.

25 There is further provided, in accordance with an application of the present invention, apparatus for use with a native valve of a heart of a subject, the native valve having a plurality of leaflets that meet at a plurality of commissures, the apparatus including:

30 at least one tissue anchor, configured to be anchored to a first site within a ventricle of the heart of the subject;

at least one longitudinal member, coupled at a distal end thereof to a respective one of the at least one tissue anchors;

an upstream support, including an upstream support portion configured to be slidable over the longitudinal member and placed against an upstream surface of the native valve; and

at least one locking member, configured to be slidable over a respective one of the  
5 at least one longitudinal members, and to be lockable to the respective longitudinal member such that a portion of the respective longitudinal member that is disposed between the respective anchor and the upstream support portion is longer than 1 cm.

In an application, the longitudinal member is flexible.

In an application, the longitudinal member includes a suture.

10 There is further provided, in accordance with an application of the present invention, a method for use with a native valve of a heart of a subject, the native valve having a plurality of leaflets that meet at a first commissure and at a second commissure, the method including:

anchoring a first tissue anchor to a first site within a ventricle of the heart of the  
15 subject, the first tissue anchor being coupled to a distal end of a first longitudinal member;

anchoring a second tissue anchor to a second site within the ventricle of the heart of the subject, the second tissue anchor being coupled to a distal end of a second longitudinal member;

subsequently, placing at least an upstream support portion of a prosthetic valve  
20 support against an upstream surface of the native valve, the valve being disposed between the ventricle and an atrium of the heart of the subject; and

securing the upstream support portion against the upstream surface of the valve by:

coupling the upstream support portion to the first longitudinal member such  
25 that at least part of a portion of the first longitudinal member that is disposed between the upstream support portion and the first tissue anchor, is disposed between the first and second leaflets at the first commissure, and

coupling the upstream support portion to the second longitudinal member  
such that at least part of a portion of the second longitudinal member that is  
30 disposed between the upstream support portion and the first tissue anchor, is disposed between the first and second leaflets at the second commissure.

In an application, anchoring, placing, and securing include anchoring, securing, and placing without the use of cardiopulmonary bypass.

In an application, anchoring to the first site and anchoring to the second site include anchoring to myocardium.

In an application, placing the upstream support portion against the upstream surface includes sliding the upstream support portion over at least part of the first  
5 longitudinal member.

In an application, coupling the upstream support portion to the first longitudinal member and to the second longitudinal member includes coupling the upstream support portion to the first longitudinal member in the atrium of the heart of the subject, and coupling the upstream support portion to the second longitudinal member includes  
10 coupling the upstream support portion to the second longitudinal member in the atrium of the heart of the subject.

In an application, the leaflets move in response to beating of the heart of the subject, and securing the upstream support portion includes securing the upstream support portion without eliminating the movement of the native leaflets.

In an application, coupling the upstream support portion to the first longitudinal member includes coupling the upstream support portion to the first longitudinal member such that a length of the portion of the first longitudinal member is greater than 1 cm.  
15

In an application, the method further includes:

transluminally advancing at least the first tissue anchor to the first site while the  
20 respective longitudinal member coupled thereto is disposed within a respective tubular member; and

subsequently to anchoring the at least first tissue anchor, and before coupling the upstream support portion to the respective longitudinal member, sliding the at least first tubular member off of at least part of the respective longitudinal member.

In an application, sliding the at least first tubular member includes sliding at least part of the at least first tubular member through a channel defined by a locking member, and coupling the upstream support portion to the respective longitudinal member includes locking the locking member to the respective longitudinal member by narrowing at least a portion of the channel.  
25

In an application:  
30

advancing the at least first tissue anchor includes advancing the at least first tissue anchor while (1) the respective longitudinal member is reversibly coupled to a portion of a

wire, and (2) the respective tubular member inhibits the portion of the wire from decoupling from the portion of the wire, and

the method further includes facilitating decoupling of the wire from the respective longitudinal member by sliding the at least first tubular member off of the portion of the  
5 wire.

In an application:

advancing the at least first tissue anchor includes advancing the at least first tissue anchor while (1) the respective longitudinal member is shaped to define a loop, and is coupled to the portion of the wire by the portion of the wire being threaded through the  
10 loop, and (2) the respective tubular member inhibits the portion of the wire from unthreading from the loop, and

facilitating decoupling of the wire from the respective longitudinal member includes facilitating unthreading of the wire from the loop by sliding the at least first tubular member off of the portion of the wire.

15 In an application, sliding the at least first tubular member off of the portion of the wire includes sliding the at least first tubular member off of the portion of the wire by applying less than 500 g of pulling force to the at least first tubular member.

In an application, applying less than 500 g of pulling force to the at least first tubular member includes applying less than 300 g of pulling force to the at least first  
20 tubular member.

In an application, the method further includes, subsequently to securing the upstream support portion, coupling a prosthetic valve to the prosthetic valve support.

In an application, the upstream support portion has an inner edge that defines an opening through the upstream support portion, and coupling the prosthetic valve to the  
25 prosthetic valve support includes placing at least a portion of the prosthetic valve within the opening, and expanding at least the portion of the prosthetic valve such that at least the portion of the prosthetic valve applies a radially-expansive force against the inner edge of the upstream support portion.

In an application, the prosthetic valve includes one or more tissue-engaging  
30 elements, each of the one or more tissue-engaging elements including at least two arms, and the method further includes, subsequent to securing the upstream support portion,

coupling the prosthetic valve to at least one of the leaflets by sandwiching the at least one of the leaflets between the at least clip arms of the one or more tissue-engaging elements.

In an application, coupling the prosthetic valve to the at least one of the leaflets includes coupling the prosthetic valve to the at least one of the leaflets before coupling the prosthetic valve to the prosthetic valve support.

In an application:

the prosthetic valve includes a valve body, having an outer surface,

the at least two arms include a first arm and a second arm, the first arm being longer than the second arm, and

the method further includes:

delivering, within a delivery tube, the prosthetic valve in a delivery configuration thereof, in which the first arm and the second arm are constrained against the outer surface of the valve body;

facilitating deflection of the first arm away from the outer surface of the prosthetic valve, by advancing a first portion of the prosthetic valve out of the delivery tube such that the first arm automatically deflects away from the outer surface of the prosthetic valve; and

facilitating deflection of the second arm away from the outer surface of the prosthetic valve, by advancing a second portion of the prosthetic valve out of the delivery tube such that the second arm automatically deflects away from the outer surface of the prosthetic valve.

In an application:

facilitating deflection of the first arm includes facilitating deflection of the first arm a first angle from the outer surface of the prosthetic valve, and

the method further includes facilitating deflection of the first arm away from the outer surface of the prosthetic valve a second angle that is greater than the first angle, by applying a force to the first arm using the delivery tube:

subsequently to facilitating deflection of the first arm the first angle, and prior to facilitating deflection of the second arm.

In an application, applying the force to the first arm using the delivery tube includes pushing on the first arm by sliding the delivery tube over at least part of the prosthetic valve.

There is further provided, in accordance with an application of the present invention, apparatus for use with a body of a subject, the apparatus including:

at least a first implantable member;

a first longitudinal member, coupled at a distal end thereof to the first implantable member;

a second longitudinal member, at least a portion of the second longitudinal member being reversibly couplable to the first longitudinal member; and

a tubular member:

slidable over the first and second longitudinal members,

shaped to define a lumen therethrough, and

configured, when the portion of the second longitudinal member is (1) coupled to the first longitudinal member, and (2) disposed within the lumen of the tubular member, to inhibit decoupling of the portion of the second longitudinal member from the first longitudinal member.

In an application, the portion of the second longitudinal member is configured, when (1) the portion of the second longitudinal member is coupled to the first longitudinal member, and (2) the portion of the second longitudinal member is disposed outside of the lumen of the tubular member, to be decouplable from the first longitudinal member by the second longitudinal member being pulled away from the first longitudinal member.

In an application, at least one longitudinal member selected from the group consisting of: the first longitudinal member and the second longitudinal member, is flexible.

In an application, the tubular member is more rigid than the first longitudinal member.

In an application, the tubular member fits snugly over at least the portion of the second longitudinal member.

In an application, the first implantable member includes a tissue anchor, configured to be anchored to a tissue of the subject.

In an application, the apparatus further includes a second implantable member, slidable over the tubular member, and couplable to the first longitudinal member while the portion of the second longitudinal member is coupled to the first longitudinal member.

In an application, the portion of the second longitudinal member is reversibly couplable to the first longitudinal member at a first site of the first longitudinal member, and the second implantable member is couplable to the first longitudinal member at a second site of the first longitudinal member that is distal to the first site of the longitudinal member.

In an application, the apparatus further includes a locking member having an unlocked state and a locked state, and configured to be slid over the tubular member in the unlocked state and to be locked to the first longitudinal member by being transitioned to the locked state.

In an application, the locking member is configured to facilitate coupling of the second implantable member to the first longitudinal member.

In an application, the locking member is configured to be coupled to the first longitudinal member at least 1 cm away from the first implantable member.

There is further provided, in accordance with an application of the present invention, apparatus for use at a native valve of a heart of a subject, the apparatus including:

a tissue anchor, configured to be transluminally, transcatheterally advanced to a ventricle of the heart of the subject, and to be coupled to tissue of the ventricle;

a longitudinal member, coupled at a distal end thereof to the tissue anchor;

a wire, a portion of the wire being reversibly couplable to the longitudinal member;

a tubular member:

slidable over the longitudinal member and the wire,

shaped to define a lumen therethrough, and

configured, when the portion of the wire is (1) coupled to the longitudinal member, and (2) disposed within the lumen of the tubular member, to inhibit decoupling of the portion of the wire from the longitudinal member;

a prosthetic valve support including an upstream support portion slidable over the tubular member, and to be placed against an upstream surface of an annulus of the native valve by sliding over the tubular member; and

a locking member, slidable over the tubular element and lockable to the longitudinal member.

In an application, the locking member is configured to be locked to the longitudinal member at a site of the longitudinal member that is distal to a site of the longitudinal member to which the portion of the wire is reversibly couplable.

In an application, the tubular member is configured to be slid out of the locking member before the locking member is locked to the longitudinal member.

In an application, the apparatus further includes a control rod, slidable over the tubular member, the locking member being reversibly coupled to a control rod, the control rod being configured to restrain the locking member in an unlocked configuration thereof, and to facilitate locking of the locking member by ceasing to restrain the locking member in the unlocked configuration.

In an application, the control rod is configured to decouple from the locking member when the control rod ceases to restrain the locking member in the unlocked configuration thereof.

In an application, the control rod is configured to cease to restrain the locking member in the unlocked configuration thereof by the control rod being rotated with respect to the locking member.

In an application:

the prosthetic valve support is shaped to define a hole through which the tubular member is slidable,

at least while the control rod is coupled to the locking member, the control rod is not slidable through the hole defined by the prosthetic valve support, and the control rod is configured to facilitate the sliding of the prosthetic valve support over the tubular member by pushing the prosthetic valve support over the tubular member.

The present invention will be more fully understood from the following detailed description of applications thereof, taken together with the drawings, in which:

### **BRIEF DESCRIPTION OF THE DRAWINGS**

Figs. 1A-F are schematic illustrations of a system for implanting a prosthetic valve support and a prosthetic valve at a native valve of a heart of a subject, in accordance with some applications of the invention;

Fig. 2 is a schematic illustration of the prosthetic valve being retrieved into a delivery tube, in accordance with some applications of the invention;

Figs. 3A-C are schematic illustrations of the introduction of guide members through the prosthetic valve support and a delivery tube, in accordance with some applications of the invention;

5 Figs. 4A-C are schematic illustrations of a locking member, and control thereof, in accordance with some applications of the invention;

Fig. 5 is a schematic illustration of steps in the delivery and anchoring of tissue anchors, in accordance with some applications of the invention;

Fig. 6 is a schematic illustration of a system for use with a prosthetic valve support, in accordance with some applications of the invention;

10 Figs. 7A-C are schematic illustrations of a system for facilitating transluminal delivery of a prosthetic valve assembly, in accordance with some applications of the invention;

Figs. 8A-H are schematic illustrations of a technique for use with the system of Figs. 7A-C, to transluminally implant a prosthetic valve assembly, in accordance with  
15 some applications of the invention;

Figs. 9A-B, 10A-B, 11A-B, 12A-B, 13A-B, and 14A-B are schematic illustrations of prosthetic valve assemblies, in accordance with some applications of the invention;

20 Figs. 15A-C are schematic illustrations of a tool for facilitating application of force between a prosthetic valve assembly and tethers, in accordance with some applications of the invention;

Fig. 16 is a schematic illustration of a system comprising a prosthetic valve assembly and one or more springs, via which the prosthetic valve assembly is elastically coupled to one or more tissue anchors, in accordance with some applications of the invention;

25 Fig. 17 is a schematic illustration of a system comprising a prosthetic valve assembly and one or more springs, via which the prosthetic valve assembly is elastically coupled to one or more tissue anchors, in accordance with some applications of the invention;

30 Figs. 18A-B are schematic illustrations of springs coupled to respective tethers so as to elastically couple a tissue anchor to a prosthetic valve assembly, in accordance with some applications of the invention;



muscles. Typically, and as shown, anchors 48 comprise helical anchors that are anchored by being rotated. However, other types of anchors may be used, such as barbed or harpoon-like anchors, e.g., that are anchored by being pushed into the tissue.

5 State A of Figs. 1A and 1B show a catheter 50 having been advanced through sheath 46 and into ventricle 8, and an anchor-delivery tube 52 having been advanced through catheter 50 to the respective ventricular site. Typically, and as shown, the distal end of delivery tube 52 is placed against the tissue at the ventricular site. Typically, at least a distal portion of catheter 50 is steerable (e.g., independently of sheath 46).

10 State B of Figs. 1A and 1B each show a respective anchor 48 being anchored to a respective ventricular site. Typically, anchor 48 is reversibly coupled to an anchor manipulator 54 (e.g., an anchor driver), which is slidable through at least part of tube 52, and which is configured to apply a force (e.g., a rotational force) to the anchor so as to anchor the anchor at the ventricular site. For some applications, anchor manipulator 54 and anchor 48 are advanced from outside the subject to the ventricular site only once the  
15 distal end of tube 52 is disposed against the ventricular site. For some applications, the manipulator and anchor are disposed within, and advanced with, tube 52. For some applications, anchor 48 is anchored by rotating anchor manipulator 54 and tube 52 together. For some applications, a separate anchor manipulator 54 is used to deliver and anchor each anchor 48 (e.g., each anchor 48 may be provided pre-coupled to a respective  
20 anchor manipulator). For some applications, one anchor manipulator 54 may be used to deliver and anchor all (e.g., both) anchors 48 (e.g., each anchor 48 may be configured to be sequentially coupled to the anchor manipulator outside the body of the subject by the operating physician). It is to be noted that typically anchor 48 is not exposed from tube 52 other than when being anchored. It is hypothesized that for some applications this reduces  
25 a likelihood of inadvertently engaging and/or damaging tissue of the heart (e.g., chordae tendineae).

For some applications, subsequent to anchoring each tissue anchor 48 to the tissue, a testing pulling force of known magnitude is applied to the anchor (e.g., by applying the pulling force to anchor manipulator 54), and movement of the tissue anchor in response to  
30 the pulling force is observed using imaging (e.g., fluoroscopy). The observed movement may be used to confirm successful and/or stable anchoring (e.g., relatively little movement may indicate firm anchoring in firm tissue) or to determine sub-optimal anchoring (e.g., relatively large movement may indicate weak anchoring and/or anchoring in weak tissue).

Thus, at least in part responsively to the observed movement, the operating physician may decouple manipulator 54 from anchor 48, or may de-anchor the anchor from the tissue using the manipulator.

5 State C of Figs. 1A and 1B show anchor manipulator 54 having been decoupled from anchor 48, and the manipulator and tube 52 being withdrawn proximally into catheter 50. Each anchor 48 is provided pre-coupled to a guide member 56 (e.g., a first guide member 56a, and a second guide member 56b), described in more detail hereinbelow (e.g., with reference to Figs. 1D and 4A-C). As manipulator 54 and tube 52 are withdrawn, guide member 56 is exposed from tube 52.

10 Typically, and as shown in Figs. 1A-B, the same catheter 50 is used to deliver both anchors 48. For such applications, and as shown in states B and C of Fig 1B, when delivering second tissue anchor 48b, anchor-delivery tube 52 fits alongside first guide member 56a within catheter 50. Alternatively, and as described hereinbelow with reference to Fig. 5, a separate catheter is used for each anchor, in which case the second  
15 catheter fits alongside first guide member 56a within sheath 46.

State D of Figs. 1A and 1B show catheter 50 having been withdrawn proximally, into atrium 6. For some applications, catheter 50 is withdrawn completely from the body of the subject. For some applications, catheter 50 is used for delivery of components during later steps in the procedure. Guide members 56 extend from atrium 6, between  
20 leaflets 14, and to respective ventricular sites. Typically, guide members 56 do not eliminate functioning of leaflets 14 and/or valve 10. For some applications, guide members 56 are configured to automatically move toward respective commissures 16 (e.g., into the joining corners at the commissures of leaflets 14). For some applications, and as shown in Fig. 1C, prosthetic valve support 42 (e.g., deployment thereof) pushes  
25 guide members 56 toward the respective commissures.

Reference is now made to Fig. 1C, which shows prosthetic valve support being delivered to, and deployed at, native valve 10. Prosthetic valve support 42 is advanced through sheath 46 and into atrium 6. Typically, support 42 is delivered in a compressed configuration thereof, within a housing, such as a delivery tube 80. For some applications,  
30 catheter 50 is used to facilitate delivery of prosthetic valve support 42 and delivery tube 80 (e.g., the support and delivery tube are advanced through catheter 50). For some applications, a different catheter is used to facilitate delivery of prosthetic valve support 42

and delivery tube 80. For some applications, prosthetic valve support 42 and delivery tube 80 are advanced directly through sheath 46.

Prosthetic valve support 42 comprises an annular upstream support portion 43 which, in the delivery configuration of the prosthetic valve support, is generally cylindrical, and which, once the prosthetic valve is deployed and expands to an uncompressed configuration thereof, is generally annular. For some applications, upstream support portion 43 is generally frustoconical in the uncompressed configuration thereof. Typically, a distal end of upstream support portion 43 in the compressed, cylindrical configuration, defines an inner perimeter of the upstream support portion in the uncompressed configuration, the inner perimeter defining an opening through the upstream support portion.

State A of Fig. 1C shows delivery tube 80, containing support 42, having been delivered to atrium 6 over guide members 56, and support 42 starting to be subsequently exposed from the delivery tube, and automatically expanding. Upstream support portion 43 of prosthetic valve support 42 is shaped to define holes 82 through which guide members 56 are slidable, thereby facilitating sliding of the prosthetic valve support over guide members 56. Typically, holes 82 are disposed opposite each other around the generally annular shape of upstream support portion 43. For some applications, holes 82 are defined and/or reinforced by an eyelet 84 or pledget (visible in states B and C of Fig. 1C). Guide members 56 extend proximally from delivery tube 80, e.g., via holes in a proximal end of the delivery tube, such that the delivery tube, and prosthetic valve support 42, in the compressed state within the delivery tube, are slidable over the guide members, the guide members thereby facilitating delivery of the prosthetic valve support within the delivery tube. Introduction of guide members 56 through the prosthetic valve support and delivery tube are described hereinbelow with reference to Figs. 3A-C.

State B of Fig. 1C shows prosthetic valve support 42 (e.g., upstream support portion 43 thereof) having been completely deployed from delivery tube 80, and having automatically expanded to the uncompressed configuration thereof. Guide members 56 are typically pushed toward commissures 16 by the expansion of support 42. For some applications, delivery tube 80 is subsequently removed from the body of the subject. A tubular control rod 86 is advanced over each guide member 56 toward prosthetic valve support 42, and is used to push prosthetic valve support 42 (e.g., upstream support portion 43 thereof) toward the annulus of valve 10. Control rods 86 have a cross-sectional

diameter that is larger than that of holes 82, and may thereby be used to push against upstream support portion 43 without passing through the holes.

Typically, prosthetic valve support 42 (e.g., upstream support portion 43 thereof) is provided with one or more (e.g., two) control filaments 88 reversibly coupled thereto. Typically, filaments 88 are coupled to upstream support portion 43 at sites that are disposed opposite each other around the generally annular shape of the upstream support portion, and disposed evenly between holes 82. That is, in the expanded configuration of upstream support portion 43, a straight line between holes 82 is typically perpendicular to a straight line between the sites at which filaments 88 are coupled to the upstream support portion. It should be noted that other numbers and arrangements of control filaments may also be used. Typically, each control filament 88 (1) comprises two portions of a loop of filament that passes through upstream support portion 43, loops around a downstream surface of the upstream support portion (i.e., the surface that is placed in contact with the annulus of the native valve), and passes back through the upstream support portion, and (2) is decouplable from the upstream support portion by releasing a first end of the filament and pulling a second end, thereby unthreading and/or unlooping the control filament from the upstream support portion.

Control filaments 88 facilitate some manipulation of prosthetic valve support 42 following deployment from delivery tube 80. Typically, control rods 86 further facilitate such manipulation. State C of Fig. 1C shows such manipulation of prosthetic valve support 42. For example, it may be desirable to rotate the prosthetic valve support (e.g., to position and/or orient the upstream support portion correctly with respect to native valve 10, to control the order in which different regions of upstream support portion 43 contact the native valve, and/or to uncoil control rods 86 and/or control filaments 88 from each other).

Reference is now made to Fig. 1D, which show steps in securing prosthetic valve support 42 against the upstream surface (e.g., the atrial surface) of native valve 10. Each guide member 56 typically comprises a tether (e.g., a longitudinal member 102), a pull-wire 104 reversibly coupled to the longitudinal member, and a tubular member 100 in which the longitudinal member and the pull-wire are disposed, the tubular member fitting snugly over the longitudinal member and the pull-wire so as to inhibit the pull-wire from becoming decoupled from the longitudinal member (e.g., to maintain a state of coupling therebetween). Pull-wire 104 may or may not be metallic and may have various cross-

sectional shapes (e.g., circular or rectangular). Typically, (1) longitudinal member 102 defines a loop (e.g., a closed loop) (2) a portion (e.g., a distal portion) of pull-wire 104 is threaded through the loop defined by member 102 (e.g., is looped through the loop), and (3) the snug fitting of tubular member 100 over member 102 and pull-wire 104 inhibits the portion of the pull-wire from unthreading from the loop. It is to be noted that, although longitudinal member 102 is shown as defining a loop that extends most (e.g., all) of the length of the longitudinal member, the loop may alternatively be defined only at a proximal end of the longitudinal member.

For some applications, longitudinal member 102 and pull-wire 104 are coupled via complementary screw threads. For example, longitudinal member 102 may comprise, or be coupled to, a screw at a proximal end thereof, and pull-wire 104 may comprise, or be coupled to, a socket at a distal end thereof. For some applications, tubular member 100 is used to decouple (e.g., unscrew) pull-wire 104 from longitudinal member 102.

Tubular member 100 is typically more rigid than pull-wire 104 and/or longitudinal member 102 (although it is still sufficiently flexible to be transluminally delivered). This rigidity reduces a likelihood of twisting, kinking, snagging, and/or other undesirable phenomenon or interactions within the transluminal delivery system (e.g., within sheath 46, catheter 50, and/or anchor-delivery tube 52). For some applications tubular member 100 has a smoother surface than does pull-wire 104 or longitudinal member 102. For some applications, tubular member 100, which is necessarily wider than pull-wire 104 and/or longitudinal member 102, is also more visible using imaging techniques such as fluoroscopy. This advantageously allows an operating physician to monitor the intracorporeal juxtaposition of the tubular members and, if necessary, to intervene, such as by revolving the tubular members (e.g., proximal ends thereof) around each other.

As described hereinabove, control rods 86 are used to push prosthetic valve support 42 toward the annulus of valve 10 by sliding the control rod over a respective guide member 56 (i.e., over the tubular member 100 of the respective guide member). Each control rod 86 is reversibly coupled at a distal end thereof to a respective locking member 110 that, in an unlocked state thereof, is slidable over guide member 56. Thereby, the pushing of prosthetic valve support 42 is typically performed by pushing with both control rod 86 and locking member 110. State A of Fig. 1D shows control rods 86 and respective locking members 110 having been slid over respective tubular members 100 of respective guide members 56, such that prosthetic valve support 42 has been

pushed against the annulus of valve 10. Typically, a counter force (e.g., a proximal pulling force) is applied to guide member 56 (e.g., to tubular member 100, longitudinal member 102, and pull-wire 104) so as to facilitate such sliding.

State B of Fig. 1D shows tubular member 110 having been pulled proximally such that the distal end of the tubular member is disposed proximal to locking member 110, thereby exposing, from the tubular member, progressive portions of longitudinal member 102, at least until the tubular member is not disposed between the longitudinal member and the locking member (e.g., such that the locking member can directly contact the longitudinal member). Typically, and as shown in state B of Fig. 1D, tubular member 100 is pulled proximally such that the distal end thereof is disposed distal to the point at which longitudinal member 102 and pull-wire 104 are coupled, thereby retaining the coupling therebetween. While in this state, locking member 110 is locked to longitudinal member 102 (e.g., to a portion of the longitudinal member that is disposed within a channel of the locking member). For some applications, locking member 110 locks automatically in response to withdrawal of tubular member 100. For some applications, locking of locking member 110 is independent of the withdrawal of the tubular member. An embodiment of locking member 110 and control thereof is described in more detail hereinbelow with respect to Figs. 4A-C. It is to be noted that the scope of the invention also comprises the use of other locking members such as crimp-based locking members, and also comprises other locking techniques such as tying.

Subsequently, and as shown in state C of Fig. 1D, tubular member 100 is pulled further proximally, such that the distal end of the tubular member is disposed proximal to the point at which longitudinal member 102 and pull-wire 104 are coupled, such that the pull-wire is decouplable from the longitudinal member (e.g., unthreadable from the loop defined by the longitudinal member).

Typically, anchors 48 and longitudinal members 102 are configured to withstand a pulling force of at least 500 g, so as to withstand forces within the beating heart. The apparatus is typically configured such that a pulling force required to pull tubular member 100 proximally, is less than 500g, such as less than 300 g. For some applications, such a configuration is achieved at least in part by reducing friction between tubular member 100 and pull-wire 104, such as by thermally treating the pull-wire 104.

Subsequently, control rod 86, tubular member 100, and pull-wire 104 are pulled proximally, as shown in state D of Fig. 1D, thereby separating the control rod from

locking member 110, and the pull-wire from longitudinal member 102. In order for control rod 86 to be pulled proximally, the control rod is decoupled from locking member 110 prior to said pulling. For some applications, the decoupling of control rod 86 from locking member 110 is synchronous with the locking of the locking member (e.g., the same action locks the locking member and decouples the control rod from the locking member, such as described hereinbelow with respect to Figs. 4A-C). For some applications, the decoupling of the control rod from the locking member is independent of the locking of the locking member.

It is to be noted that, as shown in Fig. 1D, for some applications, prosthetic valve support 42 (e.g., upstream support portion 43 thereof) is secured to the upstream surface of the annulus of native valve 10, only by anchors 48 that are anchored to tissue in ventricle 8 of the subject. It is also to be noted that prosthetic valve support 42 is coupled to longitudinal members 102 in atrium 6 of the subject. Typically, a distance L1 between each anchor 48 and the point of upstream support portion 43 to which it is coupled (e.g., to a respective hole 82 and/or locking member 110) is greater than 0.5 cm, e.g., greater than 1 cm, such as greater than 2 cm. That is, the length of each longitudinal member 102 that is disposed between a respective anchor and upstream support portion 43 is typically greater than 0.5 cm, e.g., greater than 1 cm, such as greater than 2 cm. The length of each longitudinal member 102 that is disposed between the respective anchor and the upstream support portion is typically less than 10 cm (e.g., less than 7 cm, such as less than 5 cm). Thereby, the ventricular sites at which anchors 48 are anchored are typically more than 0.5 cm (e.g., more than 1 cm, such as more than 2 cm) away from prosthetic valve support 42.

Reference is now made to Fig. 1E-F, which show steps in the delivery and implantation of prosthetic valve 44 at native valve 10, facilitated by prosthetic valve support 42. Prosthetic valve 44 is advanced in a delivery configuration (e.g., in a compressed state), through sheath 44, typically within a delivery tube 120. Prosthetic valve 44 comprises a stent-like valve body 122, typically comprising an expandable frame that typically contains a shape-memory material such as nitinol. Valve body 122 is shaped to define a lumen therethrough, and an inner surface of the valve body is typically lined with a covering, such as a fabric. One or more prosthetic valve members (not shown for clarity), such as prosthetic leaflets, are coupled to valve body 122 and disposed within the lumen thereof.

Prosthetic valve 44 further comprises one or more tissue-engaging elements 124. Typically, and as shown, valve 44 comprises two tissue-engaging elements 124 coupled to valve body 122 at sites that are on opposite sides of the circumference of the valve body. Each tissue-engaging element 124 typically comprises two arms 126 (e.g., a first clip arm 5 126a and a second clip arm 126b). For some applications, and as shown, each arm 126 defines an arc that is coupled to valve body 122 at the base of the arc. For example, and as shown, each arm 126 may comprise a single arc of the same shape-memory material as the frame of valve body 122. For some applications, one or both arms 126 of each tissue-engaging element 124 may be covered in a covering, such as a fabric.

10 When valve 44 is in the compressed state thereof within delivery tube 120, arms 126 are held against valve body 122 with a tip 127 of each arm disposed proximally to a site at which that arm is coupled to the valve body. Each tissue-engaging element 124 is configured such that a tip 127a of arm 126a is disposed distal to a tip 127b of arm 126b. For example, arm 126a may be shorter than arm 126b. Alternatively or additionally, arm 15 126a may be coupled to valve body 122 at a site that is distal to a site at which arm 126b is coupled to the valve body.

Prosthetic valve 44, within delivery tube 120, is advanced distally between leaflets 14 of native valve 10, and the prosthetic valve is progressively advanced distally out of a distal end of the delivery tube, as shown in states A-B of Fig. 1E. It is to be noted that 20 leaflets 14 typically continue to function following implantation of prosthetic valve support 42, and may further continue to function while delivery tube 120 is disposed therebetween; the leaflets typically coapt around the delivery tube. At a given degree of advancement of prosthetic valve 44 out of delivery tube 120, first arm 126a is deployed: tip 127a of each first arm 126a becomes exposed from the delivery tube and each arm 25 126a responsively deflects radially outward from valve body 122, toward a pre-set position (state B of Fig. 1E). Tip 127b of each arm 126b remains within delivery tube 120. Throughout the procedure, as distal portions of valve body 122 are progressively exposed from delivery tube 120, they typically automatically expand toward an expanded state

30 Subsequently, and as shown in state D of Fig. 1E, prosthetic valve 44 and delivery tube 120 are moved proximally (e.g., atrially) such that arm 126a of each tissue-engaging element 124 engages (e.g., captures) a leaflet 14 of native valve 10, e.g., such that a portion of each leaflet is disposed between (1) each arm 126a and (2) a respective second

arm 126b and valve body 122. Optionally, subsequently to deployment of first arm 126a and prior to moving prosthetic valve 44 proximally, the first arm is deflected further from valve body 122 than its pre-set position by applying a force to the first arm using the delivery tube. That is, an angle between the first arm and an outer surface of the valve  
5 body is increased by applying the force to the first arm using the delivery tube.

Typically, the force is applied by moving delivery tube 120 distally with respect to the prosthetic valve (e.g., sliding the delivery tube over at least part of the prosthetic valve), so as to push the arm, as shown in state C of Fig. 1E. It is hypothesized that such "opening" of tissue-engaging element 124 facilitates engagement of leaflets 14 (e.g.,  
10 engagement of a larger portion of leaflets 14). Subsequently, delivery tube 120 is returned proximally with respect to prosthetic valve 44, such that arm 126a returns toward its pre-set position (state D of Fig. 1E). For some applications, until at least the step shown in state D of Fig. 1E, prosthetic valve 44 is retrievable into delivery tube 120 and removable from the body of the subject, e.g., as described hereinbelow with respect to Fig. 2.

Subsequently, delivery tube 120 is pulled further proximally with respect to  
15 prosthetic valve 44, such that tip 127b of second arm 126b of each tissue-engaging element 124 becomes exposed from the delivery tube, and each arm 126b responsively deflects radially outward from valve body 122, toward a pre-set position (state A of Fig. 1F), thereby coupling the tissue-engaging element to the leaflet by sandwiching a portion  
20 of a leaflet 14 between the first and second arms of each tissue-engaging element. Second arm 126b is typically configured, when completely unrestricted (e.g., in the absence of leaflet 14) to have a pre-set position that is close to that of first arm 126a, planar with that of first arm 126a, and/or further from valve body 122 than is arm 126a. For some applications, the difference in size and/or position of the arc of second arm 126b to that of  
25 first arm 126a facilitates the second arm to move into plane with, and/or beyond the plane of, the first arm.

Subsequently, prosthetic valve 44 is fully deployed by a proximal end of the prosthetic valve (e.g., valve body 122 thereof) being exposed from delivery tube 120 (e.g., by further withdrawing the delivery tube proximally with respect to the prosthetic  
30 valve)(state C of Fig. 1F). The proximal end of prosthetic valve 44 responsively (e.g., automatically) expands toward the expanded state thereof. Expansion of the prosthetic valve (e.g., of valve body 122 thereof) applies a radially-expansive force against prosthetic valve support 42 (e.g., against an inner perimeter of upstream support portion 43 thereof),

thereby coupling the prosthetic valve to the prosthetic valve support. Typically, prosthetic valve support 42 (e.g., the inner perimeter of upstream support portion 43) restricts expansion of prosthetic valve 44, at least in part.

For some applications, and as shown in state B of Fig. 1F, subsequently to the  
5 coupling of tissue-engaging elements 124 to leaflets 14, and prior to coupling of prosthetic valve 44 to prosthetic valve support 42, the prosthetic valve is pulled proximally, e.g., so as to align a portion of valve body 122 with upstream support portion 43 and/or to draw leaflets 14 toward the upstream support portion.

It is to be noted that, for some applications, each tissue-engaging element 124  
10 comprises only one arm 126. For some such applications, the one arm 126 comprises and/or functions like first arm 126a described herein. For some such applications, the one arm 126 is configured to couple to the leaflet by sandwiching a portion of the leaflet between the one arm and valve body 122. For some such applications, the one arm 126 is configured, when the prosthetic valve is pulled proximally as shown in state B of Fig. 1F,  
15 to sandwich a portion of the leaflet between the one arm and prosthetic valve support 42 (e.g., upstream support portion 43 thereof).

State D of Fig. 1F shows the implanted (e.g., final) state of prosthetic valve support 42 and prosthetic valve 44, following implantation thereof at native valve 10. For some applications, in this implanted state, prosthetic valve support 42 and prosthetic valve  
20 44 are inhibited from moving upstream (e.g., atrially) both by tissue anchors 48 and by tissue-engaging elements 124. That is, for some applications, resistance to forces on support 42 and valve 44 from the functioning of the heart of the subject, is provided in part by anchors 48 and in part by elements 124. For some applications, in this implanted state, prosthetic valve support 42 and prosthetic valve 44 are inhibited from moving  
25 upstream mostly (e.g., solely) by tissue-engaging elements 124. That is, for some applications, resistance to forces on support 42 and valve 44 from the functioning of the heart of the subject, is provided mostly (e.g., solely) by elements 124. For some such applications, anchors 48 and longitudinal members 102 are thereby only required until prosthetic valve 44 has been implanted. It is to be noted that in both cases, prosthetic  
30 valve support 42 (e.g., upstream support portion 43 thereof) inhibits movement ventricularly of prosthetic valve 44, and of the prosthetic valve support itself.

Reference is again made to Figs. 1D-F. For some applications, locking of locking members 110 to longitudinal members 102 and/or decoupling of pull-wires 104 from

longitudinal members 102 (Fig. 1D) is not performed until after implantation of prosthetic valve 44 (Figs. 1E-F). For such applications, it is thereby possible to adjust the length of the portion of longitudinal members 102 (e.g., tension on the longitudinal members) after implantation of prosthetic valve 44. For some applications, a similar advantage is conferred by locking members being reversibly lockable, being locked before implantation of prosthetic valve 44, and subsequently to implantation of the prosthetic valve, being unlocked to allow re-adjustment of longitudinal members 102.

Reference is again made to Figs. 1A-F. For some applications, anatomical dimensions of native valve 10 and/or surrounding tissues are determined (e.g., measured), and prosthetic valve support 42 and/or prosthetic valve 44 are selected accordingly (e.g., from a selection of prosthetic valve supports and/or prosthetic valves of different sizes). For example, an optimal lumen size (e.g., transverse cross-sectional area) for a prosthetic valve may be determined according to an area of the lumen defined by the annulus of the native valve of the subject. Responsively, a prosthetic valve having a lumen of that particular size may be selected. Similarly, a prosthetic valve support having an inner perimeter that defines an opening having a particular cross-sectional area may be selected, so as to restrict the expansion of a prosthetic valve to have a lumen of that particular size. Alternatively or additionally, a prosthetic valve support having an outer perimeter of a particular size may be selected according to determined dimensions of the annulus of the valve and/or walls of the atrium. It is to be noted that selecting a size according to determined anatomical dimensions may only in some cases comprise selecting a size that matches the anatomical dimensions. For example, an optimal size for the transverse cross-sectional area of a prosthetic valve is typically less than 90% of the area defined by the annulus of the native valve, so as to allow the leaflets of the native valve to coapt around the prosthetic valve and facilitate sealing.

Because prosthetic valve support 42 is typically implantable without eliminating functioning of the native leaflets, for some applications, the prosthetic valve support is implantable without the use of cardiopulmonary bypass. For some applications, prosthetic valve 44 is also implantable without the use of cardiopulmonary bypass.

Reference is made to Fig. 2, which is a schematic illustration of prosthetic valve 44 being retrieved into delivery tube 120, in accordance with some applications of the invention. As described hereinabove, for some applications, until at least the step shown in state D of Fig. 1E, prosthetic valve 44 is retrievable into delivery tube 120 and

removable from the body of the subject. Delivery tube 120 is moved distally with respect to prosthetic valve 44, in a manner similar to that used to push arms 127a, described with reference to Fig. 1E (state C), but such that delivery tube 120 is slid over the site at which arms 127a are coupled to valve body 122, thereby pushing arms 127a to deflect distally.

5 Prosthetic valve 44, including at least part of arms 127a, is drawn into delivery tube 120 (e.g., by sliding the prosthetic valve distally and/or the delivery tube proximally), and is typically subsequently removed from the body of the subject.

Reference is made to Figs. 3A-C, which are schematic illustrations of the introduction of guide members 56 through prosthetic valve support 42 and delivery tube 10 80, in accordance with some applications of the invention. As described hereinabove (e.g., with reference to Fig. 1C), prosthetic valve support 42 is slidable toward native valve 10, over guide members 56, including while the prosthetic valve support is compressed within delivery tube 80. Following coupling of anchors 48 to the ventricular sites, guide members 56 extend from the anchors to outside of the body of the subject, and 15 have respective free proximal ends 57. Before introduction of support 42 within tube 80 into the body of the subject (e.g., into sheath 46), guide members 56 are threaded through holes 82 in upstream support portion 43 of prosthetic valve 42, and through delivery tube 80, e.g., by the operating physician.

Typically, prosthetic valve support 42 is provided in the compressed state thereof, 20 within delivery tube 80, e.g., as a unit 140, coupled to a distal end of a controller 142 that is used to move the unit transluminally (e.g., within sheath 46). Unit 140 comprises (e.g., is provided having) one or more introducer tubes 144, each introducer tube being shaped to define a lumen therethrough, and having an open distal end 143 and an open proximal end 145. Distal end 143 of each tube is disposed outside a distal end of support 42 and/or 25 tube 80, and proximal end 145 of each tube is disposed outside a proximal end of the support and/or tube 80. Each introducer tube 144 passes (1) from the distal end thereof, (2) through a respective hole 82 in upstream support portion 43 from the downstream surface of the support portion (which defines an outer surface of the support portion in the compressed state thereof) to an upstream surface of the support portion (which defines an 30 inner surface of the support portion in the compressed state thereof), and (3) to the proximal end thereof.

As shown in Fig. 3A, free proximal end 57 of each guide member 56 is advanced through a respective introducer tube 144, thereby threading the guide member through

upstream support portion 43 of prosthetic valve support 42. Typically, and as shown in Fig. 3B, introducer tubes 144 are subsequently removed, prior to introduction of unit 140 into the body of the subject. That is, introducer tubes 144 are typically temporary. Fig. 3C shows upstream support portion 43 of prosthetic valve support 42 having been partially exposed from delivery tube 80, in order to illustrate the resulting threading of guide members 56 through upstream support portion 43.

Reference is made to Figs. 4A-C, which are schematic illustrations of locking member 110, and control thereof, in accordance with some applications of the invention. As described hereinabove, locking member 110 is slidable over guide member 56 (e.g., over tubular member 100 thereof). As also described hereinabove, locking member 110 is configured to lock to longitudinal member 102.

Fig. 4A shows locking member 110 in the unlocked state thereof, in which the locking member typically defines a channel therethrough through which tubular member 100 and longitudinal member 102, either within the tubular member or outside of the tubular member, are slidable. The channel of locking member 110 is defined by a generally tubular portion 160 of the locking member. Tubular portion 160 defines one or more, such as two, oblique slits 162 in the lateral walls thereof. Locking member 110 comprises locking element, such as a locking bar 164, that is disposed generally orthogonally to the channel of the locking member, and passes through the slits (e.g., through both slits) of the tubular member. When locking bar 164 is slid distally and/or proximally, the locking bar thereby moves across at least part of the channel defined by tubular portion 160. Locking member 110 further comprises a spring 166 that is configured to push locking bar 164 in a given direction (e.g., distally), thereby transitioning the locking member into the locked configuration thereof (i.e., locking the locking member)(Fig. 4B).

Locking member 110 is typically controllable using a holding member 112 that inhibits (e.g., prevents) the locking member from locking, such as by inhibiting movement of locking bar 164. As described hereinabove, each control rod 86, used to push prosthetic valve support 42 toward the annulus of valve 10, is reversibly coupled at a distal end thereof to a respective locking member 110, such that the pushing is typically performed by pushing with control rod 86 and locking member 110. For some applications, and as shown in Figs. 4A-C, holding member 112 comprises and/or is defined by control rod 86. For such applications, control rod 86 defines one or more slits 168 in a lateral wall thereof

(e.g., two slits 168 on opposite sides of the lateral wall of the control rod). Typically, slits 168 are L-shaped, thereby providing (1) a holding region 170 that is generally orthogonal to the proximal-distal (e.g., longitudinal) axis of control rod 86, and (2) a release region 172 that is generally parallel with the proximal-distal axis of the control rod, and that is open to the distal end of the control rod. Locking bar 164 is configured such that ends thereof extend at least into (e.g., through) slits 168.

In the unlocked state in which locking member 110 is advanced over guide member 56 toward upstream support portion 43 and the annulus of the native valve, the ends of locking bar 164 are disposed in holding region 170 of each slit 168, and the locking bar is thereby inhibited from moving distally and locking the locking member (Fig. 4A). In order to lock the locking member, control rod 86 is rotated with respect to locking member 110, such that the ends of locking bar 164 move into release region 172 of each slit 168. In this position, spring 166 is thereby able to move locking bar toward the distal end of release region 172, thereby locking the locking member (Fig. 4B).

As described hereinabove, tubular member 100 is typically withdrawn from locking member 110 before the locking member is locked, and the locking member is locked to longitudinal member 102, e.g., by locking bar 164 sandwiching longitudinal member 102 against the inner surface of the channel of the locking member (e.g., effectively narrowing the channel at the site of the locking bar). Movement of the ends of locking bar 164 into and through release region 172 also decouples control rod 86 from the locking member, allowing the control rod to be removed from the body of the subject (typically along with tubular member 100)(Fig. 4C). For some applications, longitudinal member 102 comprises suture. For some applications, long member 102 comprises a polymer, such as polyester. For some applications, longitudinal member 102 comprises a metal. For example, the longitudinal member may comprise one or more wires, such as a plurality of wires twisted or braided into a cable. It is hypothesized that for some applications, a metallic composition reduces compressibility of longitudinal member 102 and/or facilitates locking of locking member 110 to the longitudinal member.

It is to be noted that locking member 110 thereby (1) when unlocked, facilitates sliding therethrough of a relatively wide element, tubular member 100, and (2) when locked, locks to a relatively narrow element, longitudinal member 102. To facilitate this, between the locked and unlocked states, locking bar 164 thereby moves a sufficient distance across the channel defined by locking member 110. That is, locking bar 164

moves a larger distance than would be necessary to lock a similar locking member that does not facilitate, in the unlocked state thereof, sliding therethrough of a tubular member that is wider than the longitudinal element.

Reference is again made to Figs. 1D and 4A-C. It is to be noted that locking member 110 is typically configured to lock to longitudinal member 102 independently of  
5 (e.g., in the absence of) a complementary element, such as teeth, on the longitudinal member. For some applications, locking member 110 is configured to be coupled to any part of longitudinal member 102.

Reference is made to Fig. 5, which is a schematic illustration of steps in the  
10 delivery of tissue anchors 48 to ventricle 8, and anchoring of the anchors in the ventricle, in accordance with some applications of the invention. For some applications, the steps shown in Fig. 5 (and/or states A-D thereof) can be used in place of the steps shown in Fig. 1B (and/or states A/D thereof), mutatis mutandis (e.g., after the steps shown in Fig. 1A and/or before the steps shown in Fig. 1C). Fig. 1B shows one delivery catheter 50 being  
15 used to deliver both anchors 48, and when delivering second tissue anchor 48b, anchor-delivery tube 52 fitting alongside first guide member 56a within catheter 50. As stated hereinabove, for some applications, a separate catheter is used for each anchor. Fig. 5 shows one such application.

Typically, first anchor 48a is delivered and anchored as described hereinabove  
20 with reference to Fig. 1A, wherein catheter 50 in Fig. 1A comprises a first catheter 50a. Subsequently, and as shown in Fig. 5, a second catheter 50b is advanced through sheath 46, such that second catheter 50b is disposed alongside first guide member 56a within sheath 46. It is to be noted that, in both Fig. 1B and Fig. 5, two anchors 48 are anchored at  
25 respective ventricular sites, and two respective guide members 56, extend from the anchors, through atrium 6, and typically out of the body of the subject.

Reference is made to Fig. 6, which is a schematic illustration of a system 180 for  
use with prosthetic valve support 42, in accordance with some applications of the invention. For such applications of the invention, prosthetic valve support 42 is slidable  
toward native valve 10 over guide members 56, including while the prosthetic valve  
30 support is compressed within delivery tube 80. Following coupling of anchors 48 to the ventricular sites, guide members 56 extend from the anchors to outside of the body of the subject, and have respective free proximal ends 57. Before introduction of support 42 within tube 80 into the body of the subject (e.g., into sheath 46), guide members 56 are

threaded through holes 82 in upstream support portion 43 of prosthetic valve 42, and through delivery tube 80, e.g., by the operating physician.

Figs. 3A-C and the descriptions thereof describe prosthetic valve support 42 being provided as a unit 140 comprising introducer tubes 144, which are removed subsequently to advancement of guide members 56 through upstream support portion 43 and prior to introduction of the unit into the body of the subject. Fig. 6 shows system 180, in which prosthetic valve support is provided within delivery tube 80, e.g., as a unit 182, coupled to a distal end of controller 142, described hereinabove.

Unit 182 comprises (e.g., is provided having) one or more introducer tubes 184, each introducer tube being shaped to define a lumen therethrough, and having an open distal end 183. Distal end 183 of each tube is disposed outside a distal end of support 42 and/or tube 80, and each introducer tube 184 extends out of a proximal end of the support and/or tube 80. Similarly to unit 140 described with reference to Figs. 3A-C, each introducer tube 144 of system 180 passes from the distal end thereof, through a respective hole in upstream support portion 43 from the downstream surface of the support portion (which defines an outer surface of the support portion in the compressed state thereof) to an upstream surface of the support portion (which defines an inner surface of the support portion in the compressed state thereof). In contrast to unit 140, introducer tubes 184 extend from a proximal end of delivery tube 80 to a proximal end portion of the apparatus. In further contrast to unit 140, tubes 184 remain in place as unit 182 is advanced transluminally over guide members 56. Tubes 184 are typically flexible to facilitate transluminal advancement thereof.

A locking member 190 is disposed over each introducer tube 184, such that the introduction of guide member 56 through the introducer tube also introduces the guide member through the locking member. Locking member 190 is slidable over guide member 56 (e.g., over tubular member 100 thereof), and is configured to lock to longitudinal member 102. Typically, locking member 190 is identical to locking member 110, described hereinabove, except that locking member 190 is configured (e.g., dimensioned) to be slidable also over introducer tube 184. Each locking member 190 is disposed at the distal end of a respective tubular control rod 192, which is typically identical to control rod 86, described hereinabove, except that control rod 192 is configured (e.g., dimensioned) to be slidable also over introducer tube 184.

The use of system 180, including introducer tubes 184, advantageously (1) removes the requirement for two separate introductions of proximal end 57 of guide member 56 (i.e., through an introducer tube and subsequently through a locking member and control rod); and (2) facilitates control rods 192 (and locking members 190) being present in the atrium of the subject during expansion of prosthetic valve support 42, thereby reducing an interval between the expansion of the prosthetic valve support and pressing of the prosthetic valve support against the annulus of the native valve.

Reference is made to Figs. 7A-C, which are schematic illustrations of a system 200 for facilitating transluminal delivery of a prosthetic valve assembly 202, in accordance with some applications of the invention. Fig. 7A shows prosthetic valve assembly 202 in an expanded state thereof. Prosthetic valve assembly comprises (1) a prosthetic valve body 204, which comprises a first frame 206 (e.g., a wire frame), and is shaped to define a lumen 208 therethrough, (2) an annular upstream support 210, which comprises a second frame 212 (e.g., a wire frame), is shaped to define an opening through the upstream support, and is configured to be placed against an upstream surface (e.g., an atrial surface) of native valve 10 (e.g., of an annulus thereof), and (3) a flexible sheet 214 that couples the first frame to the second frame. In the expanded state of assembly 202 (and thereby of body 204), frame 206 of body 204 is generally cylindrical, and has a diameter  $d_1$ . In the expanded state of assembly 202 (and thereby of upstream support 210), frame 212 of support 210 is typically generally annular, and has an outer perimeter 213 that has a diameter  $d_2$ , which is greater than diameter  $d_1$ .

Sheet 214 may be a fabric, a film, and/or another sheet-like structure, and may comprise a natural material, a polymer, a biomaterial, and/or any other suitable material. Typically, sheet 214 comprises polyester, PTFE, and/or pericardial tissue.

For some applications, and as shown in Fig. 7A, in the expanded state of assembly 202, and in the absence of external forces (e.g., if the assembly were resting on a table surface), sheet 214 is generally annular and flat, and an upstream end 218 of frame 206 is disposed generally on a plane defined by support 210. For such applications, an inner perimeter 211 of frame 212 defines an opening that has a diameter  $d_3$  that is greater than diameter  $d_1$ .

For some applications, in such an expanded and unconstrained state, sheet 214 is generally frustoconical or funnel-shaped, and upstream end 218 of frame 206 is disposed

below the plane defined by support 210. (For some such frustoconical or funnel-shaped arrangements, the sheet may also be considered to be annular.)

For some applications, in such an expanded and unconstrained state, sheet 214 is generally tubular, upstream end 218 of frame 206 is disposed below the plane defined by support 210. For such applications, diameter d3 is typically generally equal to diameter d1.

Typically, one or both of frames 206 and 212 is covered on at least one side by a covering 220. For some applications, sheet 214 comprises a portion of covering 220, e.g., the sheet is defined by a portion of the covering that is disposed between frames 206 and 212. For some applications, and as shown in Fig. 7A, covering 220 is disposed (1) on a tissue-facing side of frame 212 (e.g., defines a tissue-contacting surface of support 210), and (2) on an inner surface of frame 206 (i.e., lines the frame, and defines lumen 208).

A valve member 205 (e.g., comprising one or more prosthetic leaflets; shown in Figs. 8D-G) is coupled to frame 206, is disposed within lumen 208, and provides valve (e.g., one-way) functionality to assembly 202. Valve member 205 may alternatively or additionally comprise a different valve member, such as a mechanical valve member.

At least two eyelets 222 are disposed on an outer surface of body 204 (i.e., protrude radially outward from body 204). Typically, eyelets 222 are pivotably coupled to body 204, e.g., such that the eyelets can pivot (e.g., rotate) in both directions by at least 5 degrees (e.g., more than 5 degrees and/or less than 90 degrees, such as between 5 and 90 degrees, e.g., between 5 and 60 degrees, such as between 5 and 45 degrees). For some applications, the eyelets can pivot in a plane parallel to a plane defined by a tangent of the valve body at the site to which the eyelet is coupled, as shown in the blowup box. Alternatively or additionally, the eyelets can pivot in a plane that is orthogonal to the plane defined by the tangent, e.g., such that the eyelets can point toward and/or away from the valve body. For some applications, eyelets 222 are sutured to body 204. Eyelets 222 are arranged in at least one pair; each eyelet of the pair being disposed on the opposite side of body 206 from the other eyelet of the pair.

Fig. 7B shows system 200 in a delivery configuration thereof. System 200 comprises a delivery tool 230, which comprises a first housing 232 (e.g., a proximal housing) and a second housing 234 (e.g., a distal housing), which are articulatably coupled to each other via a flexible control rod assembly 240 disposed through the housings.

In the delivery configuration of system 200, assembly 202 is in a compressed state thereof, in which prosthetic valve body 204 (in a compressed state thereof) is generally cylindrical, and upstream support 210 (in a compressed state thereof) is also generally cylindrical. Typically, in the delivery configuration of system 200, sheet 214 is also generally cylindrical. Assembly 202, in the compressed configuration thereof, (1) has a central longitudinal axis, at one zone (e.g., at one end) of which body 204 is disposed, and at another zone (e.g., the other end) of which support 210 is disposed, and (2) defines an articulation zone 236 in which (a) at least part of sheet 214 is disposed, and (b) neither frame 206 of body 204 nor frame 212 of support 210 is disposed, and about which body 204 and support 210 are articulatable with respect to each other.

In the delivery configuration of system 200, at least part of support 210 is disposed within housing 232 (which maintains the at least part of the support in the compressed state thereof), and at least part of body 204 is disposed within housing 234 (which maintains the at least part of the support in the compressed state thereof). Housing 232 defines an orifice 233 through which support 210 is introducible into the housing, and removable from the housing. Housing 234 defines an orifice 235 that faces orifice 233, and through which body 204 is introducible into the housing, and removable from the housing. In the delivery configuration, eyelets 222 protrude radially outward beyond the surface of delivery tool 230 (e.g., beyond a lateral wall of housing 234). Typically, housing 234 (e.g., the lateral wall thereof) is shaped to define a respective slit 237 for each eyelet, through which the eyelet protrudes beyond the surface of the housing. Each slit 237 is continuous with (i.e., is in communication with) orifice 235 such that, as described hereinbelow, during deployment of valve body 204, eyelet 222 can slide out of the slit at the orifice.

In the delivery configuration of system 200, tool 230 is in a contracted state, in which housing 232 is disposed at a distance  $d_4$  from housing 234 (e.g., orifice 233 is disposed at distance  $d_4$  from orifice 235). Distance  $d_4$  is typically greater than 1.5 mm and/or less than 30 mm, such as between 1.5 mm and 30 mm (e.g., between 10 and 15 mm). In this state, at least part of sheet 214 is exposed between the housings. The at least part of sheet 214 (and thereby of articulation zone 236) that is exposed between housings 232 and 234 facilitates articulation of housing 234 containing body 204 with respect to housing 232 containing support 210, and thereby defines an articulation zone 238 of system 200 in the delivery configuration thereof. Typically at least part of control rod assembly 240 is flexible, so as to facilitate articulation at articulation zone 238. For

example, although assembly 240 as a whole is typically sufficiently flexible so as to facilitate its transluminal delivery to the heart, control rods 244 and 246 may be more flexible than control rod 240 (e.g., more flexible than required for transluminal delivery to the heart alone), so as to facilitate articulation at articulation zone 238. For some such applications, respective portions of control rods 244 and 246 that are disposed within articulation zone 238 when tool 230 is in the contracted state (Fig. 7C) are more flexible than adjacent portions of the control rods (e.g., portions disposed within housings 232 and 234 when tool 230 is in the contracted state). For example, and as shown, a portion 245 of control rod 244 may be narrower than adjacent portions of the control rod.

Control rod assembly 240 comprises (1) a first housing-control rod 242, coupled to first housing 232, (2) a second housing-control rod 244, coupled to second housing 234, and (3) a prosthesis-control rod 246, coupled to a mount 248 that is reversibly couplable to valve assembly 202, e.g., via a plurality of recesses 250 in the mount which receive respective portions of assembly 202. Typically, assembly 202 is couplable to mount 248 by valve body 204 being coupled to the mount, and further typically by a plurality of protrusions 252 of frame 206 being disposed within respective recesses 250. Housing 234 retains this coupling by inhibiting body 204 from expanding radially away from mount 248.

Typically, at least part of second housing-control rod 244 is disposed within and slidable through prosthesis-control rod 246, and at least part of the prosthesis-control rod is disposed within and slidable through first housing-control rod 242 (e.g., coaxially).

System 200 (e.g., tool 230 thereof) further comprises at least two flexible reference-force tubes 260, which extend, (a) from a proximal end of the system (e.g., from an extracorporeal portion of the system, such as from a handle of tool 230), (b) through a proximal end of housing 232, (c) through a lumen 254 defined by support 210 in the compressed state thereof, (d) through sheet 214, (e) along the outside of at least part of body 204, and typically (f) until a distal portion of body 204. A locking member 262 is disposed between each eyelet 222 and a respective tube 260. Typically, locking members 262 are not directly coupled to body 204, but are instead each held in position between eyelet 222 and tube 260 by a guide member 256 being disposed through the eyelet, the tube, and the locking member. For some applications, locking member 262 is integral with eyelet 222 (e.g., eyelet 222 is configured to and/or shaped to define locking member 262).

For some applications, guide members 256 are identical to guide members 56, described hereinabove. Guide members 256 are described in more detail hereinbelow.

Reference is now made to Figs. 8A-H, which are schematic illustrations of a technique for use with system 200, to transluminally implant prosthetic valve assembly 202, in accordance with some applications of the invention. Typically, sheath 46 is advanced transluminally (e.g., transfemorally) to right atrium 12 of heart 4, through the fossa ovalis, and into left atrium 6 using standard transseptal techniques, as described hereinabove with reference to Figs. 1A-B. Subsequently, first tissue anchor 48a and second tissue anchor 48b are anchored at respective ventricular sites, e.g., as described with reference to Figs. 1A-B and/or 5, *mutatis mutandis*.

A guide member 256 is coupled to each tissue anchor (e.g., the tissue anchors are provided pre-coupled to the guide members), such that after anchoring of the tissue anchors, each guide member extends from the anchor, out of the body of the subject, e.g., as described hereinabove with respect to guide member 56, *mutatis mutandis*. A proximal end of each guide member 256 is introduced through a respective eyelet 222, locking member 262, and reference-force tube 260, such that system 200 appears as shown in Fig. 7B. As described hereinabove, each guide member 256 typically holds each locking member 262 in place between its respective eyelet 222 and reference-force tube 260.

System 200 (e.g., assembly 202 within delivery tool 230) is subsequently advanced along guide members 256 and via sheath 46 to left atrium 6 (Fig. 8A). Once exposed outside of the distal end of sheath 46, system 200 is guided by guide members 256 generally toward the ventricular sites at which anchors 48 are anchored. Articulation of system 200 (e.g., at articulation zone 238, and/or at another articulation zone 239 proximal to housing 232) facilitates transluminal advancement of the system past curves in the vasculature. The articulation also facilitates movement of system 200 from the distal end of sheath 46 and between leaflets 14 of valve 10, e.g., by facilitating steering of the system along a path defined by guide members 256. This steering is typically further facilitated by (1) the position of eyelets 222 at a distal portion of system 200 (e.g., at a distal portion of housing 234), which turns the housing in response to encountering a turn in members 256, and/or (2) the pivotable coupling of eyelets 222 to body 204, described hereinabove; pivoting of eyelet 222 reduces a likelihood of the eyelet snagging on guide member 256 when encountering a turn in the guide member. For some applications, eyelets 222 are

internally coated with a material having a low coefficient of friction, such as polytetrafluoroethylene, to further facilitate sliding of the eyelet over guide member 256.

It is to be noted that, due to the described articulation, a distance  $d_5$  between a proximal end of housing 232 and a distal end of housing 234 may be greater than for a similar system that does not articulate. For example, distance  $d_5$  may be greater than a distance  $d_6$  along an atrioventricular axis between (a) a height on the atrioventricular axis of the upstream surface of native valve 10, and (b) a height on the atrioventricular axis of the transseptal entry point into left atrium 6 (e.g., the fossa ovalis). For some applications, distance  $d_5$  may be greater than the overall height of left atrium 6. Distance  $d_5$  is typically greater than 25 mm and/or less than 100 mm, such as between 25 mm and 100 mm (e.g., 35-60 mm, such as 40-50 mm).

Reference is made to Fig. 8B. System 200 is advanced such that distal housing 234, containing valve body 204 in the compressed state thereof, passes between leaflets 14 of native valve 10. Valve body 204 is withdrawn out of orifice 235 of housing 234 by moving control rod 244 with respect to control rod 246. For example, and as shown in Figs. 8B-C, control rod 244 (and thereby housing 234) may be moved distally into ventricle 8, while control rod 246 (and thereby mount 248 and valve body 204) remains stationary, thereby increasing the distance between housing 232 and housing 234.

When protrusions 252 of frame 206 become withdrawn from housing 234, the portion of valve body 204 coupled to the mount expands (e.g., automatically), thereby disengaging the protrusions from recesses 250 of mount 248, and decoupling the valve body from the mount (Fig. 8C). For clarity, Figs. 8C-D show the distal portion of valve body 204 expanding before the proximal portion of the valve body. It is to be noted, however, that portions of the valve body typically expand as they become exposed from housing 234, and therefore the proximal portion of the valve body typically expands while the distal portion of the valve body is still disposed within housing 234.

Fig. 8D shows valve body 204 having been completely removed from housing 234, and support 210 having been removed from proximal housing 232 by control rod 242 (and thereby housing 232) being withdrawn proximally, thereby further increasing the distance between housing 232 and housing 234. Typically, an opposing reference force is provided by reference-force tubes 260, so as to hold assembly 202 in place at the native valve while housing 232 is withdrawn.

During the withdrawal of valve body 204 from housing 234, eyelets 222 typically slide through slits 237, and out of the slits at orifice 235.

For some applications, support 210 is deployed from housing 232 before valve body 204 is deployed from housing 234.

5           Subsequently, tension is applied to guide members 256 while an opposing reference force is provided to assembly 202 by tubes 260, thereby reducing a length of each guide member 256 that is disposed between eyelet 222 and its respective tissue anchor 48 (Fig. 8E). That is, each guide member 256 is slid proximally with respect to its  
10           respective reference-force tube 260. Typically, the reference-force is provided to assembly 202 by a distal end of each reference-force tube 260 abutting a respective locking member; the reference force being transferred via the locking member (and typically further via eyelet 222 to valve body 204).

For some applications this tensioning moves valve body 204 at least slightly distally into ventricle 8, such that sheet 214 becomes at least slightly frustoconical (e.g., as  
15           shown in Fig. 8E). For some applications this tensioning deforms support 210 and/or deflects the support with respect to body 204, e.g., such that the support becomes less flat (e.g., less planar). For example, before tensioning, support 210 may be flat annular (as shown in Fig. 8D), and after tensioning the support may be frustoconical (as shown in Fig. 8E). Alternatively, and as described in more detail with reference to Figs. 14A-B, *mutatis mutandis*, the prosthetic valve assembly may be configured such that the upstream support  
20           is frustoconical before tensioning, and the tensioning changes a slant of the frustoconical shape. For example, before tensioning, the upstream support may be frustoconical with the larger base of the frustum closer to a ventricular end of an atrioventricular axis than is the smaller base of the frustum, and after tensioning the support may become flatter, or  
25           may even invert, such that it becomes frustoconical with the smaller base closer to the ventricular end of the atrioventricular axis (e.g., the conformation shown in Fig. 8E, *mutatis mutandis*).

For some applications, tensioning is performed before deployment of support 210 from housing 232.

30           Each guide member 256 typically comprises a tether 282 (e.g., a longitudinal member), a pull-wire 284, and a tubular member 280 in which the pull-wire and the tether are disposed. A distal portion of pull-wire 284 is reversibly coupled to a proximal portion of tether 282, and tubular member 280 fits snugly over at least the distal portion of the

pull-wire and the proximal portion of the tether so as to inhibit the pull-wire from becoming decoupled from the tether (e.g., to maintain a state of coupling therebetween). For some applications, and as shown, the reversible coupling is provided by pull-wire 284 and tether 282 defining respective mating surfaces. For some applications, the reversible  
5 coupling is provided as described hereinabove for guide member 56.

When each guide member 256 (e.g., the tether 282 thereof) is tensioned, the guide member is withdrawn proximally until at least part of tether 282 (within tubular member 280) is disposed within locking member 262 (e.g., at least until the proximal portion of the tether has passed through the locking member; Fig. 8E state B).

10 Reference is now made to Fig. 8F. Once a desired tension is obtained, the tension is fixed. Tubular member 280 is withdrawn proximally with respect to tether 282, pull-wire 284 and locking member 262 (Fig. 8F). State A of Fig. 8F shows tubular member 280 having been withdrawn until eyelet 222. State B of Fig. 8F shows tubular member 280 having been withdrawn until a distal end of the tubular member is disposed proximal  
15 to locking member 262, thereby exposing tether 282 to the locking member.

Typically, locking member 262 is biased (e.g., shape-set) to assume a locked state, and while tubular member 280 is disposed within the locking member, the tubular member inhibits locking of the locking member to tether 282 (or to pull-wire 284), and the removal of the tubular member from within the locking member facilitates automatic locking of the  
20 locking member to the tether (i.e., transitioning of the locking member into a locked state). Tubular member 280 is slidable through locking member 262 despite such biasing of the locking member, e.g., due to (a) the tubular member having a smooth surface, and/or (b) the tubular member retaining locking elements 263 of the locking member at an angle  $\alpha_1$  with respect to the tubular member, which is shallower than an angle  $\alpha_2$   
25 with respect to tether 282 that the locking elements assume when the tubular element is withdrawn (compare Fig. 8F state A to state B).

Typically, tether 282 defines a plurality of nodules 286, which facilitate locking of locking member 262 to the tether. For some applications, locking elements 263 and nodules 286 function as a ratchet. For some such applications, subsequently to  
30 transitioning of locking member 262 into the locked state thereof, one-way movement of tether 282 through the locking member is possible, thereby facilitating further increase, but not reduction, of tension.

Reference is now made to Fig. 8G. Tubular member 280 and pull-wire 284 are decoupled from tether 282 and prosthetic valve assembly 202, and delivery tool 230 is withdrawn proximally (e.g., into sheath 46, and out of the body of the subject). Typically, housing 234 and mount 248 are withdrawn via the lumen of valve body 204 (e.g., between the prosthetic leaflets disposed therein). For some applications, housing 234, rods 244 and 246, and mount 248 are withdrawn prior to the tensioning step (e.g., prior to withdrawal of reference-force tubes 260, such as between the step shown in Fig. 8D and the step shown in Fig. 8E, mutatis mutandis).

Typically, tubular member 280 and pull-wire 284 are decoupled from tether 282 by withdrawing the tubular member further proximally, such that the distal portion of pull-wire 284 and the proximal portion of tether 282 are exposed from the tubular member (state A of Fig. 8G). Reference force for this withdrawal is provided by the anchored tether 282, and optionally also by reference-force tubes 260. Tubular member 280, pull-wire 284, and reference-force tube 260 are then withdrawn (state B of Fig. 8H).

Fig. 8H is a schematic illustration of prosthetic valve assembly 202 following implantation at native valve 10 of heart 4. Assembly 202 provides replacement one-way valve functionality in which blood flows from atrium 6, through the opening defined by upstream support 210, past sheet 214, through lumen 208 of valve body 204, and into atrium 8. Sheet 214 thereby defines and/or serves as a conduit that provides fluid communication between the opening defined by upstream support 210 (e.g., by frame 212 thereof) and lumen 208 of valve body 204. Further typically, this conduit is uninterrupted except for holes (not shown) that may remain where reference-force tubes 260 originally extended through the sheet.

Regurgitation through these holes is typically minimal or absent due to their small size. The holes may be slit-like (rather than punched holes), such that in the absence of reference-force tubes 260 the holes become generally closed. Additionally, coaptation of leaflets 14 and tissue growth over the holes may further facilitate sealing. Alternatively or additionally, the holes may be defined by tubular protrusions 215 that extend from sheet 214 (shown in the "optional" box, Fig. 7B). Tubular protrusions 215 may comprise the same material as sheet 214, or may comprise a different material. Tubular protrusions 215 may be flexible or rigid. The tubular protrusions are configured to provide a channel through which tubes 260 may pass, but which, in the absence of tubes 260, inhibit movement of fluid therethrough. For example, tubes 215 may inhibit fluid flow due to the

ratio between their length and lumen diameter, and/or may act as duckbill valves. Therefore, sheet 214 typically provides a generally sealed conduit between upstream support 210 and valve body 204.

The positioning of prosthetic valve assembly 202 at the native valve typically results in leaflets 14 of the native valve coapting around valve body 204, thereby providing sealing that inhibits (e.g., prevents) perivalvular leakage.

The positioning of prosthetic valve assembly typically also places sheet 214 in contact with the annulus and/or leaflets of the native valve. In general, a prosthetic valve implanted at a native valve encounters forces due to beating of the heart and/or the resulting flow of blood. Small movements (e.g., oscillations) resulting from these forces may inhibit tissue growth (e.g., fibrosis) that would otherwise facilitate sealing between the prosthetic valve and the native valve. For some applications, such movements are reduced (e.g., dampened) at sites at which the contact between assembly 202 and the surrounding tissue is provided by sheet 214, e.g., due to flexibility of the sheet. Thereby sheet 214 typically provides stabilized (e.g., more constant) contact with tissue than would a less flexible structure in the same position; this is hypothesized to improve tissue growth and thereby sealing. Furthermore, sheet 214 itself may be configured to promote tissue growth thereon, e.g., due to surface treatments and/or impregnation, and/or structure, such as weave and/or porosity, thereby further facilitating sealing.

Reference is made to Figs. 9A-14B, which are schematic illustrations of prosthetic valve assemblies, in accordance with some applications of the invention. Each prosthetic valve assembly shown in Figs. 9A-14B comprises a valve body, an upstream support, and a sheet, which are typically identical, mutatis mutandis, to valve body 204, upstream support 210 and sheet 214 described hereinabove, except for where noted.

Figs. 9A-B show, prosthetic valve assembly 202 described hereinabove, in a simplified (e.g., two-dimensional) schematic manner that illustrates the arrangement of valve body 204, upstream support 210 and sheet 214, in the compressed state (Fig. 9A) and the expanded (e.g., implanted) state (Fig. 9B). Figs. 9A-B are included at least in part in order to facilitate interpretation of the simplified schematic illustrations of the prosthetic valve assemblies of Figs. 10A-14B. Fig. 9A, like Figs. 10A, 11A, 12A and 13A, shows the prosthetic valve assembly in the compressed state as if it were contained in the delivery tool thereof (e.g., tool 230), but for clarity does not show the delivery tool.

Typically, sheet 214 is attached at least to inner perimeter 211 of upstream support 210, and to an upstream end 207 of frame 206 of valve body 204.

Figs. 10A-B show a prosthetic valve assembly 302, which comprises a valve body 304 comprising a first frame 306, an upstream support 310 comprising a second frame 312, and a flexible sheet 314. In the expanded state of support 310 (Fig. 10B), frame 312 defines an outer perimeter 313 and an inner perimeter 311 that defines an opening through the support. During implantation, support 310 is placed against the upstream surface of the native valve, and valve body 304 is subsequently intracorporeally coupled (e.g., directly coupled) to the support by being expanded within the opening of the support, e.g., as described hereinabove with reference to Fig. 1F, *mutatis mutandis*.

Sheet 314 is not attached to inner perimeter 311 of frame 312, but rather is circumferentially attached to frame 312 at a radius that is greater than that of the inner perimeter. For example, sheet 314 may be attached to frame 312 at outer perimeter 313. Sheet 314 is also not attached to an upstream end 307 of valve body 304. Thereby a pocket region 316 is defined between sheet 314 and at least inner perimeter 311, in which sheet 314 is not attached to frame 312 or frame 306.

In the compressed state (Fig. 10A), sheet 314 is disposed alongside and outside at least part of frame 312 and at least part of frame 306. Frame 312 is configured such that when the frame is in the compressed state, inner perimeter 311 defines a downstream end of the frame (e.g., of the cylindrical shape of the frame), and outer perimeter 313 defines an upstream end. Therefore, when frame 312 expands, the upstream end of the frame expands radially outward more than does the downstream end of the frame.

Figs. 11A-B show a prosthetic valve assembly 342, which comprises a valve body 344 comprising a first frame 346, an upstream support 350 comprising a second frame 352, and a flexible sheet 354. In the expanded state of support 350 (Fig. 11B), frame 352 defines an outer perimeter 353 and an inner perimeter 351 that defines an opening through the support. During implantation, support 350 is placed against the upstream surface of the native valve, and valve body 344 is subsequently intracorporeally coupled (e.g., directly coupled) to the support by being expanded within the opening of the support, e.g., as described hereinabove with reference to Fig. 1F, *mutatis mutandis*.

Sheet 354 is not attached to inner perimeter 351 of frame 352, but rather is circumferentially attached to frame 352 at a radius that is greater than that of the inner perimeter. For example, sheet 354 may be attached to frame 352 at outer perimeter 353.

Sheet 354 is also not attached to an upstream end 347 of valve body 344. Thereby a pocket region 356 is defined between sheet 354 and at least inner perimeter 351, in which sheet 354 is not attached to frame 352 or frame 346.

5 Frame 352 is configured such that when the frame is in the compressed state, the frame has a generally cylindrical shape that defines a lumen therethrough, inner perimeter 351 defines an upstream end of the frame (e.g., of the cylindrical shape of the frame), and outer perimeter 353 defines a downstream end. Therefore, when frame 352 expands, the downstream end of the frame expands radially outward more than does the upstream end of the frame. In the compressed state (Fig. 11A), sheet 354 is disposed alongside and  
10 outside of at least part of frame 346, and through at least part of the lumen defined by frame 352.

Figs. 12A-B show a prosthetic valve assembly 382, which comprises a valve body 384 comprising a first frame 386, an upstream support 390 comprising a second frame 392, and a flexible sheet 394. In the expanded state of support 390 (Fig. 12B), frame 392  
15 defines an outer perimeter 393 and an inner perimeter 391 that defines an opening through the support. Frame 392 is coupled to frame 386 prior to implantation (e.g., assembly 382 is provided with frame 392 coupled to frame 386). For some applications, frames 392 and 386 are integral, e.g., are defined by respective regions of a single frame. During implantation, valve body 384 is advanced between leaflets of the native valve, and support  
20 390 is placed against the upstream surface of the native valve (e.g., as described with reference to Figs. 8B-D, *mutatis mutandis*).

Sheet 394 is not attached to inner perimeter 391 of frame 392, but rather is circumferentially attached to frame 392 at a radius that is greater than that of the inner perimeter. For example, sheet 394 may be attached to frame 392 at outer perimeter 393.  
25 Sheet 394 is also not attached to an upstream end 387 of valve body 384. Thereby a pocket region 396 is defined between sheet 394 and at least inner perimeter 391, in which sheet 394 is not attached to frame 392 or frame 386.

Assembly 382 is configured such that, in the compressed state thereof (Fig. 12A), frames 386 and 392 are generally collinear, and form a generally continuous cylinder.  
30 Frame 392 is configured such that in the compressed state, outer perimeter 393 defines an upstream end of the frame (and thereby of assembly 382). Therefore, when frame 392 expands, the upstream end of the frame expands radially outward more than does the

downstream end of the frame. In the compressed state, sheet 394 is disposed alongside and outside of at least part of frame 386, and at least part of frame 392.

Figs. 13A-B show a prosthetic valve assembly 402, which comprises a valve body 404 comprising a first frame 406, an upstream support 410 comprising a second frame 412, and a flexible sheet 414. In the expanded state of support 410 (Fig. 13B), frame 412 defines an outer perimeter 413 and an inner perimeter 411 that defines an opening through the support. Frame 412 is coupled to frame 406 prior to implantation (e.g., assembly 402 is provided with frame 412 coupled to frame 406). For some applications, frames 412 and 406 are integral, e.g., are defined by respective regions of a single frame. During implantation, valve body 404 is advanced between leaflets of the native valve, and support 410 is placed against the upstream surface of the native valve (e.g., as described with reference to Figs. 8B-D, *mutatis mutandis*).

Sheet 414 is not attached to inner perimeter 411 of frame 412, but rather is circumferentially attached to frame 412 at a radius that is greater than that of the inner perimeter. For example, sheet 414 may be attached to frame 412 at outer perimeter 413. Sheet 414 is also not attached to an upstream end 407 of valve body 404. Thereby a pocket region 416 is defined between sheet 414 and at least inner perimeter 411, in which sheet 414 is not attached to frame 412 or frame 406.

Assembly 402 is configured such that, in the compressed state thereof (Fig. 13A), frame 412 is disposed generally alongside at least a portion of frame 406. Frame 412 is configured such that in the compressed state, outer perimeter 413 defines a downstream end of the frame. Therefore, when frame 412 expands, the downstream end of the frame expands radially outward more than does the upstream end of the frame. In the compressed state, sheet 414 is disposed alongside and outside of at least part of frame 406.

Figs. 14A-B show a prosthetic valve assembly 422 in an expanded state thereof, implanted at native valve 10, in accordance with some applications of the invention. Assembly 422 comprises a valve body 424 comprising a first frame 426, an upstream support 430 comprising a second frame 432, and a sheet 434.

Frame 426 of valve body 424 has an upstream end 427 and a downstream end 429. In the expanded state, in the absence of external forces, an outer perimeter 433 of second frame 432 of upstream support 430 is disposed closer to downstream end 429 than is an inner perimeter 431 of the second frame. For example, upstream support 430 may define a frustum, the larger base of which is disposed closer to downstream end 429 (and closer

to a ventricular end of an atrioventricular axis) than is the smaller base of the frustum. For some applications, the assembly is thus configured such that, when placed at the native valve, outer perimeter 433 of the upstream support contacts the upstream surface of the native valve (e.g., the valve annulus), and the inner perimeter of the upstream support does not (Fig. 14A). For some such applications, frame 432 may be flat annular in the absence of external forces, and in the expanded state, sheet 434 retains the second frame in the frustoconical shape by inhibiting expansion of the second frame (e.g., expansion of at least outer perimeter 433 thereof). For some applications, frame 432 curves downward toward the tissue that outer perimeter 433 contacts (configuration not shown).

Sheet 434 is not attached to inner perimeter 431 of frame 432, but rather is circumferentially attached to frame 432 at a radius that is greater than that of the inner perimeter. For example, sheet 434 may be attached to frame 432 at outer perimeter 433. Sheet 434 is also not attached to upstream end 427 of valve body 424. Thereby a pocket region 436 is defined between sheet 434 and at least inner perimeter 431, in which sheet 434 is not attached to frame 432 or frame 426.

For some such applications, such a configuration provides a spring functionality that allows valve body 424 to move along an atrioventricular axis while outer perimeter 433 and/or portions of sheet 434 remain in contact with tissue (Fig. 14B). For example, assembly 422 may be implanted using techniques described with reference to Figs. 8A-H, *mutatis mutandis*, and the spring functionality may allow movement of valve body 424 ventricularly during tensioning of tethers 282 while maintaining contact between outer perimeter 433 and the atrial surface. Similarly, such a configuration may allow oscillation of valve body 424 along the atrioventricular axis (e.g., caused by beating of the heart and the resulting blood flow), while maintaining constant contact between outer perimeter 433 and the tissue.

For some applications, a compressed state of assembly 422 is as described for one or more of the prosthetic valve assemblies described with reference to Figs. 10A-13B, *mutatis mutandis*. For example, for some applications frame 426 of body 424 is coupled to frame 432 of support 430 prior to implantation (e.g., assembly 422 is provided with frame 426 coupled to frame 432), such as described for assembly 382 and/or assembly 402, *mutatis mutandis*. Alternatively, frame 426 is intracorporeally coupled to frame 432, e.g., as described for assembly 302 and/or assembly 342, and/or with reference to Figs. 1F, *mutatis mutandis*.

For some applications, assembly 422 is implanted as described for one or more of the prosthetic valve assemblies described with respect to Figs. 10A-13B, *mutatis mutandis*.

Reference is again made to Figs. 9A-B, 10A-B, and 11A-B. As described  
5 hereinabove, in its compressed state, assembly 202 defines an articulation zone in which (a) at least part of sheet 214 is disposed, and (b) neither frame 206 of body 204 nor frame 212 of support 210 is disposed, and about which body 204 and support 210 are articulatable with respect to each other. It is to be noted that in their compressed states, assemblies 302 and 342 also define respective articulation zones 336, 376. For each  
10 assembly, at least part of the respective sheet is disposed in the articulation zone, neither the respective frame of the valve body nor the respective frame of the support is disposed in the articulation zone, and the respective valve body and support are articulatable with respect to each other, about the articulation zone.

Reference is again made to Figs. 10A-B, 11A-B, 12A-B, 13A-B, and 14A-B. As  
15 described hereinabove, assemblies 302, 342, 382, 402 and 422 each define a respective pocket region between the respective sheet and at least the inner perimeter of the frame of the upstream support. As also described hereinabove, (e.g., with reference to assembly 202), placement of the flexible sheet of the prosthetic valve assembly in contact with tissue provides stabilized contact with the tissue, and thereby improves tissue growth and  
20 sealing. Provision of a pocket region such as those described hereinabove is hypothesized to further improve sealing (e.g., by further facilitating tissue growth). For example, such configurations (1) may provide a greater surface area of the flexible sheet and/or a greater tissue-contact area of the sheet (e.g., due to an angle of the sheet), and/or (2) may hold the flexible sheet under less tension (e.g., compared to assembly 202), such that the sheet is  
25 freer to move with movement of the valve assembly and/or tissue, thereby dampening movements that may otherwise inhibit tissue growth and/or sealing. This is illustrated in Figs. 14A-B, which show an example of the contact between flexible sheet 434 and tissue (e.g., leaflets 14). For some applications, the sheet is elastic, so as to further facilitate maintenance of contact despite movement of the frames of the prosthetic valve assembly  
30 with respect to the native valve.

As described hereinabove, the respective pocket region of each assembly 302, 342, 382, 402 and 422 is defined by the manner in which the sheet of the assembly is coupled to the frames of the assembly. When the assembly is in the expanded state thereof, the

sheet is typically frustoconical and/or funnel-shaped. This shape is defined by a lateral wall (i.e., the sheet itself), and first and second apertures (at either end of the shape), the first aperture being larger than the second aperture. A portion of the sheet that defines the first aperture is circumferentially attached to the frame of the upstream support at a radius  
5 that is greater than a radius of the inner perimeter of the support. A portion of the sheet that defines the second aperture is circumferentially attached to the frame of the valve body at a longitudinal site that is closer to a downstream end of the valve body than is the longitudinal site at which the upstream support is coupled to the valve body.

For some applications, the sheet extends radially past the radius at which it is  
10 coupled to the upstream support. As described hereinabove, for some applications the sheet is coupled to the upstream support at an outer perimeter of the upstream support. For some applications, the sheet extends radially past the outer perimeter of the upstream support.

Reference is made to Figs. 15A-C, which are schematic illustrations of a tool 460  
15 for facilitating application of force between prosthetic valve assembly 202 and guide members 256 (e.g., tethers 282 thereof), in accordance with some applications of the invention. For some applications, tool 460 serves as a tension-detector tool. For some applications, tool 460 alternatively or additionally serves as a tension-applicator tool.

The boxes on the right-hand side of Figs. 15A-C shows assembly 202 being  
20 implanted at native valve 10, as described hereinabove. The box of Fig. 15A shows assembly 202 having been deployed (e.g., delivered and expanded) at the native valve, e.g., as described with reference to Fig. 8D. The box of Fig. 15B shows tethers 282 of guide members 256 having been tensioned with respect to assembly 202, e.g., as described with reference to Fig. 8E. The box of Fig. 15C shows tubular member 280 of each guide  
25 member 256 having been withdrawn proximally so as to (1) facilitate locking of the respective locking member 262 to its respective tether 282, e.g., as described with reference to Fig. 8F, and (2) decouple pull-wire 284 from tether 282, e.g., as described with reference to Fig. 8G.

The left-hand side of Figs. 15A-C shows (1) a proximal end of system 200 (e.g., a  
30 proximal end of delivery tool 230 thereof, e.g., including a handle 231 thereof), including a proximal portion of pull-wire 284, a proximal portion of tubular member 280, and a proximal portion of reference-force tube 260, and (2) tool 460 coupled to the proximal

portion of pull-wire 284 and the proximal portion of reference-force tube 260. The left-hand side of Figs. 15A-C shows one tool 460 being used with one pull-wire 284, tubular member 280, tube 260 and tool 460 (and one handle 231). However it is to be noted that tool 460 is typically used with each guide member (e.g., each tether 282), either  
5 sequentially, or by providing more than one tool 460 for use at generally the same time.

Tool 460 comprises a pull-wire-coupling element 462, configured to be coupled to the proximal portion of pull-wire 284 (e.g., to a grip 464 of the pull-wire), and a reference-force-tube-coupling element 466, configured to be coupled to the proximal portion of reference-force tube 260 (e.g., to a grip 468 of the tubular member). Coupling elements  
10 462 and 466 are coupled to each other via an adjustment member 470 that facilitates adjustment of a distance between the coupling elements. Adjustment member 470 may comprise screw threads, a ratchet mechanism, or any other suitable adjustment mechanism.

Pull-wire-coupling element 462 is coupled to the proximal portion of pull-wire 284  
15 (e.g., to a grip 464 of the pull-wire), and reference-force-tube-coupling element 466 is coupled to the proximal portion of reference-force tube 260 (e.g., to a grip 468 of the tubular member), typically subsequently to delivery of prosthetic valve assembly 202 to the native valve (Fig. 15A). A distance  $d_7$  exists between coupling elements 462 and 466.

Subsequently, adjustment member 470 is used (e.g., actuated) so as to change (e.g.,  
20 increase) the distance between coupling elements 462 and 466 (Fig. 15B; distance  $d_8$ ). This reduces the length of tether 282 that is disposed distal to the distal end of reference-force tube 282, (and thereby the length of the tether that is disposed between eyelet 222 and anchor 48), thereby applying tension to the tether). Typically, a length indicator 471 (e.g., a rule) is provided on tool 460 that indicates the change in length that has been  
25 made. Further typically, tool 460 comprises a force detector 472 that detects and displays a force differential (e.g., a linear force differential) between coupling elements 462 and 466, and thereby provides an indication of the tensile state of tether 282.

When a desired tensile state of tether 282 has been achieved (e.g., an absolute value and/or a value relative to other detected forces, such as the tensile state of the other  
30 tether 282), the tension is fixed, and pull-wire 284 is decoupled from tether 282 (Fig. 15C). As described with reference to Fig. 8F, this is achieved by withdrawing tubular member 280 proximally with respect to tether 282, pull-wire 284 and locking member

262. Fig. 15C shows a proximal portion of tubular member 280 (e.g., a grip 474 thereof) being withdrawn proximally with respect to (1) pull-wire 284 (and therefore with respect to tether 282 to which the pull-wire is coupled), and (2) reference-force tube 260 (and therefore with respect to locking member 262 which the distal end of the reference-force tube abuts). This is illustrated by a distance  $d_{10}$  between grips 468 and 474 in Fig. 15C, which is greater than a distance  $d_9$  between grips 468 and 474 in Fig. 15B. This thereby facilitates (1) locking of locking member 262 to tether 282, and (2) subsequently (i.e., after further proximal withdrawal of the tubular member), decoupling of pull-wire 284 from the tether.

10 For some applications, this is performed by one continuous movement of tubular member 280. For some applications, visual and/or tactile indicators allow the operating physician to lock locking member 262 to tether 282 without decoupling pull-wire 284 from the tether. This may advantageously allow the physician to further increase the tension on the tether (e.g., by using the ratchet functionality described with reference to 15 Fig. 8F) before decoupling the pull-wire from the tether.

Although tool 460 is described hereinabove for facilitating implantation of assembly 202, the tool may also be used, *mutatis mutandis*, in combination with other systems described herein, such as system 40 described hereinabove and/or assembly 552 described hereinbelow (e.g., for tensioning tethers 582 thereof).

20 Reference is now made to Fig. 16, which is a schematic illustration of a system 480 comprising a prosthetic valve assembly 482 and one or more springs 484 via which the prosthetic valve assembly is elastically coupled to one or more tissue anchors 48, in accordance with some applications of the invention. For illustrative purposes, system 480 is shown as comprising system 200 (e.g., comprising prosthetic valve assembly 202), 25 described hereinabove, with the addition of springs 484. However it is to be noted that the techniques described with reference to Fig. 16 may alternatively or additionally be used to facilitate implantation of other prosthetic valves and/or prosthetic valve assemblies described herein, *mutatis mutandis* (e.g., springs 484 may be added to other prosthetic valves and/or prosthetic valve assemblies described herein).

30 Each spring 484 is disposed outside of valve body 204, typically laterally outside the valve body, and further typically between eyelet 222 and locking member 262 (e.g., coupling the eyelet to the locking member). For example, and as shown, spring 484 may

have a longitudinal axis that is generally parallel with lumen 208 of the valve body. When reference-force tube 260 provides the reference force to locking member 262 during tensioning of guide member 256 (e.g., tether 282 thereof), the reference force is transferred via spring 484. Typically spring 484 serves as a compression spring, such that  
5 increasing tension on guide member 256 (e.g., the tether 282 thereof) compresses the spring.

For some applications, spring 484 provides an indication of a state of the spring that is observable and recognizable using imaging techniques (e.g., fluoroscopy). That is, spring 484 is configured to change shape in response to a force applied to it, in a manner  
10 that is observable and recognizable using fluoroscopy. This functionality therefore provides intracorporeal measurement of tension on tether 282 (in a manner that is itself observable extracorporeally). It is hypothesized that for some applications, this intracorporeal measurement advantageously detects the tension with reduced interference (e.g., noise) that may be present in extracorporeal measurement techniques. For example,  
15 for some applications, extracorporeal measurement of the tension by extracorporeally measuring tension on pull-wire 284 (e.g., tension with respect to reference-force tube 280) may be inhibited by interference by inherent elasticity of the pull-wire and other elements of the system, and by friction between elements of the system.

For some applications, the shape of spring 484 alone provides the tension  
20 indication. For such applications, spring 484 may be coated with a radiopaque material such as tantalum. For some applications, spring 484 has (e.g., comprises and/or is coupled to) one or more radiopaque markers 486, and the juxtaposition of the markers facilitates extracorporeal detection of the shape of the spring. For example, when spring 484 serves as a compression spring, a reduction of a distance  $d_{11}$  (compare  $d_{11}$  to  $d_{11}'$ ) between  
25 adjacent markers 486 indicates an increase in tension on tether 282.

For some applications, an intracorporeal reference (e.g., a scale) 488 is provided, to facilitate identification of shape change of spring 484 (e.g., to facilitate quantification of the shape change by (1) comparing the position of markers 486 to reference 488, and/or (2) comparing the juxtaposition of markers 486 to the juxtaposition of elements of the  
30 scale. For example, and as shown in Fig. 16, scale 488 may itself also comprise a plurality of radiopaque markers 490 disposed on valve body 204 (e.g., coupled to frame 206) at known (e.g., regular) intervals, and distance  $d_{11}$  (observed using fluoroscopy) is compared to a distance  $d_{12}$  between adjacent markers 490 (observed using fluoroscopy) in

order to determine the actual change in distance d11. That is, an observed relative change between d11 and d12 is used to determine an actual absolute change in d11.

For some applications, spring 484 also alters the relationship between (a) changes in the length of tether 282 disposed between eyelet 222 and anchor 48 and (b) tension on the tether. For example, for system 200 described hereinabove (i.e., in the absence of spring 484), starting with slack on tether 282 between the eyelet and the anchor, as the length of the tether between the eyelet and the anchor is reduced, tension on tether 282 may remain constant and low despite the reduction in the length of the tether, until the tether encounters resistance provided by tissue anchor 48, at which point tension increases relatively quickly for every unit reduction in length. For system 480 (i.e., using spring 484), the relationship between (a) the length of tether 282 disposed between the eyelet and the anchor, and (b) the tension on the tether, is smoother (e.g., the transition between before and after resistance from the anchor is encountered is smoother). That is, spring 484 absorbs some of the applied tensile force and in exchange provides additional length to the tether. This is hypothesized to advantageously provide more flexibility to the operating physician to adjust the length of tether 282 disposed between the eyelet and the anchor, with reduced changes to tension on the tether.

For some applications, spring 484 is configured so as to provide a desired tension (e.g., a desired resistance) over a range of lengths of tether 282 (e.g., over a range of compression states of the spring). That is, the spring constant of the spring is sufficiently low that a change in resistance is minimized per unit length change. For example, the spring constant may be less than 50 g/mm.

For some applications, the desired tension is above 300 g force and/or below 700 g force, e.g., above 400 g force, and/or below 600 g force, such as between 400 g force and 600 g force, e.g., about 500 g force. For example, a desired target tether tension may be 500 g force, and spring 484 may be configured to provide, over a range of compression states of the spring, resistance that results in a tether tension that is within a margin tension (e.g., within 200 g force, such as within 100 g force) of the target force.

For some applications, spring 484 is configured to provide a distinct indication, observable using fluoroscopy, when the spring experiences a force that is within a margin force (i.e., a force that corresponds to being within the margin tension). For example, spring 484 may undergo (e.g., suddenly undergo) a more obvious shape change when such a force is experienced.

For some applications, spring 484 is configured to act as a constant-force spring or similar, so as to facilitate the behavior described above. For some applications, spring 484 is pre-loaded (e.g., pre-tensioned or pre-compressed).

Reference is made to Fig. 17, which is a schematic illustration of a system 500 comprising a prosthetic valve assembly 502 and one or more springs 504 via which the prosthetic valve assembly is elastically coupled to one or more tissue anchors 48, in accordance with some applications of the invention. For illustrative purposes, system 500 is shown as comprising system 200 (e.g., comprising prosthetic valve assembly 202), described hereinabove, with the addition of springs 504. However it is to be noted that the techniques described with reference to Fig. 17 may alternatively or additionally be used to facilitate implantation of other prosthetic valves and/or prosthetic valve assemblies described herein, mutatis mutandis (e.g., springs 504 may be added to other prosthetic valves and/or prosthetic valve assemblies described herein).

Each spring 504 is disposed outside of valve body 204, typically laterally outside the valve body, and further typically is disposed functionally between locking member 262 and anchor 48 (e.g., between locking member 262 and eyelet 222, or between eyelet 222 and anchor 48). For some applications, and as shown, spring 504 is a cantilever spring, and may be defined by a protrusion of frame 206 that extends away (e.g., laterally away) from valve body 204. That is, spring 504 may comprise an elastically-deformable appendage. For some applications, the protrusion is shaped to define a loop 506 that provides spring 504 with constant-force-spring functionality.

Typically, spring 504 provides similar functionality to spring 484, described hereinabove, mutatis mutandis. For example, for some applications, spring 504 provides an indication of a state of the spring that is observable and recognizable using fluoroscopy. That is, spring 504 is configured to change shape in response to a force applied to it, in a manner that is detectable and recognizable using fluoroscopy. For some applications, spring 504 also alters the relationship between (a) the length of tether 282 disposed between eyelet 222 and anchor 48 and (b) tension on the tether, e.g., as described hereinabove with reference to spring 484, mutatis mutandis.

Reference is made to Figs. 18A-B, which are schematic illustrations of springs coupled to tether 282 so as to elastically couple tissue anchor 48 (e.g., a tissue-engaging element 49 thereof) to prosthetic valve assembly 202 (e.g., to valve body 204 thereof), in accordance with some applications of the invention. Fig. 18A shows a spring 520

disposed partway along tether 282. Fig. 18B shows a spring 530, one end of which is coupled to anchor 48 (e.g., to an anchor head 47 thereof) and the other end of which is coupled to tether 282. Springs 520 and 530 are typically tension springs. For some applications, spring 530 is rigidly coupled to anchor head 47.

5 For illustrative purposes, springs 520 and 530 are shown being used with system 200 (e.g., with prosthetic valve assembly 202), described hereinabove. However it is to be noted that the techniques described with reference to Figs. 18A-B may alternatively or additionally be used to facilitate implantation of other prosthetic valves and/or prosthetic valve assemblies described herein, *mutatis mutandis*.

10 Typically, springs 520 and 530 provide similar functionality to springs 484 and 504, described hereinabove, *mutatis mutandis*. For example, for some applications, springs 520 and 530 provide an indication of a state of the spring that is observable and recognizable using fluoroscopy. That is, the springs are configured to change shape in response to a force applied to them, in a manner that is detectable and recognizable using  
15 fluoroscopy. For some applications, springs 520 and 530 also alter the relationship between (a) the length of tether 282 disposed between eyelet 222 and anchor 48 and (b) tension on the tether, e.g., as described hereinabove with reference to springs 484 and 504, *mutatis mutandis*.

Reference is again made to Figs. 16, and 18A-B. Springs 484, 520 and 530 are  
20 shown as helical springs. However it is to be noted that each of these springs may have a shapes other than a helix. For example, each of these springs may have a zigzag shape. For some applications, the use of a spring that defines a repeating (e.g., oscillating) pattern such as a helix or a zigzag facilitates fluoroscopic identification of the state of the spring. For example, whereas a linear elastically-stretchable member (e.g., a strip of elastic  
25 rubber) remains linear when stretched, the shape of a helical or zigzag spring changes as force increases.

Reference is made to Figs. 19A-B, which are schematic illustrations of a system  
700 for facilitating delivery of a prosthetic valve body 702, in accordance with some applications of the invention. System 700 comprises a delivery tool 704 that comprises a  
30 distal housing 706, configured to house valve body 702 in a compressed state thereof, a proximal portion 708, and a flexible longitudinal portion 710 (e.g., a catheter) therebetween. Proximal portion 708 typically comprises a handle 712. Housing 706 is configured to be transluminally advanced to the heart of the subject (e.g., as described

herein, *mutatis mutandis*, while proximal portion 708 remains outside the body of the subject. Proximal portion 708 (e.g., handle 712 thereof) comprises a force detector 716 that detects a force between (a) the proximal portion, and (b) housing 706 and/or valve body 702 coupled thereto. Typically, force detector 716 detects tension. That is, the force  
5 detector detects resistance of valve body 702 to a proximally-directed force applied by tool 704 (e.g., when tool 704 is moved proximally).

Housing 706 is advanced through native valve 10 and into ventricle 8, and valve body 702 is partly advanced out of the housing, and automatically expands toward an expanded state (Fig. 19A). Valve body 702 is coupled to a plurality of tissue-engaging  
10 elements (e.g., tissue-engaging legs) 714 that protrude radially out from the valve body when exposed from housing 706. Tissue-engaging elements 714 are configured to engage leaflets 14 of the native valve, thereby facilitating anchoring of the valve body.

Typically system 700 is used for implantation of valve body 702 at a native valve at which a prosthetic valve support (e.g., an upstream support) has already been delivered, and to which the valve body is intracorporeally coupled (e.g., as described elsewhere  
15 herein). For example, and as shown in Figs. 19A-B, system 700 may be used to implant valve body at native valve 10 after implantation of support 42 at the native valve. As described with reference to Figs. 1A-D, support 42 is secured against the upstream surface of native valve 10 by being anchored, via tethers (e.g., longitudinal members 102), to  
20 ventricular muscle tissue. (The tethers are not visible in Figs. 19A-B.)

Pulling housing 706 and valve body 702 proximally (i.e., atrially) while tissue-engaging elements 714 are protruding pushes the tissue-engaging elements against leaflets 14, reducing a height of a gap between the tissue-engaging elements and support 42, and sandwiching the leaflets against the support (Fig. 19B). Resistance to proximal movement  
25 of valve body 702 (e.g., due to support 42 and leaflets 14) is detected and displayed by force detector 716. The operating physician is thereby able to couple valve body 702 to support 42 (e.g., by fully deploying the valve body within the opening defined by the support) while a desired degree of tension is observed. The coupling of the valve body to the support fixes the degree of tension, such that leaflets 14 remain sandwiched, and the  
30 valve body remains secured to the native valve.

For some applications, alternatively or additionally to using extracorporeal force detector 716, the force encountered by tissue-engaging elements 714 is observed using fluoroscopy (e.g., by observing a shape and/or position of the tissue-engaging elements).

For such applications, the tissue-engaging elements are typically configured to facilitate such observation, as described herein for various springs. For some applications, elements 714 are configured (e.g., shaped) to define a loop, e.g., as described hereinabove for springs 504, *mutatis mutandis*.

5 For some applications, valve body 702 is coupled via tethers to tissue anchors that are anchored to ventricular muscle tissue, as described elsewhere herein. For some such applications, a spring couples the valve body to each tissue anchor (e.g., as described with reference to Figs. 16-18B, *mutatis mutandis*). For some applications in which a spring couples the valve body to each tissue anchor, reducing the height of the gap automatically  
10 (and typically immediately) alters a force on the spring (e.g., when the valve body is locked to the tether before reducing the height of the gap). For some applications in which a spring couples the valve body to each tissue anchor, reducing the height of the gap does not necessarily alter the force on the spring (e.g., when the valve body is slidably couplable to the tether until after the height is reduced, and is subsequently locked to the  
15 tether. For example, tool 230 and/or tool 460 may be used, *mutatis mutandis*, to measure and control tension and length of the tether until the valve body is locked to the tether.

It is to be noted that the above technique may be used for prosthetic valve assemblies in which the valve body is pre-coupled to the upstream support, *mutatis mutandis*. For such applications, the proximal pulling force is not a sandwiching force,  
20 but rather is a testing force, typically used in combination with another testing force, e.g., as described hereinbelow, e.g., with reference to Fig. 20.

Reference is made to Fig. 20, which is a schematic illustration showing examples in which force measurements described herein may be combined to facilitate implantation of a prosthetic valve, in accordance with some applications of the invention. Each  
25 apparatus and technique described herein for measuring force (e.g., tension) is described in a particular context (e.g., with reference to a particular prosthetic valve assembly, prosthetic valve body, and/or support) for the purpose of clarity. It is to be understood that the apparatus and techniques described in one context may be used to measure force in another context (e.g., to facilitate controlled implantation of a different prosthetic valve  
30 assembly, prosthetic valve body, and/or support), and may be combined with one or more of the other apparatus and/or techniques.

Fig. 20 shows examples of combinations of apparatus and techniques described herein, which include:

(1) Extracorporeal detection of tension on tethers (box 722). This is described, for example, with reference to force detector 472 of tool 460 of Figs. 15A-C.

(2) Extracorporeal detection of atrially-directed force of valve-mounted tissue-engaging elements against tissue (e.g., leaflets or annulus) of the native valve (box 742).  
5 This is described, for example, with reference to Figs. 19A-B.

(3) Extracorporeal detection of sandwiching force (box 720). That is, extracorporeal detection of the force of tissue-engaging elements coupled to the valve body against the native valve tissue and/or the upstream support. This is described, for example, (a) with reference to Figs. 19A-B, and (b) with reference to force detector 472 of  
10 tool 460 (Figs. 15A-C) being used to augment the apparatus and facilitate the techniques described with reference to Figs. 21A-B.

(4) Intracorporeal detection (observed using imaging) of tension on tethers (724). This is described, for example, with reference to the springs described with reference to Figs. 16, 17, and 18A-B.

(5) Intracorporeal detection (observed using imaging) of atrially-directed force of  
15 valve-mounted tissue-engaging elements against tissue (e.g., leaflets or annulus) of the native valve (box 744). This is described, for example, with reference to Figs. 19A-B.

(6) Intracorporeal detection (observed using imaging) of sandwiching force (box 726). This is described, for example, with reference to one or more of the springs  
20 described with reference to Figs. 16, 17, and 18A-B being used to augment the apparatus and facilitate the techniques described with reference to Figs. 21A-B.

(7) Intracorporeal detection (observed using imaging) of ventricularly-directed force of the upstream support against the native annulus (box 728). For some applications, this is achieved by using imaging (e.g., fluoroscopy) to extracorporeally  
25 observe intracorporeal changes in the shape of the upstream support (e.g., changes described with reference to Figs. 8D-E, 14A-B, and/or 15A-B), in a similar manner to that described for extracorporeally observing changes in the shape of springs (e.g., described with reference to Figs. 16, 17, and 18A-B), *mutatis mutandis*.

It is hypothesized that combining two or more of the force-measurement  
30 techniques described herein may provide synergistic benefits when implanting an implant (e.g., a prosthetic valve assembly, prosthetic valve body, and/or prosthetic valve support), so as to facilitate controlled implantation (box 730). The ability to control various forces

that secure the implant allows, inter alia, the forces to be spread as desired by the operating physician. For example, it may be desirable:

- that tension is equally (or otherwise) distributed between the tethers,
- that tension on a given tether is optimized (discussed hereinbelow),
- 5       • that, during operation of the valve, resistance to a force that pushes the valve body in an atrial direction (e.g., during ventricular systole) is optimally balanced between the various anchoring elements, such as between (a) tissue anchors 48 and tethers coupled thereto and (b) other tissue-engaging elements (e.g., tissue-engaging elements 714 (Figs. 19A-B) or tissue-engaging elements 580 (Figs. 21A-B), thereby balancing the anchoring
- 10       forces between different tissue sites, and/or
- that sandwiching forces are greater than, equal to, or less than the tensile force provided by the tethers.

It is to be noted that the example combinations provided hereinabove are intended to be illustrative, and not limiting.

15       As described hereinabove, it may be desirable to that tension on a given tether is optimized. For example, it may be desirable that tension on the given tether to be maximized within a tension range that is known to be supported by (1) the tissue anchor to which the tether is coupled, and (2) the tissue to which the tissue anchor is anchored. For some applications, subsequently to anchoring the tissue anchor, the operating physician

20       applies a testing pulling force to the tissue anchor. The testing pulling force is used to confirm that the anchored tissue anchor is capable of supporting an overload tension that is greater than an expected tension that it is expected that the anchor will encounter during operation. The expected tension may be determined at least in part based on possible ventricular blood pressure and the cross-sectional area of the lumen of the valve body.

25       For some applications, the testing pulling force is applied (e.g., via the tether or via the anchor manipulator), and movement of the tissue anchor is observed using imaging, e.g., as described with reference to Figs. 1A-B). For some applications, the testing pulling force is applied while measuring tension using an extracorporeal force detector such as detector 472 (Figs. 15A-C), mutatis mutandis.

30       For some applications, the testing pulling force is applied by applying tension to the tether, and the tension is measured using intracorporeal springs and fluoroscopy, as described hereinabove, mutatis mutandis. It is to be noted that, for such applications, the

same technique is used (1) to confirm that the anchored tissue anchor is capable of supporting the overload tension, and (2) to facilitate the application of the tension (e.g., the anchoring tension) that will be fixed when the locking member is locked to the tether.

As described hereinabove, it may be desirable that, during operation of the valve, resistance to a force that pushes the valve body in an atrial direction (e.g., during ventricular systole) is optimally balanced between the various anchoring elements. For some applications, the following technique is used:

(1) Anchor at least one tissue anchor coupled to a respective at least one tether (e.g., within guide members).

(2) Advance a valve body that comprises at least one tissue-engaging element (e.g., a tissue-engaging leg) over at least part of the tether (e.g., by advancing over a guide member), such that a length of the tether is disposed between the valve body and the tissue anchor. Examples of such tissue-engaging elements are described with reference to Figs. 19A-B and 21A-B. The valve body may or may not be pre-coupled to an upstream support.

(3) Apply a first tension to the tether (measured intracorporeally or extracorporeally).

(4) Apply proximal pulling force to the valve body such that the tissue-engaging element applies force against tissue of the native valve, such as leaflets and/or annulus. This pulling typically automatically increases the tension on the tether.

(5) While applying the proximal pulling force, intracorporeally and/or extracorporeally measure (a) force of tissue-engaging element against tissue, and (b) tension on the tether (e.g., the change in tension on the tether caused by the proximal pulling).

(6) At least in part based on measurements (a) and (b) of step 5, adjust the length of the tether disposed between the valve body and the tissue anchor, and/or lock the valve body to the tether (i.e., fix the length of the tether disposed between the valve body and the tissue anchor).

It is hypothesized that the above technique provides a prediction of the force distribution between the various anchoring elements that will exist during operation of the prosthetic valve assembly (e.g., during the lifetime thereof). For example, the technique provides a prediction of force distribution between the ventricular anchors and the valve-

mounted tissue-engaging elements if/when atrially-directed force increases (e.g., as will be encountered during ventricular systole and/or increases in systemic blood pressure). Based on this indication, the technique facilitates adjustment of this distribution, via adjustment of the length of tethers disposed between the valve body and the tissue anchors.

Reference is made to Figs. 21A-B, which are schematic illustrations of a prosthetic valve assembly 552, in accordance with some applications of the invention. Prosthetic valve assembly 552 comprises (1) a prosthetic valve body 554, which comprises a first frame 556 (e.g., a wire frame), and is shaped to define a lumen therethrough, (2) an annular upstream support 560, which comprises a second frame 562 (e.g., a wire frame), is shaped to define an opening through the upstream support, and is configured to be placed against an upstream surface (e.g., an atrial surface) of native valve 10 (e.g., of an annulus thereof), and (3) a flexible sheet 564 that couples the first frame to the second frame. Fig. 21A shows assembly 552 in an expanded state thereof (e.g., in the absence of external forces, such as if the assembly were resting on a table surface). In the expanded state of assembly 552 (and thereby of body 554), frame 556 of body 554 is generally cylindrical, and has a diameter  $d_{13}$ . In the expanded state of assembly 552 (and thereby of upstream support 560), frame 562 of support 560 is typically generally annular, and has an outer perimeter 563 that has a diameter  $d_{14}$ , which is greater than diameter  $d_{13}$ .

Assembly 552 comprises one or more tissue-engaging elements 580 (e.g., legs) that protrude radially outward from valve body 554 so as to define a diameter  $d_{15}$ , which is greater than diameter  $d_{13}$ . Typically, and as shown in Figs. 21A-B, frame 556 of body 554 is shaped to define tissue-engaging elements 580. Assembly 552 further comprises one or more tensioning elements (e.g., contraction wires) such as one or more tethers 582, a first portion (e.g., a distal end) of each tether being coupled to valve body 554, and a second portion of each tether being coupled (e.g., slidably coupled) to a portion of assembly 552 that is configured to be placed upstream of valve body 554. For example, and as shown, the second portion of each tether 582 may be slidably coupled to an upstream region of sheet 564. Alternatively or additionally, the second portion of each tether 582 may be slidably coupled to frame 562 of support 560. For some applications, this is facilitated by frame 562 being shaped to define one or more respective protrusions that protrude radially inward from the annular shape of the frame, to the site at which each tether 582 is shown in Fig. 21A passing through the sheet.

For some applications, except for (1) the presence of tissue-engaging elements 580 and tethers 582, and (2) the absence of eyelets 222, assembly 552 is identical to (e.g., comprises the same components as, and/or has identical functionality to) assembly 202, described hereinabove. Identically-named components of system 202 and system 552 are typically identical in structure and/or function.

For some applications, assembly 202 comprises tissue-engaging elements 580 and/or tethers 582. For some applications, assembly 552 comprises eyelets 222 and/or locking members 262 for sliding over and locking to guide members.

Both support 560 of assembly 552 and support 210 of assembly 202 may be flat annular (e.g., as shown for support 210) or frustoconical (as shown for support 560).

Fig. 21B shows assembly 552 being implanted. Following transluminal delivery to native heart valve 10, valve body 554 is typically deployed first (i.e., before support 560), as shown in state A of Fig. 21B. For some applications, valve body is deployed sufficiently far into the ventricle that tissue-engaging elements 580 can expand freely without interfering with leaflets 14 of the native valve, and valve assembly is subsequently moved atrially into the position shown in state A of Fig. 21B.

Subsequently, upstream support 560 is deployed, e.g., by a delivery housing 584 thereof being retracted (state B of Fig. 21B). Support 560 becomes placed against the upstream (e.g., atrial) surface of native valve 10, such as against the annulus of the valve and/or against the upstream surface of native leaflets 14. Typically, immediately subsequently to deployment of body 554 and support 560, assembly 552 has a total height  $d16$  from a proximal end of support 560 to a distal end of body 554 (e.g., a height along an atrioventricular axis), and a distance  $d17$  (e.g., a gap) measured along the height exists between a distal end of frame 562 and a proximal-most part of frame 554 (e.g., tissue-engaging elements 580 defined by the frame).

Subsequently, tethers 582 are tensioned so as to draw support 560 and body 554 closer to each other, thereby reducing the total height of assembly 552 to height  $d18$ , and reducing the distance between the distal end of frame 562 and the proximal-most part of frame 554 to a distance  $d19$  (state C of Fig. 21B). This moves body 554 and tissue-engaging elements 580 closer to leaflets 14, thereby sandwiching the leaflets between the tissue-engaging elements and support 560, and thereby anchoring assembly 552 at the native valve. Sheet 564 maintains fluid communication (e.g., sealed fluid communication) through assembly 252, while also allowing the described contraction of the assembly.

Typically, this characteristic is due to sheet 564 having tensile strength, but not compressive strength, and therefore rumpling when tethers 582 are tensioned.

Tensioning of tethers 582 may be accomplished by any suitable technique. For some applications, the tensioning is performed using control rods 86 and locking members 110, e.g., as described with reference to Figs. 1C-D, *mutatis mutandis*. For some applications, the tensioning is performed using reference-force tubes and locking members, e.g., as described with reference to Figs. 7B-8H, *mutatis mutandis*. For some applications, support 560 comprises a ratchet mechanism that facilitates the tensioning by allowing only one-way movement of tether 582 through the support. For some applications, assembly 552 comprises a spool mechanism for each tether, and tensioning is performed by rotating the spool mechanism.

For some applications, assembly 552 has a compressed state (e.g., for transluminal delivery) in which the assembly defines an articulation zone between frames 556 and 562, e.g., as described hereinabove for assembly 202, *mutatis mutandis*.

For some application, one or more of the techniques described hereinabove may be used to (1) control applied to tethers 582, and/or (2) facilitate intracorporeal measurement of tension on the tethers (and optionally fluoroscopic detection of that measurement). For example, assembly 552 may comprise a tension spring midway along each tether 582, and/or may comprise a compression spring at the coupling point of support 560 and the tether (e.g., between the support and a locking member 262 configured to lock a respective tether to the support). Alternatively or additionally, for applications in which the tensioning is performed using reference-force tubes and locking members (e.g., as described with reference to Figs. 7B-8H), tool 460 may be used, *mutatis mutandis*, to extracorporeally detect the tension applied to tethers 582.

Reference is made to Figs. 22A-B, which are schematic illustrations of a prosthetic valve assembly 602, comprising a prosthetic valve 603 having a tubular valve body 604 that comprises an upstream portion 606, a downstream portion 608, and an elastic portion 610 disposed between the upstream portion and the downstream portion, in accordance with some applications of the invention. Prosthetic valve 603 (e.g., valve body 604 thereof) is shaped to define a continuous lumen through portions 606, 610, and 608. Prosthetic valve 603 is configured to be implanted at native valve 10 such that upstream portion 606 is disposed in atrium 6 of the heart of the subject, and such that downstream portion 608 is disposed in ventricle 8 of the heart of the subject. For example, prosthetic

valve 603 may be coupled to a prosthetic valve support 612 that has been previously placed against (e.g., coupled to) to the native valve, and that defines an opening. Support 612 may comprise (1) a support described elsewhere herein (e.g., support 42 described with reference to Figs. 1A-F and 19A-B, support 310 described with reference to Figs. 10A-B, and/or support 350, described with reference to Figs. 11A-B, and/or (2) a support described in US Provisional Patent application 61/756,034 to HaCohen et al., from which the present application claims priority, and which is incorporated herein by reference.

For some applications, and as shown in Fig. 22B, prosthetic valve support 612 comprises one or more tissue-engaging elements 618, an annular upstream support portion 620, and a flexible stabilizing member 622, such as a stabilizing band, coupled to the tissue-engaging elements, and configured to form a ring that is shaped to define an opening therethrough. Tissue-engaging elements 618 may comprise, as shown in Figs. 22A-B, clips configured to be coupled to leaflets 14 of the native valve.

Tubular valve body 604 typically comprises a frame 614, such as a stent-like wire frame. As shown in Fig. 22A, prosthetic valve 603 typically further comprises a covering 616, disposed over (e.g., covering) an inner surface of frame 614, thereby providing a sealed lumen from an upstream end to a downstream end of the tubular valve body. Typically, an excess of covering 616 is provided in the vicinity of elastic portion 610, so as to facilitate elastic stretching of the elastic portion.

Typically, prosthetic valve 603 comprises an expandable prosthetic valve, and is deployed such that it (1) expands within the opening defined by upstream support portion 620 and/or the opening defined by stabilizing member 622, (2) applies a radially-expansive force against the upstream support portion and/or the stabilizing member, and (3) thereby becomes coupled thereto. Typically, and as shown in Fig. 22B, downstream portion 608 is expanded and coupled to stabilizing member 622 before upstream portion 606 is expanded and coupled to upstream support portion 620. While downstream portion 608 is coupled to member 622, and before upstream portion 606 is coupled to portion 620, elastic portion 610 may be stretched and compressed e.g., such as by moving upstream portion 606 further upstream and downstream. Such stretching and compressing changes a length of prosthetic valve 603, and for some applications, facilitates the coupling of a pre-determined portion of the prosthetic valve (e.g., of upstream portion 606) to upstream support portion 620, irrespective, to some degree, of (a) a distance between tissue-engaging elements 618 and upstream support portion 620, and/or (b) a dimension of native

valve 10 (e.g., a length of leaflets 14). For some applications, such stretching and compressing adjusts a degree of tension of elastic portion 610, and may alternatively or additionally facilitate "tightening" of leaflets 14 against the implanted apparatus, such as drawing of the leaflets toward upstream support portion 620.

5 For some applications, prosthetic valve 603 may be used in combination with other apparatus and techniques described herein. For example, valve body 604 may be substituted for another valve body described herein, mutatis mutandis, including valve bodies that are described herein as being intracorporeally coupled to an upstream support, and valve bodies that are described herein as being provided pre-coupled to an upstream  
10 support (either directly, or via a flexible sheet).

Reference is made to Figs. 23-24, which are schematic illustrations of respective systems for facilitating anchoring of a tissue anchor in the heart of a subject, in accordance with some applications of the invention. Each system comprises a delivery tool that comprises (1) a steerable catheter configured to be transluminally advanced to the heart of  
15 the subject (e.g., via sheath 46), and (2) an obstructing element disposed at a longitudinal site of the catheter, and configured to extend laterally (e.g., radially) outward from the catheter so as to inhibit movement of at least the longitudinal site of the catheter through the heart valve by abutting tissue of the heart valve.

Fig. 23 shows a system 640, comprising a delivery tool 642 that comprises a  
20 catheter 644 and an obstructing element 646. Obstructing element 646 is typically collapsible for transluminal delivery (e.g., via sheath 46), and expandable in atrium 6 of the heart. For some applications, element 646 is configured to expand automatically upon becoming exposed from the distal end of sheath 46. Obstructing element 646 is disposed at a longitudinal site 648 of catheter 644, and is dimensioned, when in the expanded state  
25 thereof, to not pass through native valve 10 (i.e., between leaflets 14 of the native valve). When a distal end 645 of the catheter is extended through native valve 10, obstructing element 646 abuts the atrial surface of the native valve (e.g., one or more leaflets, or the annulus), and thereby inhibits movement of at least longitudinal site 648 of the catheter from passing through the valve. Therefore a known length d20 of catheter 644 (i.e., the  
30 length between longitudinal site 648 and distal end 645) is disposed downstream of the atrial surface of valve 10. Distal end 645 is thereby placeable against ventricular tissue at ventricular sites that are disposed at a distance from the atrial surface (e.g., from a portion of the atrial surface that element 646 abuts) that is generally equal to d20. A distal portion

652 of catheter 644, disposed distal to longitudinal site 648, is typically steerable, so as to facilitate placement of distal end 645 against many (e.g., any) ventricular site that is disposed at that distance from the atrial surface.

A tissue anchor 48 is advanced through catheter 644 using an anchor manipulator 5 650, and anchored to tissue at the ventricular site at which distal end 645 is disposed. Typically, little or none of anchor 48 or manipulator 650 becomes exposed from distal end 645 during anchoring.

Fig. 24 shows a system 660, comprising a delivery tool 662 that comprises a catheter 664 and an obstructing element 666. Obstructing element 666 is typically 10 collapsible for transluminal delivery (e.g., via sheath 46), and expandable in atrium 6 of the heart, and may be identical to obstructing element 646, described hereinabove. For some applications, element 666 is configured to expand automatically upon becoming exposed from the distal end of sheath 46. Obstructing element 666 is disposed at a longitudinal site 668 of catheter 664, and is dimensioned, when in the expanded state 15 thereof, to not pass through native valve 10 (i.e., between leaflets 14 of the native valve). When a distal end 665 of the catheter is extended through native valve 10, obstructing element 666 abuts the atrial surface of the native valve (e.g., one or more leaflets, or the annulus), and thereby inhibits movement of at least longitudinal site 668 of the catheter from passing through the valve. Therefore a known length d21 of catheter 664 (i.e., the 20 length between longitudinal site 668 and distal end 665) is disposed downstream of the atrial surface of valve 10.

Length d21 of system 660 is typically shorter than length d20 of system 640, and in contrast to system 640, for system 660, catheter 664 is not configured for distal end 665 to be placed against ventricular tissue. Rather, an anchor manipulator 670 advances tissue 25 anchor 48 through catheter 664, out of the distal end 665, and toward a ventricular site at which it anchors the tissue anchor. Typically, anchor manipulator 670 is slidably coupled to catheter 664 such that a distal end of the anchor manipulator is slidable distally no more than a pre-determined distance d22 from longitudinal site 668 (and thereby no more than a pre-determined distance from distal end 665 of catheter 664). Anchor manipulator 670 is 30 thereby used to anchor anchor 48 at a ventricular site that is disposed at a distance from the atrial surface (e.g., from a portion of the atrial surface that element 666 abuts) that is generally equal to d22. Typically, anchor manipulator 670 (or at least a distal portion 672

thereof that is exposable from distal end 665 of catheter 664) is steerable independently of catheter 664.

It is to be noted that, for systems 640 and 660, the distance from the atrial surface at which anchor 48 is anchored is generally equal, but not necessarily exactly equal, to d20 or d22. For example, anchor 48 may be anchored at a site that is closer to another portion of the atrial surface than to the portion of the atrial surface that the obstructing element abuts. Alternatively or additionally, curvature of the catheter and/or the anchor manipulator may result in a direct distance between the atrial surface and the tissue anchor being smaller than d20 or d22.

Typically, anchor 48 is coupled to a tether, guide member, and/or other longitudinal member (e.g., as described hereinabove with reference to other systems). When the anchor driver is decoupled from the anchor and withdrawn proximally, the tether extends proximally from the anchor (e.g., out of the body of the subject) so that an implant, such as a prosthetic valve, prosthetic valve support, and/or a prosthetic valve assembly (e.g., those described hereinabove) may be advanced therealong and/or locked thereto, e.g., as described hereinabove for other systems, *mutatis mutandis*. Because the distance between the tissue anchor and the atrial surface is known, for some applications the tether coupled to the tissue anchor may comprise fewer locking sites for locking to the implant, a relatively shorter locking site, and/or only one locking site. It is hypothesized that this may provide the possibility of using simpler, smaller and/or more effective mechanisms to lock the implant to the tether.

Reference is again made to Figs. 7A-C, 8A-H, 9A-B, 15A-C, 16, 17, 18A-B, and 21A-B. The flexible sheets described hereinabove typically have tensile strength but very low compressive strength along the longitudinal axis of assembly 202. Due to this characteristic, *inter alia*, implant-control rod 246 is coupled (via mount 248) to assembly 202 by being coupled to valve body 204, such that when the valve body is pushed distally, the valve body pulls upstream support 210 via sheet 214. (It is hypothesized that it would be less effective for the implant-control rod to be coupled to the support, because in such a case sheet 214 may rumple and the support may move toward the valve body, possibly reducing articulation at the articulation zone. Nevertheless, for applications in which such reduced articulation is in any case sufficient, the implant-control rod may be coupled to the support) This characteristic of the flexible sheet also facilitates the height-adjustment of assembly 552 and its sandwiching of the native leaflets by tensioning tethers 582.

Although each of the prosthetic valve assemblies is shown implanted in a generally symmetrical state, it is to be noted that for some applications this characteristic of the sheet facilitates asymmetrical implantation. For example, the assembly may better conform to the native anatomy, and/or one tether of assembly 552 may be tensioned more  
5 than another so as to alter the anchoring, sealing, and/or flow characteristics of the assembly, e.g., in response to the native anatomy.

For some applications it may be advantageous for the valve body to be disposed at a particular rotational orientation within ventricle 8, and for the upstream support to be disposed at a particular rotational orientation within atrium 6. For example, for prosthetic  
10 valve assemblies such as assembly 202 that are tethered to ventricular anchors, it may be advantageous for each eyelet to be aligned with a respective anchor, and for the point at which each guide members passes through the upstream support to be aligned with a respective commissure. Alternatively or additionally, the upstream support may be geometrically asymmetric, and a particular rotational orientation with respect to atrial  
15 tissue may be advantageous. (Examples of such upstream supports are described in PCT patent application publication WO/2013/021374 to Gross et. al, which is incorporated herein by reference.) Alternatively or additionally, the upstream support may be asymmetric with respect to rigidity (i.e., some regions of the support may be more rigid than others). Alternatively or additionally, it may be advantageous to place the holes in  
20 sheet 214 through which tubes 260 pass in a particular rotational orientation with respect to the native valve.

For some applications, the sheet facilitates implantation of the upstream support in a different rotational position to its valve body, e.g., by twisting. For example, the upstream support may be implanted at more than 5 degrees (e.g., more than 10 degrees,  
25 such as more than 20 degrees) rotational offset with respect to the valve body.

Reference is again made to Figs. 7A-14B, 16-18B, and 21A-B. For some applications the first frame of the valve body is coupled to the second frame of the upstream support by the sheet (e.g., generally only by the sheet) in the compressed state (e.g., assemblies 202, 302, 342 and 552) and/or in the expanded state (e.g., assemblies 202  
30 and 552). As used in the present application, including in the claims, (a) the first and second frames being "coupled by the sheet", and/or (b) the sheet "coupling the first frame to the second frame", do not include applications in which the frames are primarily and/or independently coupled to each other by a different means, and the covering extends over

both frames. For example, the first and second frames are not "coupled to each other by the sheet" (1) in assemblies 382, 402 and 422, in which the frames are provided pre-coupled directly to each other, or (2) in the expanded state of assemblies 302 and 342, in which the frames are intracorporeally coupled directly to each other.

5 For applications in which the first frame of the valve body is coupled to the second frame of the upstream support by the sheet, a gap typically exists between the first frame and the second frame. For some such applications, no metallic structure is disposed within the gap.

10 For some applications (including some applications in which the first and second frames are coupled independently of the sheet), the flexible sheet comprises, in addition to the sheet-like structure, one or more flexible longitudinal members, such as metallic or polymer wires (e.g., embedded within or attached to a surface of the sheet-like structure). These flexible longitudinal members may provide a small amount of rigidity to the sheet without detracting from the general nature of the sheet. For example, the flexible  
15 longitudinal members may facilitate opening of the sheet during deployment of the prosthetic valve assembly.

It is to be noted that for applications in which the first and second frames are coupled by the sheet, even when the sheet comprises flexible longitudinal members that are metallic wires, the frame of the valve body and the frame of the upstream support are  
20 typically distinct from each other, and can be considered to be coupled to each other by the sheet (e.g., generally only by the sheet).

For some applications, within the total height of the prosthetic valve assembly, a distance exists within which no rigid and/or metallic structure is disposed. For example, for assembly 552, typically no rigid and/or metallic structure is disposed within distance  
25 d17 and/or distance d19. It is to be noted that a similar distance exists for assembly 202 between frames 210 and 206 (e.g., when implanted; see Figs. 8F-G). For some applications, for assembly 552, only sheet 564 and tethers 582 are disposed within distances d17 and d19. However, for some applications, tissue-engaging elements 580 extend proximally toward frame 562 such that the distance in which no rigid and/or  
30 metallic structure is disposed is reduced and/or absent (e.g., when tethers 582 are tensioned).

Reference is again made to Figs. 1A-F, 3A-C, 6 and 7A-8H. For some applications of the invention, tissue anchor 48 and/or the guide member coupled thereto

(e.g., guide member 56, guide member 256, and/or the components thereof) are included as components of the provided apparatus. That is, they are typically provided with the prosthetic valve assembly. For some applications of the invention, the tissue anchor and/or the guide member coupled thereto are not included as components of the provided apparatus (e.g., they are obtained separately).

It will be understood that, although the terms "first," "second," etc. may be used in the present application (including the specification and the claims) to describe various elements and/or directions, these terms should not be limiting. These terms are only used to distinguish one element and/or direction from another. Thus, a "first" element described herein could also be termed a "second" element without departing from the teachings of the present disclosure.

As used in the present application, including in the claims, a "central longitudinal axis" of a structure (e.g., an elongate structure) is the set of all centroids of transverse cross-sectional sections of the structure along the structure. Thus the cross-sectional sections are locally perpendicular to the central longitudinal axis, which runs along the structure. (If the structure is circular in cross-section, the centroids correspond with the centers of the circular cross-sectional sections.)

It will be appreciated by persons skilled in the art that the present invention is not limited to what has been particularly shown and described hereinabove. Rather, the scope of the present invention includes both combinations and subcombinations of the various features described hereinabove, as well as variations and modifications thereof that are not in the prior art, which would occur to persons skilled in the art upon reading the foregoing description.

## CLAIMS

1. Apparatus for use with a native valve of a heart of a subject, the apparatus comprising:
- a valve body:
- 5 comprising (1) a first frame shaped to define a lumen therethrough, and (2) a valve member disposed within the lumen,
- having a compressed state in which the first frame has a first diameter, and
- having an expanded state in which the first frame has a second diameter that is greater than the first diameter;
- 10 an upstream support:
- configured to be placed against an upstream surface of the native valve, comprising a second frame,
- having a compressed state, and
- having an expanded state in which the second frame is annular, has
- 15 an inner perimeter that defines an opening through the second frame, and has an outer perimeter; and
- a flexible sheet that couples the upstream support to the valve body.
2. The apparatus according to claim 1, wherein the upstream support is coupled to the valve body only via the sheet.
- 20 3. The apparatus according to claim 1, wherein:
- the valve body has an upstream end, a downstream end, and a longitudinal axis therebetween along which the lumen is defined, and
- when the valve body is in the expanded state thereof and the upstream support is in the expanded state thereof:
- 25 the first frame is attached to the second frame at the inner perimeter of the second frame, and
- the sheet is attached to the valve body and to the upstream support in a manner that defines a pocket region between the sheet and at least the inner perimeter of the second frame, the sheet not being attached to the first frame or the
- 30 second frame in the pocket region.
4. The apparatus according to claim 1, wherein the sheet provides fluid communication between the opening and the lumen.

5. The apparatus according to claim 1, wherein the sheet is not attached to the inner perimeter of the second frame.
6. The apparatus according to claim 1, wherein the sheet is not attached to an upstream end of the valve body.
- 5 7. The apparatus according to claim 1, wherein the sheet is generally annular when the valve body is in the expanded state thereof and the upstream support is in the expanded state thereof.
8. The apparatus according to claim 1, wherein the sheet is generally frustoconical when the valve body is in the expanded state thereof and the upstream support is in the  
10 expanded state thereof.
9. The apparatus according to claim 1, wherein the sheet is attached to the inner perimeter of the second frame.
10. The apparatus according to claim 1, wherein the sheet is circumferentially attached to the second frame at a radius that is greater than a radius of the inner perimeter.
- 15 11. The apparatus according to claim 1, wherein the sheet is circumferentially attached to the second frame at the outer perimeter of the second frame.
12. The apparatus according to claim 1, wherein the sheet is attached to an upstream end of the valve body.
13. The apparatus according to claim 1, wherein the first frame is generally cylindrical  
20 in both the compressed state thereof and the expanded state thereof.
14. The apparatus according to claim 1, wherein the second frame is generally cylindrical in the compressed state thereof.
15. The apparatus according to any one of claims 1-14, wherein the valve body comprises at least one downstream anchor, configured such that, in the expanded  
25 configuration of the valve body, the anchor protrudes radially outward from the first frame.
16. The apparatus according to claim 15, further comprising at least one tensioning element, coupled to the valve body and to the upstream support, a length of the tensioning element between the valve body and the upstream portion being adjustable such that a  
30 distance between the first frame and the second frame is adjustable.

17. The apparatus according to claim 16, wherein the at least one tensioning element comprises a tether.
18. The apparatus according to claim 16, wherein the at least one tensioning element is coupled to the first frame, and slidably coupled to the second frame.
- 5 19. The apparatus according to any one of claims 1-14, wherein the valve body, the upstream support and the sheet together define a prosthetic valve assembly, the prosthetic valve assembly:
- having an expanded state in which the valve body is in the expanded state thereof and the second frame of the upstream support is in the expanded state thereof,
- 10 having a compressed state in which:
- the prosthetic valve assembly has a longitudinal axis,
- the valve body is in the compressed state thereof at a first zone of the longitudinal axis,
- the upstream support is in the compressed state thereof at a second zone of
- 15 the longitudinal axis, and
- the prosthetic valve assembly defines an articulation zone, between the first zone and the second zone, in which at least part of the sheet is disposed, in which neither the first frame nor the second frame is disposed, and about which the valve body and the upstream support are articulatable with respect to each other.
- 20 20. The apparatus according to claim 19, further comprising a delivery tool:
- comprising a first housing configured to house and maintain at least part of the upstream support in the compressed state thereof, and defining a first housing orifice through which the at least part of the upstream support is removable from the first housing,
- 25 comprising a second housing configured to house and maintain at least part of the valve body in the compressed state thereof, and defining a second housing orifice through which the at least part of the valve body is removable from the second housing,
- having a contracted state in which the second housing is disposed at a first distance from the first housing, and in which the delivery tool is configured to transluminally
- 30 advance the prosthetic valve assembly in the compressed state thereof, to the native valve, and
- having an extended state in which the second housing is disposed at a second distance from the first housing, the second distance being greater than the first distance,

wherein the apparatus is configured such that, when the at least part of the upstream support is housed by the first housing and the at least part of the valve body is housed by the second housing, transitioning of the delivery tool from the contracted state into the extended state exposes at least part of at least one component selected from the group consisting of: the valve body and the upstream support, from the housing that houses the  
5 selected component.

21. The apparatus according to claim 20, wherein:  
the apparatus is configured to be used with at least two guide members,  
the prosthetic valve assembly comprises at least two eyelets, each eyelet being  
10 slidable over a respective one of the guide members, and  
the apparatus is configured such that the eyelets of the prosthetic valve assembly protrude radially outward and radially beyond an outer surface of the second housing while: (1) the at least part of the valve body, in the compressed state thereof, is housed by the second housing, and (2) the at least part of the upstream support, in the compressed  
15 state thereof, is housed by the first housing.

22. The apparatus according to claim 21, wherein the eyelets are pivotably coupled to the valve body.

23. The apparatus according to claim 21, wherein the delivery tool further comprises at least two reference-force tubes, each reference-force tube configured (1) to be slidable  
20 over a respective one of the guide members, and (2) to apply a distally-directed force to the prosthetic valve assembly.

24. The apparatus according to claim 23, wherein, in the compressed state of the prosthetic valve assembly, each reference-force tube extends distally (1) through a lumen defined by the second frame of the upstream support, (2) through the sheet, and (3) along  
25 an outside of at least part of the valve body.

25. The apparatus according to claim 21, further comprising at least two locking members, each locking member:  
having an unlocked state in which the locking member is slidable along a  
respective one of the guide members,  
30 being transitionable into a locked state in which (1) the locking member is locked to the respective one of the guide members, and (2) the sliding of the eyelet over the guide member is inhibited.

26. The apparatus according to claim 25, further comprising the at least two guide members, wherein:

each guide member comprises:

a tubular member, shaped to define a lumen therethrough,

5 a tether, coupled at a distal end thereof to a tissue anchor configured to be anchored to ventricular tissue of the heart, at least a proximal portion of the tether being disposed within the lumen of the tubular member, and

a pull-wire, coupled at a distal portion thereof to the proximal portion of the tether, at least the distal portion of the pull-wire being disposed within the lumen of the tubular member,

10 the tubular member inhibits decoupling of the pull-wire from the tether while the distal portion of the pull-wire and the proximal portion of the tether are disposed within the lumen of the tubular member, and

while the tubular member of each guide member is disposed within the respective locking member, the tubular member inhibits transitioning of the locking member into the locked state.

27. The apparatus according to claim 26, wherein the apparatus is configured such that, for each respective guide member and locking member, while (1) the tubular member is disposed within the locking member, (2) the distal portion of the pull-wire and the proximal portion of the tether are disposed within the lumen of the tubular member, and

20 (3) the tissue anchor is coupled to the ventricular tissue:  
proximal sliding of the tubular member with respect to the tether facilitates automatic transitioning of the locking member into the locked state, and

further proximal sliding of the tubular member with respect to the tether facilitates decoupling of the pull-wire from the tether.

28. The apparatus according to claim 21, wherein at least one housing selected from the group consisting of: the first housing and the second housing has a lateral wall that is shaped to define at least two slits, the eyelets being configured to protrude radially outward from the delivery tool via the slits.

30 29. The apparatus according to claim 28, wherein each slit of the at least one selected housing is continuous with the orifice of the at least one selected housing.

30. The apparatus according to claim 21, wherein the eyelets are coupled to and protrude radially outward from the valve body.

31. The apparatus according to claim 30, wherein the eyelets are pivotably coupled to the valve body.
32. The apparatus according to claim 20, wherein:  
the articulation zone defined by the prosthetic valve assembly comprises a first  
5 articulation zone, and  
while (1) the at least part of the valve body, in the compressed state thereof, is housed by the second housing, (2) the at least part of the upstream support, in the compressed state thereof, is housed by the first housing, and (3) the delivery tool is in the contracted state thereof, the apparatus defines a second articulation zone at a longitudinal  
10 zone of the apparatus (a) between the second housing and the first housing, and (b) in which is disposed at least part of the first articulation zone.
33. The apparatus according to claim 32, wherein the delivery tool further comprises a housing-control rod that extends through the first housing and is coupled to the second  
15 housing such that a first portion of the housing-control rod is disposed within the first housing, a second portion of the housing-control rod is disposed within the second housing, and a third portion of the housing-control rod (1) is disposed within the second articulation zone, and (2) is more flexible than at least one portion of the housing-control rod selected from the group consisting of: the first portion and the second portion.
34. The apparatus according to claim 32, wherein:  
20 the delivery tool further comprises (1) a control rod assembly comprising at least a first housing-control rod coupled to the first housing, and (2) a second housing-control rod, more flexible than the first housing-control rod, extending through the first housing-control rod, extending through the second articulation zone, and coupled to the second housing.
- 25 35. The apparatus according to claim 20, wherein the second housing orifice faces the first housing orifice.
36. The apparatus according to claim 20, wherein:  
the delivery tool further comprises a flexible control rod assembly comprising (1) a  
first housing-control rod coupled to the first housing, (2) a second housing-control rod  
30 coupled to the second housing, and (3) a prosthesis-control rod reversibly couplable to the prosthetic valve assembly,

longitudinal movement of the second housing-control rod with respect to the first housing-control rod transitions the delivery tool between the contracted state and the extended state thereof, and

the valve body is removable from the second housing by moving the second housing-control rod with respect to the prosthesis-control rod.

37. The apparatus according to claim 36, wherein the prosthesis-control rod is reversibly couplable to the prosthetic valve assembly by being reversibly couplable to the valve body.

38. The apparatus according to claim 36, wherein at least part of the second housing-control rod is disposed within and slidable through the prosthesis-control rod, and at least part of the prosthesis-control rod is disposed within and slidable through the first housing-control rod.

39. The apparatus according to any one of claims 1-14, wherein the outer perimeter of the second frame has a third diameter that is greater than the second diameter.

40. The apparatus according to claim 39, wherein the inner perimeter has a fourth diameter that is greater than the second diameter.

41. The apparatus according to any one of claims 1-14, wherein, when the valve body is in the expanded state thereof and the upstream support is in the expanded state thereof, a gap is defined between the first frame and the second frame, the sheet spanning the gap.

42. The apparatus according to claim 41, wherein no metallic structure is disposed within the gap.

43. The apparatus according to any one of claims 1-14, wherein the sheet is configured to inhibit expansion of the second frame.

44. The apparatus according to claim 43, wherein the apparatus is configured such that when the second frame expands from the compressed state thereof toward the expanded state thereof, the sheet retains the second frame in a generally frustoconical shape by inhibiting expansion of at least the outer perimeter of the second frame.

45. The apparatus according to any one of claims 1-14, wherein the sheet extends over at least part of the second frame to serve as a covering of the upstream support.

46. The apparatus according to claim 45, wherein the covering defines a tissue-contacting surface of the upstream support.

47. The apparatus according to any one of claims 1-14, wherein the sheet extends over at least part of the first frame to serve as a covering of the valve body.
48. The apparatus according to claim 47, wherein the covering is disposed on an inner surface of the first frame.
- 5 49. Apparatus for use with a native valve of a heart of a subject, the apparatus comprising:
- a prosthetic valve, configured to be percutaneously delivered to the native valve;
  - an annular upstream support, configured to be placed against an upstream surface of the native valve, and to support the prosthetic valve at the native valve;
  - 10 a tissue anchor, comprising a tissue-engaging element configured to be anchored to ventricular muscle tissue of the heart;
  - a tether, coupled to the tissue anchor; and
  - a spring, couplable to the tether so as to elastically couple the tissue-engaging element to the prosthetic valve.
- 15 50. The apparatus according to claim 49, wherein the spring is shaped to define a repeating pattern.
51. The apparatus according to claim 49, wherein the spring is pre-loaded.
52. The apparatus according to claim 49, wherein the spring is a constant-force spring.
53. The apparatus according to any one of claims 49-52, wherein the spring is
- 20 configured to facilitate extracorporeal fluoroscopic observation of a state of the spring.
54. The apparatus according to claim 53, wherein the spring is coupled to a plurality of radiopaque markers such that a juxtaposition of the markers changes as the state of the spring changes, the juxtaposition of the markers being extracorporeally fluoroscopically observable.
- 25 55. The apparatus according to claim 53, wherein the spring is coupled to at least one radiopaque marker, and the apparatus further comprises an intracorporeal reference, a juxtaposition between the radiopaque marker and the intracorporeal reference being extracorporeally fluoroscopically observable.
56. The apparatus according to claim 55, wherein the intracorporeal reference
- 30 comprises a scale comprising a plurality of radiopaque markers.

57. The apparatus according to claim 56, wherein the plurality of radiopaque markers comprises a first plurality of radiopaque markers, and the at least one radiopaque marker comprises a second plurality of radiopaque markers.
58. The apparatus according to claim 53, wherein the spring is configured to provide  
5 distinct indication that is observable using fluoroscopy, when the spring is experiencing a force that is within a margin force from a target force.
59. The apparatus according to claim 58, wherein the spring is configured to provide the distinct indication when the spring experiences a force that is above 300 g force.
60. The apparatus according to claim 59, wherein the spring is configured to provide  
10 the distinct indication when the spring experiences a force that is above 400 g force.
61. The apparatus according to claim 60, wherein the spring is configured to provide the distinct indication when the spring experiences a force that is about 500 g force.
62. The apparatus according to any one of claims 49-52, wherein the spring is coupled to the prosthetic valve, and is intracorporeally lockable to the tether subsequently to  
15 anchoring of the tissue anchor to the ventricular muscle tissue.
63. The apparatus according to claim 62, wherein the spring is slidable along at least part of the tether, and is intracorporeally couplable to the tether by inhibiting the sliding.
64. The apparatus according to claim 62, wherein the prosthetic valve comprises a generally cylindrical valve body having an upstream end, and the spring comprises an  
20 elastically-deformable appendage that protrudes laterally from the valve body.
65. The apparatus according to claim 62, wherein:  
the prosthetic valve comprises a generally cylindrical valve body having an upstream end, a downstream end, and a longitudinal lumen therebetween, and  
the spring (1) comprises a compression spring having a longitudinal axis, and (2) is  
25 disposed laterally from, the valve body such that the longitudinal axis of the spring is generally parallel with the longitudinal lumen.
66. The apparatus according to any one of claims 49-52, wherein the prosthetic valve comprises:  
a generally cylindrical valve body having an upstream end, a downstream end, and  
30 a longitudinal lumen therebetween; and  
one or more tissue-engaging legs, protruding laterally outward from the valve body, and configured to be placed against a ventricular surface of the native valve.

67. The apparatus according to claim 66, wherein the prosthetic valve is couplable to the upstream support intracorporeally by being expanded within an opening defined by the upstream support while the upstream support is disposed against the upstream surface.

68. The apparatus according to claim 67, wherein the apparatus is configured such that  
5 the coupling of the prosthetic valve to the upstream support couples the tether to the prosthetic valve.

69. The apparatus according to claim 67, wherein the apparatus is configured to sandwich a portion of the native valve between the tissue-engaging legs and the upstream support by providing a space having a height between the tissue-engaging legs and the  
10 upstream support.

70. The apparatus according to claim 69, wherein the apparatus is configured to facilitate altering the height without altering a force on the spring.

71. The apparatus according to claim 69, wherein the apparatus is configured such that altering the height automatically alters a force on the spring.

72. The apparatus according to claim 69, wherein the apparatus is configured to facilitate altering the height by moving the valve body through the opening defined by the upstream support.  
15

73. Apparatus for use with a native heart valve of a subject, the apparatus comprising:  
a valve body:

20 having an upstream end, a downstream end, and a longitudinal axis therebetween,

comprising a lateral wall that circumscribes the longitudinal axis and defines a longitudinal lumen, and

comprising a valve member disposed within the lumen;

25 an upstream support having an inner perimeter couplable to the valve body at a first longitudinal position of the valve body, the upstream support being configured to extend radially outward from the valve body and the inner perimeter; and

a flexible sheet defining a first aperture, a second aperture and a lateral wall therebetween, a first portion of the sheet that defines the first aperture being  
30 circumferentially attached to the upstream support portion at a radius that is greater than a radius of the inner perimeter, and a second portion of the sheet that defines the second aperture being circumferentially attached to the valve body at a second longitudinal

position of the valve body, such that a pocket region is defined between the sheet and at least the first longitudinal position.

74. The apparatus according to claim 73, wherein the second longitudinal position is closer to the downstream end of the valve body than is the first longitudinal position.

5 75. The apparatus according to claim 73, wherein the first aperture is larger than the second aperture.

76. The apparatus according to claim 73, wherein the sheet is attached to the upstream support at an outer perimeter of the upstream support.

10 77. The apparatus according to claim 73, wherein the sheet assumes a frustoconical shape.

78. The apparatus according to claim 73, wherein the sheet assumes a funnel shape.

79. The apparatus according to claim 73, wherein the apparatus is provided with the inner perimeter of the upstream support pre-coupled to the valve body at the first longitudinal position of the valve body.

15 80. The apparatus according to any one of claims 73-79, wherein the apparatus is configured such that the inner perimeter of the upstream support is intracorporeally couplable to the valve body at the first longitudinal position of the valve body.

81. Apparatus for use with a native heart valve disposed between an atrium and a ventricle of a heart of a subject, the apparatus comprising:

20 an annular upstream support defining an opening therethrough, and configured to be placed against an upstream surface of the native heart valve;

a tubular valve body having an upstream end, a downstream end and a lumen therebetween, the lumen having a first diameter, and the valve body being separated from the upstream element by a gap between the upstream end of the valve body and the  
25 upstream element;

one or more tissue-engaging elements that protrude radially outward from the valve body so as to define a second diameter that is greater than the first diameter; and

a flexible sheet shaped to define a conduit, a downstream portion of the sheet being coupled to the valve body, an upstream portion of the sheet being coupled to the upstream  
30 element, and the sheet spanning the gap.

82. The apparatus according to claim 81, further comprising at least one tether, a first portion of the tether being coupled to the valve body and a second portion of the tether being coupled to the upstream support, such that tensioning of at least a portion of the tether reduces the gap.
- 5 83. The apparatus according to claim 82, wherein the apparatus is configured such that tensioning of at least the portion of the tether rumples the sheet.
84. Apparatus for use with a native heart valve disposed between an atrium and a ventricle of a heart of a subject, the apparatus comprising:
- an annular upstream element defining an opening therethrough, and configured to
  - 10 be placed against an upstream surface of the native heart valve;
  - a flexible sheet, shaped to define a conduit, and coupled to the upstream element such that the conduit is in fluid communication with the opening; and
  - a valve body, coupled to the flexible sheet such that the conduit provides fluid communication between the prosthetic valve and the upstream element.
- 15 85. The apparatus according to claim 84, wherein the valve body comprises:
- a generally cylindrical frame shaped to define a lumen therethrough, and
  - a valve member coupled to the frame and disposed within the lumen.
86. The apparatus according to any one of claims 84-85, wherein the frame is separated from the upstream element by a gap, and the conduit spans the gap.
- 20 87. Apparatus, for use with a guide member that extends into a subject, the apparatus comprising:
- a delivery tool, comprising a housing, the housing:
    - being transluminally advanceable into the subject,
    - shaped to define an orifice at an end of the housing, and
    - 25 having a lateral wall shaped to define a slit that is continuous with the orifice;
  - an implant:
    - configured to be housed by the housing, and
    - comprising an eyelet that (1) is slidable over the guide member, and (2)
    - 30 when the implant is housed by the housing, extends through the slit and radially beyond the lateral wall such that the eyelet facilitates transluminal sliding of the implant and the housing along the guide member and into the subject,

the apparatus being configured such that, while (1) the implant remains within the subject, and (2) the guide member remains disposed through the eyelet, (1) the implant is removable from the housing via the orifice, and (2) the housing is removable from the subject.

5 88. The apparatus according to claim 87, wherein the implant is configured to be implanted by being intracorporeally locked to the guide member.

89. The apparatus according to any one of claims 87-88, wherein the implant has a compressed state and an expanded state, is configured to be housed by the housing while in the compressed state, and is configured to automatically expand toward the expanded  
10 state when removed from the housing.

90. A method for use with a native valve of a heart of a subject, the method comprising:

transluminally anchoring a tissue anchor to ventricular tissue of a subject using an anchor-manipulation tool, the tissue anchor being coupled to a first portion of a tether;

15 transluminally delivering an annular upstream support and a prosthetic valve to the heart, the prosthetic valve including (1) a valve body shaped to define a lumen therethrough, and (2) one or more tissue-engaging legs configured to protrude laterally outward from the valve body;

20 pressing the tissue-engaging legs in an upstream direction against a ventricular surface of the native valve by applying a force to the prosthetic valve while measuring the force;

applying, to the tether, a tension that changes a shape of a spring coupled to the tether, while observing the shape of the spring using imaging; and

25 at least in part responsively to the observed shape of the spring, facilitating holding of the upstream support against an upstream surface of the native valve by locking a second portion of the tether to at least one component selected from the group consisting of: the prosthetic valve and the upstream support.

91. The method according to claim 90, wherein measuring the force comprises measuring the force using an extracorporeal force meter.

30 92. The method according to claim 90, wherein measuring the force comprises observing a shape of the tissue-engaging legs using imaging.

93. The method according to claim 90, wherein applying the tension comprises applying the tension while applying the force.
94. The method according to claim 90, wherein locking the second portion to the selected component comprises locking the second portion to the prosthetic valve.
- 5 95. The method according to claim 90, wherein locking the second portion to the selected component comprises locking the second portion to the upstream support.
96. The method according to claim 90, wherein locking the second portion comprises locking the second portion when the observed shape indicates that the spring is experiencing between 400 g force and 600 g force.
- 10 97. The method according to claim 90, wherein locking the second portion comprises locking the second portion subsequently to applying the tension, and applying the force comprises applying the force subsequently to locking the second portion.
98. The method according to any one of claims 90-97, wherein:  
anchoring the tissue anchor coupled to the tether comprises anchoring a first tissue  
15 anchor coupled to a first tether, and applying the tension comprises applying a first tension that changes a shape of a first spring coupled to the first tether,  
the method further comprises:  
anchoring a second tissue anchor to the ventricular tissue, the second tissue  
anchor being coupled to a first portion of a second tether; and  
20 applying, to the second tether, a second tension that changes a shape of a second spring coupled to the second tether, while observing the shape of the second spring using imaging, and  
facilitating holding of the prosthetic valve against the upstream surface comprises,  
at least in part responsively to the observed shape of the second spring, facilitating holding  
25 of the prosthetic valve against the upstream surface by locking a second portion of the second tether to the selected at least one component.
99. The method according to claim 98, wherein facilitating holding comprises locking the second portion of the first tether and the second portion of the second tether to the selected at least one component, at least in part responsively to a ratio between tension in  
30 the first tether and tension in the second tether, the ratio being derived from the observed shape of the first spring and the observed shape of the second spring.

100. The method according to any one of claims 90-97, wherein locking comprises locking the second portion to the at least one component at least in part responsively to the observed shape.

101. The method according to claim 100, wherein locking comprises locking the second  
5 portion to the at least one component at least in part responsively to the measured force.

102. The method according to any one of claims 90-97, wherein applying the force comprises moving the valve body in an upstream direction through an opening defined by the upstream support, and the method further comprises coupling the prosthetic valve to the upstream support by expanding the valve body within the opening.

103. The method according to claim 102, wherein coupling the prosthetic valve to the upstream support comprises coupling the prosthetic valve to the upstream support at least in part responsively to the measured force.

104. A method, comprising:  
transluminally advancing a plurality of tissue anchors, coupled to a respective  
15 plurality of springs, into a body of a subject;  
anchoring the plurality of tissue anchors to tissue of the subject;  
tensioning at least one of the springs;  
using imaging, while the tension is applied to the at least one spring, observing a state of the at least one spring; and  
20 at least in part responsively to the observed state of at least one spring, adjusting a tension on at least one of the springs.

105. A method, for use with a native valve of a heart of a subject, the method comprising:  
25 applying a first tension to a tether that couples (a) a tissue anchor anchored to ventricular tissue of a subject, to (b) a prosthetic valve body, the tether having a length between the tissue anchor and the valve body;  
by applying an atrially-directed force to the prosthetic valve body, pressing, against tissue of the native valve, a tissue-engaging element that protrudes radially from  
30 the valve body  
transluminally advancing a prosthetic valve body to a native valve of the subject;  
while applying the atrially-directed force, measuring:

a pressing force of the tissue-engaging element against the tissue of the native valve, and

a second tension on the tether, the second tension differing from the first tension at least in part due to the atrially-directed force; and

5 at least in part responsively to the measured pressing force and the measured second tension, performing an action selected from the group consisting of: adjusting the length of the tether between the tissue anchor and the valve body, and locking the valve body to the tether.

106. A method for use with a native valve of a heart of a subject, the method  
10 comprising:

transluminally delivering a tissue anchor to a ventricle of the heart, and anchoring the tissue anchor to ventricular muscle tissue of the subject;

transluminally delivering an upstream support to an atrium of the heart, and placing the upstream support against an upstream surface of an annulus of the native  
15 valve; and

changing a shape of the upstream support by tensioning a tether coupled to upstream support and to the tissue anchor; and

extracorporeally fluoroscopically observing the shape change of the upstream support.

20 107. The method according to claim 106, wherein tensioning the tether coupled to the upstream support comprises tensioning a tether that is coupled to a valve body coupled to the upstream support.

108. The method according to claim 106, wherein, before the tensioning, the upstream support is generally flat annular, and changing the shape comprises making the support  
25 assume a frustoconical shape.

109. The method according to any one of claims 106-108, wherein, before the tensioning, the upstream support is frustoconical, and changing the shape comprises changing a slant of the frustoconical shape.

110. Apparatus for use with a valve of a heart of a subject, the apparatus comprising:  
30 a transluminally-deliverable tissue anchor;  
a tether, a first end thereof coupled to the tissue anchor; and  
a delivery tool, comprising:

a steerable catheter having a longitudinal axis, and being transluminally deliverable to the valve, and

an obstructing element:

disposed at a longitudinal site of the catheter,

5 configured to extend laterally outward from the catheter, and

dimensioned, when extending laterally outward from the catheter, to inhibit movement of at least the longitudinal site through the valve by abutting tissue of the valve, and

an anchor manipulator:

10 reversibly couplable to the tissue anchor,

slidable through the catheter, and

configured to drive the anchor into ventricular tissue of the heart of the subject.

111. The apparatus according to claim 110, wherein the anchor manipulator is slidably coupled to the catheter such that a distal end of the anchor manipulator is slidable distally no more than a pre-determined distance from the longitudinal site.

112. The apparatus according to any one of claims 110-111, further comprising an implant, intracorporeally lockable to the tether.

113. The apparatus according to claim 112, further comprising a guide member, 20 reversibly couplable to the tether, wherein the implant is intracorporeally slidable along the guide member toward the tether and the implant.

114. The apparatus according to claim 112, wherein the tether has exactly one locking site at which the implant is lockable to the tether.

115. The apparatus according to claim 114, wherein the exactly one locking site is 25 disposed at a pre-determined distance from the anchor that is pre-determined at least in part dependently on a distance between the longitudinal site and a distal end of the catheter.

116. A method, comprising:

30 transluminally anchoring a tissue anchor to tissue of a subject using an anchor-manipulation tool;

subsequently applying to the anchor a pulling force having a given magnitude;

using imaging, observing a movement of the tissue anchor in response to the pulling force; and

at least in part responsively to the observed movement, performing an action selected from the group consisting of: de-anchoring the tissue anchor from the tissue, and  
5 decoupling the anchor-manipulation tool from the tissue anchor.

117. Apparatus, for implantation at a native valve of a heart of a subject, the native valve being disposed between an atrium and a ventricle of the heart, the apparatus comprising:

a tubular valve body:

10 having an upstream portion, configured to be disposed in the atrium of the heart of the subject,

having a downstream portion, configured to be disposed in the ventricle of the subject,

15 having an elastic portion, disposed between the upstream portion and the downstream portion, and elastically coupling the upstream portion to the downstream portion, and

shaped to define a continuous lumen through the upstream portion, the elastic portion, and the downstream portion; and

20 at least one valve member, disposed in the lumen of the valve body, and configured to facilitate flow of blood of the subject from the upstream portion of the valve body to the downstream portion of the valve body, and to inhibit flow of the blood from the downstream portion of the valve body to the upstream portion of the valve body.

118. The apparatus according to claim 117, wherein the at least one valve member is coupled to the downstream portion of the valve body.

25 119. The apparatus according to claim 117, wherein the native valve includes a plurality of native leaflets, and wherein the downstream portion of the valve body is configured to be coupled to the native leaflets.

120. The apparatus according to claim 119, further comprising a plurality of clips, configured to facilitate the coupling of the downstream portion of the valve body to the  
30 native leaflets.

121. The apparatus according to claim 120, wherein each clip:  
comprises at least two clip arms, articulatably coupled to each other, and

is reversibly closeable.

122. The apparatus according to claim 120, wherein the clips are coupled to the downstream portion of the valve body, and wherein the downstream portion of the valve body is configured to be coupled to the native leaflets by the clips being coupled to the native leaflets.

123. The apparatus according to claim 120, wherein each clip of the plurality of clips is articulatably coupled to the downstream portion of the valve body.

124. The apparatus according to claim 120, the native valve including an annulus having an upstream surface, wherein the apparatus further comprises a prosthetic valve support:

comprising (1) an upstream support portion, configured to be placed against the upstream surface of the annulus of the native valve, and (2) the plurality of clips, coupled to the upstream support portion,

shaped to define an opening therethrough that is configured to receive the prosthetic valve,

wherein the clips are configured to facilitate the coupling of the downstream portion of the valve body to the native leaflets by coupling the prosthetic valve support to the native leaflets.

125. Apparatus for use with a native valve of a heart of a subject, the native valve having a plurality of leaflets that meet at a plurality of commissures, the apparatus comprising:

at least one tissue anchor, configured to be anchored to a first site within a ventricle of the heart of the subject;

at least one longitudinal member, coupled at a distal end thereof to a respective one of the at least one tissue anchors;

an upstream support, comprising an upstream support portion configured to be slidable over the longitudinal member and placed against an upstream surface of the native valve; and

at least one locking member, configured to be slidable over a respective one of the at least one longitudinal members, and to be lockable to the respective longitudinal member such that a portion of the respective longitudinal member that is disposed between the respective anchor and the upstream support portion is longer than 1 cm.

126. The apparatus according to claim 125, wherein the longitudinal member is flexible.

127. The apparatus according to any one of claims 125-126, wherein the longitudinal member comprises a suture.

128. A method for use with a native valve of a heart of a subject, the native valve  
5 having a plurality of leaflets that meet at a first commissure and at a second commissure, the method comprising:

anchoring a first tissue anchor to a first site within a ventricle of the heart of the subject, the first tissue anchor being coupled to a distal end of a first longitudinal member;

10 anchoring a second tissue anchor to a second site within the ventricle of the heart of the subject, the second tissue anchor being coupled to a distal end of a second longitudinal member;

subsequently, placing at least an upstream support portion of a prosthetic valve support against an upstream surface of the native valve, the valve being disposed between the ventricle and an atrium of the heart of the subject; and

15 securing the upstream support portion against the upstream surface of the valve by:

coupling the upstream support portion to the first longitudinal member such that at least part of a portion of the first longitudinal member that is disposed between the upstream support portion and the first tissue anchor, is disposed between the first and second leaflets at the first commissure, and

20 coupling the upstream support portion to the second longitudinal member such that at least part of a portion of the second longitudinal member that is disposed between the upstream support portion and the first tissue anchor, is disposed between the first and second leaflets at the second commissure.

129. The method according to claim 128, wherein anchoring, placing, and securing  
25 comprise anchoring, securing, and placing without the use of cardiopulmonary bypass.

130. The method according to claim 128, wherein anchoring to the first site and anchoring to the second site comprise anchoring to myocardium.

131. The method according to claim 128, wherein placing the upstream support portion against the upstream surface comprises sliding the upstream support portion over at least  
30 part of the first longitudinal member.

132. The method according to claim 128, wherein coupling the upstream support portion to the first longitudinal member and to the second longitudinal member comprises

coupling the upstream support portion to the first longitudinal member in the atrium of the heart of the subject, and coupling the upstream support portion to the second longitudinal member comprises coupling the upstream support portion to the second longitudinal member in the atrium of the heart of the subject.

5 133. The method according to claim 128, wherein the leaflets move in response to beating of the heart of the subject, and wherein securing the upstream support portion comprises securing the upstream support portion without eliminating the movement of the native leaflets.

10 134. The method according to claim 128, wherein coupling the upstream support portion to the first longitudinal member comprises coupling the upstream support portion to the first longitudinal member such that a length of the portion of the first longitudinal member is greater than 1 cm.

135. The method according to any one of claims 128-134, further comprising:  
transluminally advancing at least the first tissue anchor to the first site while the  
15 respective longitudinal member coupled thereto is disposed within a respective tubular member; and

subsequently to anchoring the at least first tissue anchor, and before coupling the upstream support portion to the respective longitudinal member, sliding the at least first tubular member off of at least part of the respective longitudinal member.

20 136. The method according to claim 135, wherein sliding the at least first tubular member comprises sliding at least part of the at least first tubular member through a channel defined by a locking member, and wherein coupling the upstream support portion to the respective longitudinal member comprises locking the locking member to the respective longitudinal member by narrowing at least a portion of the channel.

25 137. The method according to any one of claims 128-134, wherein:  
advancing the at least first tissue anchor comprises advancing the at least first tissue anchor while (1) the respective longitudinal member is reversibly coupled to a portion of a wire, and (2) the respective tubular member inhibits the portion of the wire from decoupling from the portion of the wire, and

30 the method further comprises facilitating decoupling of the wire from the respective longitudinal member by sliding the at least first tubular member off of the portion of the wire.

138. The method according to claim 137, wherein:

advancing the at least first tissue anchor comprises advancing the at least first tissue anchor while (1) the respective longitudinal member is shaped to define a loop, and is coupled to the portion of the wire by the portion of the wire being threaded through the  
5 loop, and (2) the respective tubular member inhibits the portion of the wire from unthreading from the loop, and

facilitating decoupling of the wire from the respective longitudinal member comprises facilitating unthreading of the wire from the loop by sliding the at least first tubular member off of the portion of the wire.

10 139. The method according to claim 138, wherein sliding the at least first tubular member off of the portion of the wire comprises sliding the at least first tubular member off of the portion of the wire by applying less than 500 g of pulling force to the at least first tubular member.

140. The method according to claim 139, wherein applying less than 500 g of pulling  
15 force to the at least first tubular member comprises applying less than 300 g of pulling force to the at least first tubular member.

141. The method according to any one of claims 128-134, further comprising, subsequently to securing the upstream support portion, coupling a prosthetic valve to the prosthetic valve support.

20 142. The method according to claim 141, wherein the upstream support portion has an inner edge that defines an opening through the upstream support portion, and wherein coupling the prosthetic valve to the prosthetic valve support comprises placing at least a portion of the prosthetic valve within the opening, and expanding at least the portion of the prosthetic valve such that at least the portion of the prosthetic valve applies a radially-  
25 expansive force against the inner edge of the upstream support portion.

143. The method according to claim 141, wherein the prosthetic valve includes one or more tissue-engaging elements, each of the one or more tissue-engaging elements including at least two arms, and wherein the method further comprises, subsequent to securing the upstream support portion, coupling the prosthetic valve to at least one of the  
30 leaflets by sandwiching the at least one of the leaflets between the at least clip arms of the one or more tissue-engaging elements.

144. The method according to claim 143, wherein coupling the prosthetic valve to the at least one of the leaflets comprises coupling the prosthetic valve to the at least one of the leaflets before coupling the prosthetic valve to the prosthetic valve support.

145. The method according to claim 143, wherein:

5 the prosthetic valve includes a valve body, having an outer surface,  
the at least two arms include a first arm and a second arm, the first arm being longer than the second arm, and

the method further comprises:

10 delivering, within a delivery tube, the prosthetic valve in a delivery configuration thereof, in which the first arm and the second arm are constrained against the outer surface of the valve body;

15 facilitating deflection of the first arm away from the outer surface of the prosthetic valve, by advancing a first portion of the prosthetic valve out of the delivery tube such that the first arm automatically deflects away from the outer surface of the prosthetic valve; and

facilitating deflection of the second arm away from the outer surface of the prosthetic valve, by advancing a second portion of the prosthetic valve out of the delivery tube such that the second arm automatically deflects away from the outer surface of the prosthetic valve.

20 146. The method according to claim 145, wherein:

facilitating deflection of the first arm comprises facilitating deflection of the first arm a first angle from the outer surface of the prosthetic valve, and

25 the method further comprises facilitating deflection of the first arm away from the outer surface of the prosthetic valve a second angle that is greater than the first angle, by applying a force to the first arm using the delivery tube:

subsequently to facilitating deflection of the first arm the first angle, and prior to facilitating deflection of the second arm.

30 147. The method according to claim 146, wherein applying the force to the first arm using the delivery tube comprises pushing on the first arm by sliding the delivery tube over at least part of the prosthetic valve.

148. Apparatus for use with a body of a subject, the apparatus comprising:  
at least a first implantable member;

a first longitudinal member, coupled at a distal end thereof to the first implantable member;

a second longitudinal member, at least a portion of the second longitudinal member being reversibly couplable to the first longitudinal member; and

5 a tubular member:

slidable over the first and second longitudinal members,  
shaped to define a lumen therethrough, and

configured, when the portion of the second longitudinal member is (1)  
coupled to the first longitudinal member, and (2) disposed within the lumen of the  
10 tubular member, to inhibit decoupling of the portion of the second longitudinal  
member from the first longitudinal member.

149. The apparatus according to claim 148, wherein the portion of the second  
longitudinal member is configured, when (1) the portion of the second longitudinal  
member is coupled to the first longitudinal member, and (2) the portion of the second  
15 longitudinal member is disposed outside of the lumen of the tubular member, to be  
decouplable from the first longitudinal member by the second longitudinal member being  
pulled away from the first longitudinal member.

150. The apparatus according to claim 148, wherein at least one longitudinal member  
selected from the group consisting of: the first longitudinal member and the second  
20 longitudinal member, is flexible.

151. The apparatus according to claim 148, wherein the tubular member is more rigid  
than the first longitudinal member.

152. The apparatus according to claim 148, wherein the tubular member fits snugly over  
at least the portion of the second longitudinal member.

25 153. The apparatus according to claim 148, wherein the first implantable member  
comprises a tissue anchor, configured to be anchored to a tissue of the subject.

154. The apparatus according to any one of claims 148-153, further comprising a  
second implantable member, slidable over the tubular member, and couplable to the first  
longitudinal member while the portion of the second longitudinal member is coupled to  
30 the first longitudinal member.

155. The apparatus according to claim 154, wherein the portion of the second  
longitudinal member is reversibly couplable to the first longitudinal member at a first site

of the first longitudinal member, and wherein the second implantable member is couplable to the first longitudinal member at a second site of the first longitudinal member that is distal to the first site of the longitudinal member.

156. The apparatus according to claim 154, further comprising a locking member  
5 having an unlocked state and a locked state, and configured to be slid over the tubular member in the unlocked state and to be locked to the first longitudinal member by being transitioned to the locked state.

157. The apparatus according to claim 156, wherein the locking member is configured to facilitate coupling of the second implantable member to the first longitudinal member.

10 158. The apparatus according to claim 156, wherein the locking member is configured to be coupled to the first longitudinal member at least 1 cm away from the first implantable member.

159. Apparatus for use at a native valve of a heart of a subject, the apparatus comprising:

15 a tissue anchor, configured to be transluminally, transcatheterally advanced to a ventricle of the heart of the subject, and to be coupled to tissue of the ventricle;  
a longitudinal member, coupled at a distal end thereof to the tissue anchor;  
a wire, a portion of the wire being reversibly couplable to the longitudinal member;  
a tubular member:

20 slidable over the longitudinal member and the wire,  
shaped to define a lumen therethrough, and  
configured, when the portion of the wire is (1) coupled to the longitudinal member, and (2) disposed within the lumen of the tubular member, to inhibit decoupling of the portion of the wire from the longitudinal member;

25 a prosthetic valve support comprising an upstream support portion slidable over the tubular member, and to be placed against an upstream surface of an annulus of the native valve by sliding over the tubular member; and

a locking member, slidable over the tubular element and lockable to the longitudinal member.

30 160. The apparatus according to claim 159, wherein the locking member is configured to be locked to the longitudinal member at a site of the longitudinal member that is distal

to a site of the longitudinal member to which the portion of the wire is reversibly couplable.

161. The apparatus according to claim 159, wherein the tubular member is configured to be slid out of the locking member before the locking member is locked to the  
5 longitudinal member.

162. The apparatus according to any one of claims 159-161, further comprising a control rod, slidable over the tubular member, the locking member being reversibly coupled to a control rod, the control rod being configured to restrain the locking member in an unlocked configuration thereof, and to facilitate locking of the locking member by  
10 ceasing to restrain the locking member in the unlocked configuration.


163. The apparatus according to claim 162, wherein the control rod is configured to decouple from the locking member when the control rod ceases to restrain the locking member in the unlocked configuration thereof.


164. The apparatus according to claim 162, wherein the control rod is configured to  
15 cease to restrain the locking member in the unlocked configuration thereof by the control rod being rotated with respect to the locking member.

165. The apparatus according to claim 162, wherein:

the prosthetic valve support is shaped to define a hole through which the tubular member is slidable,

20 at least while the control rod is coupled to the locking member, the control rod is not slidable through the hole defined by the prosthetic valve support, and the control rod is configured to facilitate the sliding of the prosthetic valve support over the tubular member by pushing the prosthetic valve support over the tubular member.

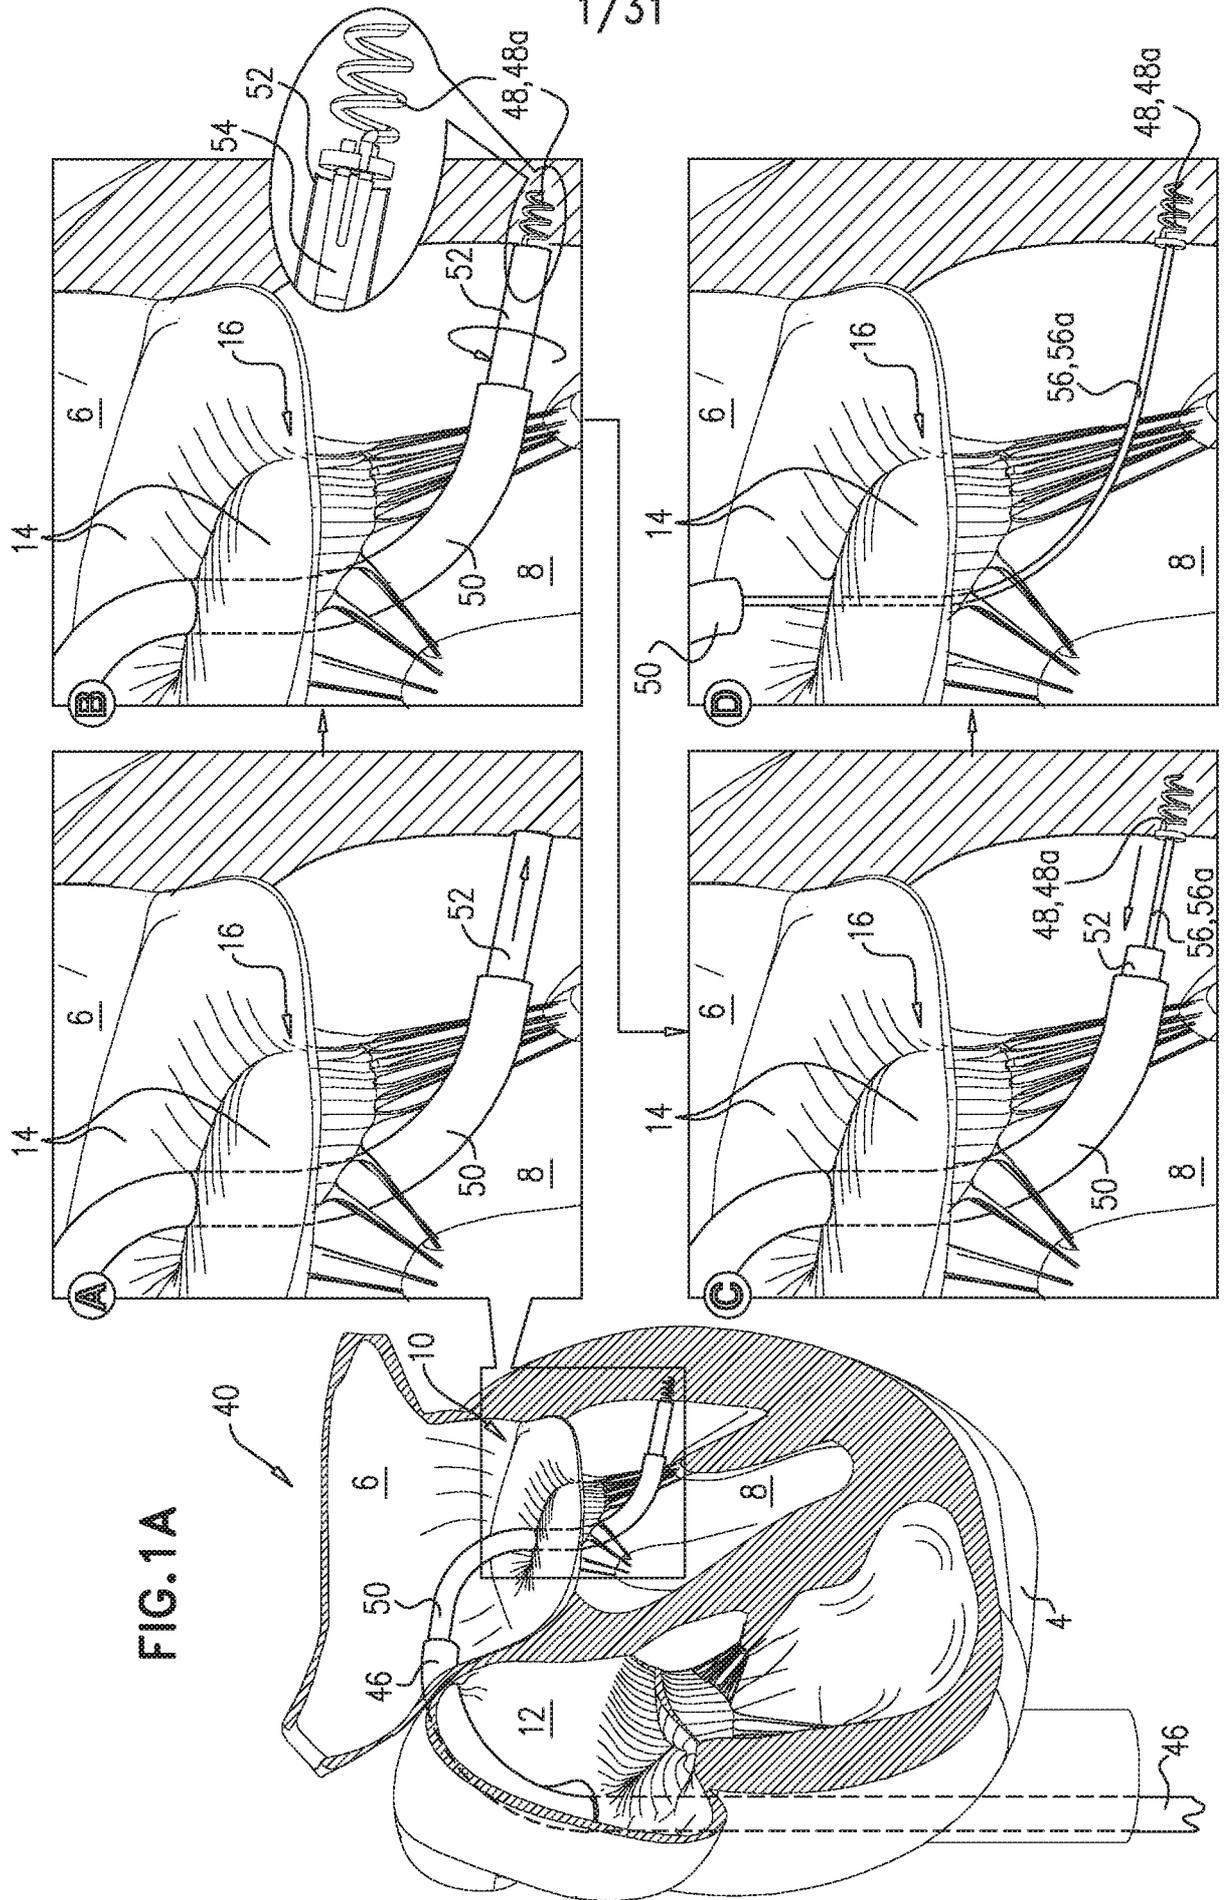

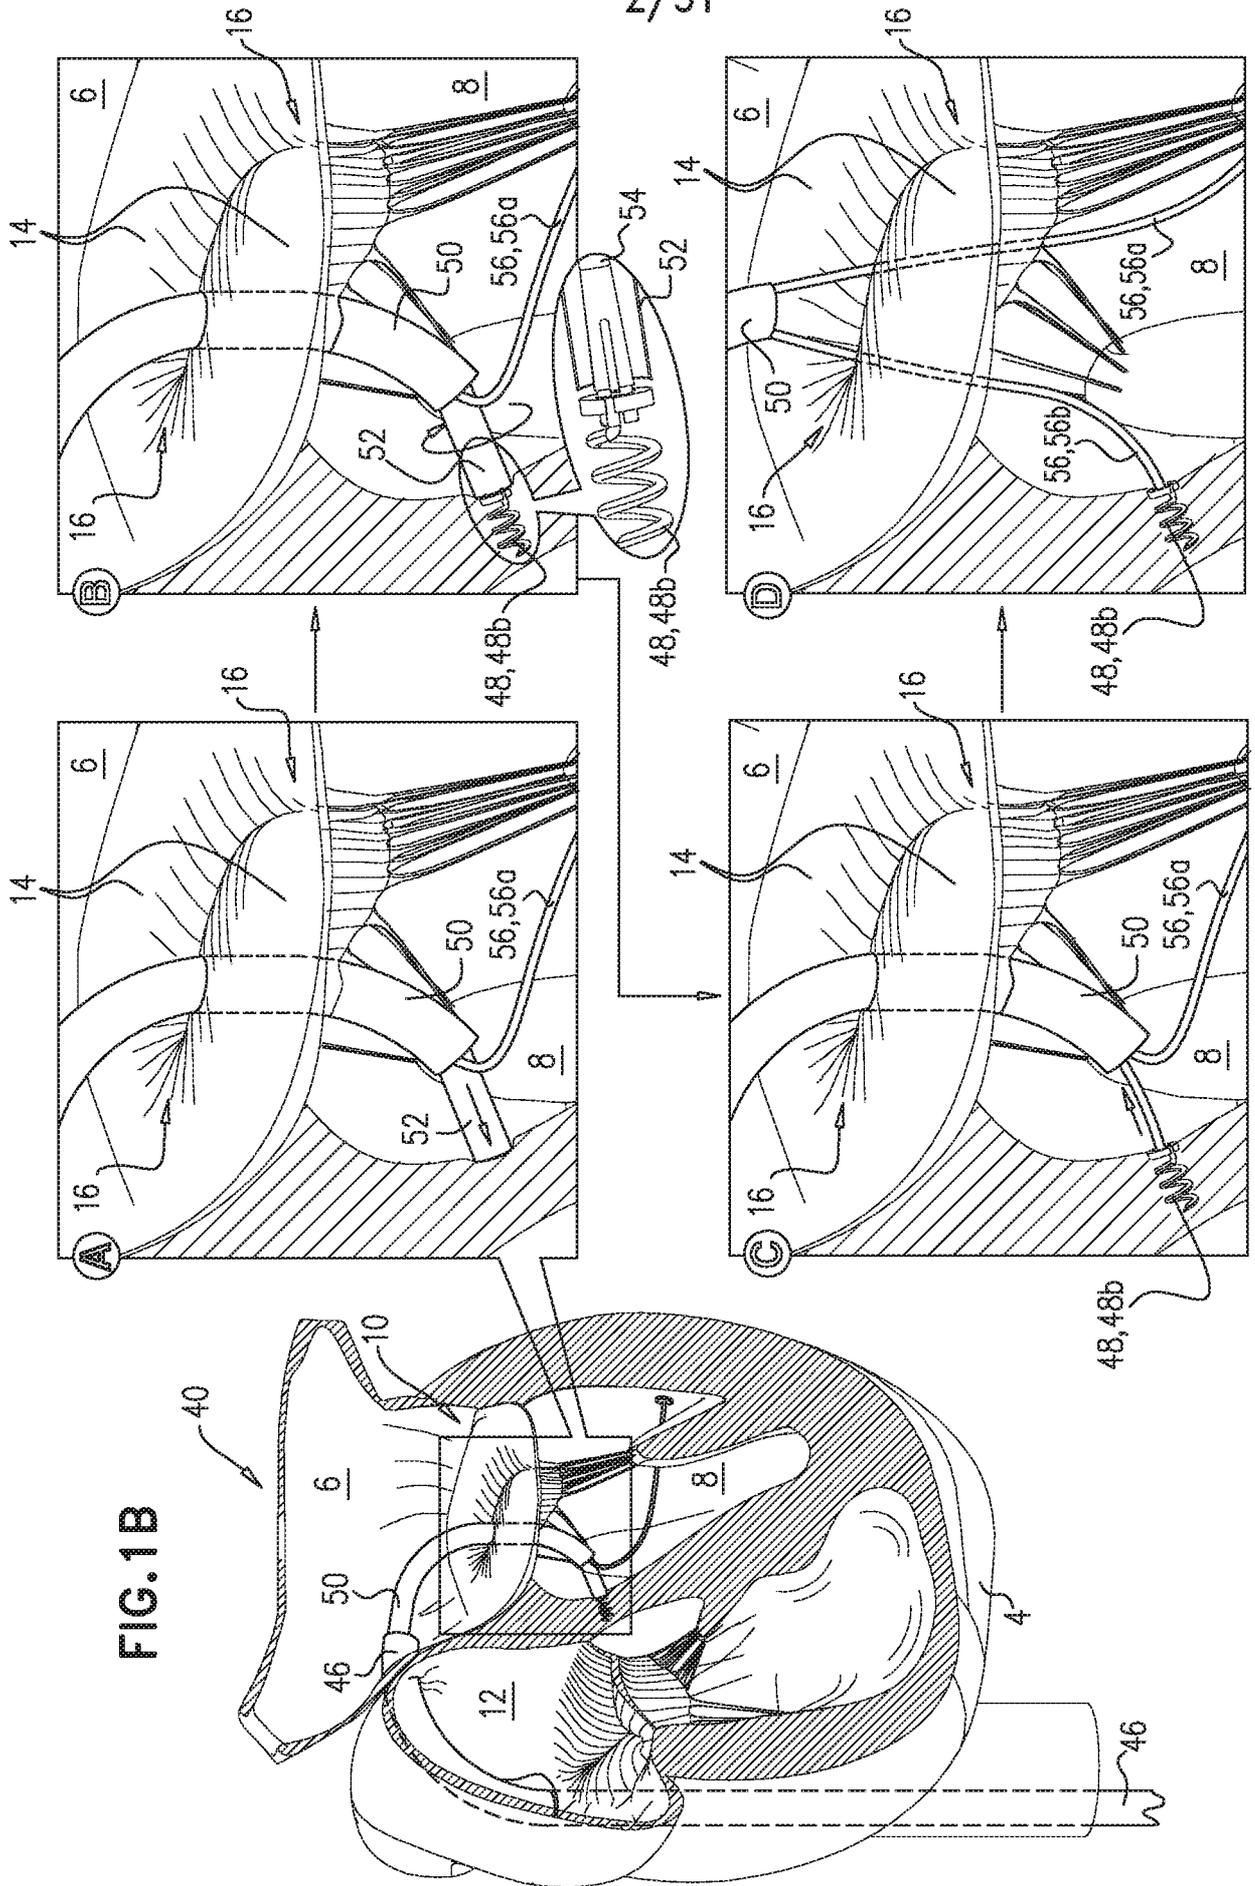

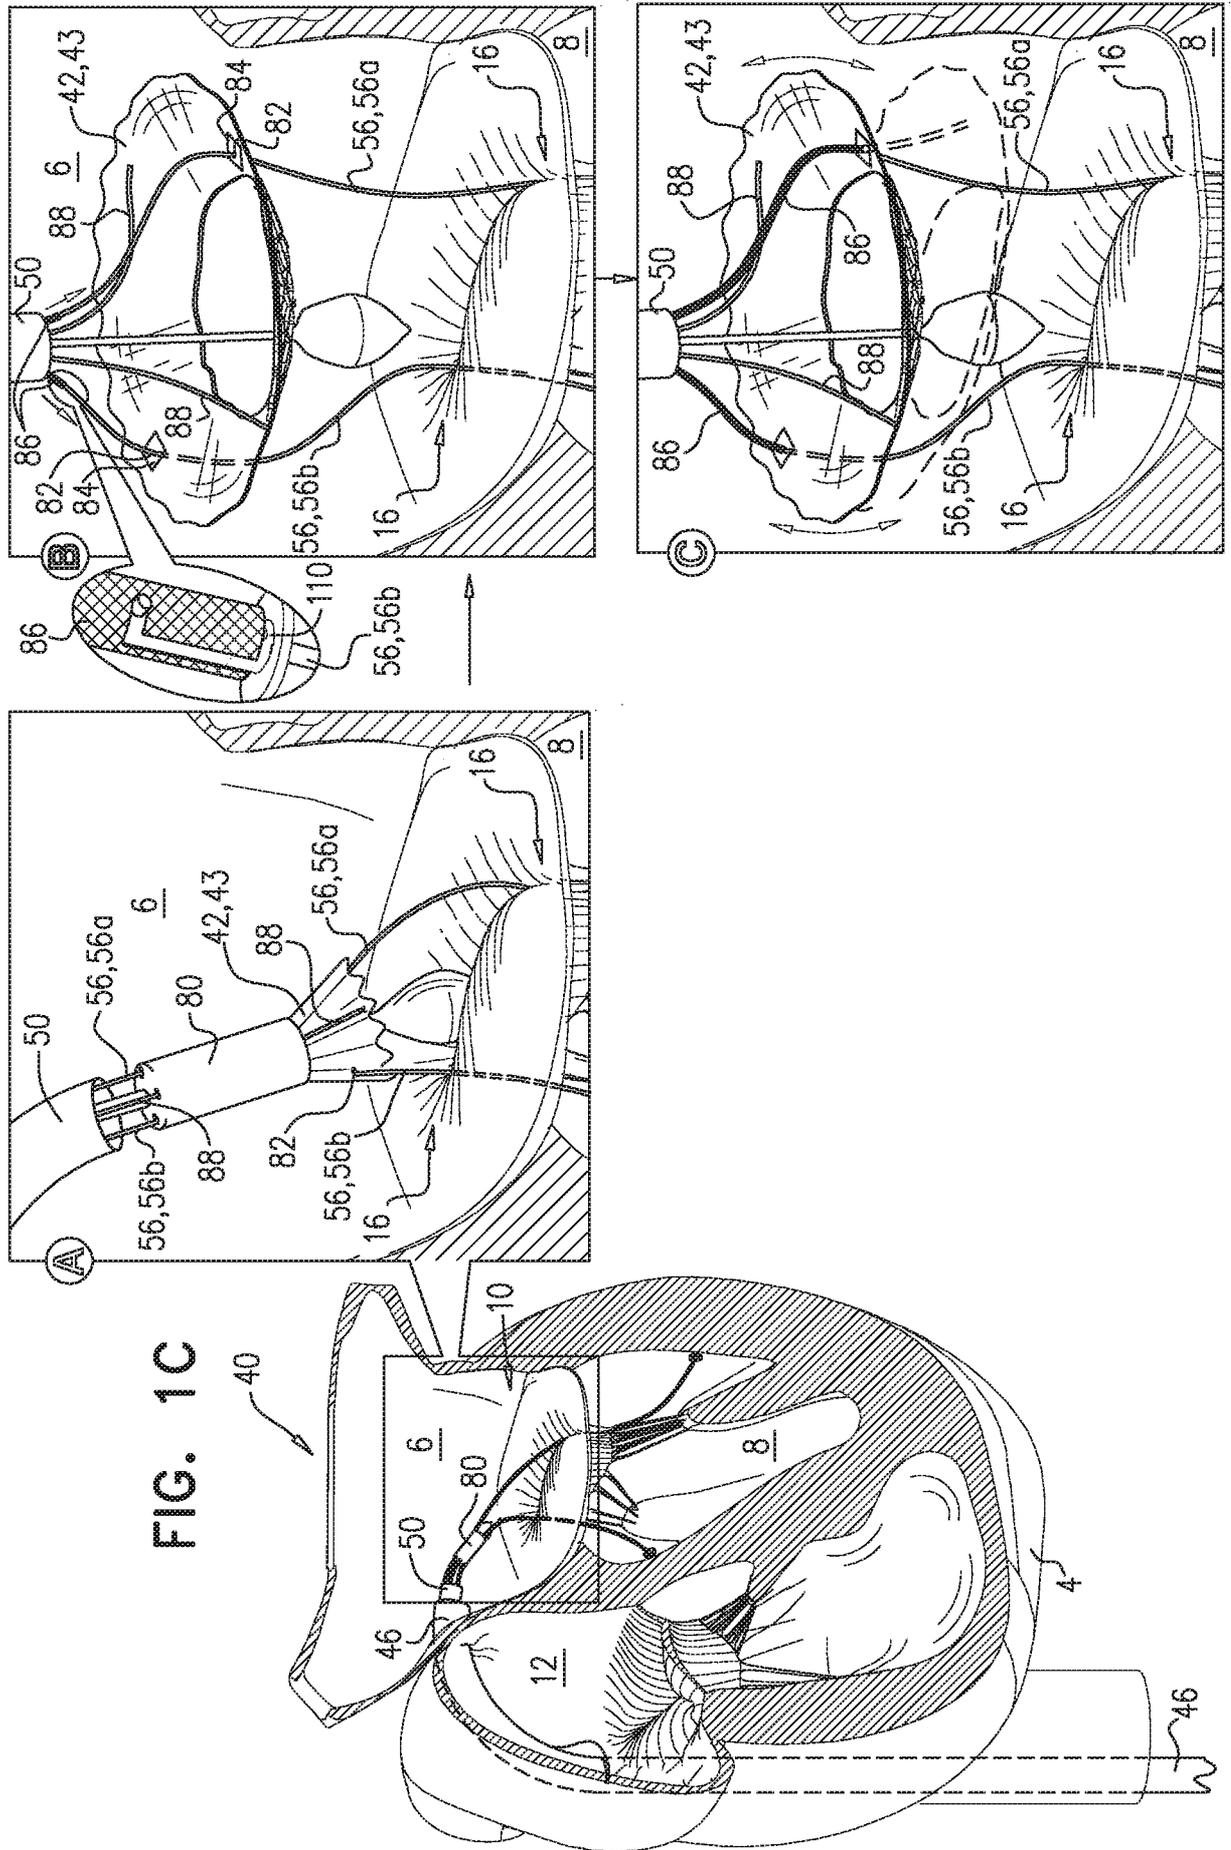
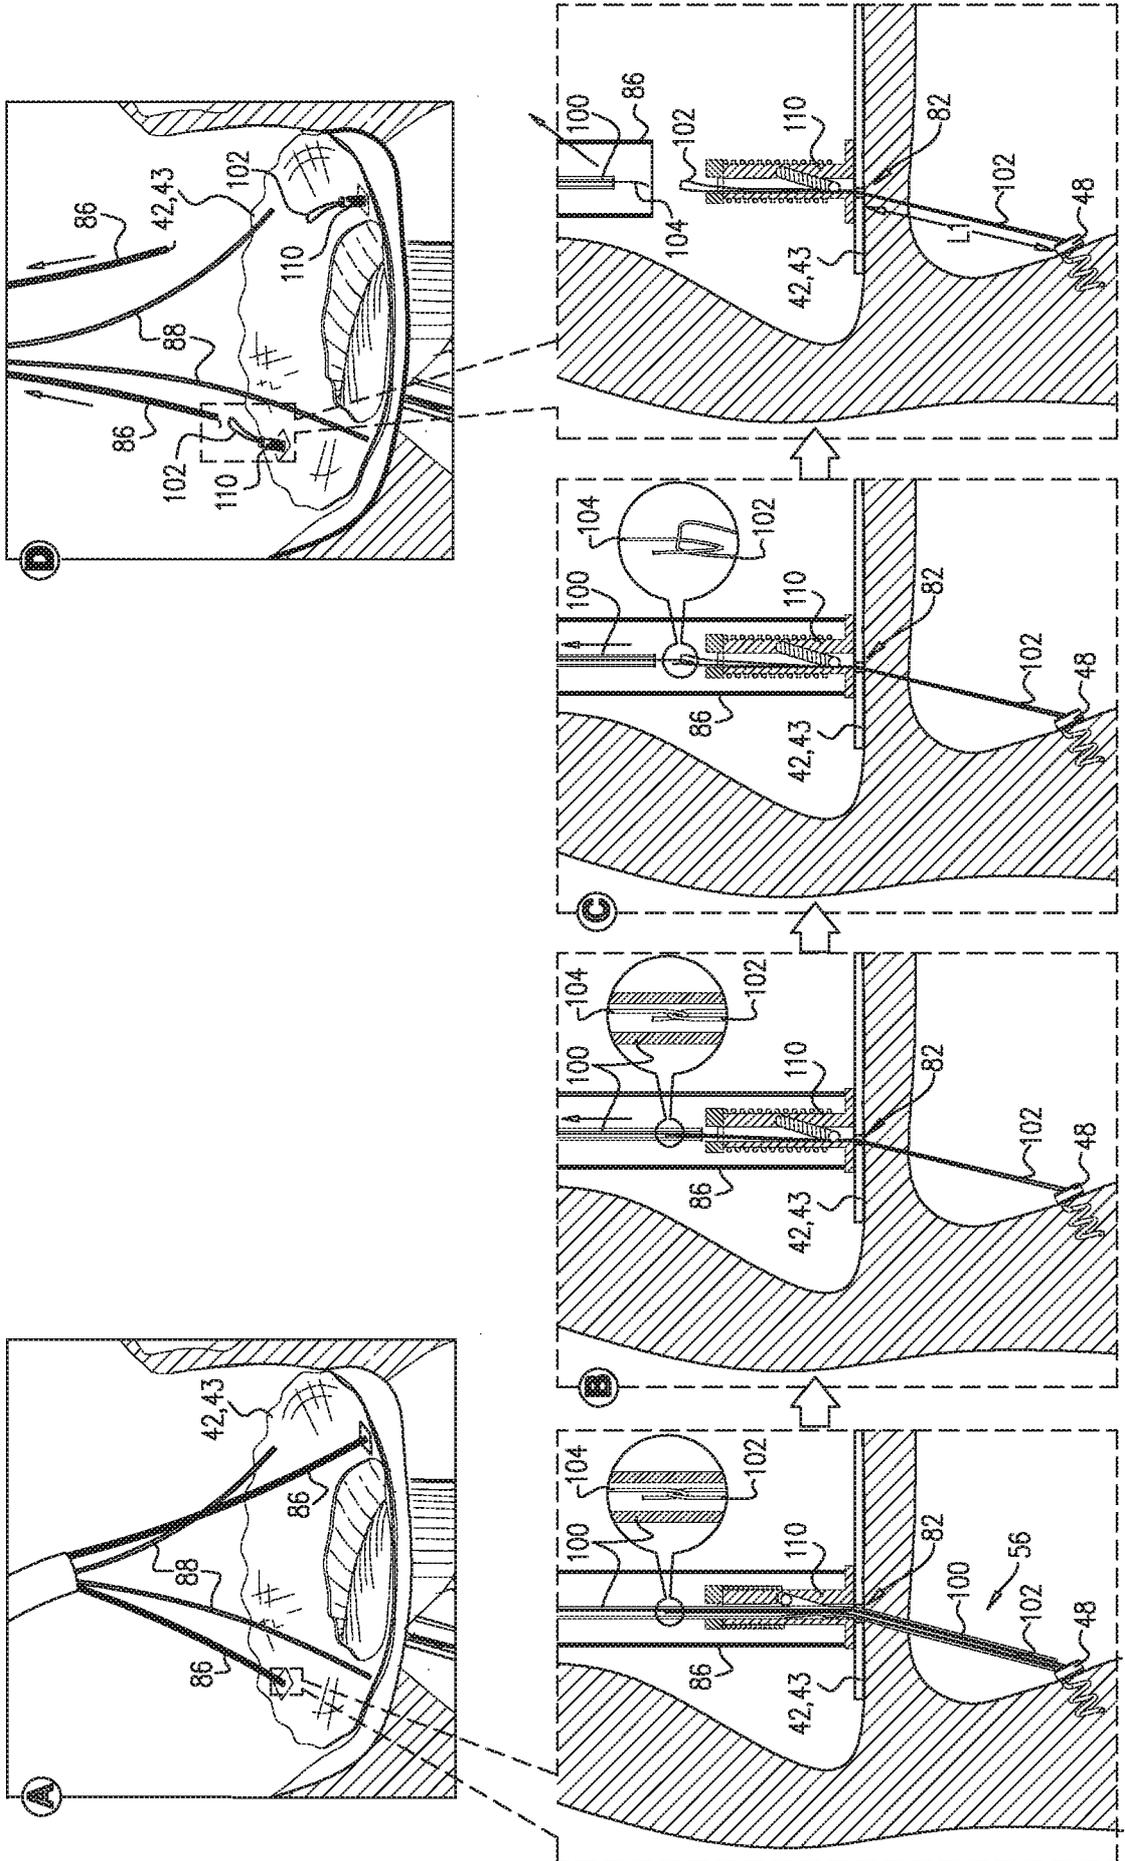


FIG. 1D



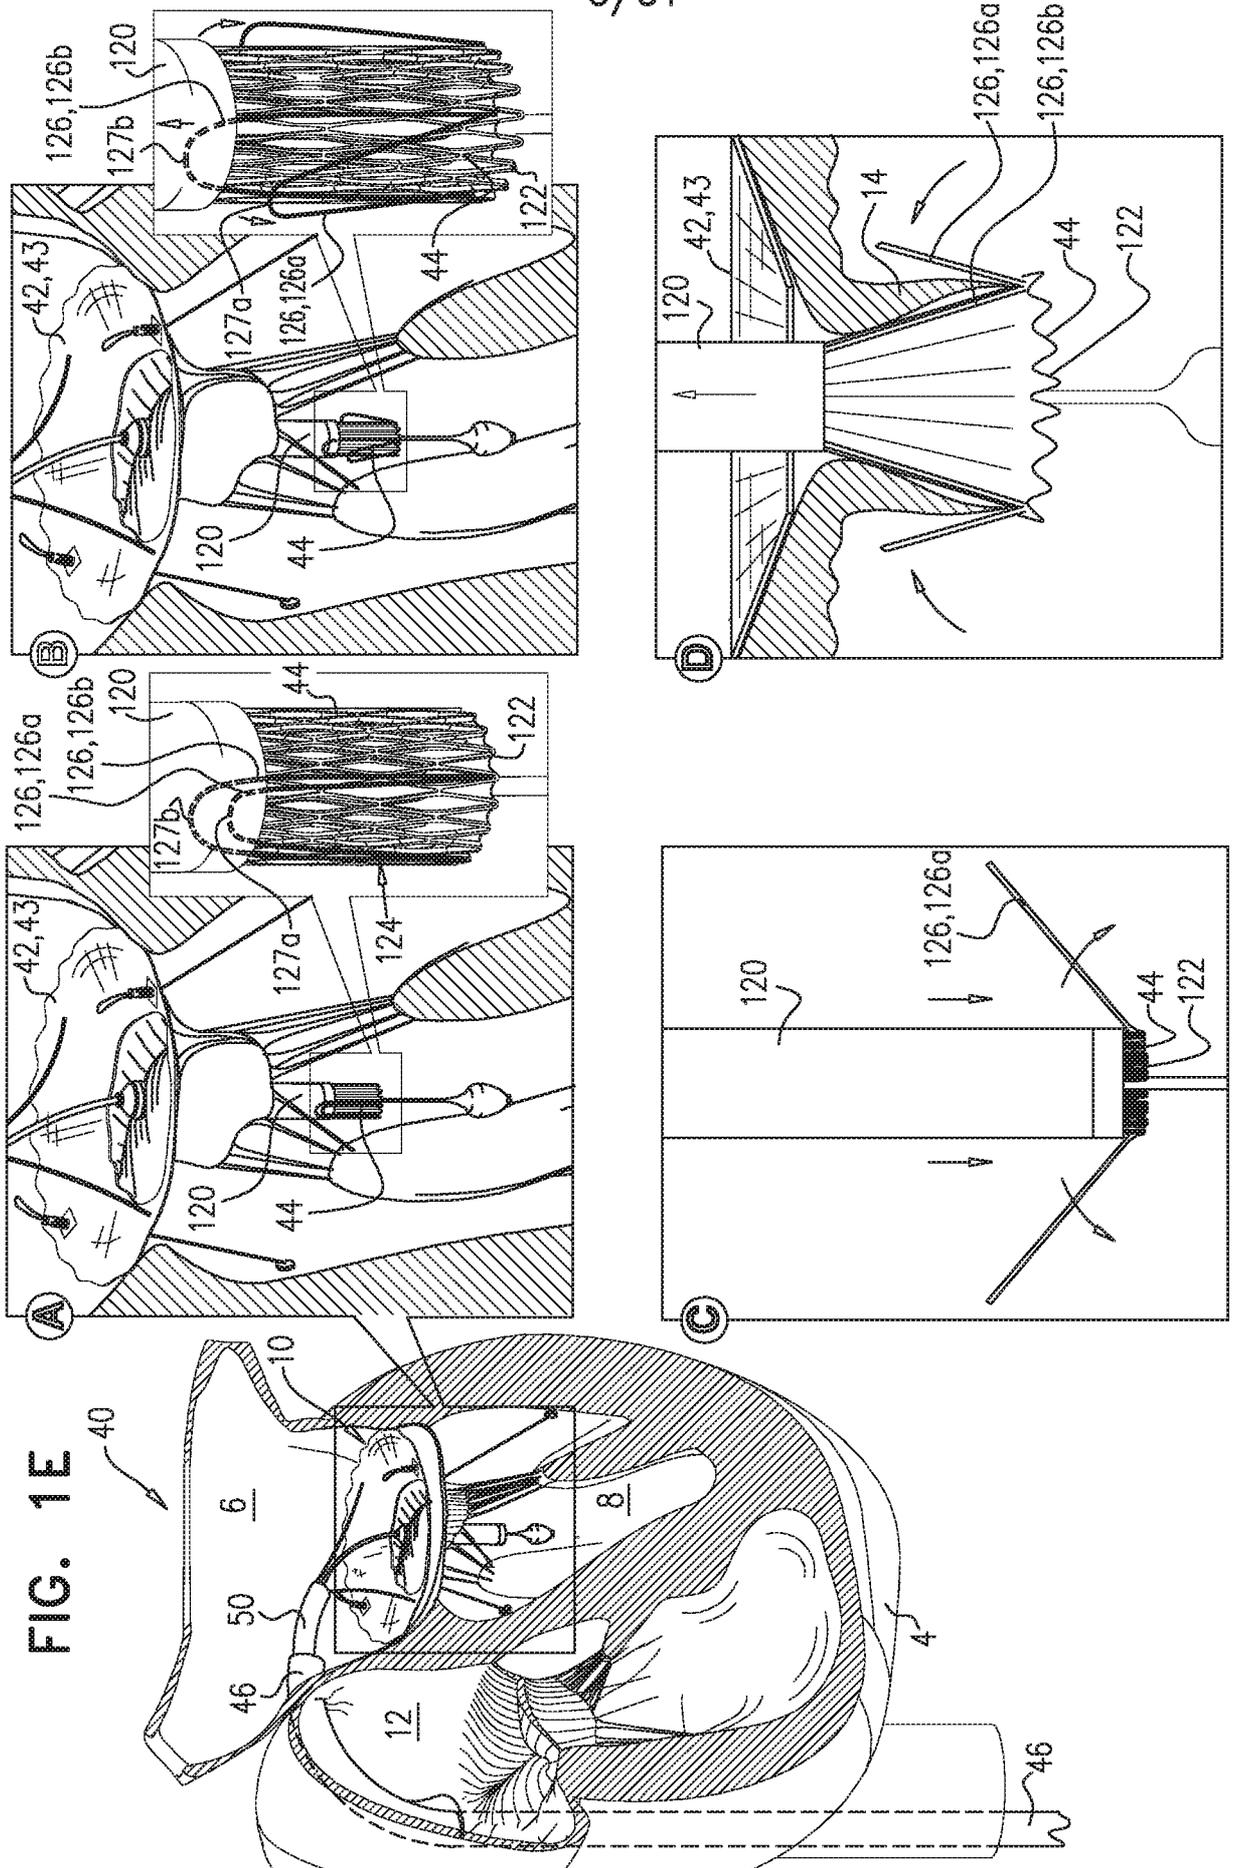




FIG. 2

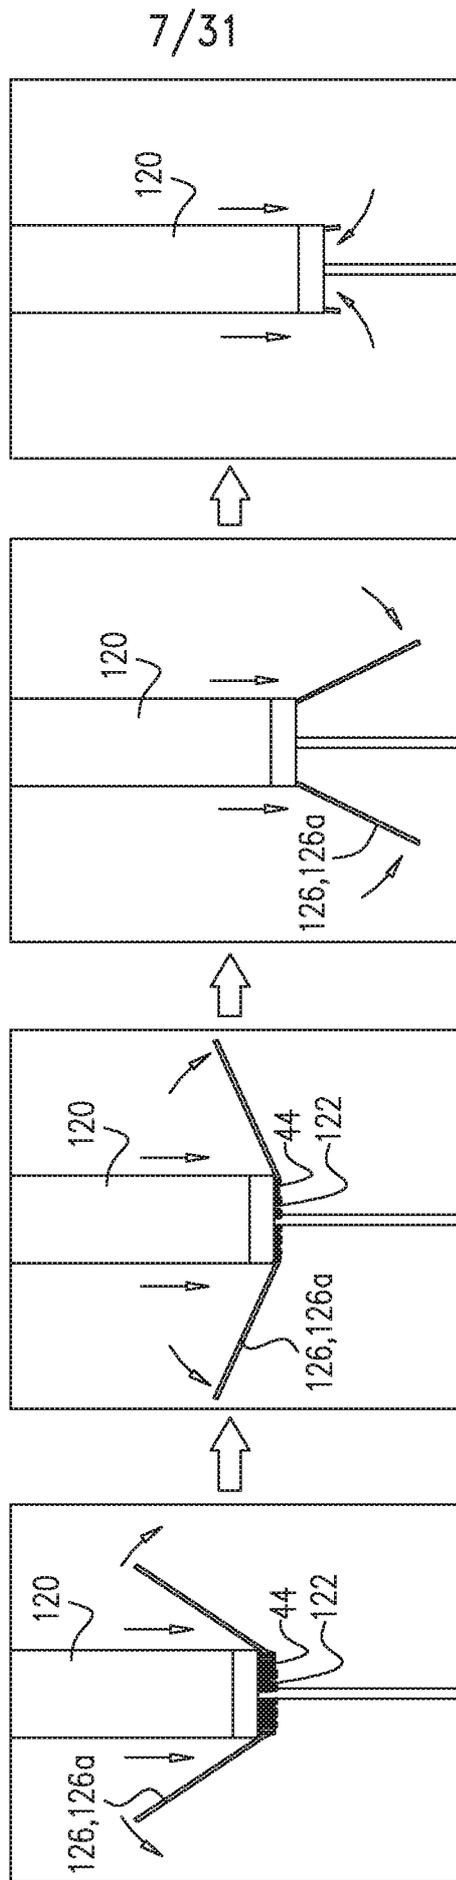


FIG. 3A

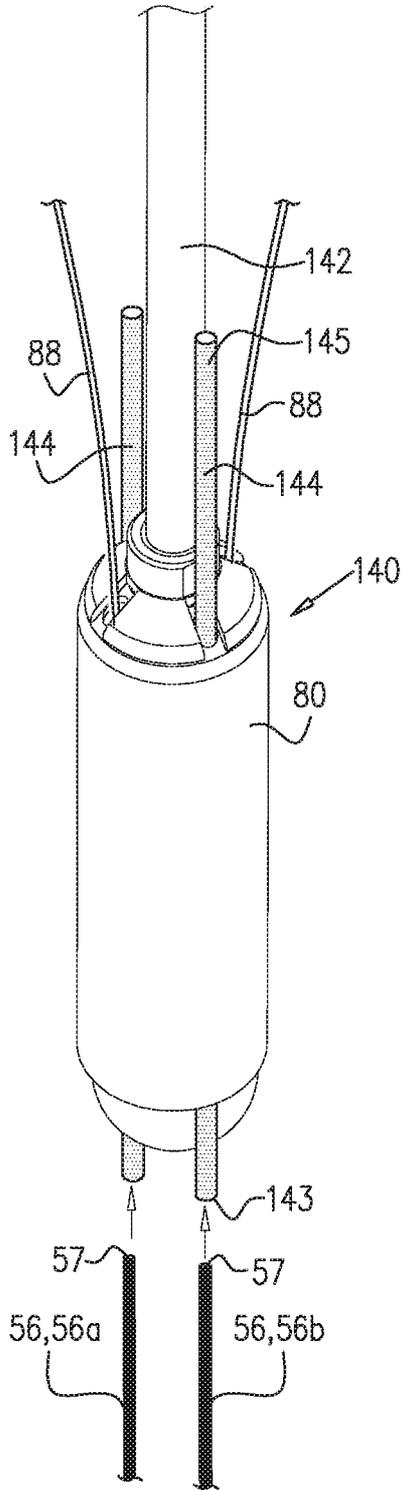


FIG. 3B

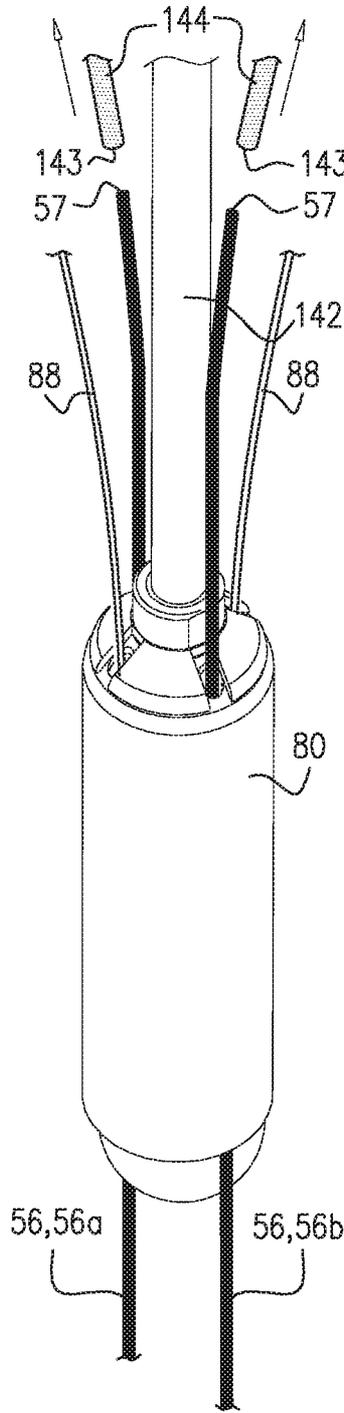


FIG. 3C

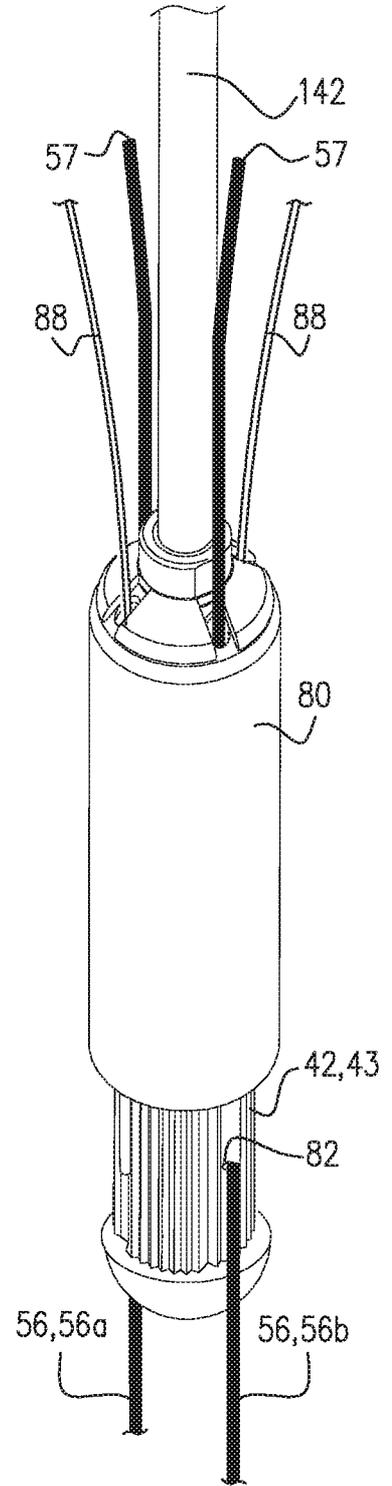


FIG. 4A

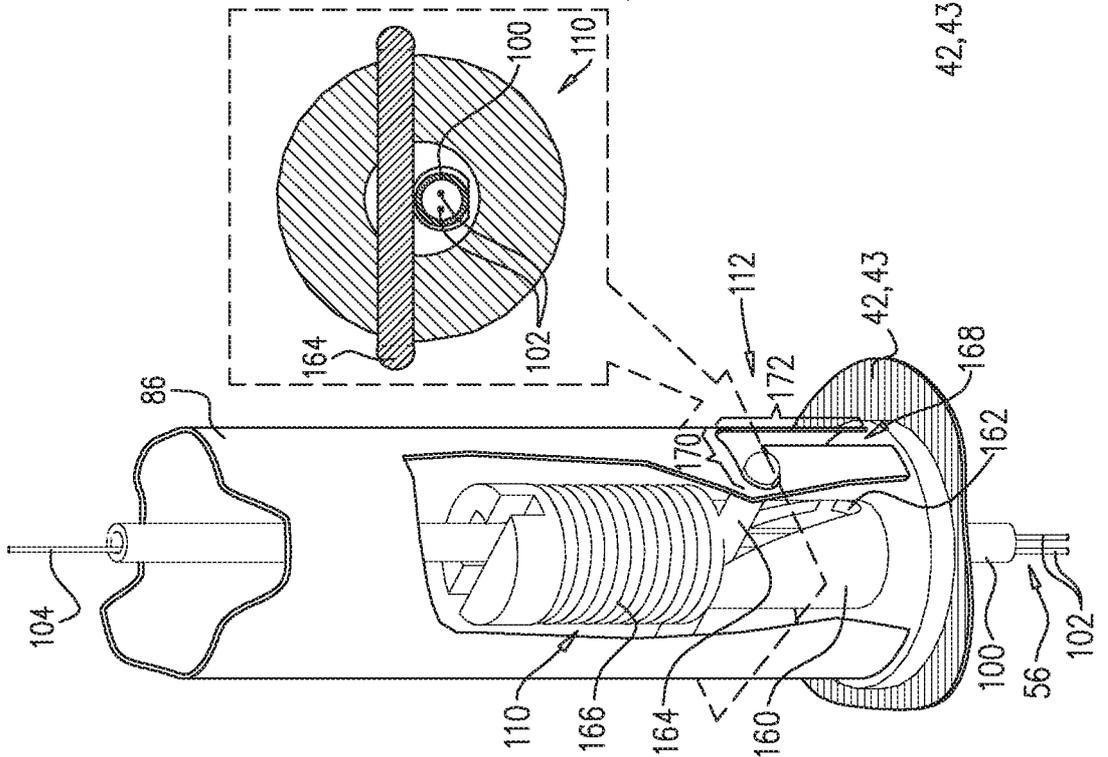


FIG. 4B


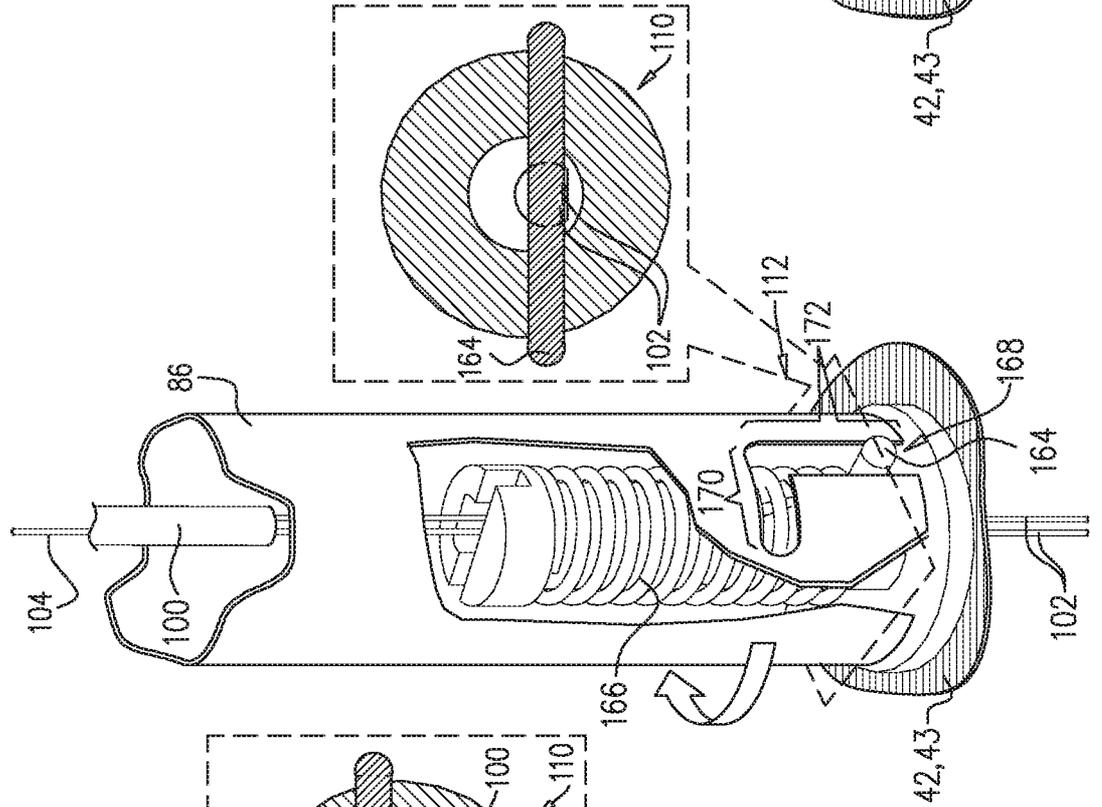


FIG. 4C

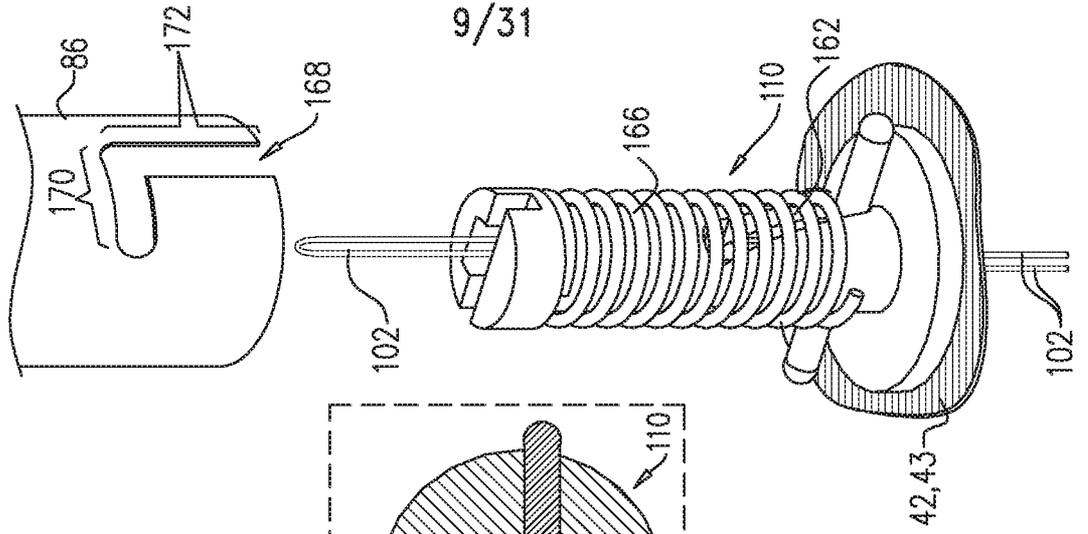

9/31

10/31

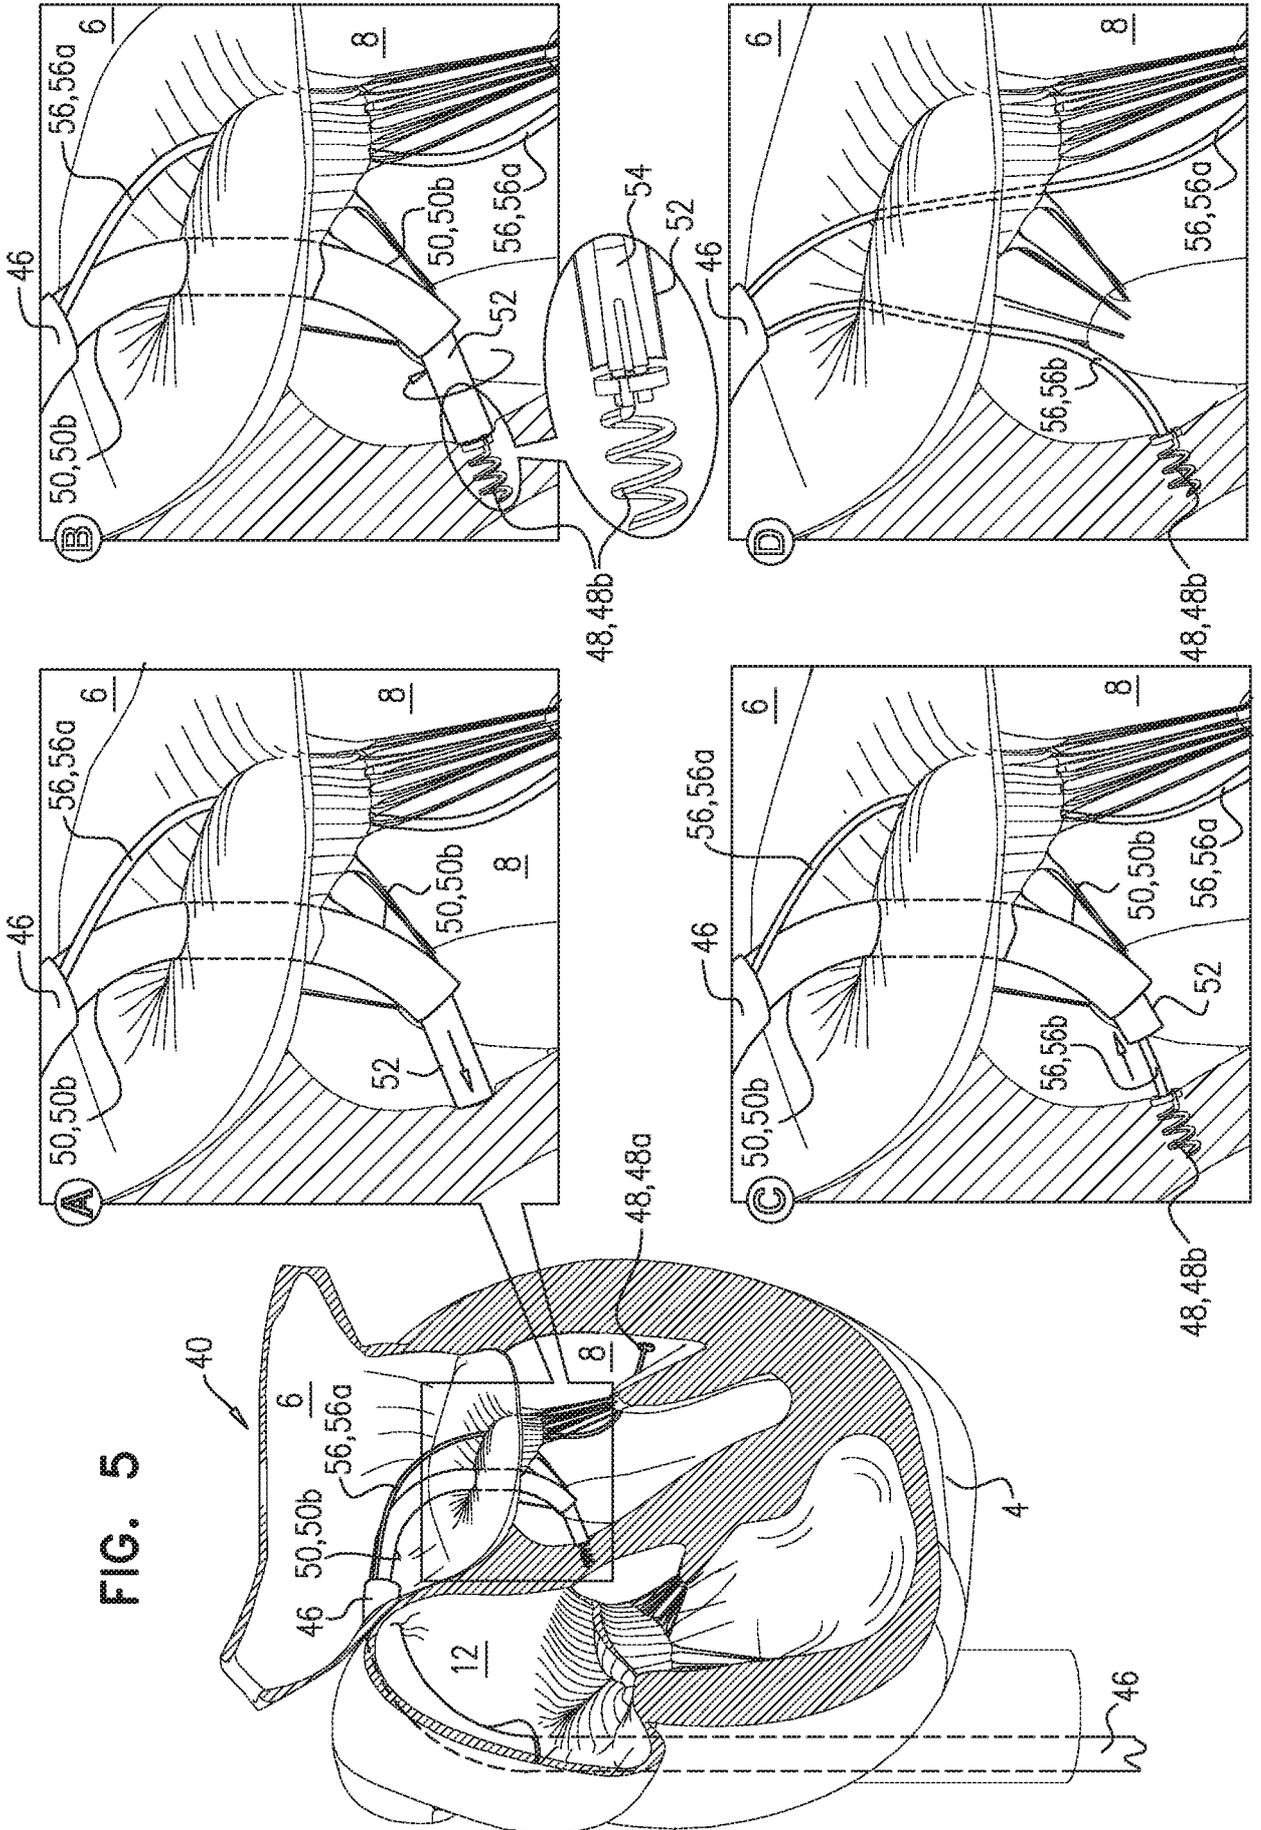


FIG. 5

FIG. 6

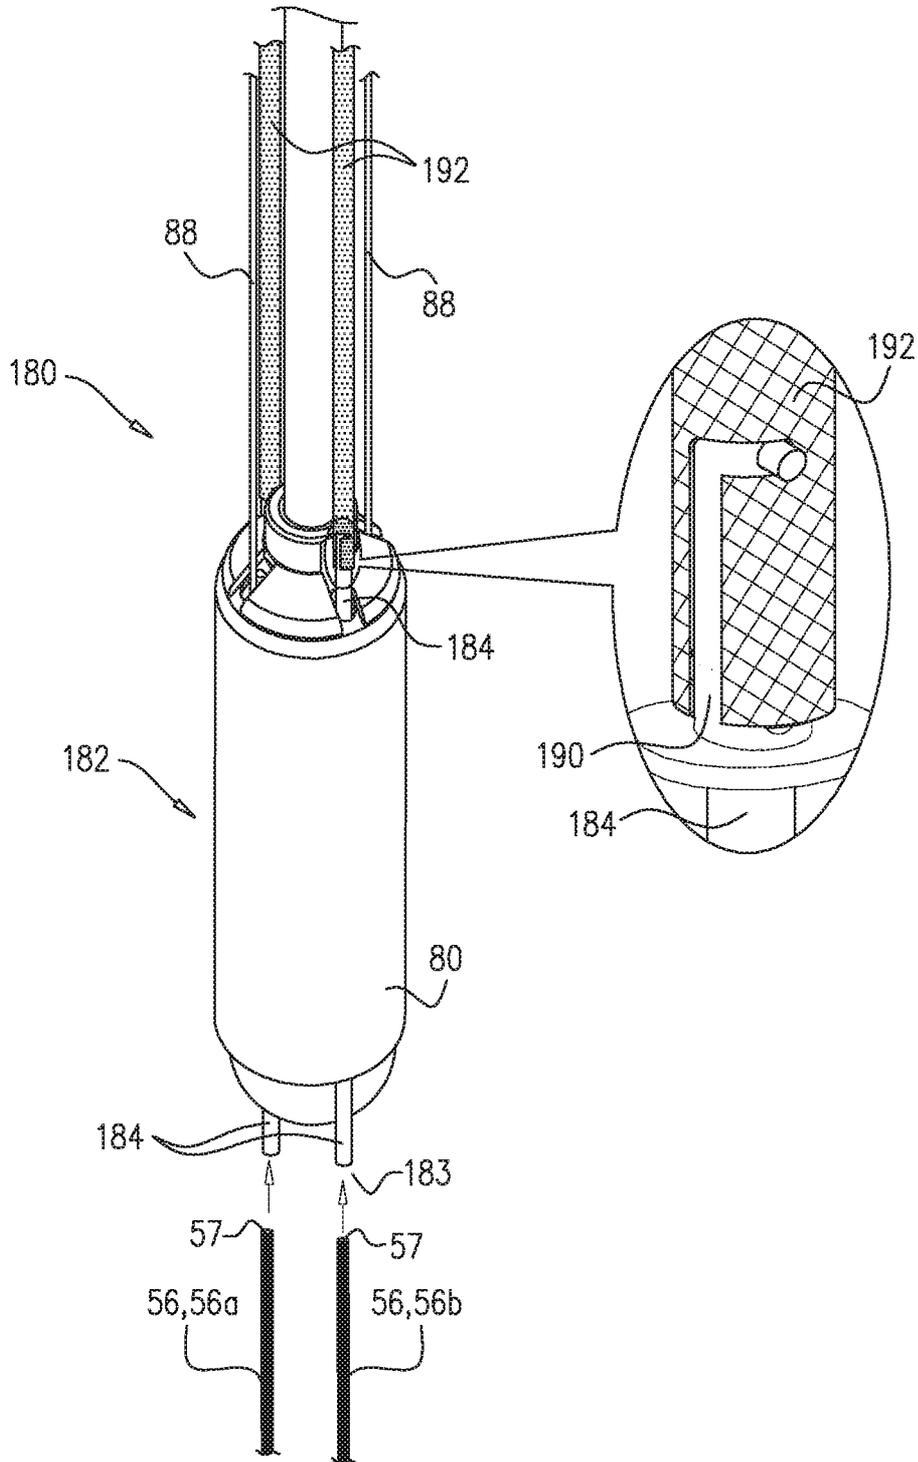


FIG. 7A

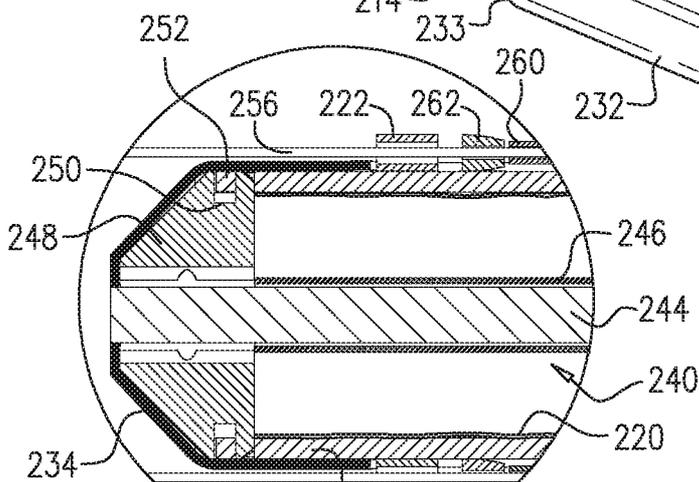
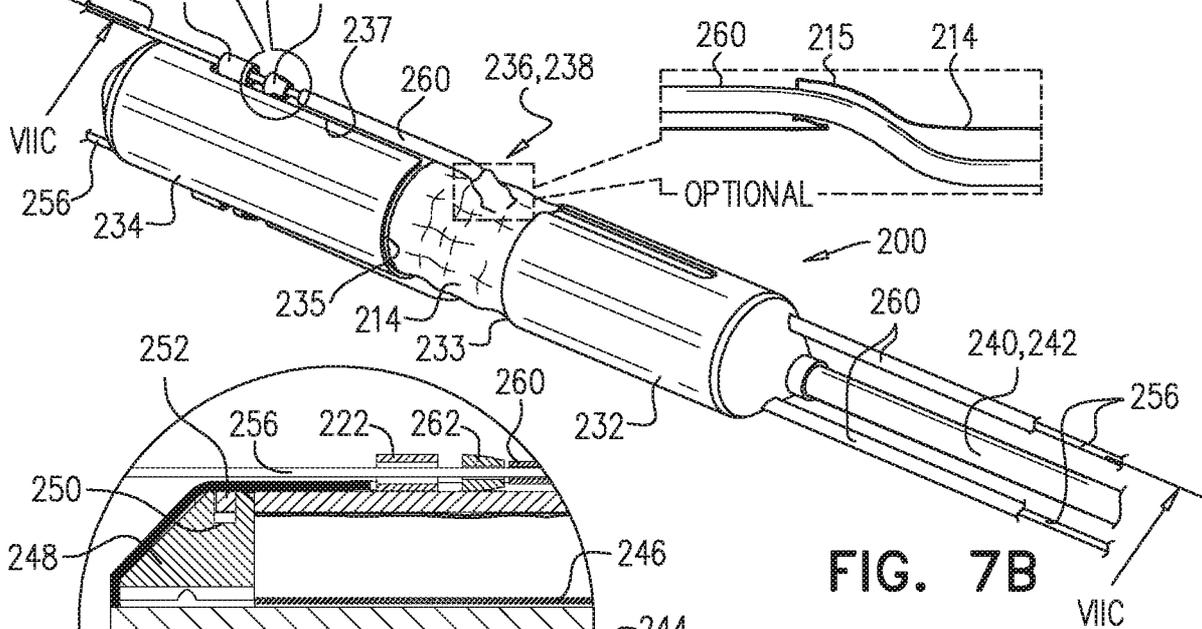
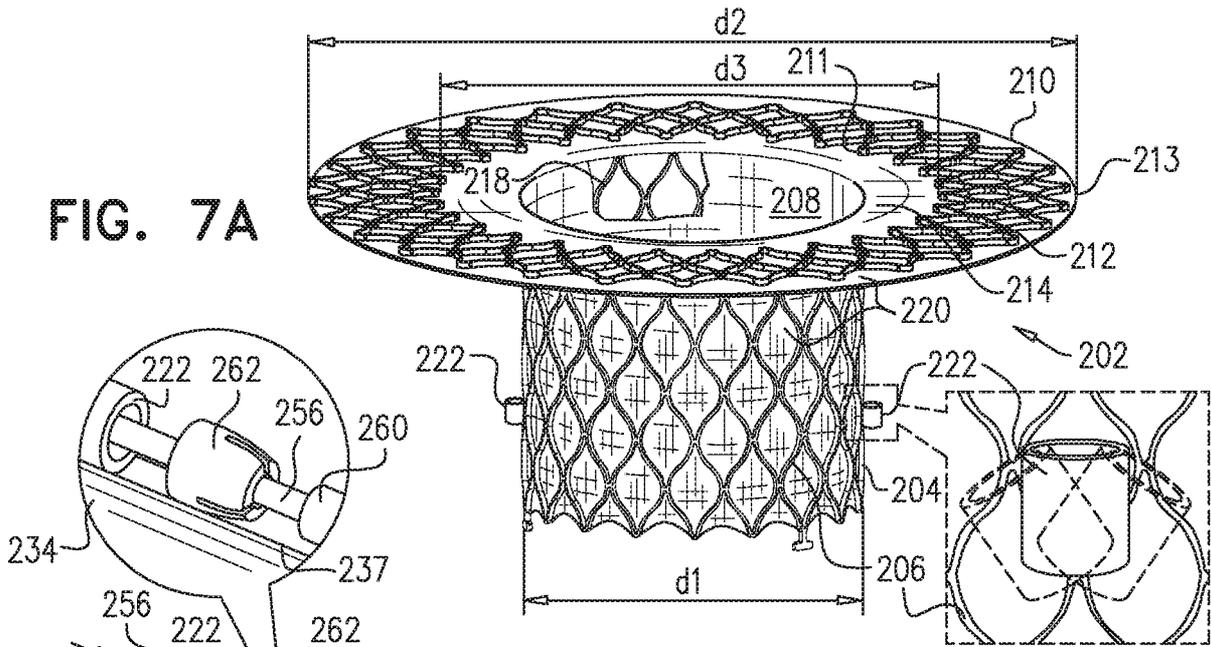


FIG. 7C

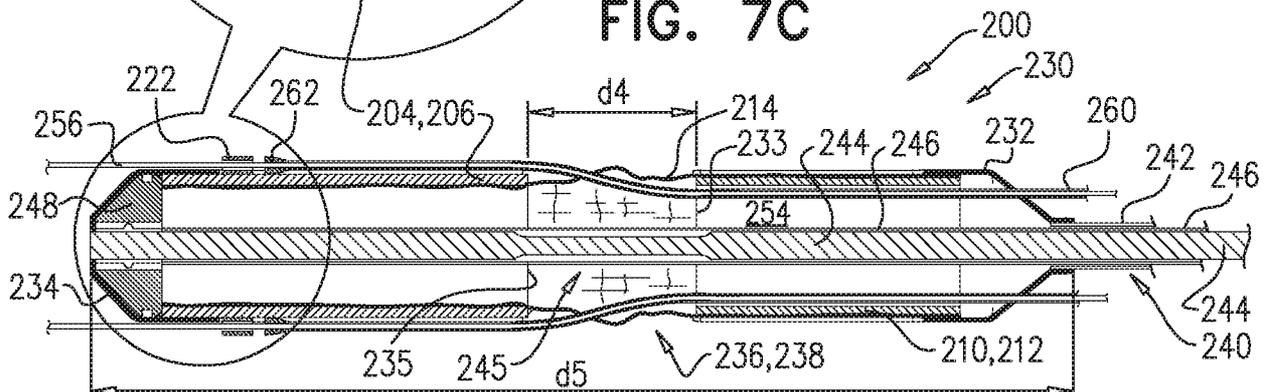


FIG. 8A

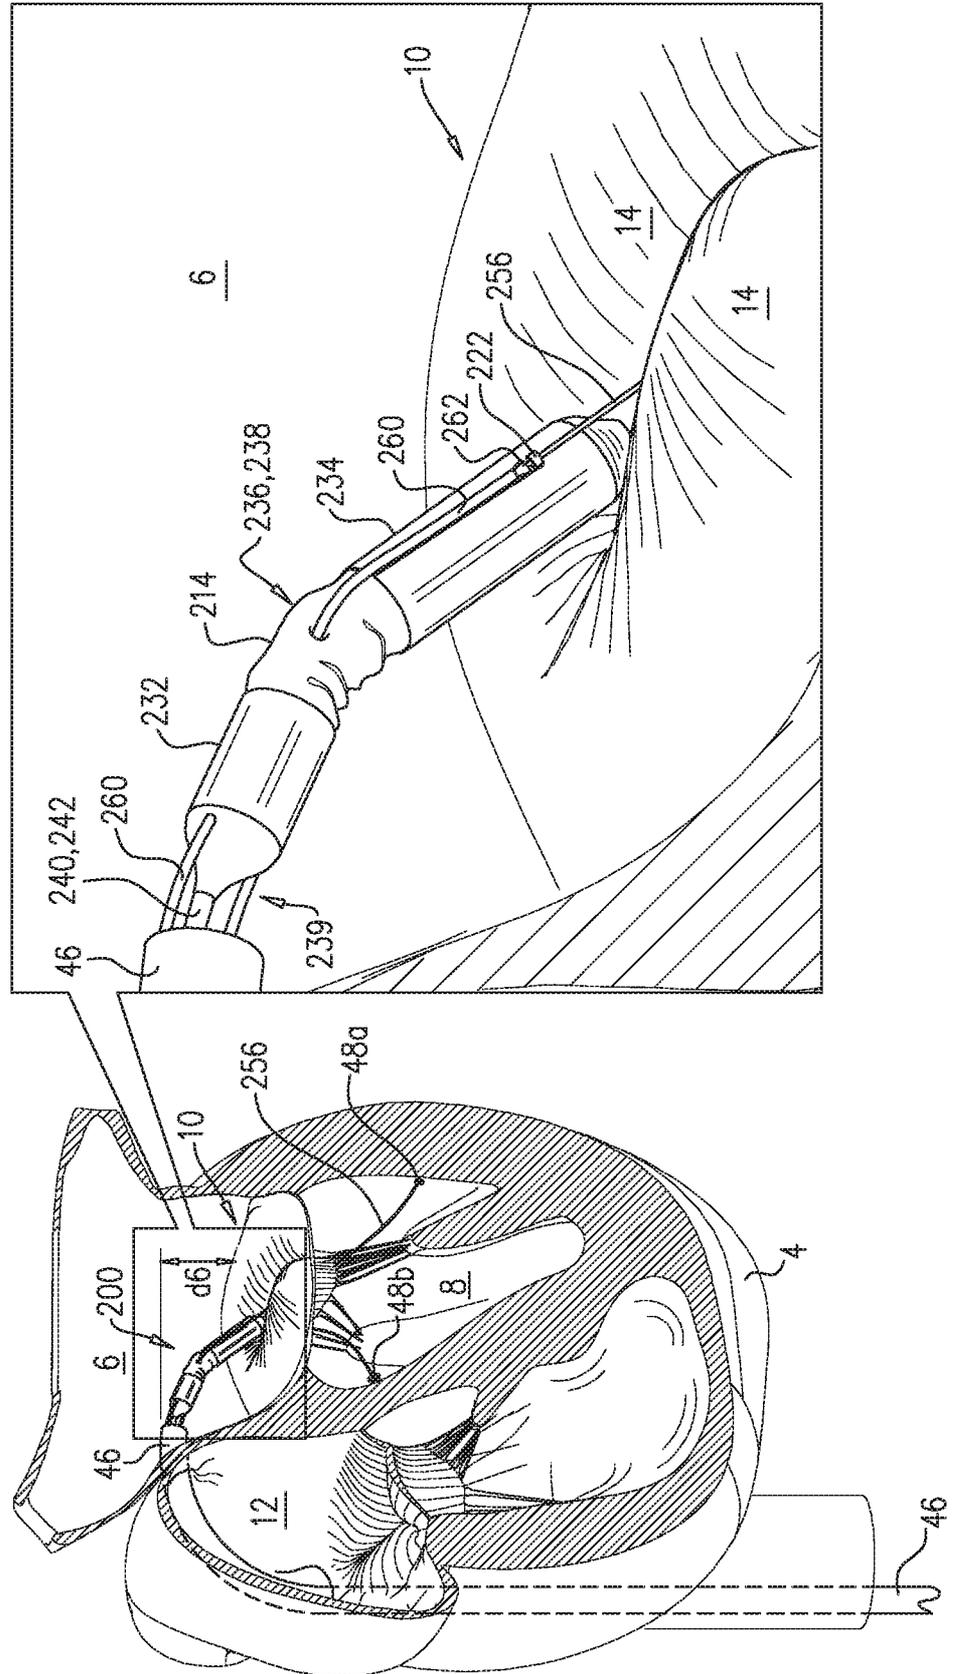








FIG. 8G

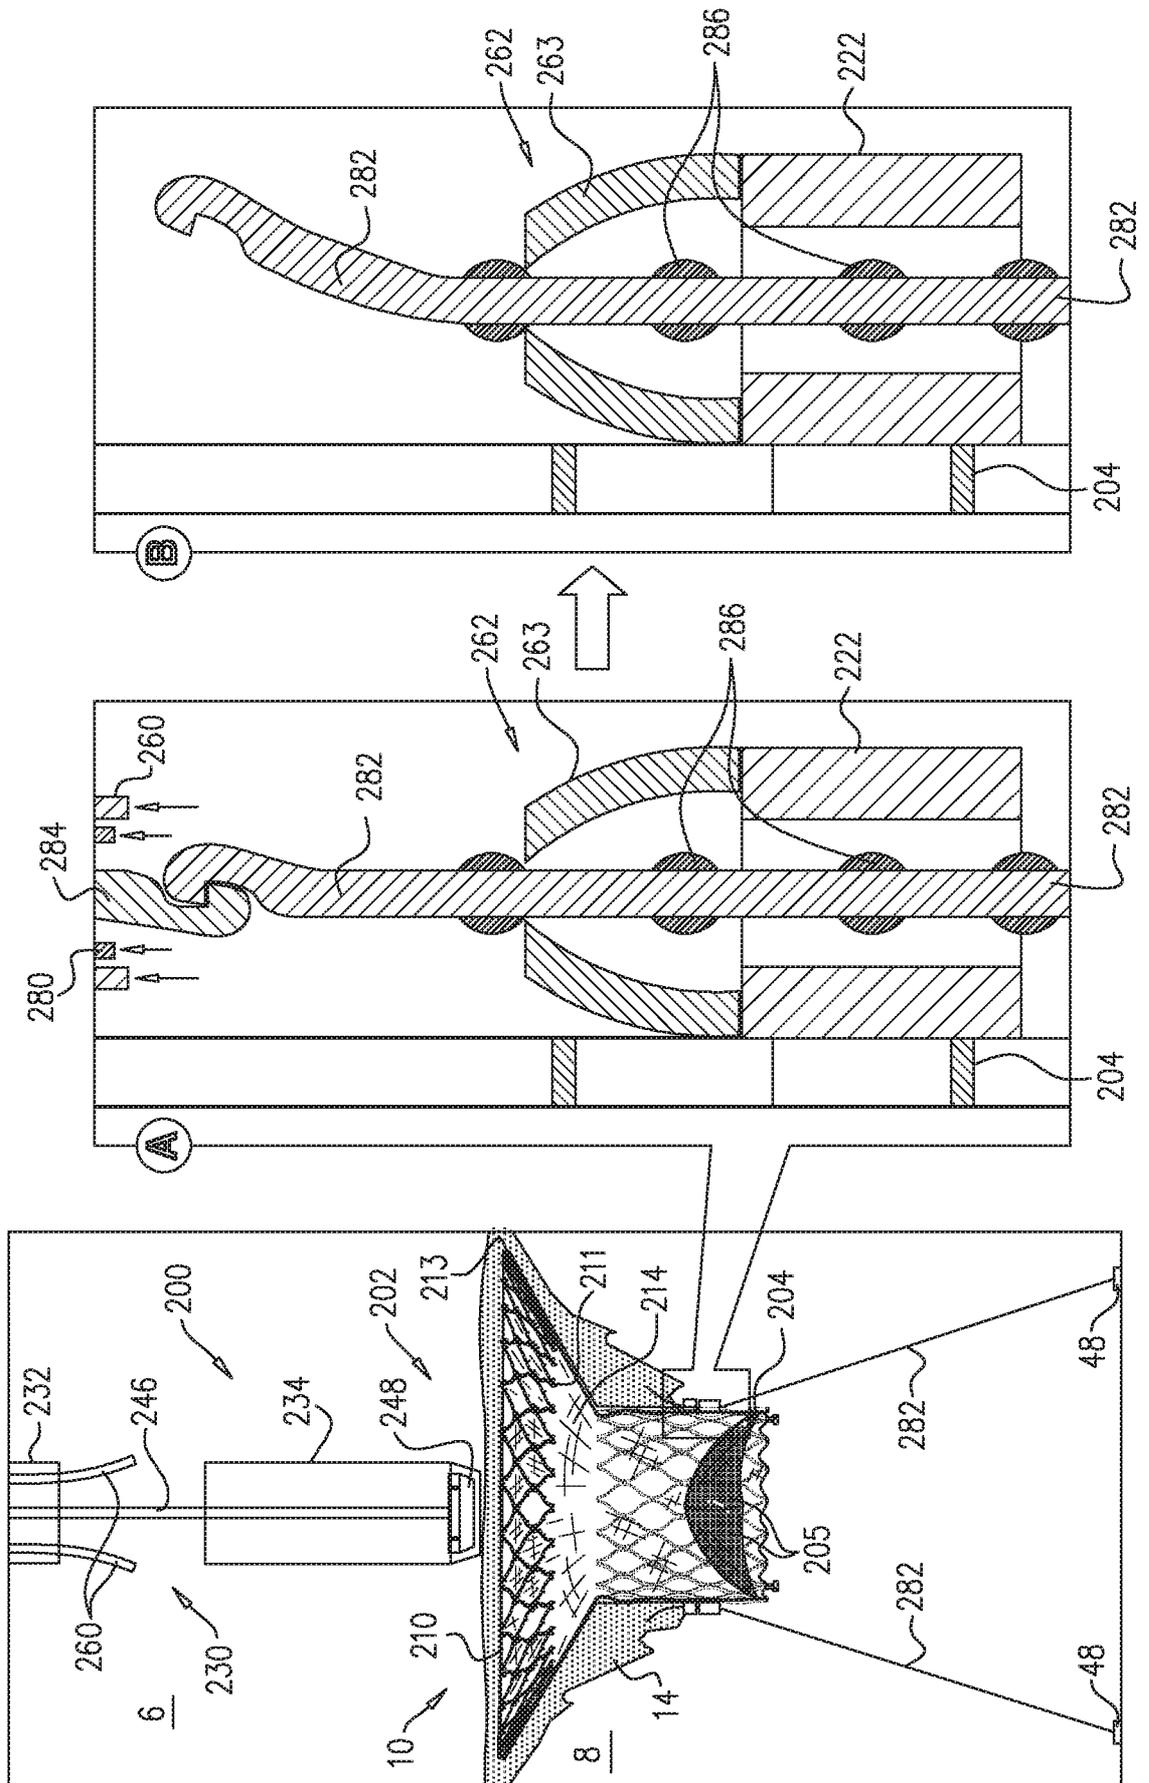


FIG. 8H

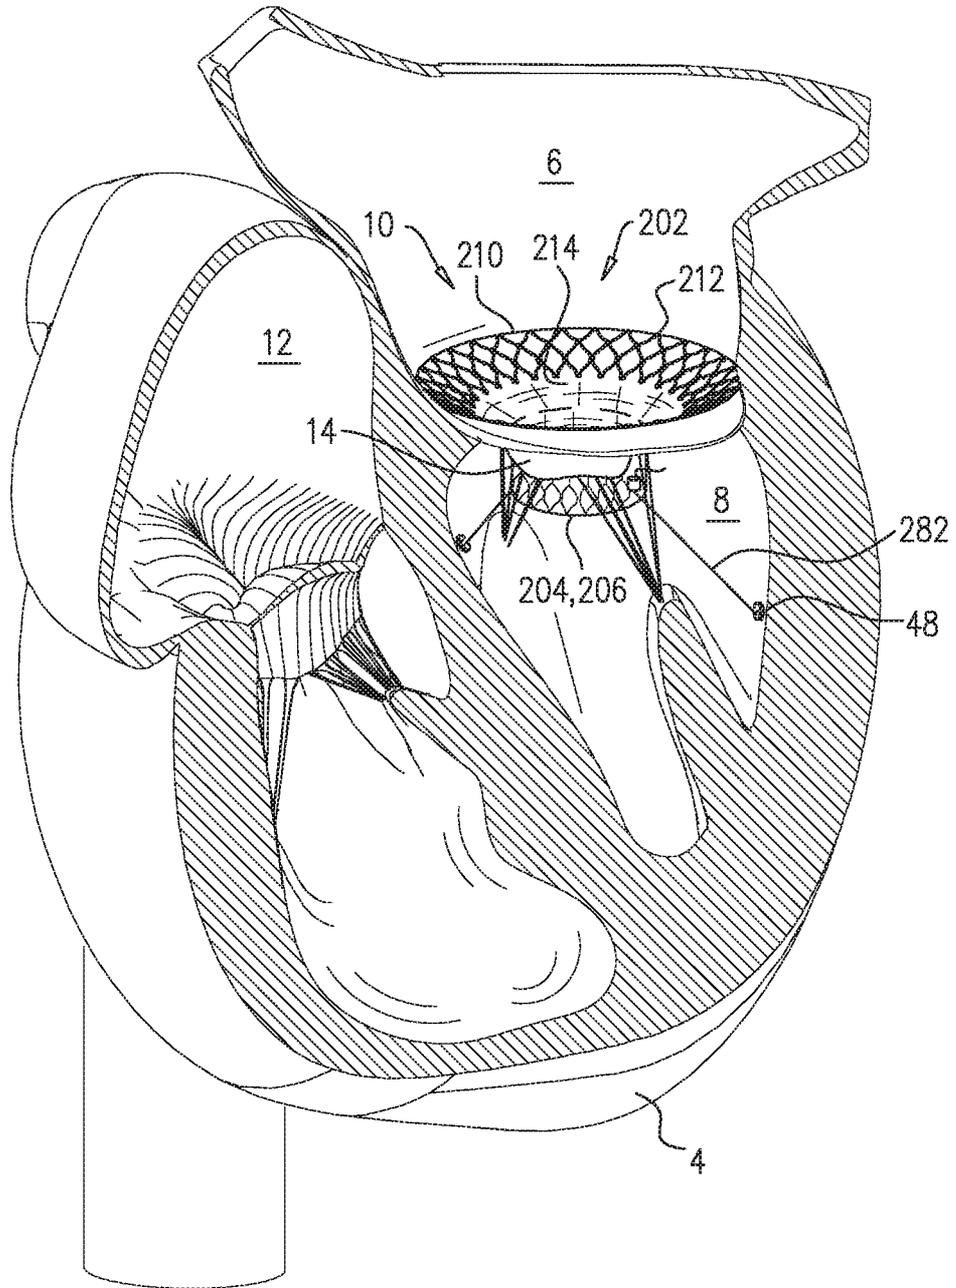


FIG. 9A

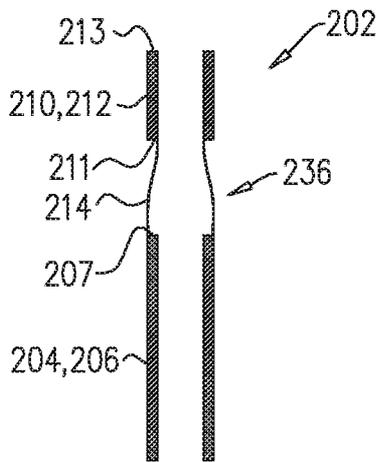


FIG. 9B

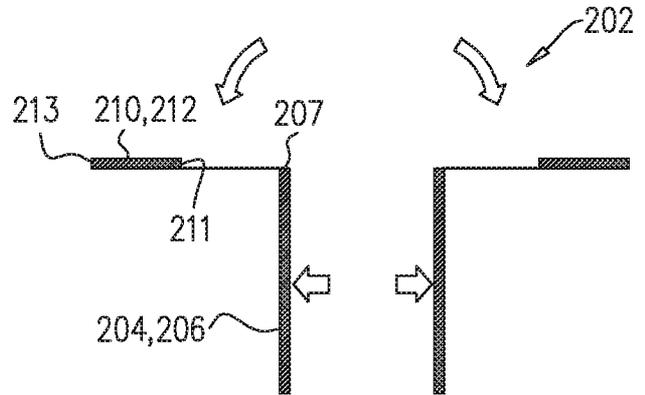


FIG. 10A

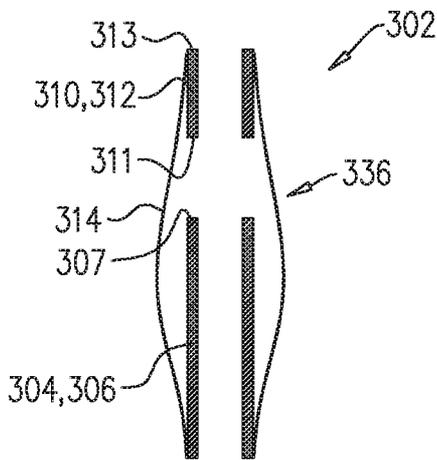


FIG. 10B

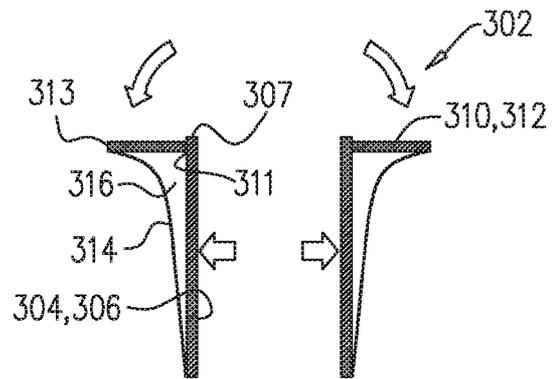


FIG. 11A

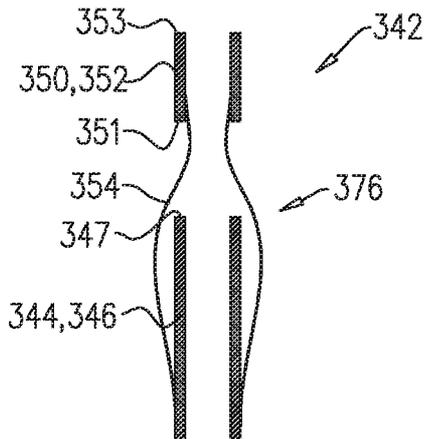


FIG. 11B

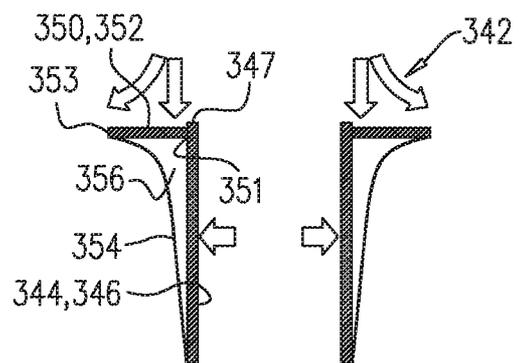


FIG. 12A

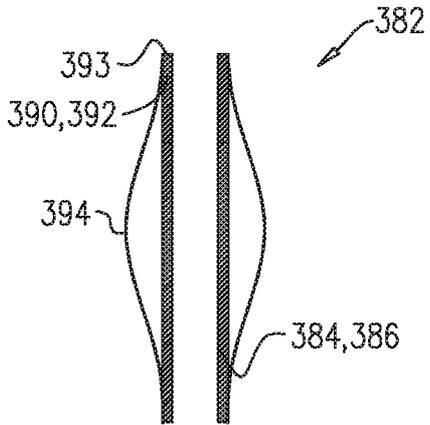


FIG. 12B

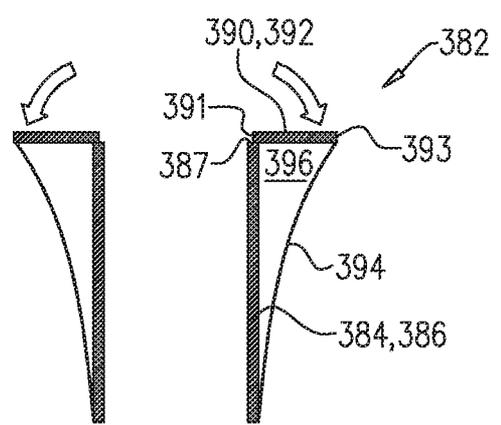


FIG. 13A

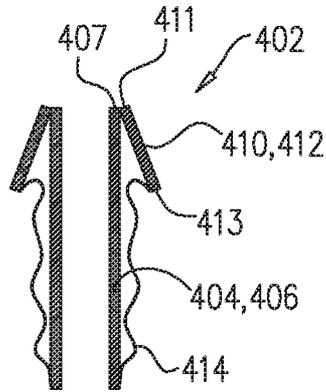


FIG. 13B

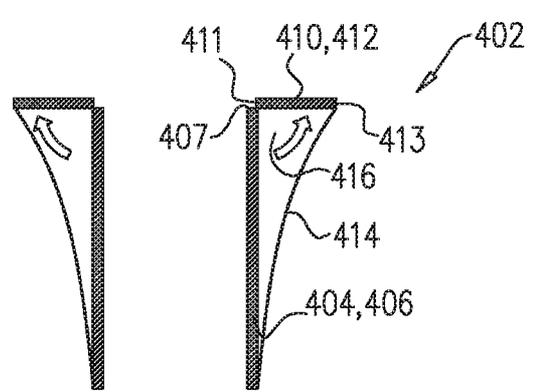


FIG. 14A

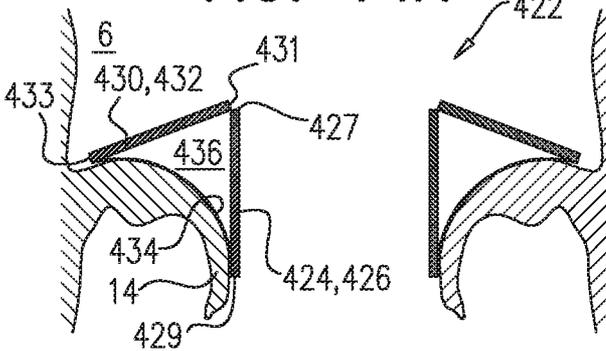


FIG. 14B

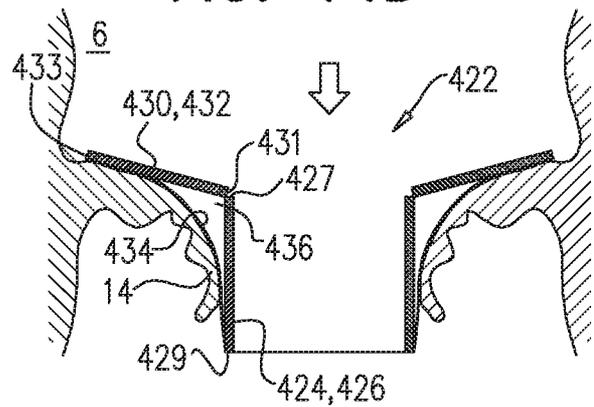


FIG. 15A

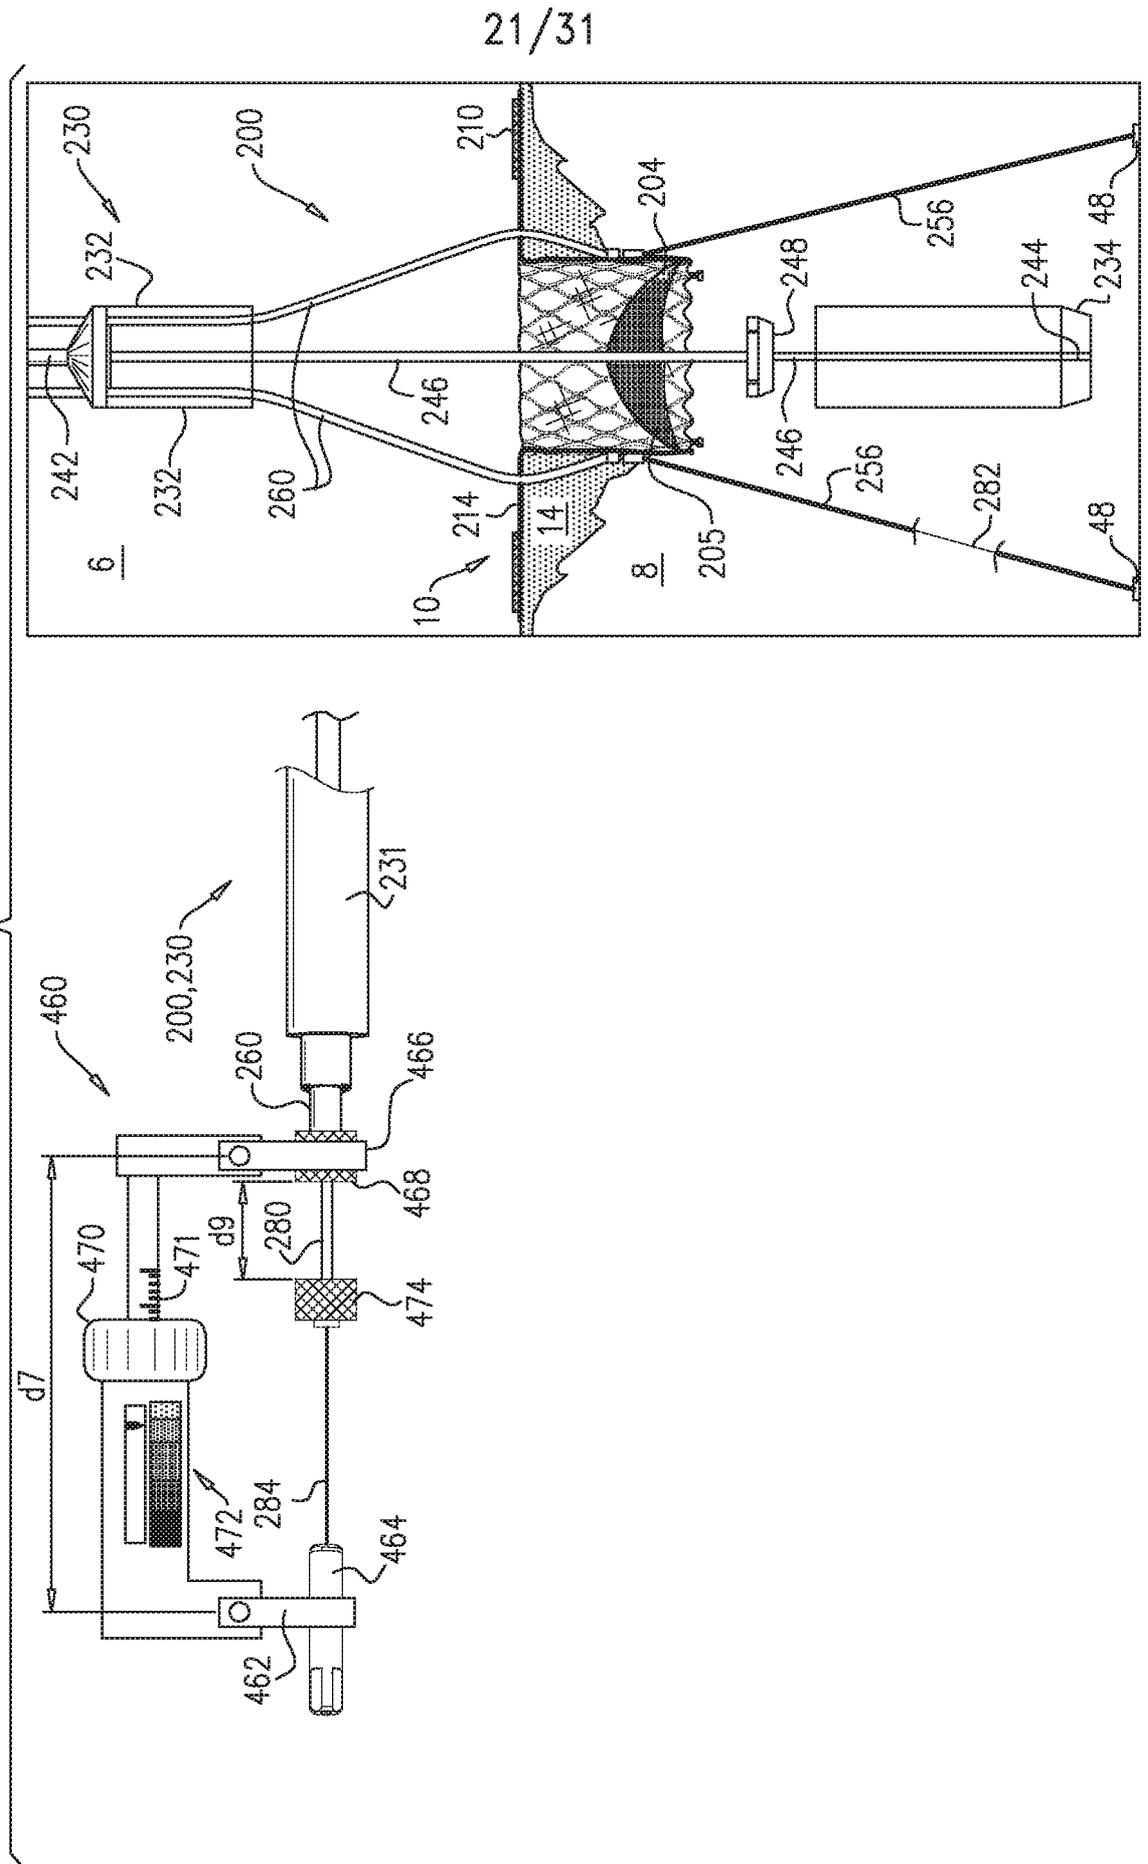


FIG. 15B

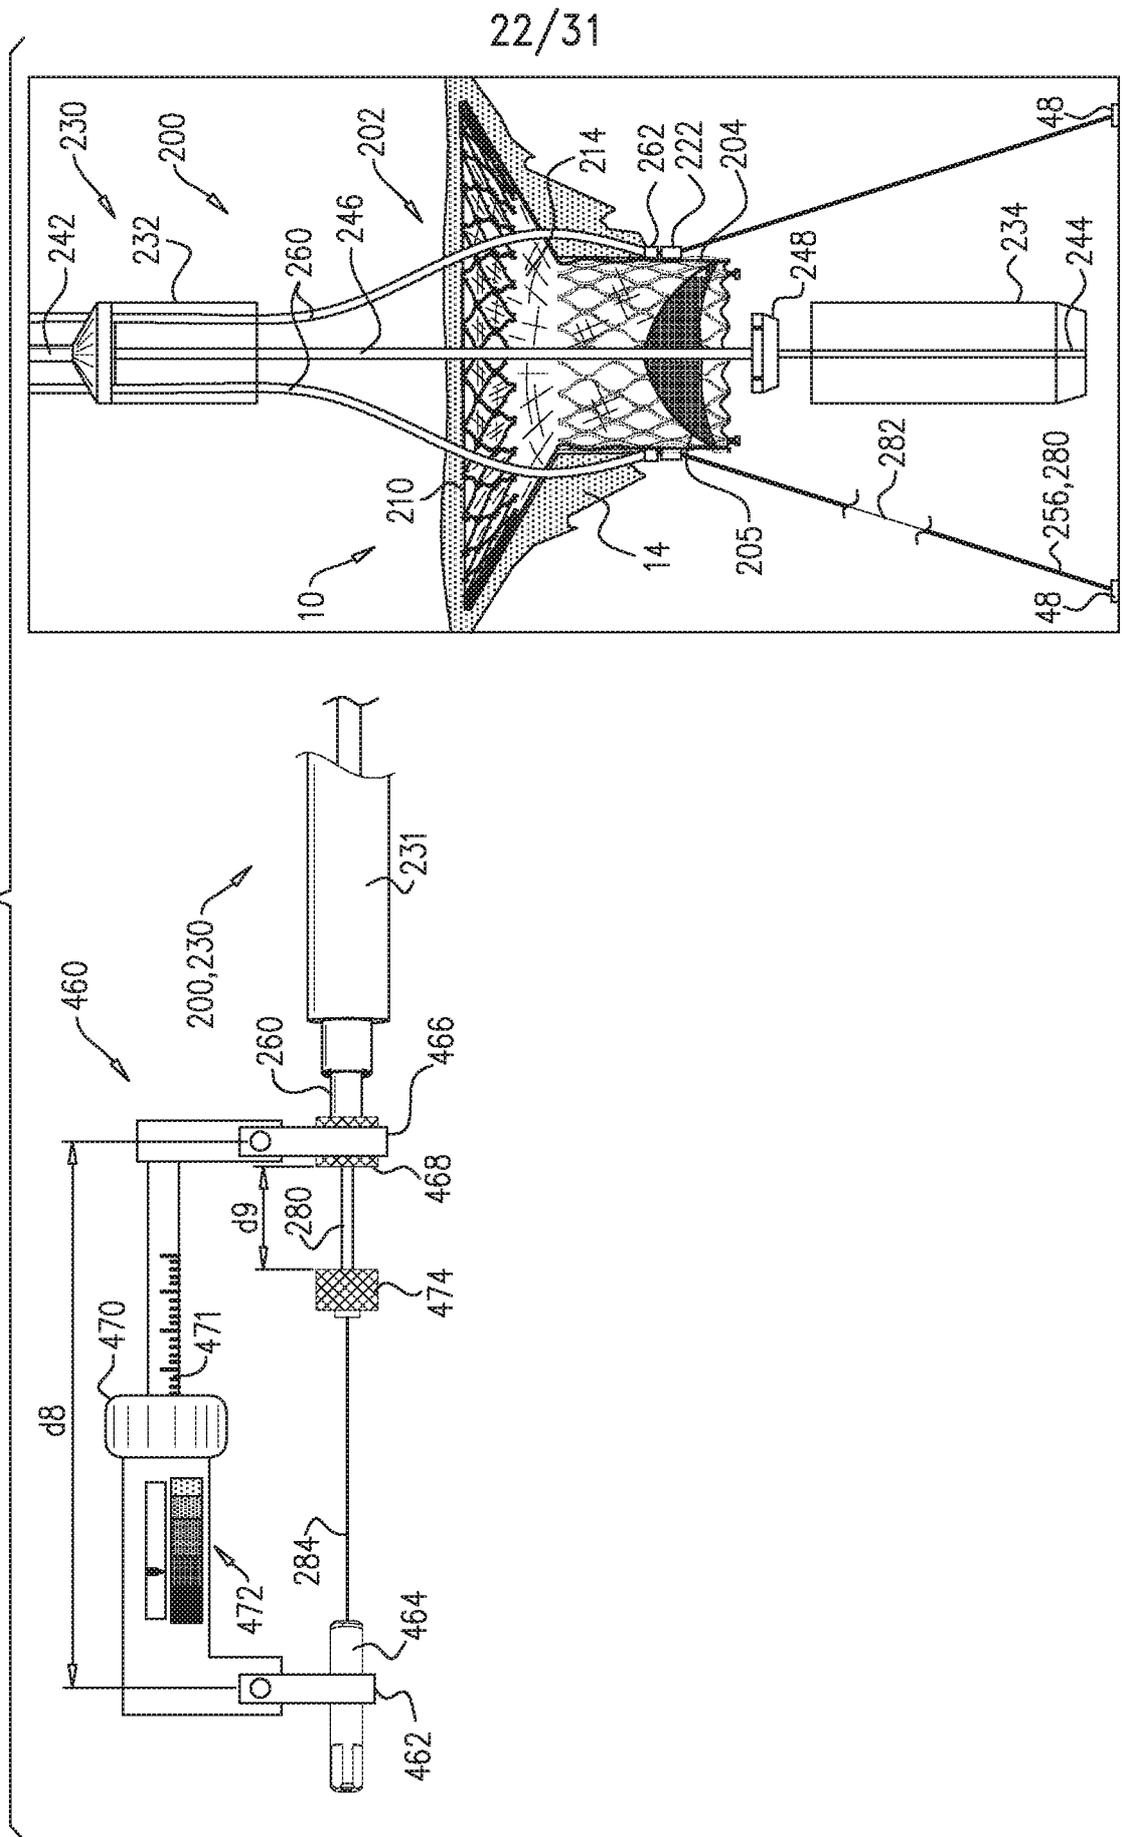


FIG. 15C

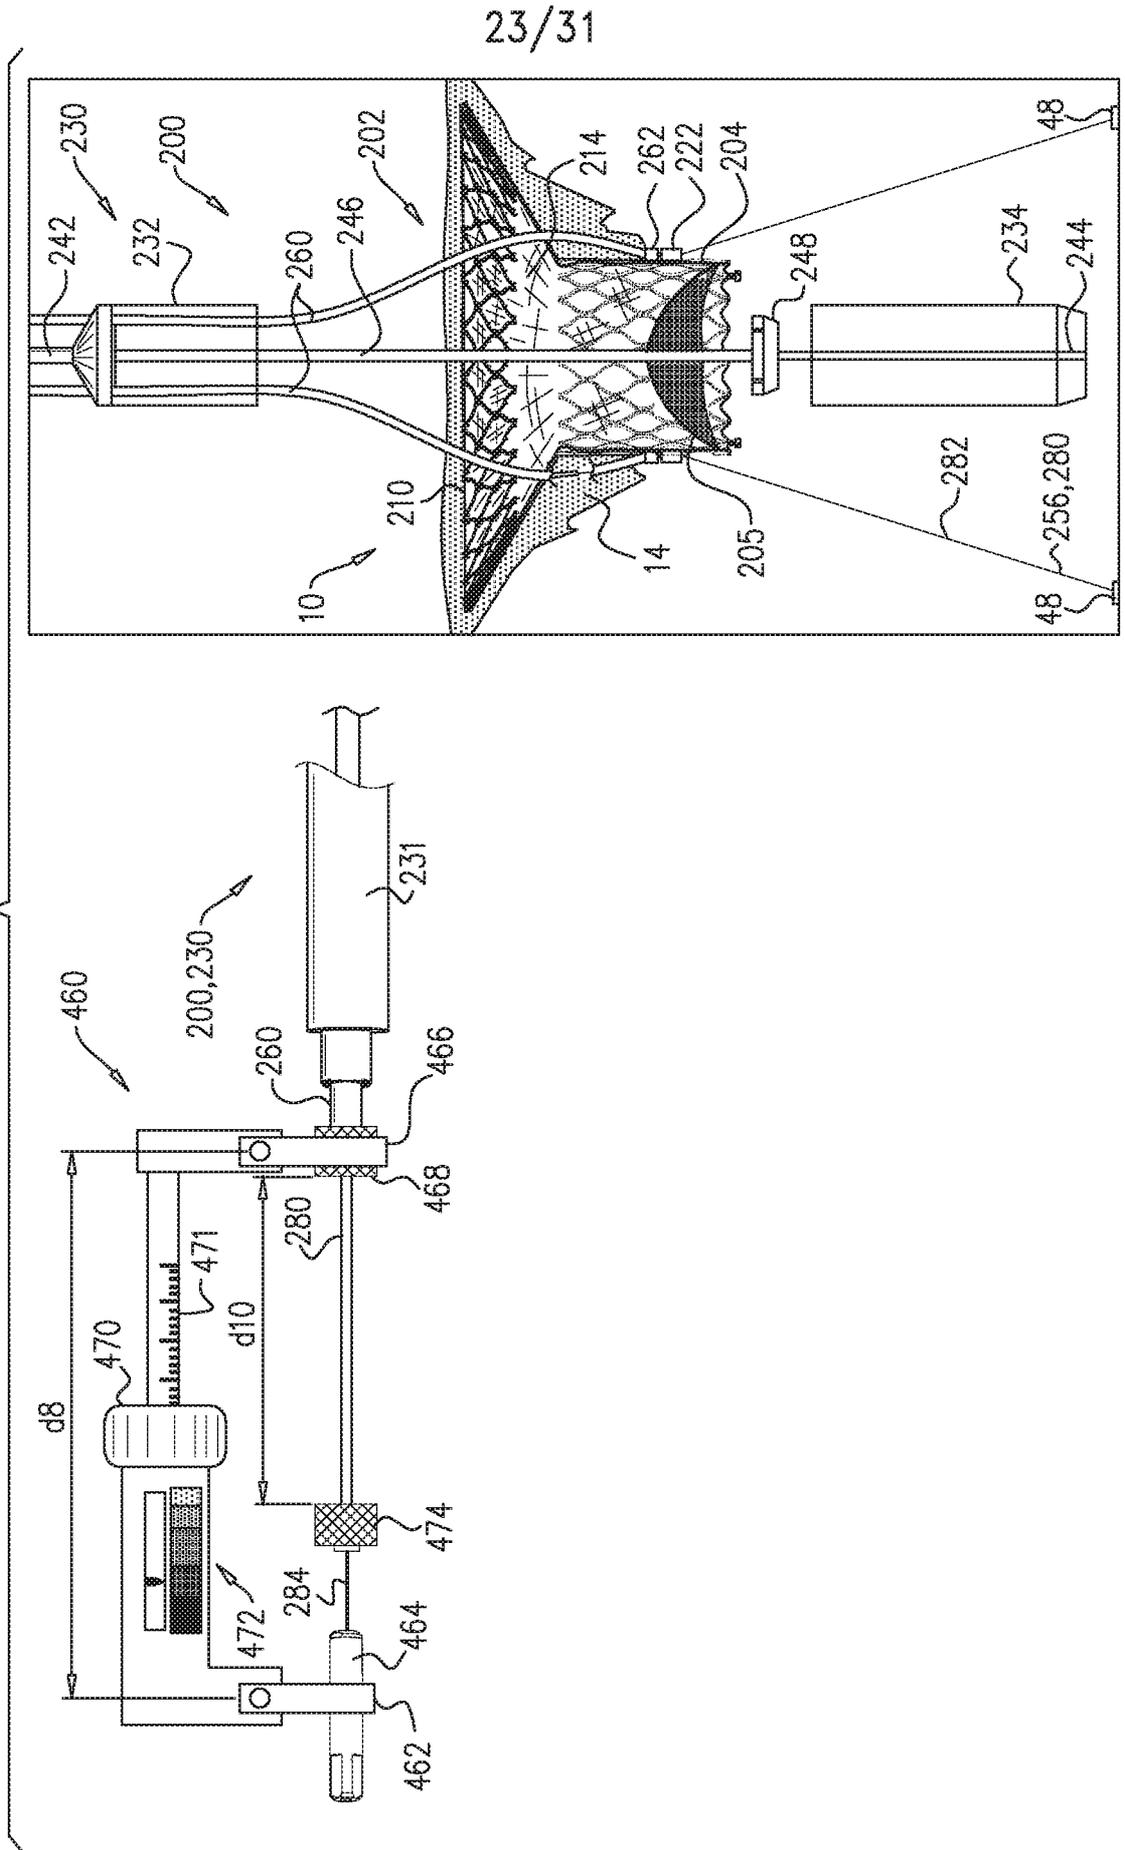




FIG. 17

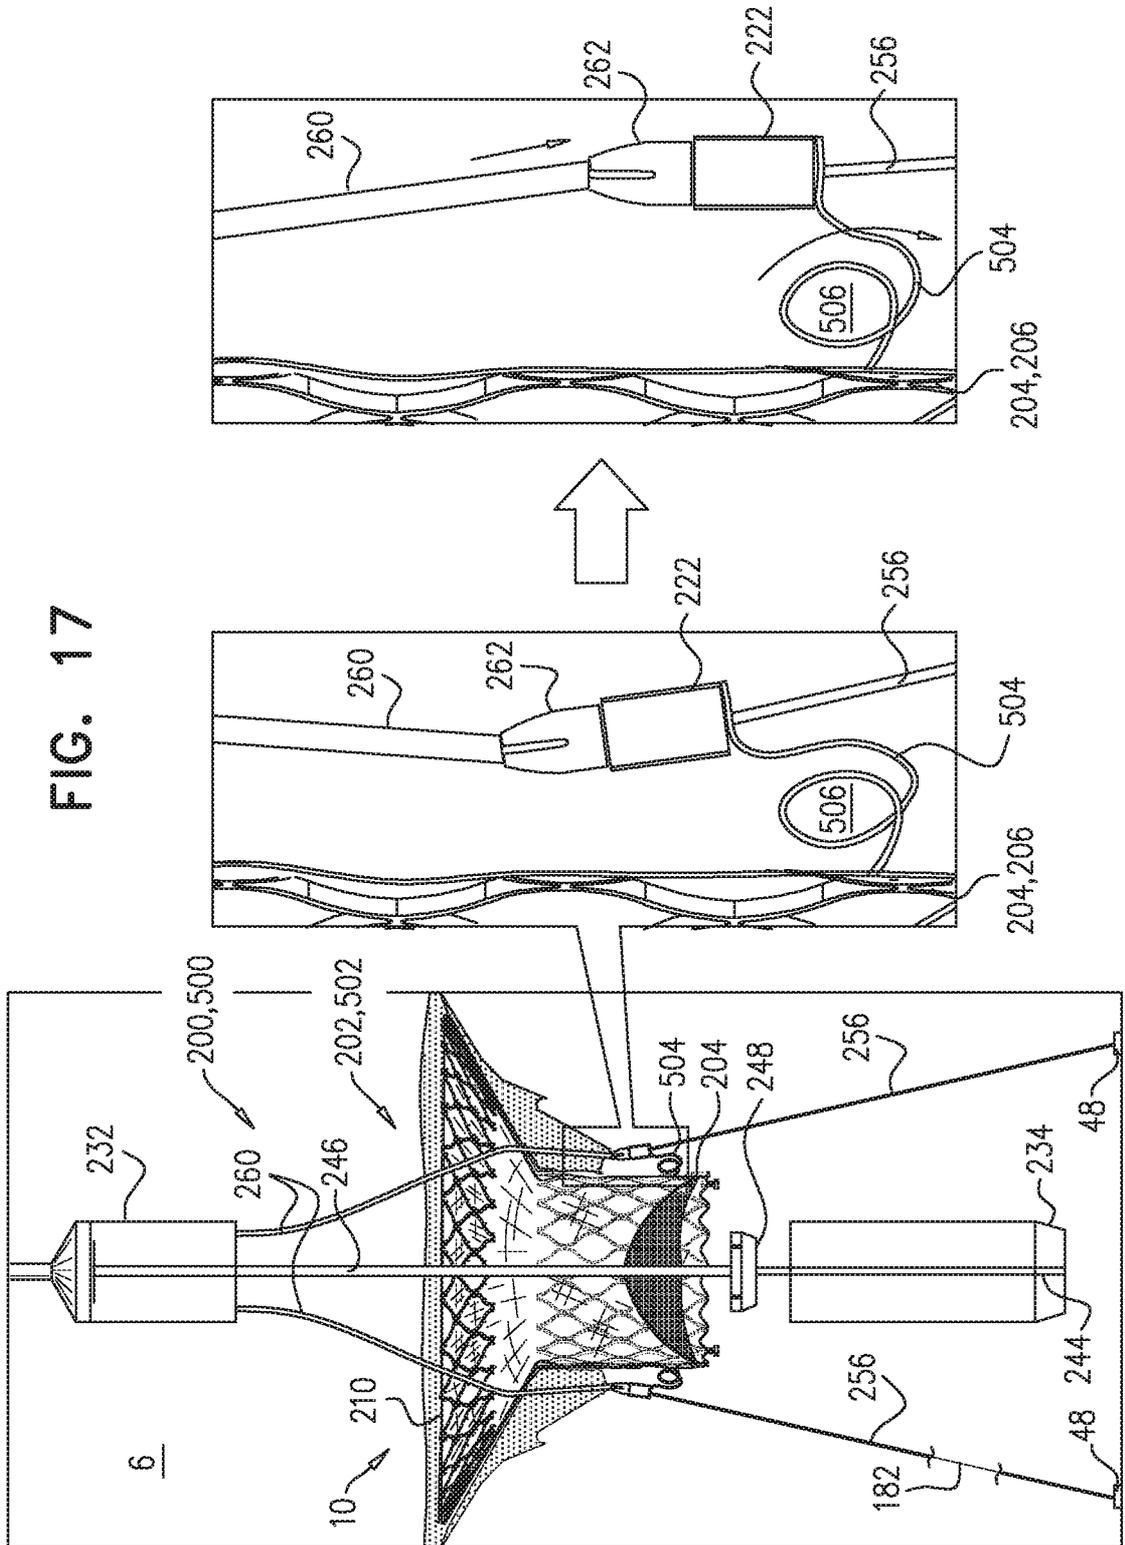


FIG. 18A

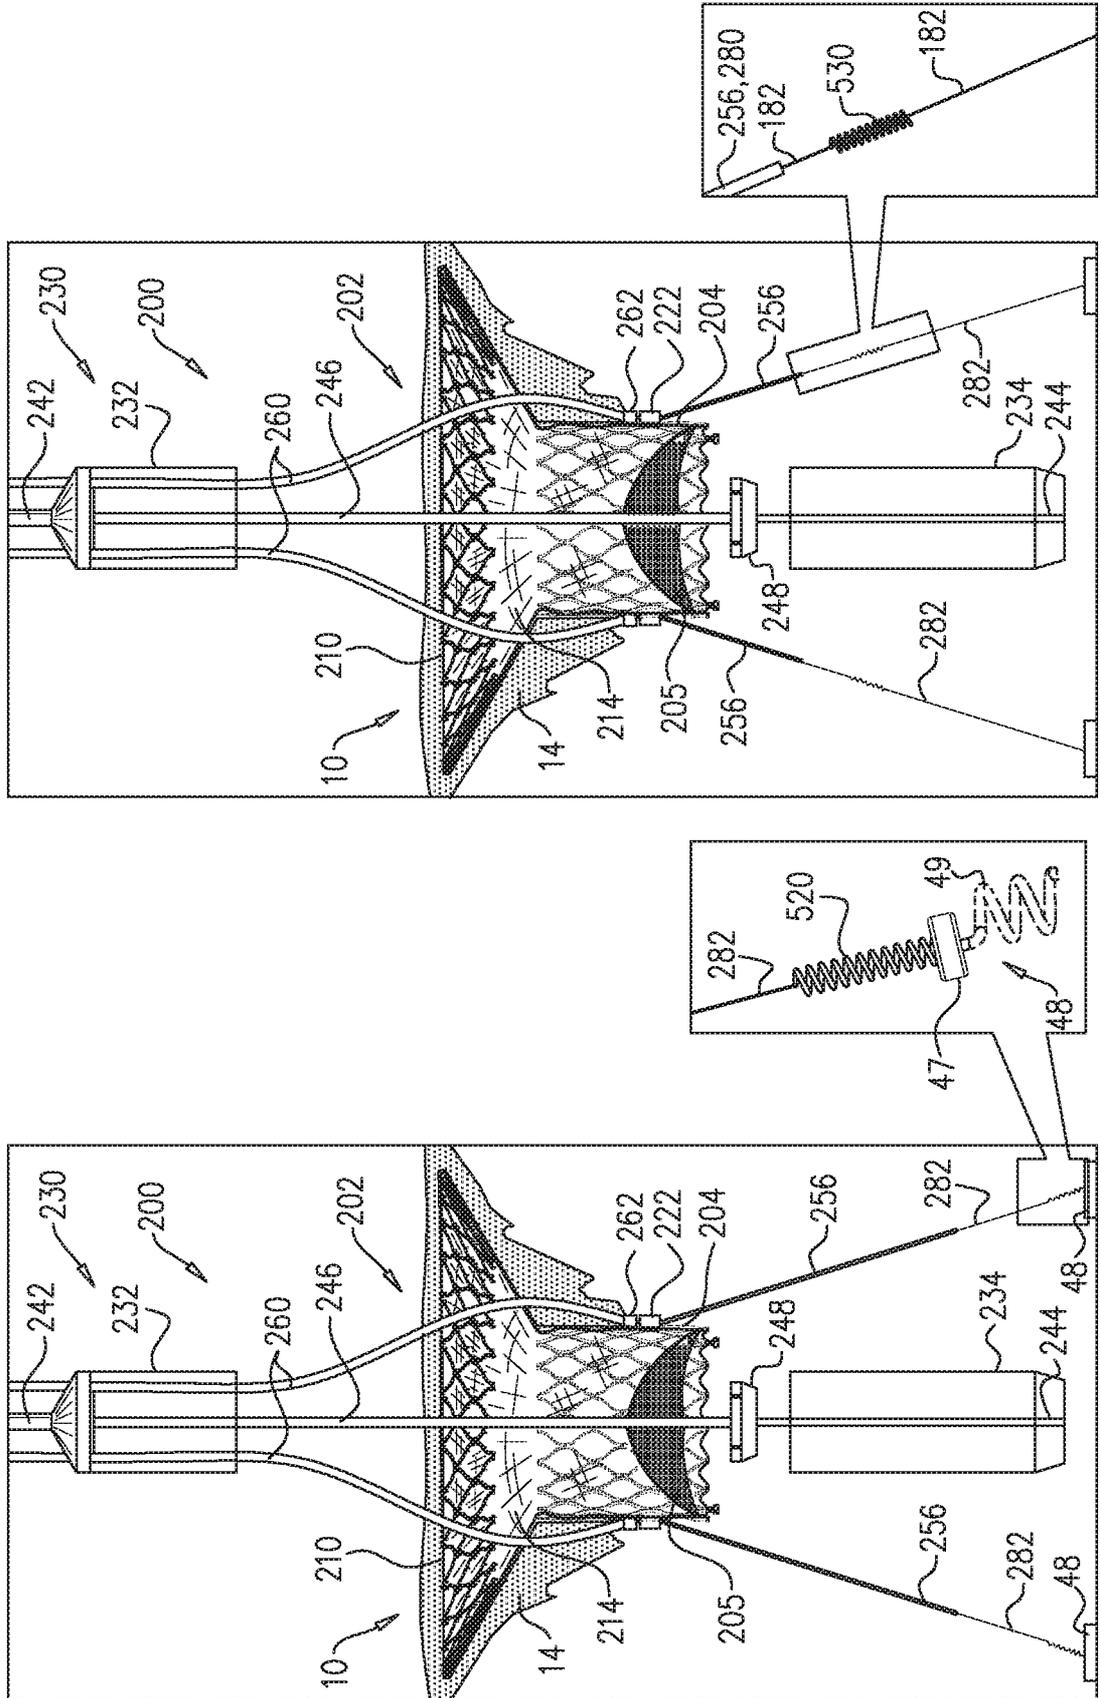


FIG. 19A

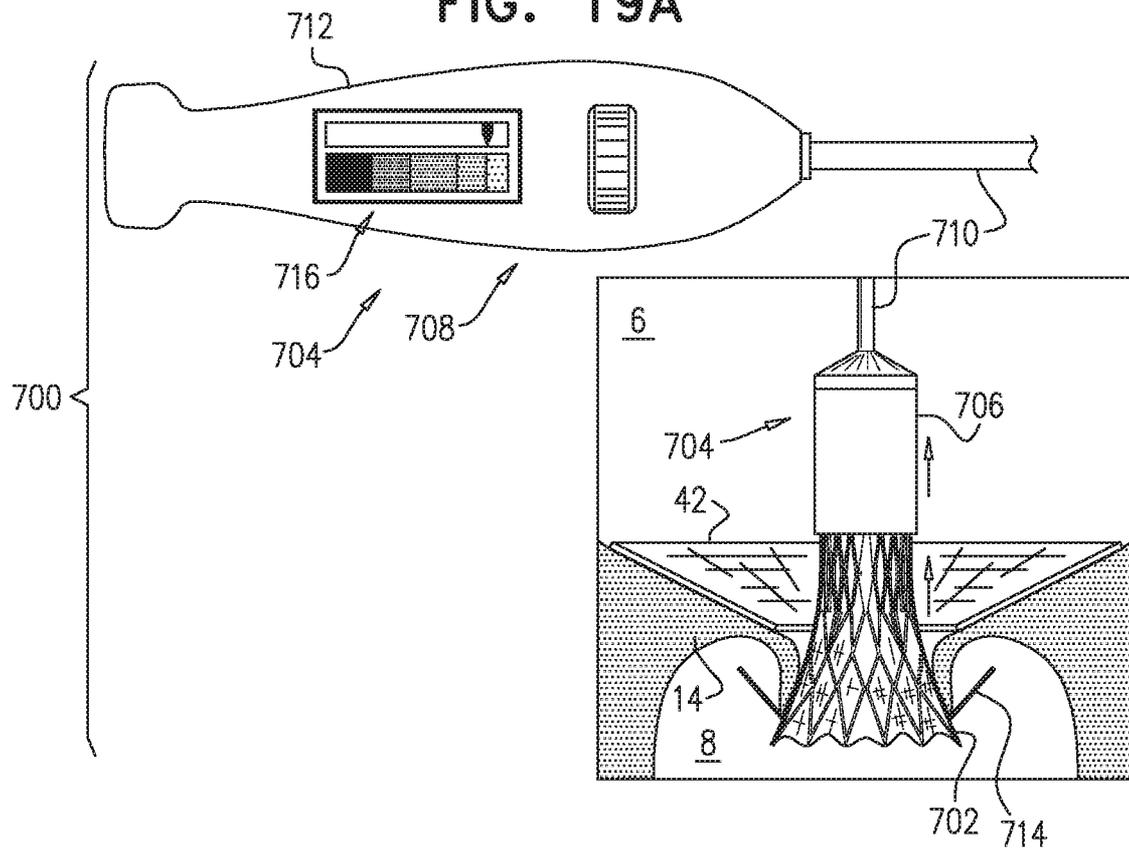
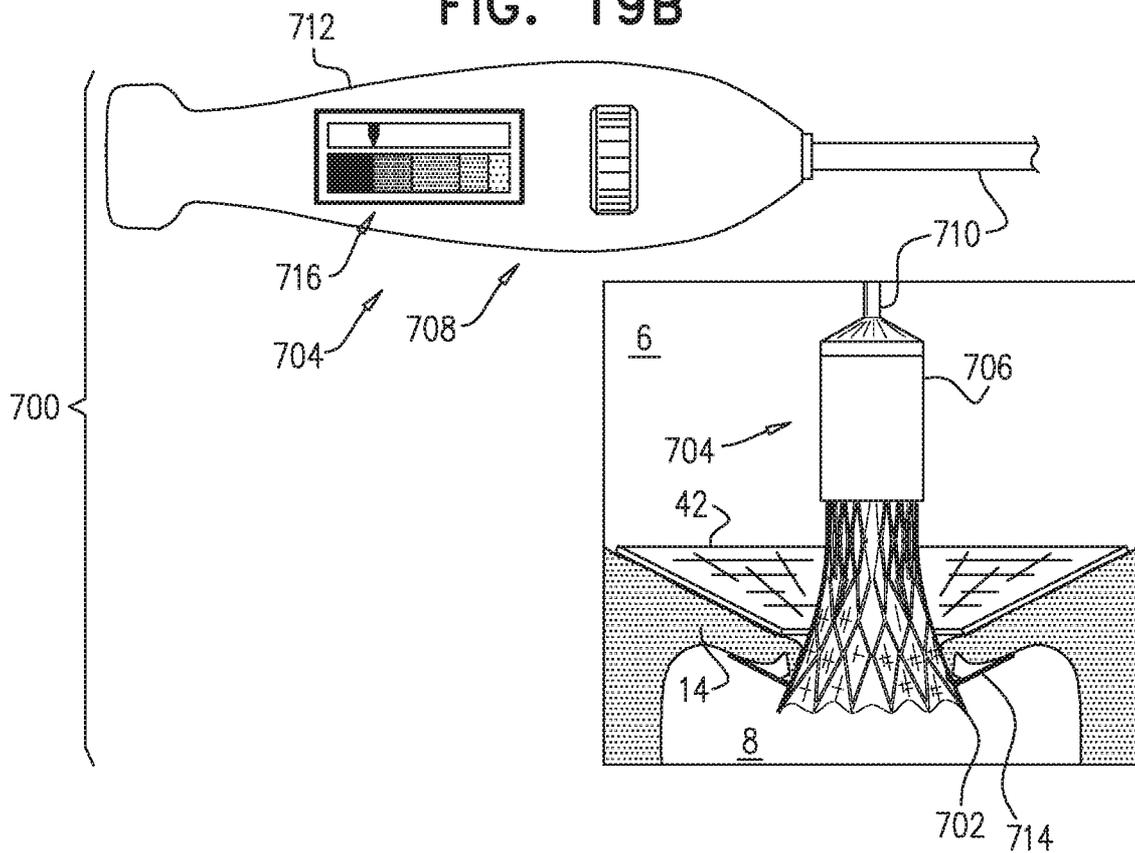
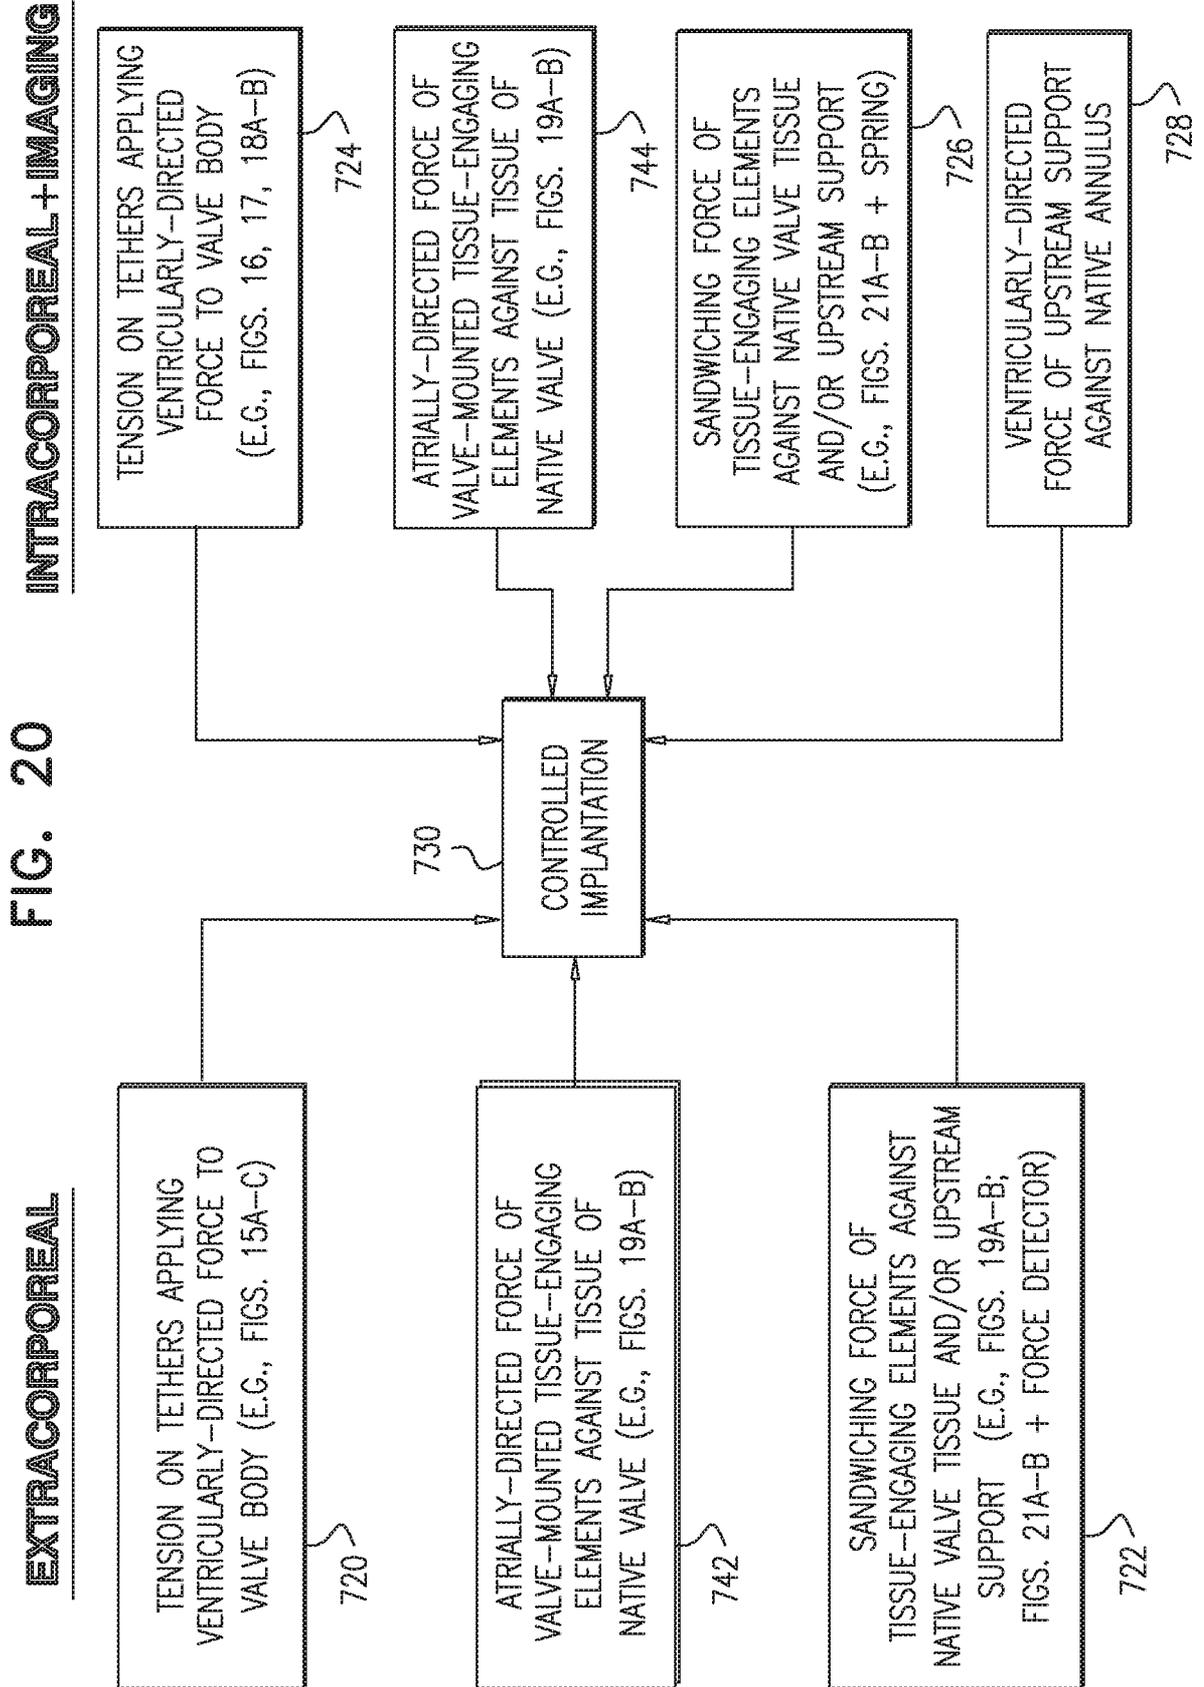


FIG. 19B





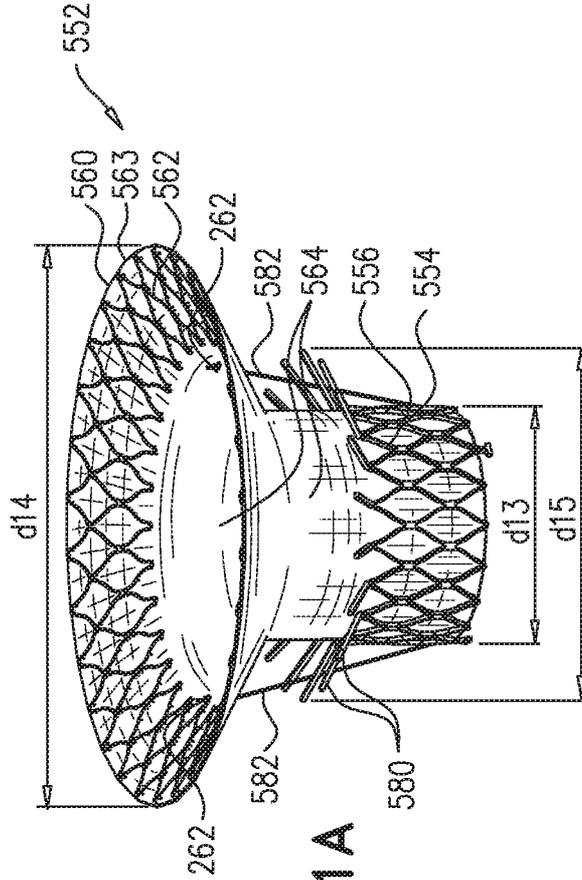


FIG. 21A

FIG. 21B

