



- (51) **International Patent Classification:**
H01H 33/70 (2006.01)
- (21) **International Application Number:**
PCT/EP2018/085565
- (22) **International Filing Date:**
18 December 2018 (18.12.2018)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:**
17209152.2 20 December 2017 (20.12.2017) EP
- (71) **Applicant:** **ABB SCHWEIZ AG** [CH/CH]; Brown Boveri Strasse 6, CH-5400 Baden (CH).
- (72) **Inventors:** **YE, Xiangyang**; Wiesengrundweg 28, 5524 Nesselbach (CH). **GALLETTI, Bernardo**; Kornweg 13, 5415 Nussbaumen (CH). **DHOTRE, Mahesh**; Sommerhaldenstrasse 1B, 5200 Brugg (CH). **GOTTI, Manuel**;
- (74) **Agent:** **ZIMMERMANN & PARTNER PATENTANWÄLTE MBB**; Josephspitalstr. 15, 80331 München (DE).
- (81) **Designated States** (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.
- (84) **Designated States** (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ,

(54) **Title:** CIRCUIT BREAKER AND METHOD OF PERFORMING A CURRENT BREAKING OPERATION

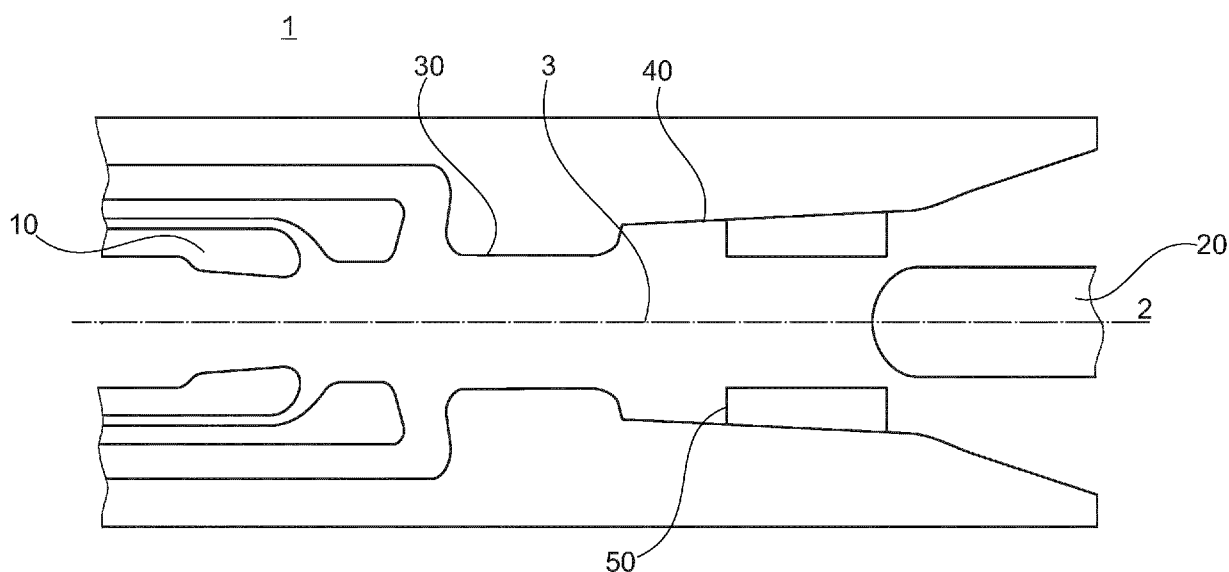


Fig. 1

(57) **Abstract:** A circuit breaker (1) includes: first and second contacts (10, 20) moveable relative to each other along an axis (2) of the circuit breaker (1) between an open and closed configuration and defining an arcing region (3) in which an arc is formed during current breaking operation; a nozzle (30) directing a flow of quenching gas onto the arcing region (3) during current breaking operation, a diffuser (40) downstream of the nozzle (30) for further transporting the quenching gas within the arcing region (3) and/or downstream of the arcing region (3), and a mechanical swirling device (50) arranged downstream of the nozzle (30) and at least partially in the diffuser (40) for imparting a swirl onto the quenching gas flowing along the diffuser (40), the mechanical swirling device (50) having an axial overlap with the second contact (20) in the open configuration of the circuit breaker (1).



UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— *with international search report (Art. 21(3))*

Circuit Breaker and Method of Performing a Current Breaking Operation

Aspects of the invention relate to a circuit breaker, in particular a circuit breaker having a mechanical swirling device. Further aspects relate to a method of performing a current breaking operation.

5

Technical background:

A circuit breaker can be an automatically operated electrical switch designed to protect an electrical circuit from damage caused by excess current, typically resulting from an overload or short circuit. Its basic function may be to interrupt current flow after a fault is detected.

10 To interrupt current flow, the circuit breaker is normally opened by relative movement of the contacts (plug and pipe) away from each other, whereby an arc can form between the separating contacts. In order to extinguish such an arc, some types of switches are equipped with an arc-extinguishing system. In one type of switch, an arc-extinguishing system operates by releasing a quenching gas towards the arc for cooling down and finally extinguishing the
15 arc. However, the contacts may form a barrier that may deteriorate the flow of the quenching gas released towards the arc, whereby hot zones may be formed in which the temperature of the quenching gas is increased. Thus, there is a need for an improved circuit breaker that is at least partially able to clear the zones of hot gas.

20 Summary of the invention

In view of the above, a circuit breaker according to claim 1, and a method of performing a current breaking operation according to claim 14 are provided. Embodiments are disclosed in the dependent claims, claim combinations and in the description together with the drawings.

According to an aspect, a circuit breaker is provided. The circuit breaker includes first and
25 second contacts being configured to be moveable with respect to each other along an axis of the circuit breaker between an open and a closed configuration of the circuit breaker, the first and second contacts defining an arcing region in which an arc is formed during a current breaking operation; a nozzle configured for directing a flow of a quenching gas onto the arcing region during the current breaking operation, a diffusor arranged downstream of the
30 nozzle for further transporting the quenching gas within the arcing region and/or downstream

of the arcing region, and a mechanical swirling device being arranged downstream of the nozzle and at least partially in the diffuser for imparting a swirl onto the quenching gas flowing along the diffuser, the mechanical swirling device having an axial overlap with the second contact in the open configuration of the circuit breaker.

5 According to a further aspect a method of performing a current breaking operation is provided. The method can be performed by a circuit breaker according to the above aspect. The method includes: separating the first and second contacts from each other by relative movement away from each other along the axis of the switch, so that an arc is formed in the arcing region between the first and second contacts; and blowing a swirl flow of a quenching
10 gas onto the arcing region.

An advantage is that zones of hot quenching gas or hot zones may be decreased due to imparting a swirl flow onto the quenching gas.

Further advantages, features, aspects and details that can be combined with embodiments described herein are evident from the dependent claims, the description and the drawings.

15

Brief description of the Figures:

The details will be described in the following with reference to the figures, wherein

Fig. 1 shows a cross-sectional view of a circuit breaker according to embodiments described herein;

20 Figs. 2A-2B show cross-sectional views of details of a circuit breaker according to embodiments described herein;

Figs. 3A-3B show a perspective view of details of a mechanical swirling device of a circuit breaker according to embodiments described herein and a circuit breaker including the mechanical swirling device according to embodiments described
25 herein;

Figs. 4A-4B show a perspective view of details of a mechanical swirling device of a circuit breaker according to embodiments described herein and a circuit breaker including the mechanical swirling device according to embodiments described herein;

Figs. 5A-5B show cross-sectional views of a circuit breaker according to embodiments described herein;

Fig. 6 shows three heat maps illustrating the temperature distribution of a quenching gas in a circuit breaker according to embodiments described herein for differently positioned mechanical swirling devices; and

Fig. 7 shows a method of performing a current breaking operation by the circuit breaker according to embodiments described herein.

Detailed description of the Figures and of embodiments:

Reference will now be made in detail to the various embodiments, one or more examples of which are illustrated in each figure. Each example is provided by way of explanation and is not meant as a limitation. For example, features illustrated or described as part of one embodiment can be used on or in conjunction with any other embodiment to yield yet a further embodiment. It is intended that the present disclosure includes such modifications and variations.

Within the following description of the drawings, the same reference numbers refer to the same or to similar components. Generally, only the differences with respect to the individual embodiments are described. Unless specified otherwise, the description of a part or aspect in one embodiment applies to a corresponding part or aspect in another embodiment as well.

Fig. 1 shows a cross sectional view of a circuit breaker 1 according to embodiments described herein. The circuit breaker 1 can be configured for a rated operating voltage of at least 73 kV.

The circuit breaker 1 can include a first contact 10 and/or a second contact 20. The first contact 10 and/or second contact 20 can be configured to be moveable with respect to each other, specifically along an axis 2 of the circuit breaker. In particular, the first contact 10 and/or second contact 20 can be configured to be moveable with respect to each other between an open configuration and a closed configuration of the circuit breaker 1.

The circuit breaker 1 can have a gas-tight housing. The gas-tight housing can have an inner volume. The inner volume can be filled with an electrically insulating gas, e.g. at an ambient

pressure. The first contact 10 and/or the second contact can be arranged in the housing and/or the inner volume.

In the open configuration, the first contact 10 and/or second contact 20 can be separated from each other. In particular, in the open configuration, the first contact 10 and/or second contact 20 can be separated from each other such that no current flows between the first contact 10
5 second contact 20.

In the closed configuration, the first contact 10 and/or second contact 20 can contact each other. In particular, in the open configuration, the first contact 10 and/or second contact 20 can contact each other such that a current flows between the first contact 10 second contact
10 20. That is, a galvanic connection may be formed between the first contact 10 and/or second contact 20 in the closed configuration. According to embodiments described herein, the first contact 10 can be a tulip-type contact and/or the second contact 20 can be a pin-type contact. In such a case, the second contact 20 can be inserted into the first contact 10.

The movement from the closed configuration to the open configuration can be defined as a
15 current breaking operation. During the current breaking operation, an arc can be formed between the first contact 10 and/or the second contact 20. In particular, the first contact 10 and/or the second contact 20 can define the arcing region 3 in which the arc is formed during the current breaking operation.

The circuit breaker 1 can include a nozzle 30. The nozzle 30 can be configured for directing a
20 flow of a quenching gas onto the arcing region 3 during the current breaking operation. The quenching gas can be a portion of the insulation gas contained in the inner volume of the circuit breaker. Further, the quenching gas can be pressurized to be directed onto the arcing region 3.

For instance, insulating gas can be pressurized upstream of the nozzle 30, e.g. by an arc-
25 extinguishing system, and directed through the nozzle 30 and downstream of the nozzle 30. A diffuser 40 can be arranged downstream of the nozzle 30. The diffuser 40 can be configured for further transporting the quenching gas within the arcing region 3 and/or downstream of the arcing region 3.

The quenching gas transported into, within and/or downstream of the arcing region 3 can have
30 a quenching gas flow. Ideally, the quenching gas flow can be considered as laminar. However, the quenching gas flow can be deteriorated, e.g. by the first contact 10 and/or the

second contact 20. A deterioration from the laminar flow may lead to a turbulent flow. Accordingly, the quenching gas transported into, within and/or downstream of the arcing region 3 may at least partially include a turbulent flow. Such a turbulent flow may, e.g., occur in front to the second contact 20.

5 According to embodiments described herein, a mechanical swirling device 50 can be arranged downstream of the nozzle 30. In particular, the mechanical swirling device 50 can be arranged downstream of the nozzle 30 at a distance from the nozzle 30. The mechanical swirling device 50 can be arranged at least partially in the diffuser 40. In particular, the mechanical swirling device 50 can be arranged at least partially in the diffuser 40 for imparting a swirl onto the
10 quenching gas flowing along the diffuser 40. The mechanical swirling device 50 can have an axial overlap with the second contact 20. In particular, the mechanical swirling device 50 can have an axial overlap with the second contact 20 in the open configuration of the circuit breaker 1. Additionally or alternatively, the mechanical swirling device 50 can have an axial overlap with the second contact 20 in the closed configuration of the circuit breaker 1.

15 According to embodiments described herein, the swirling device 50 can be configured to create the swirl and the swirling flow can create a centrifugal force on the flow of the quenching gas. In particular, the swirling device 50 can be configured to create a centrifugal force on the quenching gas transported into, within and/or downstream of the arcing region 3. The centrifugal force may lead to a centrifugal flow component of the quenching gas. In the
20 context of the present application, a “centrifugal flow component” of the quenching gas may be understood as being radially with respect to the axis 2 of the circuit breaker 1. Accordingly, the quenching gas may be imparted with a flow component that leads the quenching gas away from the second contact 20, in particular a front region of the second contact 20. By practicing embodiments, the generation of hot zones can be reduced.

25 Figs. 2A and 2B show cross-sectional views of details of a circuit breaker 1 according to embodiments described herein. In particular, Figs. 2A and 2B show a mechanical swirling element 50 being inserted in the diffuser 40. Fig. 2A shows a cross-sectional view along the axis 2. Fig. 2B shows two cross cross-sectional views, the one on the left hand side normal to the axis 2 and the one on the right hand side along the axis 2. As shown in Fig. 2A, the
30 mechanical swirling element 50 can be inserted in the diffuser 40. For instance, the swirling element 50 can be fixed in and/or to the diffuser 40, e.g. by screwing, gluing, clamping, etc.

Further, Fig. 2B shows that the mechanical swirling device 50 can include mechanical swirling elements 52. In particular, the mechanical swirling device 50 can include any number of mechanical swirling elements 52, such as one, two, more than two and/or a plurality of mechanical swirling elements 52. The mechanical swirling elements 52 can be configured to mechanically deflect the flow of the quenching gas. According to embodiments described herein, the mechanical swirling elements 52 can be fixed to the diffuser 40.

The mechanical swirling elements 52 can have a shape. The shape can vary along the axis 2 and/or orthogonal to the axis 2. Further, the shape can be bent or straight. Furthermore, the mechanical swirling elements 52 can have a constant thickness, a radially varying thickness, and/or an axially varying thickness. Moreover, the mechanical swirling elements 52 can be arranged parallel to each other and/or non-parallel with respect to each other.

According to embodiments described herein, the mechanical swirling elements 52 can include and/or be blades. In the context of the present disclosure, a “blade” can be understood as an element having an elongated shape, which may have a taper and/or a bend along its extension. According to embodiments described herein, the mechanical swirling elements 52 can include a first portion 52a being inclined with respect to the axis 2 and/or a second portion 52b being substantially parallel to the axis 2. The first portion 52a can be connected to the diffuser 40. The first and second portions 52a, 52b can be continuously joined to each other. By practicing embodiment, a centrifugal force on the flow of the quenching gas can be created.

Figs. 3A and 3B show a perspective view of details of a mechanical swirling device 50 of a circuit breaker 1 according to embodiments described herein and a circuit breaker 1 including the mechanical swirling device 50 according to embodiments described herein.

The mechanical swirling elements 52 shown in Fig. 3A can be considered as being shaped like blades. Accordingly, they can include a first portion 52a being connected to the diffuser 40 and/or inclined with respect to the axis 2 and/or a second portion 52b being substantially parallel to the axis 2. The first and second portions 52a, 52b can be continuously joined to each other.

Further, the first portion 52a can have a mean thickness that is greater than a mean thickness of the second portion 52b. Specifically, the mechanical swirling element 52 can have a taper, which may decrease the thickness of the mechanical swirling element 52 from the first portion 52a to the second portion 52b.

According to embodiments described herein, the mechanical swirling device 50, specifically the mechanical swirling elements 52, can be made from and/or include an insulating material. Additionally or alternatively, to embodiments described herein, the mechanical swirling device 50, specifically the mechanical swirling elements 52, can be made from and/or include the same material as the nozzle 30 and/or the diffuser 40.

In the case the mechanical swirling device 50, specifically the mechanical swirling elements 52, include and/or are made from the same material as the nozzle 30 and/or the diffuser 40, the mechanical swirling device 50, specifically the case the mechanical swirling elements 52, can be integrally manufactured with the diffuser 40, i.e. in one piece, e.g. by 3D printing. Fig. 3B shows the mechanical swirling device 50, specifically the case the mechanical swirling elements 52, being integrally formed with the diffuser 40. By practicing embodiments, a stable and reliable circuit breaker with less manufacturing steps can be provided.

Figs. 4A-4B show a perspective view of details of a mechanical swirling device 50 of a circuit breaker 1 according to embodiments described herein and a circuit breaker 1 including the mechanical swirling device 50 according to embodiments described herein.

According to embodiments described herein, the mechanical swirling device 50, specifically the mechanical swirling elements 52, can include attachment elements 54. The attachment elements 54 can fixedly attach the mechanical swirling device 50, specifically the mechanical swirling elements 52, to the diffuser 40. For instance, the attachment elements 54 can be fixation cylinders. The attachment elements 54 can be provided at a side surface of the mechanical swirling elements 52. Specifically, the attachment elements 54 can be provided at the side surface of the mechanical swirling elements 52, by which the attachment elements 54 can be fixedly attached to the diffuser 40. For instance, the swirling device 50, specifically the mechanical swirling elements 52, can be glued with the attachment elements 54 in the diffuser 40 (see Fig. 4B). According to embodiments described herein, the mechanical swirling elements 52 are fixed to the diffuser 40. By practicing embodiments, a system for upgrading existing circuit breakers may be provided.

Figs. 5A-5B show cross-sectional views of a circuit breaker 1 according to embodiments described herein. Specifically, Fig. 5A shows a cross-sectional view of a circuit breaker 1 along the axis 2, and Fig. 5B shows a cross-sectional view of the circuit breaker 1 orthogonal to the axis 2.

According to embodiments described herein, the circuit breaker 1 can include a support 56. The support 56 can be configured to mount the mechanical swirling device 50, specifically the mechanical swirling elements 52, to the diffuser 40. For instance, the support 56 can be provided at a downstream side of the diffuser 40, specifically at a downstream exit of the
5 diffuser 40.

The support 56 can be made from and/or include an insulating material, such as Teflon or a non-insulating material, such as metal, for instance steel. Specifically in case the support 56 is made from an insulating material, the mechanical swirling device 50, specifically the mechanical swirling elements 52, can be made from and/or include a non-insulating material,
10 such as metal.

According to embodiments described herein, the mechanical swirling device 50, specifically the mechanical swirling elements 52, can be fixedly attached to the support 56. Alternatively, the mechanical swirling device 50, specifically the mechanical swirling elements 52, can be rotatably provided to the support 56. In this case the mechanical swirling device 50,
15 specifically the mechanical swirling elements 52, may rotate around the axis 2. Additionally or alternatively, the support 56 can be configured to provide a rotation function. For instance, the support 56 can include a bearing or the like. Accordingly, a first part of the support 56 may be fixedly connected to the diffuser 40 and/or a second part of the support 56 may be fixedly connected to the mechanical swirling device 50, specifically the mechanical swirling
20 elements 52. The first part of the support 56 can be provided rotatably with respect to the second part of the support 56.

According to embodiments described herein, the mechanical swirling elements 52 can be arranged symmetrically around the axis 2. Specifically, the mechanical swirling elements 52 can be arranged rotationally symmetrically around the axis 2, i.e. with an n-fold rotational
25 symmetry with n being an integer, e.g. n=8. Further, the mechanical swirling elements 52 can be arranged with a constant or non-constant (i.e. variable) pitch.

According to embodiments described herein, the diffuser 40 and/or the mechanical swirling device 50 can be fixedly attached to the first contact 10. Accordingly, due to the relative movement between the first contact 10 and the second contact 20 in the transition from the
30 open configuration to the closed configuration, and vice versa, the axially overlap of the mechanical swirling device 50 and the second contact 20 may vary during this movement.

Fig. 6 shows three heat maps illustrating the temperature distribution of a quenching gas in a circuit breaker 1 according to embodiments described herein for differently positioned mechanical swirling devices. Specifically, Fig. 6 shows three heat maps for a side of the circuit breaker above the axis 2 illustrating the temperature distribution of the quenching gas in this regions at a time of 17.6 ms after disconnection. The second contact 20 and the arching region 3 is shown in Fig. 6.

The top view in Fig. 6 shows a reference heat map without the mechanical swirling device 50. The middle view in Fig. 6 shows heat map with a mechanical swirling device 50 arranged at least partially upstream of the second contact 20, i.e. an upstream end of the mechanical swirling device 50 is arranged upstream of an upstream end of the second contact 20. The bottom view in Fig. 6 shows a heat map with a mechanical swirling device 50 arranged at least partially downstream of the second contact 20, i.e. an upstream end of the mechanical swirling device 50 is arranged downstream of an upstream end of the second contact 20.

As can be seen from the top view in Fig. 6, a zone of hot quenching gas occurs in the arching region 3, particularly in front of the second contact 20, i.e. in front of an upstream end of the second contact 20. This hot zone may create a turbulent flow of quenching gas in front of the second contact 20 and/or may lead to a deterioration of the circuit breaker 1, resulting in a reduced life time and/or prolong the duration for extinguishing the arc.

As can be seen from the middle and bottom views in Fig. 6, the hot zone, i.e. its temperature and size, can be reduced by the mechanical swirling device 50. In particular, it can be seen that for both position, upstream and downstream, the hot zone can be reduced. Without being wanted to be bound by theory, it is assumed that due to the transportation of the quenching gas within the arcing region and/or downstream of the arcing region 3, the mechanical swirling device 50 does not only swirl the quenching gas downstream of the mechanical swirling device 50, but also upstream of the mechanical swirling device 50, e.g. by a suction effect and/or by a backward swirling of the quenching gas.

Fig. 7 shows a method 200 of performing a current breaking operation by the circuit breaker 1 according to embodiments described herein. In a first block 210, the first and second contacts 10, 20 can be separated from each other by a relative movement away from each other along the axis 2 of the circuit breaker 1, so that an arc is formed in the arching region 3 between the first and second contacts 10, 20. In block 220, a swirl flow of a quenching gas is blown onto the arching region 3. In the context of the present application “blowing a swirl flow

of a quenching gas onto the arcing region” can also include the case in which the mechanical swirling device 50 is arranged downstream of the second contact 20 and/or the arcing region 3. As described herein, also the downstream position of the mechanical swirling device 50 provides the effect of swirling the quenching gas and/or reducing the hot zones. Accordingly, the phrase “blowing a swirl flow of a quenching gas onto the arcing region” also encompasses this configuration.

Next, general aspects of embodiments are described. Therein, the reference numbers of the Figures are used merely for illustration. The aspects are, however, not limited to any particular embodiment. Instead, any aspect described herein can be combined with any other aspect(s) or embodiments described herein unless specified otherwise.

These advantages are not limited to the embodiments shown in Figs. 1 to 7, but the circuit breaker 1 can be modified in a plurality of ways. In the following, some general preferred aspects are described. These aspects allow for a particularly beneficial creating of a swirl flow, arc extinction and/or reduction of hot zones due to a synergy with the presence of the mechanical swirling device 50. The description uses the reference signs of Figs. 1 to 7 for illustration, but the aspects are not limited to these embodiments. Each of these aspects can be used only by itself or combined with any other aspect(s) and/or embodiment(s) described herein.

First, aspects regarding the contacts 10 and 20 are described.

According to an aspect, the first contact 10 can have a tube-like geometry. The second contact 20 can have a pin-like geometry and can, in the closed configuration, be inserted into the first contact 10.

According to a further aspect, the circuit breaker 1 can be of single-motion type. According to an aspect, the first contact 10 can be a movable contact and may be moved along the axis 2 away from the second (stationary) contact 20 for opening the switch. The first contact 10 can be driven by a drive.

According to a further aspect, the first and second contacts 10, 20 may have arcing portions for carrying an arc during a current breaking operation. The arcing portions can define the quenching region 3 in which the arc develops. According to an aspect, the first contact 10 can have an insulating nozzle tip on a distal side of its arcing portion. Additionally or

alternatively, the arcing portion of the second contact can be arranged at a distal tip portion of the second contact 20.

According to a further aspect, the first and second arcing contact portions can have a maximum contact separation of up to 150 mm, preferably up to 110 mm, and/or of at least 10 mm, and preferably of 25 to 75 mm.

Next, aspects regarding the mechanical swirling device 50 are described.

According to an aspect, the mechanical swirling device 50, specifically the mechanical swirling elements 52, can be (arranged) mirror-symmetric(ally) or non-mirror symmetric(ally) and/or can have a chirality (left- or right-handedness). The chirality can be defined by the handedness of a torque imparted onto the gas flow by the interaction with the swirling device 50.

According to a further aspect, the mechanical swirling device 50 can have non-mirror-symmetric mechanical swirling elements 52, in the sense that the mechanical swirling elements 52 define a preferred rotational orientation (left- or right-handed), and thus the swirl flow, of the quenching gas passing along the mechanical swirling elements 52. According to an aspect, the mechanical swirling elements 52, or at least a portion of the mechanical swirling elements 52, can be inclined by a predetermined angle in a (predominantly) circumferential direction (the predetermined angle can be more than 0° but less than 90°), so that the quenching gas flowing along the mechanical swirling elements 52 is imparted with the swirling torque. The circumferential inclination direction, and preferably the circumferential inclination angle, of each of the guide elements can be the same.

According to a further aspect, the mechanical swirling elements 52 can be partially axially extending, so that the quenching gas flows along the mechanical swirling elements 52 with an axial component. Alternatively or in addition, the mechanical swirling elements 52 may be partially radially extending, so that the quenching gas flows along the mechanical swirling elements 52 with a radial component. Alternatively or in addition, the mechanical swirling elements 52 may be partially azimuthally extending, so that the quenching gas flows along the mechanical swirling elements 52 with an azimuthal component.

According to a further aspect, the swirling device 50, specifically the mechanical swirling elements 52, can be concentrically arranged with a center axis 2 of the circuit breaker 1. According to a further aspect, the swirling device 50, specifically the mechanical swirling

elements 52, can be arranged at an off-axis position with respect to the axis 2 of the circuit breaker 1.

According to a further aspect, the mechanical swirling device 50 can be fixed to the first contact 10 (specifically with no movable components with respect to the first contact 10).

5 Next, aspects regarding the nozzle 30 are described, which allow for a particularly beneficial creation of a swirl flow, arc extinction and/or reduction of hot zones with the mechanical swirling device 50.

According to an aspect, the nozzle 30 can be fixedly joined to the first (movable) contact 10 and/or co-moveable with the first contact 10 and/or driven by the drive unit which drives the
10 first contact 10.

According to a further aspect, the nozzle 30 can be tapered (at least in a section thereof) such that a final diameter at the exit (downstream side) of the nozzle 30 can be smaller than a diameter at an upstream portion (e.g. entrance portion) of the nozzle 30. According to a further aspect, the nozzle 30 can have a first channel section of larger diameter and a second
15 channel section of smaller diameter downstream of the first channel section. Thereby, an accelerated flow of quenching gas at the exit of the nozzle 30 may be generated in practice. In this context, the diameter can be defined as the (largest) inner diameter of the respective section. Furthermore, “upstream” and “downstream” may herein refer to the flow direction of the quenching gas during a current breaking operation.

20 According to a further aspect, the diameter of the nozzle 30 can be continuously (i.e. in a non-stepwise manner) reduced from the first channel section to the second channel section. The first channel section and the second channel section can be adjacent to each other. The first channel section can be located at an entrance of the nozzle 30, and/or the second channel section can be located at an outlet of the nozzle 30.

25 According to a further aspect, the second channel section can extend in the direction of the axis 2. According to a further aspect, the second channel section can have a substantially constant diameter over an axial length. The axial length can be at least 10 mm, specifically at least 20 mm. According to a further aspect, the second channel section can have a diameter of at least 5 mm and/or at most 15 mm.

According to a further aspect, the nozzle 30 can extend parallel to the axis 2 of the circuit breaker 1 and/or along (overlapping) the axis 2 and/or concentrically with the axis 2. According to a further aspect, the nozzle 30 can extend axially through the first contact 10, and/or the nozzle outlet can be formed by a hollow tip section of the first contact 10.

5 Next, aspects regarding the insulation gas are described.

By applying the swirl flow described herein to a circuit breaker 1, its thermal interruption performance can be significantly improved. This permits, for example, the use with an insulation gas being different from SF₆. SF₆ has excellent dielectric and arc quenching properties, and has therefore been conventionally used in circuit breakers. However, due to its
10 high global warming potential, there have been large efforts to reduce the emission and eventually stop the usage of such greenhouse gases, and thus to find alternative gases by which SF₆ may be replaced.

Such alternative gases have already been proposed for other types of switches. For example, WO 2014154292 A1 discloses an SF₆-free switch with an alternative insulation gas.
15 Replacing SF₆ by such alternative gases is technologically challenging, as SF₆ has extremely good switching and insulation properties, due to its intrinsic capability to cool the arc.

According to an aspect, the present configuration allows the use of an alternative gas (e.g. as described in WO 2014154292 A1) having a global warming potential lower than the one of SF₆ in a circuit breaker, even if the alternative gas does not fully match the interruption
20 performance of SF₆.

The insulation gas can have a global warming potential lower than the one of SF₆ over an interval of 100 years. The insulation gas may for example include at least one background gas component selected from the group consisting of CO₂, O₂, N₂, H₂, air, N₂O, in a mixture with a hydrocarbon or an organofluorine compound. For example, the dielectric insulating medium
25 may include dry air or technical air. The dielectric insulating medium may in particular include an organofluorine compound selected from the group consisting of: a fluoroether, an oxirane, a fluoramine, a fluoroketone, a fluoroolefin, a fluoronitrile, and mixtures and/or decomposition products thereof. In particular, the insulation gas may include as a hydrocarbon at least CH₄, a perfluorinated and/or partially hydrogenated organofluorine compound, and
30 mixtures thereof. The organofluorine compound can be selected from the group consisting of: a fluorocarbon, a fluoroether, a fluoroamine, a fluoronitrile, and a fluoroketone; and

preferably is a fluoroketone and/or a fluoroether, more preferably a perfluoroketone and/or a hydrofluoroether, more preferably a perfluoroketone having from 4 to 12 carbon atoms and even more preferably a perfluoroketone having 4, 5 or 6 carbon atoms. The insulation gas can preferably include the fluoroketone mixed with air or an air component such as N₂, O₂, and/or CO₂.

In specific cases, the fluoronitrile mentioned above can be a perfluoronitrile, in particular a perfluoronitrile containing two carbon atoms, and/or three carbon atoms, and/or four carbon atoms. More particularly, the fluoronitrile can be a perfluoroalkylnitrile, specifically perfluoroacetonitrile, perfluoropropionitrile (C₂F₅CN) and/or perfluorobutyronitrile (C₃F₇CN). Most particularly, the fluoronitrile can be perfluoroisobutyronitrile (according to formula (CF₃)₂CFCN) and/or perfluoro-2-methoxypropanenitrile (according to formula CF₃CF(OCF₃)CN). Of these, perfluoroisobutyronitrile is particularly preferred due to its low toxicity.

The circuit breaker 1 can also include other parts such as nominal contacts, a drive, a controller, and the like, which have been omitted in the Figures and are not described herein. These parts are provided in analogy to a conventional circuit breaker 1.

According to an aspect, the circuit breaker 1 may further include a network interface for connecting the device to a data network, in particular a global data network. The data network may be a TCP/IP network such as Internet. The circuit breaker 1 can be operatively connected to the network interface for carrying out commands received from the data network. The commands may include a control command for controlling the circuit breaker 1 to carry out a task such as a current breaking operation. In this case, the circuit breaker 1 can be adapted for carrying out the task in response to the control command. The commands may include a status request. In response to the status request, or without prior status request, the circuit breaker 1 may be adapted for sending a status information to the network interface, and the network interface can then be adapted for sending the status information over the network. The commands may include an update command including update data. In this case, the circuit breaker 1 can be adapted for initiating an update in response to the update command and using the update data.

The data network may be an Ethernet network using TCP/IP such as LAN, WAN or Internet. The data network may include distributed storage units such as Cloud. Depending on the application, the Cloud can be in form of public, private, hybrid or community Cloud.

According to a further aspect, the circuit breaker 1 can further include a processing unit for converting the signal into a digital signal and/or processing the signal.

According to a further aspect, the circuit breaker 1 can further include a network interface for connecting the device to a network. The network interface can be configured to transceive
5 digital signal/data between the circuit breaker 1 and the data network. The digital signal/data can include operational command and/or information about the circuit breaker 1 or the network.

Claims

1. A circuit breaker (1), comprising:

first and second contacts (10, 20) being configured to be moveable with respect to each other along an axis (2) of the circuit breaker (1) between an open and a closed configuration of the circuit breaker, the first and second contacts (10, 20) defining an arcing region (3) in which an arc is formed during a current breaking operation;

a nozzle (30) configured for directing a flow of a quenching gas onto the arcing region (3) during the current breaking operation,

a diffuser (40) arranged downstream of the nozzle (30) for further transporting the quenching gas within the arcing region (3) and/or downstream of the arcing region (3), and

a mechanical swirling device (50) being arranged downstream of the nozzle (30) and at least partially in the diffuser (40) for imparting a swirl onto the quenching gas flowing along the diffuser (40), the mechanical swirling device (50) having an axial overlap with the second contact (20) in the open configuration of the circuit breaker (1).

2. The circuit breaker (1) according to claim 1, wherein the mechanical swirling device (50), in particular the mechanical swirling elements (52), include and/or are made from the same material as the nozzle (30) and/or the diffuser (40), in particular polytetrafluoroethylene (PTFE).

3. The circuit breaker (1) according to any one of the preceding claims, wherein the mechanical swirling device (50), in particular the mechanical swirling elements (52), is or are integrally manufactured with the diffuser (40), preferably by 3D printing.

4. The circuit breaker (1) according to any one of the preceding claims, it being configured for a rated operating voltage of at least 73 kV; and/or it being a high-voltage circuit breaker; and/or the first contact (10) being a tulip-type contact and the second contact (20) being a pin-type contact.

5. The circuit breaker (1) according to any one of the preceding claims, wherein the mechanical swirling device (50) is arranged downstream of the nozzle (30) at a distance from the nozzle (30).
- 5 6. The circuit breaker (1) according to any one of the preceding claims, wherein the swirling device (50) is configured to create a centrifugal force on a flow of the quenching gas.
7. The circuit breaker (1) according to any one of the preceding claims, wherein the mechanical swirling device (50) includes mechanical swirling elements (52), particularly
10 wherein the mechanical swirling elements (52) are configured to mechanically deflect a flow of the quenching gas, specifically deflect azimuthally to create a swirl of the quenching gas around the axial direction (2).
8. The circuit breaker (1) according to claim 7, wherein the mechanical swirling elements
15 (52) include blades.
9. The circuit breaker (1) according to claim 7 or 8, wherein the mechanical swirling elements (52) include a first portion (52a) being connected to the diffuser (40) and/or being inclined with respect to the axis (2) and a second portion (52b) being substantially
20 parallel to the axis (2), the first and second portions (52a, 52b) being continuously joined to each other.
10. The circuit breaker (1) according to any one of claims 7 to 9, wherein the diffuser (40) and the mechanical swirling device (50) are fixedly attached to the first contact (10).
- 25 11. The circuit breaker (1) according to any one of claims 7 to 10, wherein the mechanical swirling elements (52) are arranged symmetrically, in particular with an n-fold rotational symmetry, around the axis (2); and/or the mechanical swirling elements (52) are arranged with a constant or non-constant pitch.
- 30 12. The circuit breaker (1) according to any one of claims 7 to 11, wherein the mechanical swirling elements (52) are fixed to the diffuser (40).

13. The circuit breaker (1) according to any one of claims 7 to 12, further comprising a support (56), wherein the support (56) is configured to mount the mechanical swirling elements (52) to the diffuser (40).

5

14. The circuit breaker (1) according to any one of the preceding claims, further comprising a network interface for connecting the circuit breaker (1) to a data network, wherein the circuit breaker (1) is operatively connected to the network interface for at least one of carrying out a command received from the data network and sending device status information to the data network.

10

15. Method of performing a current breaking operation by the circuit breaker (1) according to any one of claims 1 to 14, the method comprising:

separating the first and second contacts (10, 20) from each other by a relative movement away from each other along the axis (2) of the circuit breaker (1), so that an arc is formed in the arcing region (3) between the first and second contacts (10, 20); and

15

blowing a swirl flow of a quenching gas onto the arcing region (3).

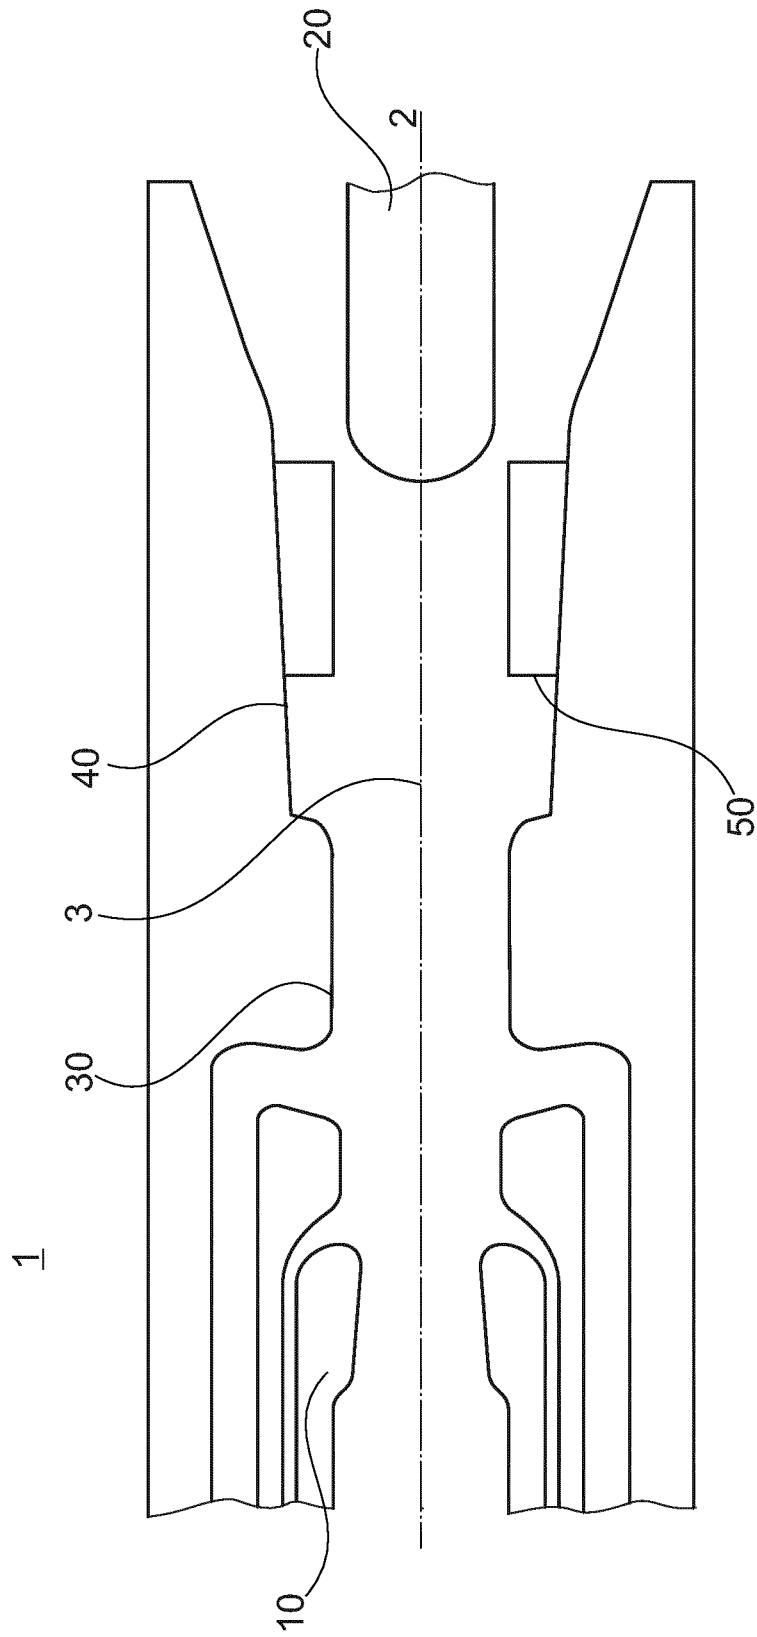


Fig. 1

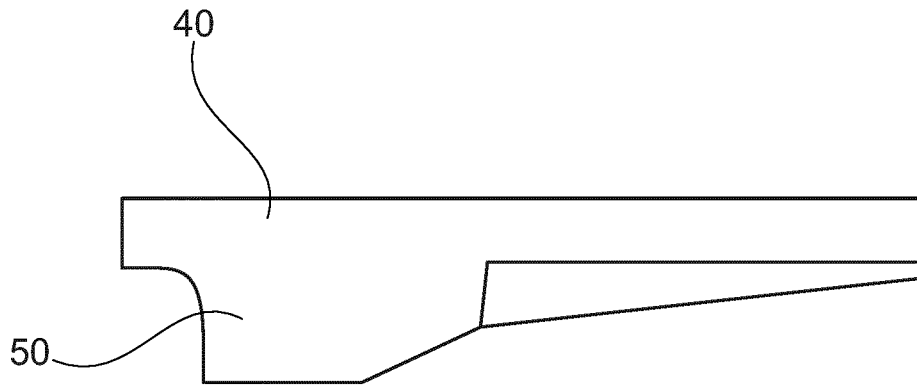


Fig. 2A

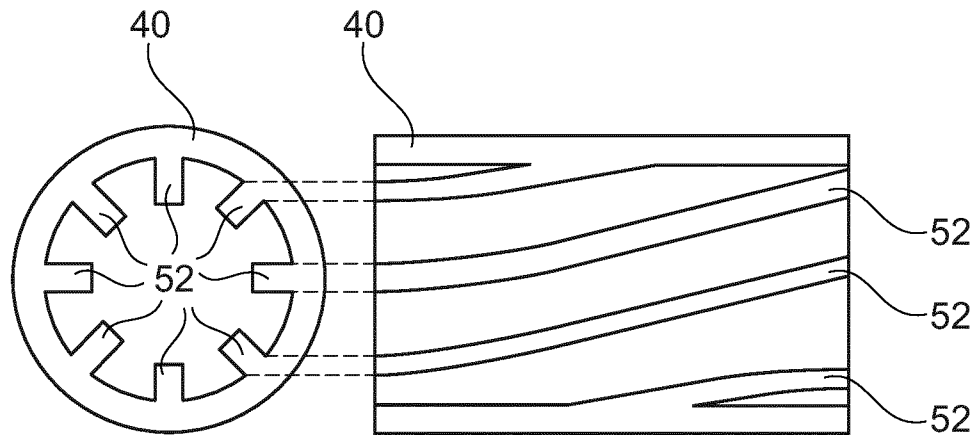


Fig. 2B

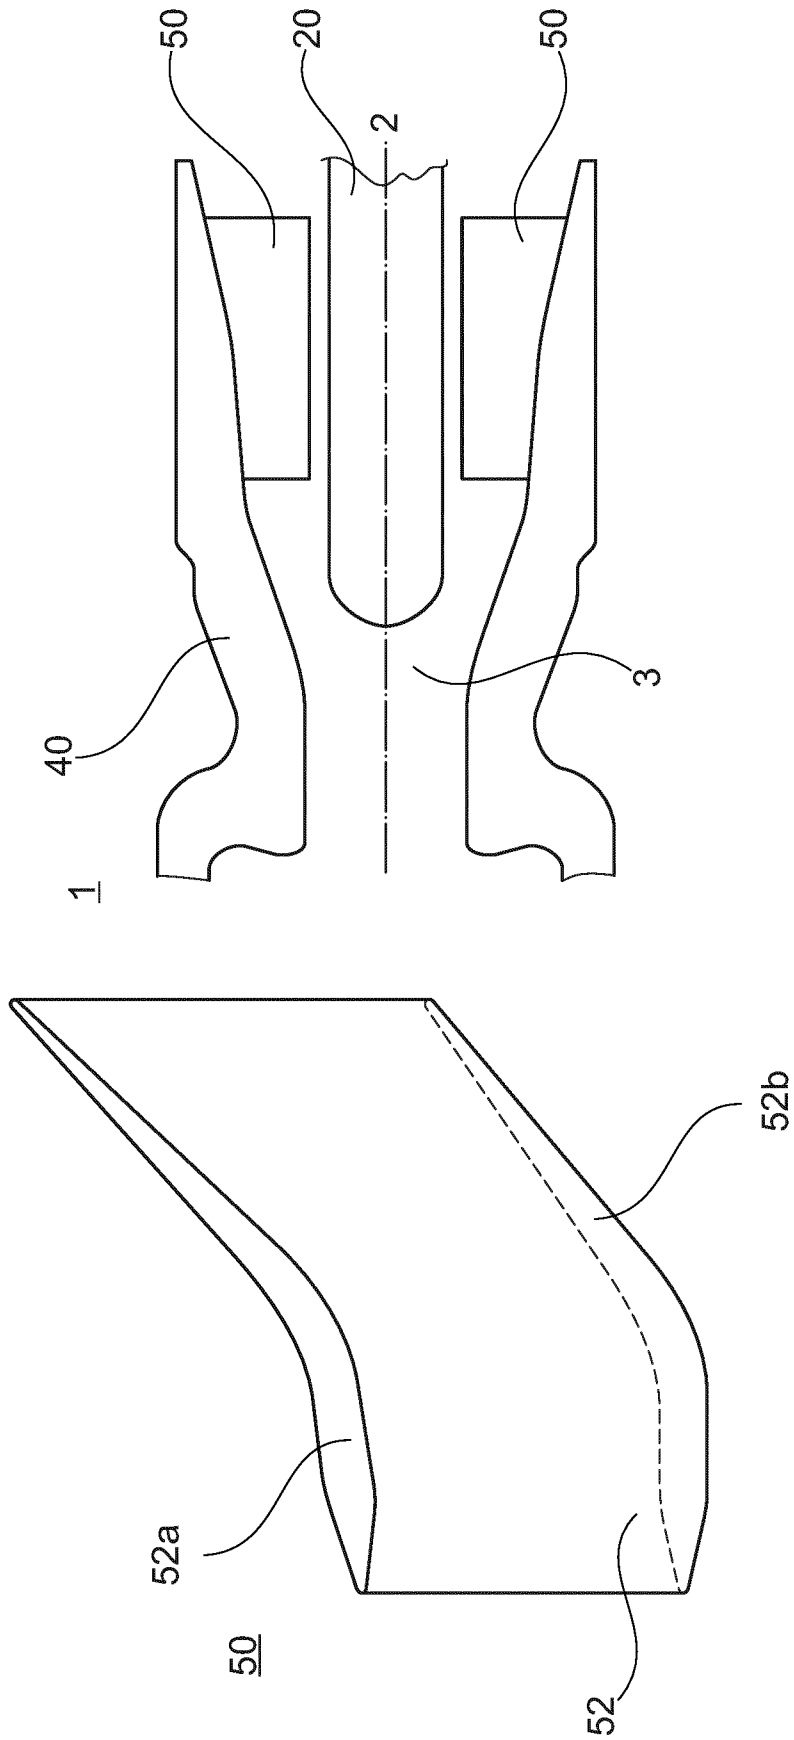


Fig. 3B

Fig. 3A

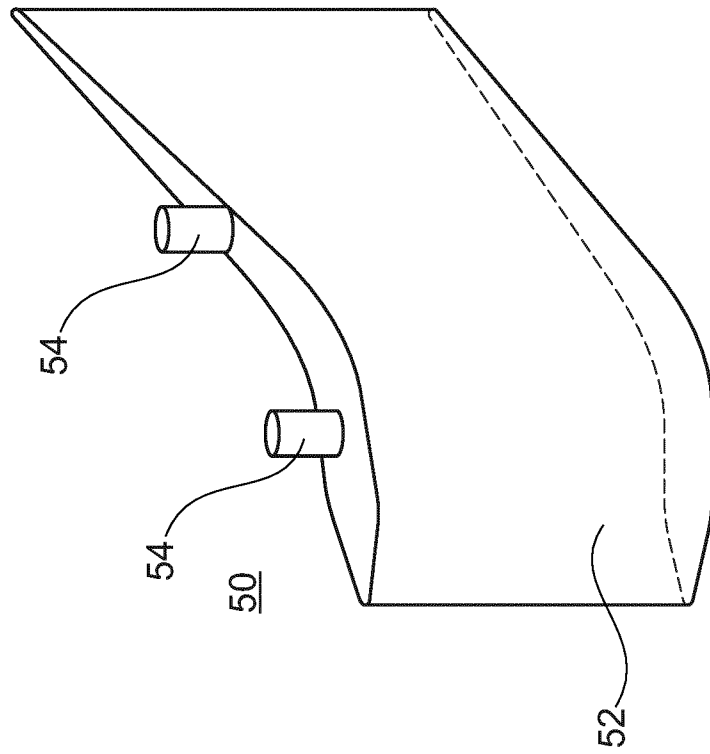


Fig. 4A

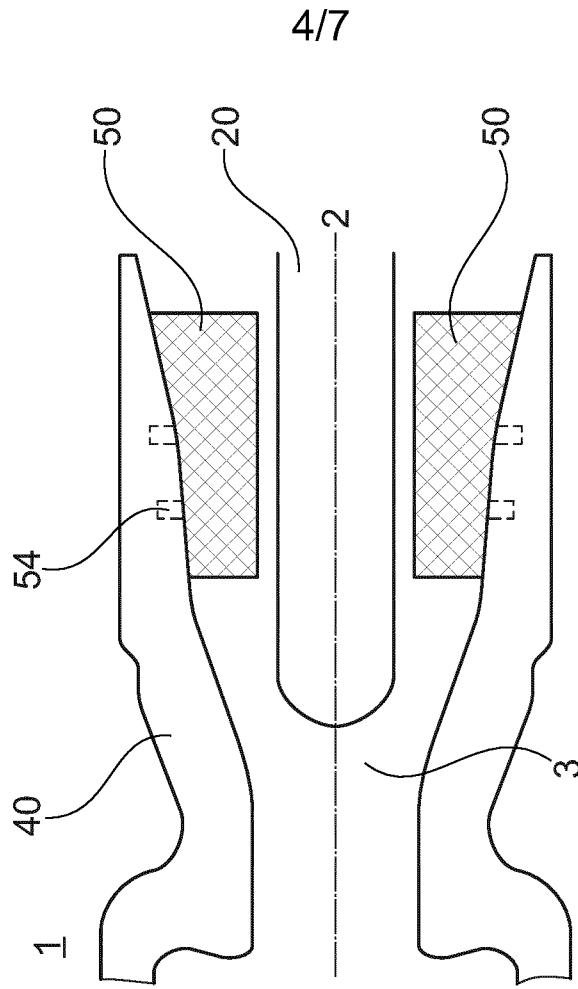


Fig. 4B

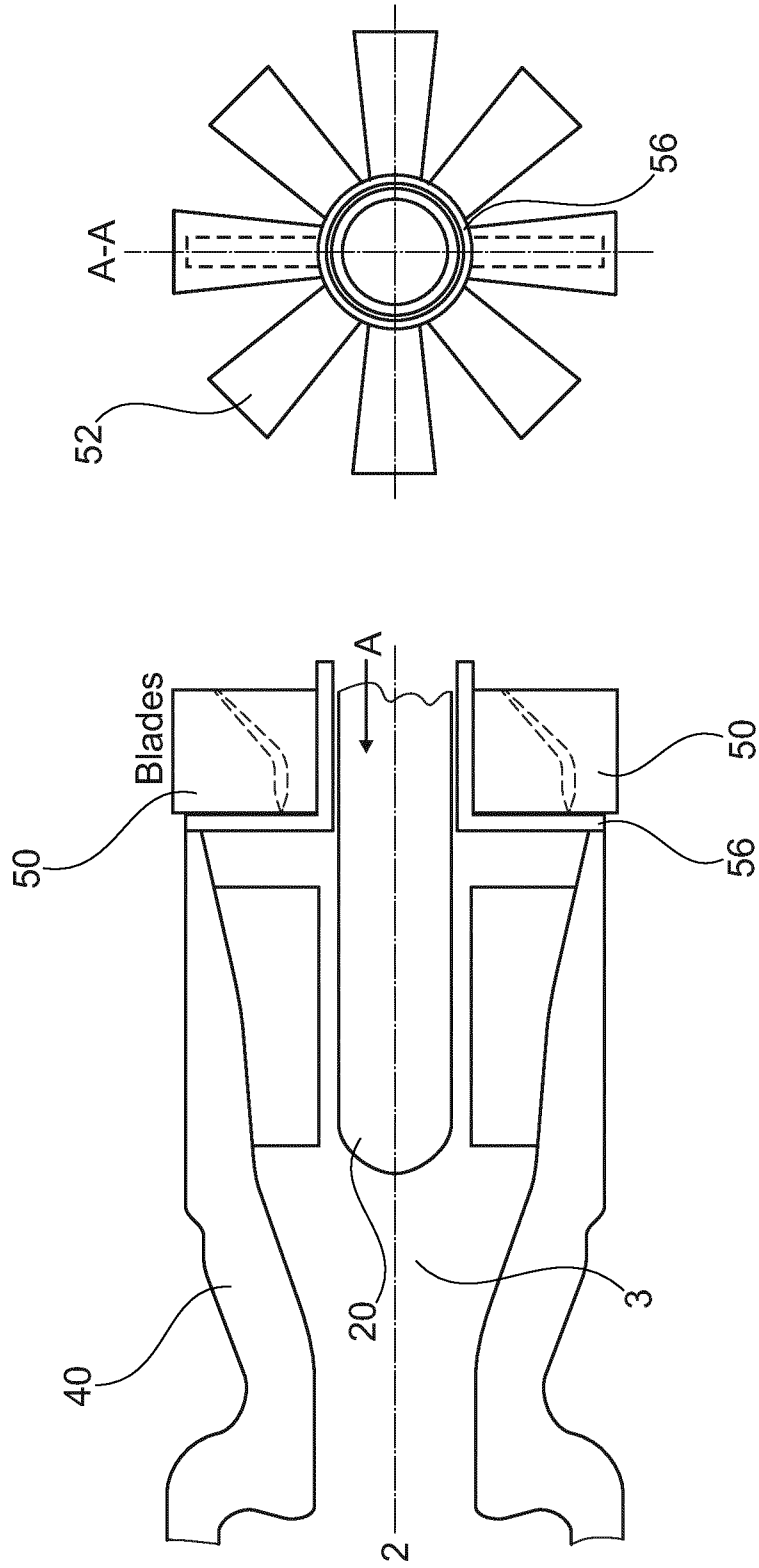


Fig. 5B

Fig. 5A

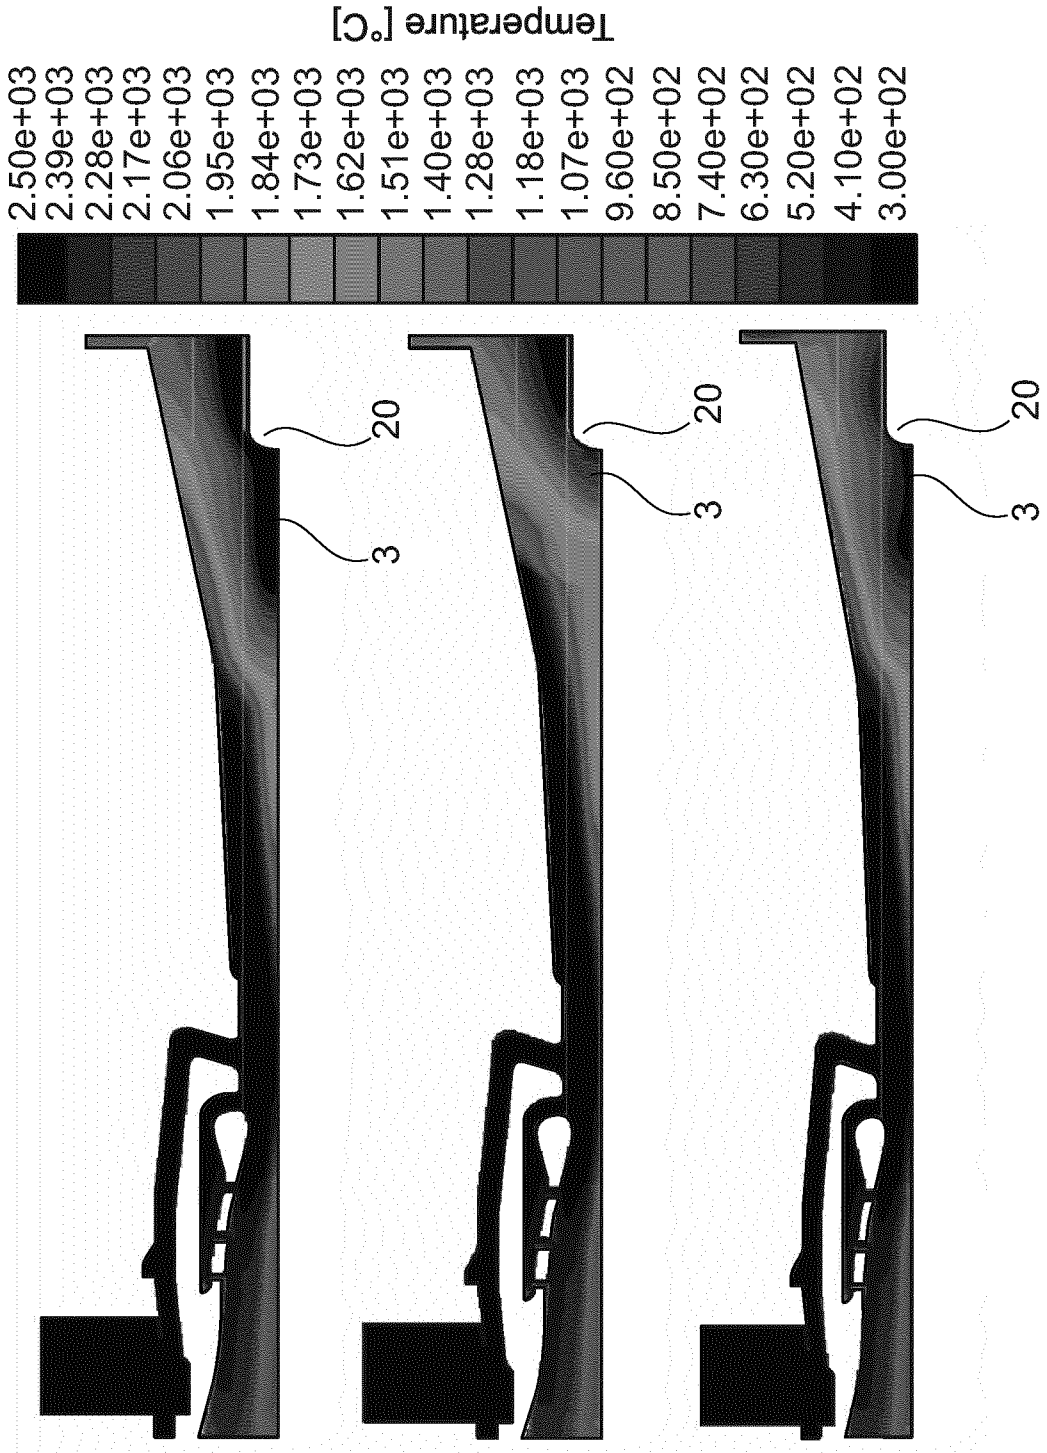


Fig. 6

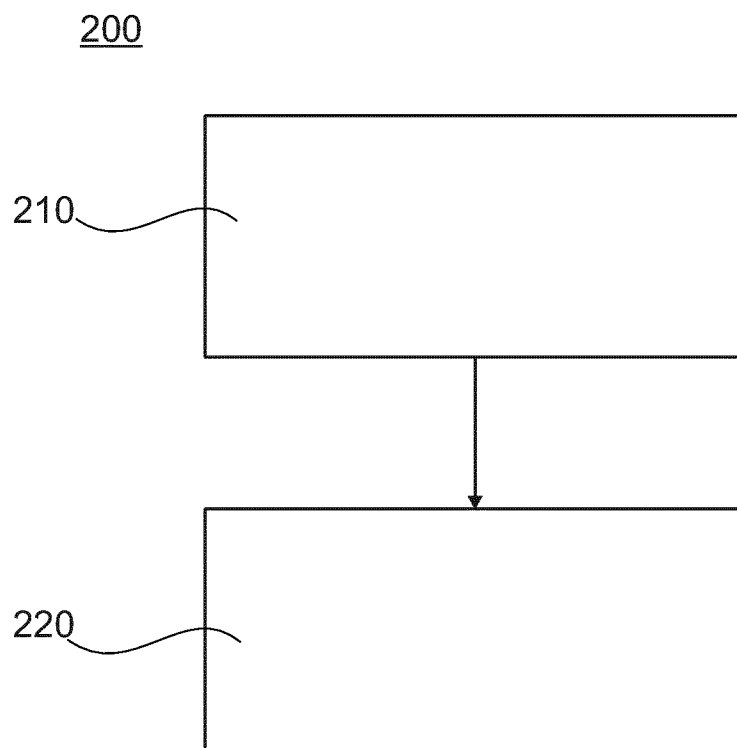


Fig. 7

INTERNATIONAL SEARCH REPORT

International application No
PCT/EP2018/085565

A. CLASSIFICATION OF SUBJECT MATTER
INV. H01H33/70
ADD.
According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED
Minimum documentation searched (classification system followed by classification symbols)
H01H

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)
EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	FR 2 954 995 A1 (AREVA T & D SAS [FR]) 8 July 2011 (2011-07-08) page 7, line 6 - page 10, line 14; figures 2-5	1,4-8, 10,11,15
X	----- DE 756 203 C (SIEMENS AG) 11 May 1953 (1953-05-11) page 1, line 1 - page 2, line 70; figures 1-3	1-5
X	----- DE 10 2015 101622 A1 (RWTH AACHEN [DE]) 4 August 2016 (2016-08-04) paragraphs [0050] - [0059]; figure 2	1
X	----- DE 35 43 762 A1 (SPRECHER & SCHUH AG [CH]) 13 November 1986 (1986-11-13) page 5 - page 8; figure 1 ----- -/--	1,2

Further documents are listed in the continuation of Box C.

See patent family annex.

* Special categories of cited documents :

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier application or patent but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search 10 January 2019	Date of mailing of the international search report 18/01/2019
Name and mailing address of the ISA/ European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Fax: (+31-70) 340-3016	Authorized officer Arenz, Rainer

INTERNATIONAL SEARCH REPORT

International application No
PCT/EP2018/085565

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	DE 10 2016 105539 A1 (ABB SCHWEIZ AG [CH]) 28 September 2017 (2017-09-28) paragraph [0046]; figure 8 -----	1,5-14
T	WO 2017/207763 A1 (ABB SCHWEIZ AG [CH]) 7 December 2017 (2017-12-07) the whole document -----	1-15

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No PCT/EP2018/085565

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
FR 2954995	A1	08-07-2011	NONE

DE 756203	C	11-05-1953	NONE

DE 102015101622	A1	04-08-2016	DE 102015101622 A1 04-08-2016
			WO 2016124175 A1 11-08-2016

DE 3543762	A1	13-11-1986	CH 667348 A5 30-09-1988
			DE 3543762 A1 13-11-1986

DE 102016105539	A1	28-09-2017	CN 107230578 A 03-10-2017
			DE 102016105539 A1 28-09-2017
			FR 3049387 A1 29-09-2017

WO 2017207763	A1	07-12-2017	NONE
