



(22) **Date de dépôt/Filing Date:** 2018/04/04

(41) **Mise à la disp. pub./Open to Public Insp.:** 2018/12/19

(45) **Date de délivrance/Issue Date:** 2023/10/31

(30) **Priorité/Priority:** 2017/06/19 (US15/626221)

(51) **Cl.Int./Int.Cl.** *B05D 5/10* (2006.01),
B32B 7/12 (2006.01), *C09J 7/20* (2018.01),
B64F 5/10 (2017.01)


(72) **Inventeurs/Inventors:**
MILLER, RICHARD ALLEN, II, US;
BELCHER, MARCUS ANTHONY, US;
WILLIAMS, STEPHEN HOWARD, US

(73) **Propriétaire/Owner:**
THE BOEING COMPANY, US

(74) **Agent:** MARKS & CLERK

(54) **Titre : SYSTEME D'ALIMENTATION COMMUNE DESTINE AU TRAITEMENT DE SURFACE ET A L'APPLICATION D'ADHESIF**

(54) **Title: COMMON FEED SYSTEM FOR SURFACE TREATMENT AND ADHESIVE APPLICATION**

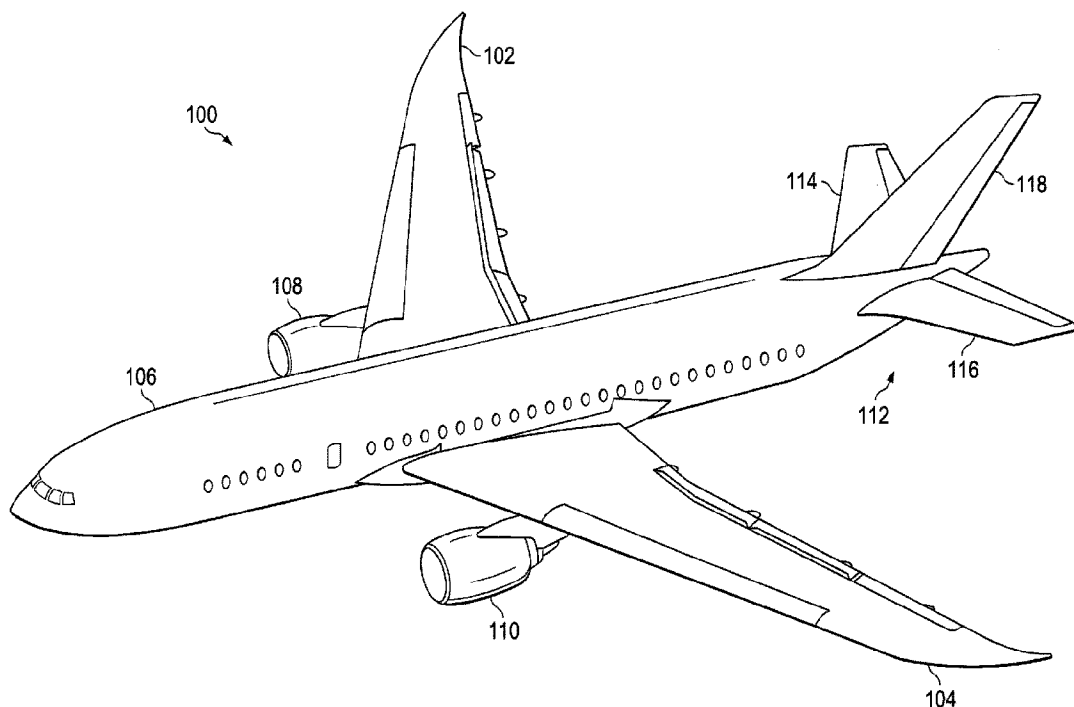

(57) **Abrégé/Abstract:**

A system for treating a surface and applying adhesive to an already treated portion of the surface concurrently is presented. The system comprises surface treatment equipment, adhesive application equipment, and a common feed system. The surface treatment equipment is configured to treat the surface of an elongated member. The adhesive application equipment is configured to apply adhesive to the already treated portion of the surface. The common feed system feeds the elongated member beneath the surface treatment equipment and the adhesive application equipment concurrently.

ABSTRACT

A system for treating a surface and applying adhesive to an already treated portion of the surface concurrently is presented. The system comprises surface treatment equipment, adhesive application equipment, and a common feed system. The surface treatment equipment is configured to treat the surface of an elongated member. The adhesive application equipment is configured to apply adhesive to the already treated portion of the surface. The common feed system feeds the elongated member beneath the surface treatment equipment and the adhesive application equipment concurrently.

**COMMON FEED SYSTEM FOR SURFACE TREATMENT AND ADHESIVE
APPLICATION**

BACKGROUND INFORMATION

5

1. Field:

The present disclosure relates generally to manufacturing processes, and more specifically, to adhesive application and surface treatment processes. Still more particularly, the present disclosure relates to providing a common feed system for adhesive application equipment and surface treatment equipment.

2. Background:

Composite structures may be bonded together using an adhesive layer. Prior to applying the adhesive, the surface of the composite structure may receive a surface treatment, such as treatment of the surface with an atmospheric pressure plasma.

To treat the surface with atmospheric pressure plasma, an atmospheric pressure plasma treatment device travels across the surface of the composite structure. After treating all of the surface with atmospheric pressure plasma, the adhesive layer is applied manually to the surface. The surface of the composite structure is vacuum bagged. Vacuum bagging mitigates air entrapment between the adhesive and the surface of the composite material. Vacuum bagging also results in a desirable amount of tack.

Plasma treatment of the surface and subsequent manual adhesive application may use at least an undesirable amount of time or an undesirable amount of manual labor. Therefore, it would be desirable to have a method and apparatus that takes into account at least some of the issues discussed above, as well as other possible issues.

SUMMARY

An illustrative embodiment of the present disclosure provides a system for treating a surface and applying adhesive to an already treated portion of the surface concurrently. The system comprises surface treatment equipment, adhesive application equipment, and a common feed system. The surface treatment equipment is configured to treat the surface of an elongated member. The adhesive application equipment is configured to apply adhesive to the surface. The common feed system feeds the elongated member beneath the surface treatment equipment and the adhesive application equipment concurrently.

Another illustrative embodiment of the present disclosure provides a method. A surface of an elongated member is simultaneously treated and adhesive is applied to an already treated portion of the surface of the elongated member by a system comprising surface treatment equipment and adhesive application equipment, wherein the system applies surface treatment to the surface in a continuous automated fashion and applies adhesive to the already treated portion of the surface in a continuous automated fashion.

A further illustrative embodiment of the present disclosure provides a method. An elongated member is fed through a system using a common feed system. A surface of the elongated member is treated using surface treatment equipment as the common feed system feeds the elongated member beneath the surface treatment equipment. An adhesive is applied to the surface of the elongated member, wherein the adhesive is applied to a portion of the surface after treating the portion of the surface, wherein the adhesive is applied to the surface by adhesive application equipment as the common feed system feeds the elongated member beneath the adhesive application equipment.

Another illustrative embodiment of the present disclosure provides a system for treating a surface and applying adhesive to an already treated portion of the surface concurrently, the system comprising: surface treatment equipment configured to
5 treat the surface of an elongated member; adhesive application equipment configured to apply the adhesive to the already treated portion of the surface; and a common feed system for feeding the elongated member beneath the surface treatment equipment and the adhesive application equipment concurrently,
10 wherein the common feed system comprises: drive equipment comprising a plurality of drive wheels configured to contact the elongated member, and indexing equipment configured to center the elongated member beneath the surface treatment equipment and the adhesive application equipment.

15 A further illustrative embodiment of the present disclosure provides a method comprising: simultaneously treating a surface of an elongated member and applying adhesive to an already treated portion of the surface of the elongated member by a system comprising surface treatment equipment and adhesive
20 application equipment, wherein the system applies a surface treatment to the surface in a continuous automated fashion and applies the adhesive to the already treated portion of the surface in a continuous automated fashion, wherein the elongated member is fed concurrently beneath the surface treatment
25 equipment and the adhesive application equipment using a common feed system, the common feed system comprising: drive equipment comprising a plurality of drive wheels configured to contact the elongated member, and indexing equipment configured to center the elongated member beneath the surface treatment equipment and
30 the adhesive application equipment.

Another illustrative embodiment of the present disclosure provides a method comprising: feeding an elongated member through a system using a common feed system; treating a surface of the elongated member using surface treatment equipment as the
5 common feed system feeds the elongated member beneath the surface treatment equipment; and applying an adhesive to the surface of the elongated member, wherein the adhesive is applied to a portion of the surface after treating the portion of the surface, wherein the adhesive is applied to the surface by
10 adhesive application equipment as the common feed system feeds the elongated member beneath the adhesive application equipment, wherein the common feed system comprises: drive equipment comprising a plurality of drive wheels configured to contact the elongated member, and indexing equipment configured to center
15 the elongated member beneath the surface treatment equipment and the adhesive application equipment.

A further illustrative embodiment of the present disclosure provides a system for treating a surface and applying adhesive to an already treated portion of the surface concurrently, the
20 system comprising: surface treatment equipment configured to treat the surface of an elongated member; adhesive application equipment configured to apply the adhesive to the already treated portion of the surface; and a common feed system for feeding the elongated member beneath the surface treatment
25 equipment and the adhesive application equipment concurrently, wherein the common feed system feeds the elongated member beneath the surface treatment equipment and the adhesive application equipment at a rate in a range of one inch per second to ten inches per second, wherein the surface treatment
30 equipment is configured such that heat generated on the surface of the elongated member is between 105 degrees Fahrenheit and 140 degrees Fahrenheit, wherein speed of nozzles of the surface treatment equipment in rpm is in the range of 2400 rpm to 3200 rpm, wherein an input pressure for the nozzles is in a range of

about 50 psi to about 90 psi, wherein system clamp up of the elongated member is in a range of 65 psi to 95 psi, wherein distance of the nozzles from the surface is 0.50 inches $\pm$ 0.10 inches, wherein overlap of the nozzles is set at 0.20 inches $\pm$ 0.05 inches, wherein vacuum of 18 to 24 inches of Hg is provided for a feed and cut sequence of the adhesive application equipment, and wherein a compaction roller of the adhesive application equipment applies pressure in a range of 35 psi to 55 psi.

Another illustrative embodiment of the present disclosure provides a system for treating a surface and applying adhesive to an already treated portion of the surface concurrently, the system comprising: surface treatment equipment configured to treat the surface of an elongated member; adhesive application equipment configured to apply the adhesive to the already treated portion of the surface; and a common feed system for feeding the elongated member beneath the surface treatment equipment and the adhesive application equipment concurrently, wherein the common feed system feeds the elongated member beneath the surface treatment equipment and the adhesive application equipment at a rate in a range of five inches per second to six inches per second, wherein the surface treatment equipment is configured such that heat generated on the surface of the elongated member is between 105 degrees Fahrenheit and 140 degrees Fahrenheit, wherein speed of nozzles of the surface treatment equipment in rpm is in a range of 2400 rpm to 3200 rpm, wherein input pressure for the nozzles is in a range of about 50 psi to about 90 psi, wherein system clamp up of the elongated member is in a range of 65 psi to 95 psi, wherein distance of the nozzles from the surface is 0.50 inches $\pm$ 0.10 inches, wherein overlap of the nozzles is set at 0.20 inches $\pm$ 0.05 inches, wherein vacuum of 18 to 24 inches of Hg is provided for a feed and cut sequence of the adhesive application equipment, and wherein a compaction roller of the adhesive

application equipment applies pressure in a range of 40 psi to 50 psi.

A further illustrative embodiment of the present disclosure provides a system for treating a surface and applying adhesive to an already treated portion of the surface concurrently, the system comprising: surface treatment equipment configured to treat the surface of an elongated member; adhesive application equipment configured to apply the adhesive to the already treated portion of the surface; and a common feed system for feeding the elongated member beneath the surface treatment equipment and the adhesive application equipment concurrently, wherein the common feed system feeds the elongated member beneath the surface treatment equipment and the adhesive application equipment at a rate of about five inches per second, wherein the surface treatment equipment is configured such that heat generated on the surface of the elongated member is about 122 degrees Fahrenheit, wherein speed of nozzles of the surface treatment equipment in rpm is about 2800 rpm, wherein input pressure for the nozzles is in a range of about 50 psi to about 90 psi, wherein system clamp up of the elongated member is about 80 psi, wherein distance of the nozzles from the surface is 0.50 inches $\pm$ 0.10 inches, wherein overlap of the nozzles is set at 0.20 inches $\pm$ 0.05 inches, wherein vacuum of about 22 inches of Hg is provided for a feed and cut sequence of the adhesive application equipment, and wherein a compaction roller of the adhesive application equipment applies pressure at about 45 psi.

The features and functions can be achieved independently in various embodiments of the present disclosure or may be combined in yet other embodiments in which further details can be seen with reference to the following description and drawings.

5

BRIEF DESCRIPTION OF THE DRAWINGS

The illustrative embodiments, as well as a preferred mode of use, further objectives and features thereof, will best be understood by reference to the following detailed description of an illustrative embodiment of the present disclosure when read in conjunction with the accompanying drawings, wherein:

Figure 1 is an illustration of an aircraft in which an illustrative embodiment may be implemented;

15 **Figure 2** is an illustration of a block diagram of a manufacturing environment in accordance with an illustrative embodiment;

Figure 3 is an illustration of an isometric view of a system for treating a surface and applying adhesive to an already treated portion of the surface in accordance with an illustrative embodiment;

20 **Figure 4** is an illustration of a perspective view of a system for treating a surface and applying adhesive to an already treated portion of the surface in accordance with an illustrative embodiment;

Figure 5 is an illustration of a side view of a system for treating a surface and applying adhesive to an already treated portion of the surface in accordance with an illustrative embodiment;

30 **Figure 6** is an illustration of a top view of a system for treating a surface and applying adhesive to an already treated

portion of the surface in accordance with an illustrative embodiment;

Figure 7 is an illustration of an isometric view of a common feed system for use in a system for treating a surface and applying adhesive to an already treated portion of the surface in accordance with an illustrative embodiment;

Figure 8 is an illustration of a side view of a common feed system for use in a system for treating a surface and applying adhesive to an already treated portion of the surface in accordance with an illustrative embodiment;

Figure 9 is an illustration of a top view of a common feed system for use in a system for treating a surface and applying adhesive to an already treated portion of the surface in accordance with an illustrative embodiment;

Figure 10 is an illustration of a flowchart of a method for processing an elongated member in accordance with an illustrative embodiment;

Figure 11 is an illustration of a flowchart of a method for processing an elongated member in accordance with an illustrative embodiment;

Figure 12 is an illustration of an aircraft manufacturing and service method in the form of a block diagram in accordance with an illustrative embodiment; and

Figure 13 is an illustration of an aircraft in the form of a block diagram in which an illustrative embodiment may be implemented.

DETAILED DESCRIPTION

The illustrative embodiments recognize and take into account one or more different considerations. For example, the illustrative embodiments recognize and take into account that when a structure is sent through mounted processing equipment

the equipment may be referred to as a "pass-through" processing system. The illustrative embodiments recognize and take into account that when a structure is stationary and processing equipment is passed over the structure, the equipment may be
5 referred to as a "pass-over" processing system.

The illustrative embodiments recognize and take into account that a pass-through processing system requires a larger processing footprint than equipment moving across a structure. The illustrative embodiments recognize and take into account
10 that this processing footprint takes into account not only the physical size of the equipment, but also the distance the structure travels.

The illustrative embodiments recognize and take into account that a pass-through processing system has at least a
15 length double the length of the structure receiving processing. For example, the illustrative examples recognize and take into account that a feedline for a ninety foot long elongated structure in a pass-through processing system would have an over one hundred and eighty foot long footprint to accommodate the
20 elongated structure prior to and after processing.

The illustrative examples recognize and take into account that "pass-over" processing system has a smaller footprint than a "pass-through" processing system. The illustrative
embodiments recognize and take into account that when equipment
25 moves across a structure, the structure represents the footprint within the manufacturing environment. For example, the illustrative examples recognize and take into account that a feedline for a ninety foot long elongated structure in a pass-over processing system would have about a ninety foot long
30 footprint to accommodate the elongated structure and the processing equipment that travels over the structure.

The illustrative examples recognize and take into account that in conventional processing, composites receive two

independent steps: initial surface preparation followed by subsequent manual adhesive application. The illustrative examples recognize and take into account that conventional processes may require an undesirable amount of manual labor.

5 The illustrative examples further recognize and take into account that manually laying down an adhesive presents a potential of inducing inconsistencies due to pick-and-place operations between each step, as well as a reduced rate due to both of the extra steps.

10 Referring now to the figures, and in particular, with reference to **Figure 1**, an illustration of an aircraft is depicted in which an illustrative embodiment may be implemented. In this illustrative example, aircraft **100** has wing **102** and wing **104** connected to body **106**. Aircraft **100** includes engine **108**
15 connected to wing **102** and engine **110** connected to wing **104**.

Body **106** has tail section **112**. Horizontal stabilizer **114**, horizontal stabilizer **116**, and vertical stabilizer **118** are connected to tail section **112** of body **106**.

Aircraft **100** is an environment in which at least one
20 elongated member processed using an illustrative embodiment may be implemented. For example, a stringer, in at least one of body **106**, wing **102**, or wing **104**, may be processed using a common feed system for surface treatment and adhesive application.

This illustration of aircraft **100** is provided for the
25 purposes of illustrating one environment in which different illustrative embodiments may be implemented. The illustration of aircraft **100** in **Figure 1** is not meant to imply architectural limitations as to the manner in which different illustrative embodiments may be implemented. For example, aircraft **100** is
30 shown as a commercial passenger aircraft. The different illustrative embodiments may be applied to other types of aircraft, such as a private passenger aircraft, rotorcraft, or other suitable types of aircraft.

Although the illustrative examples for an illustrative embodiment are described with respect to an aircraft, the illustrative embodiments may be applied to other types of structures. The structure may be, for example, a mobile
5 structure, a stationary structure, a land-based structure, an aquatic-based structure, or a space-based structure. More specifically, the structure may be a surface ship, a tank, a personnel carrier, a train, a spacecraft, a space station, a satellite, a submarine, a manufacturing facility, a building, or
10 other suitable types of structures.

Turning now to **Figure 2**, an illustration of a block diagram of a manufacturing environment is depicted in accordance with an illustrative embodiment. Manufacturing environment **200** is a depiction of an environment in which surface treatment and
15 adhesive application may be performed. Surface treatment and adhesive may be applied to a stringer of aircraft **100** of **Figure 1** in manufacturing environment **200**.

System **202** for treating surface **204** and applying adhesive **206** to already treated portion **207** of surface **204** concurrently
20 is present in manufacturing environment **200**. System **202** comprises surface treatment equipment **208**, adhesive application equipment **210**, and common feed system **212**. Surface treatment equipment **208** is configured to treat surface **204** of elongated member **213**. Adhesive application equipment **210** is configured to
25 apply adhesive **206** to already treated portion **207** of surface **204**. Common feed system **212** feeds elongated member **213** beneath surface treatment equipment **208** and adhesive application equipment **210** concurrently. System **202** comprises common feed system **212** for feeding elongated member **213** beneath surface
30 treatment equipment **208** and adhesive application equipment **210** concurrently. Common feed system **212** for feeding elongated member **213** beneath surface treatment equipment **208** and adhesive application equipment **210** concurrently feeds elongated member

213 beneath surface treatment equipment **208** and adhesive application equipment **210** at a common rate.

In some illustrative examples, elongated member **213** is composite structure **214**. When elongated member **213** is composite structure **214**, adhesive **206** is used to bond composite structure **214** to another composite structure after application of adhesive **206** and removal of elongated member **213** from system **202**.

System **202** is located at position **215** in manufacturing environment **200**. System **202** does not change position **215** within manufacturing environment **200** to process elongated member **213**. Elongated member **213** is sent through system **202**. Adhesive application equipment **210** is mounted. Surface treatment equipment **208** is mounted. Common feed system **212** feeds elongated member **213** through both adhesive application equipment **210** and surface treatment equipment **208**.

Common feed system **212** has drive equipment **216** comprising plurality of drive wheels **218** configured to contact elongated member **213**. As depicted, drive equipment **216** includes inlet drive equipment **220** and outlet drive equipment **222**. Plurality of drive wheels **218** includes drive wheel **224** of inlet drive equipment **220** and drive wheel **226** of outlet drive equipment **222**.

Plurality of drive wheels **218** contact elongated member **213** to impart force to drive elongated member **213** along common feed system **212**. Each of drive wheel **224** and drive wheel **226** is connected to a respective variable speed motor of variable speed motors **228**. Variable speed motors **228** rotate drive wheel **224** and drive wheel **226** to impart force to drive elongated member **213** along common feed system **212**.

Plurality of drive wheels **218** act to at least one of push or pull elongated member through system **202**. Plurality of drive wheels **218** may include any desirable quantity of drive wheels. Although only a single drive wheel is shown in each of inlet drive equipment **220** and outlet drive equipment **222**, more than

one drive wheel may be present in at least one of inlet drive equipment **220** or outlet drive equipment **222**.

Inlet drive equipment **220** and outlet drive equipment **222** are positioned at any desirable location in common feed system **212**. Each of inlet drive equipment **220** and outlet drive equipment **222** are placed in any desirable location relative to adhesive application equipment **210** and surface treatment equipment **208**.

Common feed system **212** further comprises indexing equipment **230** configured to center elongated member **213** beneath surface treatment equipment **208** and adhesive application equipment **210**. Indexing equipment **230** comprises retractable wheel assembly **232** configured to move towards or away from drive wheel **224** of drive equipment **216**. Retractable wheel assembly **234** of indexing equipment **230** is configured to move towards or away from drive wheel **226** of drive equipment **216**.

Indexing equipment **230** centers elongated member **213** in a horizontal plane. The horizontal plane is perpendicular to a centerline running through length **235** of elongated member **213**.

Common feed system **212** is associated with base **236**. The horizontal plane is parallel to a face of base **236**.

Common feed system **212** further comprises number of roller systems **238** to support elongated member **213**. Number of roller systems **238** center elongated member **213** in a vertical plane.

The vertical plane is perpendicular to the centerline running through length **235** of elongated member **213**. The vertical plane is perpendicular to a face of base **236**.

Number of roller systems **238** is laid out based on a design of elongated member **213**. For example, at least one of a quantity of roller systems, a size of rollers, a position of rollers, a quantity of rollers in each roller system, a position of roller systems, or any other desirable feature of number of roller systems **238** is selected based on a cross-sectional shape

of elongated member **213**. Number of roller systems **238** may be configured to support a plurality of different designs of elongated members, including elongated member **213**.

Alignment and calibration features, such as indexing
5 equipment **230** and number of roller systems **238**, are included in common feed system **212** to position elongated member **213**. All mechanical components of system **202** interact accordingly to process elongated member **213** for both treatment of surface **204**
and placement of adhesive **206** in a desired fashion. System **202**
10 is designed and fabricated to execute the two processes immediately consecutively at a single rate.

Adhesive application equipment **210** is mounted within manufacturing environment **200**. Surface treatment equipment **208** is also mounted within manufacturing environment **200**. The
15 alignment of the two systems, adhesive application equipment **210** and surface treatment equipment **208**, into one common drive system, drive equipment **216**, is key so that the surface treatment is applied to surface **204** with adequate coverage and that the immediately subsequent application process of adhesive
20 **206** aligns and places adhesive **206** centered on surface **204**.

Common feed system **212** feeds elongated member **213** through system **202** at constant rate **240**. Constant rate **240** is selected to provide desirable processing from both adhesive application equipment **210** and surface treatment equipment **208**. In some
25 illustrative examples, adhesive application equipment **210** has an independent traversal rate of between one inch per second and ten inches per second. In some illustrative examples, adhesive application equipment **210** has an independent traversal rate of between one inch per second and eight inches per second. In
30 some illustrative examples, adhesive application equipment **210** has an independent traversal rate of between three inches per second and eight inches per second. In some illustrative examples, adhesive application equipment **210** has an independent

traversal rate of between one inch per second and six inches per second. In some illustrative examples, adhesive application equipment **210** independently has a desirable independent traversal rate of equal to or less than five inches per second.

5 In some illustrative examples, adhesive application equipment **210** has a desirable independent traversal rate of approximately five inches per second.

In some illustrative examples, surface treatment equipment **208** has an independent traversal rate of between one inch per
10 second and six inches per second. In some illustrative examples, surface treatment equipment **208** has an independent traversal rate of between four inches per second and six inches per second. In some illustrative examples, surface treatment equipment **208** has a desirable independent traversal rate of
15 approximately five inches per second.

In some illustrative examples, common feed system **212** feeds elongated member **213** beneath surface treatment equipment **208** and adhesive application equipment **210** at a rate in a range of one inches per second to ten inches per second. In some more
20 specific illustrative examples, common feed system **212** feeds elongated member **213** beneath surface treatment equipment **208** and adhesive application equipment **210** at a rate in a range of three inches per second to eight inches per second. In some illustrative examples, common feed system **212** feeds elongated
25 member **213** beneath surface treatment equipment **208** and adhesive application equipment **210** at a rate in a range of one inch per second to six inches per second. In some illustrative examples, common feed system **212** feeds elongated member **213** beneath surface treatment equipment **208** and adhesive application
30 equipment **210** at a rate in a range of five inches per second to six inches per second. In one illustrative example, common feed system **212** desirably feeds elongated member **213** beneath surface

treatment equipment **208** and adhesive application equipment **210** at a rate of approximately five inches per second.

In some illustrative examples, surface treatment equipment **208** comprises atmospheric pressure plasma treatment equipment **242**. Atmospheric pressure plasma treatment equipment **242** applies atmospheric pressure plasma to surface **204**.

Distance **244** is between surface treatment equipment **208** and adhesive application equipment **210** along common feed system **212**. Decreasing distance **244** may reduce inconsistencies in the application of adhesive **206**. Decreasing distance **244** may also reduce footprint **245** of system **202**.

In some illustrative examples, footprint **245** is only the surface area of manufacturing environment **200** covered by system **202**. In some other illustrative examples, footprint **245** is considered to be the surface area including the length for loading elongated member **213** into system **202** and the length for unloading elongated member **213** from system **202**.

In some illustrative examples, distance **244** between atmospheric pressure plasma treatment equipment **242** and adhesive application equipment **210** is sufficiently small, such that heat **246** generated on surface **204** by atmospheric pressure plasma treatment equipment **242** increases the tack of adhesive **206**. In some illustrative examples, atmospheric pressure plasma treatment equipment **242** is configured such that heat **246** generated on surface **204** is between 105 degrees Fahrenheit and 140 degrees Fahrenheit. In some illustrative examples, atmospheric pressure plasma treatment equipment **242** is configured such that heat **246** generated on surface **204** is desirably at least 122 degrees Fahrenheit.

In some illustrative examples, there is no intervening interface between surface treatment equipment **208** and adhesive application equipment **210**. In some illustrative examples, surface treatment equipment **208** and adhesive application

equipment **210** are immediately consecutive with the placement of adhesive **206** occurring virtually immediately after surface treatment.

Distance **244** is measured from the location of applying
5 adhesive **206** to the location of applying the surface treatment.
Distance **244** is measured from a contact point of compaction roller **248** to nozzles **250** of atmospheric pressure plasma treatment equipment **242**.

Distance **244** may have physical limitations based on the
10 design of surface treatment equipment **208** and adhesive application equipment **210**. Distance **244** may be desirably minimized by taking into account the design of both surface treatment equipment **208** and adhesive application equipment **210**. In some illustrative examples, distance **244** is in the range of
15 about eight inches to about ten inches.

Having distance **244** be as short as possible allows adhesive application equipment **210** to benefit from heat **246** generated by atmospheric pressure plasma treatment equipment **242**. Heat **246** causes placement of adhesive **206** to be easier at higher rates.
20 Further, fewer foreign object debris or other inconsistencies may be induced in adhesive **206** when distance **244** is reduced.

When surface treatment equipment **208** takes the form of atmospheric pressure plasma treatment equipment **242**, nozzles **250** have desirable processing ranges. The processing
25 characteristics for nozzles **250** include at least one of a pressure at nozzles **250**, a speed of nozzles **250**, an offset of nozzles **250**, an overlap of nozzles **250**, or nozzles **250** to surface parallelism.

In some illustrative examples, pressure at nozzles **250**
30 includes measures of input pressure and output pressure. In some illustrative examples, the input pressure for nozzles **250** is in the range of about 50 psi to about 90 psi. In some

illustrative examples, the output pressure for nozzles **250** is about 25 psi.

In some illustrative examples, the speed of nozzles **250** in rotations per minute (rpm) is desirably in the range of 2400 rpm to 3200 rpm. In some illustrative examples, the speed of nozzles **250** is desirably 2800 rpm.

In some illustrative examples, distance **252** of nozzles **250** from surface **204** is 0.50 inches $\pm$ 0.10 inches. Distance sensor **254** of system **202** measures the vertical location of elongated member **213**. Measurements from distance sensor **254** are used to move surface treatment equipment **208** vertically, relative to base **236**, so that distance **252** is within a desirable range.

In some illustrative examples, the overlap of nozzles **250** is set at 0.20 inches, $\pm$ 0.05 inches. In some illustrative examples, parallelism of nozzles **250** to surface **204** is 0 degrees, $\pm$ 10 degrees. The axis of each nozzle of nozzles **250** is desirably normal to surface **204** being treated. The plane of surface treatment is thus parallel, or 0 degrees, to surface **204** receiving treatment. Parallelism is a measure of parallelism of the surface treatment provided by nozzles **250** relative to surface **204**.

In some illustrative examples, compaction roller **248** applies pressure **256** in the range of 35 psi to 55 psi. In some other more specific illustrative examples, compaction roller **248** applies pressure **256** in the range of 40 psi to 50 psi. In some other more specific illustrative examples, compaction roller **248** applies pressure **256** in the range of 40 psi to 50 psi. In one illustrative example, compaction roller **248** desirably applies pressure **256** at approximately 45 psi.

In some illustrative examples, adhesive **206** takes the form of adhesive film **258**. In some illustrative examples, when adhesive **206** is adhesive film **258**, vacuum of 18 to 24 inches of

Hg and preferably 22 inches of Hg is provided for a feed and cut sequence of adhesive application equipment **210**.

Applied heat increases the tack of adhesive **206**. The applied heat may come from any desirable source. The applied heat may be heat within manufacturing environment **200**, heat on surface **204**, or heat applied by optional heater **260**. When present, heat **246** generated by atmospheric pressure plasma treatment equipment **242** increases the tack of adhesive **206**. When surface treatment equipment **208** takes a different form, optional heater **260** may be used to increase the tack of adhesive **206**. A desirable temperature for adhesive **206** is in the range of 105 degrees Fahrenheit to 140 degrees Fahrenheit. In one illustrative example, the temperature for adhesive **206** is about 122 degrees Fahrenheit. A temperature for adhesive **206** is selected such that adhesive **206** provides sufficient tack at constant rate **240**.

To hold elongated member **213** within common feed system **212**, elongated member **213** is clamped up. The system clamp up of elongated member **213** is in the range of 65 psi to 95 psi. In some illustrative examples, the clamp up is preferably about 80 psi. Elongated member **213** is clamped to prevent a significant amount of slipping. As length **235** of elongated member **213** increases, slippage also increases.

Number of indexing sensors **262** is provided to determine the end of elongated member **213**. To provide accurate processing, system **202** should always track where the ends of elongated member **213** are located.

In some illustrative examples, common feed system **212** feeds elongated member **213** beneath surface treatment equipment **208** and adhesive application equipment **210** at a rate in a range of one inch per second to ten inches per second and compaction roller **248** of adhesive application equipment **210** applies pressure **256** in the range of 35 psi to 55 psi.

In some illustrative examples, common feed system **212** feeds elongated member **213** beneath surface treatment equipment **208** and adhesive application equipment **210** at a rate in a range of one inch per second to six inches per second and compaction roller
5 **248** of adhesive application equipment **210** applies pressure **256** in the range of 35 psi to 55 psi.

In some illustrative examples, common feed system **212** feeds elongated member **213** beneath surface treatment equipment **208** and adhesive application equipment **210** at a rate in a range of one
10 inch per second to six inches per second and compaction roller **248** of adhesive application equipment **210** applies pressure **256** in the range of 40 psi to 50 psi.

In some illustrative examples, common feed system **212** feeds elongated member **213** beneath surface treatment equipment **208** and
15 adhesive application equipment **210** at a rate in a range of three inches per second to eight inches per second and compaction roller **248** of adhesive application equipment **210** applies pressure **256** in the range of 35 psi to 55 psi.

In some illustrative examples, common feed system **212** feeds elongated member **213** beneath surface treatment equipment **208** and
20 adhesive application equipment **210** at a rate in a range of three inches per second to eight inches per second and compaction roller **248** of adhesive application equipment **210** applies pressure **256** in the range of 40 psi to 50 psi.

25 In some illustrative examples, common feed system **212** feeds elongated member **213** beneath surface treatment equipment **208** and adhesive application equipment **210** at a rate in a range of three inches per second to eight inches per second and compaction roller **248** of adhesive application equipment **210** applies
30 pressure **256** at approximately 45 psi.

In some illustrative examples, common feed system **212** feeds elongated member **213** beneath surface treatment equipment **208** and adhesive application equipment **210** at a rate in a range of one

inch per second to six inches per second and compaction roller
248 of adhesive application equipment **210** applies pressure **256**
at approximately 45 psi.

In some illustrative examples, common feed system **212** feeds
5 elongated member **213** beneath surface treatment equipment **208** and
adhesive application equipment **210** at a rate in a range of five
inches per second to six inches per second and compaction roller
248 of adhesive application equipment **210** applies pressure **256**
in the range of 35 psi to 55 psi.

10 In some illustrative examples, common feed system **212** feeds
elongated member **213** beneath surface treatment equipment **208** and
adhesive application equipment **210** at a rate in a range of five
inches per second to six inches per second and compaction roller
248 of adhesive application equipment **210** applies pressure **256**
15 in the range of 40 psi to 50 psi.

In some illustrative examples, common feed system **212** feeds
elongated member **213** beneath surface treatment equipment **208** and
adhesive application equipment **210** at a rate in a range of five
inches per second to six inches per second and compaction roller
20 **248** of adhesive application equipment **210** applies pressure **256**
at approximately 45 psi.

In some illustrative examples, common feed system **212** feeds
elongated member **213** beneath surface treatment equipment **208** and
adhesive application equipment **210** at a rate of approximately
25 five inches per second and compaction roller **248** of adhesive
application equipment **210** applies pressure **256** in the range of
35 psi to 55 psi.

In some illustrative examples, common feed system **212** feeds
elongated member **213** beneath surface treatment equipment **208** and
30 adhesive application equipment **210** at a rate of approximately
five inches per second and compaction roller **248** of adhesive
application equipment **210** applies pressure **256** in the range of
40 psi to 50 psi.

In one specific illustrative example, common feed system **212** feeds elongated member **213** beneath surface treatment equipment **208** and adhesive application equipment **210** at a rate of approximately five inches per second and compaction roller **248** of adhesive application equipment **210** applies pressure **256** at approximately 45 psi.

In some illustrative examples, common feed system **212** feeds elongated member **213** beneath surface treatment equipment **208** and adhesive application equipment **210** at a rate in a range of one inches per second to ten inches per second, input pressure for nozzles **250** of surface treatment equipment **208** is in the range of about 50 psi to about 90 psi, and compaction roller **248** of adhesive application equipment **210** applies pressure **256** in the range of 35 psi to 55 psi.

In some illustrative examples, common feed system **212** feeds elongated member **213** beneath surface treatment equipment **208** and adhesive application equipment **210** at a rate in a range of three inches per second to eight inches per second, input pressure for nozzles **250** of surface treatment equipment **208** is in the range of about 50 psi to about 90 psi, and compaction roller **248** of adhesive application equipment **210** applies pressure **256** in the range of 35 psi to 55 psi.

In some illustrative examples, common feed system **212** feeds elongated member **213** beneath surface treatment equipment **208** and adhesive application equipment **210** at a rate in a range of three inches per second to eight inches per second, input pressure for nozzles **250** of surface treatment equipment **208** is in the range of about 50 psi to about 90 psi, and compaction roller **248** of adhesive application equipment **210** applies pressure **256** in the range of 40 psi to 50 psi.

In some illustrative examples, common feed system **212** feeds elongated member **213** beneath surface treatment equipment **208** and adhesive application equipment **210** at a rate in a range of three

inches per second to eight inches per second, input pressure for nozzles **250** of surface treatment equipment **208** is in the range of about 50 psi to about 90 psi, and compaction roller **248** of adhesive application equipment **210** applies pressure **256** at
5 approximately 45 psi.

In some illustrative examples, common feed system **212** feeds elongated member **213** beneath surface treatment equipment **208** and adhesive application equipment **210** at a rate in a range of one inch per second to six inches per second, input pressure for
10 nozzles **250** of surface treatment equipment **208** is in the range of about 50 psi to about 90 psi, and compaction roller **248** of adhesive application equipment **210** applies pressure **256** in the range of 35 psi to 55 psi.

In some illustrative examples, common feed system **212** feeds
15 elongated member **213** beneath surface treatment equipment **208** and adhesive application equipment **210** at a rate in a range of one inch per second to six inches per second, input pressure for nozzles **250** of surface treatment equipment **208** is in the range of about 50 psi to about 90 psi, and compaction roller **248** of
20 adhesive application equipment **210** applies pressure **256** in the range of 40 psi to 50 psi.

In some illustrative examples, common feed system **212** feeds elongated member **213** beneath surface treatment equipment **208** and adhesive application equipment **210** at a rate in a range of one
25 inch per second to six inches per second, input pressure for nozzles **250** of surface treatment equipment **208** is in the range of about 50 psi to about 90 psi, and compaction roller **248** of adhesive application equipment **210** applies pressure **256** at approximately 45 psi.

30 In some illustrative examples, common feed system **212** feeds elongated member **213** beneath surface treatment equipment **208** and adhesive application equipment **210** at a rate in a range of five inches per second to six inches per second, input pressure for

nozzles **250** of surface treatment equipment **208** is in the range of about 50 psi to about 90 psi, and compaction roller **248** of adhesive application equipment **210** applies pressure **256** in the range of 35 psi to 55 psi.

5 In some illustrative examples, common feed system **212** feeds elongated member **213** beneath surface treatment equipment **208** and adhesive application equipment **210** at a rate in a range of five inches per second to six inches per second, input pressure for
10 nozzles **250** of surface treatment equipment **208** is in the range of about 50 psi to about 90 psi, and compaction roller **248** of adhesive application equipment **210** applies pressure **256** in the range of 40 psi to 50 psi.

 In some illustrative examples, common feed system **212** feeds elongated member **213** beneath surface treatment equipment **208** and
15 adhesive application equipment **210** at a rate in a range of five inches per second to six inches per second, input pressure for nozzles **250** of surface treatment equipment **208** is in the range of about 50 psi to about 90 psi, and compaction roller **248** of adhesive application equipment **210** applies pressure **256** at
20 approximately 45 psi.

 In some illustrative examples, common feed system **212** feeds elongated member **213** beneath surface treatment equipment **208** and adhesive application equipment **210** at a rate of approximately five inches per second, input pressure for nozzles **250** of
25 surface treatment equipment **208** is in the range of about 50 psi to about 90 psi, and compaction roller **248** of adhesive application equipment **210** applies pressure **256** in the range of 35 psi to 55 psi.

 In some illustrative examples, common feed system **212** feeds
30 elongated member **213** beneath surface treatment equipment **208** and adhesive application equipment **210** at a rate of approximately five inches per second, input pressure for nozzles **250** of surface treatment equipment **208** is in the range of about 50 psi

to about 90 psi, and compaction roller **248** of adhesive application equipment **210** applies pressure **256** in the range of 40 psi to 50 psi.

In some illustrative examples, common feed system **212** feeds
5 elongated member **213** beneath surface treatment equipment **208** and adhesive application equipment **210** at a rate of approximately five inches per second, input pressure for nozzles **250** of surface treatment equipment **208** is in the range of about 50 psi to about 90 psi, and compaction roller **248** of adhesive
10 application equipment **210** applies pressure **256** at approximately 45 psi.

In some illustrative examples, common feed system **212** feeds elongated member **213** beneath surface treatment equipment **208** and adhesive application equipment **210** at a rate in a range of one
15 inches per second to ten inches per second, the speed of nozzles **250** of surface treatment equipment **208** in rpm is in the range of 2400 rpm to 3200 rpm, and compaction roller **248** of adhesive application equipment **210** applies pressure **256** in the range of 35 psi to 55 psi.

In some illustrative examples, common feed system **212** feeds elongated member **213** beneath surface treatment equipment **208** and adhesive application equipment **210** at a rate in a range of three
20 inches per second to eight inches per second, the speed of nozzles **250** of surface treatment equipment **208** in rpm is in the range of 2400 rpm to 3200 rpm, and compaction roller **248** of adhesive application equipment **210** applies pressure **256** in the range of 35 psi to 55 psi.

In some illustrative examples, common feed system **212** feeds elongated member **213** beneath surface treatment equipment **208** and
30 adhesive application equipment **210** at a rate in a range of three inches per second to eight inches per second, the speed of nozzles **250** of surface treatment equipment **208** in rpm is in the range of 2400 rpm to 3200 rpm, and compaction roller **248** of

adhesive application equipment **210** applies pressure **256** in the range of 40 psi to 50 psi.

In some illustrative examples, common feed system **212** feeds elongated member **213** beneath surface treatment equipment **208** and
5 adhesive application equipment **210** at a rate in a range of three inches per second to eight inches per second, the speed of nozzles **250** of surface treatment equipment **208** in rpm is in the range of 2400 rpm to 3200 rpm, and compaction roller **248** of adhesive application equipment **210** applies pressure **256** at
10 approximately 45 psi.

In some illustrative examples, common feed system **212** feeds elongated member **213** beneath surface treatment equipment **208** and adhesive application equipment **210** at a rate in a range of one
15 inch per second to six inches per second, the speed of nozzles **250** of surface treatment equipment **208** in rpm is in the range of 2400 rpm to 3200 rpm, and compaction roller **248** of adhesive application equipment **210** applies pressure **256** in the range of 35 psi to 55 psi.

In some illustrative examples, common feed system **212** feeds elongated member **213** beneath surface treatment equipment **208** and
20 adhesive application equipment **210** at a rate in a range of one inch per second to six inches per second, the speed of nozzles **250** of surface treatment equipment **208** in rpm is in the range of 2400 rpm to 3200 rpm, and compaction roller **248** of adhesive
25 application equipment **210** applies pressure **256** in the range of 40 psi to 50 psi.

In some illustrative examples, common feed system **212** feeds elongated member **213** beneath surface treatment equipment **208** and adhesive application equipment **210** at a rate in a range of one
30 inch per second to six inches per second, the speed of nozzles **250** of surface treatment equipment **208** in rpm is in the range of 2400 rpm to 3200 rpm, and compaction roller **248** of adhesive

application equipment **210** applies pressure **256** at approximately 45 psi.

In some illustrative examples, common feed system **212** feeds elongated member **213** beneath surface treatment equipment **208** and adhesive application equipment **210** at a rate in a range of five inches per second to six inches per second, the speed of nozzles **250** of surface treatment equipment **208** in rpm is in the range of 2400 rpm to 3200 rpm, and compaction roller **248** of adhesive application equipment **210** applies pressure **256** in the range of 35 psi to 55 psi.

In some illustrative examples, common feed system **212** feeds elongated member **213** beneath surface treatment equipment **208** and adhesive application equipment **210** at a rate in a range of five inches per second to six inches per second, the speed of nozzles **250** of surface treatment equipment **208** in rpm is in the range of 2400 rpm to 3200 rpm, and compaction roller **248** of adhesive application equipment **210** applies pressure **256** in the range of 40 psi to 50 psi.

In some illustrative examples, common feed system **212** feeds elongated member **213** beneath surface treatment equipment **208** and adhesive application equipment **210** at a rate in a range of five inches per second to six inches per second, the speed of nozzles **250** of surface treatment equipment **208** in rpm is in the range of 2400 rpm to 3200 rpm, and compaction roller **248** of adhesive application equipment **210** applies pressure **256** at approximately 45 psi.

In some illustrative examples, common feed system **212** feeds elongated member **213** beneath surface treatment equipment **208** and adhesive application equipment **210** at a rate of approximately five inches per second, the speed of nozzles **250** of surface treatment equipment **208** in rpm is in the range of 2400 rpm to 3200 rpm, and compaction roller **248** of adhesive application

equipment **210** applies pressure **256** in the range of 35 psi to 55 psi.

In some illustrative examples, common feed system **212** feeds elongated member **213** beneath surface treatment equipment **208** and adhesive application equipment **210** at a rate of approximately five inches per second, the speed of nozzles **250** of surface treatment equipment **208** in rpm is in the range of 2400 rpm to 3200 rpm, and compaction roller **248** of adhesive application equipment **210** applies pressure **256** in the range of 40 psi to 50 psi.

In some illustrative examples, common feed system **212** feeds elongated member **213** beneath surface treatment equipment **208** and adhesive application equipment **210** at a rate of approximately five inches per second, the speed of nozzles **250** of surface treatment equipment **208** in rpm is in the range of 2400 rpm to 3200 rpm, and compaction roller **248** of adhesive application equipment **210** applies pressure **256** at approximately 45 psi.

In some illustrative examples, common feed system **212** feeds elongated member **213** beneath surface treatment equipment **208** and adhesive application equipment **210** at a rate in a range of one inches per second to ten inches per second, the speed of nozzles **250** of surface treatment equipment **208** in rpm is desirably 2800 rpm, and compaction roller **248** of adhesive application equipment **210** applies pressure **256** in the range of 35 psi to 55 psi.

In some illustrative examples, common feed system **212** feeds elongated member **213** beneath surface treatment equipment **208** and adhesive application equipment **210** at a rate in a range of three inches per second to eight inches per second, the speed of nozzles **250** of surface treatment equipment **208** in rpm is desirably 2800 rpm, and compaction roller **248** of adhesive application equipment **210** applies pressure **256** in the range of 35 psi to 55 psi.

In some illustrative examples, common feed system **212** feeds elongated member **213** beneath surface treatment equipment **208** and adhesive application equipment **210** at a rate in a range of three inches per second to eight inches per second, the speed of
5 nozzles **250** of surface treatment equipment **208** in rpm is desirably 2800 rpm, and compaction roller **248** of adhesive application equipment **210** applies pressure **256** in the range of 40 psi to 50 psi.

In some illustrative examples, common feed system **212** feeds
10 elongated member **213** beneath surface treatment equipment **208** and adhesive application equipment **210** at a rate in a range of three inches per second to eight inches per second, the speed of nozzles **250** of surface treatment equipment **208** in rpm is desirably 2800 rpm, and compaction roller **248** of adhesive
15 application equipment **210** applies pressure **256** at approximately 45 psi.

In some illustrative examples, common feed system **212** feeds elongated member **213** beneath surface treatment equipment **208** and adhesive application equipment **210** at a rate in a range of five
20 inches per second to six inches per second, the speed of nozzles **250** of surface treatment equipment **208** in rpm is desirably 2800 rpm, and compaction roller **248** of adhesive application equipment **210** applies pressure **256** in the range of 35 psi to 55 psi.

In some illustrative examples, common feed system **212** feeds
25 elongated member **213** beneath surface treatment equipment **208** and adhesive application equipment **210** at a rate in a range of five inches per second to six inches per second, the speed of nozzles **250** of surface treatment equipment **208** in rpm is desirably 2800 rpm, and compaction roller **248** of adhesive application equipment
30 **210** applies pressure **256** in the range of 40 psi to 50 psi.

In some illustrative examples, common feed system **212** feeds elongated member **213** beneath surface treatment equipment **208** and adhesive application equipment **210** at a rate in a range of five

inches per second to six inches per second, the speed of nozzles **250** of surface treatment equipment **208** in rpm is desirably 2800 rpm, and compaction roller **248** of adhesive application equipment **210** applies pressure **256** at approximately 45 psi.

5 In some illustrative examples, common feed system **212** feeds elongated member **213** beneath surface treatment equipment **208** and adhesive application equipment **210** at a rate of approximately five inches per second, the speed of nozzles **250** of surface treatment equipment **208** in rpm is desirably 2800 rpm, and
10 compaction roller **248** of adhesive application equipment **210** applies pressure **256** in the range of 35 psi to 55 psi.

 In some illustrative examples, common feed system **212** feeds elongated member **213** beneath surface treatment equipment **208** and adhesive application equipment **210** at a rate of approximately
15 five inches per second, the speed of nozzles **250** of surface treatment equipment **208** in rpm is desirably 2800 rpm, and compaction roller **248** of adhesive application equipment **210** applies pressure **256** in the range of 40 psi to 50 psi.

 In some illustrative examples, common feed system **212** feeds
20 elongated member **213** beneath surface treatment equipment **208** and adhesive application equipment **210** at a rate of approximately five inches per second, the speed of nozzles **250** of surface treatment equipment **208** in rpm is desirably 2800 rpm, and compaction roller **248** of adhesive application equipment **210**
25 applies pressure **256** at approximately 45 psi.

 In some illustrative examples, common feed system **212** feeds elongated member **213** beneath surface treatment equipment **208** and adhesive application equipment **210** at a rate in a range of one inches per second to ten inches per second, the system clamp up
30 of elongated member **213** is in the range of 65 psi to 95 psi, and compaction roller **248** of adhesive application equipment **210** applies pressure **256** in the range of 35 psi to 55 psi.

In some illustrative examples, common feed system **212** feeds elongated member **213** beneath surface treatment equipment **208** and adhesive application equipment **210** at a rate in a range of three inches per second to eight inches per second, the system clamp
5 up of elongated member **213** is in the range of 65 psi to 95 psi, and compaction roller **248** of adhesive application equipment **210** applies pressure **256** in the range of 35 psi to 55 psi.

In some illustrative examples, common feed system **212** feeds elongated member **213** beneath surface treatment equipment **208** and
10 adhesive application equipment **210** at a rate in a range of three inches per second to eight inches per second, the system clamp up of elongated member **213** is in the range of 65 psi to 95 psi, and compaction roller **248** of adhesive application equipment **210** applies pressure **256** in the range of 40 psi to 50 psi.

15 In some illustrative examples, common feed system **212** feeds elongated member **213** beneath surface treatment equipment **208** and adhesive application equipment **210** at a rate in a range of three inches per second to eight inches per second, the system clamp up of elongated member **213** is in the range of 65 psi to 95 psi,
20 and compaction roller **248** of adhesive application equipment **210** applies pressure **256** at approximately 45 psi.

In some illustrative examples, common feed system **212** feeds elongated member **213** beneath surface treatment equipment **208** and adhesive application equipment **210** at a rate in a range of one
25 inch per second to six inches per second, the system clamp up of elongated member **213** is in the range of 65 psi to 95 psi, and compaction roller **248** of adhesive application equipment **210** applies pressure **256** in the range of 35 psi to 55 psi.

In some illustrative examples, common feed system **212** feeds
30 elongated member **213** beneath surface treatment equipment **208** and adhesive application equipment **210** at a rate in a range of one inch per second to six inches per second, the system clamp up of elongated member **213** is in the range of 65 psi to 95 psi, and

compaction roller **248** of adhesive application equipment **210**
applies pressure **256** in the range of 40 psi to 50 psi.

5 In some illustrative examples, common feed system **212** feeds
elongated member **213** beneath surface treatment equipment **208** and
adhesive application equipment **210** at a rate in a range of one
inches per second to six inches per second, the system clamp up
of elongated member **213** is in the range of 65 psi to 95 psi, and
compaction roller **248** of adhesive application equipment **210**
applies pressure **256** at approximately 45 psi.

10 In some illustrative examples, common feed system **212** feeds
elongated member **213** beneath surface treatment equipment **208** and
adhesive application equipment **210** at a rate in a range of five
inches per second to six inches per second, the system clamp up
of elongated member **213** is in the range of 65 psi to 95 psi, and
15 compaction roller **248** of adhesive application equipment **210**
applies pressure **256** in the range of 35 psi to 55 psi.

In some illustrative examples, common feed system **212** feeds
elongated member **213** beneath surface treatment equipment **208** and
adhesive application equipment **210** at a rate in a range of five
20 inches per second to six inches per second, the system clamp up
of elongated member **213** is in the range of 65 psi to 95 psi, and
compaction roller **248** of adhesive application equipment **210**
applies pressure **256** in the range of 40 psi to 50 psi.

In some illustrative examples, common feed system **212** feeds
25 elongated member **213** beneath surface treatment equipment **208** and
adhesive application equipment **210** at a rate in a range of five
inches per second to six inches per second, the system clamp up
of elongated member **213** is in the range of 65 psi to 95 psi, and
compaction roller **248** of adhesive application equipment **210**
30 applies pressure **256** at approximately 45 psi.

In some illustrative examples, common feed system **212** feeds
elongated member **213** beneath surface treatment equipment **208** and
adhesive application equipment **210** at a rate of approximately

five inches per second, the system clamp up of elongated member **213** is in the range of 65 psi to 95 psi, and compaction roller **248** of adhesive application equipment **210** applies pressure **256** in the range of 35 psi to 55 psi.

5 In some illustrative examples, common feed system **212** feeds elongated member **213** beneath surface treatment equipment **208** and adhesive application equipment **210** at a rate of approximately five inches per second, the system clamp up of elongated member **213** is in the range of 65 psi to 95 psi, and compaction roller
10 **248** of adhesive application equipment **210** applies pressure **256** in the range of 40 psi to 50 psi.

 In some illustrative examples, common feed system **212** feeds elongated member **213** beneath surface treatment equipment **208** and adhesive application equipment **210** at a rate of approximately
15 five inches per second, the system clamp up of elongated member **213** is in the range of 65 psi to 95 psi, and compaction roller **248** of adhesive application equipment **210** applies pressure **256** at approximately 45 psi.

 In some illustrative examples, common feed system **212** feeds
20 elongated member **213** beneath surface treatment equipment **208** and adhesive application equipment **210** at a rate in a range of one inches per second to ten inches per second, the system clamp up of elongated member **213** is desirably about 80 psi, and compaction roller **248** of adhesive application equipment **210**
25 applies pressure **256** in the range of 35 psi to 55 psi.

 In some illustrative examples, common feed system **212** feeds elongated member **213** beneath surface treatment equipment **208** and adhesive application equipment **210** at a rate in a range of three inches per second to eight inches per second, the system clamp
30 up of elongated member **213** is desirably about 80 psi, and compaction roller **248** of adhesive application equipment **210** applies pressure **256** in the range of 35 psi to 55 psi.

In some illustrative examples, common feed system **212** feeds elongated member **213** beneath surface treatment equipment **208** and adhesive application equipment **210** at a rate in a range of three inches per second to eight inches per second, the system clamp up of elongated member **213** is desirably about 80 psi, and compaction roller **248** of adhesive application equipment **210** applies pressure **256** in the range of 40 psi to 50 psi.

In some illustrative examples, common feed system **212** feeds elongated member **213** beneath surface treatment equipment **208** and adhesive application equipment **210** at a rate in a range of three inches per second to eight inches per second, the system clamp up of elongated member **213** is desirably about 80 psi, and compaction roller **248** of adhesive application equipment **210** applies pressure **256** at approximately 45 psi.

In some illustrative examples, common feed system **212** feeds elongated member **213** beneath surface treatment equipment **208** and adhesive application equipment **210** at a rate in a range of five inches per second to six inches per second, the system clamp up of elongated member **213** is desirably about 80 psi, and compaction roller **248** of adhesive application equipment **210** applies pressure **256** in the range of 35 psi to 55 psi.

In some illustrative examples, common feed system **212** feeds elongated member **213** beneath surface treatment equipment **208** and adhesive application equipment **210** at a rate in a range of five inches per second to six inches per second, the system clamp up of elongated member **213** is desirably about 80 psi, and compaction roller **248** of adhesive application equipment **210** applies pressure **256** in the range of 40 psi to 50 psi.

In some illustrative examples, common feed system **212** feeds elongated member **213** beneath surface treatment equipment **208** and adhesive application equipment **210** at a rate in a range of five inches per second to six inches per second, the system clamp up of elongated member **213** is desirably about 80 psi, and

compaction roller **248** of adhesive application equipment **210** applies pressure **256** at approximately 45 psi.

In some illustrative examples, common feed system **212** feeds elongated member **213** beneath surface treatment equipment **208** and
5 adhesive application equipment **210** at a rate of approximately five inches per second, the system clamp up of elongated member **213** is desirably about 80 psi, and compaction roller **248** of adhesive application equipment **210** applies pressure **256** in the range of 35 psi to 55 psi.

10 In some illustrative examples, common feed system **212** feeds elongated member **213** beneath surface treatment equipment **208** and adhesive application equipment **210** at a rate of approximately five inches per second, the system clamp up of elongated member **213** is desirably about 80 psi, and compaction roller **248** of
15 adhesive application equipment **210** applies pressure **256** in the range of 40 psi to 50 psi.

In some illustrative examples, common feed system **212** feeds elongated member **213** beneath surface treatment equipment **208** and adhesive application equipment **210** at a rate of approximately
20 five inches per second, the system clamp up of elongated member **213** is desirably about 80 psi, and compaction roller **248** of adhesive application equipment **210** applies pressure **256** at approximately 45 psi.

In some illustrative examples, common feed system **212** feeds
25 elongated member **213** beneath surface treatment equipment **208** and adhesive application equipment **210** at a rate in a range of one inches per second to ten inches per second, surface treatment equipment **208** is configured such that heat **246** generated on surface **204** of elongated member **213** is between 105 degrees
30 Fahrenheit and 140 degrees Fahrenheit, and compaction roller **248** of adhesive application equipment **210** applies pressure **256** in the range of 35 psi to 55 psi.

In some illustrative examples, common feed system **212** feeds elongated member **213** beneath surface treatment equipment **208** and adhesive application equipment **210** at a rate in a range of three inches per second to eight inches per second, surface treatment equipment **208** is configured such that heat **246** generated on surface **204** of elongated member **213** is between 105 degrees Fahrenheit and 140 degrees Fahrenheit, and compaction roller **248** of adhesive application equipment **210** applies pressure **256** in the range of 35 psi to 55 psi.

In some illustrative examples, common feed system **212** feeds elongated member **213** beneath surface treatment equipment **208** and adhesive application equipment **210** at a rate in a range of three inches per second to eight inches per second, surface treatment equipment **208** is configured such that heat **246** generated on surface **204** of elongated member **213** is between 105 degrees Fahrenheit and 140 degrees Fahrenheit, and compaction roller **248** of adhesive application equipment **210** applies pressure **256** in the range of 40 psi to 50 psi.

In some illustrative examples, common feed system **212** feeds elongated member **213** beneath surface treatment equipment **208** and adhesive application equipment **210** at a rate in a range of three inches per second to eight inches per second, surface treatment equipment **208** is configured such that heat **246** generated on surface **204** of elongated member **213** is between 105 degrees Fahrenheit and 140 degrees Fahrenheit, and compaction roller **248** of adhesive application equipment **210** applies pressure **256** at approximately 45 psi.

In some illustrative examples, common feed system **212** feeds elongated member **213** beneath surface treatment equipment **208** and adhesive application equipment **210** at a rate in a range of one inch per second to six inches per second, surface treatment equipment **208** is configured such that heat **246** generated on surface **204** of elongated member **213** is between 105 degrees

Fahrenheit and 140 degrees Fahrenheit, and compaction roller **248** of adhesive application equipment **210** applies pressure **256** in the range of 35 psi to 55 psi.

In some illustrative examples, common feed system **212** feeds
5 elongated member **213** beneath surface treatment equipment **208** and adhesive application equipment **210** at a rate in a range of one inch per second to six inches per second, surface treatment equipment **208** is configured such that heat **246** generated on surface **204** of elongated member **213** is between 105 degrees
10 Fahrenheit and 140 degrees Fahrenheit, and compaction roller **248** of adhesive application equipment **210** applies pressure **256** in the range of 40 psi to 50 psi.

In some illustrative examples, common feed system **212** feeds elongated member **213** beneath surface treatment equipment **208** and
15 adhesive application equipment **210** at a rate in a range of one inch per second to six inches per second, surface treatment equipment **208** is configured such that heat **246** generated on surface **204** of elongated member **213** is between 105 degrees Fahrenheit and 140 degrees Fahrenheit, and compaction roller **248**
20 of adhesive application equipment **210** applies pressure **256** at approximately 45 psi.

In some illustrative examples, common feed system **212** feeds elongated member **213** beneath surface treatment equipment **208** and adhesive application equipment **210** at a rate in a range of five
25 inches per second to six inches per second, surface treatment equipment **208** is configured such that heat **246** generated on surface **204** of elongated member **213** is between 105 degrees Fahrenheit and 140 degrees Fahrenheit, and compaction roller **248** of adhesive application equipment **210** applies pressure **256** in
30 the range of 35 psi to 55 psi.

In some illustrative examples, common feed system **212** feeds elongated member **213** beneath surface treatment equipment **208** and adhesive application equipment **210** at a rate in a range of five

inches per second to six inches per second, surface treatment equipment **208** is configured such that heat **246** generated on surface **204** of elongated member **213** is between 105 degrees Fahrenheit and 140 degrees Fahrenheit, and compaction roller **248** of adhesive application equipment **210** applies pressure **256** in the range of 40 psi to 50 psi.

In some illustrative examples, common feed system **212** feeds elongated member **213** beneath surface treatment equipment **208** and adhesive application equipment **210** at a rate in a range of five inches per second to six inches per second, surface treatment equipment **208** is configured such that heat **246** generated on surface **204** of elongated member **213** is between 105 degrees Fahrenheit and 140 degrees Fahrenheit, and compaction roller **248** of adhesive application equipment **210** applies pressure **256** at approximately 45 psi.

In some illustrative examples, common feed system **212** feeds elongated member **213** beneath surface treatment equipment **208** and adhesive application equipment **210** at a rate of approximately five inches per second, surface treatment equipment **208** is configured such that heat **246** generated on surface **204** of elongated member **213** is between 105 degrees Fahrenheit and 140 degrees Fahrenheit, and compaction roller **248** of adhesive application equipment **210** applies pressure **256** in the range of 35 psi to 55 psi.

In some illustrative examples, common feed system **212** feeds elongated member **213** beneath surface treatment equipment **208** and adhesive application equipment **210** at a rate of approximately five inches per second, surface treatment equipment **208** is configured such that heat **246** generated on surface **204** of elongated member **213** is between 105 degrees Fahrenheit and 140 degrees Fahrenheit, and compaction roller **248** of adhesive application equipment **210** applies pressure **256** in the range of 40 psi to 50 psi.

In some illustrative examples, common feed system **212** feeds elongated member **213** beneath surface treatment equipment **208** and adhesive application equipment **210** at a rate of approximately five inches per second, surface treatment equipment **208** is
5 configured such that heat **246** generated on surface **204** of elongated member **213** is between 105 degrees Fahrenheit and 140 degrees Fahrenheit, and compaction roller **248** of adhesive application equipment **210** applies pressure **256** at approximately 45 psi.

10 In some illustrative examples, common feed system **212** feeds elongated member **213** beneath surface treatment equipment **208** and adhesive application equipment **210** at a rate of approximately five inches per second, surface treatment equipment **208** is
15 configured such that heat **246** generated on surface **204** of elongated member **213** is about 120 degrees Fahrenheit, and compaction roller **248** of adhesive application equipment **210** applies pressure **256** at approximately 45 psi.

In some illustrative examples, common feed system **212** feeds elongated member **213** beneath surface treatment equipment **208** and
20 adhesive application equipment **210** at a rate of approximately five inches per second, surface treatment equipment **208** is configured such that heat **246** generated on surface **204** of elongated member **213** is between 105 degrees Fahrenheit and 140 degrees Fahrenheit, the input pressure for nozzles **250** of
25 surface treatment equipment **208** is in the range of about 50 psi to about 90 psi, and compaction roller **248** of adhesive application equipment **210** applies pressure **256** at approximately 45 psi.

In some illustrative examples, common feed system **212** feeds
30 elongated member **213** beneath surface treatment equipment **208** and adhesive application equipment **210** at a rate of approximately five inches per second, surface treatment equipment **208** is configured such that heat **246** generated on surface **204** of

elongated member **213** is between 105 degrees Fahrenheit and 140 degrees Fahrenheit, the speed of nozzles **250** of surface treatment equipment **208** in rpm is in the range of 2400 rpm to 3200 rpm, the input pressure for nozzles **250** is in the range of about 50 psi to about 90 psi, and compaction roller **248** of adhesive application equipment **210** applies pressure **256** at approximately 45 psi.

In some illustrative examples, common feed system **212** feeds elongated member **213** beneath surface treatment equipment **208** and adhesive application equipment **210** at a rate in a range of one inch per second to ten inches per second, surface treatment equipment **208** is configured such that heat **246** generated on surface **204** of elongated member **213** is between 105 degrees Fahrenheit and 140 degrees Fahrenheit, the speed of nozzles **250** of surface treatment equipment **208** in rpm is in the range of 2400 rpm to 3200 rpm, the input pressure for nozzles **250** is in the range of about 50 psi to about 90 psi, the system clamp up of elongated member **213** is in the range of 65 psi to 95 psi, distance **252** of nozzles **250** from surface **204** is 0.50 inches ± 0.10 inches, the overlap of nozzles **250** is set at 0.20 inches, ± 0.05 inches, vacuum of 18 to 24 inches of Hg is provided for a feed and cut sequence of adhesive application equipment **210**, and compaction roller **248** of adhesive application equipment **210** applies pressure **256** in the range of 35 psi to 55 psi.

In some illustrative examples, common feed system **212** feeds elongated member **213** beneath surface treatment equipment **208** and adhesive application equipment **210** at a rate in a range of five inches per second to six inches per second, surface treatment equipment **208** is configured such that heat **246** generated on surface **204** of elongated member **213** is between 105 degrees Fahrenheit and 140 degrees Fahrenheit, the speed of nozzles **250** of surface treatment equipment **208** in rpm is in the range of 2400 rpm to 3200 rpm, the input pressure for nozzles **250** is in

the range of about 50 psi to about 90 psi, the system clamp up of elongated member **213** is in the range of 65 psi to 95 psi, distance **252** of nozzles **250** from surface **204** is 0.50 inches ± 0.10 inches, the overlap of nozzles **250** is set at 0.20 inches, ± 0.05 inches, vacuum of 18 to 24 inches of Hg is provided for a feed and cut sequence of adhesive application equipment **210**, and compaction roller **248** of adhesive application equipment **210** applies pressure **256** in the range of 40 psi to 50 psi.

In some illustrative examples, common feed system **212** feeds elongated member **213** beneath surface treatment equipment **208** and adhesive application equipment **210** at a rate of approximately five inches per second, surface treatment equipment **208** is configured such that heat **246** generated on surface **204** of elongated member **213** is about 122 degrees Fahrenheit, the speed of nozzles **250** of surface treatment equipment **208** in rpm is about 2800 rpm, the input pressure for nozzles **250** is in the range of about 50 psi to about 90 psi, the system clamp up of elongated member **213** is approximately 80 psi, distance **252** of nozzles **250** from surface **204** is 0.50 inches ± 0.10 inches, the overlap of nozzles **250** is set at 0.20 inches, ± 0.05 inches, vacuum of about 22 inches of Hg provided for a feed and cut sequence of adhesive application equipment **210**, and compaction roller **248** of adhesive application equipment **210** applies pressure **256** at approximately 45 psi.

The illustration of manufacturing environment **200** in **Figure 2** is not meant to imply physical or architectural limitations to the manner in which an illustrative embodiment may be implemented. Other components, in addition to or in place of the ones illustrated, may be used. Some components may be optional. Also, the blocks are presented to illustrate some functional components. One or more of these blocks may be combined, divided, or combined and divided into different blocks when implemented in an illustrative embodiment.

For example, adhesive application equipment **210** may have additional components not depicted in **Figure 2**. In some illustrative examples, optional profile cutters are present. In some illustrative examples, optional profile cutters are not present. Depending upon an implementation, elongated member **213** may not require a net cut edge.

With reference now to **Figures 3-6**, components of a system for treating a surface and applying adhesive to an already treated portion of the surface are depicted. The simplified views in **Figures 3-6** are shown independent of many associated utilities or mechanical supports. **Figures 3-6** are intended to provide a basic depiction of one illustrative example of a system for treating a surface and applying adhesive to an already treated portion of the surface. In operation, the system of **Figures 3-6** would be associated with at least one of electrical lines, communication lines, or a support table.

Turning now to **Figure 3**, an illustration of an isometric view of a system for treating a surface and applying adhesive to an already treated portion of the surface is depicted in accordance with an illustrative embodiment. System **300** is a physical implementation of system **202** of **Figure 2**. System **300** treats surface **302** and applies adhesive **304** to surface **302** of elongated member **306**. System **300** comprises surface treatment equipment **308**, adhesive application equipment **310**, and common feed system **312**.

Common feed system **312** feeds elongated member **306** through system **300**. Common feed system **312** feeds elongated member **306** in direction **314** through system **300**. System **300** comprises common feed system **312** for feeding elongated member **306** beneath surface treatment equipment **308** and adhesive application equipment **310** concurrently. Common feed system **312** for feeding elongated member **306** beneath surface treatment equipment **308** and adhesive application equipment **310** concurrently feeds elongated

member **306** beneath surface treatment equipment **308** and adhesive application equipment **310** at a common rate.

Surface treatment equipment **308** treats surface **302** of elongated member **306** as common feed system **312** feeds elongated member **306** beneath surface treatment equipment **308**. As depicted, surface treatment equipment **308** takes the form of atmospheric pressure plasma treatment equipment **316**. Atmospheric pressure plasma treatment equipment **316** treats surface **302** with atmospheric pressure plasma.

Adhesive application equipment **310** applies adhesive **304** to surface **302** as common feed system **312** feeds elongated member **306** beneath adhesive application equipment **310**. Adhesive **304** is applied to a portion of surface **302** after treating the portion of surface **302**.

Turning now to **Figure 4**, an illustration of a perspective view of a system for treating a surface and applying adhesive to an already treated portion of the surface is depicted in accordance with an illustrative embodiment. Perspective view **400** is a view of system **300** from direction 4 of **Figure 3**.

Common feed system **312** controls the constant rate that elongated member **306** is fed beneath surface treatment equipment **308** and adhesive application equipment **310**. Common feed system **312** centers the constant rate of elongated member **306** relative to surface treatment equipment **308** and adhesive application equipment **310**.

Drive equipment **402** of common feed system **312** feeds elongated member **306** through system **300**. Drive equipment **402** includes plurality of drive wheels **404** and indexing equipment **406**.

Common feed system **312** also comprises number of roller systems **408**. Number of roller systems **408** includes rollers **410**, rollers **412**, and rollers **414**.

In view **400**, optional heater **416** is present. In some illustrative examples, optional heater **416** may be used to provide heat for application of adhesive **304**. Heat increases the tack of adhesive **304**.

5 As depicted, applying adhesive **304** to an already treated portion of surface **302** of elongated member **306** occurs in immediate succession after treating surface **302**. In some illustrative examples, additional heat is not provided between treating surface **302** and applying adhesive **304**. In these
10 illustrative examples, optional heater **416** is either not present or not used during application of adhesive **304**.

Turning now to **Figure 5**, an illustration of a side view of a system for treating a surface and applying adhesive to an already treated portion of the surface is depicted in accordance
15 with an illustrative embodiment. Side view **500** is a view of system **300** from direction 5 of **Figure 4**.

In this illustrative example, distance **502** between atmospheric pressure plasma treatment equipment **316** and adhesive application equipment **310** is sufficiently small such that heat
20 generated on surface **302** by atmospheric pressure plasma treatment equipment **316** increases the tack of adhesive **304**. Distance **502** is measured from compaction roller **504** to nozzles **506**.

Distance sensor **508** is visible in side view **500**. In
25 operation, distance sensor **508** measures distance from distance sensor **508** to surface **302** of elongated member **306**. Measurements from distance sensor **508** are used to determine distance from nozzles **506** to surface **302** of elongated member **306**. Measurements from distance sensor **508** are used to determine if
30 atmospheric pressure plasma treatment equipment **316** should be moved upward or downward in direction **509** relative to base **510**. In some illustrative examples, the distance from nozzles **506** to surface **302** is desirably 0.50 inches, ± 0.10 inches.

Turning now to **Figure 6**, an illustration of a top view of a system for treating a surface and applying adhesive to an already treated portion of the surface is depicted in accordance with an illustrative embodiment. Top view **600** is a view of
5 system **300** from direction 6 of **Figure 5**.

As depicted, common feed system **312** centers elongated member **306** relative to surface treatment equipment **308** and adhesive application equipment **310**. As depicted, nozzles **506** are offset at an angle relative to centerline **602** of elongated
10 member **306**. By being offset, all of surface **302** will be affected by surface treatment equipment **308** in the form of atmospheric pressure plasma treatment equipment **316**.

In some illustrative examples, common feed system **312** feeds elongated member **306** beneath atmospheric pressure plasma
15 treatment equipment **316** and adhesive application equipment **310** at a rate in a range of one inches per second to ten inches per second and compaction roller **504** of adhesive application equipment **310** applies pressure in the range of 35 psi to 55 psi.

In some illustrative examples, common feed system **312** feeds elongated member **306** beneath atmospheric pressure plasma
20 treatment equipment **316** and adhesive application equipment **310** at a rate in a range of three inches per second to eight inches per second and compaction roller **504** of adhesive application equipment **310** applies pressure in the range of 35 psi to 55 psi.

25 In some illustrative examples, common feed system **312** feeds elongated member **306** beneath atmospheric pressure plasma treatment equipment **316** and adhesive application equipment **310** at a rate in a range of three inches per second to eight inches per second and compaction roller **504** of adhesive application
30 equipment **310** applies pressure in the range of 40 psi to 50 psi.

In some illustrative examples, common feed system **312** feeds elongated member **306** beneath atmospheric pressure plasma treatment equipment **316** and adhesive application equipment **310**

at a rate in a range of three inches per second to eight inches per second and compaction roller **504** of adhesive application equipment **310** applies pressure at approximately 45 psi.

In some illustrative examples, common feed system **312** feeds elongated member **306** beneath atmospheric pressure plasma treatment equipment **316** and adhesive application equipment **310** at a rate in a range of one inch per second to six inches per second and compaction roller **504** of adhesive application equipment **310** applies pressure in the range of 35 psi to 55 psi.

In some illustrative examples, common feed system **312** feeds elongated member **306** beneath atmospheric pressure plasma treatment equipment **316** and adhesive application equipment **310** at a rate in a range of one inch per second to six inches per second and compaction roller **504** of adhesive application equipment **310** applies pressure in the range of 40 psi to 50 psi.

In some illustrative examples, common feed system **312** feeds elongated member **306** beneath atmospheric pressure plasma treatment equipment **316** and adhesive application equipment **310** at a rate in a range of one inch per second to six inches per second and compaction roller **504** of adhesive application equipment **310** applies pressure at approximately 45 psi.

In some illustrative examples, common feed system **312** feeds elongated member **306** beneath atmospheric pressure plasma treatment equipment **316** and adhesive application equipment **310** at a rate in a range of five inches per second to six inches per second and compaction roller **504** of adhesive application equipment **310** applies pressure in the range of 35 psi to 55 psi.

In some illustrative examples, common feed system **312** feeds elongated member **306** beneath atmospheric pressure plasma treatment equipment **316** and adhesive application equipment **310** at a rate in a range of five inches per second to six inches per second and compaction roller **504** of adhesive application equipment **310** applies pressure in the range of 40 psi to 50 psi.

In some illustrative examples, common feed system **312** feeds elongated member **306** beneath atmospheric pressure plasma treatment equipment **316** and adhesive application equipment **310** at a rate in a range of five inches per second to six inches per second and compaction roller **504** of adhesive application equipment **310** applies pressure at approximately 45 psi.

In some illustrative examples, common feed system **312** feeds elongated member **306** beneath atmospheric pressure plasma treatment equipment **316** and adhesive application equipment **310** at a rate of approximately five inches per second and compaction roller **504** of adhesive application equipment **310** applies pressure in the range of 35 psi to 55 psi.

In some illustrative examples, common feed system **312** feeds elongated member **306** beneath atmospheric pressure plasma treatment equipment **316** and adhesive application equipment **310** at a rate of approximately five inches per second and compaction roller **504** of adhesive application equipment **310** applies pressure in the range of 40 psi to 50 psi.

In some illustrative examples, common feed system **312** feeds elongated member **306** beneath atmospheric pressure plasma treatment equipment **316** and adhesive application equipment **310** at a rate of approximately five inches per second and compaction roller **504** of adhesive application equipment **310** applies pressure at approximately 45 psi.

In some illustrative examples, common feed system **312** feeds elongated member **306** beneath atmospheric pressure plasma treatment equipment **316** and adhesive application equipment **310** at a rate in a range of one inches per second to ten inches per second, input pressure for nozzles **506** of atmospheric pressure plasma treatment equipment **316** is in the range of about 50 psi to about 90 psi, and compaction roller **504** of adhesive application equipment **310** applies pressure in the range of 35 psi to 55 psi.

In some illustrative examples, common feed system **312** feeds elongated member **306** beneath atmospheric pressure plasma treatment equipment **316** and adhesive application equipment **310** at a rate in a range of three inches per second to eight inches per second, input pressure for nozzles **506** of atmospheric pressure plasma treatment equipment **316** is in the range of about 50 psi to about 90 psi, and compaction roller **504** of adhesive application equipment **310** applies pressure in the range of 35 psi to 55 psi.

10 In some illustrative examples, common feed system **312** feeds elongated member **306** beneath atmospheric pressure plasma treatment equipment **316** and adhesive application equipment **310** at a rate in a range of three inches per second to eight inches per second, input pressure for nozzles **506** of atmospheric pressure plasma treatment equipment **316** is in the range of about 15 50 psi to about 90 psi, and compaction roller **504** of adhesive application equipment **310** applies pressure in the range of 40 psi to 50 psi.

In some illustrative examples, common feed system **312** feeds elongated member **306** beneath atmospheric pressure plasma treatment equipment **316** and adhesive application equipment **310** at a rate in a range of three inches per second to eight inches per second, input pressure for nozzles **506** of atmospheric pressure plasma treatment equipment **316** is in the range of about 20 50 psi to about 90 psi, and compaction roller **504** of adhesive application equipment **310** applies pressure at approximately 45 psi.

In some illustrative examples, common feed system **312** feeds elongated member **306** beneath atmospheric pressure plasma treatment equipment **316** and adhesive application equipment **310** at a rate in a range of five inches per second to six inches per second, input pressure for nozzles **506** of atmospheric pressure plasma treatment equipment **316** is in the range of about 50 psi

to about 90 psi, and compaction roller **504** of adhesive application equipment **310** applies pressure in the range of 35 psi to 55 psi.

In some illustrative examples, common feed system **312** feeds
5 elongated member **306** beneath atmospheric pressure plasma treatment equipment **316** and adhesive application equipment **310** at a rate in a range of five inches per second to six inches per second, input pressure for nozzles **506** of atmospheric pressure plasma treatment equipment **316** is in the range of about 50 psi
10 to about 90 psi, and compaction roller **504** of adhesive application equipment **310** applies pressure in the range of 40 psi to 50 psi.

In some illustrative examples, common feed system **312** feeds elongated member **306** beneath atmospheric pressure plasma
15 treatment equipment **316** and adhesive application equipment **310** at a rate in a range of five inches per second to six inches per second, input pressure for nozzles **506** of atmospheric pressure plasma treatment equipment **316** is in the range of about 50 psi to about 90 psi, and compaction roller **504** of adhesive
20 application equipment **310** applies pressure at approximately 45 psi.

In some illustrative examples, common feed system **312** feeds elongated member **306** beneath atmospheric pressure plasma treatment equipment **316** and adhesive application equipment **310**
25 at a rate of approximately five inches per second, input pressure for nozzles **506** of atmospheric pressure plasma treatment equipment **316** is in the range of about 50 psi to about 90 psi, and compaction roller **504** of adhesive application equipment **310** applies pressure in the range of 35 psi to 55 psi.

30 In some illustrative examples, common feed system **312** feeds elongated member **306** beneath atmospheric pressure plasma treatment equipment **316** and adhesive application equipment **310** at a rate of approximately five inches per second, input

pressure for nozzles **506** of atmospheric pressure plasma treatment equipment **316** is in the range of about 50 psi to about 90 psi, and compaction roller **504** of adhesive application equipment **310** applies pressure in the range of 40 psi to 50 psi.

5 In some illustrative examples, common feed system **312** feeds elongated member **306** beneath atmospheric pressure plasma treatment equipment **316** and adhesive application equipment **310** at a rate of approximately five inches per second, input pressure for nozzles **506** of atmospheric pressure plasma
10 treatment equipment **316** is in the range of about 50 psi to about 90 psi, and compaction roller **504** of adhesive application equipment **310** applies pressure at approximately 45 psi.

 In some illustrative examples, common feed system **312** feeds elongated member **306** beneath atmospheric pressure plasma
15 treatment equipment **316** and adhesive application equipment **310** at a rate in a range of one inches per second to ten inches per second, the speed of nozzles **506** of atmospheric pressure plasma treatment equipment **316** in rpm is in the range of 2400 rpm to 3200 rpm, and compaction roller **504** of adhesive application
20 equipment **310** applies pressure in the range of 35 psi to 55 psi.

 In some illustrative examples, common feed system **312** feeds elongated member **306** beneath atmospheric pressure plasma treatment equipment **316** and adhesive application equipment **310** at a rate in a range of three inches per second to eight inches
25 per second, the speed of nozzles **506** of atmospheric pressure plasma treatment equipment **316** in rpm is in the range of 2400 rpm to 3200 rpm, and compaction roller **504** of adhesive application equipment **310** applies pressure in the range of 35 psi to 55 psi.

30 In some illustrative examples, common feed system **312** feeds elongated member **306** beneath atmospheric pressure plasma treatment equipment **316** and adhesive application equipment **310** at a rate in a range of three inches per second to eight inches

per second, the speed of nozzles **506** of atmospheric pressure plasma treatment equipment **316** in rpm is in the range of 2400 rpm to 3200 rpm, and compaction roller **504** of adhesive application equipment **310** applies pressure in the range of 40
5 psi to 50 psi.

In some illustrative examples, common feed system **312** feeds elongated member **306** beneath atmospheric pressure plasma treatment equipment **316** and adhesive application equipment **310** at a rate in a range of three inches per second to eight inches
10 per second, the speed of nozzles **506** of atmospheric pressure plasma treatment equipment **316** in rpm is in the range of 2400 rpm to 3200 rpm, and compaction roller **504** of adhesive application equipment **310** applies pressure at approximately 45 psi.

15 In some illustrative examples, common feed system **312** feeds elongated member **306** beneath atmospheric pressure plasma treatment equipment **316** and adhesive application equipment **310** at a rate in a range of five inches per second to six inches per second, the speed of nozzles **506** of atmospheric pressure plasma
20 treatment equipment **316** in rpm is in the range of 2400 rpm to 3200 rpm, and compaction roller **504** of adhesive application equipment **310** applies pressure in the range of 35 psi to 55 psi.

In some illustrative examples, common feed system **312** feeds elongated member **306** beneath atmospheric pressure plasma
25 treatment equipment **316** and adhesive application equipment **310** at a rate in a range of five inches per second to six inches per second, the speed of nozzles **506** of atmospheric pressure plasma treatment equipment **316** in rpm is in the range of 2400 rpm to 3200 rpm, and compaction roller **504** of adhesive application
30 equipment **310** applies pressure in the range of 40 psi to 50 psi.

In some illustrative examples, common feed system **312** feeds elongated member **306** beneath atmospheric pressure plasma treatment equipment **316** and adhesive application equipment **310**

at a rate in a range of five inches per second to six inches per second, the speed of nozzles **506** of atmospheric pressure plasma treatment equipment **316** in rpm is in the range of 2400 rpm to 3200 rpm, and compaction roller **504** of adhesive application
5 equipment **310** applies pressure at approximately 45 psi.

In some illustrative examples, common feed system **312** feeds elongated member **306** beneath atmospheric pressure plasma treatment equipment **316** and adhesive application equipment **310** at a rate of approximately five inches per second, the speed of
10 nozzles **506** of atmospheric pressure plasma treatment equipment **316** in rpm is in the range of 2400 rpm to 3200 rpm, and compaction roller **504** of adhesive application equipment **310** applies pressure in the range of 35 psi to 55 psi.

In some illustrative examples, common feed system **312** feeds
15 elongated member **306** beneath atmospheric pressure plasma treatment equipment **316** and adhesive application equipment **310** at a rate of approximately five inches per second, the speed of nozzles **506** of atmospheric pressure plasma treatment equipment **316** in rpm is in the range of 2400 rpm to 3200 rpm, and
20 compaction roller **504** of adhesive application equipment **310** applies pressure in the range of 40 psi to 50 psi.

In some illustrative examples, common feed system **312** feeds elongated member **306** beneath atmospheric pressure plasma treatment equipment **316** and adhesive application equipment **310**
25 at a rate of approximately five inches per second, the speed of nozzles **506** of atmospheric pressure plasma treatment equipment **316** in rpm is in the range of 2400 rpm to 3200 rpm, and compaction roller **504** of adhesive application equipment **310** applies pressure at approximately 45 psi.

30 In some illustrative examples, common feed system **312** feeds elongated member **306** beneath atmospheric pressure plasma treatment equipment **316** and adhesive application equipment **310** at a rate in a range of one inches per second to ten inches per

second, the speed of nozzles **506** of atmospheric pressure plasma treatment equipment **316** in rpm is desirably 2800 rpm, and compaction roller **504** of adhesive application equipment **310** applies pressure in the range of 35 psi to 55 psi.

5 In some illustrative examples, common feed system **312** feeds elongated member **306** beneath atmospheric pressure plasma treatment equipment **316** and adhesive application equipment **310** at a rate in a range of three inches per second to eight inches per second, the speed of nozzles **506** of atmospheric pressure
10 plasma treatment equipment **316** in rpm is desirably 2800 rpm, and compaction roller **504** of adhesive application equipment **310** applies pressure in the range of 35 psi to 55 psi.

 In some illustrative examples, common feed system **312** feeds elongated member **306** beneath atmospheric pressure plasma
15 treatment equipment **316** and adhesive application equipment **310** at a rate in a range of three inches per second to eight inches per second, the speed of nozzles **506** of atmospheric pressure plasma treatment equipment **316** in rpm is desirably 2800 rpm, and compaction roller **504** of adhesive application equipment **310**
20 applies pressure in the range of 40 psi to 50 psi.

 In some illustrative examples, common feed system **312** feeds elongated member **306** beneath atmospheric pressure plasma treatment equipment **316** and adhesive application equipment **310** at a rate in a range of three inches per second to eight inches
25 per second, the speed of nozzles **506** of atmospheric pressure plasma treatment equipment **316** in rpm is desirably 2800 rpm, and compaction roller **504** of adhesive application equipment **310** applies pressure at approximately 45 psi.

 In some illustrative examples, common feed system **312** feeds
30 elongated member **306** beneath atmospheric pressure plasma treatment equipment **316** and adhesive application equipment **310** at a rate in a range of five inches per second to six inches per second, the speed of nozzles **506** of atmospheric pressure plasma

treatment equipment **316** in rpm is desirably 2800 rpm, and compaction roller **504** of adhesive application equipment **310** applies pressure in the range of 35 psi to 55 psi.

In some illustrative examples, common feed system **312** feeds
5 elongated member **306** beneath atmospheric pressure plasma treatment equipment **316** and adhesive application equipment **310** at a rate in a range of five inches per second to six inches per second, the speed of nozzles **506** of atmospheric pressure plasma treatment equipment **316** in rpm is desirably 2800 rpm, and
10 compaction roller **504** of adhesive application equipment **310** applies pressure in the range of 40 psi to 50 psi.

In some illustrative examples, common feed system **312** feeds elongated member **306** beneath atmospheric pressure plasma treatment equipment **316** and adhesive application equipment **310**
15 at a rate in a range of five inches per second to six inches per second, the speed of nozzles **506** of atmospheric pressure plasma treatment equipment **316** in rpm is desirably 2800 rpm, and compaction roller **504** of adhesive application equipment **310** applies pressure at approximately 45 psi.

In some illustrative examples, common feed system **312** feeds elongated member **306** beneath atmospheric pressure plasma treatment equipment **316** and adhesive application equipment **310** at a rate of approximately five inches per second, the speed of nozzles **506** of atmospheric pressure plasma treatment equipment
25 **316** in rpm is desirably 2800 rpm, and compaction roller **504** of adhesive application equipment **310** applies pressure in the range of 35 psi to 55 psi.

In some illustrative examples, common feed system **312** feeds elongated member **306** beneath atmospheric pressure plasma
30 treatment equipment **316** and adhesive application equipment **310** at a rate of approximately five inches per second, the speed of nozzles **506** of atmospheric pressure plasma treatment equipment **316** in rpm is desirably 2800 rpm, and compaction roller **504** of

adhesive application equipment **310** applies pressure in the range of 40 psi to 50 psi.

In some illustrative examples, common feed system **312** feeds elongated member **306** beneath atmospheric pressure plasma treatment equipment **316** and adhesive application equipment **310** at a rate of approximately five inches per second, the speed of nozzles **506** of atmospheric pressure plasma treatment equipment **316** in rpm is desirably 2800 rpm, and compaction roller **504** of adhesive application equipment **310** applies pressure at approximately 45 psi.

In some illustrative examples, common feed system **312** feeds elongated member **306** beneath atmospheric pressure plasma treatment equipment **316** and adhesive application equipment **310** at a rate in a range of one inches per second to ten inches per second, the system clamp up of elongated member **306** is in the range of 65 psi to 95 psi, and compaction roller **504** of adhesive application equipment **310** applies pressure in the range of 35 psi to 55 psi.

In some illustrative examples, common feed system **312** feeds elongated member **306** beneath atmospheric pressure plasma treatment equipment **316** and adhesive application equipment **310** at a rate in a range of three inches per second to eight inches per second, the system clamp up of elongated member **306** is in the range of 65 psi to 95 psi, and compaction roller **504** of adhesive application equipment **310** applies pressure in the range of 35 psi to 55 psi.

In some illustrative examples, common feed system **312** feeds elongated member **306** beneath atmospheric pressure plasma treatment equipment **316** and adhesive application equipment **310** at a rate in a range of three inches per second to eight inches per second, the system clamp up of elongated member **306** is in the range of 65 psi to 95 psi, and compaction roller **504** of

adhesive application equipment **310** applies pressure in the range of 40 psi to 50 psi.

In some illustrative examples, common feed system **312** feeds elongated member **306** beneath atmospheric pressure plasma treatment equipment **316** and adhesive application equipment **310** at a rate in a range of three inches per second to eight inches per second, the system clamp up of elongated member **306** is in the range of 65 psi to 95 psi, and compaction roller **504** of adhesive application equipment **310** applies pressure at approximately 45 psi.

In some illustrative examples, common feed system **312** feeds elongated member **306** beneath atmospheric pressure plasma treatment equipment **316** and adhesive application equipment **310** at a rate in a range of five inches per second to six inches per second, the system clamp up of elongated member **306** is in the range of 65 psi to 95 psi, and compaction roller **504** of adhesive application equipment **310** applies pressure in the range of 35 psi to 55 psi.

In some illustrative examples, common feed system **312** feeds elongated member **306** beneath atmospheric pressure plasma treatment equipment **316** and adhesive application equipment **310** at a rate in a range of five inches per second to six inches per second, the system clamp up of elongated member **306** is in the range of 65 psi to 95 psi, and compaction roller **504** of adhesive application equipment **310** applies pressure in the range of 40 psi to 50 psi.

In some illustrative examples, common feed system **312** feeds elongated member **306** beneath atmospheric pressure plasma treatment equipment **316** and adhesive application equipment **310** at a rate in a range of five inches per second to six inches per second, the system clamp up of elongated member **306** is in the range of 65 psi to 95 psi, and compaction roller **504** of adhesive

application equipment **310** applies pressure at approximately 45 psi.

In some illustrative examples, common feed system **312** feeds elongated member **306** beneath atmospheric pressure plasma treatment equipment **316** and adhesive application equipment **310** at a rate of approximately five inches per second, the system clamp up of elongated member **306** is in the range of 65 psi to 95 psi, and compaction roller **504** of adhesive application equipment **310** applies pressure in the range of 35 psi to 55 psi.

In some illustrative examples, common feed system **312** feeds elongated member **306** beneath atmospheric pressure plasma treatment equipment **316** and adhesive application equipment **310** at a rate of approximately five inches per second, the system clamp up of elongated member **306** is in the range of 65 psi to 95 psi, and compaction roller **504** of adhesive application equipment **310** applies pressure in the range of 40 psi to 50 psi.

In some illustrative examples, common feed system **312** feeds elongated member **306** beneath atmospheric pressure plasma treatment equipment **316** and adhesive application equipment **310** at a rate of approximately five inches per second, the system clamp up of elongated member **306** is in the range of 65 psi to 95 psi, and compaction roller **504** of adhesive application equipment **310** applies pressure at approximately 45 psi.

In some illustrative examples, common feed system **312** feeds elongated member **306** beneath atmospheric pressure plasma treatment equipment **316** and adhesive application equipment **310** at a rate in a range of one inches per second to ten inches per second, the system clamp up of elongated member **306** is desirably about 80 psi, and compaction roller **504** of adhesive application equipment **310** applies pressure in the range of 35 psi to 55 psi.

In some illustrative examples, common feed system **312** feeds elongated member **306** beneath atmospheric pressure plasma treatment equipment **316** and adhesive application equipment **310**

at a rate in a range of three inches per second to eight inches per second, the system clamp up of elongated member **306** is desirably about 80 psi, and compaction roller **504** of adhesive application equipment **310** applies pressure in the range of 35
5 psi to 55 psi.

In some illustrative examples, common feed system **312** feeds elongated member **306** beneath atmospheric pressure plasma treatment equipment **316** and adhesive application equipment **310** at a rate in a range of three inches per second to eight inches
10 per second, the system clamp up of elongated member **306** is desirably about 80 psi, and compaction roller **504** of adhesive application equipment **310** applies pressure in the range of 40 psi to 50 psi.

In some illustrative examples, common feed system **312** feeds
15 elongated member **306** beneath atmospheric pressure plasma treatment equipment **316** and adhesive application equipment **310** at a rate in a range of three inches per second to eight inches per second, the system clamp up of elongated member **306** is desirably about 80 psi, and compaction roller **504** of adhesive
20 application equipment **310** applies pressure at approximately 45 psi.

In some illustrative examples, common feed system **312** feeds elongated member **306** beneath atmospheric pressure plasma treatment equipment **316** and adhesive application equipment **310**
25 at a rate in a range of five inches per second to six inches per second, the system clamp up of elongated member **306** is desirably about 80 psi, and compaction roller **504** of adhesive application equipment **310** applies pressure in the range of 35 psi to 55 psi.

In some illustrative examples, common feed system **312** feeds
30 elongated member **306** beneath atmospheric pressure plasma treatment equipment **316** and adhesive application equipment **310** at a rate in a range of five inches per second to six inches per second, the system clamp up of elongated member **306** is desirably

about 80 psi, and compaction roller **504** of adhesive application equipment **310** applies pressure in the range of 40 psi to 50 psi.

In some illustrative examples, common feed system **312** feeds elongated member **306** beneath atmospheric pressure plasma

5 treatment equipment **316** and adhesive application equipment **310** at a rate in a range of five inches per second to six inches per second, the system clamp up of elongated member **306** is desirably about 80 psi, and compaction roller **504** of adhesive application equipment **310** applies pressure at approximately 45 psi.

10 In some illustrative examples, common feed system **312** feeds elongated member **306** beneath atmospheric pressure plasma treatment equipment **316** and adhesive application equipment **310** at a rate of approximately five inches per second, the system clamp up of elongated member **306** is desirably about 80 psi, and
15 compaction roller **504** of adhesive application equipment **310** applies pressure in the range of 35 psi to 55 psi.

In some illustrative examples, common feed system **312** feeds elongated member **306** beneath atmospheric pressure plasma treatment equipment **316** and adhesive application equipment **310**
20 at a rate of approximately five inches per second, the system clamp up of elongated member **306** is desirably about 80 psi, and compaction roller **504** of adhesive application equipment **310** applies pressure in the range of 40 psi to 50 psi.

In some illustrative examples, common feed system **312** feeds
25 elongated member **306** beneath atmospheric pressure plasma treatment equipment **316** and adhesive application equipment **310** at a rate of approximately five inches per second, the system clamp up of elongated member **306** is desirably about 80 psi, and compaction roller **504** of adhesive application equipment **310**
30 applies pressure at approximately 45 psi.

In some illustrative examples, common feed system **312** feeds elongated member **306** beneath atmospheric pressure plasma treatment equipment **316** and adhesive application equipment **310**

at a rate in a range of one inches per second to ten inches per second, atmospheric pressure plasma treatment equipment **316** is configured such that heat generated on surface **302** of elongated member **306** is between 105 degrees Fahrenheit and 140 degrees Fahrenheit, and compaction roller **504** of adhesive application equipment **310** applies pressure in the range of 35 psi to 55 psi.

In some illustrative examples, common feed system **312** feeds elongated member **306** beneath atmospheric pressure plasma treatment equipment **316** and adhesive application equipment **310** at a rate in a range of three inches per second to eight inches per second, atmospheric pressure plasma treatment equipment **316** is configured such that heat generated on surface **302** of elongated member **306** is between 105 degrees Fahrenheit and 140 degrees Fahrenheit, and compaction roller **504** of adhesive application equipment **310** applies pressure in the range of 35 psi to 55 psi.

In some illustrative examples, common feed system **312** feeds elongated member **306** beneath atmospheric pressure plasma treatment equipment **316** and adhesive application equipment **310** at a rate in a range of three inches per second to eight inches per second, atmospheric pressure plasma treatment equipment **316** is configured such that heat generated on surface **302** of elongated member **306** is between 105 degrees Fahrenheit and 140 degrees Fahrenheit, and compaction roller **504** of adhesive application equipment **310** applies pressure in the range of 40 psi to 50 psi.

In some illustrative examples, common feed system **312** feeds elongated member **306** beneath atmospheric pressure plasma treatment equipment **316** and adhesive application equipment **310** at a rate in a range of three inches per second to eight inches per second, atmospheric pressure plasma treatment equipment **316** is configured such that heat generated on surface **302** of elongated member **306** is between 105 degrees Fahrenheit and 140

degrees Fahrenheit, and compaction roller **504** of adhesive application equipment **310** applies pressure at approximately 45 psi.

In some illustrative examples, common feed system **312** feeds
5 elongated member **306** beneath atmospheric pressure plasma treatment equipment **316** and adhesive application equipment **310** at a rate in a range of five inches per second to six inches per second, atmospheric pressure plasma treatment equipment **316** is configured such that heat generated on surface **302** of elongated
10 member **306** is between 105 degrees Fahrenheit and 140 degrees Fahrenheit, and compaction roller **504** of adhesive application equipment **310** applies pressure in the range of 35 psi to 55 psi.

In some illustrative examples, common feed system **312** feeds elongated member **306** beneath atmospheric pressure plasma
15 treatment equipment **316** and adhesive application equipment **310** at a rate in a range of five inches per second to six inches per second, atmospheric pressure plasma treatment equipment **316** is configured such that heat generated on surface **302** of elongated member **306** is between 105 degrees Fahrenheit and 140 degrees
20 Fahrenheit, and compaction roller **504** of adhesive application equipment **310** applies pressure in the range of 40 psi to 50 psi.

In some illustrative examples, common feed system **312** feeds elongated member **306** beneath atmospheric pressure plasma treatment equipment **316** and adhesive application equipment **310**
25 at a rate in a range of five inches per second to six inches per second, atmospheric pressure plasma treatment equipment **316** is configured such that heat generated on surface **302** of elongated member **306** is between 105 degrees Fahrenheit and 140 degrees Fahrenheit, and compaction roller **504** of adhesive application
30 equipment **310** applies pressure at approximately 45 psi.

In some illustrative examples, common feed system **312** feeds elongated member **306** beneath atmospheric pressure plasma treatment equipment **316** and adhesive application equipment **310**

at a rate of approximately five inches per second, atmospheric pressure plasma treatment equipment **316** is configured such that heat generated on surface **302** of elongated member **306** is between 105 degrees Fahrenheit and 140 degrees Fahrenheit, and

5 compaction roller **504** of adhesive application equipment **310** applies pressure in the range of 35 psi to 55 psi.

In some illustrative examples, common feed system **312** feeds elongated member **306** beneath atmospheric pressure plasma treatment equipment **316** and adhesive application equipment **310**

10 at a rate of approximately five inches per second, atmospheric pressure plasma treatment equipment **316** is configured such that heat generated on surface **302** of elongated member **306** is between 105 degrees Fahrenheit and 140 degrees Fahrenheit, and compaction roller **504** of adhesive application equipment **310**
15 applies pressure in the range of 40 psi to 50 psi.

In some illustrative examples, common feed system **312** feeds elongated member **306** beneath atmospheric pressure plasma treatment equipment **316** and adhesive application equipment **310** at a rate of approximately five inches per second, atmospheric
20 pressure plasma treatment equipment **316** is configured such that heat generated on surface **302** of elongated member **306** is between 105 degrees Fahrenheit and 140 degrees Fahrenheit, and compaction roller **504** of adhesive application equipment **310** applies pressure at approximately 45 psi.

25 In some illustrative examples, common feed system **312** feeds elongated member **306** beneath atmospheric pressure plasma treatment equipment **316** and adhesive application equipment **310** at a rate of approximately five inches per second, atmospheric pressure plasma treatment equipment **316** is configured such that
30 heat generated on surface **302** of elongated member **306** is about 120 degrees Fahrenheit, and compaction roller **504** of adhesive application equipment **310** applies pressure at approximately 45 psi.

In some illustrative examples, common feed system **312** feeds elongated member **306** beneath atmospheric pressure plasma treatment equipment **316** and adhesive application equipment **310** at a rate of approximately five inches per second, atmospheric pressure plasma treatment equipment **316** is configured such that heat generated on surface **302** of elongated member **306** is between 105 degrees Fahrenheit and 140 degrees Fahrenheit, the input pressure for nozzles **506** of atmospheric pressure plasma treatment equipment **316** is in the range of about 50 psi to about 90 psi, and compaction roller **504** of adhesive application equipment **310** applies pressure at approximately 45 psi.

In some illustrative examples, common feed system **312** feeds elongated member **306** beneath atmospheric pressure plasma treatment equipment **316** and adhesive application equipment **310** at a rate of approximately five inches per second, atmospheric pressure plasma treatment equipment **316** is configured such that heat generated on surface **302** of elongated member **306** is between 105 degrees Fahrenheit and 140 degrees Fahrenheit, the speed of nozzles **506** in rpm is in the range of 2400 rpm to 3200 rpm, the input pressure for nozzles **506** is in the range of about 50 psi to about 90 psi, and compaction roller **504** of adhesive application equipment **310** applies pressure at approximately 45 psi.

In some illustrative examples, common feed system **312** feeds elongated member **306** beneath atmospheric pressure plasma treatment equipment **316** and adhesive application equipment **310** at a rate in a range of one inch per second to ten inches per second, atmospheric pressure plasma treatment equipment **316** is configured such that heat generated on surface **302** of elongated member **306** is between 105 degrees Fahrenheit and 140 degrees Fahrenheit, the speed of nozzles **506** of atmospheric pressure plasma treatment equipment **316** in rpm is in the range of 2400 rpm to 3200 rpm, the input pressure for nozzles **506** is in the

range of about 50 psi to about 90 psi, the system clamp up of elongated member **306** is in the range of 65 psi to 95 psi, distance of nozzles **506** from surface **302** is 0.50 inches ± 0.10 inches, the overlap of nozzles **506** is set at 0.20 inches, ± 0.05 inches, vacuum of 18 to 24 inches of Hg is provided for a feed and cut sequence of adhesive application equipment **310**, and compaction roller **504** of adhesive application equipment **310** applies pressure **256** in the range of 35 psi to 55 psi.

In some illustrative examples, common feed system **312** feeds elongated member **306** beneath atmospheric pressure plasma treatment equipment **316** and adhesive application equipment **310** at a rate of approximately five inches per second, atmospheric pressure plasma treatment equipment **316** is configured such that heat generated on surface **302** of elongated member **306** is between 105 degrees Fahrenheit and 140 degrees Fahrenheit, the speed of nozzles **506** of atmospheric pressure plasma treatment equipment **316** in rpm is in the range of 2400 rpm to 3200 rpm, the input pressure for nozzles **506** is in the range of about 50 psi to about 90 psi, the system clamp up of elongated member **306** is in the range of 65 psi to 95 psi, distance of nozzles **506** from surface **302** is 0.50 inches ± 0.10 inches, the overlap of nozzles **506** is set at 0.20 inches, ± 0.05 inches, vacuum of 18 to 24 inches of Hg is provided for a feed and cut sequence of adhesive application equipment **310**, and compaction roller **504** of adhesive application equipment **310** applies pressure **256** at approximately 45 psi.

In some illustrative examples, common feed system **312** feeds elongated member **306** beneath atmospheric pressure plasma treatment equipment **316** and adhesive application equipment **310** at a rate of approximately five inches per second, atmospheric pressure plasma treatment equipment **316** is configured such that heat generated on surface **302** of elongated member **306** is about 122 degrees Fahrenheit, the speed of nozzles **506** of atmospheric

pressure plasma treatment equipment **316** in rpm is about 2800 rpm, the input pressure for nozzles **506** is in the range of about 50 psi to about 90 psi, the system clamp up of elongated member **306** is approximately 80 psi, distance of nozzles **506** from surface **302** is 0.50 inches ± 0.10 inches, the overlap of nozzles **506** is set at 0.20 inches, ± 0.05 inches, vacuum of about 22 inches of Hg provided for a feed and cut sequence of adhesive application equipment **310**, and compaction roller **504** of adhesive application equipment **310** applies pressure **256** at approximately 45 psi.

With reference now to **Figures 7-9**, components of a common feed system are depicted. The simplified views in **Figures 7-9** are shown independent of any associated utilities or mechanical supports. **Figures 7-9** are intended to provide a basic depiction of one illustrative example of a common feed system. In operation, the common feed system of **Figures 7-9** would be associated with at least one of electrical lines, communication lines, or a support table.

Turning now to **Figure 7**, an illustration of an isometric view of a common feed system for use in a system for treating a surface and applying adhesive to an already treated portion of the surface is depicted in accordance with an illustrative embodiment. In view **700**, common feed system **312** of system **300** is depicted without surface treatment equipment **308** or adhesive application equipment **310** of **Figures 3-6** for simplicity.

Common feed system **312** is connected to base **510**. Common feed system **312** includes inlet drive equipment **704** and outlet drive equipment **706**. Inlet drive equipment **704** includes drive wheels **708** and retractable wheel assembly **710**. Outlet drive equipment **706** includes drive wheels **712** and retractable wheel assembly **714**.

Inlet drive equipment **704** and outlet drive equipment **706** may at least one of push or pull elongated member **306** through

system **300**. Inlet drive equipment **704** and outlet drive equipment **706** center an elongated member (not depicted in **Figure 7**) relative to horizontal plane **716**. Drive wheels **708** and drive wheels **712** are driven by variable speed motors beneath base **510**.

5 Turning now to **Figure 8**, an illustration of a side view of a common feed system for use in a system for treating a surface and applying adhesive to an already treated portion of the surface is depicted in accordance with an illustrative embodiment. In side view **800**, common feed system **312** of system
10 **300** is depicted without surface treatment equipment **308** or adhesive application equipment **310** of **Figures 3-6** for simplicity.

Indexing sensors **802** are visible in side view **800**. Each of indexing sensors **802** are attached to base **510**. Indexing sensors
15 **802** detect the location of and keep track of the leading and trailing edges of an elongated member (not depicted on **Figure 8**) for proper indexing of the elongated member for processing, and the start and stop of system **300**. Indexing sensors **802** extend through base **510**.

20 Turning now to **Figure 9**, an illustration of a top view of a common feed system for use in a system for treating a surface and applying adhesive to an already treated portion of the surface is depicted in accordance with an illustrative embodiment. In top view **900**, common feed system **312** of system
25 **300** is depicted without surface treatment equipment **308** or adhesive application equipment **310** of **Figures 3-6** for simplicity. Top view **900** provides a vantage point for observing the distances between the components of common feed system **312** and the interaction between indexing sensors **802** and common feed
30 system **312**. Top view **900** also provides a vantage point for direction **902** of movement for retractable wheel assembly **710** and retractable wheel assembly **714**.

The different components shown in **Figure 1** and **Figures 3-9** may be combined with components in **Figure 2**, used with components in **Figure 2**, or a combination of the two.

Additionally, some of the components in **Figure 1** and **Figures 3-9** may be illustrative examples of how components shown in block form in **Figure 2** may be implemented as physical structures.

Turning now to **Figure 10**, an illustration of a flowchart of a method for processing an elongated member is depicted in accordance with an illustrative embodiment. System **202** may use method **1000** to process elongated member **213** of **Figure 2**. System **300** may use method **1000** to process elongated member **306** of **Figure 3**.

Method **1000** simultaneously treats a surface of an elongated member and applies adhesive to an already treated portion of the surface of the elongated member by a system comprising surface treatment equipment and adhesive application equipment, wherein the system applies surface treatment to the surface in a continuous automated fashion and applies the adhesive to the already treated portion of the surface in a continuous automated fashion (operation **1002**). Afterwards the method terminates.

Turning now to **Figure 11**, an illustration of a flowchart of a method for processing an elongated member is depicted in accordance with an illustrative embodiment. System **202** may use method **1100** to process elongated member **213** of **Figure 2**. System **300** may use method **1100** to process elongated member **306** of **Figure 3**.

Method **1100** feeds an elongated member through a system using a common feed system (operation **1102**). Method **1100** treats a surface of the elongated member using surface treatment equipment as the common feed system feeds the elongated member beneath the surface treatment equipment (operation **1104**). In some illustrative examples, treating the surface of the elongated member using surface treatment equipment comprises

treating the surface with atmospheric pressure plasma treatment equipment.

Method **1100** applies an adhesive to the surface of the elongated member, wherein the adhesive is applied to a portion
5 of the surface after treating the portion of the surface, wherein the adhesive is applied to the surface by adhesive application equipment as the common feed system feeds the elongated member beneath the adhesive application equipment (operation **1106**). Afterwards, the method terminates.

10 In some illustrative examples, the adhesive is applied continuously onto the surface. In some illustrative examples, applying the adhesive comprises compacting the adhesive using between 35 pounds per square inch and 55 pounds per square inch of pressure.

15 In some illustrative examples, the surface of the elongated member is fed beneath the surface treatment equipment and the adhesive application equipment at a rate of between one inch per second and six inches per second. In some illustrative examples, the surface of the elongated member is fed
20 continuously beneath the surface treatment equipment and the adhesive application equipment. In some illustrative examples, applying the adhesive to the surface of the elongated member occurs in immediate succession after treating the surface, and wherein additional heat is not provided between treating the
25 surface and applying the adhesive.

The flowcharts and block diagrams in the different depicted embodiments illustrate the architecture, functionality, and operation of some possible implementations of apparatus and methods in an illustrative embodiment. In this regard, each
30 block in the flowcharts or block diagrams may represent a module, a segment, a function, and/or a portion of an operation or step.

In some alternative implementations of an illustrative embodiment, the function or functions noted in the blocks may occur out of the order noted in the figures. For example, in some cases, two blocks shown in succession may be executed
5 substantially concurrently, or the blocks may sometimes be performed in the reverse order, depending upon the functionality involved. Also, other blocks may be added, in addition to the illustrated blocks, in a flowchart or block diagram.

In some illustrative examples, method **1000** may further
10 comprise moving the elongated member through the system at a constant rate. In some illustrative examples, the constant rate is in a range of one inch per second to six inches per second.

Illustrative embodiments of the present disclosure may be described in the context of aircraft manufacturing and service
15 method **1200** as shown in **Figure 12** and aircraft **1300** as shown in **Figure 13**. Turning first to **Figure 12**, an illustration of an aircraft manufacturing and service method is depicted in accordance with an illustrative embodiment. During pre-production, aircraft manufacturing and service method **1200** may
20 include specification and design **1202** of aircraft **1300** in **Figure 13** and material procurement **1204**.

During production, component and subassembly manufacturing **1206** and system integration **1208** of aircraft **1300** takes place. Thereafter, aircraft **1300** may go through certification and
25 delivery **1210** in order to be placed in service **1212**. While in service **1212** by a customer, aircraft **1300** is scheduled for routine maintenance and service **1214**, which may include modification, reconfiguration, refurbishment, or other maintenance and service.

Each of the processes of aircraft manufacturing and service
30 method **1200** may be performed or carried out by a system integrator, a third party, and/or an operator. In these examples, the operator may be a customer. For the purposes of

this description, a system integrator may include, without limitation, any number of aircraft manufacturers and major-system subcontractors; a third party may include, without limitation, any number of vendors, subcontractors, and
5 suppliers; and an operator may be an airline, a leasing company, a military entity, a service organization, and so on.

With reference now to **Figure 13**, an illustration of an aircraft is depicted in which an illustrative embodiment may be implemented. In this example, aircraft **1300** is produced by
10 aircraft manufacturing and service method **1200** of **Figure 12** and may include airframe **1302** with plurality of systems **1304** and interior **1306**. Examples of systems **1304** include one or more of propulsion system **1308**, electrical system **1310**, hydraulic system **1312**, and environmental system **1314**. Any number of other
15 systems may be included. Although an aerospace example is shown, different illustrative embodiments may be applied to other industries, such as the automotive industry.

Apparatuses and methods embodied herein may be employed during at least one of the stages of aircraft manufacturing and service method **1200**. As used herein, the phrase "at least one of," when used with a list of items, means different
20 combinations of one or more of the listed items may be used, and only one of each item in the list may be needed. In other words, "at least one of" means any combination of items and
25 number of items may be used from the list, but not all of the items in the list are required. The item may be a particular object, a thing, or a category.

For example, "at least one of item A, item B, or item C" may include, without limitation, item A, item A and item B, or
30 item B. This example also may include item A, item B, and item C, or item B and item C. Of course, any combination of these items may be present. In other examples, "at least one of" may be, for example, without limitation, two of item A, one of item

B, and ten of item C; four of item B and seven of item C; or other suitable combinations.

One or more illustrative embodiments may be used during at least one of component and subassembly manufacturing **1206**,
5 system integration **1208**, or maintenance and service **1214** of **Figure 12**. For example, system **202** of **Figure 2** may be used during component and subassembly manufacturing **1206** to apply adhesive **206** to elongated member **213** of **Figure 2**. Elongated member **306** of **Figure 3** may be processed during component and
10 subassembly manufacturing **1206** using at least one of method **1000** of **Figure 10** or method **1100** of **Figure 11**.

Elongated member **213** may be connected to aircraft **1300** during system integration **1208**. When elongated member **213** is a composite structure, elongated member **213** may be bonded to
15 another composite structure during system integration **1208**.

System **202** of **Figure 2** may be used to form replacement components used during maintenance and service **1214** of **Figure 12**. For example, system **202** may process elongated member **213** to treat surface **204** and apply adhesive **206** to form replacement
20 components used during maintenance and service **1214** of **Figure 12**.

Elongated member **213** of **Figure 2** or elongated member **306** of **Figure 3** may be attached to airframe **1302**. When an elongated member, such as elongated member **213** of **Figure 2** or elongated
25 member **306** of **Figure 3** is a composite structure, it may be bonded to another composite structure using the adhesive applied, to attach the elongated member to airframe **1302**.

The illustrative examples present a common feed system for surface treatment and adhesive application. The common feed
30 system enables concurrent surface treatment and adhesive processing. In both the surface treatment and the adhesive application the elongated member is sent through a mounted

system. Both the adhesive application equipment and surface treatment equipment are mounted.

Both the adhesive application equipment and surface treatment equipment are automated. The automation of atmospheric pressure plasma treatment and adhesive application will save touch labor and processing time. Further, the automation of atmospheric pressure plasma treatment and adhesive application will reduce or eliminate human intervention. Instead of having to manually feed the start sequence, the new system automates this process and requires little to no human intervention.

Additionally, in the illustrative examples, no human contact occurs with the free adhesive. The automated placement of the adhesive and a small distance between the atmospheric pressure plasma treatment equipment and the adhesive application equipment significantly reduces inconsistencies, such as foreign object debris (FOD).

In these illustrative examples, the system is static and the elongated members pass through it. The illustrative examples provide a combination of the two processes into one system with a common feeder, an automated cut/vacuum/shuttle sequence, and a resulting reduction of inconsistencies due to a reduction in distance and a reduction in manual handling of the adhesive. The new process is a completely automated system and process. The operator will insert an elongated member into one end of the system where a set of drive wheels will pull the structural component through both surface treatment and adhesive application stations in subsequent, automated steps. The beginning and stop/cut sequence of the adhesive application will also be completely automated. This affords multiple benefits, including reduced risk of inducing FOD, increased rate, more accurately placed adhesive, and a more robust process that combines multiple steps into a single streamlined process.

The illustrative examples eliminate time-consuming manual processing steps previously used to prepare the surface of an elongated member (i.e., a stringer or other similar structural component) for bonding. The illustrative examples replace
5 conventional manual sweeping with adhesive application by an automated pass-through system. The illustrative examples do not include transfer steps between conventional atmospheric pressure plasma treatment equipment and the manual adhesive application. By removing transfer steps from manufacturing process,
10 manufacturing time is reduced. The illustrative examples also reduce touch labor while increasing both rate and quality.

The illustrative examples increase reliability and increase repeatability over conventional processes and conventional tools. Further, the amount of equipment required is reduced
15 from conventional systems by utilizing this pass-through system. The illustrative examples reduce manufacturing cost by reducing manufacturing time, reducing touch time by operators, reducing waste from vacuum bagging, and reducing rework or replacement due to inconsistencies.

20 The description of the different illustrative embodiments has been presented for purposes of illustration and description, and is not intended to be exhaustive or limited to the embodiments in the form disclosed. Many modifications and variations will be apparent to those of ordinary skill in the art. Further, different illustrative embodiments may provide
25 different features as compared to other illustrative embodiments. The embodiment or embodiments selected are chosen and described in order to best explain the principles of the embodiments, the practical application, and to enable others of ordinary skill in the art to understand the disclosure for
30 various embodiments with various modifications as are suited to the particular use contemplated.

What is claimed is:

1. A system for treating a surface and applying adhesive to an already treated portion of the surface concurrently, the system comprising:

surface treatment equipment configured to treat the surface of an elongated member;

adhesive application equipment configured to apply the adhesive to the already treated portion of the surface; and

a common feed system for feeding the elongated member beneath the surface treatment equipment and the adhesive application equipment concurrently, wherein the common feed system comprises:

drive equipment comprising a plurality of drive wheels configured to contact the elongated member, and

indexing equipment configured to center the elongated member beneath the surface treatment equipment and the adhesive application equipment.

2. The system of claim 1, wherein the drive equipment includes inlet drive equipment and outlet drive equipment.

3. The system of claim 2, wherein the plurality of drive wheels includes a first drive wheel of the inlet drive equipment and a second drive wheel of the outlet drive equipment.

4. The system of claim 1 or 2, wherein the indexing equipment comprises a retractable wheel assembly configured to move towards or away from a drive wheel of the drive equipment.

5. The system of claim 1, wherein the common feed system further comprises:
a plurality of roller systems to support the elongated member.
6. The system of claim 5, wherein the common feed system is connected to a base.
7. The system of any one of claims 1 to 6, wherein the common feed system feeds the elongated member beneath the surface treatment equipment and adhesive application equipment at a rate in a range of one inch per second to six inches per second.
8. The system of any one of claims 1 to 7, wherein the surface treatment equipment comprises atmospheric pressure plasma treatment equipment.
9. The system of claim 8, wherein a distance between the atmospheric pressure plasma treatment equipment and the adhesive application equipment is sufficiently small such that heat generated on the surface by the atmospheric pressure plasma treatment equipment increases tack of the adhesive.
10. The system of claim 9, wherein the atmospheric pressure plasma treatment equipment is configured such that the heat generated on the surface is between 105 degrees Fahrenheit and 140 degrees Fahrenheit.
11. A method comprising:
simultaneously treating a surface of an elongated member and applying adhesive to an already treated portion of the surface of the elongated member by a system comprising surface treatment equipment and adhesive application equipment, wherein

the system applies a surface treatment to the surface in a continuous automated fashion and applies the adhesive to the already treated portion of the surface in a continuous automated fashion,

wherein the elongated member is fed concurrently beneath the surface treatment equipment and the adhesive application equipment using a common feed system, the common feed system comprising:

drive equipment comprising a plurality of drive wheels configured to contact the elongated member, and

indexing equipment configured to center the elongated member beneath the surface treatment equipment and the adhesive application equipment.

12. The method of claim 11 further comprising:

moving the elongated member through the system at a constant rate.

13. The method of claim 12, wherein the constant rate is in a range of one inch per second to six inches per second.

14. A method comprising:

feeding an elongated member through a system using a common feed system;

treating a surface of the elongated member using surface treatment equipment as the common feed system feeds the elongated member beneath the surface treatment equipment; and

applying an adhesive to the surface of the elongated member, wherein the adhesive is applied to a portion of the surface after treating the portion of the surface, wherein the adhesive is applied to the surface by adhesive application equipment as the common feed system feeds the elongated member

beneath the adhesive application equipment, wherein the common feed system comprises:

drive equipment comprising a plurality of drive wheels configured to contact the elongated member, and

indexing equipment configured to center the elongated member beneath the surface treatment equipment and the adhesive application equipment.

15. The method of claim 14, wherein the elongated member is fed beneath the surface treatment equipment and the adhesive application equipment at a rate of between one inch per second and six inches per second.

16. The method of claim 14 or 15, wherein the elongated member is fed continuously beneath the surface treatment equipment and the adhesive application equipment.

17. The method of any one of claims 14 to 16, wherein the adhesive is applied continuously onto the surface.

18. The method of claim 17, wherein applying the adhesive comprises compacting the adhesive using between 35 pounds per square inch and 55 pounds per square inch of pressure.

19. The method of any one of claims 14 to 18, wherein treating the surface of the elongated member using the surface treatment equipment comprises treating the surface with atmospheric pressure plasma treatment equipment.

20. The method of claim 19, wherein applying the adhesive to the portion of the surface of the elongated member occurs in immediate succession after treating the portion of the surface, and wherein additional heat is not provided to the portion of

the surface between treating the portion of the surface and applying the adhesive.

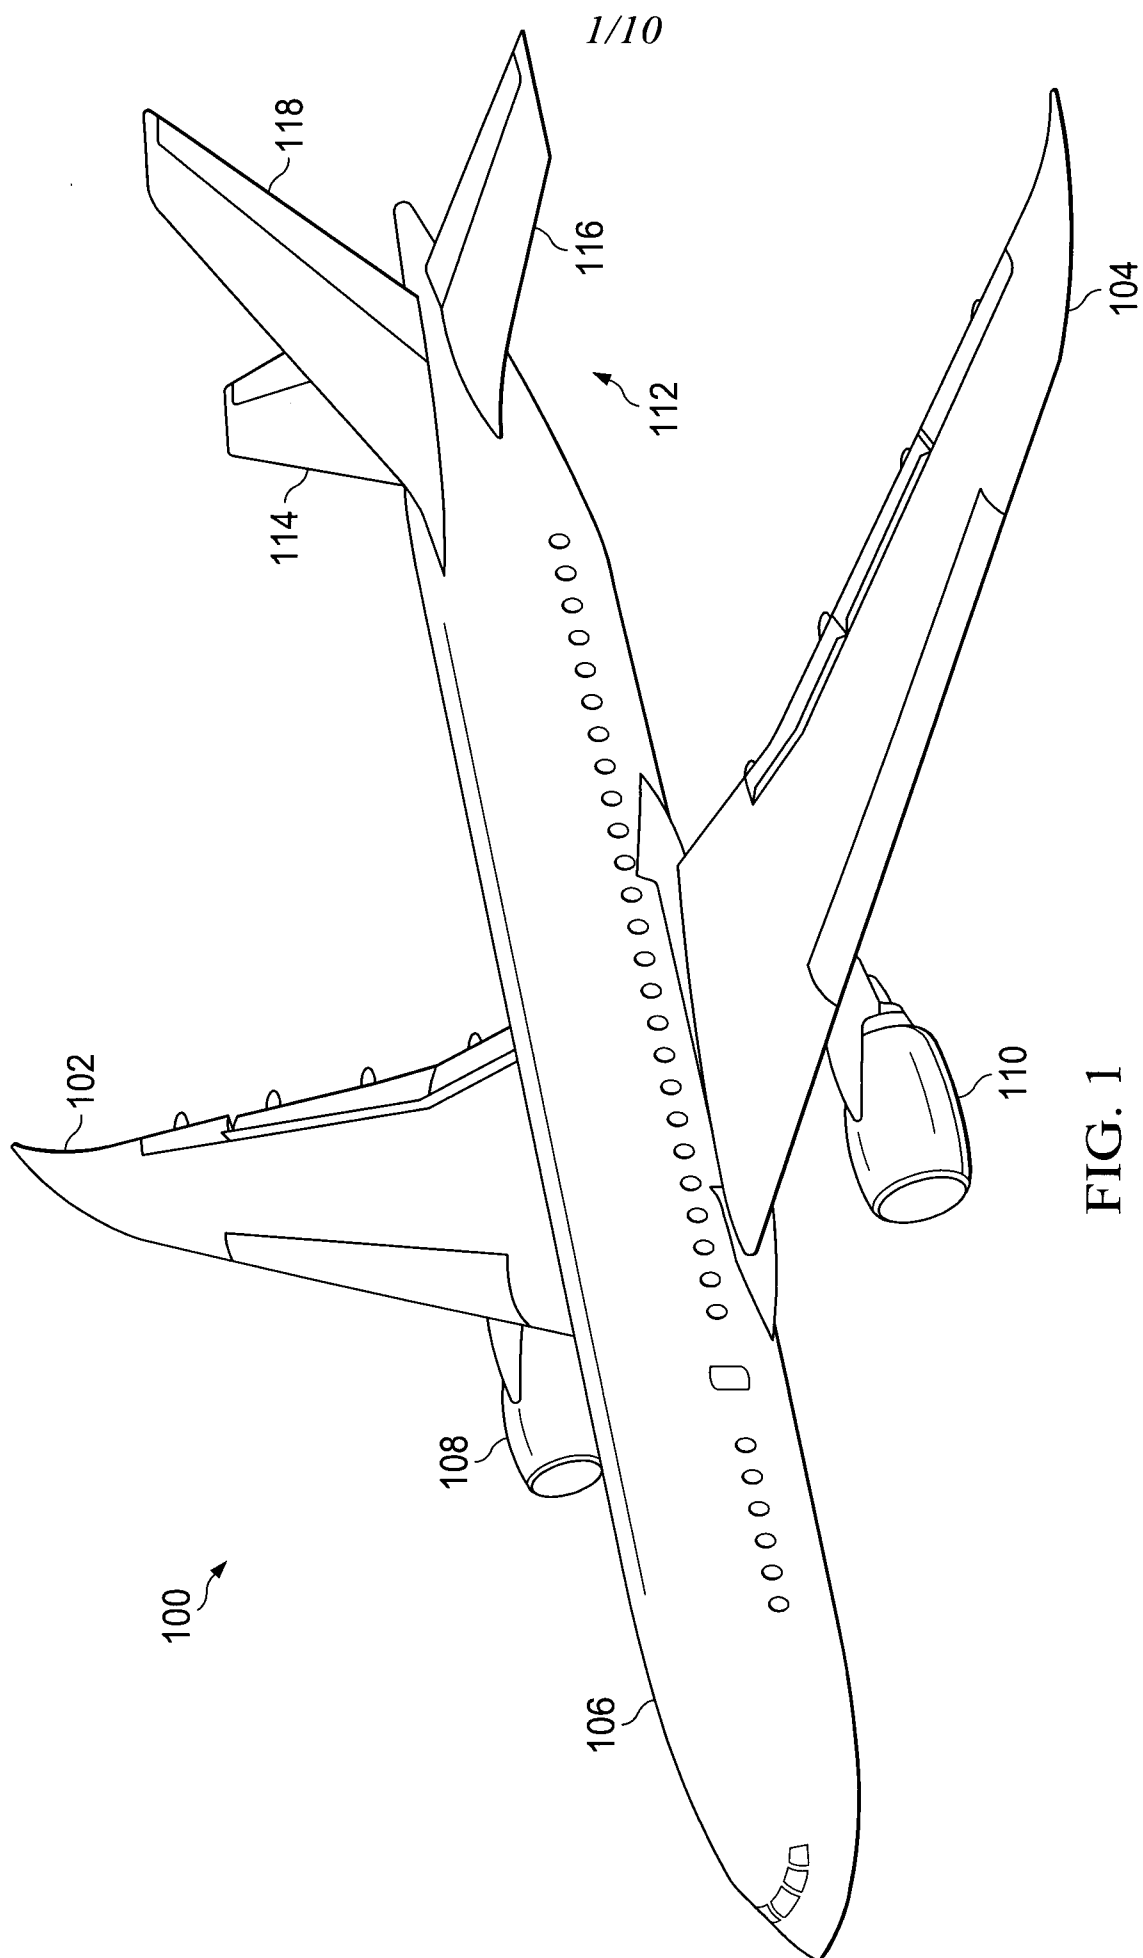


FIG. 1

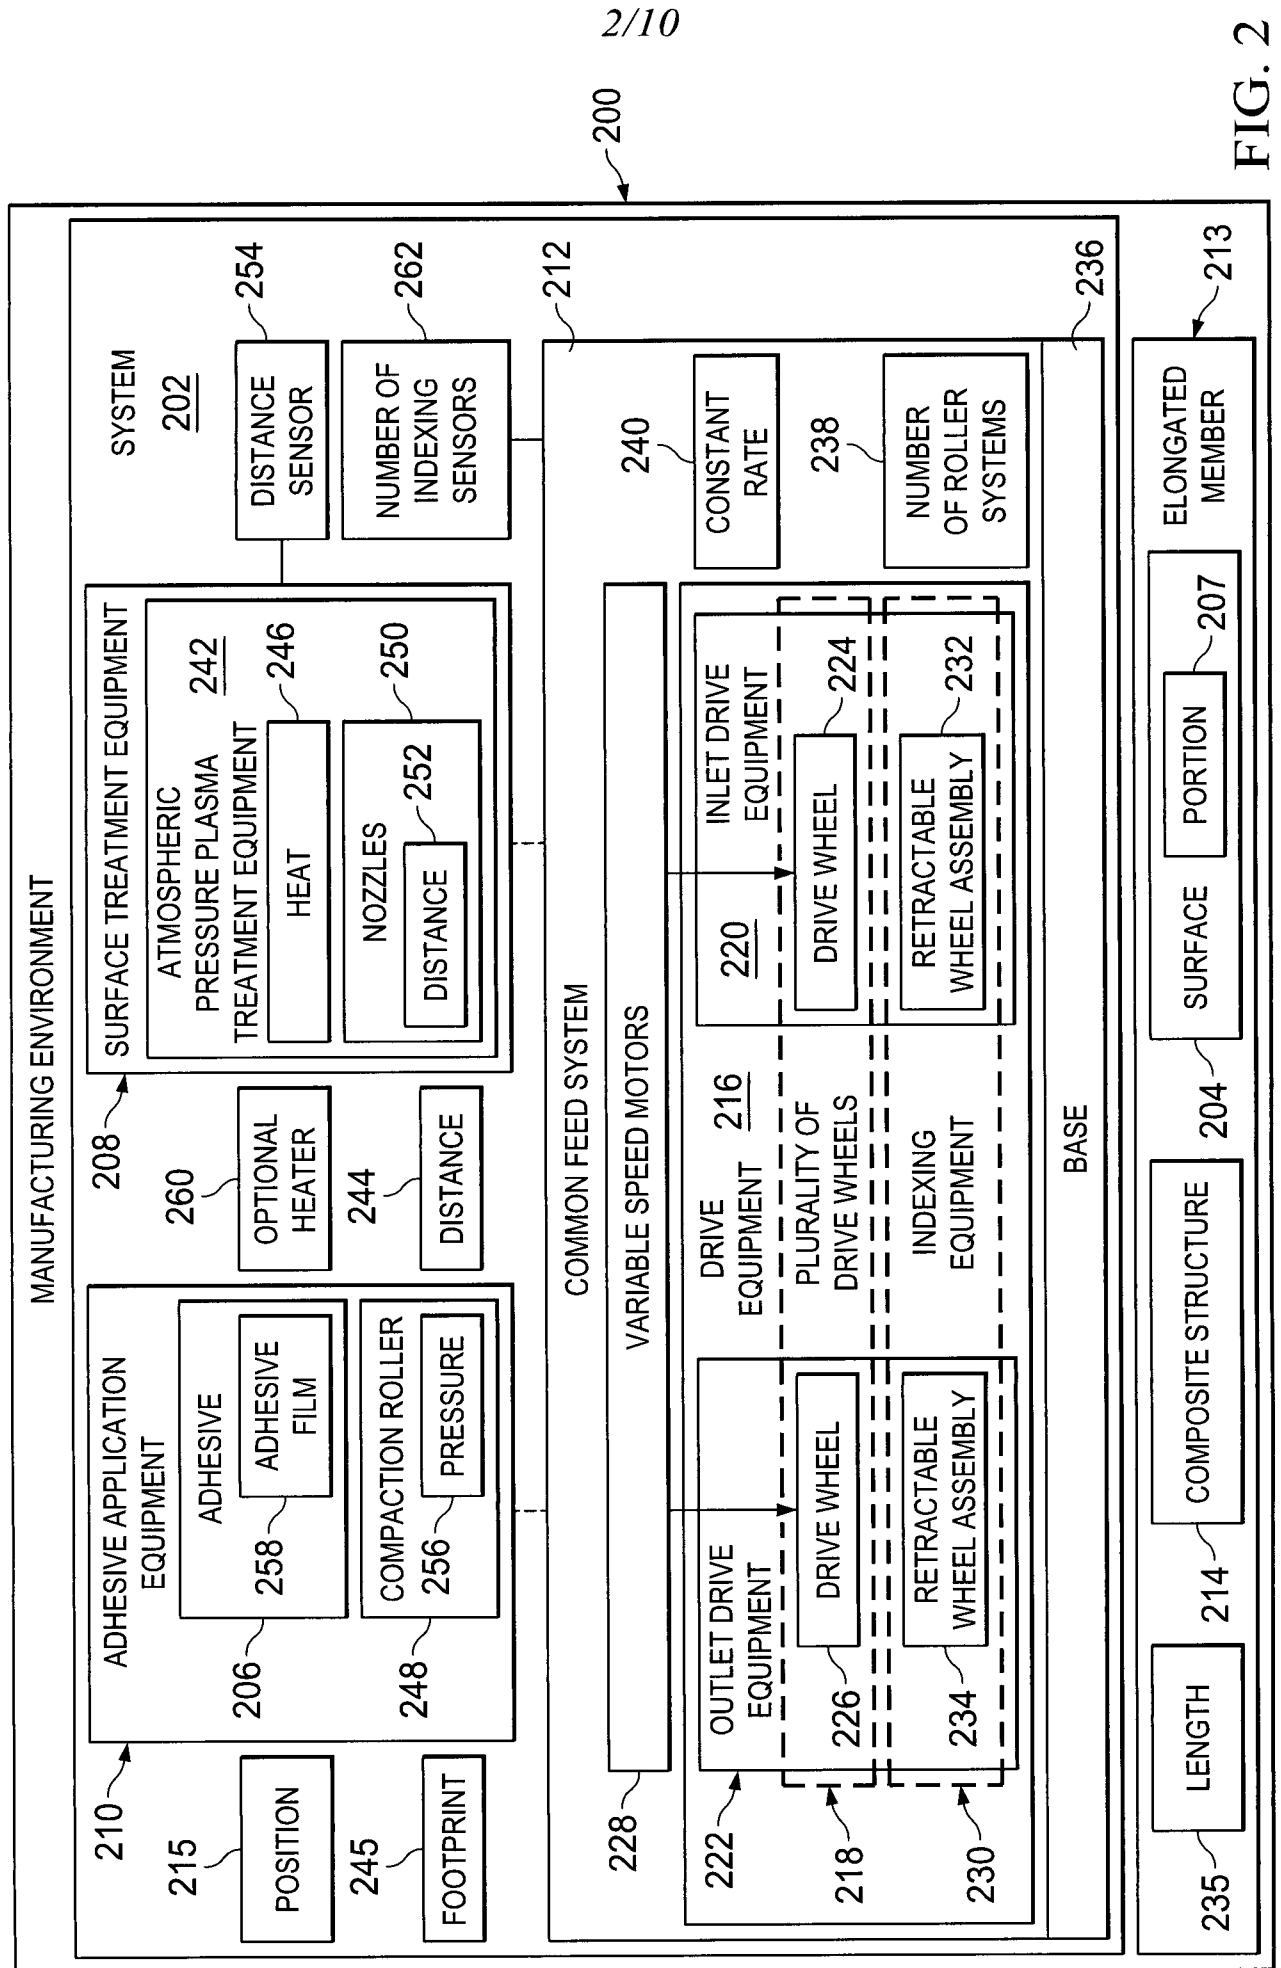
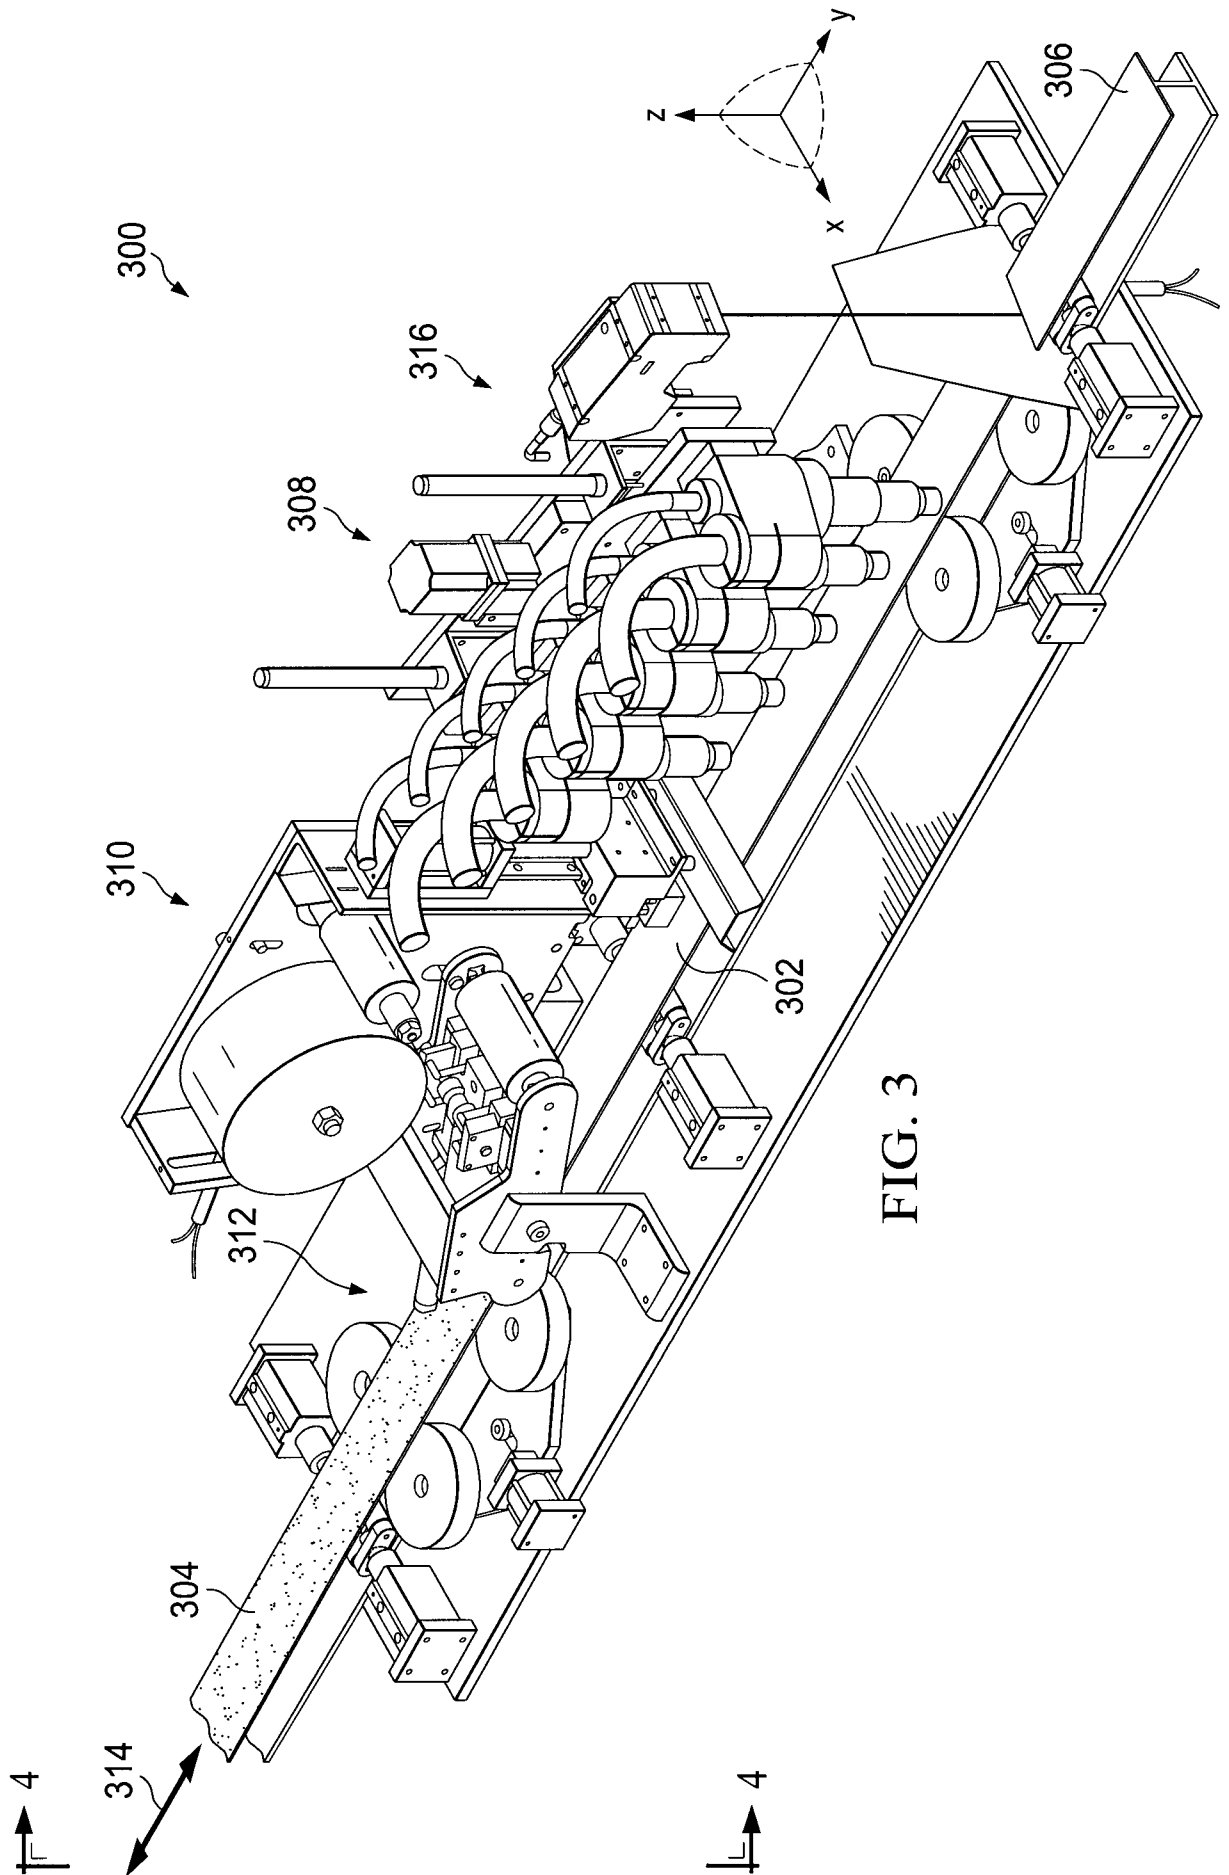
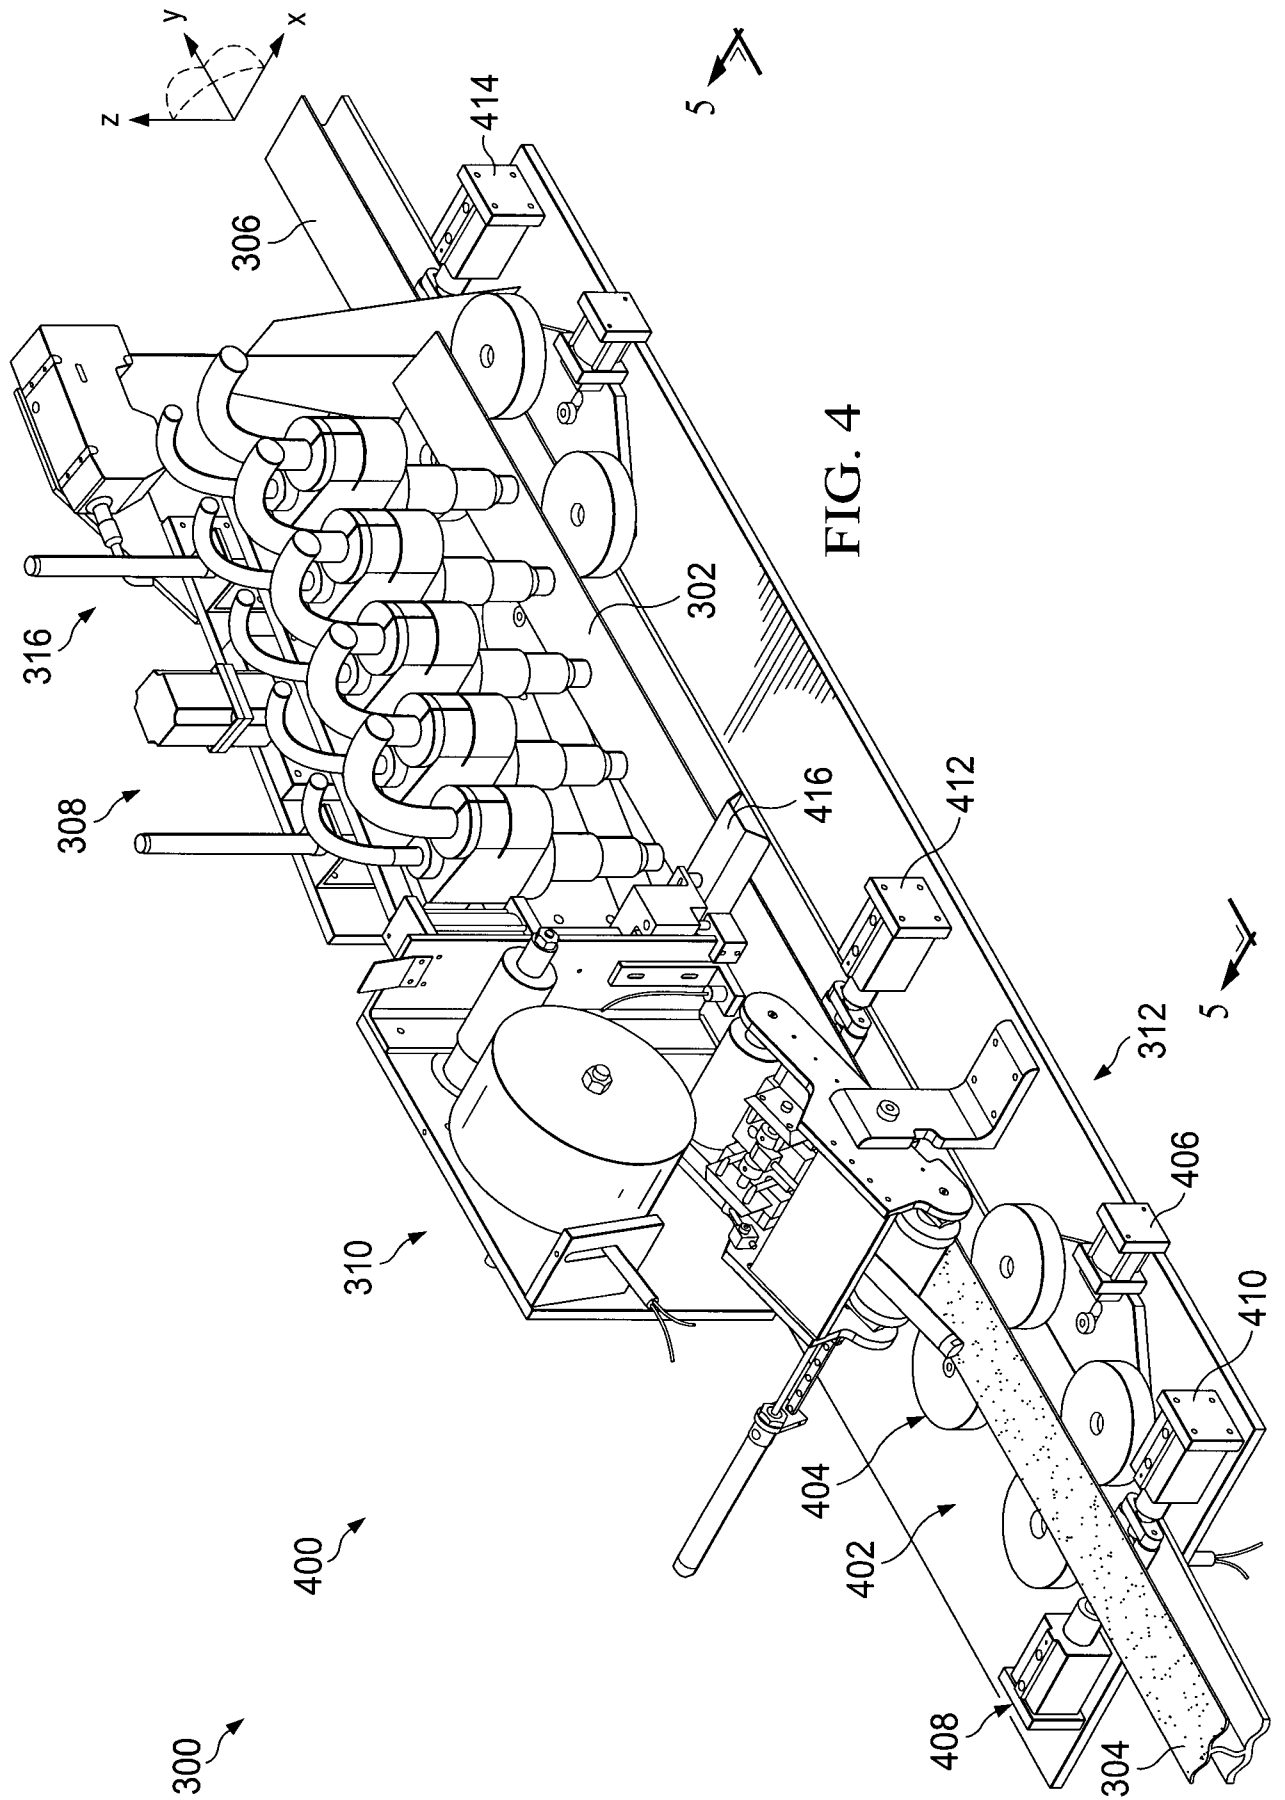


FIG. 2





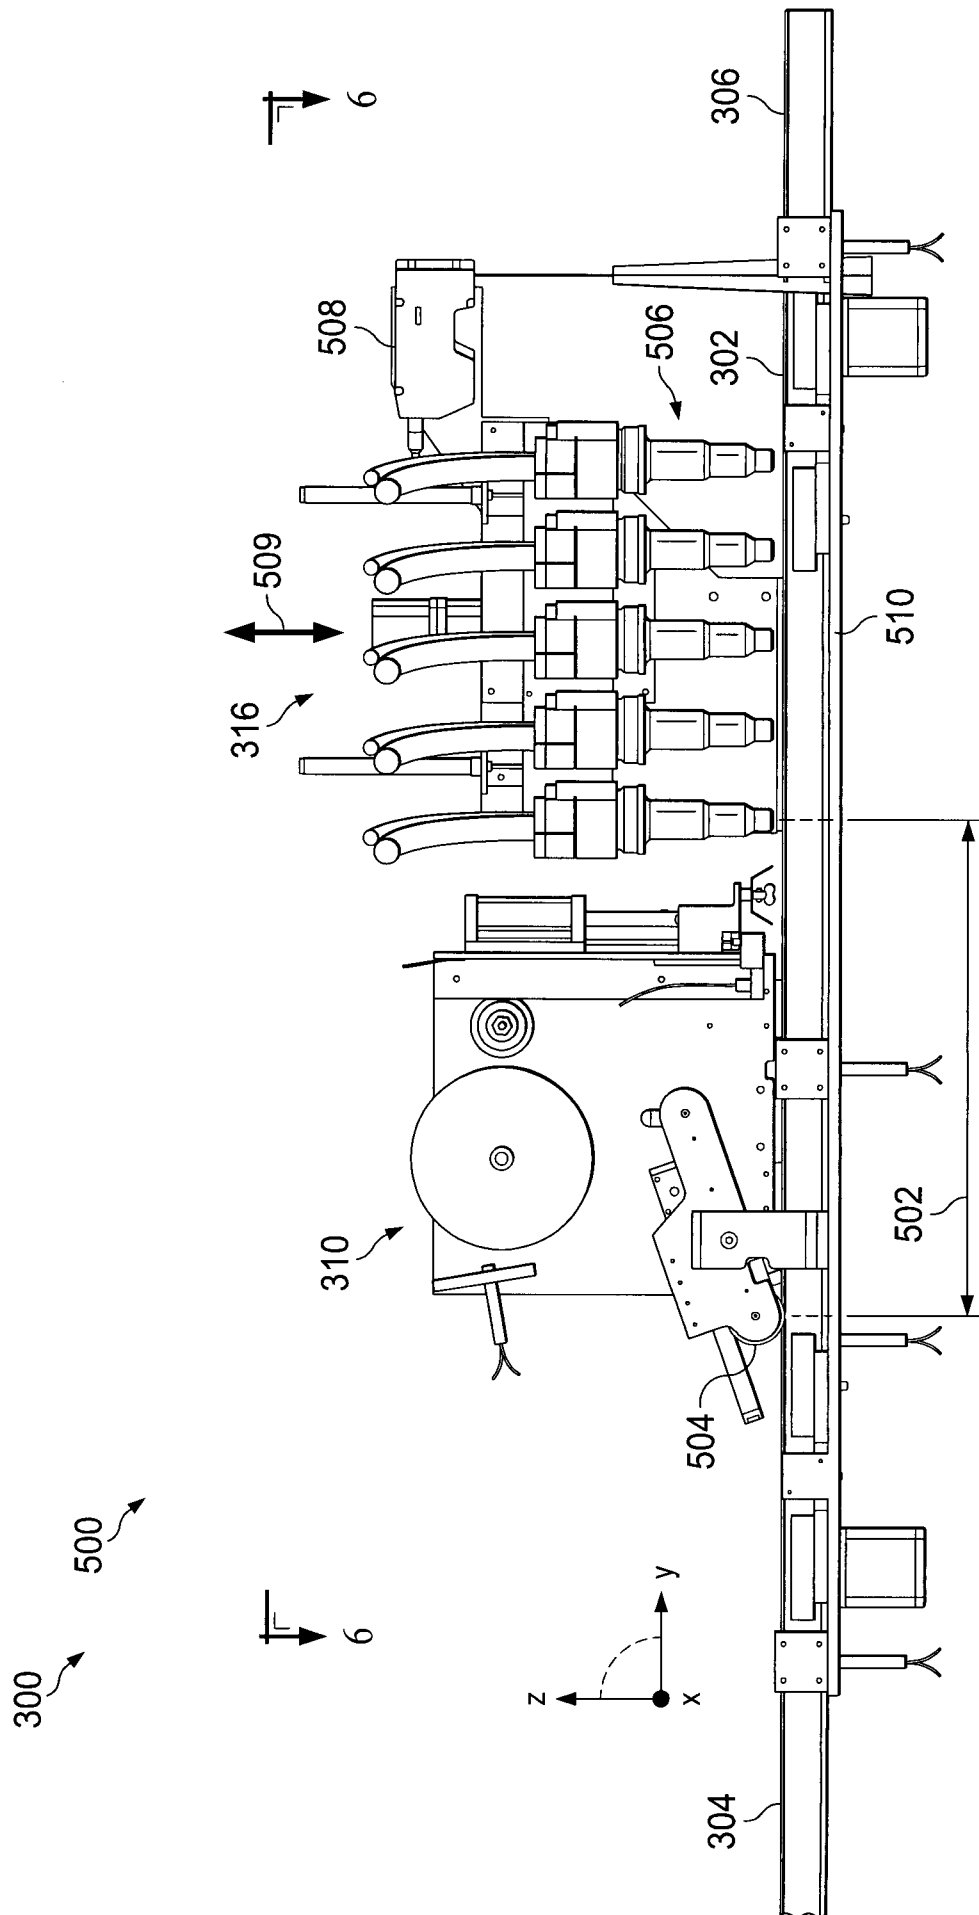


FIG. 5

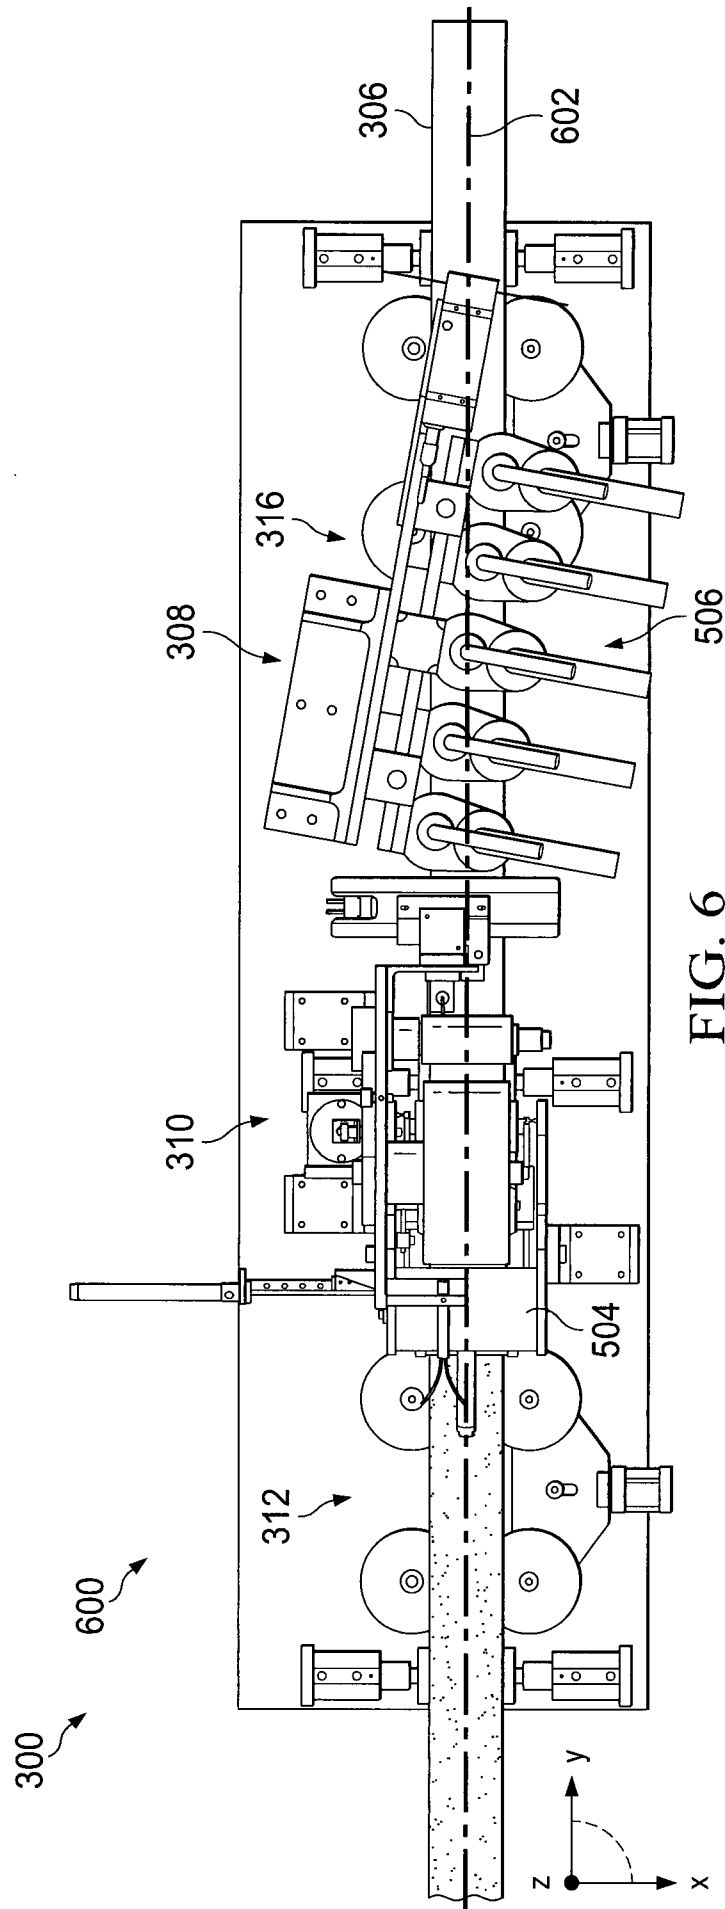
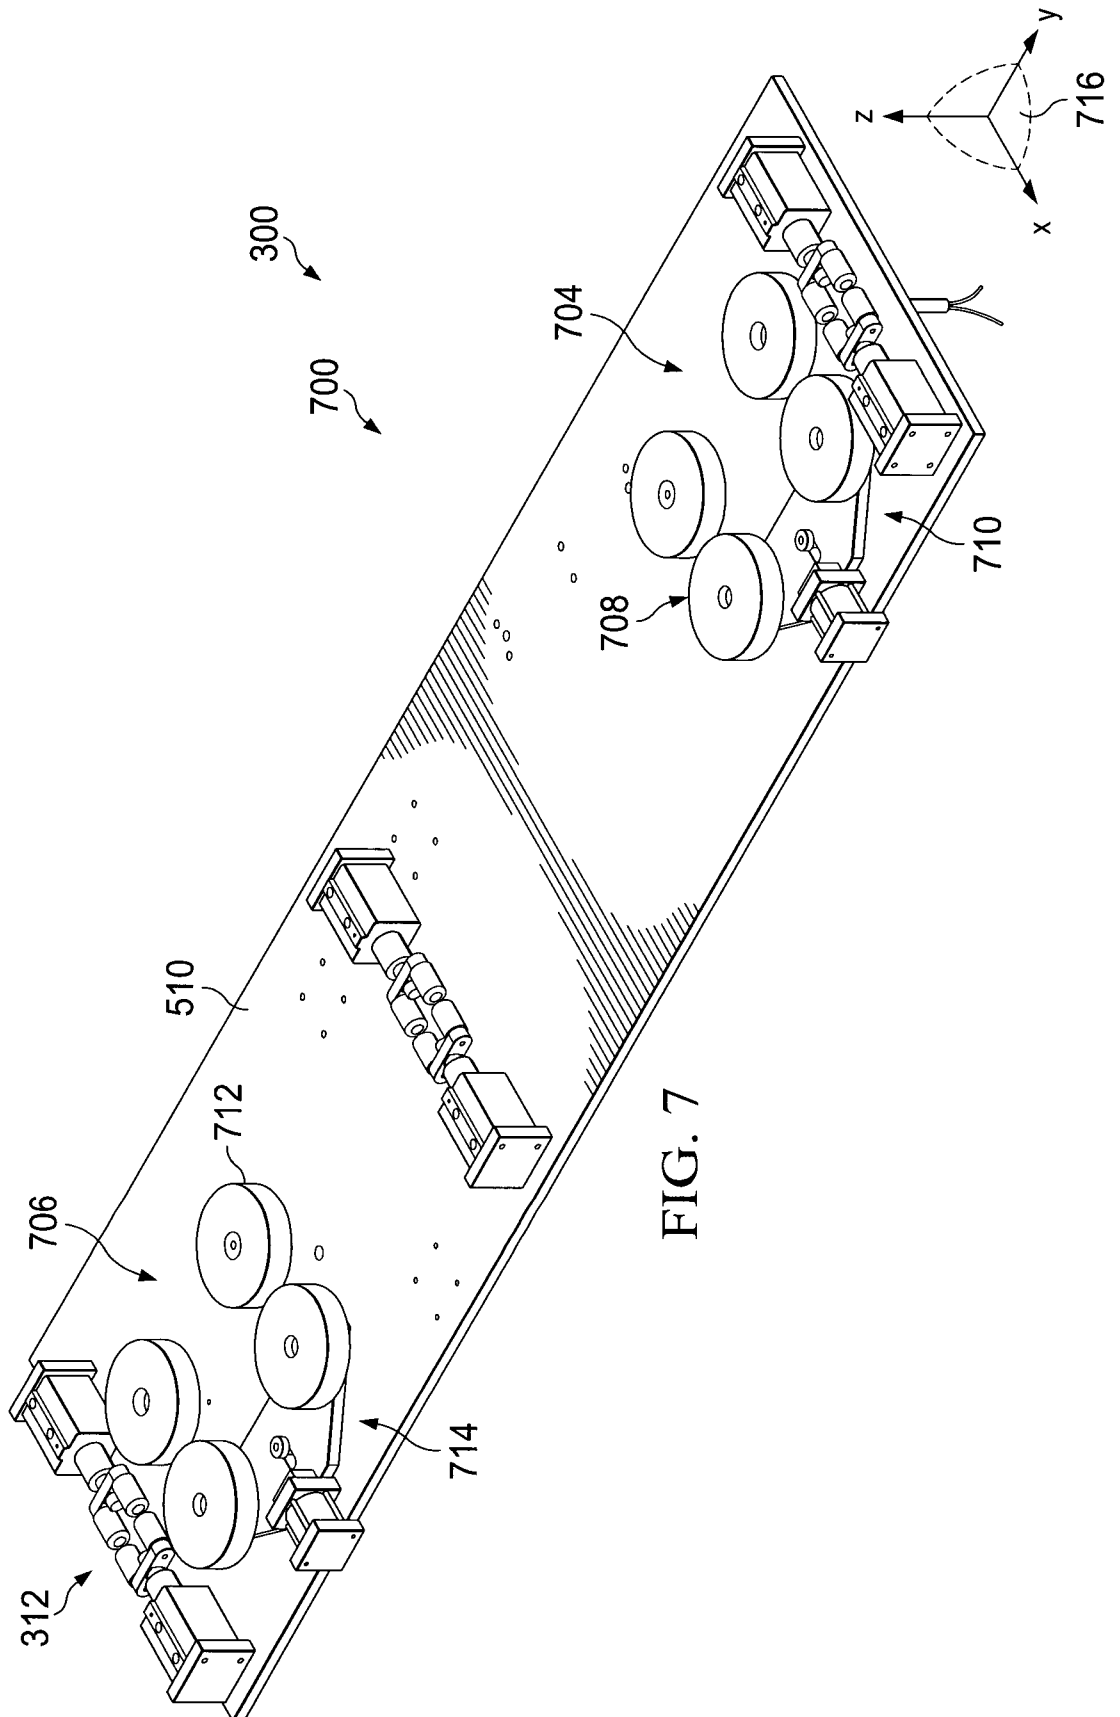


FIG. 6



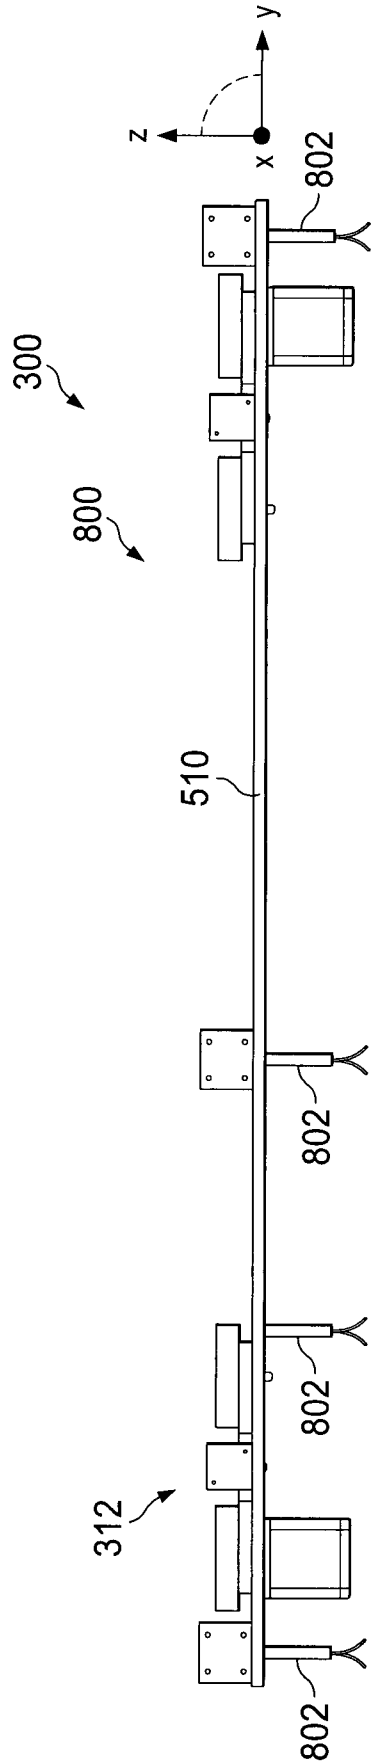


FIG. 8

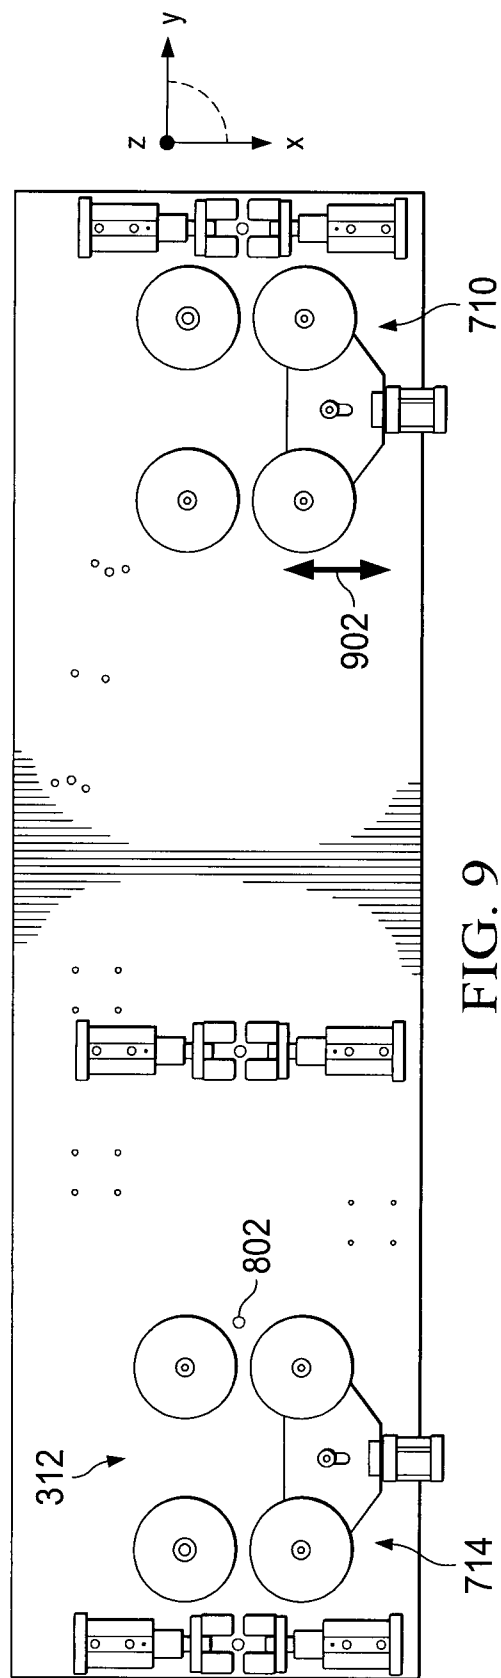


FIG. 9

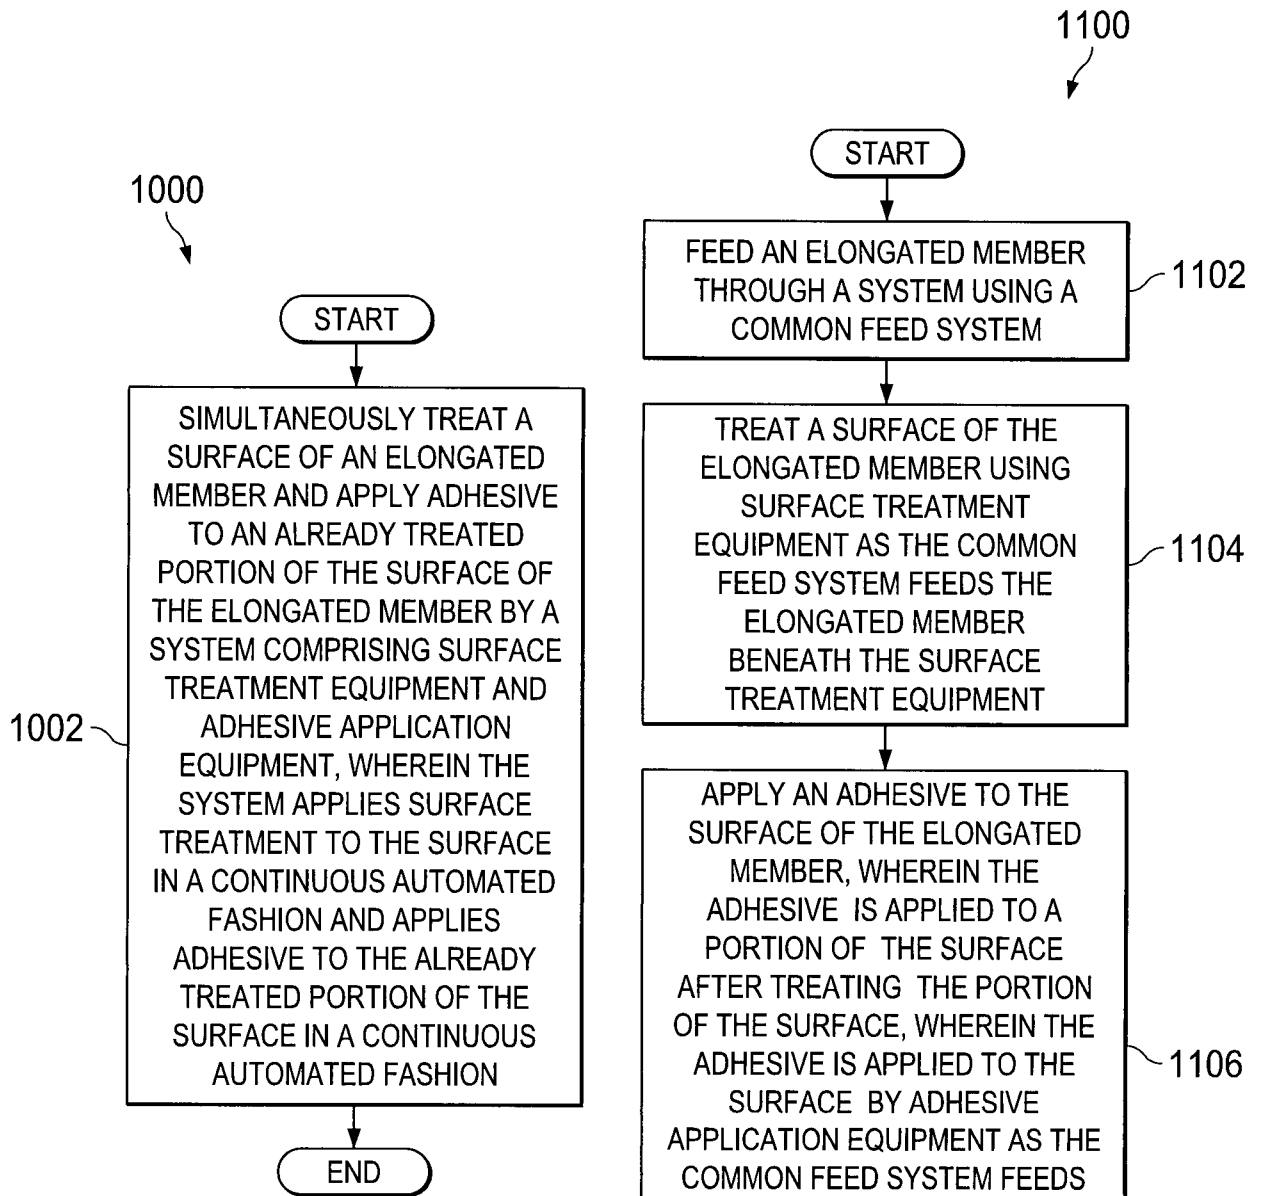


FIG. 10

FIG. 11

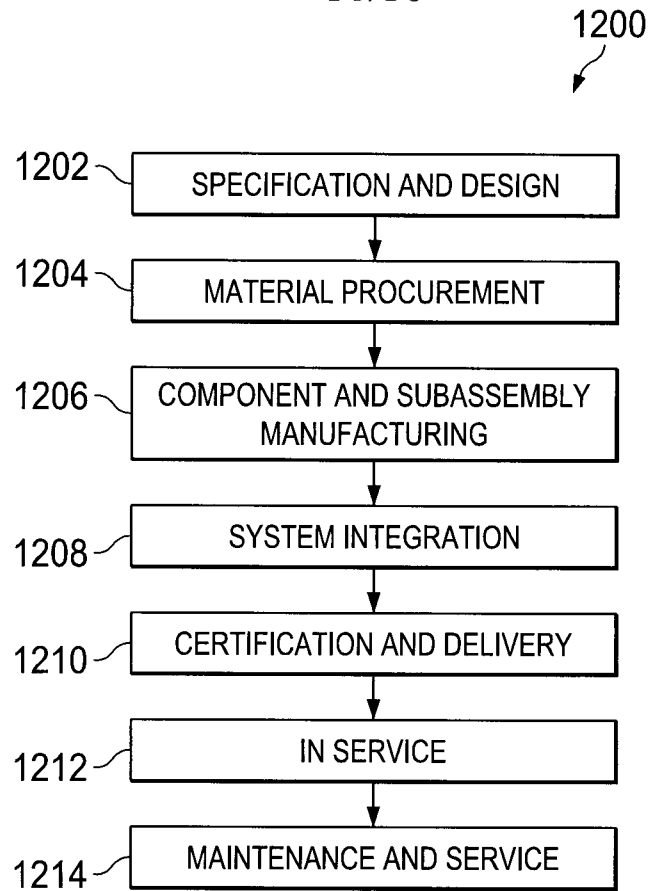


FIG. 12

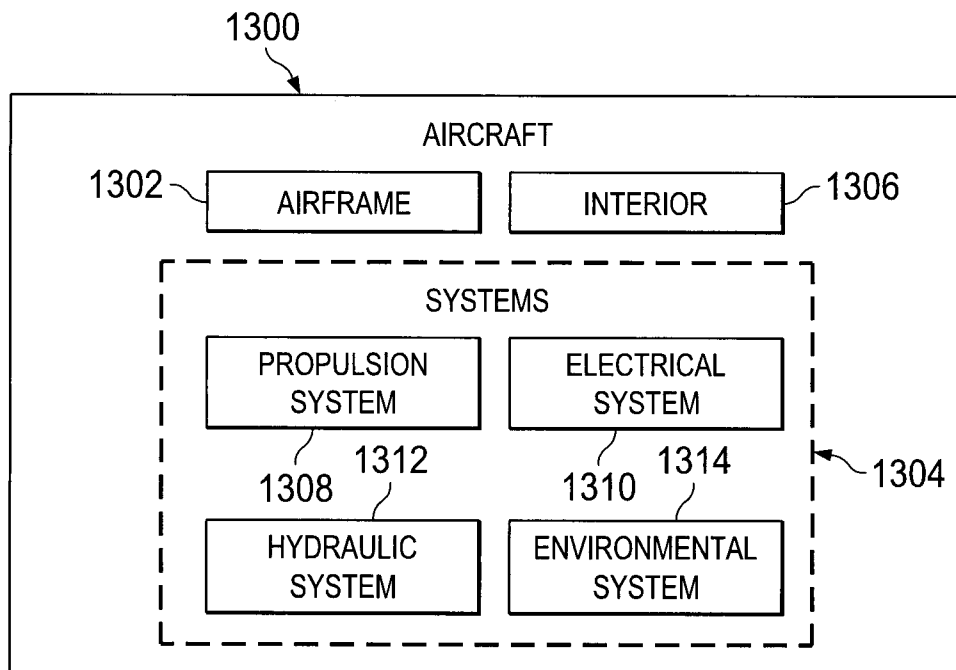


FIG. 13

