



- (51) **International Patent Classification:**
B41J 29/00 (2006.01)
- (21) **International Application Number:**
PCT/US2014/053098
- (22) **International Filing Date:**
28 August 2014 (28.08.2014)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (71) **Applicant:** HEWLETT-PACKARD DEVELOPMENT COMPANY, L. P. [US/US]; 11445 Compaq Center Drive West, Houston, Texas 77070 (US).
- (72) **Inventors:** FRANCKE, Justin; 16399 W Bernardo Drive, San Diego, California 92127 (US). COINER, Erich; 16399 W Bernardo Drive, San Diego, California 92127 (US).
- (74) **Agent:** DEVITO, Victor; Hewlett-Packard Company, Intellectual Property Administration, 3404 E Harmony Road, Mail Stop 35, Fort Collins, Colorado 80528-9599 (US).
- (81) **Designated States** (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,

BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

- (84) **Designated States** (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

— *as to the identity of the inventor (Rule 4.17(i))*

Published:

— *with international search report (Art. 21(3))*

(54) **Title:** DOOR TO ROTATE TO PROVIDE ACCESS

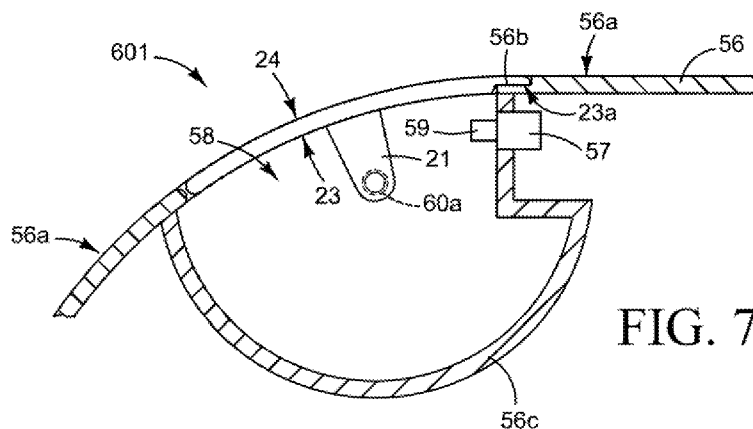


FIG. 7B

(57) **Abstract:** An access device includes a door. The door is rotatable between a closed position and an open position. In the closed position, the door covers an access opening of a compartment of a main body of the electronic device. In the open position, the door uncovers the access opening of the compartment to enable a user to access an inside of the compartment. The door including at least one connector to movably connect to the main body to enable the door to rotate about a central axis thereof. The door resides within the compartment in the open position and the closed position.

DOOR TO ROTATE TO PROVIDE ACCESS

BACKGROUND

[0001] Access devices are included in electronic apparatuses having compartments. Access devices include movable doors to move between a closed position and an open position. In the closed position, the door blocks access to the compartment. In the open position, the door unblocks access to the compartment. Thus, in the open position, a user may access contents inside of the compartment.

BRIEF DESCRIPTION OF THE DRAWINGS

[0002] Non-limiting examples are described in the following description, read with reference to the figures attached hereto and do not limit the scope of the claims. Dimensions of components and features illustrated in the figures are chosen primarily for convenience and clarity of presentation and are not necessarily to scale. Referring to the attached figures:

[0003] FIG. 1 is a block diagram illustrating an access device according to an example.

[0004] FIG. 2 is a rear view illustrating a door of an access device according to an example.

[0005] FIG. 3 is a cross-sectional view illustrating the access device of FIG. 2 according to an example.

[0006] FIG. 4 is a side view illustrating a connector of the access device of FIG. 2 according to an example.

[0007] FIG. 5 is a block diagram illustrating a printing apparatus according to an example.

[0008] FIG. 6 is perspective view illustrating a printing apparatus including a door in an open position according to an example.

[0009] FIG. 7A is a cross-sectional view illustrating the printing apparatus of FIG. 6 including the door in an open position according to an example.

[0010] FIG. 7B is a cross-sectional view illustrating the printing apparatus of FIG. 6 including the door in a closed position according to an example.

[0011] FIG. 7C is a cross-sectional view illustrating the printing apparatus of FIG. 6 including the door in an intermediate position according to an example.

[0012] FIG. 7D is a schematic view illustrating the door of the printing apparatus of FIG. 6 according to an example.

[0013] FIG. 8 is a rear view illustrating a door of an access device of the printing apparatus of FIG. 6 according to an example.

[0014] FIG. 9 is a flowchart illustrating a method of accessing an electrical connector of a printing apparatus according to an example.

DETAILED DESCRIPTION

[0015] Access devices are included in electronic apparatuses such as printing apparatuses having compartments. Access devices include movable doors to move between a closed position in which access to the compartment is blocked and an open position in which access to the compartment is unblocked (e.g., granted). Thus, in the open position, a user may access contents inside of

the compartment. In the open position and/or closed position, however, the door and/or a portion thereof may be exposed outside of the compartment. Subsequently, a user or object may inadvertently impact the door and, potentially, cause it to break and/or misalign. Further, the movement of the door between an open position and a closed position about a non-central axis of the door such as about a side edge, bottom or top of the door may not provide sufficient cam action upon closing of the door in the closed position. Thus, the access devices including doors placed outside of a respective compartment in the closed position and/or open position may be susceptible to damage.

[0016] In examples, an access device is usable with an electronic device such as a printing apparatus. The access device includes a door rotatable between a closed position and an open position. In the closed position, the door covers an access opening of a compartment of a main body of the electronic device. In an open position, the door uncovers the access opening of the compartment to enable a user to access an inside of the compartment. The door includes at least one connector to movably connect to the main body to enable the door to rotate about a central axis thereof, rather than about a bottom, top, or side edge of the door. Consequently, a revolving aspect to door about the central axis provides sufficient cam action right upon closing the door in the closed position. Further, the door resides within the compartment in the open position and the closed position. Thus, events such as the door receiving an inadvertent impact, receiving damage, and being misaligned may be reduced.

[0017] FIG. 1 is a block diagram illustrating an access device according to an example. The access device 100 is usable with an electronic device. Referring to FIG. 1, the access device 100 includes a door 10. The door 10 is rotatable between a closed position and an open position. In the closed position, the door 10 covers an access opening of a compartment of a main body of the electronic device. In the open position, the door 10 uncovers the access opening of the compartment to enable a user to access an inside of the compartment. For

example, the user may access an electrical connector such as a card slot through the compartment to receive the electronic card such as a memory device. That is, a port to the electrical connector may be accessed through the compartment in which the electrical connector may be proximate thereto. For example, the electrical connector may be positioned in or adjacent to the compartment. Referring to FIG. 1, the door 10 includes at least one connector 11 to movably connect to the main body to enable the door 10 to rotate about a central axis 12 thereof. The door 10 resides within the compartment in the open position and the closed position. In some examples, the door 10, in its entirety, resides in the compartment in the closed position and the open position. The access opening is part of the inside of the compartment.

[0018] FIG. 2 is a rear view illustrating a door of an access device according to an example. FIG. 3 is a side view illustrating the access device of FIG. 2 according to an example. FIG. 4 is a side view illustrating a connector of the access device of FIG. 2 according to an example. The access device 200 is usable with an electronic device. In some examples, the access device 200 may include the door 10 as previously discussed with respect to the access device 100 of FIG. 1. Referring to FIGS. 2-4, in some examples, the door 10 includes a circular shape having a central axis 12 disposed along a diameter of the door 10. The door 10 includes an inner surface 23 and an outer surface 24. For example, the inner surface 23 may have a concave shape to face inwards d_i toward a compartment of a main body of the electronic device in the closed position. Additionally, in some examples, the outer surface 24 may have a convex shape to face outwards d_o away from the compartment in the closed position.

[0019] Referring to FIGS. 2-4, in some examples, the door 10 includes a plurality of connectors 21. The plurality of connectors 21 may extend from an inner surface 23 of the door 10 and be spaced apart from each other. Each connector 21 may be in a form of an angled member 25 such as an L-shaped member. The angled member 25 (FIG. 4) may extend away from the inner

surface 23 of the door 10. Additionally, the angled member 25 may include an end 25a to insert into a respective hole of the main body. For example, the end 25a may be a projection that is inserted into and moves within a corresponding hole of the main body. That is, the end 25a may rotate within the respective hole in response to a rotation of the door 10 between the open position and the closed position.

[0020] Referring to FIGS. 2-4, in some examples, the connectors 21 may be disposed on the inner surface 23 of the door 10 to movably connect to the main body and be spaced apart from each other by a distance d_1 about equal to a diameter of the door 10. That is, the connectors 21 may be located proximate to a circumference of the door 10 and by opposite ends of the inner surface 23. The arrangement and movable connection of the connectors 21 to the main body, enable the door 10 to rotate about a central axis 12 along a diameter of the door 10. Consequently, in some examples, a revolving aspect of the door 10 about the central axis 12 provides sufficient cam action right upon a closing of the door 10 to the main body in the closed position. In some examples, the central axis 12 may correspond with an apex of the outer surface 24 of the door 10. In some examples, the plurality of connectors 21 may be removable from the main body.

[0021] Referring to FIGS. 2-4, in some example, the inner surface 23 may also include a stop region 23a to contact a corresponding stop portion of the main body in the closed position. In some examples, the stop region 23a may be offset and/or recessed with respect to other sections of the inner surface 23 of the door 10. For example, a thickness of the stop region 23a may be thinner than a thickness of other sections of the door 10. Thus, the outer surface 23 of the door may be flush with an outer surface of the main body in response to contact between the stop region 23a and the stop portion in the closed position. That is, in a flush arrangement between the door 10 and the main body, the shape of the main body may be continued across the outer surface 24 of the door 10. For

example, the transition between the outer surfaces of the main body and door 10 along the electronic device is smooth.

[0022] FIG. 5 is a block diagram illustrating a printing apparatus according to an example. Referring to FIG. 5, a printing apparatus 501 includes a main body 56, an electrical connector 57, and an access device 500. The main body 56 includes a compartment 58 having an access opening 58a. The electrical connector 57 is disposed proximate to the compartment 58 to receive an electronic device by a user. That is, a port to the electrical connector 57 may be accessed through the compartment 58. The access device 500 includes a door 10 having a circular shape. The door 10 is rotatable between a closed position and an open position to enable a user to access the electrical connector 57. That is, in the closed position, the door 10 covers the access opening 58a of the compartment 58. Additionally, in the open position, the door 10 uncovers the access opening 58a of the compartment 58.

[0023] Referring to FIG. 5, the door 10 includes an inner surface 23, an outer surface 24, and a plurality of connectors 21. For example, the inner surface 23 has a concave shape to face inwards toward the compartment 58 in the closed position. The outer surface 24, for example, has a convex shape to face outwards away from the compartment 58 in the closed position. The connectors 21 movably connect to the main body 56 to enable the door 10 to rotate about a central axis 12 thereof corresponding to a diameter of the door 10. Further, the door 10 resides within the compartment 58 in the open position and the closed position.

[0024] FIG. 6 is perspective view illustrating a printing apparatus including a door in an open position according to an example. FIG. 7A is a cross-sectional view illustrating the printing apparatus of FIG. 6 including the door in an open position according to an example. FIG. 7B is a cross-sectional view illustrating the printing apparatus of FIG. 6 including the door in a closed position according to an example. FIG. 7C is a cross-sectional view illustrating the

printing apparatus of FIG. 6 including the door in an intermediate position according to an example. FIG. 7D is a schematic view illustrating the door of the printing apparatus of FIG. 6 according to an example. FIG. 8 is a rear view illustrating a door of an access device of the printing apparatus of FIG. 6 according to an example. In some examples, the printing apparatus 601 may include the main body 56, the electrical connector 57, and the access device 500 as previously discussed with respect to the printing apparatus 501 of FIG. 5.

[0025] Referring to FIGS. 6-8, in some examples, the main body 56 includes a curved liner member 56c, holes 60a, and a compartment 58 having an access opening 58a. The access device 500 includes a door 10 rotatable between a closed position and an open position. In the closed position, the door 10 covers the access opening 58a of the compartment 58. In the open position, the door 10 uncovers the access opening 58a of the compartment 58 to enable a user to access an inside of the compartment 58. In the intermediate position (FIG. 7C), the door 10 is located between the open position and the closed position. In the intermediate position, for example, a portion of the door 10 is outside of the compartment 58 and another portion of the door 10 is inside the compartment 58.

[0026] An electrical connector 57 such as a card slot to receive an electronic device 59 such as a memory device may be proximate to the compartment 58. That is, a port to the electrical connector 57 may be accessed through the compartment 58. For example, a user may be able to insert the electronic device 59 such as a memory device into and remove the memory device from the electrical connector 57 in the compartment 58 when the door 10 is in the open position. In some examples, the electrical connector 57 may be positioned to receive the electronic device 59 perpendicular to the access opening 58a. Further, the user may place the door 10 in the closed position to reduce access to and dust from accumulating on the electrical connector 57 and/or the electronic device 59 such as a memory device.

[0027] In some examples, the compartment 58 may include a plurality of electrical connectors 57 such as storage device (SD) card slots and universal serial bus (USB) ports may be proximate to the compartment 58. The door 10 may also be placed in the closed position to provide a flush arrangement with respect to the door 10 and the main body 56. That is, in a flush arrangement between the door 10 and the main body 56, the shape of the main body 56 may be continued across the outer surface 24 of the door 10. For example, the transition between the outer surfaces 23 and 56a of the main body 56 and door 10 along the printing apparatus 601 is smooth.

[0028] Referring to FIGS. 6-8, in some examples, the door 10 includes a circular shape, an inner surface 23, an outer surface 24, a plurality of connectors 21, and a central axis 12 disposed along a diameter of the door 10. The inner surface 23 may have a concave shape to face inwards toward the compartment 58 in the closed position. The outer surface 24 may have a convex shape to face outwards away from the compartment 58 in the closed position. In some examples, the central axis 12 may correspond with an apex of the outer surface 24 of the door 10.

[0029] The connectors 21 may be in a form of an angled member 25 (FIG. 4) spaced apart from each other and extending away from the inner surface 23 of the door 10. The angled member 25 may include an end 25a (FIG. 4) to insert into the respective hole 60a of the main body 56, and also rotate therein corresponding to a rotation of the door 10. For example, the respective holes 60a may be formed in the curved liner member 56c of the main body 56. A portion of the curved liner member 56c may be shaped to allow sufficient clearance during rotation of the door 10 between the open position and the closed position. In some examples, the plurality of connectors 11 may be removable from the main body 56.

[0030] Referring to FIGS. 6-8, in some examples, the connectors 21 may be disposed on the inner surface 23 of the door 10 to movably connect to the

main body 56 and be spaced apart from each other by a distance d_1 about equal to a diameter of the door 10. That is, the connectors 21 may extend from the inner surface 23 and be located proximate to a circumference of the door 10 by opposite ends of the inner surface 23. The arrangement and movable connection of the connectors 21 to the main body 56, enable the door 10 to rotate about a central axis 12 along a diameter of the door 10. In some examples, a revolving aspect of the door 10 about the central axis 12 provides sufficient cam action right upon closing of the door 10 to the main body 56 in the closed position. In some examples, a respective connector 21 may include a detent portion 71 extending there from to engage a corresponding recess of the main body such as the curved liner member 56c to receive the detent portion 71 when the door 10 is placed in the closed position. That is, when a user rotates the door 10 into the closed position, a detent slanted surface 71a may contact and be guided further into the corresponding recess 76 in a closing direction d_c by a recess sloped surface 76a. In some examples, the plurality of connectors 21 may be removable from the main body 56.

[0031] Referring to FIGS. 6-8, in some examples, the main body 56 also includes a stop portion 56b extending towards the access opening 58a. Additionally, the inner surface 23 of the door 10 may also include a stop region 23a to contact the stop portion 56b in the closed position. The stop portion 56b may be offset and/or recessed with respect to other portions of the main body 56. Also, the stop region 23a may be offset and/or recessed with respect to other sections of the inner surface 23 of the door 10. Thus, the outer surface 24 of the door 10 may be flush with an outer surface 56a of the main body 56 in response to contact between the stop region 23a and the stop portion 56b in the closed position.

[0032] FIG. 9 is a flowchart illustrating a method of accessing an electrical connector of a printing apparatus according to an example. In some examples, the modules, assemblies, and the like, previously discussed with

respect to the access devices 100, 200, and 500 and/or printing apparatuses 501 and 601 of FIGS. 1-8 may be used to implement the method of FIG. 9. Referring to FIG. 9, in block S910, a door disposed in a compartment of a main body of a printing apparatus in a closed position and in an open position is contacted in which the door has a circular shape and a central axis along a diameter thereof. For example, a user may touch the door. In block S912, the door is rotated about the central axis from the closed position in which the door covers an access opening of the compartment to an open position in which the door uncovers the access opening of the compartment. For example, a user may push the door to rotate it from the closed position to the open position.

[0033] In some examples, rotating the door about the central axis from the closed position to the open position may include a portion of the door being moved outside of the compartment and, subsequently, the portion of the door being placed back into the compartment. That is, during the intermediate position, a portion of the door may be outside the compartment. In block S914, the electrical connector is accessed through the access opening and inside the compartment. For example, the electrical connector may include a card slot to removably receive an electronic device such as a memory device. In some examples, the electrical connector may be positioned proximate to the compartment to receive the electronic device perpendicular to the access opening. For example, a user may push the door to rotate it from the closed position to the open position. The method may also include rotating the door about the central axis from the open position to the closed position such that a stop region of the door contacts a stop portion of the main body to place the door in the closed position.

[0034] In some examples, the door may include an inner surface, an outer surface, and a plurality of connectors. The inner surface may include a concave shape to face inwards toward the compartment in the closed position. The outer surface may include a convex shape to face outwards away from the

compartment in the closed position. The connectors may be disposed on the inner surface of the door to movably connect to the main body and be spaced apart from each other by a distance about equal to a diameter of the door. That is, the connectors may be located proximate to a circumference of the door and and by opposite ends of the inner surface. The arrangement and movable connection of the connectors to the main body enable the door to rotate along a central axis along a diameter of the door.

[0035] It is to be understood that the flowchart of FIG. 9 illustrates architecture, functionality, and/or operation of examples of the present disclosure. If embodied in software, each block may represent a module, segment, or portion of code that includes one or more executable instructions to implement the specified logical function(s). If embodied in hardware, each block may represent a circuit or a number of interconnected circuits to implement the specified logical function(s). Although the flowchart of FIG. 9 illustrates a specific order of execution, the order of execution may differ from that which is depicted. For example, the order of execution of two or more blocks may be rearranged relative to the order illustrated. Also, two or more blocks illustrated in succession in FIG. 9 may be executed concurrently or with partial concurrence. All such variations are within the scope of the present disclosure.

[0036] The present disclosure has been described using non-limiting detailed descriptions of examples thereof that are not intended to limit the scope of the general inventive concept. It should be understood that features and/or operations described with respect to one example may be used with other examples and that not all examples have all of the features and/or operations illustrated in a particular figure or described with respect to one of the examples. Variations of examples described will occur to persons of the art. Furthermore, the terms "comprise," "include," "have" and their conjugates, shall mean, when used in the disclosure and/or claims, "including but not necessarily limited to."

[0037] It is noted that some of the above described examples may include structure, acts or details of structures and acts that may not be essential to the general inventive concept and which are described for illustrative purposes. Structure and acts described herein are replaceable by equivalents, which perform the same function, even if the structure or acts are different, as known in the art. Therefore, the scope of the general inventive concept is limited only by the elements and limitations as used in the claims.

CLAIMS

WHAT IS CLAIMED IS:

1. An access device usable with an electronic device, the access device comprising:

a door rotatable between a closed position to cover an access opening of a compartment of a main body of the electronic device and an open position to uncover the access opening of the compartment to enable a user to access an inside of the compartment, the door including at least one connector to movably connect to the main body to enable the door to rotate about a central axis thereof; and

wherein the door is to reside within the compartment in the open position and the closed position.

2. The access device of claim 1, wherein the door in its entirety is to reside within the compartment in the open position and the closed position.

3. The access device of claim 1, wherein the door includes an inner surface having a concave shape to face inwards toward the compartment in the closed position and an outer surface having a convex shape to face outward from the compartment in the closed position.

4. The access device of claim 1, wherein the at least one connector comprises:

a plurality of connectors extending from an inner surface of the door and spaced apart from each other.

5. The access device of claim 4, wherein each one of the plurality of connectors further comprises:

an angled member extending from the inner surface of the door having an end to insert into a respective hole of the main body.

6. The access device of claim 1, wherein the door includes a circular shape and the central axis is disposed along a diameter of the door.

7. A printing apparatus, comprising:

a main body including a compartment having an access opening;

at least one electrical connector disposed proximate to the compartment, the at least one electrical connector to receive an electronic device by a user; and

an access device including:

a door having a circular shape rotatable between a closed position to cover the access opening of the compartment and an open position to uncover the access opening of the compartment to enable a user to access the at least one electrical connector, the door including an inner surface, an outer surface and a plurality of connectors;

the inner surface having a concave shape to face inwards toward the compartment in the closed position;

the outer surface having a convex shape to face outwards away from the compartment in the closed position; and

the connectors to movably connect to the main body to enable the door to rotate about a central axis thereof corresponding to a diameter of the door; and

wherein the door is to reside within the compartment in the open position and the closed position.

8. The printing apparatus of claim 7, wherein the main body further comprises a stop portion extending towards the access opening and the inner surface further includes a stop region to contact the stop portion in the closed position.

9. The printing apparatus of claim 7, wherein the outer surface of the door is flush with respect to an outer surface of the main body.

10. The printing apparatus of claim 7, wherein the plurality of connectors extends from the inner surface of the door and are spaced apart from each other by a distance about equal to a diameter of the door.

11. The printing apparatus of claim 7, wherein the main body further comprises a stop portion extending towards the access opening and the inner surface of the door includes a stop region to contact the stop portion in the closed position.

12. A method of accessing an electrical connector of a printing apparatus, the method comprising:

contacting a door disposed in a compartment of a main body of the printing apparatus in a closed position and in an open position, and having a circular shape and a central axis along a diameter thereof;

rotating the door about the central axis from the closed position in which the door covers an access opening of the compartment to an open position in which the door uncovers the access opening of the compartment; and

accessing the electrical connector through the access opening and inside the compartment.

13. The method of claim 12, wherein the rotating the door about the central axis from the closed position to an open position further comprises:

rotating the door about the central axis from the closed position to the open position in which a portion of the door is moved outside of the compartment and subsequently is placed back into the compartment.

14. The method of claim 12, wherein the door includes an inner surface having a concave shape to face inwards toward the compartment in the closed position and an outer surface having a convex shape to face outwards away from the compartment in the closed position.

15. The method of claim 12, wherein the door further comprises:
a plurality of connectors disposed on the inner surface of the door to movably connect to the main body and spaced apart from each other by a distance about equal to a diameter of the door.

1/8

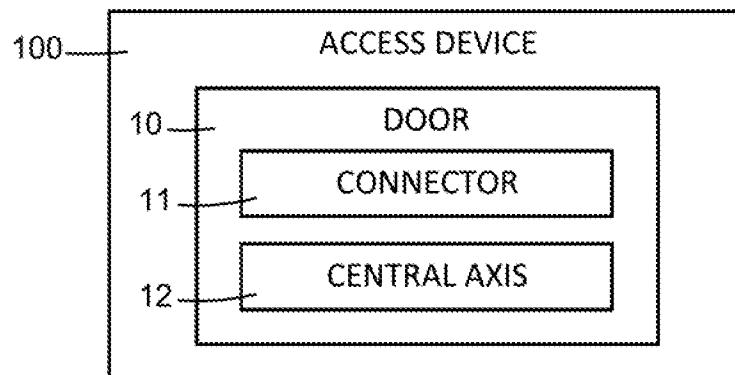


FIG. 1

2/8

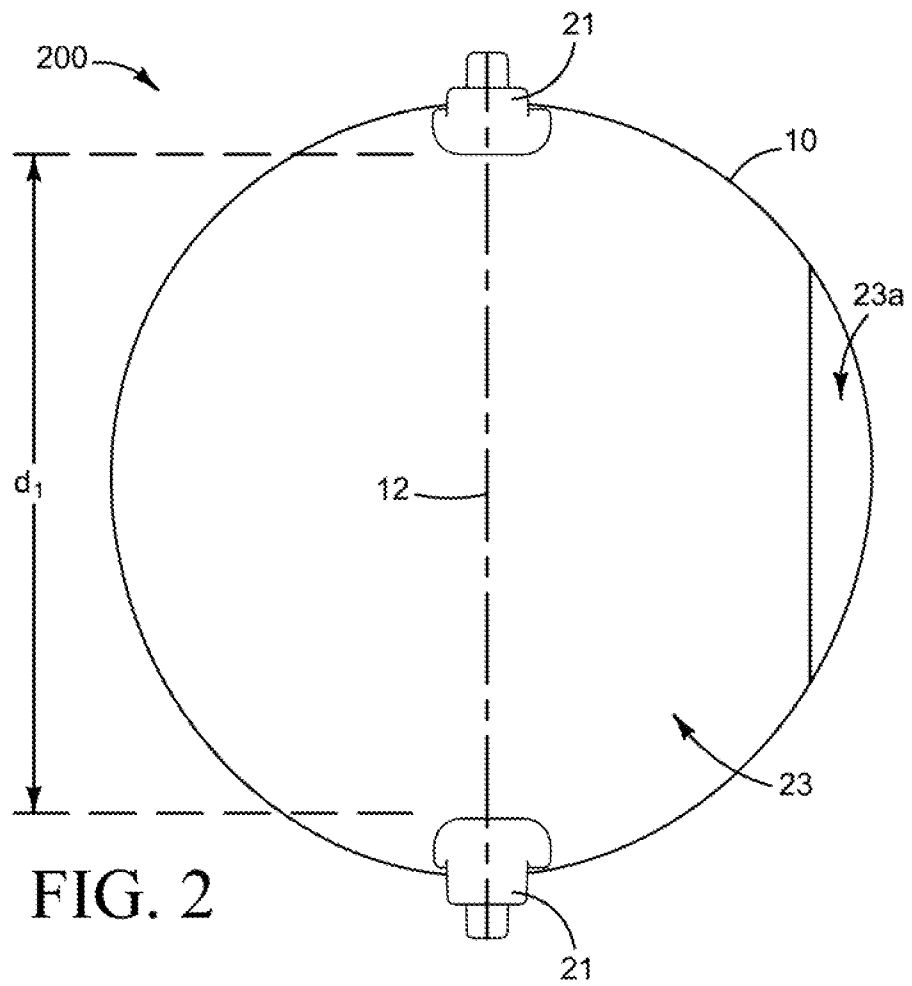


FIG. 2

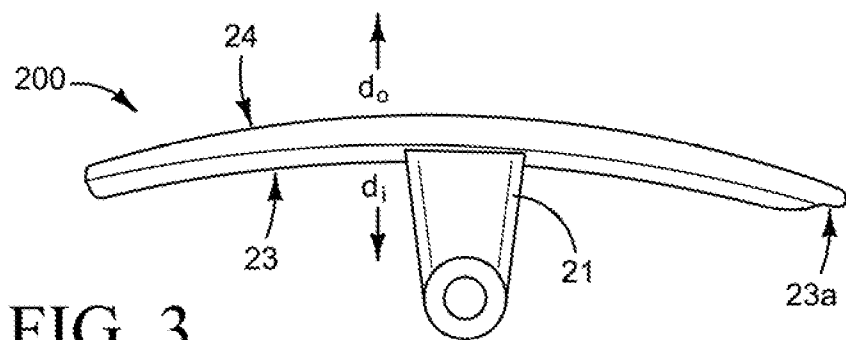


FIG. 3




FIG. 4

3/8

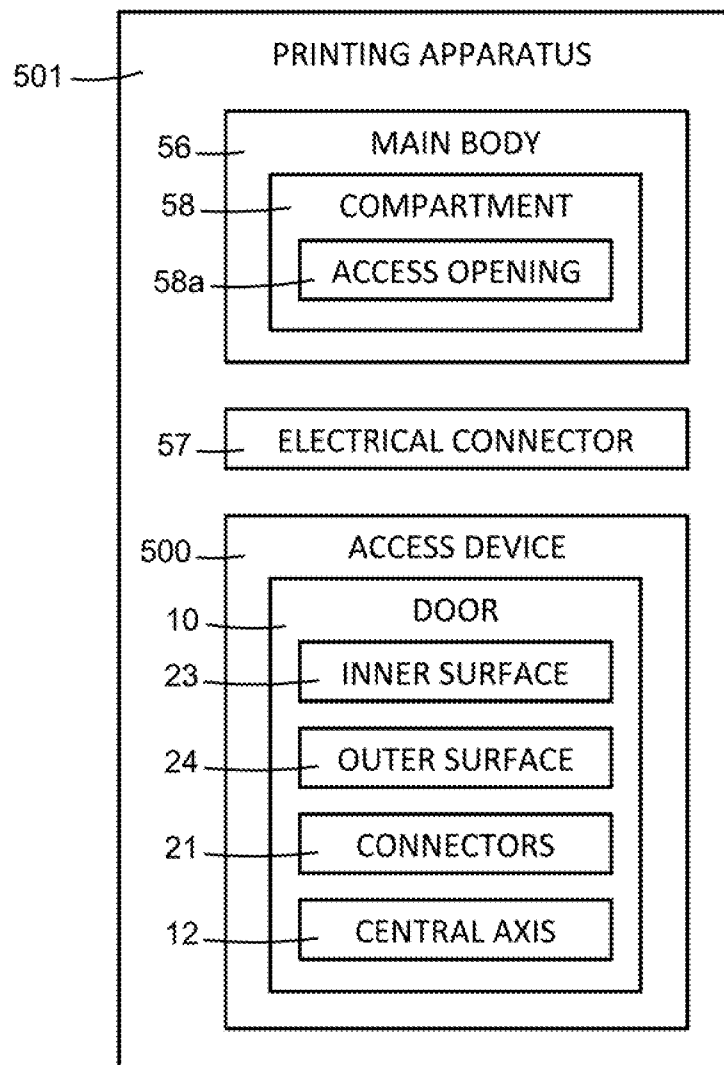


FIG. 5

4/8




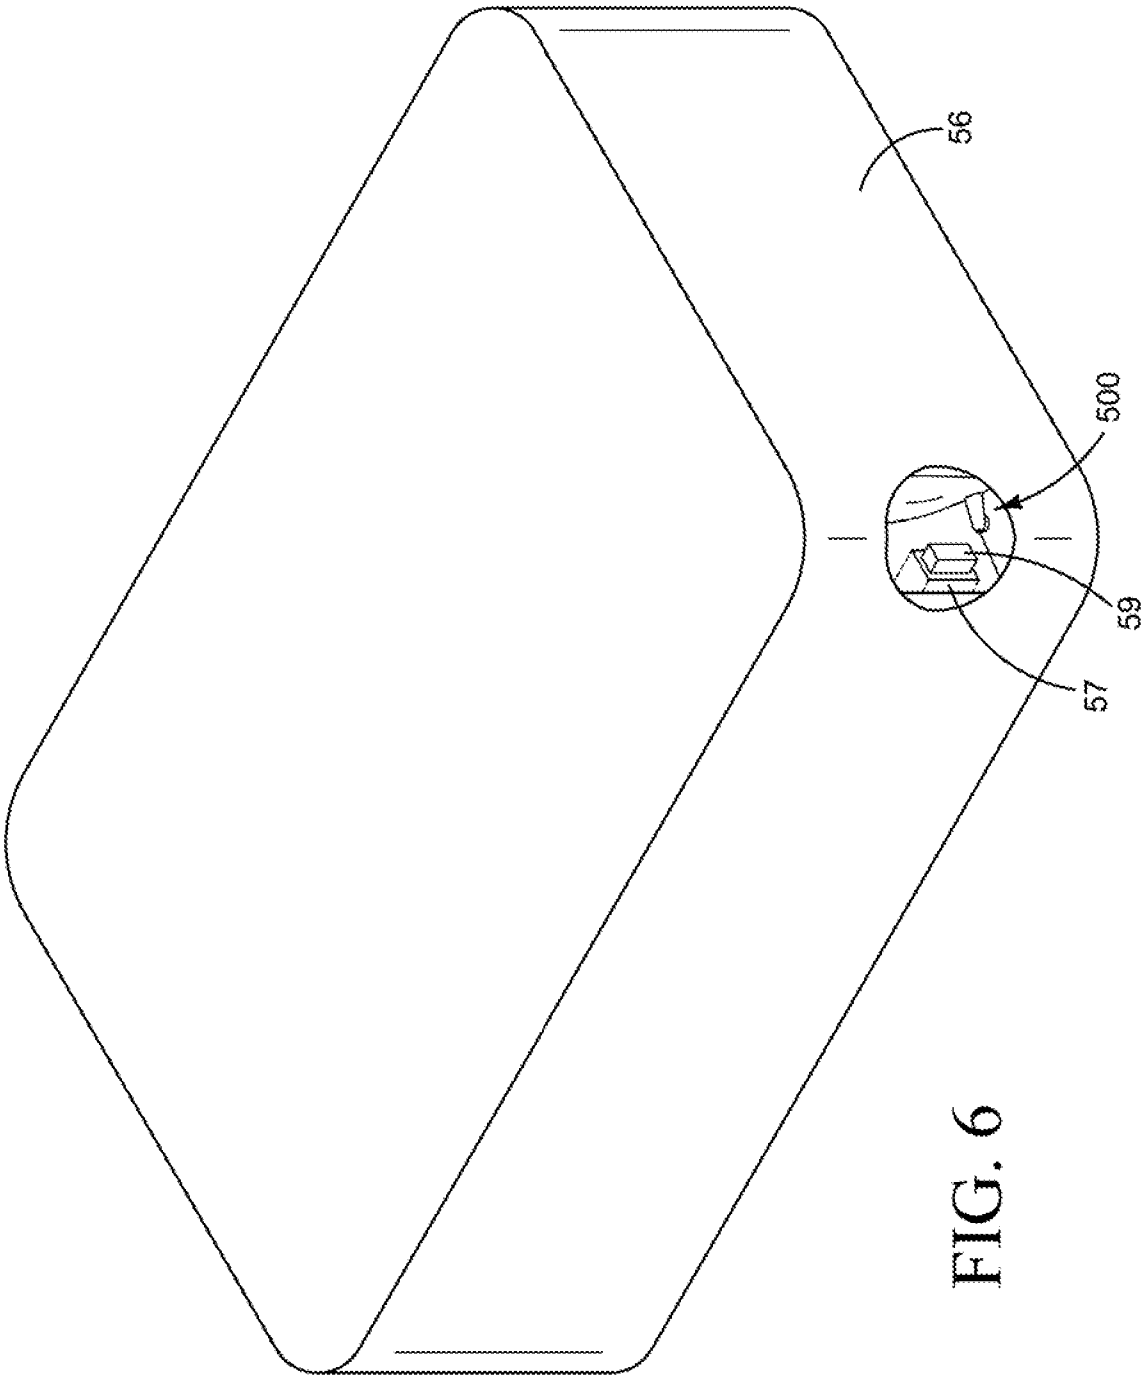


FIG. 6

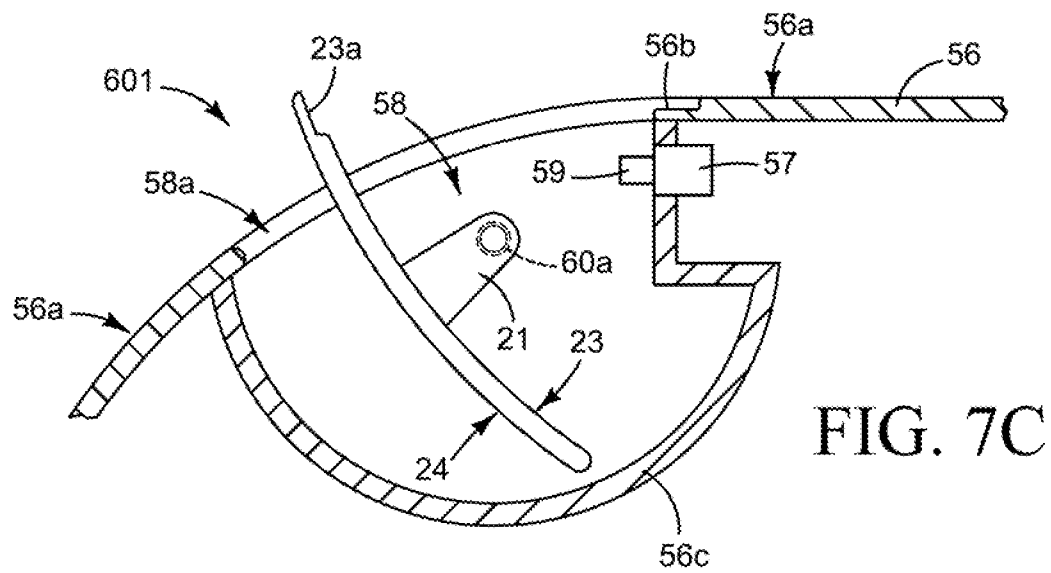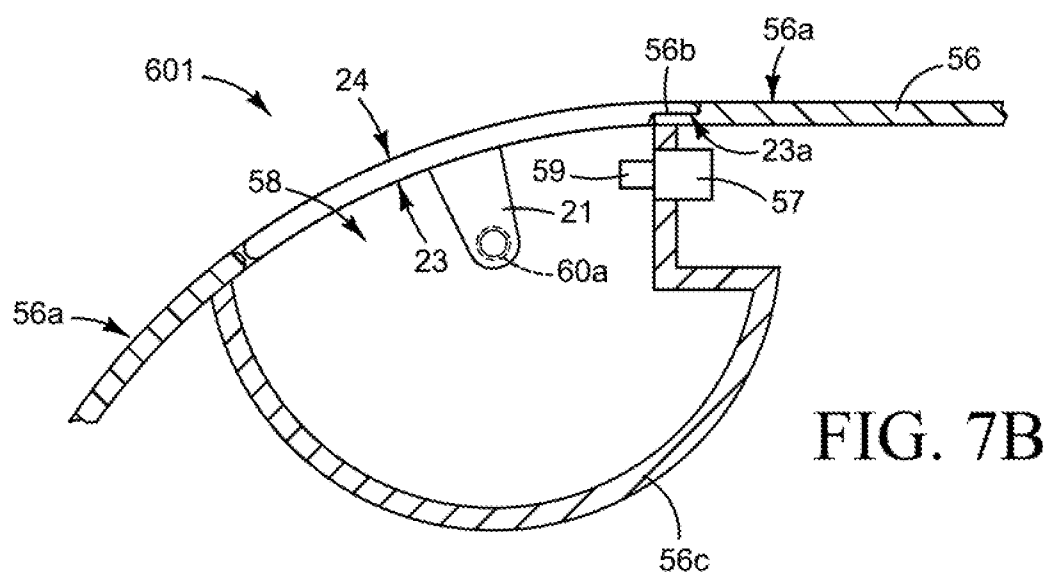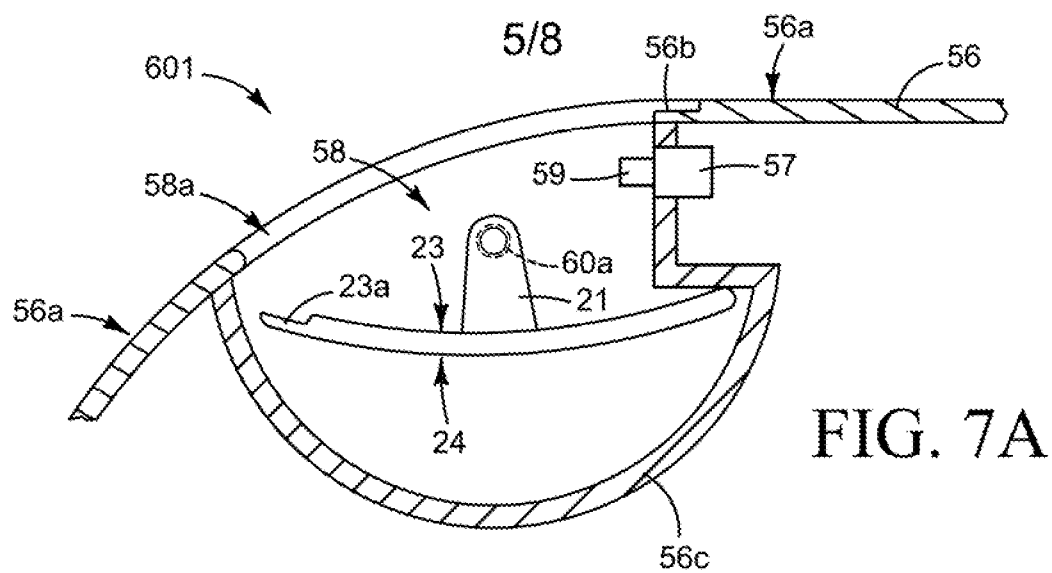

6/8

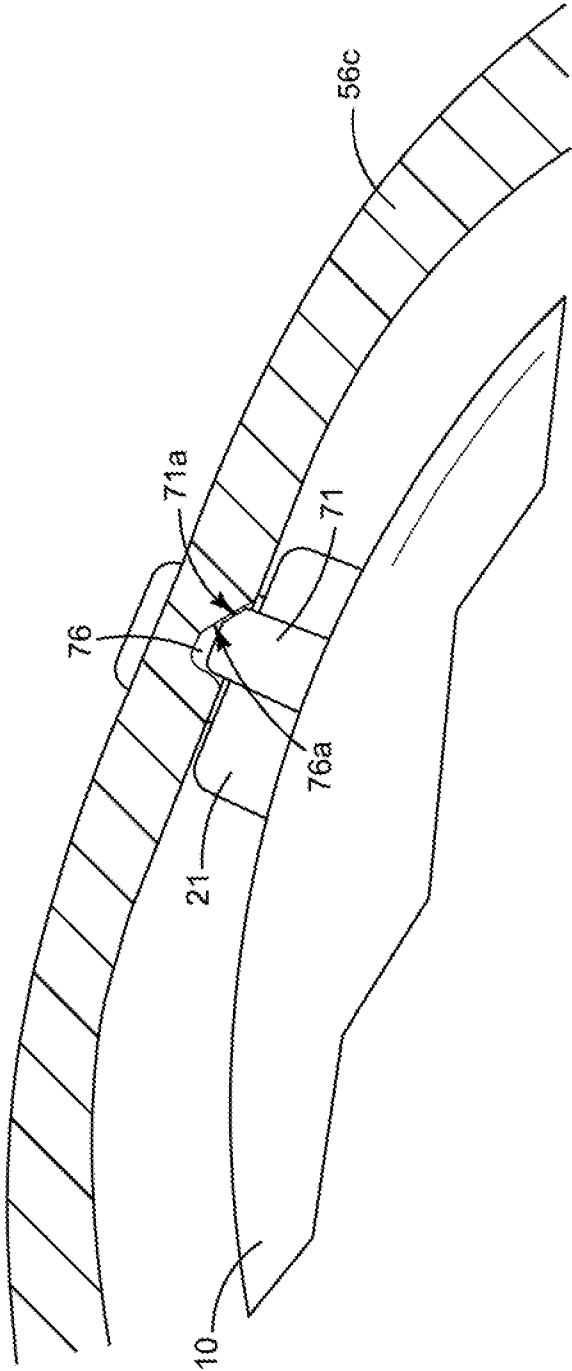


FIG. 7D

7/8

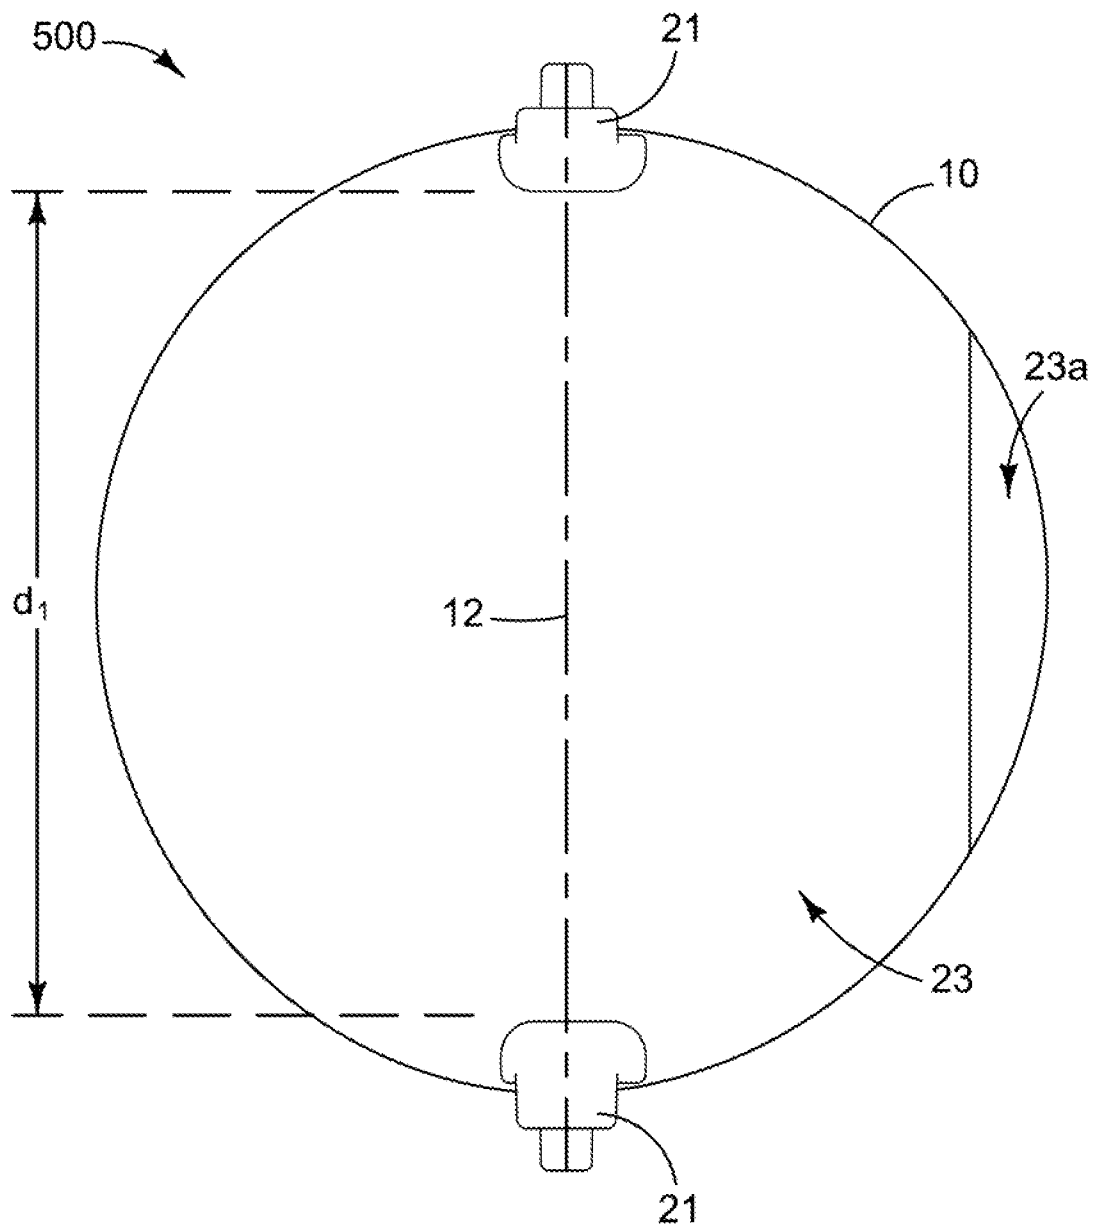


FIG. 8

8/8

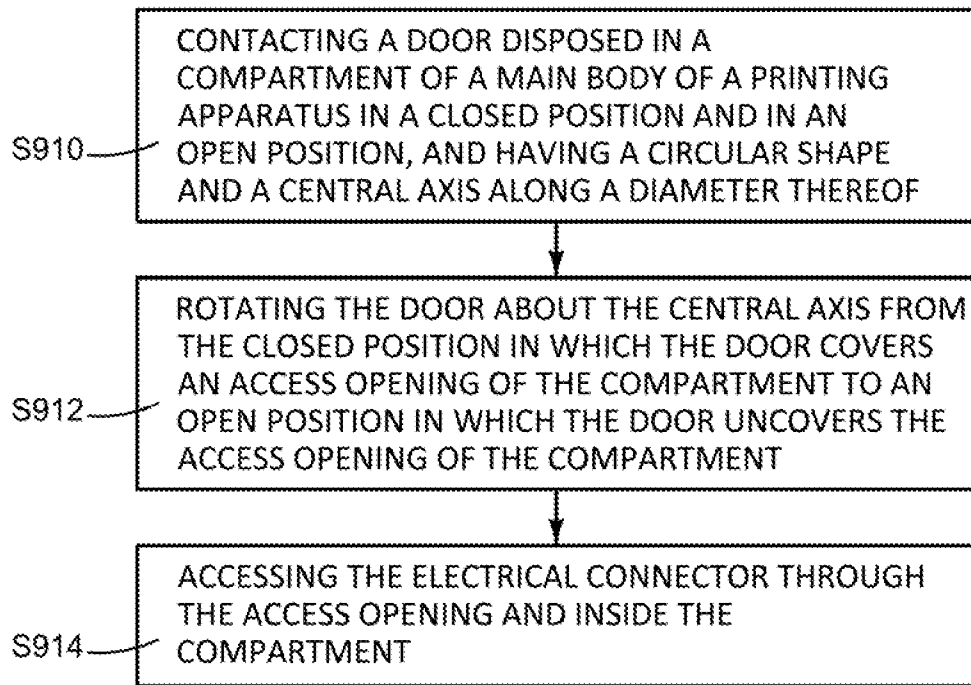


FIG. 9

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US2014/053098**A. CLASSIFICATION OF SUBJECT MATTER****B41J 29/00(2006.01)i**

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

B41J 29/00; G06K 17/00; H05K 5/03; B41J 29/13; E05F 5/02; H05K 5/03; B41J 29/13; H01M 2/10

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Korean utility models and applications for utility models

Japanese utility models and applications for utility models

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

eKOMPASS(KIPO internal) & Keywords: printer, door, cover, open, close, compartment, axis, connector, access, rotate

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	JP 2006-202972 A (FUNAI ELECTRIC CO., LTD.) 03 August 2006 See abstract, paragraphs [0016]–[0026], and figures 1–6.	1–15
A	WO 2014-117830 A1 (ARCELIK ANONIM SIRKETI et al.) 07 August 2014 See paragraphs [0036]–[0043] and figures 1–7c.	1–15
A	JP 2007-329241 A (CITIZEN HOLDINGS CO., LTD. et al.) 20 December 2007 See abstract, paragraphs [0016]–[0024], and figures 1–3.	1–15
A	JP 2005-059228 A (SEIKO EPSON CORP.) 10 March 2005 See abstract, claims 1–5, and figures 1–3.	1–15
A	US 4885219 A (MILLER, TIMOTHY C.) 05 December 1989 See claims 1–7 and figures 1–4.	1–15



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

19 May 2015 (19.05.2015)

Date of mailing of the international search report

19 May 2015 (19.05.2015)

Name and mailing address of the ISA/KR

International Application Division
Korean Intellectual Property Office
189 Cheongsu-ro, Seo-gu, Daejeon Metropolitan City, 302-701,
Republic of Korea

Facsimile No. ++82 42 472 7140

Authorized officer

KIM, Jin Ho

Telephone No. +82-42-481-8699



INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/US2014/053098

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
JP 2006-202972 A	03/08/2006	None	
WO 2014-117830 A1	07/08/2014	None	
JP 2007-329241 A	20/12/2007	JP 04668848 B2	13/04/2011
JP 2005-059228 A	10/03/2005	JP 04389506 B2	24/12/2009
US 4885219 A	05/12/1989	CA 1303670 C	16/06/1992
		GB 2225481 A	30/05/1990
		GB 2225481 B	24/03/1993
		JP 02-158195 A	18/06/1990
		JP 07012115 B2	08/02/1995
		KR 10-1992-0004282 B1	25/06/1992
		KR 20-1993-0001064 Y1	08/03/1993