



(11) **EP 3 057 182 B1**

(12) **EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention of the grant of the patent:  
**03.04.2019 Bulletin 2019/14**

(51) Int Cl.:  
**H01R 13/56** <sup>(2006.01)</sup> **H01R 31/06** <sup>(2006.01)</sup>  
**H01R 13/58** <sup>(2006.01)</sup> **H01R 13/627** <sup>(2006.01)</sup>

(21) Application number: **15154926.8**

(22) Date of filing: **12.02.2015**

(54) **Connector with pre-assembled conduit adapter**

Verbindert mit vormontiertem Leitungsadapter

Connecteur avec adaptateur de conduit pré-assemblé

(84) Designated Contracting States:  
**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO RS SE SI SK SM TR**

(43) Date of publication of application:  
**17.08.2016 Bulletin 2016/33**

(73) Proprietor: **Aptiv Technologies Limited**  
**St. Michael (BB)**

(72) Inventors:  
• **Grudzewski, Michal**  
**31-515 Krakow (PL)**  
• **PITALA, Krzysztof**  
**34-730 MSZANA DOLNA (PL)**

(74) Representative: **Robert, Vincent et al**  
**Aptiv Services France SAS**  
**Aptiv EMEA Patent Department**  
**Bâtiment Le Raspail - Paris Nord 2**  
**22, avenue des Nations**  
**CS 65059 Villepinte**  
**95972 Roissy CDG Cedex (FR)**

(56) References cited:  
**WO-A1-2013/027352** **FR-A1- 2 770 041**  
**JP-A- 2008 293 810** **US-A- 3 638 169**  
**US-A1- 2005 003 699** **US-A1- 2011 065 308**  
**US-A1- 2011 256 756**

**EP 3 057 182 B1**

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

**Description****1. Technical field of the invention**

5 [0001] The present invention relates to conduit adapter systems comprising a conduit adapter that is assigned to an electrical connector assembly.

**2. Background of the invention**

10 [0002] Conduit adapters are commonly used to protect electrical cables that enter or exit an electrical connector assembly. In particular the cables are protected from environmental influences, such as temperature, dust, moisture and/or the like. Still further conduit adapters can provide strain relief functionality and/or protect the cables from unallowed cable bending and thus prevent cable damages.

15 Conduit adapters can provide connecting means between cable channels, and in particular flexible cable channels and electrical connector assemblies. Conduit adapters are for example widely used in automobile applications, industrial applications and/or consumer electronic applications. Document JP2008293810 disclose a conduit adapter according the preamble of the current invention.

20 [0003] Conduit adapter systems known in the art typically comprise two separate parts that can be connected together to form the conduit adapter around the cable to be protected. Providing a two-part adapter allows the conduit adapter to be installed after the installation of the connector and the respective cable. However, in an industrial manufacturing process two separate parts are undesired, since the number of individual parts increases the complexity of the manufacturing process and in particular the supply process of the parts.

25 [0004] Therefore, the single parts of known conduit adapters are usually connected via a hinge, so that only one physical part has to be handled in the supply process. Known hinges are orientated at a longitudinal axis at the sides of the parts of the conduit adapter. This allows the parts to be rotated around an axis parallel to the cables of the electrical connector assembly, when the parts shall be connected. However, providing a hinge at the longitudinal axis, i.e. at the sides of the parts is disadvantageous, since there is less space to provide fixing means. Thus the fixing means on the hinge-side have to be designed smaller and therefore weaker, than the fixing means on the non-hinge-side of a conventional conduit adapter.

30 [0005] Still further, the connection between electrical connector system and conduit adapter is typically achieved by clamping or engaging the electrical conductor system when the two parts of the conduit adapter are connected. Thus, in order to finally mount the conduit adapter three parts, namely two conduit adapter parts and the electrical connector, have to be handled.

35 [0006] The object of the present invention is to provide conduit adapter systems and a method to assemble said conduit adapter systems, which overcomes the problems and drawbacks described above.

**3. Summary of the invention**

40 [0007] The object described above is achieved by a conduit adapter system according to independent claim 1. In particular, the object is solved by a conduit adapter system comprising a conduit adapter being assigned to an electrical connector assembly, whereby the conduit adapter comprises a first shell and a second shell. The first shell of the conduit adapter comprises at least one first fixing element and the second shell of the conduit adapter comprises at least one corresponding second fixing element, so that the first and second shell can be fixed together. Further, the first shell comprises at least one pre-locking means that can be engaged with corresponding pre-locking means of the electrical connector assembly, to lock the first shell to the electrical connector assembly in a pre-assembled condition.

45 [0008] Providing a first and a second shell that can be fixed together allows an installation of the conduit adapter, when the electrical connector assembly and respective cables are already mounted in a more complex system such as a harness or the like. Thereby, a first and/ or second fixing element can be any kind of element that is suitable to fix the first and second shell together in a releasable or permanent manner, such as screws, bolts, rivets, pins, clamps and/or the like. A combination of different fixing elements is also possible.

50 [0009] Providing pre-locking means at the first shell of the conduit adapter allows the conduit adapter to be locked to the electrical connector assembly, before the first and second shell are fixed together. This is advantageous, since during the installation of the conduit adapter only two parts have to be handled separately at once. In a first step, the first shell of the conduit adapter can be pre-locked to the electrical connector assembly to arrive at the preassembled condition. In this preassembled condition the shell is securely (pre-)attached to the connector assembly, so than an operator can use both hands to e.g. arrange the cables of the connector and to fix the second shell to the first shell. It is thus advantageously no longer necessary to hold the shell(s) manually.

55 [0010] The pre-locking means can be any kind of means that is suitable to provide a releasable or permanent connection

between the first shell of the conduit adapter and the electrical connector assembly, such as screws, bolts, rivets, pins, clamps, adhesives and/or the like.

**[0011]** Further, at least one pre-locking means of the first shell and the corresponding pre-locking means of the electrical connector assembly can be formed as latching protrusions and corresponding latching recesses.

5 **[0012]** A latching connection that is achieved by engaging at least one latching protrusion and a corresponding latching recess is advantageous, since those latching connections can be locked rapidly and preferably without the use of additional tools. The latching protrusion can either be formed on the first shell of the conduit adapter or on the electrical connector assembly.

10 **[0013]** Further, the first shell of the conduit adapter comprises a first groove that can be engaged with a first collar of the electrical connector assembly in the pre-assembled condition. Said first groove increases the mechanical stability of the connection between the conduit adapter and the electrical connector assembly, particularly in axial direction of the cables of the electrical connector assembly, when it is engaged with the first collar of the electrical connector assembly. Still further, the combination of groove and collar can provide sealing functionality and prevent the penetration of moisture and contaminants in the conduit adapter.

15 **[0014]** Still further, the collar and the groove facilitate the orientation of the first shell to the electrical connector assembly during the locking of the pre-locking means, and therefore allow a fast pre-locking.

**[0015]** The at least one pre-locking means of the first shell is formed as a latching protrusion. The at least one pre-locking means of the first shell is arranged in the first groove, and the corresponding pre-locking means of the electrical connector assembly is formed as a latching recess that is formed in the first collar of the electrical connector assembly. By arranging the at least one latching protrusion in the first groove, and by forming a corresponding latching recess in the first collar, the required space to form the pre-locking means and the collar/groove can be reduced to a minimum. Thus the size of the conduit adapter needs not to be increased to provide the new pre-locking feature.

20 **[0016]** Preferably, the second shell comprises a second groove that can be engaged with a second collar of the electrical connector assembly, whereby the second collar is preferably integrally formed with the first collar of the electrical connector assembly.

25 **[0017]** The second groove and the second collar are preferably engaged, when the first and second shell are fixed together. Providing a second groove and a second collar is advantageous, since the mechanical stability of the connection between the conduit adapter and the electrical connector assembly in particular in axial direction (i.e. in the longitudinal direction of the cables) can be further improved. Further, by applying a second collar, fixing of the second shell to the first shell is facilitated, since the second shell can be guided by the collar and the corresponding second groove in the correct position, even before the fixing elements are fixed to each other. Thus, a manufacturer has the possibility to monitor the correct position of the first and second shell before the fixing elements are fixed.

30 **[0018]** Preferably, the first shell comprises at least two, and even more preferably four first fixing elements that are formed identical, whereby the second shell comprises corresponding second fixing elements.

35 **[0019]** Providing identical fixing elements is advantageous, since the fixing forces of the single fixing connections are distributed uniformly over the conduit adapter. Further, this facilitates the design of the conduit adapter. Still further, the conduit adapter can be assembled with identical fixing-forces on the right hand and left hand side of the adapter. Yet still further, when latching connections are used, the correct connection of the identical latching connections can be easily controlled by the uniform clicking sound of the identical latching connections.

40 **[0020]** Preferably, the first fixing elements and the corresponding second fixing elements are formed as latching recesses and corresponding latching protrusions, and even more preferably as latching hooks and latching noses.

**[0021]** A latching connection that is achieved by engaging at least one latching protrusion and a corresponding latching recess is advantageous, since those latching connections can be locked rapidly, preferably without the use of additional tools. Thereby, the latching protrusions can be either provided on the first shell or on the second shell. Combinations of latching protrusions and latching recesses on a shell of the conduit adapter are also possible.

45 **[0022]** Preferably, the latching protrusions and latching recesses are arranged in that manner, that the second shell can be positioned relative to the first shell and is guided by the latching elements from an un-latched to a latched condition. Thus the fixing of the second shell to the first shell is facilitated.

50 **[0023]** Preferably, the latching hooks are U-shaped. A U-shaped hook comprises two legs and a cross bar. Such latching hooks are advantageous, since they can provide high latching forces and therefore a strong and secure connection. Still further, the risk of tangling up the latching hook with particularly thin cables to be protected is reduced by using U-shaped hooks.

55 **[0024]** Preferably, the first and second shells are connected via a hinge. A hinge is advantageous, since only one physical part, and not two separate shells, has to be handled in the supply process. Still further, a hinge limits the degree of freedoms of the connected parts and therefore facilitates the assembly of the conduit adapter system, since the second shell is guided by the hinge. The hinge can be a flexible web, a joint or any suitable connection between the first and second shell that allows the second shell to be moved from a position in the pre-assembled condition to its final position; i.e. when the second shell is fixed to the first shell.

[0025] Preferably, the hinge that connects the first shell and the second shell is arranged between a first front end of the first shell and a second front end of the second shell. The first front end is orientated opposite to the electrical connector assembly in the pre-assembled condition, and the second front end points in the same direction as the first front end, when the first and second shell are fixed together. Thus, the first and second front ends build together an opening, when the first and second shells are fixed together, which opening encloses at least one cable of the electrical connector assembly.

[0026] The above described orientation of the hinge is preferable, since when the first and second shells are fixed together, the hinge extends in the direction of the cables of the electrical connector assembly. Thus, no extra space is required for the hinge in the radial direction of the cables. This allows the connectors and corresponding conduit adapters to be placed in close proximity to each other. Still further, since the hinge is not provided at the longitudinal axis at the side of the shells, this space is available for fixing elements. Thus identical formed fixing elements can be provided at the shells.

[0027] Preferably, at least one electrical cable of the electrical connector assembly is guided by the conduit adapter. The hinge that connects the first shell and the second shell provides an axis of rotation that is essentially perpendicular to the longitudinal direction of the cables of the electrical connector assembly.

[0028] A hinge that provides an axis of rotation that is essentially perpendicular to the longitudinal direction of the cables of the electrical connector assembly and connects the first shell and the second shell of the conduit adapter is advantageous, since the second shell can be moved to the first shell with reduced space requirements on the sides of the conduit adapter, compared to conduit adapters, where the hinge is provided at the side of the shells. Preferably, the hinge provides at least a second axis of rotation that allows moving the second shell in an evasive movement around the cables of the electrical connector assembly. The reduced laterally space requirement allows multiple connectors to be placed in close proximity to each other.

[0029] Preferably, the hinge is a flexible web that is integrally formed with the first and second shell. Using a flexible web as the hinge is advantageous, since the first and second shell as well as the flexible web can be produced in a single step, for example by means of injection molding. Alternatively, the flexible web can be soldered, welded, adhered or fixed in any other suitable way to the first and second shell.

[0030] Such a flexible web allows a rotation of the second shell around an axis perpendicular to the direction of the cables of the electric conduit adapter as described above. Further, such a flexible web also allows torsional movement of the second shell, so that the space requirements during the assembly of the conduit adapter can be reduced, as described above.

[0031] Preferably, the conduit adapter provides a strain relief and even more preferably the first and/or the second shell provide openings that are suitable to guide a cable strap that fixes the at least one cable of the electrical connector assembly to the first and/or second shell of the conduit adapter.

[0032] A strain relief functionality of the conduit adapter can for example be achieved by protrusions that are provided at the shells of the conduit adapter and which protrusions are orientated inwardly, when the first shell and the second shell are fixed together so that the cables of the electrical connector assembly are clamped by said protrusions.

[0033] Alternatively, a cable strap can be used that is guided through openings provided in the first and/or second shell. Providing strain relief functionality is advantageous, since cable or connector damages due to traction and/or bending forces can be reduced.

[0034] Particularly the combination of the features of the pre-locking of the first shell to the electrical connector assembly and the openings in one of the first and/or second shell is advantageous, since the cables can be fixed by means of the cable strap to the conduit adapter in the pre-assembled condition. A manufacturer would have to handle only two parts that are easily accessible.

[0035] The conduit adapter system comprises an electrical connector assembly whereby the electrical connector assembly provides at least one pre-locking means. The pre-locking means of the electrical connector assembly corresponds to the pre-locking means of the conduit adapter.

#### 4. Description of preferred embodiments

[0036] In the following, the invention is described exemplarily with reference to the enclosed figures, in which:

Fig. 1 shows a preferred embodiment of a conduit adapter system in an assembled condition, whereby the conduit adapter is mounted to an electrical connector assembly;

Fig. 2 shows the conduit adapter of Fig. 1;

Fig. 3 shows the conduit adapter system of Fig. 1 in an initial condition, whereby the electrical connector assembly is shown without cables;

Fig. 4 shows the conduit adapter system of Fig. 3 in an initial condition, from a different perspective;

Fig. 5 shows a cut view of the pre-locking means of the first shell of the conduit adapter of Fig. 1 being locked to the

corresponding pre-locking means of the electrical connector assembly, and  
 Fig.6 shows the conduit adapter system of Fig. 1 in a pre-assembled condition.

5 [0037] Fig. 1 shows a preferred embodiment of the conduit adapter system 1 in an assembled condition, whereby the conduit adapter 200 is mounted to an electrical connector assembly 100. In the assembled condition, the conduit adapter 200 is mounted to the electrical connector assembly 100 and the first shell 210 of the conduit adapter 200 is fixed to the second shell 220 by fixing elements. The fixing elements 211, 212 of the first shell 210 are formed as latching elements, and in particular as latching noses. The fixing elements 221 and 222 of the second shell 220 are formed as corresponding fixing elements, namely latching elements and in particular as latching hooks formed in a U-shape.

10 [0038] The first front end 10 of the first shell 210 is oriented opposite to the electrical connector assembly 100. The second front end 20 of the second shell 220 points in the same direction as the first front end 10 in the assembled condition as shown. Thus, both front ends (the first 10 and the second 20) form an opening that guides the cables 300 of the electrical connector assembly 100. The first shell 210 and the second shell 220 are connected via a hinge 230 that is formed as a flexible web and arranged between the first front end 10 and the second front end 20. This hinge 230 provides an axis of rotation 30 that is perpendicular to the longitudinal direction of the cables 300 of the electrical connector assembly 100. In the assembled condition shown, the hinge 230 extends in the direction of the cables 300. Further, the cables 300 are fixed to the first shell 210 by means of a cable strap 240.

15 [0039] Fig. 2 shows the conduit adapter 200 of Fig. 1 from a different perspective so that the other side of the conduit adapter is shown. In the preferred embodiment shown in Fig. 2, the second shell 220 is fixed to the first shell 210 by fixing elements. The fixing elements 213, 214 of the first shell 210 are formed as latching elements, and in particular as latching noses. The fixing elements 223 and 224 of the second shell 220 are formed as corresponding fixing elements, namely latching elements and in particular as latching hooks formed in a U-shape. The preferred embodiment of the conduit adapter 200 shown in Fig. 1 and Fig.2 provides four identical fixing elements that are formed as latching noses and corresponding U-shaped latching hooks.

20 [0040] Further, as can be seen in Fig. 2 the first shell 210 provides two openings 218, 219 that are suitable to guide a cable strap 240 in order to fix cables to the first shell 210. The fixation of the cables 300 to the first shell 210 by means of a cable strap 240 can for example be seen in Fig. 1.

25 [0041] Figures 3 and 4 show the conduit adapter system 1 of Fig. 1 in an initial condition, whereby the electrical connector assembly 100 is shown without cables in Fig. 3. In the initial condition, the conduit adapter 200 is completely separated from the electrical connector assembly 100 and the first shell 210 and the second shell 220 are not fixed together.

30 [0042] The electrical connector assembly 100 provides a first collar 117 that is engageable with a first groove 217 of the first shell 210 of the conduit adapter 200. The electrical connector assembly 100 provides a second collar 127 that is engageable with the second groove of the second shell 220 of the conduit adapter 200. In the assembled condition (cf. Fig. 1), the engagement of grooves and collars provides a high mechanical stability of the connection between the electrical connection assembly 100 and the conduit adapter 200 in particular in the axial direction. The axial direction is the longitudinal direction of the cables.

35 [0043] The first shell 210 comprises at least one pre-locking means 215 that is formed as latching protrusion, which is arranged in the first groove 217. The pre-locking means 215 can be engaged with the corresponding pre-locking means 115 of the electrical connector assembly 100. The corresponding pre-locking means 115 is a latching recess that is formed in the first collar 117 of the electrical connector assembly 100. The electrical connector assembly 100 provides a further (second) corresponding pre-locking means 116 that is a latching recess. The corresponding pre-locking means 116 can be engaged with a second pre-locking means 216 of the first shell (cf. Fig. 4). By engaging the pre-locking means 215, 216 with the corresponding pre-locking means 115, 116, the first shell 210 of the conduit adapters 200 can be locked to the electrical connector assembly 100, to achieve the pre-assembled condition shown in Fig. 6.

40 [0044] Still further, the first shell 210 provides fixing elements 213, 214 that are formed as latching noses. The second shell 220 provides corresponding fixing elements 211, 212, 213, 214 that are formed as latching hooks. The first shell further provides openings 218, 219 that are suitable to guide a cable strap in order to fix cables to the first shell 210.

45 [0045] As can be seen, the hinge 230 that connects the first shell 210 with the second shell 220 is a flexible web and is integrally formed with the first 210 and second shell 220. The hinge 230 is connected to the first shell 210 at the first front end 10 and provides an axis of rotation 30, that is perpendicular of the direction of the cables 300 (cf. Fig. 4) of the electrical connector assembly 100.

50 [0046] Fig. 5 shows a cut view of the pre-locking means 215 of the first shell 210 of the conduit adapter 200 of Fig. 1 being locked to the corresponding pre-locking means 115 of the electrical connector assembly 100 in the pre-assembled condition. In the pre-assembled condition, the pre-locking means 115, 116 of the first shell 210 are engaged with the corresponding pre-locking means 115, 116 of the electrical connector assembly. In a preferred embodiment, the pre-locking means 215, 216 is a latching nose that engages with the corresponding latching recess 115, 116 of the electrical connector assembly 100. As can further be seen, the first collar 117 engages with the first groove 217 of the first shell

210, to provide a high mechanical stability.

[0047] Fig.6 shows the conduit adapter system of Fig. 1 in the pre-assembled condition. In the pre-assembled condition, the first front end 10 of the first shell 210 is oriented opposite to the electrical connector assembly 100. Further, in the pre-assembled condition, the cables 300 are guided by the first shell 210. Thus, the cables 300 can be fixed to the first shell 210 of the conduit adapter 200 by means of a cable strap 240, as shown.

[0048] In order to fix the second shell 220 together with the first shell 210, the second shell 220 has to be moved around the cables 300 around an axis 30 perpendicular to the direction of the cables. The hinge 230 is sufficiently flexible to allow such a movement. To facilitate the fixing of the second shell 220 to first shell 210, the correct position of this second shell 220 the second collar 117 engages the corresponding second groove 127, so that the second shell 220 is guided in the correct axial position, even before the fixing elements are fixed to each other. The fixing elements 221, 222, 223, 224 that are formed as U-shaped hooks, guide the second shell in the sideward direction even before the fixing elements are fixed to each other.

**List of reference numerals**

**[0049]**

1:	Conduit adapter system
10:	First front end
20:	Second front end
30:	Axis of shell rotation
100:	Electrical connector assembly
115, 116:	Corresponding pre-locking means
117:	First collar
127:	Second collar
200:	Conduit adapter
210:	First shell
211, 212, 213, 214:	First fixing elements
215, 216:	Pre-locking means
217:	First groove
218, 219:	Openings
220:	Second shell
221, 222, 223, 224:	Second fixing elements
227:	Second groove
230:	Hinge
240:	Cable strap
300:	Cables

**Claims**

1. Conduit adapter system (1) comprising a conduit adapter (200) and an electrical connector assembly (100), whereby the electrical connector assembly (100) provides at least one pre-locking means (115; 116), whereby the conduit adapter (200) being assigned to the electrical connector assembly (100), whereby

the conduit adapter (200) comprises a first shell (210) and a second shell (220), and whereby the first shell (210) comprises at least one first fixing element (211; 212; 213; 214) and the second shell (220) comprises at least one corresponding second fixing element (221; 222; 223; 224) so that the first and second shells can be fixed together, and whereby

the first shell (210) comprises at least one pre-locking means (215; 216) that can be engaged with the corresponding pre-locking means (115; 116) of the electrical connector assembly (100), to lock the first shell (210) to the electrical connector assembly (100) in a pre-assembled condition, **characterized in that** the first shell (210) comprises a first groove (217) that can be engaged with a first collar (117) of the electrical connector assembly (100) in the pre-assembled condition, whereby the at least one pre-locking means (215; 216) of the first shell (210) is formed as a latching protrusion that is arranged in the first groove (217), and the corresponding pre-locking means (115; 116) of the electrical connector assembly (100) is formed as a latching recess that is formed in the first collar (117) of the electrical connector assembly (100).

2. The conduit adapter system (1) according to claim 1, whereby the at least one pre-locking means (215; 216) of the first shell (210) and the corresponding pre-locking means (115; 116) of the electrical connector assembly (100) are formed as latching protrusions and respectively corresponding latching recesses.
- 5 3. The conduit adapter system according to any one of the preceding claims, whereby the second shell (220) comprises a second groove (227) that can be engaged with a second collar (127) of the electrical connector assembly (100), and whereby the second collar (127) is preferably integrally formed with the first collar (117) of the electrical connector assembly (100).
- 10 4. The conduit adapter system (1) according to any one of the preceding claims, whereby the first shell (210) comprises at least two, and preferably four first fixing elements (211, 212, 213, 214) that are formed identical, whereby the second shell (220) comprises corresponding second fixing elements (221; 222; 223; 224).
- 15 5. The conduit adapter system (1) according to any one of the preceding claims, whereby the first fixing elements (211; 212; 213; 214) and the corresponding second fixing elements (221; 222; 223; 224) are formed as latching recesses and corresponding latching protrusions, and preferably as latching hooks and latching noses.
6. The conduit adapter system (1) according to claim 5, whereby the latching hooks are U-shaped.
- 20 7. The conduit adapter system (1) according to any one of the preceding claims, whereby the first (210) and second shell (220) are connected via a hinge (230).
- 25 8. The conduit adapter system (1) according to claim 7, whereby the hinge (230) that connects the first shell (210) and the second shell (220) is arranged between a first front end (10) of the first shell (210) and a second front end (20) of the second shell (220), and whereby the first front end (10) is orientated opposite to the electrical connector assembly (100) in the pre-assembled condition, and the second front end (20) points in the same direction as the first front end (10), when the first (210) and second (220) shell are fixed together.
- 30 9. The conduit adapter system (1) according to claim 7 or claim 8, whereby at least one electrical cable (300) of the electrical connector assembly (100) is guided by the conduit adapter (200), and whereby the hinge (230) that connects the first shell (210) and the second shell (220) provides an axis of rotation (30) that is essentially perpendicular to the direction of the cables of the electrical connector assembly (100).
- 35 10. The conduit adapter systems (1) according to any one of claim 7 to claim 11, whereby the hinge (230) is a flexible web that is integrally formed with the first (210) and second shell (220).
- 40 11. The conduit adapter system (1) according to any one of the preceding claims, whereby the conduit adapter (200) is a strain relief and whereby the first (210) and/or the second shell (220) preferably provide openings (218, 219) that are suitable to guide a cable strap (240) that fixes the at least one cable of the electrical connector assembly (100) to the first (210) and/or second shell (220) of the conduit adapter (200).

## Patentansprüche

- 45 1. Leitungsadaptersystem (1), das einen Leitungsadapter (200) und eine elektrische Verbinderanordnung (100) aufweist, wobei die elektrische Verbinderanordnung (100) zumindest ein Vorverriegelungsmittel (115; 116) vorsieht, wobei der Leitungsadapter (200) der elektrischen Verbinderanordnung (100) zugewiesen ist, wobei der Leitungsadapter (200) eine erste Schale (210) und eine zweite Schale (220) aufweist, und wobei
- 50 die erste Schale (210) zumindest ein erstes Befestigungselement (211; 212; 213; 214) aufweist und die zweite Schale (220) zumindest ein entsprechendes zweites Befestigungselement (221; 222; 223; 224) aufweist, so dass die ersten und zweiten Schalen aneinander befestigt werden können, und wobei die erste Schale (210) zumindest ein Vorverriegelungsmittel (215; 216) aufweist, das mit dem entsprechenden Vorverriegelungsmittel (115; 116) der elektrischen Verbinderanordnung (100) in Eingriff gebracht werden kann, um die erste Schale (210) mit der elektrischen Verbinderanordnung (100) in einem vorzusammengesetzten Zustand zu verriegeln, **dadurch gekennzeichnet, dass**
- 55 die erste Schale (210) eine erste Nut (217) aufweist, die mit einem ersten Kragen (117) der elektrischen Verbinderanordnung (100) in dem vorzusammengesetzten Zustand in Eingriff gebracht werden kann, wobei das zumindest eine Vorverriegelungsmittel (215; 216) der ersten Schale (210) als ein Rastvorsprung ausgebildet ist, der in der

ersten Nut (217) angeordnet ist, und das entsprechende Vorverriegelungsmittel (115; 116) der elektrischen Verbinderanordnung (100) als eine Rastausnehmung ausgebildet ist, die in dem ersten Kragen (117) der elektrischen Verbinderanordnung (100) ausgebildet ist.

- 5 2. Das Leitungsadaptersystem (1) gemäß Anspruch 1, wobei das zumindest eine Vorverriegelungsmittel (215; 216) der ersten Schale (210) und das entsprechende Vorverriegelungsmittel (115; 116) der elektrischen Verbinderanordnung (100) als Rastvorsprünge und jeweilig entsprechende Rastausnehmungen ausgebildet sind.
- 10 3. Das Leitungsadaptersystem gemäß einem der vorhergehenden Ansprüche, wobei die zweite Schale (220) eine zweite Nut (227) aufweist, die mit einem zweiten Kragen (127) der elektrischen Verbinderanordnung (100) in Eingriff gebracht werden kann, und wobei der zweite Kragen (127) vorzugsweise integral mit dem ersten Kragen (117) der elektrischen Verbinderanordnung (100) ausgebildet ist.
- 15 4. Das Leitungsadaptersystem (1) gemäß einem der vorhergehenden Ansprüche, wobei die erste Schale (210) zumindest zwei und vorzugsweise vier erste Befestigungselemente (211, 212, 213, 214) aufweist, die identisch ausgebildet sind, wobei die zweite Schale (220) entsprechende zweite Befestigungselemente (221; 222; 223; 224) aufweist.
- 20 5. Das Leitungsadaptersystem (1) gemäß einem der vorhergehenden Ansprüche, wobei die ersten Befestigungselemente (211; 212; 213; 214) und die entsprechenden zweiten Befestigungselemente (221; 222; 223; 224) als Rastausnehmungen und entsprechende Rastvorsprünge ausgebildet sind und vorzugsweise als Rasthaken und Rastnasen.
- 25 6. Das Leitungsadaptersystem (1) gemäß Anspruch 5, wobei die Rasthaken U-förmig sind.
- 30 7. Das Leitungsadaptersystem (1) gemäß einem der vorhergehenden Ansprüche, wobei die erste (210) und die zweite Schale (220) über ein Scharnier (230) verbunden sind.
- 35 8. Das Leitungsadaptersystem (1) gemäß Anspruch 7, wobei das Scharnier (230), das die erste Schale (210) und die zweite Schale (220) verbindet, zwischen einem ersten vorderen Ende (10) der ersten Schale (210) und einem zweiten vorderen Ende (20) der zweiten Schale (220) angeordnet ist, und wobei das erste vordere Ende (10) entgegengesetzt zu der elektrischen Verbinderanordnung (100) in dem vorzusammengesetzten Zustand ausgerichtet ist und das zweite vordere Ende (20) in die gleiche Richtung wie das erste vordere Ende (10) zeigt, wenn die erste (210) und die zweite (220) Schale aneinander befestigt sind.
- 40 9. Das Leitungsadaptersystem (1) gemäß Anspruch 7 oder Anspruch 8, wobei zumindest ein elektrisches Kabel (300) der elektrischen Verbinderanordnung (100) durch den Leitungsadapter (200) geführt wird und wobei das Scharnier (230), das die erste Schale (210) und die zweite Schale (220) verbindet, eine Rotationsachse (30) vorsieht, die im Wesentlichen senkrecht zu der Richtung der Kabel der elektrischen Verbinderanordnung (100) ist.
- 45 10. Das Leitungsadaptersystem (1) gemäß einem von Anspruch 7 bis Anspruch 11, wobei das Scharnier (230) ein flexibler Steg ist, der integral mit der ersten (210) und der zweiten Schale (220) ausgebildet ist.
- 50 11. Das Leitungsadaptersystem (1) gemäß einem der vorhergehenden Ansprüche, wobei der Leitungsadapter (200) eine Zugentlastung ist und wobei die erste (210) und/oder die zweite Schale (220) vorzugsweise Öffnungen (218, 219) vorsehen, die geeignet sind, um einen Kabelbinder (240) zu führen, der das zumindest eine Kabel der elektrischen Verbinderanordnung (100) an der ersten (210) und/oder zweiten Schale (220) des Leitungsadapters (200) befestigt.

## 50 Revendications

- 55 1. Système adaptateur pour conduit (1) comprenant un adaptateur pour conduit (200) et un assemblage formant connecteur électrique (100), dans lequel l'assemblage formant connecteur électrique (100) présente au moins un moyen de préblocage (115 ; 116), dans lequel l'adaptateur pour conduit (200) est associé à l'assemblage formant connecteur électrique (100), dans lequel l'adaptateur pour conduit (200) comprend une première coque (210) et une seconde coque (220), et dans lequel la première coque (210) comprend au moins un premier élément de fixation (211 ; 212 ; 213 ; 214) et la seconde coque (220) comprend au moins un second élément de fixation correspondant (221 ; 222 ; 223 ; 224) de sorte que

la première et la seconde coque peuvent être fixées ensemble, et dans lequel la première coque (210) comprend au moins un moyen de préblocage (215 ; 216) qui peut être engagé avec le moyen de préblocage correspondant (115 ; 116) de l'assemblage formant connecteur électrique (100), pour bloquer la première coque (210) sur l'assemblage formant connecteur électrique (100) dans une condition préassemblée,

**caractérisé en ce que**

la première coque (210) comprend une première gorge (217) qui peut être engagée avec un premier collier (117) de l'assemblage formant connecteur électrique (100) dans la condition préassemblée, dans lequel ledit au moins un moyen de préblocage (215 ; 216) de la première coque (210) est formé comme une projection de verrouillage qui est agencée dans la première gorge (217), et le moyen de préblocage correspondant (115 ; 116) de l'assemblage formant connecteur électrique (100) est formé comme un évidement de verrouillage qui est formé dans le premier collier (117) de l'assemblage formant connecteur électrique (100).

2. Système adaptateur pour conduit (1) selon la revendication 1, dans lequel ledit au moins un moyen de préblocage (215 ; 216) de la première coque (210) et le moyen de préblocage correspondant (115 ; 116) de l'assemblage formant connecteur électrique (100) sont formés comme des projections de verrouillage et des évidements de verrouillage correspondants, respectivement.
3. Système adaptateur pour conduit selon l'une quelconque des revendications précédentes, dans lequel la seconde coque (220) comprend une seconde gorge (227) qui peut être engagée avec un second collier (127) de l'assemblage formant connecteur électrique (100), et dans lequel le second collier (127) est de préférence formé intégralement avec le premier collier (117) de l'assemblage formant connecteur électrique (100).
4. Système adaptateur pour conduit (1) selon l'une quelconque des revendications précédentes, dans lequel la première coque (210) comprend au moins deux, et de préférence quatre premiers éléments de fixation (211, 212, 213, 214) qui sont formés identiques, et dans lequel la seconde coque (220) comprend des seconds éléments de fixation correspondants (221 ; 222 ; 223 ; 224).
5. Système adaptateur pour conduit (1) selon l'une quelconque des revendications précédentes, dans lequel les premiers éléments de fixation (211 ; 212 ; 213 ; 214) et les seconds éléments de fixation correspondants (221 ; 222 ; 223 ; 224) sont formés comme des évidements de verrouillage et des projections de verrouillage correspondantes, et de préférence comme des crochets de verrouillage et des ergots de verrouillage.
6. Système adaptateur pour conduit (1) selon la revendication 5, dans lequel les crochets de verrouillage sont en forme de U.
7. Système adaptateur pour conduit (1) selon l'une quelconque des revendications précédentes, dans lequel la première coque (210) et la seconde coque (200) sont connectées via une charnière (230).
8. Système adaptateur pour conduit (1) selon la revendication 7, dans lequel la charnière (230) qui connecte la première coque (210) et la seconde coque (200) est agencée entre une première extrémité frontale (10) de la première coque (210) et une seconde extrémité frontale (20) de la seconde coque (200), et dans lequel la première extrémité frontale (10) est orientée à l'opposé de l'assemblage formant connecteur électrique (100) dans la condition préassemblée, et la seconde extrémité frontale (20) pointe dans la même direction que la première extrémité frontale (10), quand la première coque (210) et la seconde coque (200) sont fixées ensemble.
9. Système adaptateur pour conduit (1) selon la revendication 7 ou 8, dans lequel au moins un câble électrique (300) de l'assemblage formant connecteur électrique (100) est guidé par l'adaptateur pour conduit (200), et dans lequel la charnière (230) qui connecte la première coque (210) et la seconde coque (200) présente un axe de rotation (30) qui est essentiellement perpendiculaire à la direction des câbles de l'assemblage formant connecteur électrique (100).
10. Système adaptateur pour conduit (1) selon l'une quelconque des revendications 7 à 9, dans lequel la charnière (230) est un voile flexible qui est formé intégralement avec la première coque (210) et la seconde coque (200).
11. Système adaptateur pour conduit (1) selon l'une des revendications précédentes, dans lequel l'adaptateur pour conduit (200) est un organe de détente de contrainte, et dans lequel la première coque (210) et/ou la seconde coque (200) présente(nt) de préférence des ouvertures (218, 219) qui sont appropriées pour guider une sangle de câble (240) qui fixe ledit au moins un câble de l'assemblage formant connecteur électrique (100) sur la première coque

**EP 3 057 182 B1**

(210) et/ou sur la seconde coque (200) de l'adaptateur pour conduit (200).

5

10

15

20

25

30

35

40

45

50

55

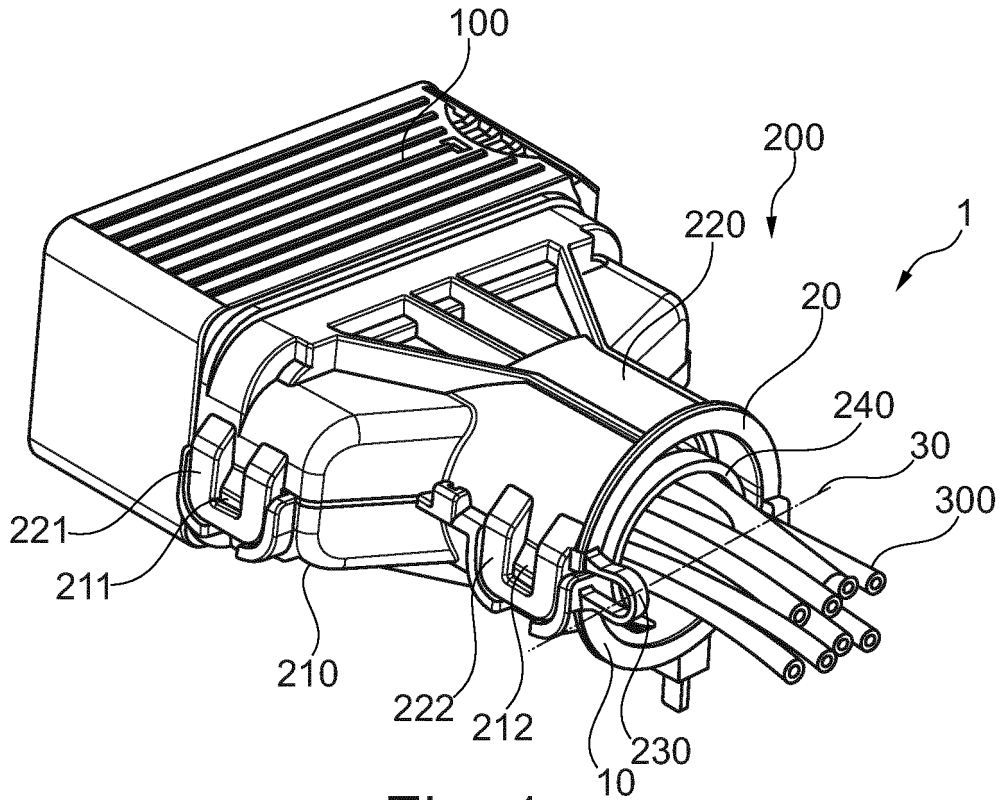


Fig. 1

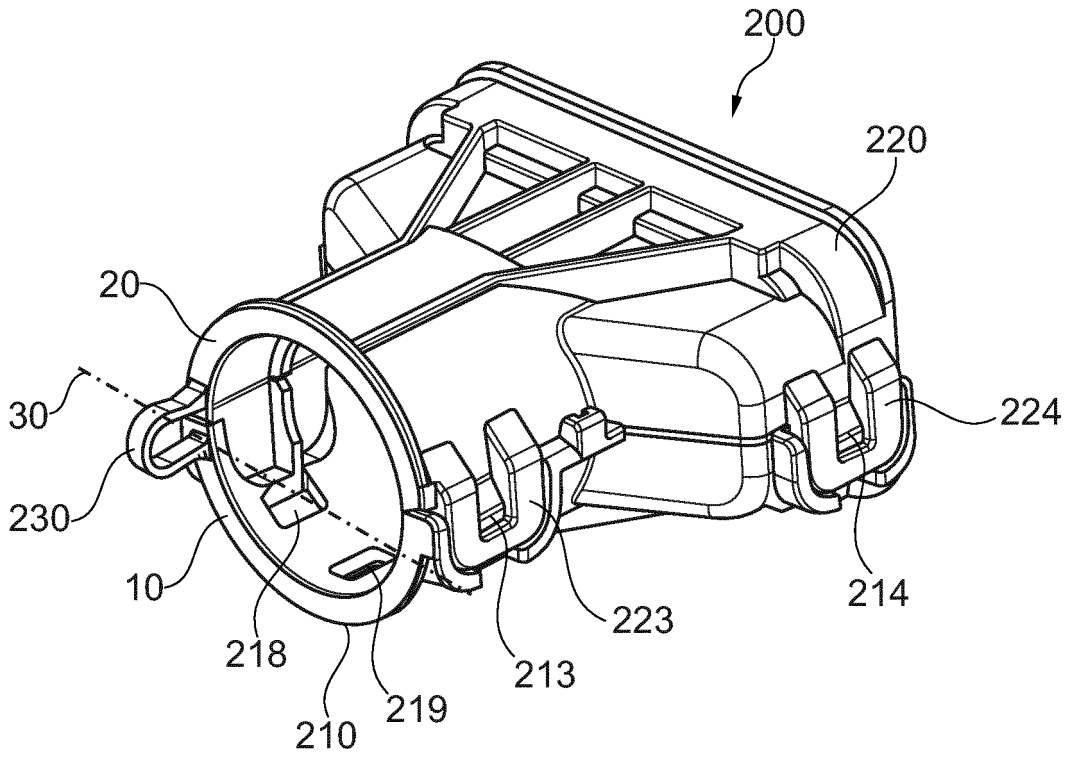


Fig. 2

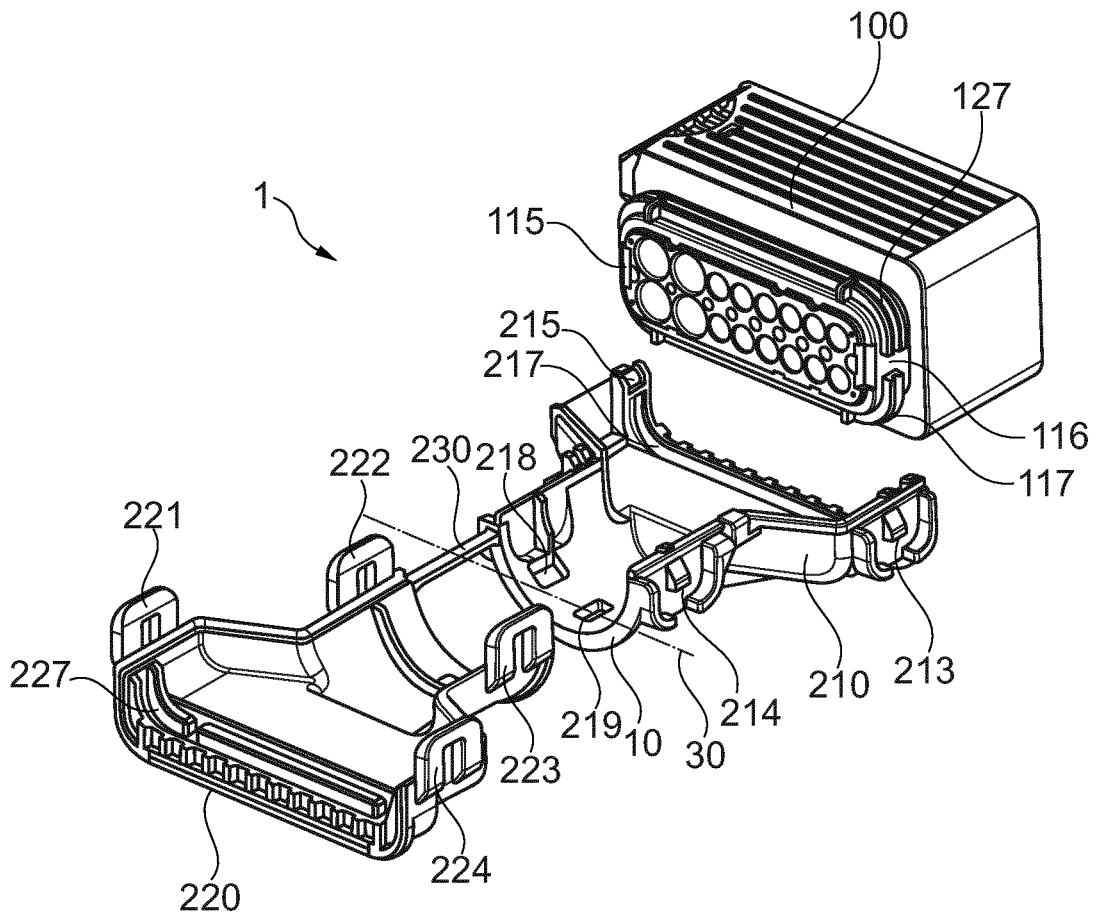


Fig. 3

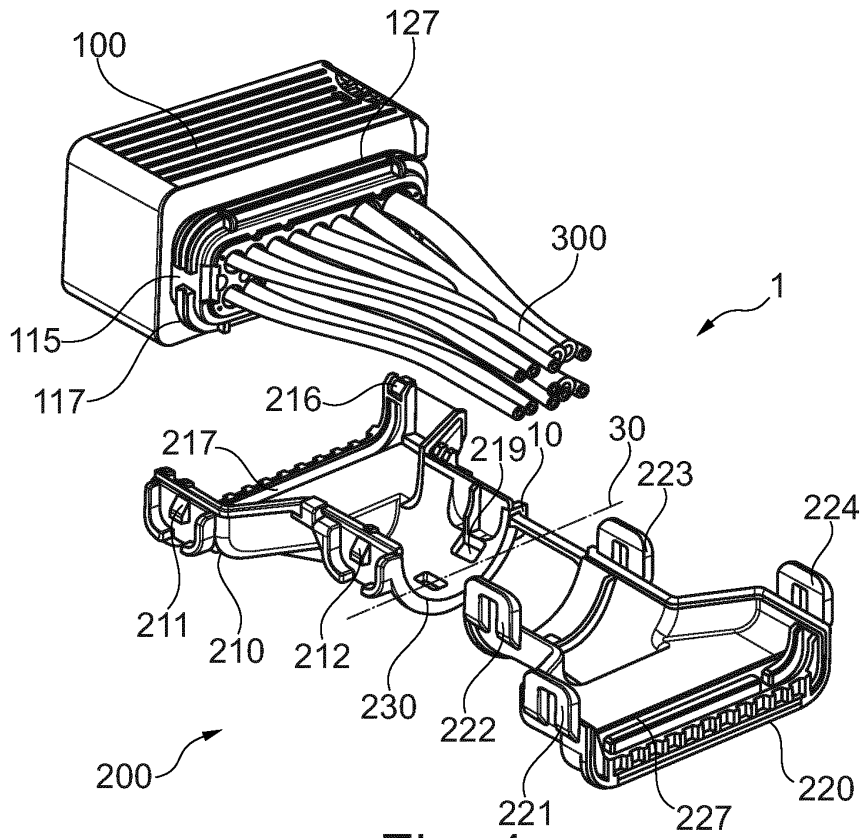


Fig. 4

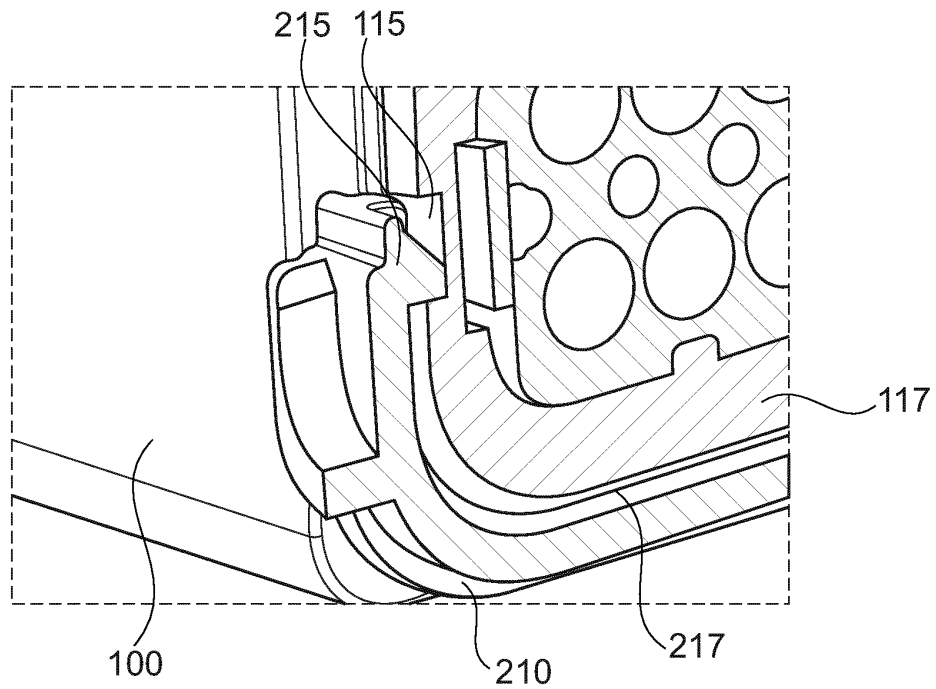


Fig. 5

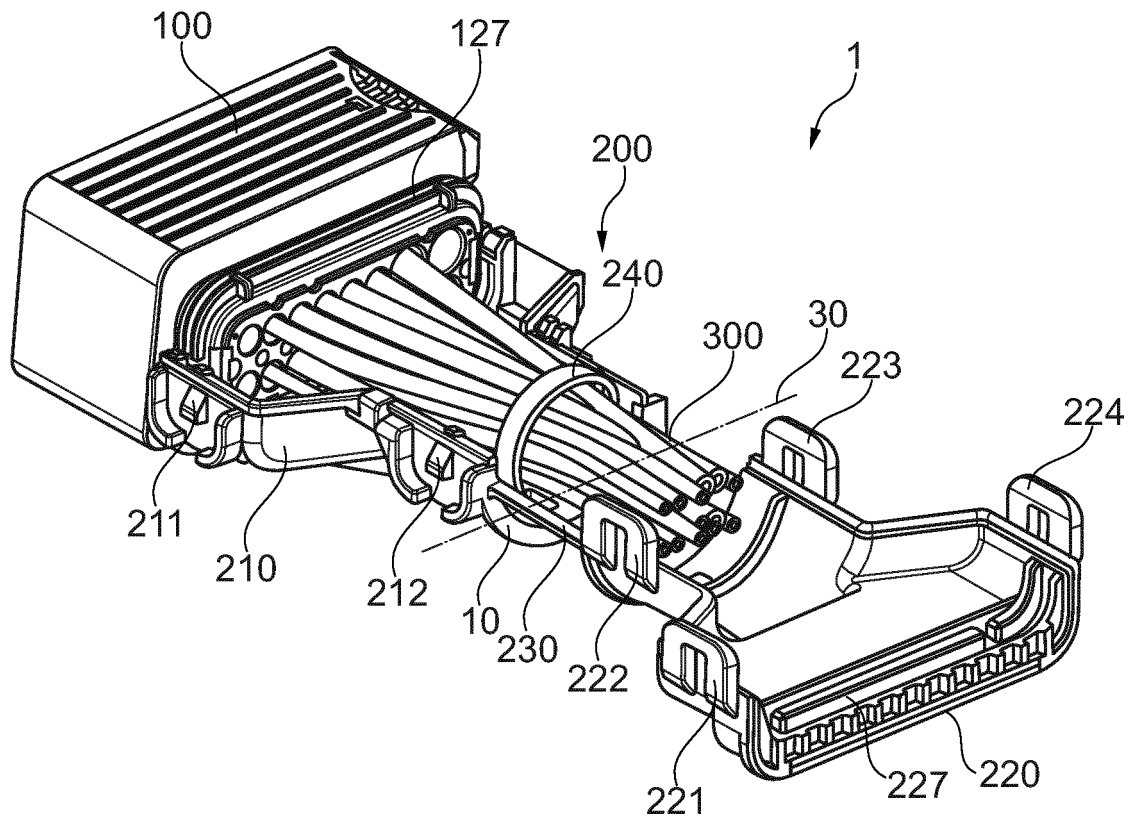


Fig. 6

**REFERENCES CITED IN THE DESCRIPTION**

*This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.*

**Patent documents cited in the description**

- JP 2008293810 B [0002]