



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : G06K 9/00		A1	(11) International Publication Number: WO 97/35275 (43) International Publication Date: 25 September 1997 (25.09.97)
<p>(21) International Application Number: PCT/US97/04662</p> <p>(22) International Filing Date: 21 March 1997 (21.03.97)</p> <p>(30) Priority Data: 08/621,120 22 March 1996 (22.03.96) US</p> <p>(71) Applicant: MICROSOFT CORPORATION [US/US]; One Microsoft Way, Redmond, WA 98052 (US).</p> <p>(72) Inventors: CHEN, Wei-Ge; Apartment #143, 4850 156th Avenue N.E., Redmond, WA 98052 (US). LEE, Ming-Chieh; 5588 166th Place S.E., Bellevue, WA 98006 (US).</p> <p>(74) Agent: MEININGER, Mark, M.; Klarquist, Sparkman, Campbell, Leigh & Whinston L.L.P., One World Trade Center, Suite 1600, 121 S.W. Salmon Street, Portland, OR 97204 (US).</p>		<p>(81) Designated States: DE, GB, JP, European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).</p> <p>Published With <i>international search report</i>.</p>	
<p>(54) Title: REPRESENTATION AND ENCODING OF GENERAL ARBITRARY SHAPES</p> <p>(57) Abstract</p> <p>A hierarchical object encoding technique or process capable of representing general binary arbitrary shapes that include, for example, embedded or disconnected components. The method decomposes successive layers of general binary arbitrary shapes into simple arbitrary shapes. Each mask (80) formed in this manner is a simple arbitrary shape having only a continuous outer boundary (172). Accordingly, each outer boundary is encoded, preferably by a contour encoding method, to provide accurate encoding of general binary shapes.</p>			
<pre> graph TD A146[/USER FORMS ROUGH OUTLINE OF OBJECT IN KEY FRAME/] --> B152[EXPAND OUTLINE OF OBJECT] B152 --> C158[CLASSIFY PIXELS BETWEEN OUTLINES] C158 --> D142{OBJECT PERIMETER} D142 -- MASK --> E80[MASK] E80 --> F172[TRANSFORM MASK] F172 --> G174[DELAY N→N-1] D142 -- NOT MASK --> H176[MASK→OUTLINE] H176 --> I140[/USER SELECTS FEATURE POINTS IN KEY FRAME/] I140 --> J162[FEATURE POINTS] J162 --> K164[DEFINE AND MATCH PIXEL BLOCKS ABOUT FEATURE POINTS] K164 --> L170[DETERMINE SPARSE MOTION TRANSFORMATION] L170 --> M172[TRANSFORM MASK] M172 --> N174[DELAY N→N-1] N174 --> O140 O140 --> P162[FEATURE POINTS] P162 --> Q164[DEFINE AND MATCH PIXEL BLOCKS ABOUT FEATURE POINTS] Q164 --> R170[DETERMINE SPARSE MOTION TRANSFORMATION] R170 --> S172[TRANSFORM MASK] S172 --> T174[DELAY N→N-1] T174 --> U140 </pre>			

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakhstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

REPRESENTATION AND ENCODING OF GENERAL ARBITRARY SHAPES**FIELD OF THE INVENTION**

5 The present invention relates to processes for compressing digital video signals and, in particular, to an object-based digital video encoding process with error feedback to increase accuracy.

BACKGROUND OF THE INVENTION

10 Full-motion video displays based upon analog video signals have long been available in the form of television. With recent increases in computer processing capabilities and affordability, full-motion video displays based upon digital video signals are becoming more widely 15 available. Digital video systems can provide significant improvements over conventional analog video systems in creating, modifying, transmitting, storing, and playing full-motion video sequences.

20 Digital video displays include large numbers of image frames that are played or rendered successively at frequencies of between 30 and 75 Hz. Each image frame is a still image formed from an array of pixels according to the display resolution of a particular system. As examples, VHS-based systems have display resolutions of 25 320x480 pixels, NTSC-based systems have display resolutions of 720x486 pixels, and high-definition television (HDTV) systems under development have display resolutions of 1360x1024 pixels.

30 The amounts of raw digital information included in video sequences are massive. Storage and transmission of these amounts of video information is infeasible with conventional personal computer equipment. With reference to a digitized form of a relatively low resolution VHS image format having a 320x480 pixel resolution, a full- 35 length motion picture of two hours in duration could correspond to 100 gigabytes of digital video information. By comparison, conventional compact optical disks have

capacities of about 0.6 gigabytes, magnetic hard disks have capacities of 1-2 gigabytes, and compact optical disks under development have capacities of up to 8 gigabytes.

5 In response to the limitations in storing or transmitting such massive amounts of digital video information, various video compression standards or processes have been established, including MPEG-1, MPEG-2, and H.26X. These conventional video compression

10 techniques utilize similarities between successive image frames, referred to as temporal or interframe correlation, to provide interframe compression in which pixel-based representations of image frames are converted to motion representations. In addition, the conventional video

15 compression techniques utilize similarities within image frames, referred to as spatial or intraframe correlation, to provide intraframe compression in which the motion representations within an image frame are further compressed. Intraframe compression is based upon

20 conventional processes for compressing still images, such as discrete cosine transform (DCT) encoding.

Although differing in specific implementations, the MPEG-1, MPEG-2, and H.26X video compression standards are similar in a number of respects. The following

25 description of the MPEG-2 video compression standard is generally applicable to the others.

MPEG-2 provides interframe compression and intraframe compression based upon square blocks or arrays of pixels in video images. A video image is divided into

30 transformation blocks having dimensions of 16x16 pixels. For each transformation block T_N in an image frame N , a search is performed across the image of a next successive video frame $N+1$ or immediately preceding image frame $N-1$ (i.e., bidirectionally) to identify the most similar

35 respective transformation blocks T_{N+1} or T_{N-1} .

Ideally, and with reference to a search of the next successive image frame, the pixels in transformation

blocks T_N and T_{N+1} are identical, even if the transformation blocks have different positions in their respective image frames. Under these circumstances, the pixel information in transformation block T_{N+1} is redundant to that in transformation block T_N . Compression is achieved by substituting the positional translation between transformation blocks T_N and T_{N+1} for the pixel information in transformation block T_{N+1} . In this simplified example, a single translational vector ($\Delta X, \Delta Y$) is designated for the video information associated with the 256 pixels in transformation block T_{N+1} .

Frequently, the video information (i.e., pixels) in the corresponding transformation blocks T_N and T_{N+1} are not identical. The difference between them is designated a transformation block error E , which often is significant. Although it is compressed by a conventional compression process such as discrete cosine transform (DCT) encoding, the transformation block error E is cumbersome and limits the extent (ratio) and the accuracy by which video signals can be compressed.

Large transformation block errors E arise in block-based video compression methods for several reasons. The block-based motion estimation represents only translational motion between successive image frames. The only change between corresponding transformation blocks T_N and T_{N+1} that can be represented are changes in the relative positions of the transformation blocks. A disadvantage of such representations is that full-motion video sequences frequently include complex motions other than translation, such as rotation, magnification and shear. Representing such complex motions with simple translational approximations results in the significant errors.

Another aspect of video displays is that they typically include multiple image features or objects that change or move relative to each other. Objects may be distinct characters, articles, or scenery within a video

display. With respect to a scene in a motion picture, for example, each of the characters (i.e., actors) and articles (i.e., props) in the scene could be a different object.

5 The relative motion between objects in a video sequence is another source of significant transformation block errors E in conventional video compression processes. Due to the regular configuration and size of the transformation blocks, many of them encompass portions 10 of different objects. Relative motion between the objects during successive image frames can result in extremely low correlation (i.e., high transformation errors E) between corresponding transformation blocks. Similarly, the 15 appearance of portions of objects in successive image frames (e.g., when a character turns) also introduces high transformation errors E.

Conventional video compression methods appear to be inherently limited due to the size of transformation errors E. With the increased demand for digital video 20 display capabilities, improved digital video compression processes are required.

In some applications, binary objects are encoded individually by conventional shape encoding techniques 25 such as chain coding or polygonal contour approximation. In conventional 8-point chain coding, for example, connected pixels forming the outer contour or boundary of an object are represented in a compressed format according to the relative positions of adjacent pixels. A 30 disadvantage of such shape encoding techniques is that they are capable of accurately representing only solid, connected shapes. Such objects may be characterized as having only a continuous outer boundary. While adequate for representing many types or classes of object, such 35 representations are inadequate for complex objects having general shapes that can include interior regions corresponding to different objects. Because such complex

objects frequently are included in general video sequences, such as live action video, conventional shape encoding techniques are inadequate for such video applications.

5 An example of such an object in a live action video sequence is a side view of a moving automobile with windows through which background objects are visible. A simple conventional shape encoding technique is capable of identifying the outer contour or outline of such an object
10 (i.e., the automobile). But such a representation would be incapable of identifying or encoding separately the background objects appearing through the automobile window (i.e., an interior portion or component of the object). These background objects would be encoded as part of the
15 automobile object despite having no actual relation to it. As a consequence, changes in the background objects seen through the window as the automobile moves would result in significant errors in the encoding of the automobile object.

20 Sometimes, quad tree encoding is utilized to identify and encode complex objects. In quad tree encoding of binary objects, for example, a right regular region is subdivided into quadrants whenever the region includes pixels of both binary states. Resulting
25 quadrants are successively subdivided into quadrants whenever they include pixels of both binary states. The iterative subdivision continues until all pixels in each resulting quadrant is of a single binary state or until the subdivision resolution limit is reached.

30 Quad tree encoding suffers from the disadvantage of being inefficient because of a fixed subdivision resolution limit and a fine resolution limit required for general video applications. The fixed subdivision resolution limit is not adaptive and is applied regardless
35 of the complexity of an object configuration; frequently using computation resources unnecessarily or inefficiently. In combination with the fixed subdivision resolution

limit, the fine resolution required for general video applications in quad tree encoding consume excessive amounts of computation resources.

The limited capabilities of conventional shape 5 encoding techniques result in increased encoding errors. Alternatively, quad tree encoding is inefficient and requires excessive computation resources. These shortcomings of conventional processes can limit the 10 affordability and practicality of video compression encoding.

SUMMARY OF THE INVENTION

The present invention includes a video compression encoder process for compressing digitized 15 video signals representing display motion in video sequences of multiple image frames. The encoder process utilizes object-based video compression to improve the accuracy and versatility of encoding interframe motion and intraframe image features. Video information is 20 compressed relative to objects of arbitrary configurations, rather than fixed, regular arrays of pixels as in conventional video compression methods. This reduces the error components and thereby improves the compression efficiency and accuracy. As another benefit, 25 object-based video compression of this invention provides interactive video editing capabilities for processing compressed video information.

In a preferred embodiment, the process or method 30 of this invention includes identifying image features of arbitrary configuration in a first video image frame and defining within the image feature multiple distinct feature points. The feature points of the image feature in the first video image frame are correlated with corresponding feature points of the image feature in a 35 succeeding second video image frame, thereby to determine an estimation of the image feature in the second video image frame. A difference between the estimated and

actual image feature in the second video image frame is determined and encoded in a compressed format.

The encoder process of this invention overcomes the shortcomings of the conventional block-based video compression methods. The encoder process preferably uses a multi-dimensional transformation method to represent mappings between corresponding objects in successive image frames. The multiple dimensions of the transformation refer to the number of coordinates in its generalized form. The multi-dimensional transformation is capable of representing complex motion that includes any or all of translation, rotation, magnification, and shear. As a result, complex motion of objects between successive image frames may be represented with relatively low transformation error.

Another source of error in conventional block-based video compression methods is motion between objects included within a transformation block. The object-based video compression or encoding of this invention substantially eliminates the relative motion between objects within transformation blocks. As a result, transformation error arising from inter-object motion also is substantially decreased. The low transformation errors arising from the encoder process of this invention allow it to provide compression ratios up to 300% greater than those obtainable from prior encoder processes such as MPEG-2.

Another aspect of this invention is a hierarchical object encoding technique or process capable of representing general binary arbitrary shapes that include, for example, embedded or disconnected components. The method decomposes such shapes into solid, simple arbitrary shapes, which preferably are encoded individually by contour coding. The decomposition automatically provides a hierarchical representation of the general binary arbitrary shape.

In a preferred embodiment, a bounding box is defined to completely encompass a general binary arbitrary shape. The bounding box defines a region of pixels. Typically, some of the pixels in the bounding box are 5 bounded by the contour of the general arbitrary shape and others of the pixels are not. The pixels not bounded by the contour of the general binary arbitrary shape are identified to determine the outer boundary of the general arbitrary shape.

10 All pixels within the outer boundary of the general arbitrary shape are assigned a predetermined pixel value to define a mask, and a difference between the mask and the original general binary arbitrary shape is determined to identify embedded or disconnected objects 15 within the outer boundary of the general binary arbitrary shape. Any such objects identified are processed hierarchically in substantially the same manner as the general arbitrary binary shape.

This method decomposes successive layers of 20 general binary arbitrary shapes into simple arbitrary shapes. Each mask formed in this manner is a simple arbitrary shape having only a continuous outer boundary. Accordingly, each outer boundary is encoded, preferably by a contour encoding method, to provide accurate encoding of 25 general binary shapes.

In an alternative embodiment, non-binary object information (e.g., object image or transparency data) is converted to binary object information with a threshold filter, which assigns the non-binary information either of 30 two binary states according to the relation of the information to a predetermined threshold value. The threshold filter provides, therefore, binary masks corresponding to the original non-binary object information. The binary object information is then 35 processed by the hierarchical object encoding process of this invention to encode or compress accurately the contours or boundaries of the binary masks. Preferably,

the non-binary object image data may be further processed to enhance the efficiency at which that data may be encoded or compressed.

5 Accurately recognizing and encoding the disconnected or embedded components of general shapes provide improved video compression because such general shapes correspond better to many objects commonly found in general video image sequences. The disconnected or embedded components of general shapes cannot be
10 represented by some conventional shape encoding techniques and are obtained or represented inefficiently by other techniques. As a consequence, such general shapes conventionally are simplified to ignore embedded components, which can introduce significant encoding
15 errors during video compression.

20 The foregoing and other features and advantages of the preferred embodiment of the present invention will be more readily apparent from the following detailed description, which proceeds with reference to the accompanying drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

25 Fig. 1 is a block diagram of a computer system that may be used to implement a method and apparatus embodying the invention.

30 Figs. 2A and 2B are simplified representations of a display screen of a video display device showing two successive image frames corresponding to a video signal.

35 Fig. 3A is a generalized functional block diagram of a video compression encoder process for compressing digitized video signals representing display motion in video sequences of multiple image frames. Fig. 3B is a functional block diagram of a master object encoder process according to this invention.

40 Fig. 4 is a functional block diagram of an object segmentation process for segmenting selected objects from an image frame of a video sequence.

-10-

Fig. 5A is simplified representation of display screen of the video display device of Fig. 2A, and Fig. 5B is an enlarged representation of a portion of the display screen of Fig. 5A.

5 Fig. 6 is a functional block diagram of a polygon match process for determining a motion vector for corresponding pairs of pixels in corresponding objects in successive image frames.

10 Figs. 7A and 7B are simplified representations of a display screen showing two successive image frames with two corresponding objects.

Fig. 8 is a functional block diagram of an alternative pixel block correlation process.

15 Fig. 9A is a schematic representation of a first pixel block used for identifying corresponding pixels in different image frames. Fig. 9B is a schematic representation of an array of pixels corresponding to a search area in a prior image frame where corresponding pixels are sought. Figs. 9C-9G are schematic 20 representations of the first pixel block being scanned across the pixel array of FIG. 9B to identify corresponding pixels.

Fig. 10A is a schematic representation of a second pixel block used for identifying corresponding 25 pixels in different image frames. Figs. 10B-10F are schematic representations of the second pixel block being scanned across the pixel array of FIG. 9B to identify corresponding pixels.

30 Fig. 11A is a schematic representation of a third pixel block used for identifying corresponding pixels in different image frames. Figs. 11B-11F are schematic representations of the third pixel block being scanned across the pixel array of Fig. 9B.

35 Fig. 12 is a function block diagram of a multi-dimensional transformation method that includes generating a mapping between objects in first and second successive

image frames and quantitizing the mapping for transmission or storage.

5 Fig. 13 is a simplified representation of a display screen showing the image frame of Fig. 7B for purposes of illustrating the multi-dimensional transformation method of Fig. 12.

10 Fig. 14 is an enlarged simplified representation showing three selected pixels of a transformation block used in the quantization of affine transformation coefficients determined by the method of Fig. 12.

15 Fig. 15 is a functional block diagram of a transformation block optimization method utilized in an alternative embodiment of the multi-dimensional transformation method of Fig. 12.

Fig. 16 is a simplified fragmentary representation of a display screen showing the image frame of Fig. 7B for purposes of illustrating the transformation block optimization method of Fig. 15.

20 Figs. 17A and 17B are a functional block diagram of a precompression extrapolation method for extrapolating image features of arbitrary configuration to a predefined configuration to facilitate compression.

25 Figs. 18A-18D are representations of a display screen on which a simple object is rendered to show various aspects of the extrapolation method of Fig. 14.

30 Figs. 19A and 19B are functional block diagrams of an encoder method and a decoder method, respectively, employing a Laplacian pyramid encoder method in accordance with this invention.

35 Figs. 20A-20D are simplified representations of the color component values of an arbitrary set or array of pixels processed according to the encoder process of Fig. 19A.

Fig. 21 is a functional block diagram of a motion vector encoding process according to this invention.

Fig. 22 is a functional block diagram of an alternative quantized object encoder-decoder process.

Fig. 23A is a generalized functional block diagram of a video compression decoder process matched to 5 the encoder process of Fig. 3. Fig. 23B is a functional diagram of a master object decoder process according to this invention.

Fig. 24A is a diagrammatic representation of a conventional chain code format. Fig. 24B is a simplified 10 representation of an exemplary contour for processing with the chain code format of Fig. 24A.

Fig. 25A is a functional block diagram of a chain coding process of this invention.

Fig. 25B is a diagrammatic representation of a 15 chain code format of the present invention.

Fig. 25C is a diagrammatic representation of special case chain code modifications used in the process of Fig. 25A.

Fig. 26 is a functional block diagram of a 20 sprite generating or encoding process.

Figs. 27A and 27B are respective first and second objects defined by bitmaps and showing grids of triangles superimposed over the objects in accordance with the process of Fig. 26.

25 Fig. 28 is a functional block diagram of a sprite decoding process corresponding to the encoding process of Fig. 26.

Fig. 29 is a diagrammatic representation of an exemplary simple arbitrary binary solid shape 30 corresponding to a mask of an object included in a frame of a video sequence.

Fig. 30A is a diagrammatic representation of an exemplary general binary arbitrary shapes corresponding to a mask of a complex object in a frame of a video sequence. 35 Figs. 30B-30D are diagrammatic representations of the general binary arbitrary shapes as processed according to the present invention.

-13-

Fig. 31 is a functional block diagram of a hierarchical decomposition and encoding process capable of accurately representing general binary arbitrary shapes of the type shown in Fig. 30A.

5 Fig. 32 is a functional block diagram of an encoding process for representing non-binary object information such as object transparency data.

DETAILED DESCRIPTION OF PREFERRED EMBODIMENTS

10 Referring to Fig. 1, an operating environment for the preferred embodiment of the present invention is a computer system 20, either of a general purpose or a dedicated type, that comprises at least one high speed processing unit (CPU) 22, in conjunction with a memory system 24, an input device 26, and an output device 28. These elements are interconnected by a bus structure 30.

15 The illustrated CPU 22 is of familiar design and includes an ALU 32 for performing computations, a collection of registers 34 for temporary storage of data 20 and instructions, and a control unit 36 for controlling operation of the system 20. CPU 22 may be a processor having any of a variety of architectures including Alpha from Digital, MIPS from MIPS Technology, NEC, IDT, Siemens, and others, x86 from Intel and others, including 25 Cyrix, AMD, and Nexgen, and the PowerPc from IBM and Motorola.

20 The memory system 24 includes main memory 38 and secondary storage 40. Illustrated main memory 38 takes the form of 16 megabytes of semiconductor RAM memory. 30 Secondary storage 40 takes the form of long term storage, such as ROM, optical or magnetic disks, flash memory, or tape. Those skilled in the art will appreciate that memory system 24 may comprise many other alternative components.

35 The input and output devices 26, 28 are also familiar. The input device 26 can comprise a keyboard, a mouse, a physical transducer (e.g., a microphone), etc.

The output device 28 can comprise a display, a printer, a transducer (e.g. a speaker), etc. Some devices, such as a network interface or a modem, can be used as input and/or output devices.

5 As is familiar to those skilled in the art, the computer system 20 further includes an operating system and at least one application program. The operating system is the set of software which controls the computer system's operation and the allocation of resources. The 10 application program is the set of software that performs a task desired by the user, making use of computer resources made available through the operating system. Both are resident in the illustrated memory system 24.

In accordance with the practices of persons 15 skilled in the art of computer programming, the present invention is described below with reference to symbolic representations of operations that are performed by computer system 20, unless indicated otherwise. Such operations are sometimes referred to as being 20 computer-executed. It will be appreciated that the operations which are symbolically represented include the manipulation by CPU 22 of electrical signals representing data bits and the maintenance of data bits at memory locations in memory system 24, as well as other processing 25 of signals. The memory locations where data bits are maintained are physical locations that have particular electrical, magnetic, or optical properties corresponding to the data bits.

Figs. 2A and 2B are simplified representations 30 of a display screen 50 of a video display device 52 (e.g., a television or a computer monitor) showing two successive image frames 54a and 54b of a video image sequence represented electronically by a corresponding video signal. Video signals may be in any of a variety of video 35 signal formats including analog television video formats such as NTSC, PAL, and SECAM, and pixelated or digitized video signal formats typically used in computer displays,

such as VGA, CGA, and EGA. Preferably, the video signals corresponding to image frames are of a digitized video signal format, either as originally generated or by conversion from an analog video signal format, as is known in the art.

Image frames 54a and 54b each include a rectangular solid image feature 56 and a pyramid image feature 58 that are positioned over a background 60. Image features 56 and 58 in image frames 54a and 54b have different appearances because different parts are obscured and shown. For purposes of the following description, the particular form of an image feature in an image frame is referred to as an object or, alternatively, a mask. Accordingly, rectangular solid image feature 56 is shown as rectangular solid objects 56a and 56b in respective image frames 54a and 54b, and pyramid image feature 58 is shown as pyramid objects 58a and 58b in respective image frames 54a and 54b.

Pyramid image feature 58 is shown with the same position and orientation in image frames 54a and 54b and would "appear" to be motionless when shown in the video sequence. Rectangular solid 56 is shown in frames 54a and 54b with a different orientation and position relative to pyramid 58 and would "appear" to be moving and rotating relative to pyramid 58 when shown in the video sequence. These appearances of image features 58 and 60 are figurative and exaggerated. The image frames of a video sequence typically are displayed at rates in the range of 30-80 Hz. Human perception of video motion typically requires more than two image frames. Image frames 54a and 54b provide, therefore, a simplified representation of a conventional video sequence for purposes of illustrating the present invention. Moreover, it will be appreciated that the present invention is in no way limited to such simplified video images, image features, or sequences and, to the contrary, is applicable to video images and sequences of arbitrary complexity.

VIDEO COMPRESSION ENCODER PROCESS OVERVIEW

Fig. 3A is a generalized functional block diagram of a video compression encoder process 64 for compressing digitized video signals representing display motion in video sequences of multiple image frames. 5 Compression of video information (i.e., video sequences or signals) can provide economical storage and transmission of digital video information in applications that include, for example, interactive or digital television and 10 multimedia computer applications. For purposes of brevity, the reference numerals assigned to function blocks of encoder process 64 are used interchangeably in reference to the results generated by the function blocks.

Conventional video compression techniques 15 utilize similarities between successive image frames, referred to as temporal or interframe correlation, to provide interframe compression in which pixel-based representations of image frames are converted to motion representations. In addition, conventional video 20 compression techniques utilize similarities within image frames, referred to as spatial or intraframe correlation, to provide intraframe compression in which the motion representations within an image frame are further compressed.

25 In such conventional video compression techniques, including MPEG-1, MPEG-2, and H.26X, the temporal and spatial correlations are determined relative to simple translations of fixed, regular (e.g., square) arrays of pixels. Video information commonly includes, 30 however, arbitrary video motion that cannot be represented accurately by translating square arrays of pixels. As a consequence, conventional video compression techniques typically include significant error components that limit the compression rate and accuracy.

35 In contrast, encoder process 64 utilizes object-based video compression to improve the accuracy and versatility of encoding interframe motion and intraframe

image features. Encoder process 64 compresses video information relative to objects of arbitrary configurations, rather than fixed, regular arrays of pixels. This reduces the error components and thereby 5 improves the compression efficiency and accuracy. As another benefit, object-based video compression provides interactive video editing capabilities for processing compressed video information.

Referring to Fig. 3A, function block 66 10 indicates that user-defined objects within image frames of a video sequence are segmented from other objects within the image frames. The objects may be of arbitrary configuration and preferably represent distinct image features in a display image. Segmentation includes 15 identifying the pixels in the image frames corresponding to the objects. The user-defined objects are defined in each of the image frames in the video sequence. In Figs. 2A and 2B, for example, rectangular solid objects 56a and 56b and pyramid objects 58a and 58b are separately 20 segmented.

The segmented objects are represented by binary or multi-bit (e.g., 8-bit) "alphachannel" masks of the objects. The object masks indicate the size, configuration, and position of an object on a pixel-by- 25 pixel basis. For purposes of simplicity, the following description is directed to binary masks in which each pixel of the object is represented by a single binary bit rather than the typical 24-bits (i.e., 8 bits for each of three color component values). Multi-bit (e.g., 8-bit) 30 masks also have been used.

Function block 68 indicates that "feature points" of each object are defined by a user. Feature points preferably are distinctive features or aspects of the object. For example, corners 70a-70c and corners 72a- 35 72c could be defined by a user as feature points of rectangular solid 56 and pyramid 58, respectively. The pixels corresponding to each object mask and its feature

points in each image frame are stored in an object database included in memory system 24.

Function block 74 indicates that changes in the positions of feature points in successive image frames are identified and trajectories determined for the feature points between successive image frames. The trajectories represent the direction and extent of movement of the feature points. Function block 76 indicates that trajectories of the feature points in the object between prior frame N-1 and current frame N also is retrieved from the object data base.

Function block 78 indicates that a sparse motion transformation is determined for the object between prior frame N-1 and current frame N. The sparse motion transformation is based upon the feature point trajectories between frames N-1 and N. The sparse motion transformation provides an approximation of the change of the object between prior frame N-1 and current frame N.

Function block 80 indicates that a mask of an object in a current frame N is retrieved from the object data base in memory system 24.

Function block 90 indicates that a quantized master object or "sprite" is formed from the objects or masks 66 corresponding to an image feature in an image frame sequence and feature point trajectories 74. The master object preferably includes all of the aspects or features of an object as it is represented in multiple frames. With reference to Figs. 2A and 2B, for example, rectangular solid 56 in frame 54b includes a side 78b not shown in frame 54a. Similarly, rectangular solid 56 includes a side 78a in frame 54a not shown in frame 54b. The master object for rectangular solid 56 includes both sides 78a and 78b.

Sparse motion transformation 78 frequently will not provide a complete representation of the change in the object between frames N-1 and N. For example, an object in a prior frame N-1, such as rectangular object 54a,

might not include all the features of the object in the current frame N, such as side 78b of rectangular object 54b.

To improve the accuracy of the transformation, 5 therefore, an intersection of the masks of the object in prior frame N-1 and current frame N is determined, such as by a logical AND function as is known in the art. The mask of the object in the current frame N is subtracted from the resulting intersection to identify any portions 10 or features of the object in the current frame N not included in the object in the prior frame N-1 (e.g., side 78b of rectangular object 54b, as described above). The newly identified portions of the object are incorporated 15 into master object 90 so that it includes a complete representation of the object in frames N-1 and N.

Function block 96 indicates that a quantized form of an object 98 in a prior frame N-1 (e.g., rectangular solid object 56a in image frame 54a) is transformed by a dense motion transformation to provide a 20 predicted form of the object 102 in a current frame N (e.g., rectangular solid object 56b in image frame 54b). This transformation provides object-based interframe 25 compression.

The dense motion transformation preferably 25 includes determining an affine transformation between quantized prior object 98 in frame N-1 and the object in the current frame N and applying the affine transformation to quantized prior object 98. The preferred affine transformation is represented by affine transformation 30 coefficients 104 and is capable of describing translation, rotation, magnification, and shear. The affine transformation is determined from a dense motion estimation, preferably including a pixel-by-pixel mapping, between prior quantized object 98 and the object in the 35 current frame N.

Predicted current object 102 is represented by quantized prior object 98, as modified by dense motion

transformation 96, and is capable of representing relatively complex motion, together with any new image aspects obtained from master object 90. Such object-based representations are relatively accurate because the 5 perceptual and spatial continuity associated with objects eliminates errors arising from the typically changing relationships between different objects in different image frames. Moreover, the object-based representations allow a user to represent different objects with different 10 levels of resolution to optimize the relative efficiency and accuracy for representing objects of varying complexity.

Function block 106 indicates that for image frame N, predicted current object 102 is subtracted from 15 original object 108 for current frame N to determine an estimated error 110 in predicted object 102. Estimated error 110 is a compressed representation of current object 108 in image frame N relative to quantized prior object 98. More specifically, current object 108 may be decoded 20 or reconstructed from estimated error 110 and quantized prior object 98.

Function block 112 indicates that estimated error 110 is compressed or "coded" by a conventional "lossy" still image compression method such as lattice 25 subband (wavelet) compression or encoding as described in Multirate Systems and Filter Banks by Vaidyanathan, PTR Prentice-Hall, Inc., Englewood Cliffs, New Jersey, (1993) or discrete cosine transform (DCT) encoding as described in JPEG: Still Image Data Compression Standard by 30 Pennebaker et al., Van Nostrand Reinhold, New York (1993).

As is known in the art, "lossy" compression methods introduce some data distortion to provide increased data compression. The data distortion refers to 35 variations between the original data before compression and the data resulting after compression and decompression. For purposes of illustration below, the

compression or encoding of function block 102 is presumed to be wavelet encoding.

Function block 114 indicates that the wavelet encoded estimated error from function block 112 is further 5 compressed or "coded" by a conventional "lossless" still image compression method to form compressed data 116. A preferred conventional "lossless" still image compression method is entropy encoding as described in JPEG: Still Image Data Compression Standard by Pennebaker et al. As 10 is known in the art, "lossless" compression methods introduce no data distortion.

An error feedback loop 118 utilizes the wavelet encoded estimated error from function block 112 for the object in frame N to obtain a prior quantized object for 15 succeeding frame N+1. As an initial step in feedback loop 118, function block 120 indicates that the wavelet encoded estimated error from function block 112 is inverse wavelet coded, or wavelet decoded, to form a quantized error 122 for the object in image frame N.

20 The effect of successively encoding and decoding estimated error 110 by a lossy still image compression method is to omit from quantized error 122 video information that is generally imperceptible by viewers. This information typically is of higher frequencies. As a 25 result, omitting such higher frequency components typically can provide image compression of up to about 200% with only minimal degradation of image quality.

Function block 124 indicates that quantized error 122 and predicted object 102, both for image frame 30 N, are added together to form a quantized object 126 for image frame N. After a timing coordination delay 128, quantized object 126 becomes quantized prior object 98 and is used as the basis for processing the corresponding object in image frame N+1.

35 Encoder process 64 utilizes the temporal correlation of corresponding objects in successive image frames to obtain improved interframe compression, and also

utilizes the spatial correlation within objects to obtain accurate and efficient intraframe compression. For the interframe compression, motion estimation and compensation are performed so that an object defined in one frame can 5 be estimated in a successive frame. The motion-based estimation of the object in the successive frame requires significantly less information than a conventional block-based representation of the object. For the intraframe compression, an estimated error signal for each object is 10 compressed to utilize the spatial correlation of the object within a frame and to allow different objects to be represented at different resolutions. Feedback loop 118 allows objects in subsequent frames to be predicted from 15 fully decompressed objects, thereby preventing accumulation of estimation error.

Encoder process 64 provides as an output a compressed or encoded representation of a digitized video signal representing display motion in video sequences of multiple image frames. The compressed or encoded 20 representation includes object masks 66, feature points 68, affine transform coefficients 104, and compressed error data 116. The encoded representation may be stored or transmitted, according to the particular application in which the video information is used.

25 Fig. 3B is a functional block diagram of a master object encoder process 130 for encoding or compressing master object 90. Function block 132 indicates that master object 90 is compressed or coded by a conventional "lossy" still image compression method such 30 as lattice subband (wavelet) compression or discrete cosine transform (DCT) encoding. Preferably, function block 132 employs wavelet encoding.

Function block 134 indicates that the wavelet encoded master object from function block 132 is further 35 compressed or coded by a conventional "lossless" still image compression method to form compressed master object

data 136. A preferred conventional lossless still image compression method is entropy encoding.

Encoder process 130 provides as an output compressed master object 136. Together with the 5 compressed or encoded representations provided by encoder process 64, compressed master object 136 may be decompressed or decoded after storage or transmission to obtain a video sequence of multiple image frames.

Encoder process 64 is described with reference 10 to encoding video information corresponding to a single object within an image frame. As shown in Figs. 2A and 2B and indicated above, encoder process 64 is performed separately for each of the objects (e.g., objects 56 and 58 of Figs. 2A and 2B) in an image frame. Moreover, many 15 video images include a background over which arbitrary numbers of image features or objects are rendered. Preferably, the background is processed as an object according to this invention after all user-designated objects are processed.

20 Processing of the objects in an image frame requires that the objects be separately identified. Preferably, encoder process 64 is applied to the objects of an image frame beginning with the forward-most object or objects and proceeding successively to the back-most 25 object (e.g., the background). The compositing of the encoded objects into a video image preferably proceeds from the rear-most object (e.g., the background) and proceeds successively to the forward-most object (e.g., rectangular solid 56 in Figs. 2A and 2B). The layering of 30 encoding objects may be communicated as distinct layering data associated with the objects of an image frame or, alternatively, by transmitting or obtaining the encoded objects in a sequence corresponding to the layering or compositing sequence.

OBJECT SEGMENTATION AND TRACKING

In a preferred embodiment, the segmentation of objects within image frames referred to in function block 66 allows interactive segmentation by users. The object 5 segmentation of this invention provides improved accuracy in segmenting objects and is relatively fast and provides users with optimal flexibility in defining objects to be segmented.

10 Fig. 4 is a functional block diagram of an object segmentation process 140 for segmenting selected objects from an image frame of a video sequence. Object segmentation according to process 140 provides a perceptual grouping of objects that is accurate and quick and easy for users to define.

15 Fig. 5A is simplified representation of display screen 50 of video display device 52 showing image frame 54a and the segmentation of rectangular solid object 56a. In its rendering on display screen 50, rectangular solid object 56a includes an object perimeter 142 (shown spaced 20 apart from object 56a for clarity) that bounds an object interior 144. Object interior 144 refers to the outline of object 56a on display screen 50 and in general may correspond to an inner surface or, as shown, an outer surface of the image feature. Fig. 5B is an enlarged 25 representation of a portion of display screen 50 showing the semi-automatic segmentation of rectangular solid object 56a. The following description is made with specific reference to rectangular solid object 56a, but is similarly applicable to each object to be segmented from 30 an image frame.

Function block 146 indicates that a user forms within object interior 144 an interior outline 148 of object perimeter 142. The user preferably forms interior outline 148 with a conventional pointer or cursor control 35 device, such as a mouse or trackball. Interior outline 148 is formed within a nominal distance 150 from object perimeter 142. Nominal distance 150 is selected by a user

to be sufficiently large that the user can form interior outline 148 relatively quickly within nominal distance 150 of perimeter 142. Nominal distance 150 corresponds, for example, to between about 4 and 10 pixels.

5 Function block 146 is performed in connection with a key frame of a video sequence. With reference to a scene in a conventional motion picture, for example, the key frame could be the first frame of the multiple frames in a scene. The participation of the user in this
10 function renders object segmentation process 140 semi-automatic, but significantly increases the accuracy and flexibility with which objects are segmented. Other than for the key frame, objects in subsequent image frames are segmented automatically as described below in greater
15 detail.

Function block 152 indicates that interior outline 148 is expanded automatically to form an exterior outline 156. The formation of exterior outline 156 is performed as a relatively simple image magnification of
20 outline 148 so that exterior outline 156 is a user-defined number of pixels from interior outline 148. Preferably, the distance between interior outline 148 and exterior outline 156 is approximately twice distance 150.

Function block 158 indicates that pixels between
25 interior outline 148 and exterior outline 156 are classified according to predefined attributes as to whether they are within object interior 144, thereby to identify automatically object perimeter 142 and a corresponding mask 80 of the type described with reference
30 to Fig. 3A. Preferably, the image attributes include pixel color and position, but either attribute could be used alone or with other attributes.

In the preferred embodiment, each of the pixels in interior outline 148 and exterior outline 156 defines a
35 "cluster center" represented as a five-dimensional vector in the form of (r, g, b, x, y). The terms r, g, and b correspond to the respective red, green, and blue color

components associated with each of the pixels, and the terms x and y correspond to the pixel locations. The m-number of cluster center vectors corresponding to pixels in interior outline 148 are denoted as $\{I_0, I_1, \dots, I_{m-1}\}$, and the n-number of cluster center vectors corresponding pixels in exterior outline 156 are denoted as $\{O_0, O_1, \dots, O_{n-1}\}$.

Pixels between the cluster center vectors I_i and O_j are classified by identifying the vector to which each pixel is closest in the five-dimensional vector space. For each pixel, the absolute distance d_i and d_j to each of respective cluster center vectors I_i and O_j is computed according to the following equations:

$d_i = w_{color}(|r-r_i| + |g-g_i| + |b-b_i|) + w_{coord}(|x-x_i| + |y-y_i|)$, $0 \leq i < m$,
15 $d_j = w_{color}(|r-r_j| + |g-g_j| + |b-b_j|) + w_{coord}(|x-x_j| + |y-y_j|)$, $0 \leq j < n$,
in which w_{color} and w_{coord} are weighting factors for the
respective color and pixel position information.
Weighting factors w_{color} and w_{coord} are of values having a sum
of 1 and otherwise selectable by a user. Preferably,
20 weighting factors w_{color} and w_{coord} are of an equal value of
0.5. Each pixel is associated with object interior 144 or
exterior according to the minimum five-dimensional
distance to one of the cluster center vectors I_i and O_j .

Function block 162 indicates that a user selects
25 at least two, and preferable more (e.g. 4 to 6), feature
points in each object of an initial or key frame.
Preferably, the feature points are relatively distinctive
aspects of the object. With reference to rectangular
solid image feature 56, for example, corners 70a-70c could
30 be selected as feature points.

Function block 164 indicates that a block 166 of
multiple pixels centered about each selected feature point
(e.g., corners 70a-70c) is defined and matched to a
corresponding block in a subsequent image frame (e.g., the
35 next successive image frame). Pixel block 166 is user
defined, but preferably includes a 32 x 32 pixel array
that includes only pixels within image interior 144. Any

pixels 168 (indicated by cross-hatching) of pixel block 166 falling outside object interior 144 as determined by function block 158 (e.g., corners 70b and 70c) are omitted. Pixel blocks 166 are matched to the 5 corresponding pixel blocks in the next image frame according to a minimum absolute error identified by a conventional block match process or a polygon match process, as described below in greater detail.

Function block 170 indicates that a sparse 10 motion transformation of an object is determined from the corresponding feature points in two successive image frames. Function block 172 indicates that mask 80 of the current image frame is transformed according to the sparse motion transformation to provide an estimation of the mask 15 80 for the next image frame. Any feature point in a current frame not identified in a successive image frame is disregarded.

Function block 174 indicates that the resulting 20 estimation of mask 80 for the next image frame is delayed by one frame, and functions as an outline 176 for a next successive cycle. Similarly, function block 178 indicates that the corresponding feature points also are delayed by one frame, and utilized as the initial feature points 180 for the next successive frame.

25 **POLYGON MATCH METHOD**

Fig. 6 is a functional block diagram of a 30 polygon match process 200 for determining a motion vector for each corresponding pair of pixels in successive image frames. Such a dense motion vector determination provides the basis for determining the dense motion transformations 96 of Fig. 3A.

Polygon match process 200 is capable of determining extensive motion between successive image frames like the conventional block match process. In 35 contrast to the conventional block match process, however, polygon match process 200 maintains its accuracy for pixels located near or at an object perimeter and

generates significantly less error. A preferred embodiment of polygon match method 200 has improved computational efficiency.

5 Polygon block method 200 is described with reference to Figs. 7A and 7B, which are simplified representations of display screen 50 showing two successive image frames 202a and 202b in which an image feature 204 is rendered as objects 204a and 204b, respectively.

10 Function block 206 indicates that objects 204a and 204b for image frames 202a and 202b are identified and segmented by, for example, object segmentation method 140.

15 Function block 208 indicates that dimensions are determined for a pixel block 210b (e.g., 15x15 pixels) to be applied to object 204b and a search area 212 about object 204a. Pixel block 210b defines a region about each pixel in object 204b for which region a corresponding pixel block 210a is identified in object 204a. Search area 212 establishes a region within which corresponding 20 pixel block 210a is sought. Preferably, pixel block 210b and search area 212 are right regular arrays of pixels and of sizes defined by the user.

25 Function block 214 indicates that an initial pixel 216 in object 204b is identified and designated the current pixel. Initial pixel 216 may be defined by any of a variety of criteria such as, for example, the pixel at the location of greatest vertical extent and minimum horizontal extent. With the pixels on display screen 50 arranged according to a coordinate axis 220 as shown, 30 initial pixel 216 may be represented as the pixel of object 214b having a maximum y-coordinate value and a minimum x-coordinate value.

Function block 222 indicates that pixel block 210b is centered at and extends about the current pixel.

35 Function block 224 represents an inquiry as to whether pixel block 210b includes pixels that are not included in object 204b (e.g., pixels 226 shown by cross-

hatching in Fig. 7B). This inquiry is made with reference to the objects identified according to function block 206. Whenever pixels within pixel block 210b positioned at the current pixel fall outside object 204b, function block 224

5 proceeds to function block 228 and otherwise proceeds to function block 232.

Function block 228 indicates that pixels of pixel block 210b falling outside object 204b (e.g., pixels 226) are omitted from the region defined by pixel block

10 210b so that it includes only pixels within object 204b. As a result, pixel block 210b defines a region that typically would be of a polygonal shape more complex than the originally defined square or rectangular region.

Function block 232 indicates that a pixel in

15 object 204a is identified as corresponding to the current pixel in object 204b. The pixel in object 204a is referred to as the prior corresponding pixel. Preferably, the prior corresponding pixel is identified by forming a pixel block 210a about each pixel in search area 212 and

20 determining a correlation between the pixel block 210a and pixel block 210b about the current pixel in object 204b. Each correlation between pixel blocks 210a and 210b may be determined, for example, a means absolute error. The prior corresponding pixel is identified by identifying the

25 pixel block 210a in search area 212 for which the mean absolute error relative to pixel block 210b is minimized. A mean absolute error E for a pixel block 210a relative to pixel block 210b may be determined as:

30
$$E = \sum_{i=0}^{m-1} \sum_{j=0}^{n-1} (|r_{ij} - r'_{ij}| + |g_{ij} - g'_{ij}| + |b_{ij} - b'_{ij}|),$$

in which the terms r_{ij} , g_{ij} , and b_{ij} correspond to the respective red, green, and blue color components associated with each of the pixels in pixel block 210b and the terms r'_{ij} , g'_{ij} , and b'_{ij} correspond to the respective red, green, and blue color components associated with each of the pixels in pixel block 210a.

-30-

As set forth above, the summations for the mean absolute error E imply pixel blocks having pixel arrays having mxn pixel dimensions. Pixel blocks 210b of polygonal configuration are accommodated relatively simply 5 by, for example, defining zero values for the color components of all pixels outside polygonal pixel blocks 210b.

Function block 234 indicates that a motion vector MV between each pixel in object 204b and the 10 corresponding prior pixel in object 204a is determined. A motion vector is defined as the difference between the locations of the pixel in object 204b and the corresponding prior pixel in object 204a:

$MV = (|x_i - x_k'|, |y_i - y_k'|)$,
15 in which the terms x_i and y_i correspond to the respective x- and y-coordinate positions of the pixel in pixel block 210b, and the terms x_k' and y_k' correspond to the respective x- and y-coordinate positions of the corresponding prior pixel in pixel block 210a.

Function block 236 represents an inquiry as to 20 whether object 204b includes any remaining pixels. Whenever object 204b includes remaining pixels, function block 236 proceeds to function block 238 and otherwise proceeds to end block 240.

Function block 238 indicates that a next pixel 25 in object 204b is identified according to a predetermined format or sequence. With the initial pixel selected as described above in reference to function block 214, subsequent pixels may be defined by first identifying the next adjacent pixel in a row (i.e., of a common y-coordinate value) and, if object 204 includes no other pixels in a row, proceeding to the first or left-most pixel (i.e., of minimum x-coordinate value) in a next lower row. The pixel so identified is designated the 30 current pixel and function block 238 returns to function block 222.

-31-

Polygon block method 200 accurately identifies corresponding pixels even if they are located at or near an object perimeter. A significant source of error in conventional block matching processes is eliminated by 5 omitting or disregarding pixels of pixel blocks 210b falling outside object 204b. Conventional block matching processes rigidly apply a uniform pixel block configuration and are not applied with reference to a segmented object. The uniform block configurations cause 10 significant errors for pixels adjacent the perimeter of an object because the pixels outside the object can undergo significant changes as the object moves or its background changes. With such extraneous pixel variations included in conventional block matching processes, pixels in the 15 vicinity of an object perimeter cannot be correlated accurately with the corresponding pixels in prior image frames.

For each pixel in object 204b, a corresponding prior pixel in object 204a is identified by comparing 20 pixel block 210b with a pixel block 210a for each of the pixels in prior object 204a. The corresponding prior pixel is the pixel in object 204a having the pixel block 210a that best correlates to pixel block 210b. If 25 processed in a conventional manner, such a determination can require substantial computation to identify each corresponding prior pixel. To illustrate, for pixel blocks having dimensions of $n \times n$ pixels, which are significantly smaller than a search area 212 having dimensions of $m \times m$ pixels, approximately $n^2 \times m^2$ calculations 30 are required to identify each corresponding prior pixel in the prior object 204a.

PIXEL BLOCK CORRELATION PROCESS

Fig. 8 is a functional block diagram of a modified pixel block correlation process 260 that preferably is substituted for the one described with reference to function block 232. Modified correlation process 260 utilizes redundancy inherent in correlating pixel blocks 210b and 210a to significantly reduce the number of calculations required.

Correlation process 260 is described with reference to Figs. 9A-9G and 10A-10G, which schematically represent arbitrary groups of pixels corresponding to successive image frames 202a and 202b. In particular, Fig. 9A is a schematic representation of a pixel block 262 having dimensions of 5x5 pixels in which each letter corresponds to a different pixel. The pixels of pixel block 262 are arranged as a right regular array of pixels that includes distinct columns 264. Fig. 9B represents an array of pixels 266 having dimensions of $q \times q$ pixels and corresponding to a search area 212 in a prior image frame 202a. Each of the numerals in Fig. 9B represents a different pixel. Although described with reference to a conventional right regular pixel block 262, correlation process 260 is similarly applicable to polygonal pixel blocks of the type described with reference to polygon match process 200.

Function block 268 indicates that an initial pixel block (e.g., pixel block 262) is defined with respect to a central pixel M and scanned across a search area 212 (e.g., pixel array 266) generally in a raster pattern (partly shown in Fig. 7A) as in a conventional block match process. Figs. 9C-9G schematically illustrate five of the approximately q^2 steps in the block matching process between pixel block 262 and pixel array 266.

Although the scanning of pixel block 262 across pixel array 266 is performed in a conventional manner, computations relating to the correlation between them are performed differently according to this invention. In

particular, a correlation (e.g., a mean absolute error) is determined and stored for each column 264 of pixel block 262 in each scan position. The correlation that is determined and stored for each column 264 of pixel block 5 262 in each scanned position is referred to as a column correlation 270, several of which are symbolically indicated in Figs. 9C-9G by referring to the correlated pixels. To illustrate, Fig. 9C shows a column correlation 270(1) that is determined for the single column 264 of 10 pixel block 262 aligned with pixel array 266. Similarly, Fig. 9D shows column correlations 270(2) and 270(3) that are determined for the two columns 264 of pixel block 262 aligned with pixel array 266. Figs. 9E-9G show similar 15 column correlations with pixel block 262 at three exemplary subsequent scan positions relative to pixel array 266.

The scanning of initial pixel block 262 over pixel array 266 provides a stored array or database of column correlations. With pixel block 262 having r-number 20 of columns 264, and pixel array 266 having qxq pixels, the column correlation database includes approximately rq^2 number of column correlations. This number of column correlations is only approximate because pixel block 262 preferably is initially scanned across pixel array 266 25 such that pixel M is aligned with the first row of pixels in pixel array 266.

The remaining steps beginning with the one indicated in Fig. 9C occur after two complete scans of pixel block 262 across pixel array 266 (i.e., with pixel M 30 aligned with the first and second rows of pixel array 266).

Function block 274 indicates that a next pixel block 276 (Fig. 10A) is defined from, for example, image frame 202b with respect to a central pixel N in the same 35 row as pixel M. Pixel block 276 includes a column 278 of pixels not included in pixel block 262 and columns 280 of pixels included in pixel block 262. Pixel block 276 does

not include a column 282 (Fig. 9A) that was included in pixel block 262. Such an incremental definition of next pixel block 276 is substantially the same as that used in conventional block matching processes.

5 Function block 284 indicates that pixel block 276 is scanned across pixel array 266 in the manner described above with reference to function block 268. As with Figs. 9C-9G, Figs. 10B-10G represent the scanning of pixel block 276 across pixel array 266.

10 Function block 286 indicates that for column 278 a column correlation is determined and stored at each scan position. Accordingly, column correlations 288(1)-288(5) are made with respect to the scanned positions of column 278 shown in respective Figs. 10B-10F.

15 Function block 290 indicates that for each of columns 280 in pixel block 276 a stored column determination is retrieved for each scan position previously computed and stored in function block 268. For example, column correlation 270(1) of Fig. 9C is the same 20 as column correlation 270'(1) of Fig. 10C. Similarly, column correlations 270'(2), 270'(3), 270'(5)-270'(8), and 270'(15)-270'(18) of Figs. 10D-10F are the same as the corresponding column correlations in Figs. 9D, 9E, and 9G. For pixel block 276, therefore, only one column 25 correlation 288 is calculated for each scan position. As a result, the number of calculations required for pixel block 276 is reduced by nearly 80 percent.

30 Function block 292 indicates that a subsequent pixel block 294 (Fig. 11A) is defined with respect to a central pixel R in the next successive row relative to pixel M. Pixel block 294 includes columns 296 of pixels that are similar to but distinct from columns 264 of pixels in pixel block 262 of Fig. 9A. In particular, columns 296 include pixels A'-E' not included in columns 35 264. Such an incremental definition of subsequent pixel block 294 is substantially the same as that used in conventional block matching processes.

Function block 298 indicates that pixel block 294 is scanned across pixel array 266 (Fig. 9B) in the manner described above with reference to function blocks 268 and 276. Figs. 11B-11F represent the scanning of 5 pixel block 294 across pixel array 266.

Function block 300 indicates that a column correlation is determined and stored for each of columns 296. Accordingly, column correlations 302(1)-302(18) are made with respect to the scanned positions of columns 296 10 shown in Figs. 11B-11F.

Each of column correlations 302(1)-302(18) may be calculated in an abbreviated manner with reference to column correlations made with respect to pixel block 262 (Fig. 9A).

15 For example, column correlations 302(4)-302(8) of Fig. 11D include subcolumn correlations 304'(4)-304'(8) that are the same as subcolumn correlations 304(4)-304(8) of Fig. 9E. Accordingly, column correlations 302(4)-302(8) may be determined from respective column 20 correlations 270(4)-270(8) by subtracting from the latter correlation values for pixels 01A, 02B, 03C, 04D, and 05E to form subcolumn correlations 304(4)-304(8), respectively. Column correlations 302(4)-302(8) may be obtained by adding correlation values for the pixel pairs 25 56A', 57B', 58C', 59D' and 50E' to the respective subcolumn correlation values 304(4)-304(8), respectively.

The determination of column correlations 302(4)-302(8) from respective column correlations 270(4)-270(8) entails subtracting individual pixel correlation values 30 corresponding to the row of pixels A-E of pixel block 262 not included in pixel block 294, and adding pixel correlation values for the row of pixels A'-E' included in pixel block 294 but not pixel block 262. This method substitutes for each of column correlations 302(4)-302(8), 35 one subtraction and one addition for the five additions that would be required to determine each column correlation in a conventional manner. With pixel blocks

of larger dimensions as are preferred, the improvement of this method over conventional calculation methods is even greater. Conventional block matching processes identify only total block correlations for each scan 5 position of initial pixel block 262 relative to pixel array 266. As a consequence, all correlation values for all pixels must be calculated separately for each scan position. In contrast, correlation process 260 utilizes stored column correlations 270 to significantly reduce the 10 number of calculations required. The improvements in speed and processor resource requirements provided by correlation process 260 more than offset the system requirements for storing the column correlations.

It will be appreciated that correlation process 15 260 has been described with reference to Figs. 9-11 to illustrate specific features of this invention. As shown in the illustrations, this invention includes recurring or cyclic features that are particularly suited to execution by a computer system. These recurring or cyclic features 20 are dependent upon the dimensions of pixel blocks and pixel arrays and are well understood and can be implemented by persons skilled in the art.

MULTI-DIMENSIONAL TRANSFORMATION

Fig. 12 is a functional block diagram of a 25 transformation method 350 that includes generating a multi-dimensional transformation between objects in first and second successive image frames and quantitizing the mapping for transmission or storage. The multi-dimensional transformation preferably is utilized in 30 connection with function block 96 of Fig. 3. Transformation method 350 is described with reference to Fig. 7A and Fig. 13, the latter of which like Fig. 7B is a simplified representation of display screen 50 showing 35 image frame 202b in which image feature 204 is rendered as object 204b.

Transformation method 350 preferably provides a multi-dimensional affine transformation capable of

representing complex motion that includes any or all of translation, rotation, magnification, and shear. Transformation method 350 provides a significant improvement over conventional video compression methods 5 such as a MPEG-1, MPEG-2, and H.26X, which are of only one dimension and represent only translation. In this regard, the dimensionality of a transformation refers to the number of coordinates in the generalized form of the transformation, as described below in greater detail. 10 Increasing the accuracy with which complex motion is represented according to this invention results in fewer errors than by conventional representations, thereby increasing compression efficiency.

Function block 352 indicates that a dense motion 15 estimation of the pixels in objects 204a and 204b is determined. Preferably, the dense motion estimation is obtained by polygon match process 200. As described above, the dense motion estimation includes motion vectors between pixels at coordinates (x_i, y_i) in object 204b of 20 image frame 202b and corresponding pixels at locations (x'_i, y'_i) of object 204a in image frame 202a.

Function block 354 indicates that an array of transformation blocks 356 is defined to encompass object 204b. Preferably, transformation blocks 356 are right 25 regular arrays of pixels having dimensions of, for example, 32x32 pixels.

Function block 358 indicates that a multi-dimensional affine transformation is generated for each 30 transformation block 356. Preferably, the affine transformations are of first order and represented as:

$$x'_i = ax_i + by_i + c$$

$$y'_i = dx_i + ey_i + f,$$

and are determined with reference to all pixels for which the motion vectors have a relatively high confidence. 35 These affine transformations are of two dimensions in that x_i and y_i are defined relative to two coordinates: x_i and y_i .

The relative confidence of the motion vectors refers to the accuracy with which the motion vector between corresponding pixels can be determined uniquely relative to other pixels. For example, motion vectors 5 between particular pixels that are in relatively large pixel arrays and are uniformly colored (e.g., black) cannot typically be determined accurately. In particular, for a black pixel in a first image frame, many pixels in the pixel array of the subsequent image frame will have 10 the same correlation (i.e., mean absolute value error between pixel blocks).

In contrast, pixel arrays in which pixels correspond to distinguishing features typically will have relatively high correlations for particular corresponding 15 pixels in successive image frames.

The relatively high correlations are preferably represented as a minimal absolute value error determination for particular pixel. Motion vectors of relatively high confidence may, therefore, be determined 20 relative to such uniquely low error values. For example, a high confidence motion vector may be defined as one in which the minimum absolute value error for the motion vector is less than the next greater error value associated with the pixel by a difference amount that is 25 greater than a threshold difference amount.

Alternatively, high confidence motion vectors may be defined with respect to the second order derivative of the absolute error values upon which the correlations are determined. A second order derivative of more than a 30 particular value would indicate a relatively high correlation between specific corresponding pixels.

With n-number of pixels with such high-confidence motion vectors, the preferred affine transformation equations are solved with reference to n-number of corresponding pixels in image frames 202a and 202b. Images frames must include at least three corresponding pixels in image frames 202a and 202b with 35

high confidence motion vectors to solve for the six unknown coefficients a, b, c, d, e, and f of the preferred affine transformation equations. With the preferred dimensions, each of transformation blocks 356 includes 2^{10} pixels of which significant numbers typically have relatively high confidence motion vectors. Accordingly, the affine transformation equations are over-determined in that a significantly greater number of pixels are available to solve for the coefficients a, b, c, d, e, and f.

The resulting n-number of equations may be represented by the linear algebraic expression:

$$\begin{bmatrix} X_0 & Y_0 & 1 \\ X_1 & Y_1 & 1 \\ X_1 & Y_1 & 1 \\ \cdot & \cdot & \cdot \\ \cdot & \cdot & \cdot \\ \cdot & \cdot & \cdot \\ X_{n-1} & Y_{n-1} & 1 \end{bmatrix} \begin{bmatrix} a \\ b \\ c \end{bmatrix} = \begin{bmatrix} X'_0 \\ X'_1 \\ \cdot \\ \cdot \\ \cdot \\ X'_{n-1} \end{bmatrix}$$

15

$$\begin{bmatrix} X_0 & Y_0 & 1 \\ X_1 & Y_1 & 1 \\ X_1 & Y_1 & 1 \\ \cdot & \cdot & \cdot \\ \cdot & \cdot & \cdot \\ \cdot & \cdot & \cdot \\ X_{n-1} & Y_{n-1} & 1 \end{bmatrix} \begin{bmatrix} d \\ e \\ f \end{bmatrix} = \begin{bmatrix} Y'_0 \\ Y'_1 \\ \cdot \\ \cdot \\ \cdot \\ Y'_{n-1} \end{bmatrix}$$

Preferably these equations are solved by a conventional singular value decomposition (SVD) method, which provides a minimal least-square error for the approximation of the

dense motion vectors. A conventional SVD method is described, for example, in Numerical Recipes in C, by Press et al., Cambridge University Press, (1992).

As described above, the preferred two-dimensional affine transformation equations are capable of representing translation, rotation, magnification, and shear of transformation blocks 356 between successive image frames 202a and 202b. In contrast, conventional motion transformation methods used in prior compression standards employ simplified transformation equations of the form:

$$x_i' = x_i + g$$

$$y_i' = y_i + h$$

The prior simplified transformation equations represent motion by only two coefficients, g and h, which represents only one-third the amount of information (i.e., coefficients) obtained by the preferred multi-dimensional transformation equations. To obtain superior compression of the information obtained by transformation method 350 relative to conventional compression methods, the dimensions of transformation block 356 preferably are more than three times larger than the corresponding 16x16 pixel blocks employed in MPEG-1 and MPEG-2 compression methods. The preferred 32x32 pixel dimensions of transformation blocks 356 encompass four times the number of pixels employed in the transformation blocks of conventional transformation methods. The larger dimensions of transformation blocks 356, together with the improved accuracy with which the affine transformation coefficients represent motion of the transformation blocks 356, allow transformation method 350 to provide greater compression than conventional compression methods.

It will be appreciated that the affine coefficients generated according to the present invention typically would be non-integer, floating point values that could be difficult to compress adequately without adversely affecting their accuracy. Accordingly, it is

preferable to quantize the affine transformation coefficient to reduce the bandwidth required to store or transmit them.

Function block 362 indicates that the affine transformation coefficients generated with reference to function block 358 are quantized to reduce the bandwidth required to store or transmit them. Fig. 14 is an enlarged fragmentary representation of a transformation block 356 showing three selected pixels, 364a, 364b, and 10 364c from which the six preferred affine transformation coefficients a-f may be determined.

Pixels 364a-364c are represented as pixel coordinates (x_1, y_1) , (x_2, y_2) , and (x_3, y_3) , respectively. Based upon the dense motion estimation of function block 15 352, pixels 364a-364c have respective corresponding pixels (x'_1, y'_1) , (x'_2, y'_2) , (x'_3, y'_3) in preceding image frame 202a. As is conventional, pixel locations (x_i, y_i) are represented by integer values and are solutions to the affine transformation equations upon which the preferred 20 affine transformation coefficients are based. Accordingly, selected pixels 364a-364c are used to calculate the corresponding pixels from the preceding image frame 202a, which typically will be floating point values.

25 Quantization of these floating point values is performed by converting to integer format the difference between corresponding pixels $(x_i - x'_i, y_i - y'_i)$. The affine transformation coefficients are determined by first calculating the pixel values (x'_i, y'_i) from the difference 30 vectors and the pixel values (x_i, y_i) , and then solving the multi-dimensional transformation equations of function block 358 with respect to the pixel values (x'_i, y'_i) .

As shown in Fig. 14, pixels 364a-364c preferably are distributed about transformation block 356 to minimize 35 the sensitivity of the quantization to local variations within transformation block 356. Preferably, pixel 364a is positioned at or adjacent the center of transformation

block 356, and pixels 364b and 364c are positioned at upper corners. Also in the preferred embodiment, the selected pixels for each of the transformation blocks 356 in object 204b have the same positions, thereby allowing 5 the quantization process to be performed efficiently.

Another aspect of the quantization method of function block 362 is that different levels of quantization may be used to represent varying degrees of motion. As a result, relatively simple motion (e.g., 10 translation) may be represented by fewer selected pixels 364 than are required to represent complex motion. With respect to the affine transformation equations described above, pixel 364a (x_1 , y_1) from object 204b and the corresponding pixel (x_1' , y_1') from object 204a are 15 sufficient to solve simplified affine transformation equations of the form:

$$\begin{aligned}x_1' &= y_1 + c \\y_1' &= y_1 + f,\end{aligned}$$

which represent translation between successive image 20 frames. Pixel 364a specifically is used because its central position generally represents translational motion independent of the other types of motion. Accordingly, a user may selectively represent simplified motion such as translation with simplified affine transformation 25 equations that require one-third the data required to represent complex motion.

Similarly, a pair of selected pixels (x_1 , y_1) (e.g., pixel 364a) and (x_2 , y_2) (i.e., either of pixels 30 364b and 364c) from object 204b and the corresponding pixels (x_1' , y_1') and (x_2' , y_2') from object 204a are sufficient to solve simplified affine transformation equations of the form:

$$\begin{aligned}x_i' &= ax_i + c \\y_i' &= ey_i + f,\end{aligned}$$

35 which are capable of representing motions that include translation and magnification between successive image frames. In the simplified form:

$$x' = \cos\theta x + \sin\theta y + c$$
$$y' = -\sin\theta x + \cos\theta y + f$$

the corresponding pairs of selected pixels are capable of representing motions that include translation, rotation, 5 and isotropic magnification. In this simplified form, the common coefficients of the x and y variables allow the equations to be solved by two corresponding pairs of pixels.

Accordingly, a user may selectively represent 10 moderately complex motion that includes translation, rotation, and magnification with partly simplified affine transformation equations. Such equations would require two-thirds the data required to represent complex motion. Adding the third selected pixel (x_3, y_3) from object 204b, 15 the corresponding pixel (x_3', y_3') from object 204a, and the complete preferred affine transformation equations allows a user also to represent shear between successive image frames.

A preferred embodiment of transformation method 20 350 (Fig. 12) is described as using uniform transformation blocks 356 having dimensions of, for example, 32x32 pixels. The preferred multi-dimensional affine transformations described with reference to function block 25 358 are determined with reference to transformation blocks 356. It will be appreciated that the dimensions of transformation blocks 356 directly affect the compression ratio provided by this method.

Fewer transformation blocks 356 of relatively 30 large dimensions are required to represent transformations of an object between image frames than the number of transformation blocks 356 having smaller dimensions. A consequence of uniformly large transformation blocks 356 is that correspondingly greater error can be introduced for each transformation block. Accordingly, uniformly 35 sized transformation blocks 356 typically have moderate dimensions to balance these conflicting performance constraints.

TRANSFORMATION BLOCK OPTIMIZATION

Fig. 15 is a functional block diagram of a transformation block optimization method 370 that automatically selects transformation block dimensions that provide a minimal error threshold. Optimization method 370 is described with reference to Fig. 16, which is a simplified representation of display screen 50 showing a portion of image frame 202b with object 204b.

Function block 372 indicates that an initial transformation block 374 is defined with respect to object 204b. Initial transformation block 374 preferably is of maximal dimensions that are selectable by a user and are, for example, 64x64 pixels. Initial transformation block 374 is designated the current transformation block.

Function block 376 indicates that a current signal-to-noise ratio (CSNR) is calculated with respect to the current transformation block. The signal-to-noise ratio preferably is calculated as the ratio of the variance of the color component values of the pixel within the current transformation block (i.e., the signal) to the variance of the color components values of the pixels associated with estimated error 98 (Fig. 3).

Function block 378 indicates that the current transformation block (e.g., transformation block 374) is subdivided into, for example, four equal sub-blocks 380a-380d, affine transformations are determined for each of sub-blocks 380a-380d, and a future signal-to-noise ratio is determined with respect to the affine transformations. The future signal-to-noise ratio is calculated in substantially the same manner as the current signal-to-noise ratio described with reference to function block 376.

Inquiry block 382 represents an inquiry as to whether the future signal-to-noise ratio is greater than the current signal-to-noise ratio by more than a user-selected threshold amount. This inquiry represents a determination that further subdivision of the current

transformation block (e.g., transformation block 374) would improve the accuracy of the affine transformations by at least the threshold amount. Whenever the future signal-to-noise ratio is greater than the current signal-to-noise ratio by more than the threshold amount, inquiry block 382 proceeds to function block 384, and otherwise proceeds to function block 388.

Function block 384 indicates that sub-blocks 380a-380d are successively designated the current transformation block, and each are analyzed whether to be further subdivided. For purposes of illustration, sub-block 380a is designated the current transformation and processed according to function block 376 and further subdivided into sub-blocks 386a-386d. Function block 388 indicates that a next successive transformation block 374' is identified and designated an initial or current transformation block.

PRECOMPRESSION EXTRAPOLATION METHOD

Figs. 17A and B are a functional block diagram of a precompression extrapolation method 400 for extrapolating image features of arbitrary configuration to a predefined configuration to facilitate compression in accordance with function block 112 of encoder process 64 (both of Fig. 3). Extrapolation method 400 allows the compression of function block 112 to be performed in a conventional manner such as DCT or lattice wavelet compression, as described above.

Conventional still image compression methods such as lattice wavelet compression or discrete cosine transforms (DCT) operate upon rectangular arrays of pixels. As described above, however, the methods of the present invention are applicable to image features or objects of arbitrary configuration. Extrapolating such objects or image features to a rectangular pixel array configuration allows use of conventional still image compression methods such as lattice wavelet compression or DCT. Extrapolation method 400 is described below with

reference to Figs. 18A-18D, which are representations of display screen 50 on which a simple object 402 is rendered to show various aspects of extrapolation method 400.

Function block 404 indicates that an 5 extrapolation block boundary 406 is defined about object 402. Extrapolation block boundary 406 preferably is rectangular. Referring to Fig. 18A, the formation of extrapolation block boundary 406 about object 402 is based upon an identification of a perimeter 408 of object 402 10 by, for example, object segmentation method 140 (Fig. 4). Extrapolation block boundary 406 is shown encompassing object 402 in its entirety for purposes of illustration. It will be appreciated that extrapolation block boundary 406 could alternatively encompass only a portion of object 15 402. As described with reference to object segmentation method 140, pixels included in object 402 have color component values that differ from those of pixels not included in object 402.

Function block 410 indicates that all pixels 20 412 bounded by extrapolation block boundary 406 and not included in object 402 are assigned a predefined value such as, for example, a zero value for each of the color components.

Function block 414 indicates that horizontal 25 lines of pixels within extrapolation block boundary 406 are scanned to identify horizontal lines with horizontal pixel segments having both zero and non-zero color component values.

Function block 416 represents an inquiry as to 30 whether the horizontal pixel segments having color component values of zero are bounded at both ends by perimeter 408 of object 402. Referring to Fig. 18B, region 418 represents horizontal pixel segments having color component values of zero that are bounded at both 35 ends by perimeter 408. Regions 420 represent horizontal pixel segments that have color component values of zero and are bounded at only one end by perimeter 408.

Function block 416 proceeds to function block 426 for regions 418 in which the pixel segments have color component values of zero bounded at both ends by perimeter 408 of object 402, and otherwise proceeds to function 5 block 422.

Function block 422 indicates that the pixels in each horizontal pixel segment of a region 420 is assigned the color component values of a pixel 424 (only exemplary ones shown) in the corresponding horizontal lines and 10 perimeter 408 of object 402. Alternatively, the color component values assigned to the pixels in regions 420 are functionally related to the color component values of pixels 424.

Function block 426 indicates that the pixels in 15 each horizontal pixel segment in region 418 are assigned color component values corresponding to, and preferably equal to, an average of the color component values of pixels 428a and 428b that are in the corresponding horizontal lines and on perimeter 408.

Function block 430 indicates that vertical lines 20 of pixels within extrapolation block boundary 406 are scanned to identify vertical lines with vertical pixel segments having both zero and non-zero color component values.

Function block 432 represents an inquiry as to 25 whether the vertical pixel segments in vertical lines having color component values of zero are bounded at both ends by perimeter 408 of object 402. Referring to Fig. 18C, region 434 represents vertical pixel segments having 30 color component values of zero that are bounded at both ends by perimeter 408. Regions 436 represent vertical pixel segments that have color component values of zero and are bounded at only one end by perimeter 408. Function block 432 proceeds to function block 444 for 35 region 434 in which the vertical pixel segments have color component values of zero bounded at both ends by perimeter

408 of object 402, and otherwise proceeds to function block 438.

5 Function block 438 indicates that the pixels in each vertical pixel segment of region 436 are assigned the color component values of pixels 442 (only exemplary ones shown) in the vertical lines and perimeter 408 of object 402. Alternatively, the color component values assigned to the pixels in region 436 are functionally related to the color component values of pixels 442.

10 Function block 444 indicates that the pixels in each vertical pixel segment in region 434 are assigned color component values corresponding to, and preferably equal to, an average of the color component values of pixels 446a and 446b that are in the horizontal lines and 15 on perimeter 408.

20 Function block 448 indicates that pixels that are in both horizontal and vertical pixel segments that are assigned color component values according to this method are assigned composite color component values that relate to, and preferably are the average of, the color component values otherwise assigned to the pixels according to their horizontal and vertical pixel segments.

25 Examples of pixels assigned such composite color component values are those pixels in regions 418 and 434.

30 Function block 450 indicates that regions 452 of pixels bounded by extrapolation block boundary 406 and not intersecting perimeter 408 of object 402 along a horizontal or vertical line are assigned composite color component values that are related to, and preferably equal to the average of, the color component values assigned to adjacent pixels. Referring to Fig. 18D, each of pixels 454 in regions 452 is assigned a color component value that preferably is the average of the color component values of pixels 456a and 456b that are aligned with pixel 35 454 along respective horizontal and vertical lines and have non-zero color component values previously assigned by this method.

A benefit of object extrapolation process 400 is that it assigns smoothly varying color component values to pixels not included in object 402 and therefore optimizes the compression capabilities and accuracy of conventional 5 still image compression methods. In contrast, prior art zero padding or mirror image methods, as described by Chang et al., "Transform Coding of Arbitrarily-Shaped Image Segments," ACM Multimedia, pp. 83-88, June, 1993, apply compression to extrapolated objects that are filled 10 with pixels having zero color components values such as those applied in function block 410. The drastic image change than occurs between an object and the zero-padded regions introduces high frequency changes that are difficult to compress or introduce image artifacts upon 15 compression. Object extrapolation method 400 overcomes such disadvantages.

ALTERNATIVE ENCODER METHOD

Fig. 19A is a functional block diagram of an encoder method 500 that employs a Laplacian pyramid 20 encoder with unique filters that maintain nonlinear aspects of image features, such as edges, while also providing high compression. Conventional Laplacian pyramid encoders are described, for example, in the Laplacian Pyramid as a Compact Image Code by Burt and 25 Addleson, IEEE Trans. Comm., Vol. 31, No. 4, pp. 532-540, April 1983. Encoder method 500 is capable of providing the encoding described with reference to function block 112 of video compression encoder process 64 shown in Fig. 3, as well as whenever else DCT or wavelet encoding is 30 suggested or used. By way of example, encoder method 500 is described with reference to encoding of estimated error 110 (Fig. 3).

A first decimation filter 502 receives pixel information corresponding to an estimated error 110 (Fig. 35 3) and filters the pixels according to a filter criterion. In a conventional Laplacian pyramid method, the decimation filter is a low-pass filter such as a Gaussian weighting

-50-

function. In accordance with encoder method 500, however, decimation filter 502 preferably employs a median filter and, more specifically, a 3x3 nonseparable median filter.

To illustrate, Fig. 20A is a simplified 5 representation of the color component values for one color component (e.g., red) for an arbitrary set or array of pixels 504. Although described with particular reference to red color component values, this illustration is 10 similarly applied to the green and blue color component values of pixels 504.

With reference to the preferred embodiment of decimation filter 502, filter blocks 506 having dimensions of 3x3 pixels are defined among pixels 504. For each pixel block 506, the median pixel intensity value is 15 identified or selected. With reference to pixel blocks 506a-506c, for example, decimation filter 502 provides the respective values of 8, 9, and 10, which are listed as the first three pixels 512 in Fig. 20B.

It will be appreciated, however, that decimation 20 filter 502 could employ other median filters according to this invention. Accordingly, for each group of pixels having associated color component values of $\{a_0, a_1, \dots, a_{n-1}\}$ the median filter would select a median value a_M .

A first 2x2 down sampling filter 514 samples 25 alternate pixels 512 in vertical and horizontal directions to provide additional compression. Fig. 20C represents a resulting compressed set of pixels 515.

A 2x2 up sample filter 516 inserts a pixel of zero value in place of each pixel 512 omitted by down 30 sampling filter 514, and interpolation filter 518 assigns to the zero-value pixel a pixel value of an average of the opposed adjacent pixels, or a previous assigned value if the zero-value pixel is not between an opposed pair of non-zero value pixels. To illustrate, Fig. 20D represents 35 a resulting set or array of value pixels 520.

A difference 522 is taken between the color component values of the set of pixels 504 and the

corresponding color component values for set of pixels 520 to form a zero-order image component I_0 .

5 A second decimation filter 526 receives color component values corresponding to the compressed set of pixels 515 generated by first 2x2 down sampling filter 514. Decimation filter 526 preferably is the same as decimation filter 502 (e.g., a 3x3 nonseparable median filter). Accordingly, decimation filter 526 functions in the same manner as decimation filter 502 and delivers a 10 resulting compressed set or array of pixels (not shown) to a second 2x2 down sampling filter 528.

15 Down sampling filter 528 functions in the same manner as down sampling filter 514 and forms a second order image component L_2 that also is delivered to a 2x2 up sample filter 530 and an interpolation filter 531 that function in the same manner as up sample filter 516 and interpolation filter 518, respectively. A difference 532 is taken between the color component values of the set of pixels 515 and the resulting color component values 20 provided by interpolation filter 531 to form a first-order image component I_1 .

The image components I_0 , I_1 , and L_2 are respective

$$nxn, \frac{n}{2}x\frac{n}{2}, \frac{n}{4}x\frac{n}{4}$$

25 of color component values that represent the color component values for an nxn array of pixels 504.

Image component I_0 maintains the high frequency components (e.g., edges) of an image represented by the original set of pixel 504. Image components I_1 and L_2 30 represent low frequency aspects of the original image. Image components I_0 , I_1 and L_2 provide relative compression of the original image. Image component I_0 and I_1 maintain high frequency features (e.g., edges) in a format that is

highly compressible due to the relatively high correlation between the values of adjacent pixels. Image component L_2 is not readily compressible because it includes primarily low frequency image features, but is a set of relatively 5 small size.

Fig. 19B is a functional block diagram of a decoder method 536 that decodes or inverse encodes image components I_0 , I_1 , and L_2 generated by encoder method 500. Decoder method 536 includes a first 2x2 up sample filter 10 538 that receives image component L_2 and interposes a pixel of zero value between each adjacent pair of pixels. An interpolation filter 539 assigns to the zero-value pixel a pixel value that preferably is an average of the values of the adjacent pixels, or a previous assigned 15 value if the zero-value pixel is not between an opposed pair of non-zero-value pixels. First 2x2 up sample filter 538 operates in substantially the same manner as up sample filters 516 and 530 of Fig. 19A, and interpolation filter 539 operates in substantially the same manner as 20 interpolation filters 518 and 531.

A sum 540 is determined between image component I_1 and the color component values corresponding to the decompressed set of pixels generated by first 2x2 up sample filter 538 and interpolation filter 539. A second 25 2x2 up sample filter 542 interposes a pixel of zero value between each adjacent pair of pixels generated by sum 540. An interpolation filter 543 assigns to the zero-value pixel a pixel value that includes an average of the values of the adjacent pixels, or a previous assigned value if 30 the zero-value pixel is not between an opposed pair of non-zero-value pixels. Up sample filter 542 and interpolation filter 543 are substantially the same as up sample filter 538 and interpolation filter 539, respectively.

35 A sum 544 sums the image component I_0 with the color component values corresponding to the decompressed set of pixels generated by second 2x2 up sample filter 542

and interpolation filter 543. Sum 544 provides decompressed estimated error 110 corresponding to the estimated error 110 delivered to encoder process 500.

TRANSFORM CODING OF MOTION VECTORS

5 Conventional video compression encoder processes, such as MPEG-1 or MPEG-2, utilize only sparse motion vector fields to represent the motion of significantly larger pixel arrays of a regular size and configuration. The motion vector fields are sparse in
10 that only one motion vector is used to represent the motion of a pixel array having dimensions of, for example, 16 x 16 pixels. The sparse motion vector fields, together with transform encoding of underlying images or pixels by, for example, discrete cosine transform (DCT) encoding,
15 provide conventional video compression encoding.

In contrast, video compression encoding process 64 (Fig. 3) utilizes dense motion vector fields in which motion vectors are determined for all, or virtually all, pixels of an object. Such dense motion vector fields
20 significantly improve the accuracy with which motion between corresponding pixels is represented. Although the increased accuracy can significantly reduce the errors associated with conventional sparse motion vector field representations, the additional information included in
25 dense motion vector fields represent an increase in the amount of information representing a video sequence. In accordance with this invention, therefore, dense motion vector fields are themselves compressed or encoded to improve the compression ratio provided by this invention.

30 Fig. 21 is a functional block diagram of a motion vector encoding process 560 for encoding or compressing motion vector fields and, preferably, dense motion vector fields such as those generated in accordance with dense motion transformation 96 of Fig. 3. It will be
35 appreciated that such dense motion vector fields from a selected object typically will have greater continuity or "smoothness" than the underlying pixels corresponding to

the object. As a result, compression or encoding of the dense motion vector fields will attain a greater compression ratio than would compression or encoding of the underlying pixels.

5 Function block 562 indicates that a dense motion vector field is obtained for an object or a portion of an object in accordance with, for example, the processes of function block 96 described with reference to Fig. 3. Accordingly, the dense motion vector field will correspond 10 to an object or other image portion of arbitrary configuration or size.

Function block 564 indicates that the configuration of the dense motion vector field is extrapolated to a regular, preferably rectangular, 15 configuration to facilitate encoding or compression. Preferably, the dense motion vector field configuration is extrapolated to a regular configuration by precompression extrapolation method 400 described with reference to Figs. 17A and 17B. It will be appreciated that conventional 20 extrapolation methods, such as a mirror image method, could alternatively be utilized.

Function block 566 indicates that the dense motion vector field with its extrapolated regular configuration is encoded or compressed according to 25 conventional encoding transformations such as, for example, discrete cosine transformation (DCT) or lattice wavelet compression, the former of which is preferred.

Function block 568 indicates that the encoded dense motion vector field is further compressed or encoded 30 by a conventional lossless still image compression method such as entropy encoding to form an encoded dense motion vector field 570. Such a still image compression method is described with reference to function block 114 of Fig. 3.

COMPRESSION OF QUANTIZED OBJECTS FROM PREVIOUS VIDEO FRAMES

Referring to Fig. 3, video compression encoder process 64 uses quantized prior object 98 determined with reference to a prior frame N-1 to encode a corresponding object in a next successive frame N. As a consequence, encoder process 64 requires that quantized prior object 98 be stored in an accessible memory buffer. With conventional video display resolutions, such a memory buffer would require a capacity of at least one megabyte to store the quantized prior object 98 for a single video frame. Higher resolution display formats would require correspondingly larger memory buffers.

Fig. 22 is a functional block diagram of a quantized object encoder-decoder (codec) process 600 that compresses and selectively decompresses quantized prior objects 98 to reduce the required capacity of a quantized object memory buffer.

Function block 602 indicates that each quantized object 98 in an image frame is encoded on a block-by-block manner by a lossy encoding or compression method such as discrete cosine transform (DCT) encoding or lattice sub-band (wavelet) compression.

Function block 604 indicates that the encoded or compressed quantized objects are stored in a memory buffer (not shown).

Function block 606 indicates that encoded quantized objects are retrieved from the memory buffer in anticipation of processing a corresponding object in a next successive video frame.

Function block 608 indicates that the encoded quantized object is inverse encoded by, for example, DCT or wavelet decoding according to the encoding processes employed with respect to function block 602.

Codec process 600 allows the capacity of the corresponding memory buffer to be reduced by up to about 80%. Moreover, it will be appreciated that codec process

600 would be similarly applicable to the decoder process corresponding to video compression encoder process 64.

VIDEO COMPRESSION DECODER PROCESS OVERVIEW

Video compression encoder process 64 of Fig. 3 5 provides encoded or compressed representations of video signals corresponding to video sequences of multiple image frames. The compressed representations include object masks 66, feature points 68, affine transform coefficients 104, and compressed error data 116 from encoder process 64 10 and compressed master objects 136 from encoder process 130. These compressed representations facilitate storage or transmission of video information, and are capable of achieving compression ratios of up to 300 percent greater than those achievable by conventional video compression 15 methods such as MPEG-2.

It will be appreciated, however, that retrieving such compressed video information from data storage or receiving transmission of the video information requires that it be decoded or decompressed to reconstruct the 20 original video signal so that it can be rendered by a display device such as video display device 52 (Figs. 2A and 2B). As with conventional encoding processes such as MPEG-1, MPEG-2, and H.26X, the decompression or decoding of the video information is substantially the inverse of 25 the process by which the original video signal is encoded or compressed.

Fig. 23A is a functional block diagram of a video compression decoder process 700 for decompressing video information generated by video compression encoder 30 process 64 of Fig. 3. For purposes of consistency with the description of encoder process 64, decoder process 700 is described with reference to Figs. 2A and 2B. Decoder process 700 retrieves from memory or receives as a transmission encoded video information that includes 35 object masks 66, feature points 68, compressed master objects 136, affine transform coefficients 104, and compressed error data 116.

Decoder process 700 performs operations that are the inverse of those of encoder process 64 (Fig. 3). Accordingly, each of the above-described preferred operations of encoder process 64 having a decoding 5 counterpart would similarly be inversed.

Function block 702 indicates that masks 66, feature points 68, transform coefficients 104, and compressed error data 116 are retrieved from memory or received as a transmission for processing by decoder 10 process 700.

Fig. 23B is a functional block diagram of a master object decoder process 704 for decoding or decompressing compressed master object 136. Function block 706 indicates that compressed master object data 136 15 are entropy decoded by the inverse of the conventional lossless entropy encoding method in function block 134 of Fig. 3B. Function block 708 indicates that the entropy decoded master object from function block 706 is decoded according to an inverse of the conventional lossy wavelet 20 encoding process used in function block 132 of Fig. 3B.

Function block 712 indicates that dense motion transformations, preferably multi-dimensional affine transformations, are generated from affine coefficients 104. Preferably, affine coefficients 104 are quantized in 25 accordance with transformation method 350 (Fig. 12), and the affine transformations are generated from the quantized affine coefficients by performing the inverse of the operations described with reference to function block 362 (Fig. 12).

Function block 714 indicates that a quantized 30 form of an object 716 in a prior frame N-1 (e.g., rectangular solid object 56a in image frame 54a) provided via a timing delay 718 is transformed by the dense motion transformation to provide a predicted form of the object 35 720 in a current frame N (e.g., rectangular solid object 56b in image frame 54b).

Function block 722 indicates that for image frame N, predicted current object 720 is added to a quantized error 724 generated from compressed error data 116. In particular, function block 726 indicates that 5 compressed error data 116 is decoded by an inverse process to that of compression process 114 (Fig. 3A). In the preferred embodiment, function blocks 114 and 726 are based upon a conventional lossless still image compression method such as entropy encoding.

10 Function block 728 indicates that the entropy decoded error data from function block 726 is further decompressed or decoded by a conventional lossy still image compression method corresponding to that utilized in function block 112 (Fig. 3A). In the preferred embodiment, the decompression or decoding of function 15 block 728 is by a lattice subband (wavelet) process or a discrete cosine transform (DCT) process.

Function block 722 provides quantized object 730 for frame N as the sum of predicted object 720 and 20 quantized error 724, representing a reconstructed or decompressed object 732 that is delivered to function block 718 for reconstruction of the object in subsequent frames.

Function block 734 indicates that quantized 25 object 732 is assembled with other objects of a current image frame N to form a decompressed video signal.

SIMPLIFIED CHAIN ENCODING

Masks, objects, sprites, and other graphical features, commonly are represented by their contours. 30 As shown in and explained with reference to FIG. 5A, for example, rectangular solid object 56a is bounded by an object perimeter or contour 142. A conventional process or encoding or compressing contours is referred to as chain encoding.

35 FIG. 24A shows a conventional eight-point chain code 800 from which contours on a conventional

rectilinear pixel array are defined. Based upon a current pixel location X, a next successive pixel location in the contour extends in one of directions 802a-802h. The chain code value for the next successive 5 pixel is the numeric value corresponding to the particular direction 802. As examples, the right, horizontal direction 802a corresponds to the chain code value 0, and the downward, vertical direction 802g corresponds to the chain code value 6. Any continuous 10 contour can be described from eight-point chain code 800.

With reference to FIG. 24B, a contour 804 represented by pixels 806 designated X and A-G can be encoded in a conventional manner by the chain code 15 sequence {00764432}. In particular, beginning from pixel X, pixels A and B are positioned in direction 0 relative to respective pixels X and A. Pixel C is positioned in direction 7 relative to pixel B. Remaining pixels D-G are similarly positioned in 20 directions corresponding to the chain code values listed above. In a binary representation, each conventional chain code value is represented by three digital bits.

FIG. 25A is a functional block diagram of a chain code process 810 of the present invention capable 25 of providing contour compression ratios at least about twice those of conventional chain code processes. Chain code process 810 achieves such improved compression ratios by limiting the number of chain codes and defining them relative to the alignment of adjacent 30 pairs of pixels. Based upon experimentation, it has been discovered that the limited chain codes of chain code process 810 directly represent more than 99.8% of pixel alignments of object or mask contours. Special case chain code modifications accommodate the remaining

less than 0.2% of pixel alignment as described below in greater detail.

5 Function block 816 indicates that a contour is obtained for a mask, object, or sprite. The contour may be obtained, for example, by object segmentation process 140 described with reference to FIGS. 4 and 5.

10 Function block 818 indicates that an initial pixel in the contour is identified. The initial pixel may be identified by common methods such as, for example, a pixel with minimal X-axis and Y-axis 15 coordinate positions.

15 Function block 820 indicates that a predetermined chain code is assigned to represent the relationship between the initial pixel and the next adjacent pixel in the contour. Preferably, the predetermined chain code corresponds to a forward direction.

FIG. 25B is a diagrammatic representation of a three-point chain code 822 of the present invention.

20 Chain code 822 includes three chain codes 824a, 824b, and 824c that correspond to a forward direction 826a, a leftward direction 826b, and a rightward direction 826c, respectfully. Directions 826a-826c are defined relative to a preceding alignment direction 828 between a current 25 pixel 830 and an adjacent pixel 832 representing the preceding pixel in the chain code.

30 Preceding alignment direction 828 may extend in any of the directions 802 shown in Fig. 24A, but is shown with a specific orientation (i.e., right, horizontal) for purposes of illustration. Direction 826a is defined, therefore, as the same as direction 828. Directions 826b and 826c differ from direction 828 by leftward and rightward displacements of one pixel.

35 It has been determined experimentally that slightly more than 50% of chain codes 824 correspond to

forward direction 826a, and slightly less than 25% of chain codes 824 correspond to each of directions 826b and 826c.

5 Function block 836 represents an inquiry as to whether the next adjacent pixel in the contour conforms to one of directions 826. Whenever the next adjacent pixel in the contour conforms to one of directions 826, function block 836 proceeds to function block 838, and otherwise proceeds to function block 840.

10 Function block 838 indicates that the next adjacent pixel is assigned a chain code 824 corresponding to its direction 826 relative to the direction 828 along which the adjacent preceding pair of pixels are aligned.

15 Function block 840 indicates that a pixel sequence conforming to one of directions 826 is substituted for the actual nonconformal pixel sequence. Based upon experimentation, it has been determined that such substitutions typically will arise in fewer than 20 0.2% of pixel sequences in a contour and may be accommodated by one of six special-case modifications.

25 FIG. 25C is a diagrammatic representation of the six special-case modifications 842 for converting non-conformal pixel sequences to pixel sequences that conform to directions 826. Within each modification 842, a pixel sequence 844 is converted to a pixel sequence 846. In each of pixel sequences 844 of adjacent respective pixels X^1 , X^2 , A, B, the direction between pixels A and B does not conform to one of 30 directions 826 due to the alignment of pixel A relative to the alignment of pixels X^1 and X^2 .

In pixel sequence 844a, initial pixel alignments 850a and 852a represent a nonconformal right-angle direction change. Accordingly, in pixel sequence 35 846a, pixel A of pixel sequence 844a is omitted,

resulting in a pixel direction 854a that conforms to pixel direction 826a. Pixel sequence modifications 842b-842f similarly convert nonconformal pixel sequences 844b-844f to conformal sequences 846b-846f,
5 respectively.

Pixel sequence modifications 842 omit pixels that cause pixel direction alignments that change by 90° or more relative to the alignments of adjacent preceding pixels X1 and X2. One effect is to increase the minimum 10 radius of curvature of a contour representing a right angle to over three pixels. Pixel modifications 842 cause, therefore, a minor loss of extremely fine contour detail. According to this invention, however, it has been determined that the loss of such details is 15 acceptable under most viewing conditions.

Function block 860 represents an inquiry as to whether there is another pixel in the contour to be assigned a chain code. Whenever there is another pixel in the contour to be assigned a chain code, function 20 block returns to function block 836, and otherwise proceeds to function block 862.

Function block 862 indicates that nonconformal pixel alignment directions introduced or incurred by the process of function block 840 are removed. In a 25 preferred embodiment, the nonconformal direction changes may be omitted simply by returning to function block 816 and repeating process 810 until no nonconformed pixel sequences remain, which typically is achieved in fewer than 8 iterations. In an alternative embodiment, such 30 incurred nonconformal direction changes may be corrected in "real-time" by checking for and correcting any incurred nonconformal direction changes each time a nonconformal direction change is modified.

Function block 864 indicates that a Huffman 35 code is generated from the resulting simplified chain

-63-

code. With chain codes 824a-824c corresponding to directions 826A-826C that occur for about 50%, 25% and 25% of pixels in a contour, respective Huffman codes of 0, 11, and 10 are assigned. Such first order Huffman 5 codes allow chain process 810 to represent contours at a bit rate of less than 1.5 bits per pixel in the contour. Such a bitrate represents approximately a 50% compression ratio improvement over conventional chain code processes.

10 It will be appreciated that higher order Huffman coding could provide higher compression ratios. Higher order Huffman coding includes, for example, assigning predetermined values to preselected sequences of first order Huffman codes.

15 **SPRITE GENERATION**

The present invention includes generating sprites for use in connection with encoding determinate motion video (movie). Bitmaps are accreted into bitmap series that comprise a plurality of sequential bitmaps 20 of sequential images from an image source. Accretion is used to overcome the problem of occluded pixels where objects or figures move relative to one another or where one figure occludes another similar to the way a foreground figure occludes the background. For example, 25 when a foreground figure moves and reveals some new background, there is no way to build that new background from a previous bitmap unless the previous bitmap was first enhanced by including in it the pixels that were going to be uncovered in the subsequent bitmap. This 30 method takes an incomplete image of a figure and looks forward in time to find any pixels that belong to the image but are not to be immediately visible. Those pixels are used to create a composite bitmap for the figure. With the composite bitmap, any future view of

the figure can be created by distorting the composite bitmap.

The encoding process begins by an operator identifying the figures and the parts of the figures of a current bitmap from a current bitmap series. Feature or distortion points are selected by the operator on the features of the parts about which the parts of the figures move. A current grid of triangles is superimposed onto the parts of the current bitmap. The 5 triangles that constitute the current grid of triangles are formed by connecting adjacent distortion points. The distortion points are the vertices of the triangles. The current location of each triangle on the current bitmap is determined and stored to the storage device. The 10 current location of each triangle on the current bitmap is determined and stored to the storage device. A portion of data of the current bitmap that defines the first image within the current location of each triangle is retained for further use.

A succeeding bitmap that defines a second image of the current bitmap series is received from the 20 image source, and the figures and the parts of the figure are identified by the operator. Next, the current grid of triangles from the current bitmap is superimposed onto the succeeding bitmap. The distortion points of current grid of triangles are realigned to 25 coincide with the features of the corresponding figures on the succeeding bitmap. The realigned distortion points form a succeeding grid of triangles on the succeeding bitmap of the second image. The succeeding location of each triangle on the succeeding bitmap is determined and stored to the storage device. A portion 30 of data of the succeeding bitmap that defines the second image within the succeeding location of each triangle is retained for further use.

The process of determining and storing the 35 current and succeeding locations of each triangle is

repeated for the plurality of sequential bitmaps of the current bitmap series. When that process is completed, an average image of each triangle in the current bitmap series is determined from the separately retained data.

5 The average image of each triangle is stored to the storage device.

During playback, the average image of each triangle of the current bitmap series and the current location of each triangle of the current bitmap are 10 retrieved from the storage device. A predicted bitmap is generated by calculating a transformation solution for transforming the average image of each triangle in the current bitmap series to the current location of each triangle of the current bitmap and applying the 15 transformation solution to the average image of each triangle. The predicted bitmap is passed to the monitor for display.

In connection with a playback determinate motion video (video game) in which the images are 20 determined by a controlling program at playback, a sprite bitmap is stored in its entirety on a storage device. The sprite bitmap comprises a plurality of data bits that define a sprite image. The sprite bitmap is displayed on a monitor, and the parts of the sprite are 25 identified by an operator and distortion points are selected for the sprite's parts.

A grid of triangles is superimposed onto the parts of the sprite bitmap. The triangles that constitute the grid of triangles are formed by 30 connecting adjacent distortion points. The distortion points are the vertices of the triangles. The location of each triangle of the sprite bitmap is determined and stored to the storage device.

During playback, a succeeding location of each 35 triangle is received from a controlling program. The

sprite bitmap and the succeeding location of each triangle on the sprite bitmap are recalled from the storage device and passed to the display processor. The succeeding location of each triangle is also passed to 5 the display processor.

A transformation solution is calculated for each triangle on the sprite bitmap. A succeeding bitmap is then generated in the display processor by applying the transformation solution of each triangle derived 10 from the sprite bitmap the defines the sprite image within the location of each triangle. The display processor passes the succeeding sprite bitmap to a monitor for display. This process is repeated for each succeeding location of each triangle requested by the 15 controlling program.

As shown in Fig. 26, an encoding procedure for a movie motion video begins at step 900 by the CPU 22 receiving from an image source a current bitmap series. The current bitmap series comprises a plurality of 20 sequential bitmaps of sequential images. The current bitmap series has a current bitmap that comprises a plurality of data bits which define a first image from the image source. The first image comprises at least one figure having at least one part.

25 Proceeding to step 902, the first image is displayed to the operator on the monitor 28. From the monitor 28, the figures of the first image on the current bitmap are identified by the operator. The parts of the figure on the current bitmap are then 30 identified by the operator at step 904.

Next, at step 906, the operator selects 35 feature or distortion points on the current bitmap. The distortion points are selected so that the distortion points coincide with features on the bitmap where relative movement of a part is likely to occur. It will

be understood by those skilled in the art that the figures, the parts of the figures and the distortion points on a bitmap may be identified by the computer system 20 or by assistance from it. It is preferred, 5 however, that the operator identify the figures, the parts of the figures and the distortion points on a bitmap.

Proceeding to step 908, a current grid of triangles is superimposed onto the parts of the current 10 bitmap by the computer system 20. With reference to Fig. 27A, the current grid comprises triangles formed by connecting adjacent distortion points. The distortion points form the vertices of the triangles. More specifically, the first image of the current bit map 15 comprises a figure, which is a person 970. The person 970 has six parts corresponding to a head 972, a torso 974, a right arm 976, a left arm 978, right leg 980, and a left leg 982. Distortion points are selected on each part of the person 970 so that the distortion points 20 coincide with features where relative movement of a part is likely to occur. A current grid is superimposed over each part with the triangles of each current grid formed by connecting adjacent distortion points. Thus, the distortion points form the vertices of the triangles.

25 At step 910, the computer system 20 determines a current location of each triangle on the current bitmap. The current location of each triangle on the current bitmap is defined by the location of the distortion points that form the vertices of the 30 triangle. At step 912, the current location of each triangle is stored to the storage device. A portion of data derived from the current bitmap that defines the first image within the current location of each triangle is retained at step 914.

-68-

Next, at step 916, a succeeding bitmap of the current bitmap series is received by the CPU 22. The succeeding bitmap comprises a plurality of data bits which define a second image of the current bitmap series. The second image may or may not include figures that correspond to the figures in the first image. For the following steps, the second image is assumed to have figures that corresponds to the figures in the first image. At step 918, the current grid of triangles is superimposed onto the succeeding bitmap. The second image with the superimposed triangular grid is displayed to the operator on the monitor 28.

At step 920, the distortion points are realigned to coincide with corresponding features on the succeeding bitmap by the operator with assistance from the computer system 20. The computer system 20 realigns the distortion using block matching. Any mistakes are corrected by the operator. With reference to Fig. 27B, the realigned distortion points form a succeeding grid of triangles. The realigned distortion points are the vertices of the triangles. More specifically, the second image of the succeeding bitmap of person 200 includes head 972, torso 974, right arm 976, left arm 978, right leg 980, and left leg 982. In the second image, however, the right arm 980 is raised. The current grids of the first image have been superimposed over each part and their distortion points realigned to coincide with corresponding features on the second image. The realigned distortion points define succeeding grids of triangles. The succeeding grids comprise triangles formed by connecting the realigned distortion points. Thus, the realigned distortion point form the vertices of the triangles of the succeeding grids.

Proceeding to step 922, a succeeding location of each triangle of the succeeding bitmap is determined by the computer system 20. At step 924, the succeeding location of each triangle on the succeeding bitmap is stored the storage device. A portion of data derived from the succeeding bitmap that defines the second image within the succeeding location of each triangle is retained at step 926. Step 926 leads to decisional step 928 where it is determined if a next succeeding bitmap exists.

If a next succeeding bitmap exists, the YES branch of decisional step 928 leads to step 930 where the succeeding bitmap becomes the current bitmap. Step 930 returns to step 916 where a succeeding bitmap of the current bitmap series is received by the CPU 22. If a next succeeding bitmap does not exist, the NO branch of decisional step 928 leads to step 932 where an average image for each triangle of the current bitmap series is determined. The average image is the median value of the pixels of a triangle. Use of the average image makes the process less susceptible to degeneration. Proceeding to step 934, the average image of each triangle of the current bitmap series is stored to the storage device.

Next, at step 936, the current location of each triangle on the current bitmap is retrieved from the storage device. An affine transformation solution for transforming the average image of each triangle to the current location of the triangle on the current bitmap is then calculated by the computer system 20 at step 938. At step 940, a predicted bitmap is generated by applying the transformation solution of the average image of each triangle to the current location of each triangle on the current bitmap. The predicted bitmap is compared with the current bitmap at step 942.

At step 944 a correction bitmap is generated. The corrected bitmap comprises the data bits of the current bitmap that were not accurately predicted by the predicted bitmap. The corrected bitmap is stored to the 5 storage device at step 948. Step 948 leads to decisional step 950 where it is determined if a succeeding bitmap exists.

If a succeeding bitmap exists, the YES branch of decisional step 950 leads to step 952 where the 10 succeeding bitmap becomes the current bitmap. Step 952 returns to step 936 where the current location of each triangle on the current bitmap is retrieved from the storage device. If a next succeeding bitmap does not exist, the NO branch of decisional step 950 leads to 15 decisional step 954 where it is determined if a succeeding bitmap series exists. If a succeeding bitmap series does not exist, encoding is finished and the NO branch of decisional step 954 leads to step 956. If a succeeding bitmap series exists, the YES branch of 20 decisional step 954 leads to step 958 where the CPU 22 receives the succeeding bitmap series as the current bitmap series. Step 956 returns to step 902 where the figures of the first image of the current bitmap series is identified by the operator.

25 The process of Fig. 26 describes generation of a sprite or master object 90 for use by encoder process 64 of Fig. 3. The process of utilizing master object 90 to form predicted objects 102 is described with reference to Fig. 28.

30 As shown in Fig. 28, the procedure begins at step 1000 with a current bitmap series being retrieved. The current bitmap series comprises a plurality of sequential bitmaps of sequential images. The current bitmap series has a current bitmap that comprises a 35 plurality of data bits which define a first image from

the image source. The first image comprises at least one figure having at least one part.

At step 1002, the average image of each triangle of the current bitmap series is retrieved from 5 the storage device. The average image of each triangle is then passed to a display processor (not shown) at step 704. It will be appreciated that computer system 20 (Fig. 1) can optionally include a display processor or other dedicated components for executing for 10 processes of this invention. Proceeding to step 1006, the current location of each triangle on the current bitmap is retrieved from the storage device. The current location of each triangle is passed to the display processor at step 1008.

15 Next, an affine transformation solution for transforming the average image of each triangle to the current location of each triangle on the current bitmap is calculated by the display processor at step 1010. Proceeding to step 1012, a predicted bitmap is generated 20 by the display processor by applying the transformation solution for transforming the average image of each triangle to the current location of each triangle on the current bitmap.

25 At step 1014, a correction bitmap for the current bitmap is retrieved from the storage device. The correction bitmap is passed to the display processor at step 716. A display bitmap is then generated in the display processor by overlaying the predicted bitmap with the correction bitmap. The display processor 30 retains a copy of the average image of each triangle and passes the display bitmap to the frame buffer for display on the monitor.

35 Next, at decisional step 1020, it is determined if a succeeding bitmap of the current bitmap series exists. If a succeeding bitmap of the current

bitmap series exists, the YES branch of decisional step 1020 leads to step 1022. At step 1022, the succeeding bitmap becomes the current bitmap. Step 1022 returns to step 1006 where the location of each triangle on the 5 current bitmap is retrieved from the storage device.

Returning to decisional step 1020, if a succeeding bitmap of the current bitmap series does not exist, the NO branch of decisional step 1020 leads to decisional step 1024. At decisional step 1024, it is 10 determined if a succeeding bitmap series exists. If a succeeding bitmap series does not exist, then the process is finished and the NO branch of decisional step 1024 leads to step 1026. If a succeeding bitmap series exists, the YES branch of decisional step 1024 leads to 15 step 1028. At step 1028, the succeeding bitmap series becomes the current bitmap series. Step 1028 returns to step 1000.

REPRESENTATION AND ENCODING OF GENERAL ARBITRARY SHAPES

Fig. 29 is a diagrammatic representation of a 20 solid binary arbitrary feature or shape 1100 representing a binary mask of an arbitrary object included in a frame of a video image sequence. As described hereinabove, each frame of a video image sequence typically includes multiple objects 25 corresponding to multiple image features such as characters, props, and background. The configuration of solid shape 1100 is arbitrary to represent any such object having a solid or continuous interior.

As a binary representation relative to its 30 background 1102, solid shape 1100 corresponds to a mask, such as those described hereinabove with respect to Figs. 2A, 2B, and 3A, by which objects are identified and encoded. Solid shape 1100 is characterized by a continuous outer contour or boundary 1104 and a uniform 35 or single-state interior 1106 within boundary 1104.

Solid shape 1100 includes no disconnected or embedded portions of different binary states. Solid shape 1100 is capable of being compressed or encoded accurately with respect to its boundary 1104 by conventional 5 contour coding techniques such as chain coding or polygonal contour approximation, or by the simplified chain encoding process described hereinabove with reference to Figs. 25A-25C.

Fig. 30 is a diagrammatic representation of a 10 general binary arbitrary feature or shape 1110 representing a binary mask of an arbitrary object included in the frame of a video image sequence. General shape 1110 preferably corresponds to a binary mask distinct from its background 1112 by which objects 15 are identified and encoded. The configuration of general shape 1110 is general in that it represents generally any object, including objects having discontinuous or embedded regions or components within their interiors. In this regard, solid shape 1100 20 represents a simplified subset of general shape 1110.

General shape 1110 includes multiple continuous contours or boundaries 1114 that are disconnected or enclosed within each other. Fig. 30A shows a first set of disconnected boundaries 1114a-1114c 25 corresponding to a first hierarchical level, a second set of disconnected boundaries 1114d-1114f corresponding to a second hierarchical level, and a third set of disconnected boundaries 1114g and 1114h corresponding to a third hierarchical level. Boundaries 1114a-1114h 30 bound or encompass corresponding uniform or single-state components 1116a-1116h. Accordingly, general shape 1110 includes disconnected components (e.g., 1114a and 1114c) and embedded components (e.g., 1114e and 1114g) within host components (e.g., 1114a and 1114e); the embedded 35 components being of different binary states than their

host components. Embedded components are analogous to holes or islands within host components correspond to islands or holes, respectively.

Accurately recognizing and encoding the 5 disconnected or embedded components of solid shape 1110 provide improved video compression because such general shapes correspond better to many objects commonly found in general video image sequences. The disconnected or embedded components of general shape 1110 cannot be 10 represented by some conventional shape encoding techniques and are represented inefficiently by other techniques. As a consequence, such general shapes conventionally are simplified to ignore embedded components, which can introduce significant encoding 15 errors during video compression.

Fig. 31 is a functional block diagram of a hierarchical decomposition and encoding process 1130 capable of accurately representing general arbitrary shape 1110 with its disconnected and embedded components 1116a-1116h. Hierarchical process 1130 automatically decomposes general binary arbitrary shapes into distinct component masks that have continuous boundaries and no embedded components of contrasting binary states. Process 1130 is hierarchical in that embedded components 25 are decomposed from host components iteratively to form hierarchical levels of component masks. Each component mask is capable of being compressed or encoded accurately with respect to its boundary by conventional contour coding techniques such as chain coding or 30 polygonal contour approximation, or by the simplified chain coding process described hereinabove with reference to Figs. 25A-25C.

Hierarchical process 1130 receives binary shape data 1132 corresponding to general arbitrary shape 35 1110, which may include simple solid shapes and general

shapes having disconnected or embedded components. For purposes of explanation, hierarchical representation process 1130 is described with reference to general arbitrary shape 1110 with its embedded and disconnected 5 components 1116a-1116h, but is similarly applicable to simple shape 1100.

Process block 1134 indicates that a bounding box 1136 of pixels (Fig. 30B) is defined about and encompasses components 1116a-1116h of general arbitrary 10 shape 1110. Preferably, bounding box 1136 is a right regular array of pixels with dimensions selected automatically or by a user. It will be appreciated that bounding box 1136 as used with respect to process 1130 preferably is oversized relative to the components 15 1116a-1116h of general arbitrary shape 1110. In some applications, a bounding box is deemed as being fitted closely to an enclosed feature. Bounding box 1136 is preferably oversized to assure that all components of a shape are enclosed.

20 Process block 1140 indicates that an initial pixel 1142 within bounding box 1136 and corresponding to background 1112 is sought. In the preferred binary representation, background 1112 is of a known binary state. Initial pixel 1142 is sought initially at a 25 selected corner of bounding box 1136 (e.g., the upper left corner shown in Fig. 30B). If that location corresponds to general shape 1110 rather than background 1112, a search is commenced successively at the remaining corners and along the boundaries of bounding 30 box 1136 to identify an initial pixel 1142 corresponding to the background 1112.

Decision block 1144 represents an inquiry whether an initial pixel 1142 is identified along the boundary of bounding box 1136 and corresponding to 35 background 1112. Whenever such an initial pixel 1142 is

-76-

identified, decision block 1144 proceeds to process block 1146. Whenever no pixel along the boundary of bounding box 1136 corresponds to background 1112, decision block 1144 proceeds to process block 1148.

5 Process block 1146 indicates that all pixels of the binary state corresponding to background 1112 and connected together with initial pixel 1142 are assigned the opposite binary state. As a result, bounding box 1136 is "filled" around major objects 1116a-1116c and 10 forms shapes complementary to major objects 1116a-1116c. This filling of bounding box 1136 may be performed by any conventional filling technique such as region grow, which is explained in Computer Graphics: Principles and Practice, 2d ed., Foley et al., Addison-Wesley Publishing 15 Co., N.Y., (1991). As shown in Fig. 30C, the filling of background 1112 in bounding box 1136 leaves unfilled complementary connected components 1142a-1142c corresponding to respective major objects 1116a-1116c. Connected components 1142a-1142c encompass all objects 20 embedded within major objects 1116a-1116c and provide a first hierarchical decomposition of general object 1110.

Process block 1148 indicates that the pixels within bounding box 1136 of the same binary state as, and connected to, the pixels along the boundary of 25 bounding box 1136 are assigned the opposite binary state. It will be appreciated that the pixels filled by this process block relate not to background 1112, but rather an object or objects (not shown) that extend to the boundary of bounding box 1136. As a result, 30 bounding box 1136 is "filled" around objects embedded within one or more host objects and forms shapes complementary to the embedded objects. This filling of bounding box 1136 may be performed by the same filling technique used in connection with process block 1146.

Process block 1150 indicates that connected components formed by process blocks 1146 and 1148 are identified and filled. With reference to the connected components formed by process block 1146, for example, 5 connected components 1142a-1142c are identified by their contrasting binary state from that of the filled background 1112 and preferably are filled to form solid masks corresponding to respective major objects 1116a-1116c. The solid masks corresponding to connected 10 components 1142a-1142c provide a basis for identifying and processing similarly objects embedded within major objects 1116a-1116c.

Process block 1152 indicates that a boundary or contour of each of the connected components 15 identified by process block 1150 is encoded or compressed by a contour coding technique such as conventional chain coding or conventional polygonal contour approximation, or preferably, by the simplified chain coding process described hereinabove with 20 references to Figs. 25A-25C. It will be appreciated that each of the connected components (e.g., connected components 1142a-1142c) is effectively a simple binary object capable of being represented accurately by such contour encoding techniques. Complementary components 25 1142a-1142c represent one level of general arbitrary object decomposition that accurately represents objects at a common level of hierarchical decomposition. Subsequent iterations of process 1130 provides analogous representations of successively embedded objects.

30 Difference block 1154 indicates that a logical difference is taken between the complementary components identified in accordance with process block 1150 and the corresponding objects in the original binary shape data 1132. The difference is determined on a pixel-by-pixel 35 basis. For example, the difference between major

objects 1116a-1116c and the solid masks formed from respective complementary components 1142a-1142c identifies any discontinuous objects embedded within objects 1116a-1116c. Fig. 30D is a diagrammatic 5 representation of the resulting difference showing that within major object 1116a (shown in outline for reference purposes) embedded objects 1116d and 1116e are identified and that within major object 1116b (shown in outline for reference purposes) embedded object 1116f is 10 identified. Fig. 30D also demonstrates that the absence of a difference between major object 1114c and complementary component 1142c indicates that no objects are embedded therein. As a result, encoding boundary 1116c of object 1114c completely describes and 15 represents in a compressed formal object 1114c.

Difference block 1154 identifies discontinuous embedded objects (e.g. 1116d, 1116e, and 1116f), which are delivered to process block 1132 for processing in the same manner as were major objects 1116a-1116c. 20 Moreover, each successively embedded layer of objects, such as objects 1116g and 1116h within object 1116e, also is processed successively in this manner. Thus, successively embedded objects or layers are processed hierarchically by this method to encode accurately 25 general arbitrary binary shapes. The difference operation of difference block 154 functions to identify discontinuous embedded objects. This function could be achieved alternatively by assigning the other binary state to the complementary components and summing them 30 with the original binary shape data.

It will be appreciated that as binary objects, successively embedded discontinuous components alternate between first and second binary states. For reference purposes, objects identified by even-numbered operations 35 of difference block 1154 (e.g. 0, 2...) are referred to

as "islands" and include in Fig. 30A objects 1116a-1116c, 1116g, and 1116h. Objects identified by odd-numbered operations of difference block 1154 (e.g. 1, 3...) are referred to as "holes" and include in Fig. 30A 5 objects 1116d, 1116e, and 1116f.

Reconstruction or recomposition of general binary arbitrary shape 1110 from the contour encoded objects identified hierarchically by encoding process 1130 may be performed hierarchically according to the 10 sequence in which successive islands and holes are identified. Each successive hierarchical level is overlaid on a previous, hierarchically higher level. For example, complementary components 1142a-1142c would initially be decoded or decompressed from their contour 15 encoded formats, as is known in the art or described above. Subsequently, complementary components 1142d-1142f corresponding to holes 1116d-1116f would be decoded or decompressed and overlaid on complementary components 1142a and 1142b. Finally, complementary 20 components 1142g and 1142h corresponding to embedded islands 1116g and 1116h would be decompressed and overlaid onto the reconstructed shape. As a result, general arbitrary shape 1110 corresponding to a binary mask may be accurately encoded and decoded for 25 compressed storage or transmission.

Fig. 32 is a functional block diagram of an encoding process for representing non-binary object information such as object transparency data, which is sometimes referred to as an alpha channel. As is known 30 in the art, each pixel of a video image has a pixel value corresponding to predefined image characteristics. Frequently, pixels are assigned color component values corresponding to red, green, and blue-color components that together provide a substantially full color range. 35 Each color component could be represented, for example,

by an 8-bit digital value. Alternatively, pixel values can be represented by a YUV uniform color space in which Y represents luminance and U and V represent chromaticity, as is known in the art. Each of such Y, 5 U, and V color space components also could be represented by 8-bit digital values.

In addition to such color space representations for the pixels of an image, some object based video image representations include a transparency 10 or "alpha" channel that represents the relative transparency of the pixels corresponding to a selected object. Alpha channels commonly are used in video coding or compression, as well as computer graphics, image composition, etc. On a normalized scale, for 15 example, an alpha or transparency value of 0 could represent complete transparency and correspond to an object (e.g. background) over which any other object with a non-zero transparency value would be rendered. In contrast, a normalized transparency value of 1 could 20 represent complete opacity such that a corresponding object would be rendered over any other object in an image. It will be appreciated that such transparency values can be represented by at least 8-bit, and frequently 12- or 16-bit, digital values and that the 25 relative transparency values of overlapping objects is used to represent and render overlapping objects.

Encoding or compressing video data that includes a transparency channel requires that the transparency channel also be encoded or compressed. 30 However, acceptable encoding of a transparency channel requires that the boundaries of transparency representation be accurately encoded and decoded. Erroneous representations of the transparency channel boundaries of an object or objects creates discernible 35 and undesirable discontinuities in a decompressed or

regenerated image. An aspect of the present invention is, therefore, identifying the significance of accurately encoding transparency channel boundaries and providing a process for doing so.

5 Fig. 32 is a functional block diagram of an encoding process 1160 for representing non-binary object information, such as object transparency data, so as to maintain accurate representations of object boundaries. Encoder process 1160 provides accurate transparency data
10 boundary identification and encoding by hierarchical encoding process 1130 (Fig. 31). In addition, encoding process 1160 utilizes precompression extrapolation method 400 (Figs. 17A and 17B) for extrapolating transparency values for objects of arbitrary
15 configuration to a predefined configuration to facilitate compression or encoding in a conventional manner, such as by discrete cosine transform (DCT) or lattice wavelet compression, as described above.

20 This combination of hierarchical encoding process 1130 and precompression extrapolation method 400 allows transparency data to be encoded efficiently while maintaining highly accurate representations of transparency data boundaries. Moreover, it will be appreciated that encoding process 1160 would be
25 similarly applicable to other multi-value object data types for which accurate boundary representations and compression efficiency are necessary or desirable.

30 Encoding process 1160 receives multi-value transparency data 1162 corresponding to a region of a video image frame. Typically, transparency data 1162 would correspond to one or more objects, some of which may be partly or completely overlapping others. Different transparency values typically would be
35 associated with different ones of the objects according to the relative transparency or opacity of the objects.

5 Process block 1164 indicates that a threshold filter is applied to the transparency data. The threshold filter typically would have a relatively low, sometimes zero, threshold value to distinguish highly or completely transparent objects (e.g., background) from other objects. The threshold filter of process block 1164 provides a binary image representation that can include general arbitrary shapes of the type described hereinabove.

10 Process block 1168 indicates that the binary transparency data are applied to hierarchical encoding process 1130. Encoder process 1130 hierarchically decomposes and encodes the binary transparency data to provide precise encoded representations of the corresponding boundaries of the transparency data, as described above with reference to Fig. 31.

15 Process block 1170 indicates that the transparency data 1162 received by encoding process 1160 are extrapolated to a predefined configuration to facilitate compression. Preferably, the transparency data are extrapolated by precompression extrapolation method 400, described hereinabove with reference to Figs. 17A and 17B, and the predefined configuration of extrapolation block boundary 406 (Figs. 18) corresponds to bounding box 1136 of encoding process 1130.

20 Process block 1172 indicates that the extrapolated transparency data are encoded by an intraframe encoding process such as DCT or lattice wavelet encoding. It will be appreciated, however, that interframe encoding as described above with reference to process 64 can also be applied to the transparency data, resulting in a residual signal that preferably would be encoded by DCT or lattice wavelet encoding.

25 Encoding process 1160 provides as compressed or encoded data for storage or transmission an encoded

boundary representation at process block 1168 and an intra-frame encoded representation of the transparency data at process block 1172. Decoding of this information includes conventional intra-frame decoding 5 of the transparency value data (e.g. DCT or wavelet), decoding the boundary information corresponding to the binary transparency objects identified by the threshold filter of process block 1164, and applying the decoded boundary information as a mask to the decoded 10 transparency value information to represent reconstituted or decompressed transparency data.

Having illustrated and described the principles of the present invention in a preferred embodiment, it should be apparent to those skilled in the 15 art that the embodiment can be modified in arrangement and detail without departing from such principles. Accordingly, we claim as our invention all such embodiments as come within the scope and spirit of the following claims and equivalents thereto.

WE CLAIM:

1. A method of encoding a general arbitrary binary image feature in an image segment of a video image frame, the image feature being bounded by a feature boundary and including plural feature pixels that each have a binary pixel value, the image feature including a feature subcomponent with a subcomponent boundary that is separate from the feature boundary, and the image segment including the plural feature pixels and plural non-feature pixels of the image frame, the method comprising the steps:

defining the image segment with a predetermined configuration about the image feature;

15 identifying the feature boundary within the image segment and assigning a binary pixel value of a predetermined state to pixels bounded by the feature boundary to form a feature mask;

20 determining a difference between the image feature and the feature mask to identify the feature subcomponent with the subcomponent boundary that is separate from the feature boundary; and

25 designating the feature subcomponent as a newly designated image feature and repeating these method steps for the newly designated image feature to identify any feature subcomponent thereof.

2. The method of claim 1 further comprising encoding each image feature separately.

30 3. The method of claim 1 further comprising encoding each image feature with reference to its feature boundary.

4. The method of claim 1 in which identifying the feature boundary includes identifying a first pixel within the image segment but not within the image feature.

35 5. The method of claim 1 in which identifying the feature boundary includes identifying plural connected pixels that are within the image segment but not within the image feature.

6. A computer-readable medium having stored thereon computer-executable instructions for performing the method of claim 1.

7. A method of encoding a general arbitrary image feature in an image segment of a video image frame, the image feature being bounded by a feature boundary and including plural feature pixels that each have a pixel value, the image feature including an embedded feature component with a component boundary that is separate from the feature boundary, the method comprising the steps:

successively identifying the boundaries of the image feature and feature component;

successively forming masks in relation to the successively identified boundaries of the image feature and feature component;

encoding the image feature and feature component; and

successively determining differences between the masks and the corresponding image feature or feature component to identify, respectively, the feature component and any embedded feature subcomponent within the feature component.

8. The method of claim 7 in which encoding the image feature and feature component includes encoding them separately.

9. The method of claim 7 in which encoding the image feature and feature component includes encoding their boundaries.

10. A computer-readable medium having stored thereon computer-executable instructions for performing the method of claim 7.

11. The method of claim 7 in which the image feature is a binary image feature that includes plural feature pixels that each have a binary pixel value.

12. The method of claim 7 in which the image feature is a non-binary image feature that includes plural feature pixels that have non-binary pixel values.

13. The method of claim 12 in which the non-binary pixel values represent feature transparency.

14. The method of claim 12 in which identifying the boundaries of the image feature and feature component 5 includes applying a threshold filter to the non-binary pixel values to form a binary representation of the pixel values.

15. The method of claim 12 in which encoding the image feature and feature component includes encoding 10 their boundaries and the method further comprises encoding of the non-binary pixel values of the image feature separately from the image feature boundary.

16. The method of claim 15 in which encoding of the non-binary pixel values of the image feature 15 separately from the image feature boundary includes extrapolation of the non-binary pixel values of the image feature to a predefined configuration to facilitate encoding.

17. A method of encoding multi-bit image 20 transparency data for a general arbitrary image feature in a video image frame, the image feature being bounded by a feature boundary and including plural feature pixels that each have a pixel value including a multi-bit image transparency value, the image feature including an 25 embedded feature component with a component boundary that is separate from the feature boundary, the method comprising the steps:

successively identifying boundaries between the image transparency values of the image feature and feature component;

successively forming masks in relation to the successively identified image transparency boundaries of the image feature and feature component;

encoding image transparency boundaries of the 35 image feature and feature component; and

successively determining differences between the masks and the corresponding image feature or feature

component to identify, respectively, the feature component and any embedded feature subcomponent within the feature component.

18. The method of claim 17 in which identifying
5 the image transparency boundaries of the image feature and
feature component includes applying a threshold filter to
the multi-bit image transparency values to form binary
representations of the values.

19. The method of claim 17 further comprising
10 encoding the multi-bit image transparency values of the
image feature separately from the image feature boundary.

20. The method of claim 17 in which encoding of
the multi-bit image transparency values of the image
feature separately from the image feature boundary
15 includes extrapolation of the multi-bit image transparency
values of the image feature to a predefined configuration
to facilitate encoding.

21. A computer-readable medium having stored
thereon computer-executable instructions for performing the
20 method of claim 17.

22. A computer-readable medium having stored
thereon a data structure representing multi-bit image
transparency data for a general arbitrary image feature in
an image segment of a video image frame, the image feature
25 being bounded by a feature boundary and including plural
feature pixels that each have a pixel value including a
multi-bit image transparency value, the image feature
including an embedded discontinuous feature component with
a component boundary that is separate from the feature
30 boundary, the data structure comprising:

encoded binary contour representations of image
transparency boundaries of the image feature and feature
component; and

35 encoded representations of the multi-bit image
transparency values within image transparency boundaries
of the image feature and feature component.

23. A method of encoding a general arbitrary image feature in an image segment of a video image frame, the image feature being bounded by a feature boundary and including plural feature pixels that each have a pixel value, the image feature including at least one feature component with a component boundary that is separate from the feature boundary, and the image segment including the plural feature pixels and plural non-feature pixels of the image frame, the method comprising the steps:

10 (a) defining the image segment with a predetermined configuration about the image feature;

15 (b) identifying the feature boundary within the image segment and assigning a binary pixel value of a predetermined state to pixels bounded by the feature boundary to form a feature mask;

20 (c) determining a difference between the image feature and the feature mask to identify the feature component with the component boundary that is separate from the feature boundary; and

25 (d) designating the feature component as a newly designated image feature and repeating steps (a)-(c) for the newly designated image feature; and

30 (e) repeating step (d) for any feature component within the newly designated image feature.

24. The method of claim 23 further comprising encoding each designated image feature separately.


25. The method of claim 23 further comprising encoding each designated image feature with reference to its feature boundary.

30 26. The method of claim 23 in which identifying the feature boundary includes identifying a first pixel within the image segment but not within the image feature.

35 27. The method of claim 23 in which identifying the feature boundary includes identifying plural connected pixels that are within the image segment but not within the image feature.

-89-

28. A computer-readable medium having stored thereon computer-executable instructions for performing the method of claim 23.

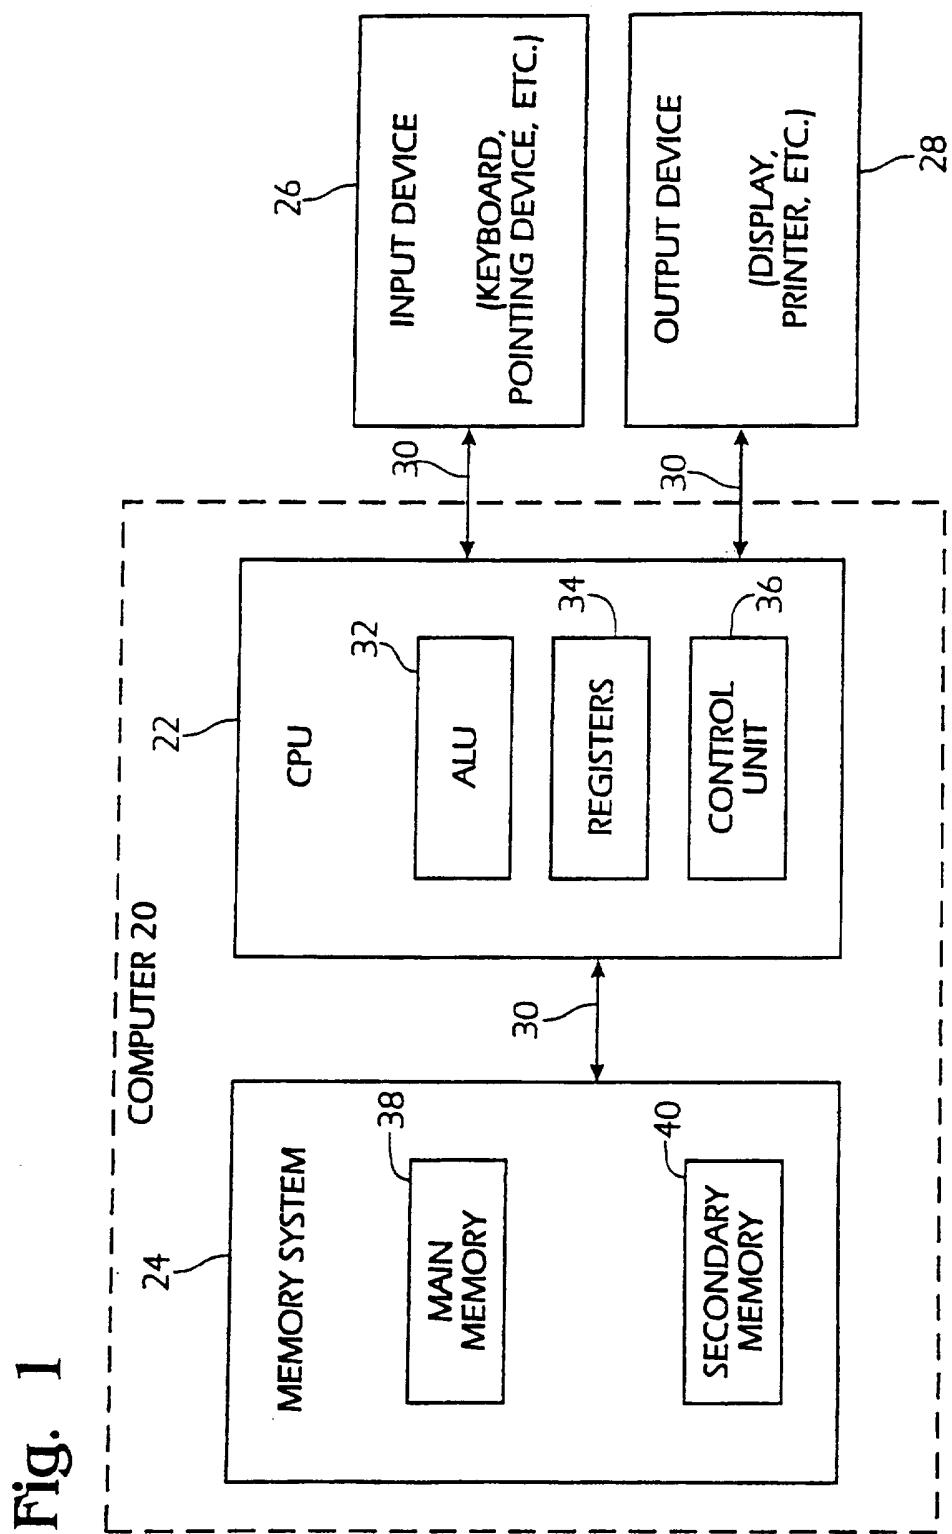

2/33

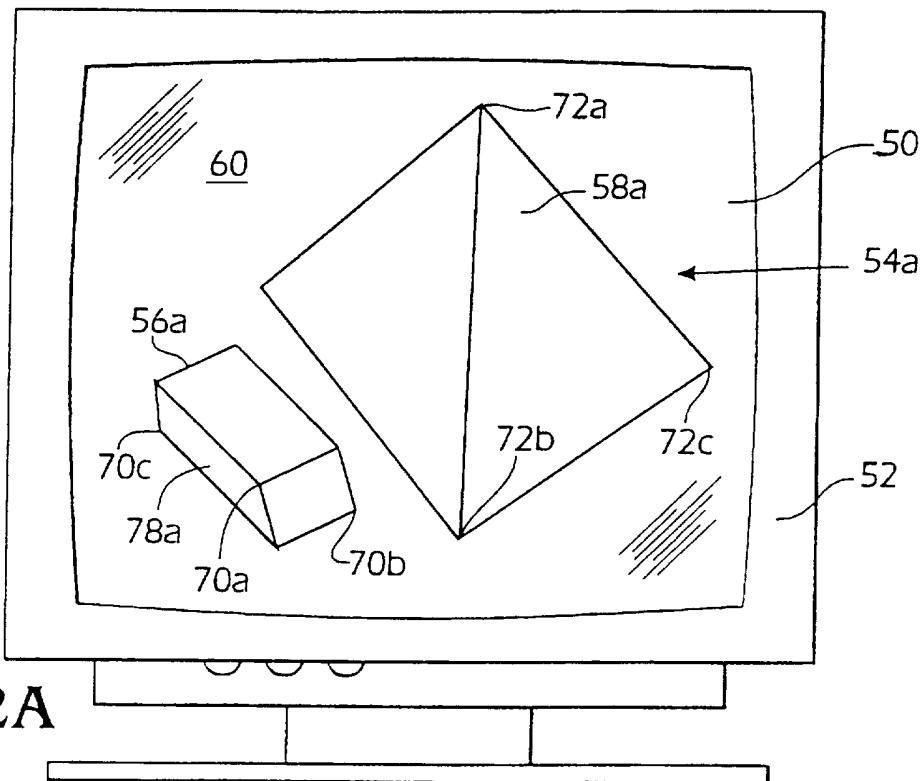


Fig. 2A

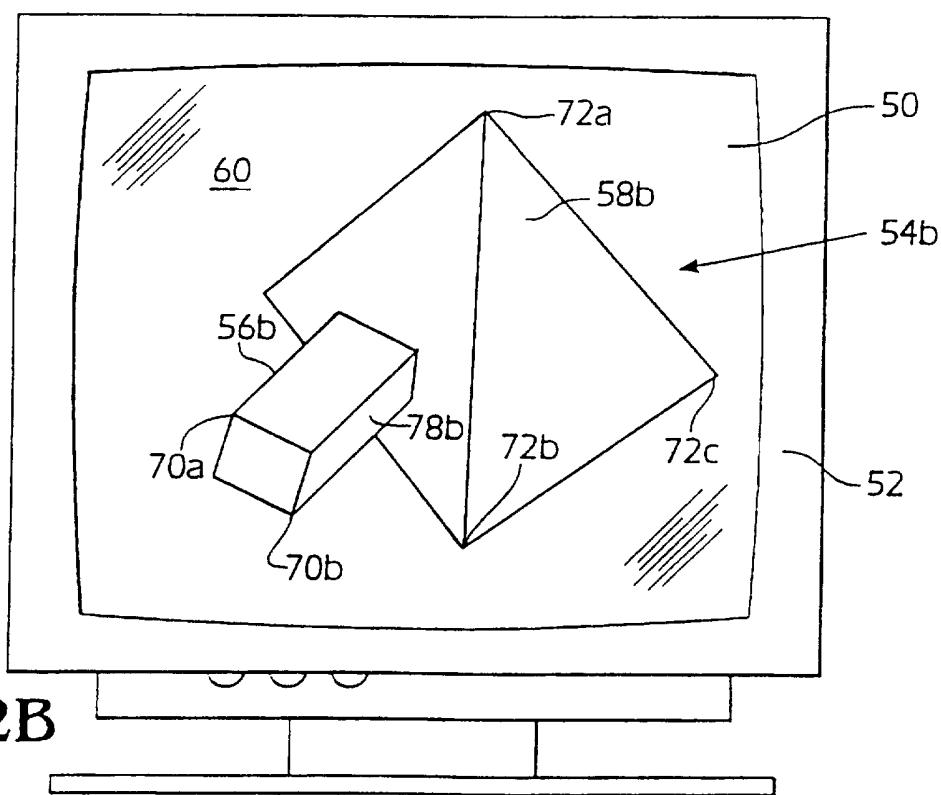


Fig. 2B


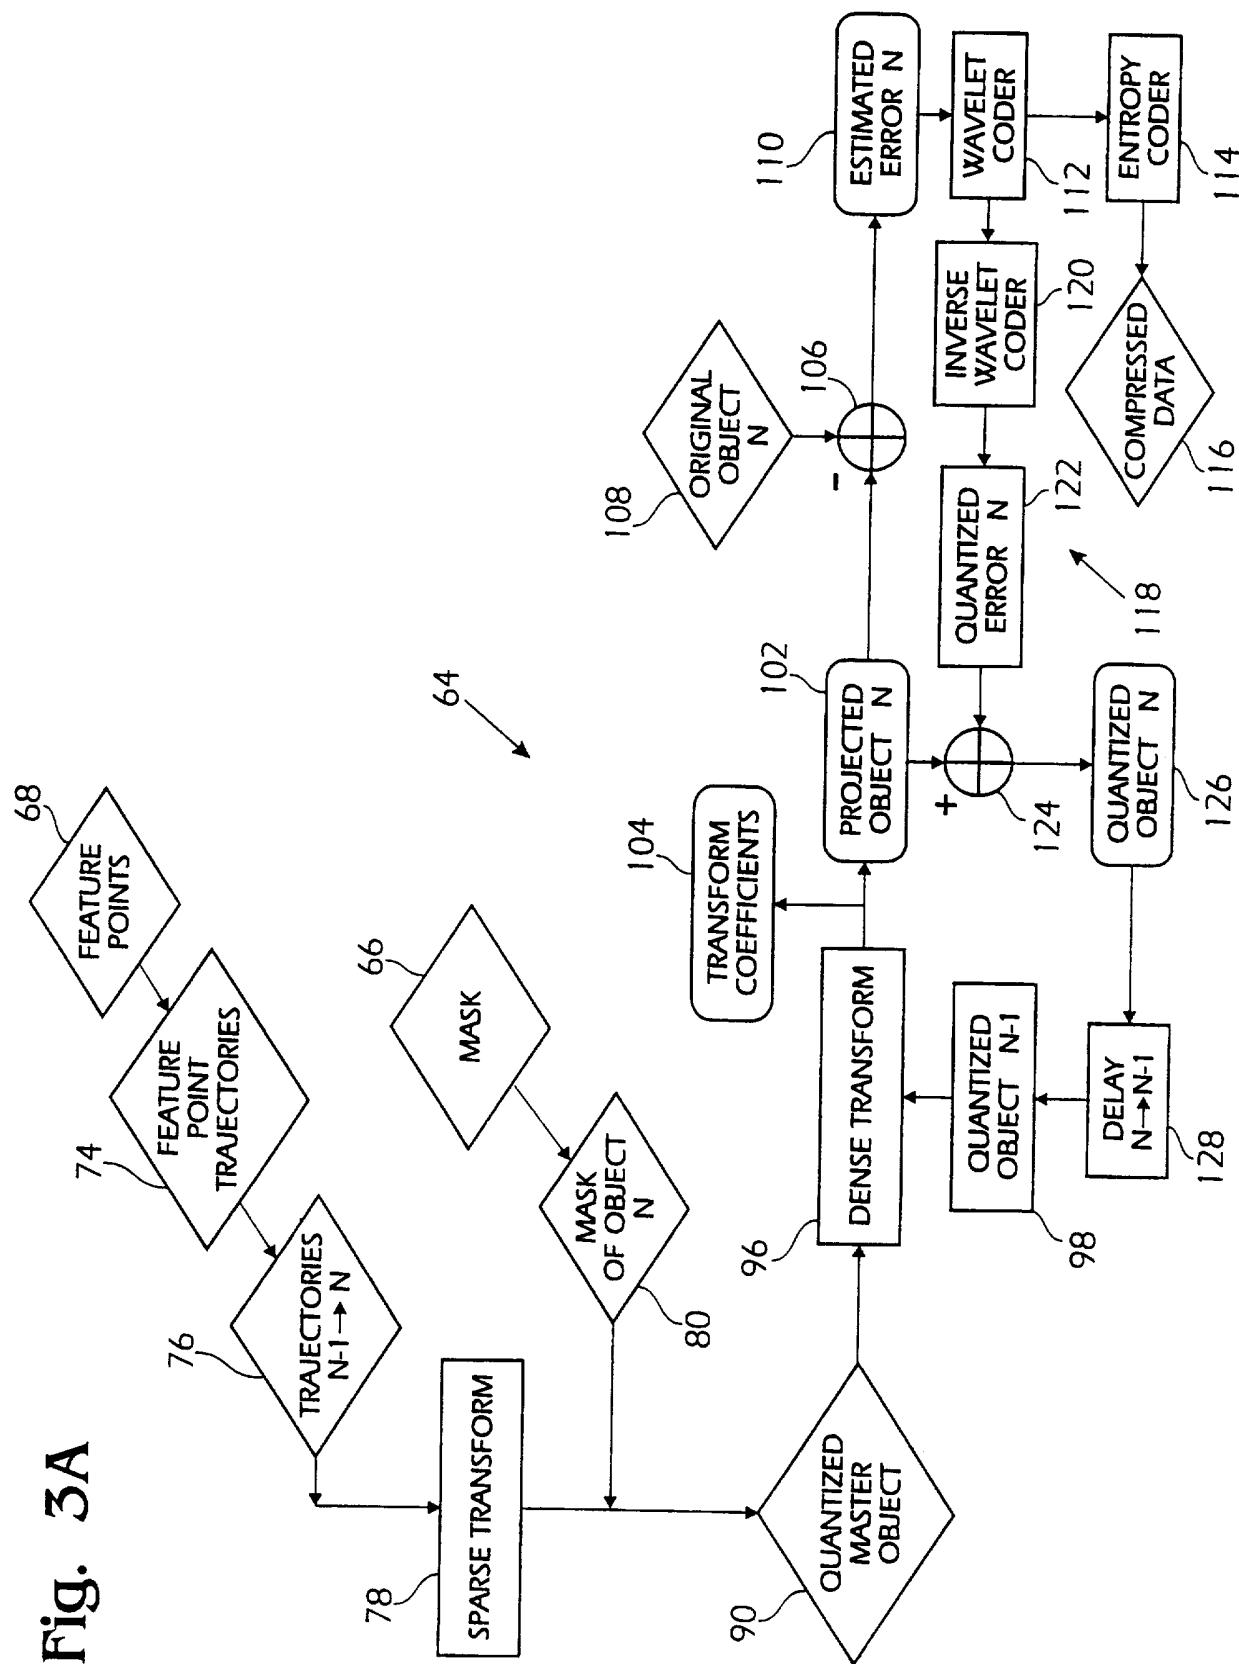


Fig. 4

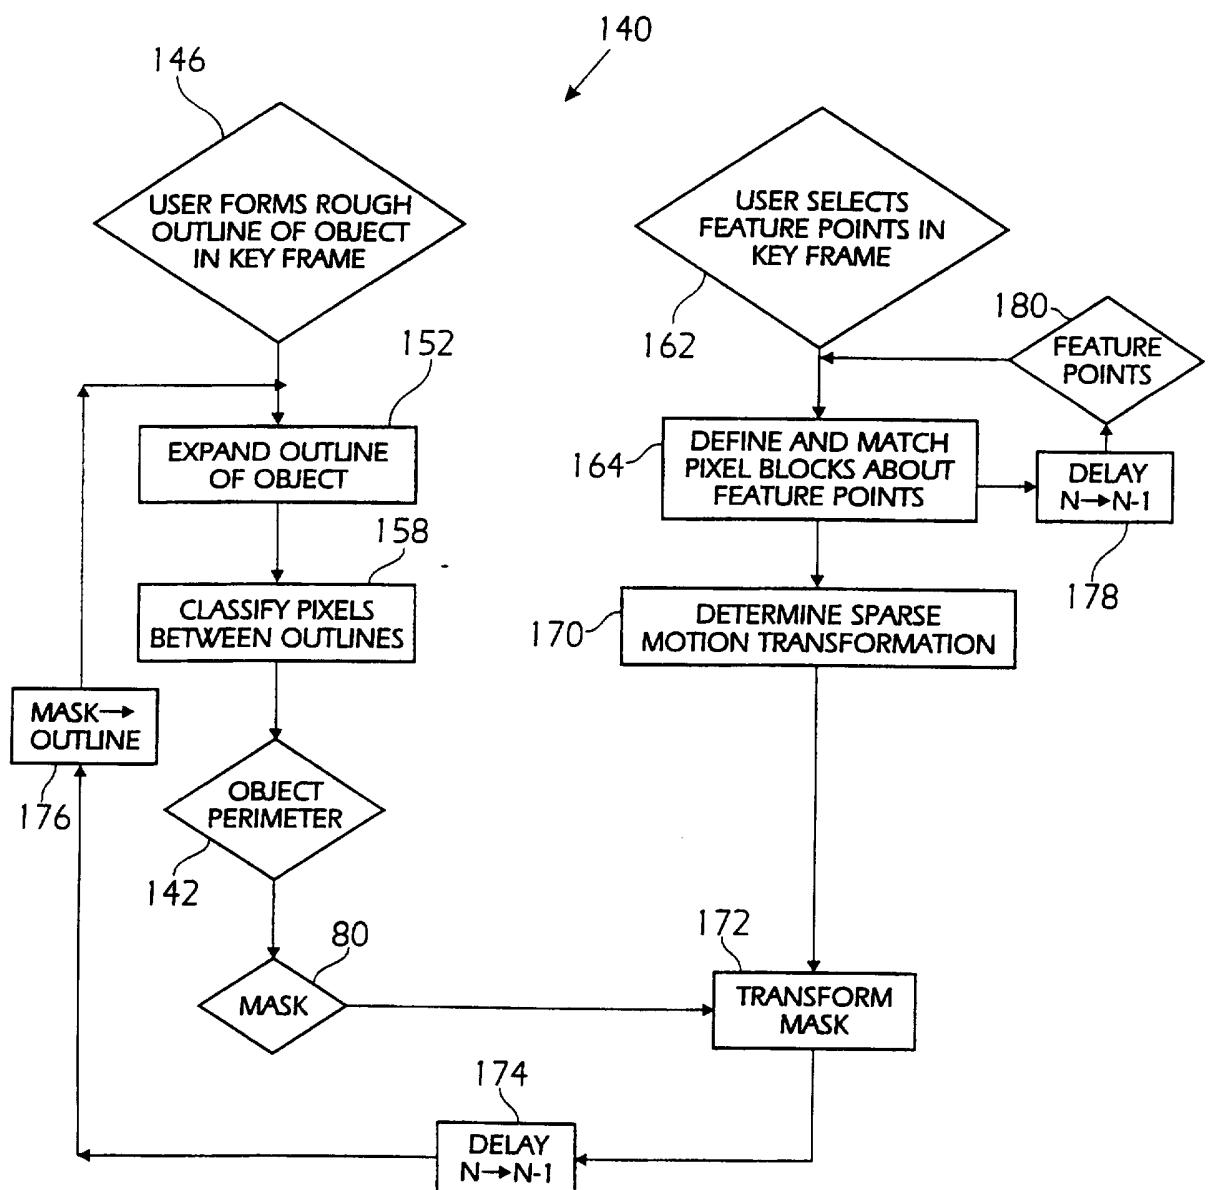

5/33

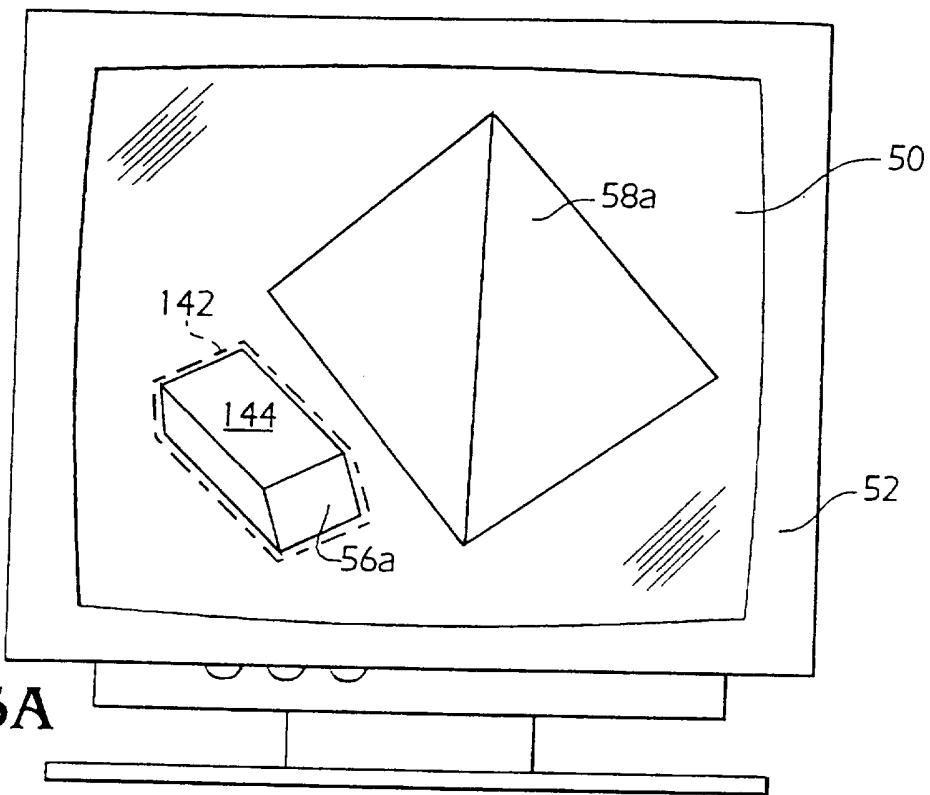


Fig. 5A

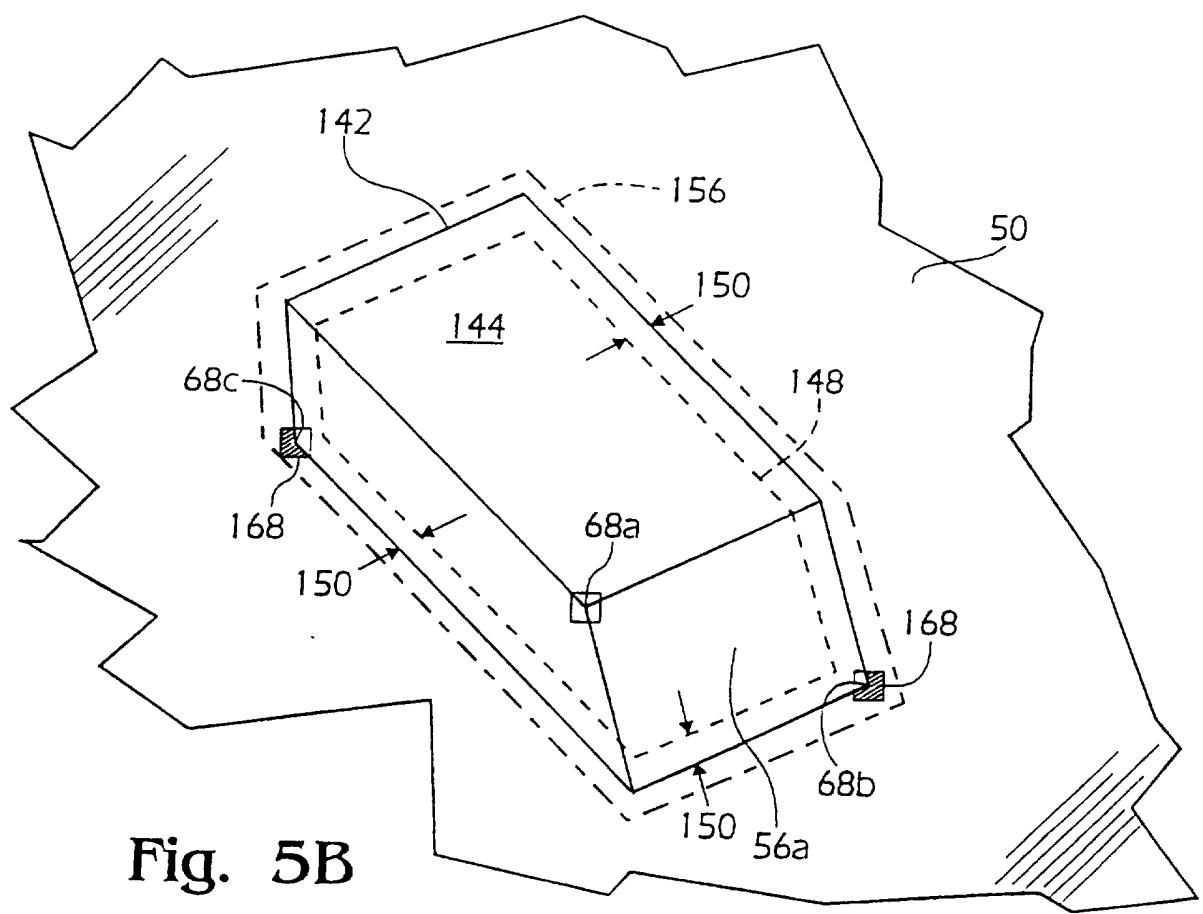


Fig. 5B



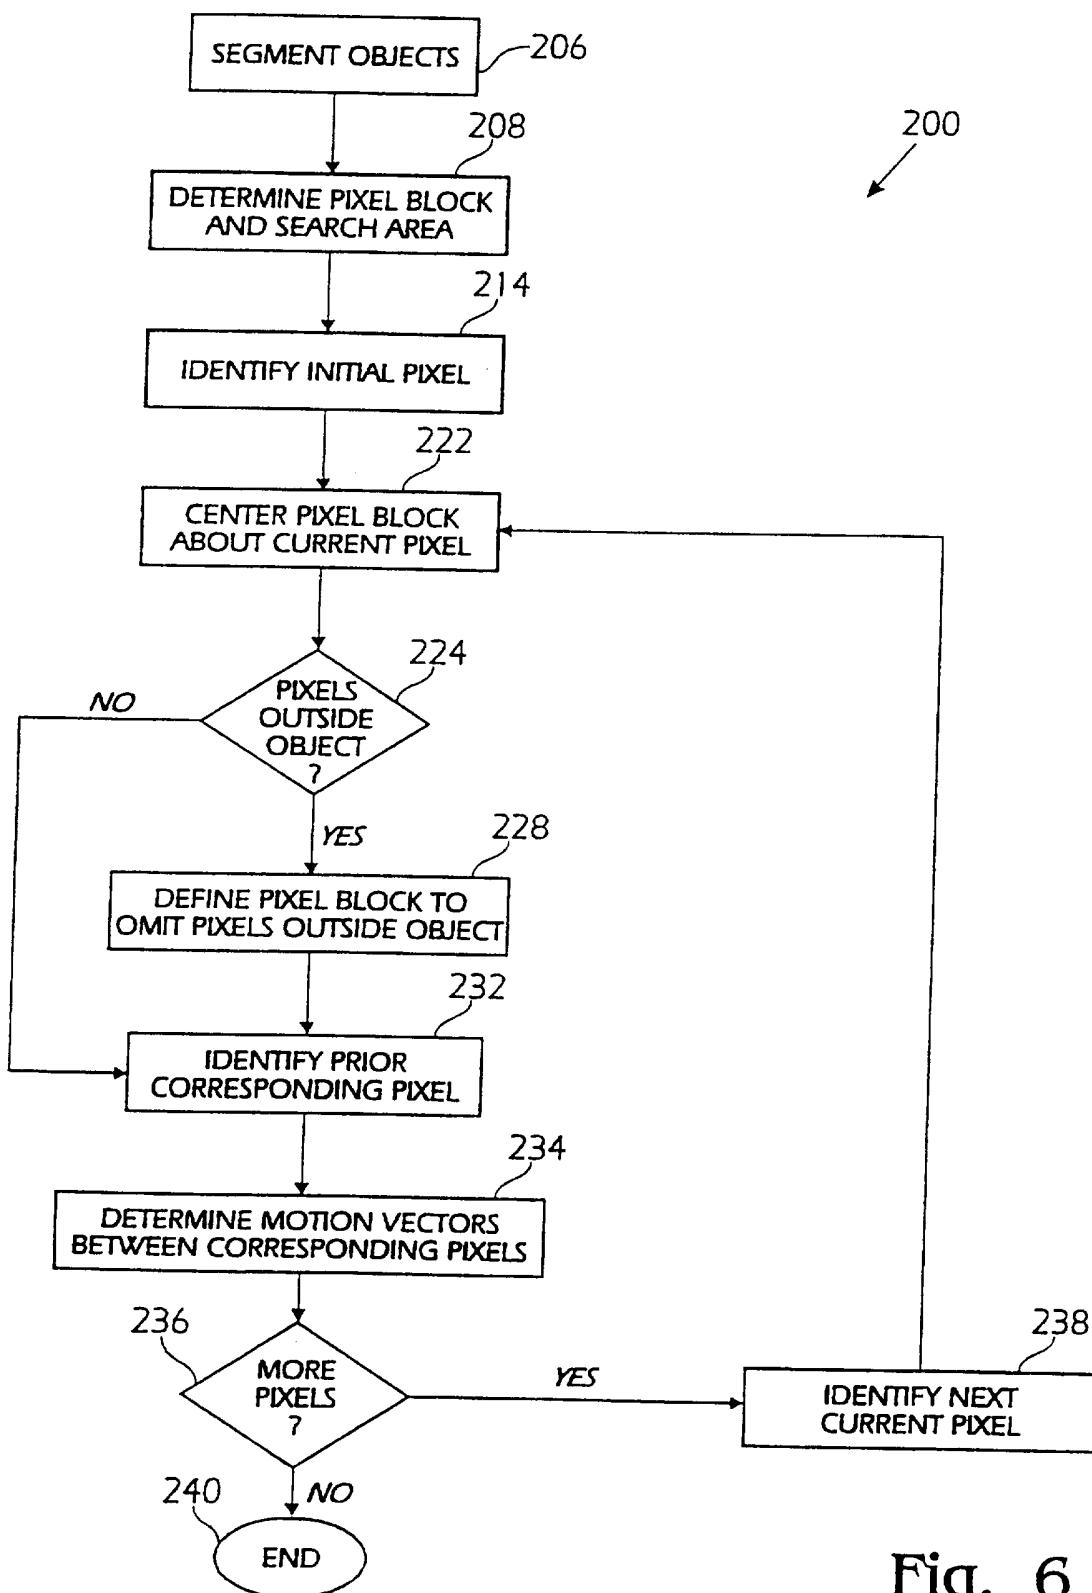


Fig. 6

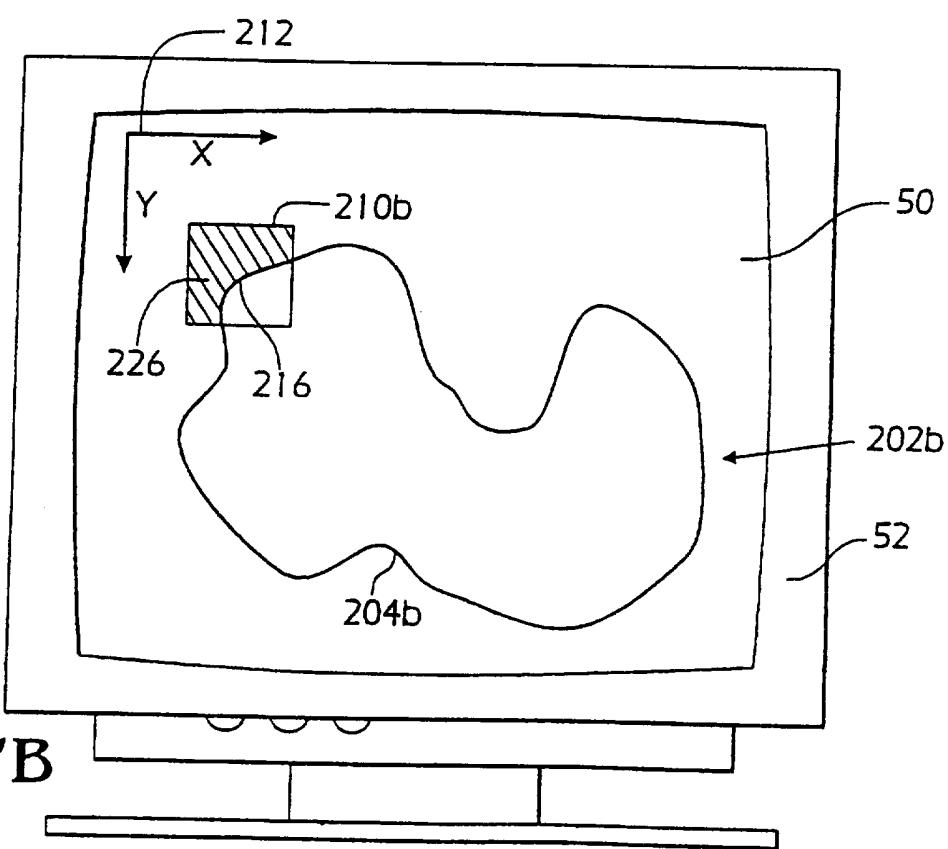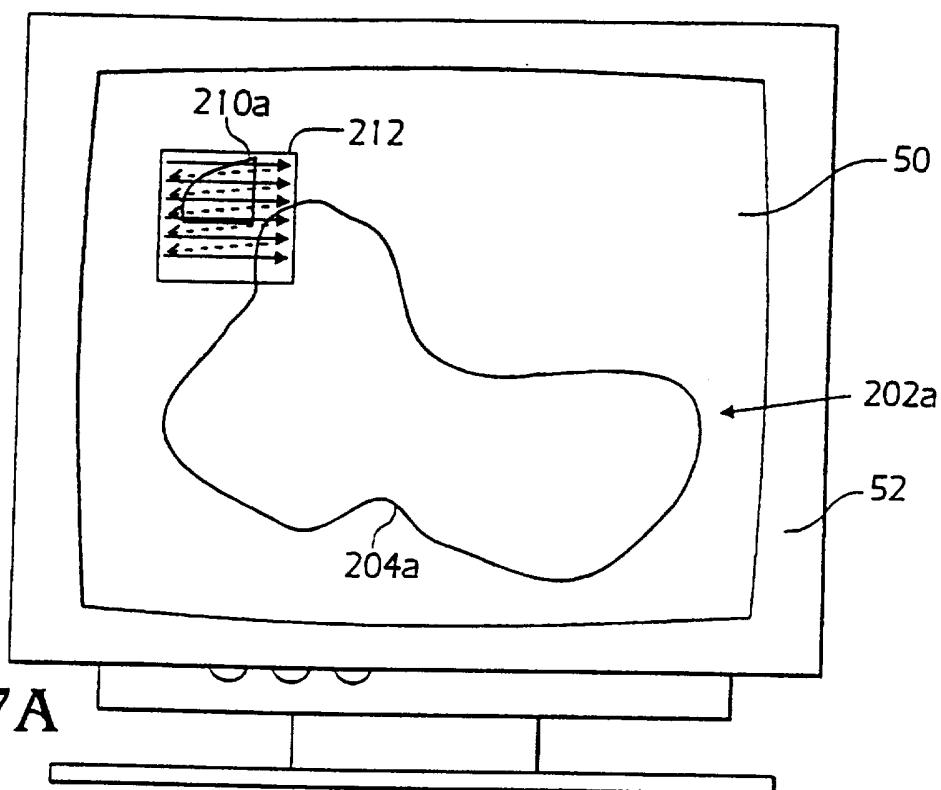

8/33

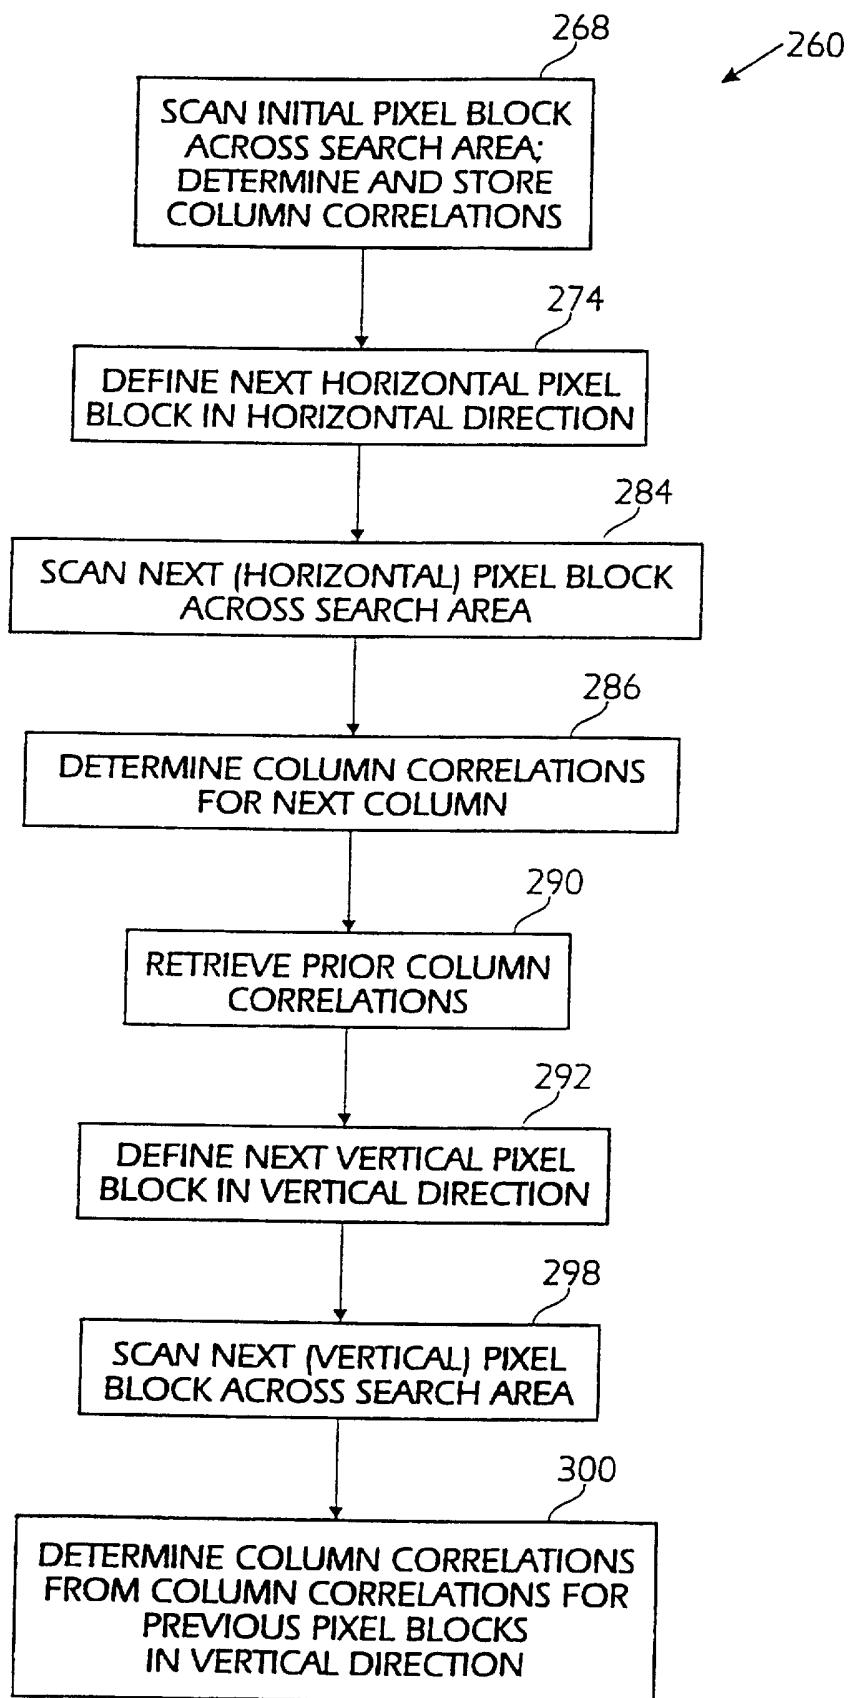


Fig. 8

Fig.9A

282 9/33

INITIAL BLOCK

A	B	C	D	E
F	G	H	I	J
K	L	M	N	O
P	Q	R	S	T
U	V	W	X	Y

264

262

Fig.9B

OBJECT

01	02	03	04	05	06	07	08	09	00	...
12	13	14	15	16	17	18	19	10	11	...
23	24	25	26	27	28	29	20	21	22	...
34	35	36	37	38	39	30	31	32	33	...
45	46	47	48	49	40	41	42	43	44	...
56	57	58	59	50	51	52	53	54	55	...
67	68	69	60	61	62	63	64	65	66	...
78	79	70	71	72	73	74	75	76	77	...
89	80	81	82	83	84	85	86	87	88	...
90	91	92	93	94	95	96	97	98	99	...

266

Fig.9C

INITIAL BLOCK SCANNING OBJECT (Step 1)

270(1)

01E	02	03	04	05	06	07	08	09	00	...
12J	13	14	15	16	17	18	19	10	11	...
23O	24	25	26	27	28	29	20	21	22	...
34T	35	36	37	38	39	30	31	32	33	...
45Y	46	47	48	49	40	41	42	43	44	...
56	57	58	59	50	51	52	53	54	55	...
67	68	69	60	61	62	63	64	65	66	...
78	79	70	71	72	73	74	75	76	77	...
89	80	81	82	83	84	85	86	87	88	...
90	91	92	93	94	95	96	97	98	99	...

266

Fig.9D

INITIAL BLOCK SCANNING OBJECT (Step 2)

270(2) 270 (3)

01D	02E	03	04	05	06	07	08	09	00	...
12I	13J	14	15	16	17	18	19	10	11	...
23N	24O	25	26	27	28	29	20	21	22	...
34S	35T	36	37	38	39	30	31	32	33	...
45X	46Y	47	48	49	40	41	42	43	44	...
56	57	58	59	50	51	52	53	54	55	...
67	68	69	60	61	62	63	64	65	66	...
78	79	70	71	72	73	74	75	76	77	...
89	80	81	82	83	84	85	86	87	88	...
90	91	92	93	94	95	96	97	98	99	...

266

10/33

INITIAL BLOCK SCANNING OBJECT (Step 5)

270(4) 270(5) 270(6) 270(7) 270(8)					06	07	08	09	00	...
01A	02B	03C	04D	05E	17	18	19	10	11	...
12F	13G	14H	15I	16J	28	29	30	21	22	...
23K	24L	25M	26N	27O	39	40	41	42	43	...
34P	35Q	36R	37S	38T	50	51	52	53	54	55
45U	46V	47W	48X	49Y	61	62	63	64	65	66
56	57	58	59	60	71	72	73	74	75	77
67	68	69	70	71	72	73	74	75	76	...
78	79	80	81	82	83	84	85	86	87	88
89	90	91	92	93	94	95	96	97	98	...
304(4)	304(5)	304(6)	304(7)	304(8)						

Fig.9E

INITIAL BLOCK SCANNING OBJECT (Step 6)

270(9) 270(10) 270(11) 270(12) 270(13)					06 E	07	08	09	00	...
01	02A	03B	04C	05D	17 J	18	19	10	11	...
12	13F	14G	15H	16I	28 O	29	30	21	22	...
23	24K	25L	26M	27N	39 T	40 Y	41	42	43	...
34	35P	36Q	37R	38S	50	51	52	53	54	55
45	46U	47V	48W	49X	61	62	63	64	65	66
56	57	58	59	60	71	72	73	74	75	77
67	68	69	70	71	72	73	74	75	76	...
78	79	80	81	82	83	84	85	86	87	88
89	90	91	92	93	94	95	96	97	98	...

Fig.9F

INITIAL BLOCK SCANNING OBJECT (Step Q+5)

270(14) 270(15) 270(16) 270(17) 270(18)					06	07	08	09	00	...
01	02	03	04	05	17	18	19	10	11	...
12A	13B	14C	15D	16E	28	29	30	21	22	...
23F	24G	25H	26I	27J	39	40	41	42	43	...
34K	35L	36M	37N	38O	50 Y	51	52	53	54	55
45P	46Q	47R	48S	49T	61	62	63	64	65	66
56U	57V	58W	59X	60 Y	71	72	73	74	75	77
67	68	69	70	71	72	73	74	75	76	...
78	79	80	81	82	83	84	85	86	87	88
89	90	91	92	93	94	95	96	97	98	...

Fig.9G

Fig. 10A

11/33
SUBSEQUENT HORIZONTAL BLOCK

B	C	D	E	U'
G	H	I	J	V'
L	M	N	O	W'
Q	R	S	T	X'
V	W	X	Y	Y'

280

276

Fig. 10B

SUBSEQUENT HORIZONTAL BLOCK SCANNING OBJECT (Step 1)
288(1)

01 U	02	03	04	05	06	07	08	09	00
12 V	13	14	15	16	17	18	19	10	11
23 W	24	25	26	27	28	29	20	21	22
34 X	35	36	37	38	39	30	31	32	33
45 Y	46	47	48	49	40	41	42	43	44
56	57	58	59	50	51	52	53	54	55
67	68	69	60	61	62	63	64	65	66
78	79	70	71	72	73	74	75	76	77
89	80	81	82	83	84	85	86	87	88
90	91	92	93	94	95	96	97	98	99

Fig. 10C

SUBSEQUENT HORIZONTAL BLOCK SCANNING OBJECT (Step 2)
270'(1) 288(2)

01 E	02 U	03	04	05	06	07	08	09	00	...
12 J	13 V	14	15	16	17	18	19	10	11	...
23 O	24 W	25	26	27	28	29	20	21	22	...
34 T	35 X	36	37	38	39	30	31	32	33	...
45 Y	46 Y	47	48	49	40	41	42	43	44	...
56	57	58	59	50	51	52	53	54	55	...
67	68	69	60	61	62	63	64	65	66	...
78	79	70	71	72	73	74	75	76	77	...
89	80	81	82	83	84	85	86	87	88	...
90	91	92	93	94	95	96	97	98	99	...

Fig. 10D

SUBSEQUENT HORIZONTAL BLOCK SCANNING OBJECT (Step 3)
270'(2) 270'(3) 288'(3)

01 D	02 E	03 U	04	05	06	07	08	09	00	...
12 I	13 J	14 V	15	16	17	18	19	10	11	...
23 N	24 O	25 W	26	27	28	29	20	21	22	...
34 S	35 T	36 X	37	38	39	30	31	32	33	...
45 X	46 Y	47 Y	48	49	40	41	42	43	44	...
56	57	58	59	50	51	52	53	54	55	...
67	68	69	60	61	62	63	64	65	66	...
78	79	70	71	72	73	74	75	76	77	...
89	80	81	82	83	84	85	86	87	88	...
90	91	92	93	94	95	96	97	98	99	...

12/33

SUBSEQUENT HORIZONTAL BLOCK SCANNING OBJECT (Step 6)
 270'(5) 270'(6) 270'(7) 270'(8) 288(4)

01	02 B	03 C	04 D	05 E	06 U'	07	08	09	00	...
12	13 G	14 H	15 I	16 J	17 V'	18	19	10	11	...
23	24 L	25 M	26 N	27 O	28 W'	29	20	21	22	...
34	35 Q	36 R	37 S	38 T	39 X'	30	31	32	33	...
45	46 V	47 W	48 X	49 Y	40 Y'	41	42	43	44	...
56	57	58	59	50	51	52	53	54	55	...
67	68	69	60	61	62	63	64	65	66	...
78	79	70	71	72	73	74	75	76	77	...
89	80	81	82	83	84	85	86	87	88	...
90	91	92	93	94	95	96	97	98	99	...

Fig. 10E

SUBSEQUENT HORIZONTAL BLOCK SCANNING OBJECT (Step Q+6)
 270'(15) 270'(16) 270'(17) 270'(18) 288(5)

01	02	03	04	05	06	07	08	09	00	...
12	13 B	14 C	15 D	16 E	17 U'	18	19	10	11	...
23	24 G	25 H	26 I	27 J	28 V'	29	20	21	22	...
34	35 L	36 M	37 N	38 O	39 W'	30	31	32	33	...
45	46 Q	47 R	48 S	49 T	40 X'	41	42	43	44	...
56	57 V	58 W	59 X	50 Y	51 Y'	52	53	54	55	...
67	68	69	60	61	62	63	64	65	66	...
78	79	70	71	72	73	74	75	76	77	...
89	80	81	82	83	84	85	86	87	88	...
90	91	92	93	94	95	96	97	98	99	...

Fig. 10F

13/33

Fig. 11A

SUBSEQUENT VERTICAL BLOCK									
F	G	H	I	J					
K	L	M	N	O					
P	Q	R	S	T					
U	V	W	X	Y					
A'	B'	C'	D'	E'					
296									

294

Fig. 11B

INITIAL BLOCK SCANNING OBJECT (Step Q+1)

302(1)

01	02	03	04	05	06	07	08	09	00
12 J	13	14	15	16	17	18	19	10	11
23 O	24	25	26	27	28	29	20	21	22
34 T	35	36	37	38	39	30	31	32	33
45 Y	46	47	48	49	40	41	42	43	44
56 E'	57	58	59	50	51	52	53	54	55
67	68	69	60	61	62	63	64	65	66
78	79	70	71	72	73	74	75	76	77
89	80	81	82	83	84	85	86	87	88
90	91	92	93	94	95	96	97	98	99

...
...
...
...
...
...
...
...
...

Fig. 11C

INITIAL BLOCK SCANNING OBJECT (Step Q+2)

302(2) 302(3)

01	02	03	04	05	06	07	08	09	00
12 I	13 J	14	15	16	17	18	19	10	11
23 N	24 O	25	26	27	28	29	20	21	22
34 S	35 T	36	37	38	39	30	31	32	33
45 X	46 Y	47	48	49	40	41	42	43	44
56 D'	57 E'	58	59	50	51	52	53	54	55
67	68	69	60	61	62	63	64	65	66
78	79	70	71	72	73	74	75	76	77
89	80	81	82	83	84	85	86	87	88
90	91	92	93	94	95	96	97	98	99

...
...
...
...
...
...
...
...
...

Fig. 11D

INITIAL BLOCK SCANNING OBJECT (Step Q+5)

302(4) 302(5) 302(6) 302(7) 302(8)

01	02	03	04	05	06	07	08	09	00
12 F	13 G	14 H	15 I	16 J	17	18	19	10	11
23 K	24 L	25 M	26 N	27 O	28	29	20	21	22
34 P	35 Q	36 R	37 S	38 T	39	30	31	32	33
45 U	46 V	47 W	48 X	49 Y	40	41	42	43	44
56 A'	57 B'	58 C'	59 D'	50 E'	51	52	53	54	55
67	68	69	60	61	62	63	64	65	66
78	79	70	71	72	73	74	75	76	77
89	80	81	82	83	84	85	86	87	88
90	91	92	93	94	95	96	97	98	99

...
...
...
...
...
...
...
...
...

304'(4) 304'(5) 304'(6) 304'(7) 304'(8)

INITIAL BLOCK SCANNING OBJECT (Step Q+6)

		302(9)		302(10)		302(11)		302(12)		302(13)			
01	02	03	04	05	06	07	08	09	00	09	00
12	13 F	14 G	15 H	16 O	17 J	18	19	10	11	10	11
23	24 K	25 L	26 M	27 N	28 O	29	20	21	22	20	21
34	35 P	36 Q	37 R	38 S	39 T	30	31	32	33	31	32
45	46 U	47 V	48 W	49 X	40 Y	41	42	43	44	42	43
56	57 A'	58 B'	59 C'	50 D'	51 E'	52	53	54	55	52	53
67	68	69	60	61	62	63	64	65	66	63	64
78	79	70	71	72	73	74	75	76	77	74	75
89	80	81	82	83	84	85	86	87	88	85	86
90	91	92	93	94	95	96	97	98	99	95	96

Fig. 11E

INITIAL BLOCK SCANNING OBJECT (Step 2Q+5)

		302(14)		302(15)		302(16)		302(17)		302(18)			
05	02	03	04			06	07	08	09	00	09	00	...
10	13	14	15			17	18	19	10	11	10	11	...
23 F	24 G	25 H	26 I			J	28	29	20	21	20	21	...
38 K	35 L	36 M	37 N			O	39	30	31	32	31	32	...
49 P	46 Q	47 R	48 S			T	40	41	42	43	42	43	...
50 U	57 V	58 W	59 X			Y	51	52	53	54	52	53	...
61 A'	68 B'	69 C'	60 D'			E'	62	63	64	65	62	63	...
78	79	70	71				73	74	75	76	73	74	...
89	80	81	82				84	85	86	87	84	85	...
90	91	92	93				95	96	97	98	95	96	...

Fig. 11F

15/33

Fig. 12

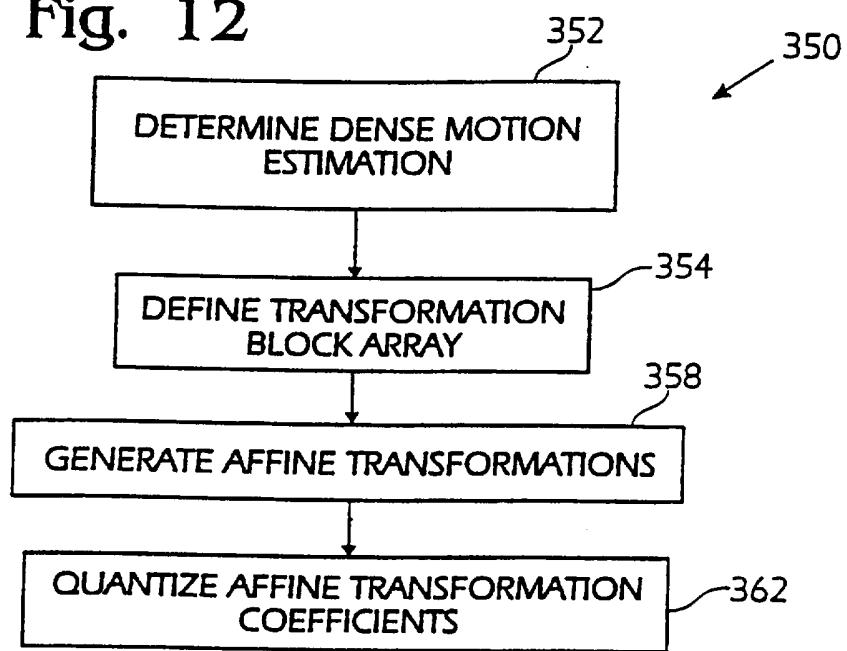
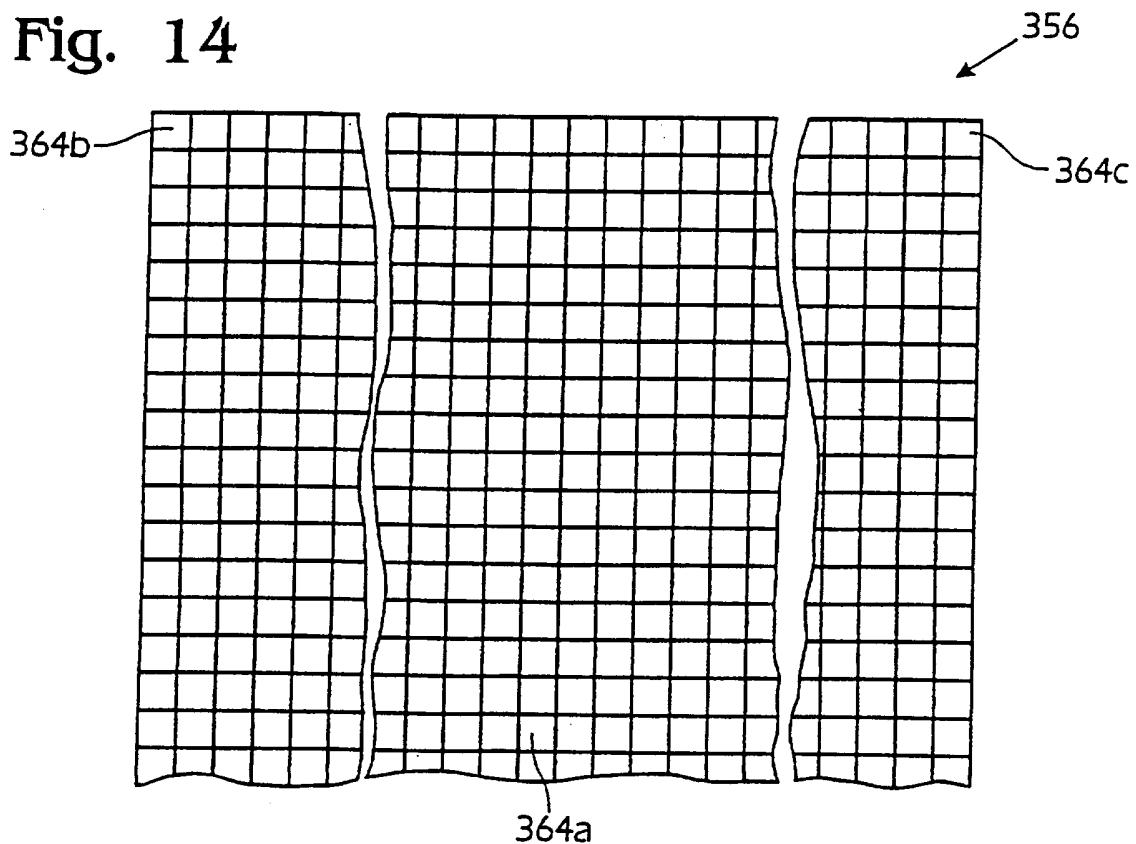


Fig. 14



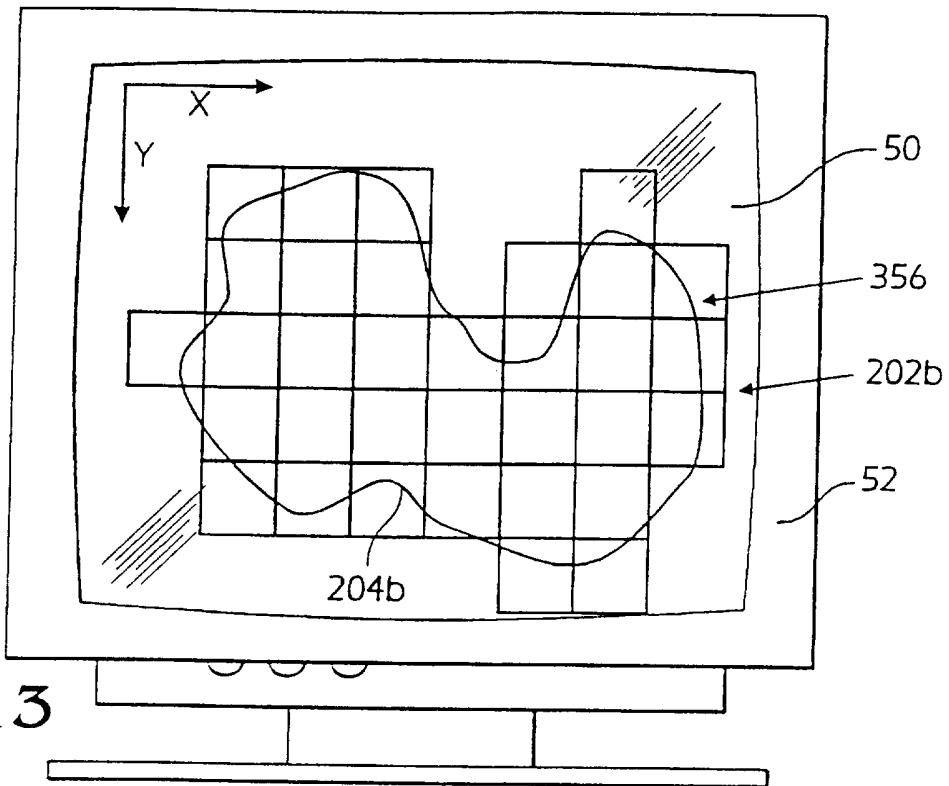


Fig. 13

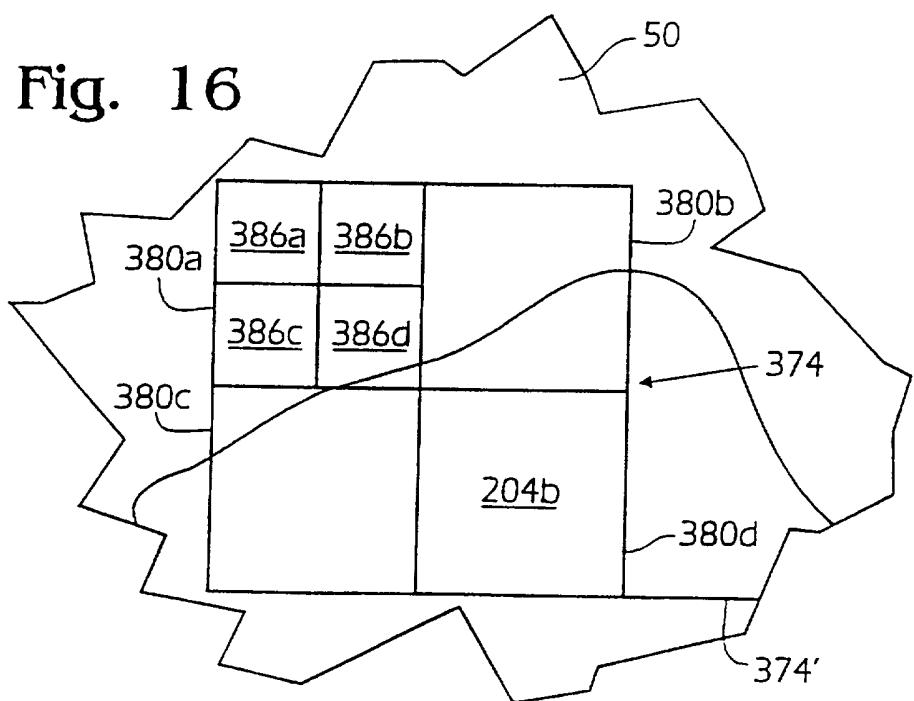


Fig. 16

SUBSTITUTE SHEET (RULE 26)

Fig. 15

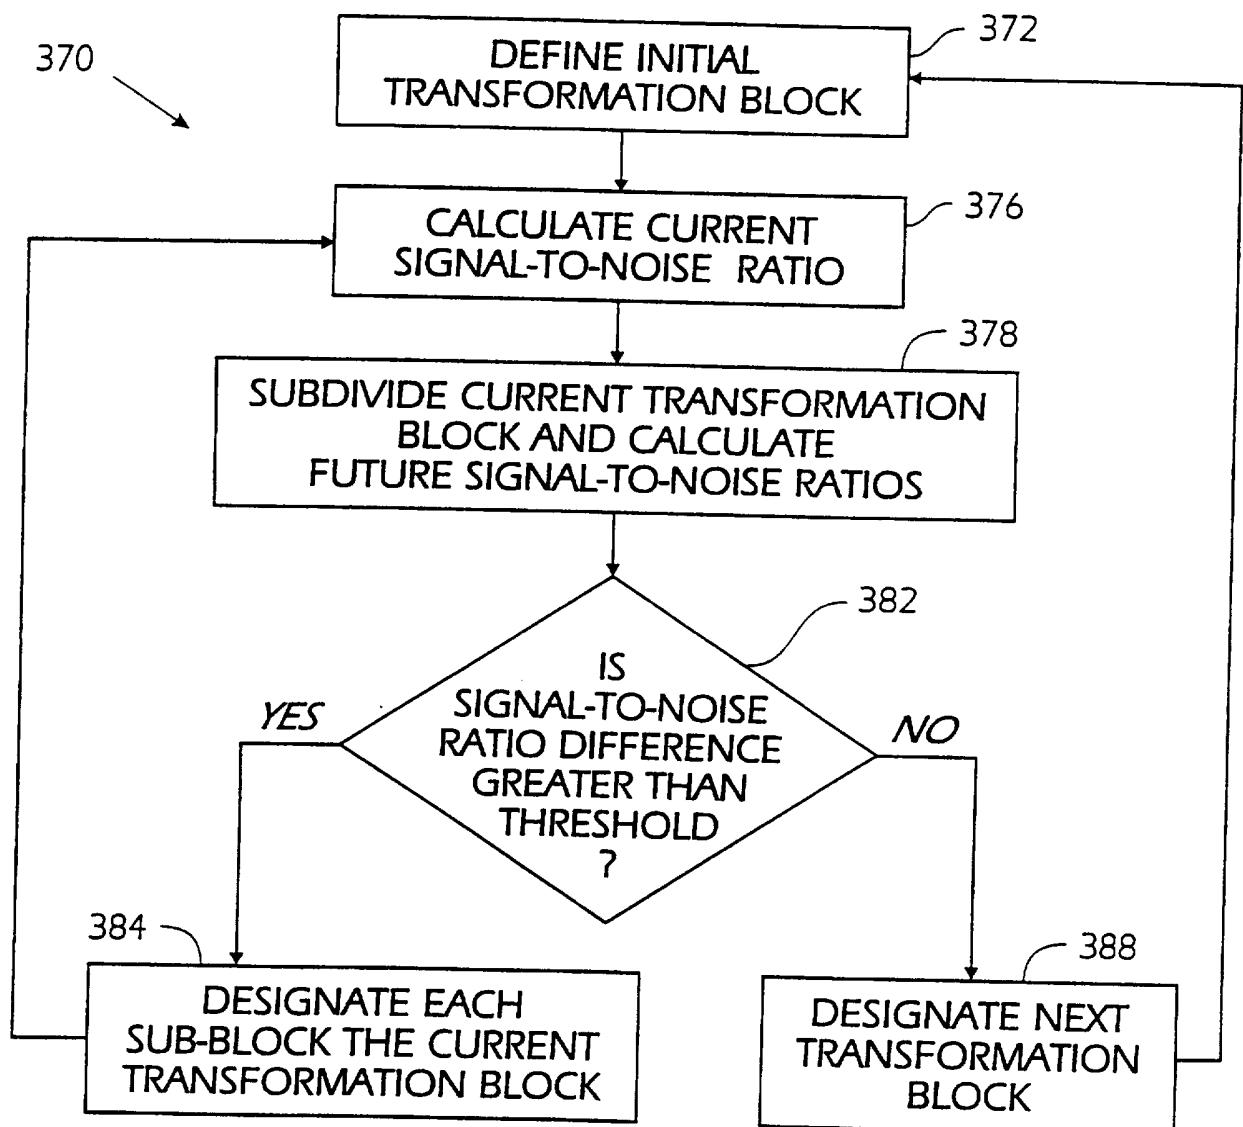
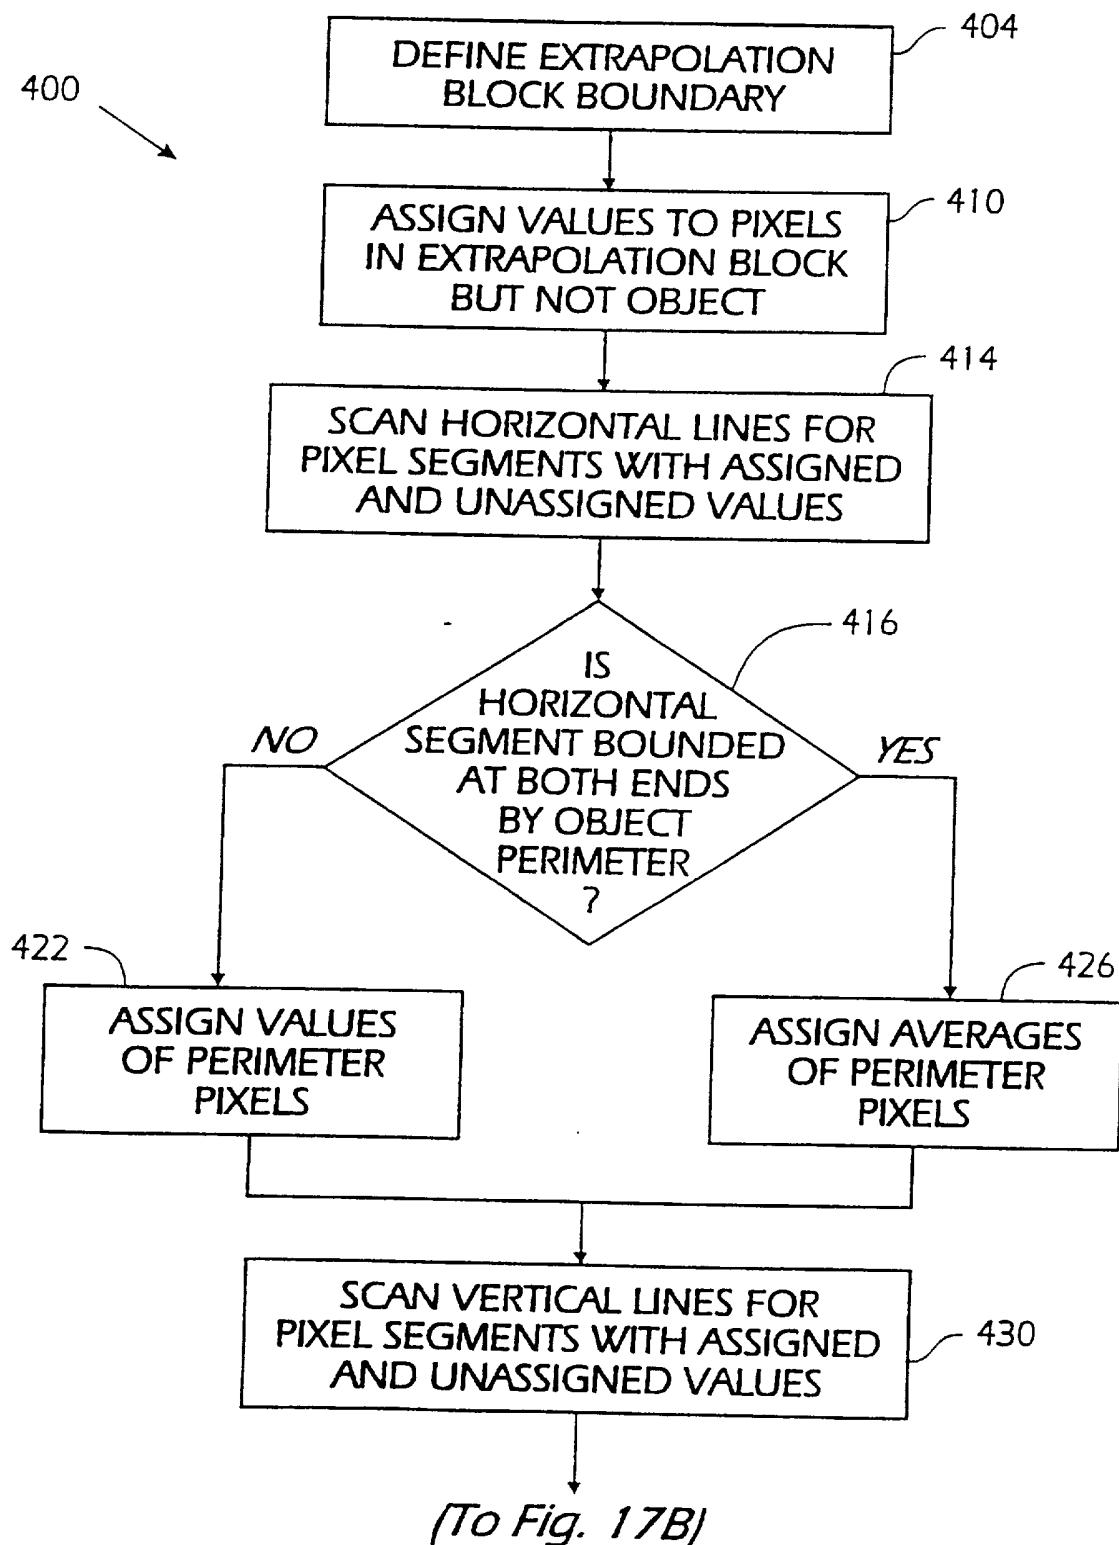


Fig. 17A



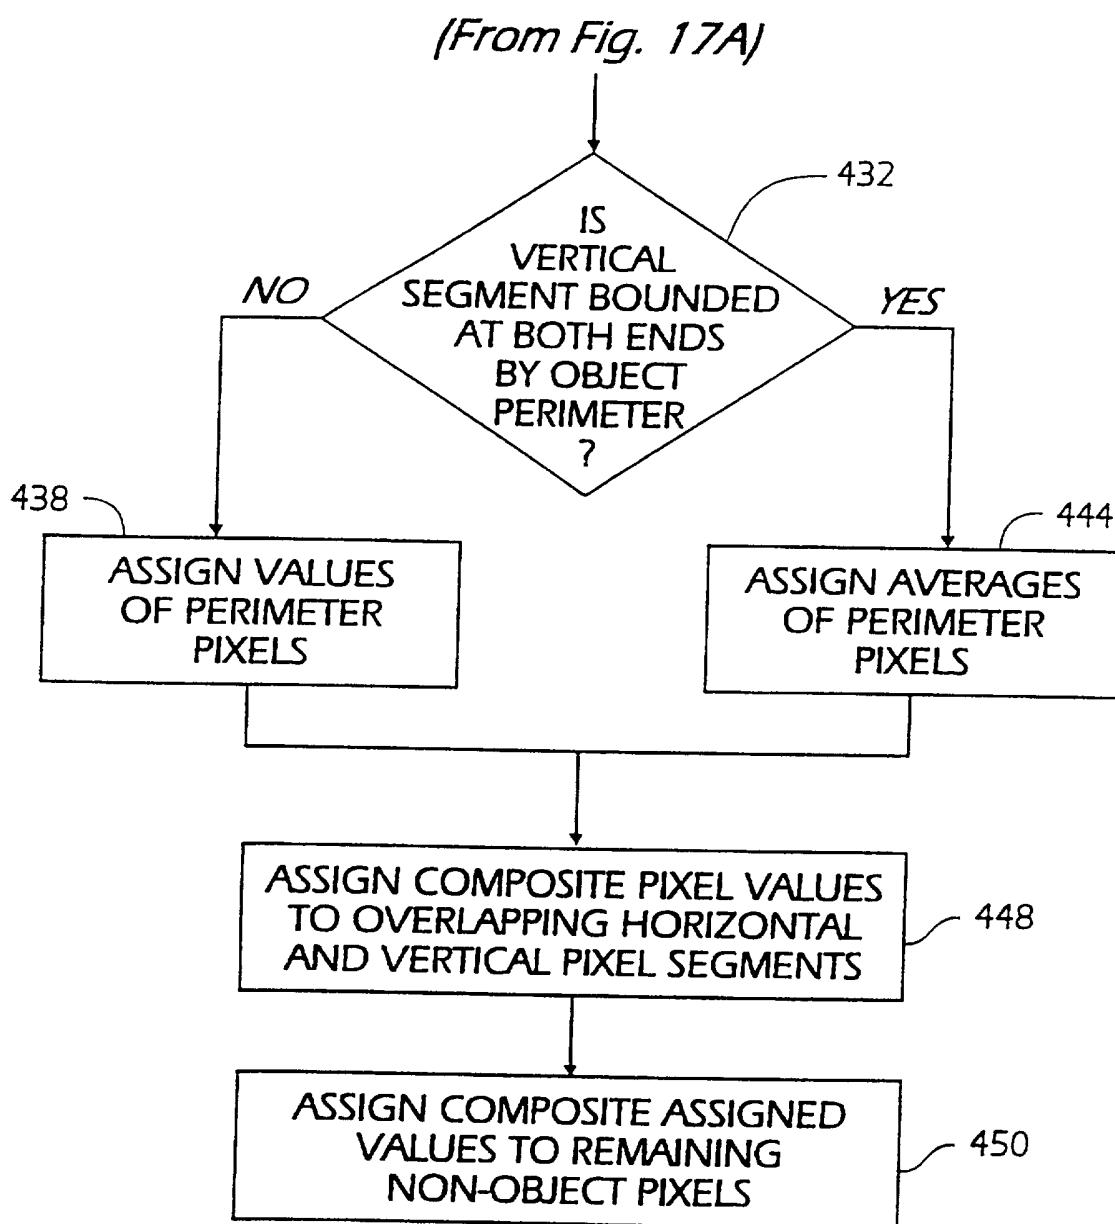


Fig. 17B

20/33

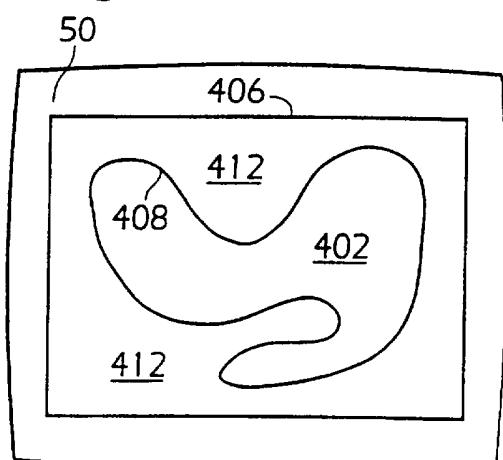
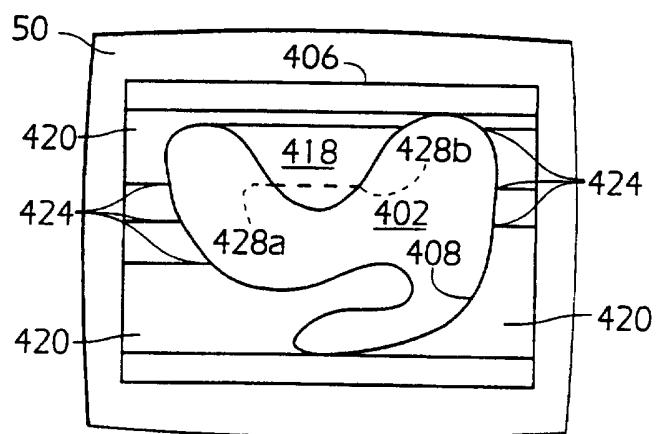
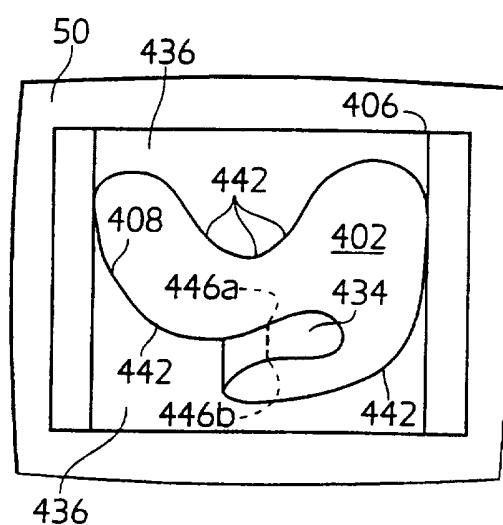
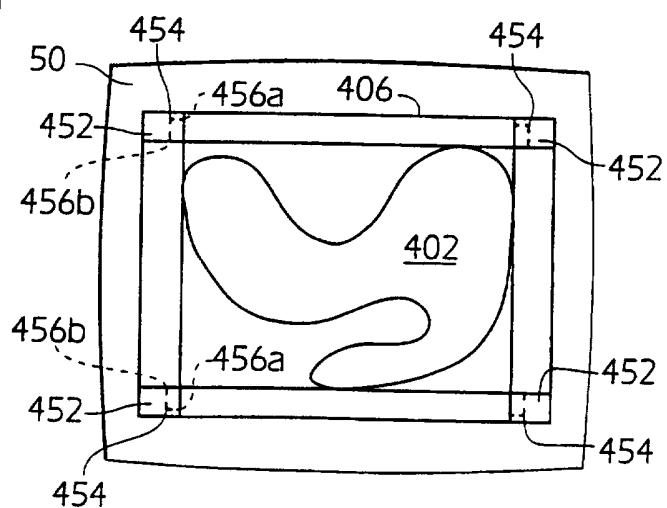
Fig. 18A**Fig. 18B****Fig. 18C****Fig. 18D**

Fig. 19A


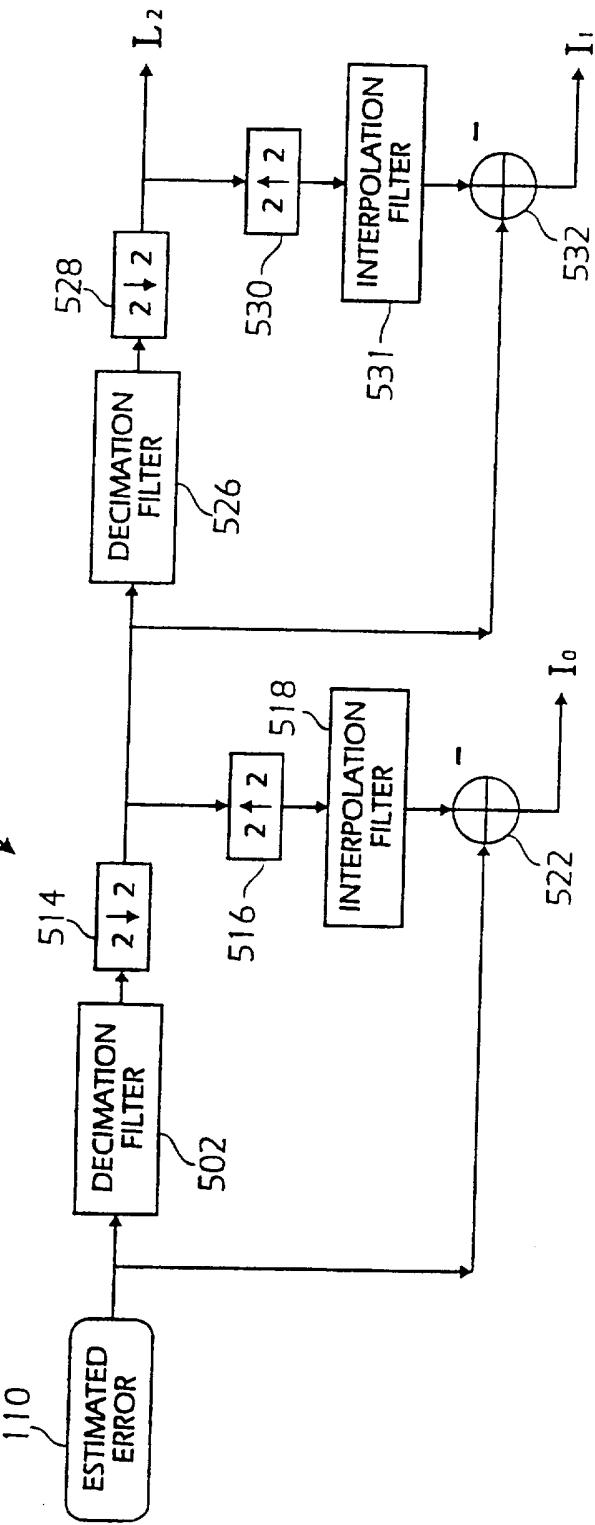


Fig. 19B

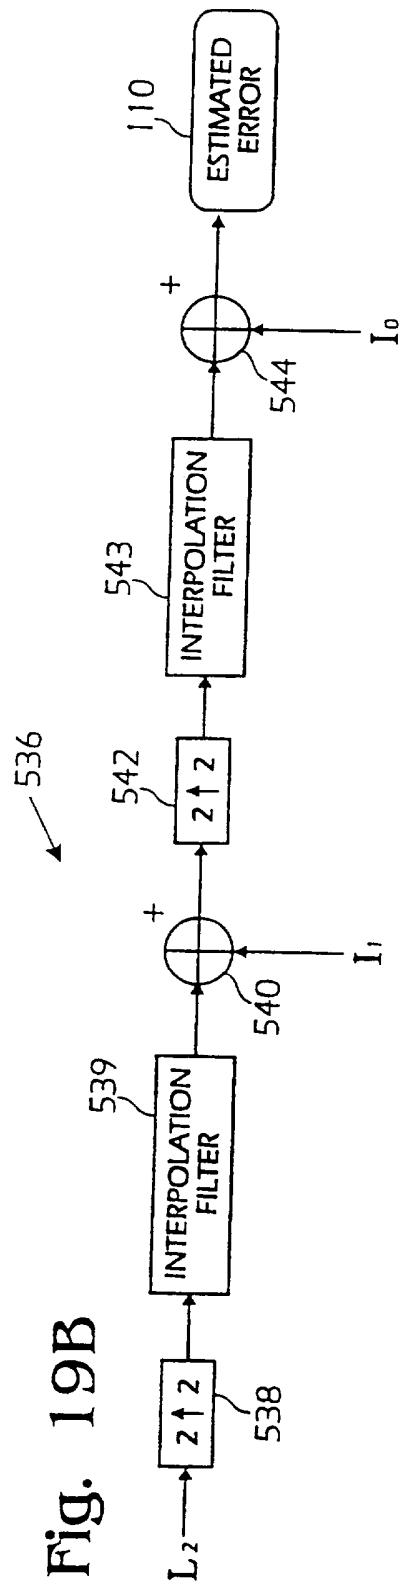

22/33

Fig. 3B

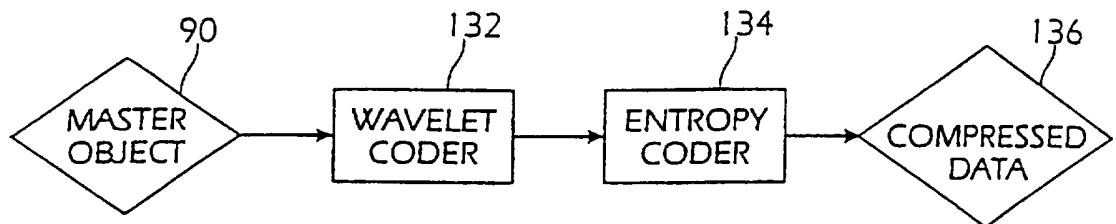


Fig. 23B

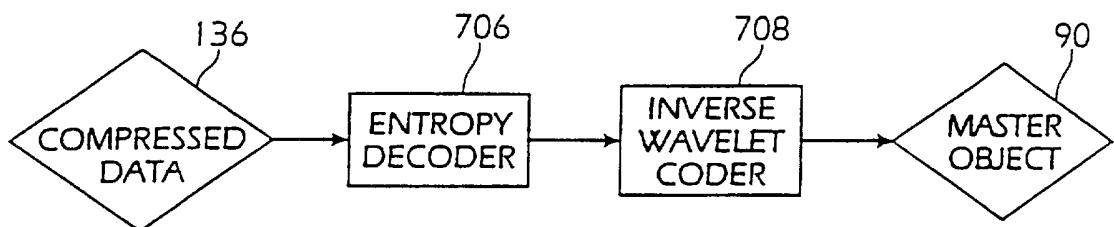


Fig. 20A

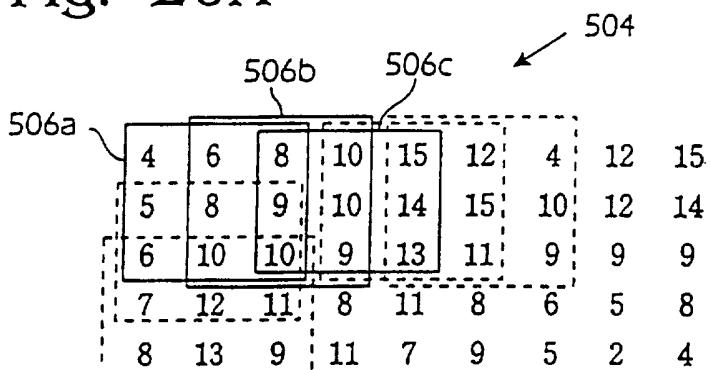


Fig. 20C




Fig. 20B

8	9	10	12	12
9	10	10	11	11
10	10	10	9	9

Fig. 20D

8	9	10	11	12
9	9	10	10	10.5
10	10	10	9.5	9

Fig. 21



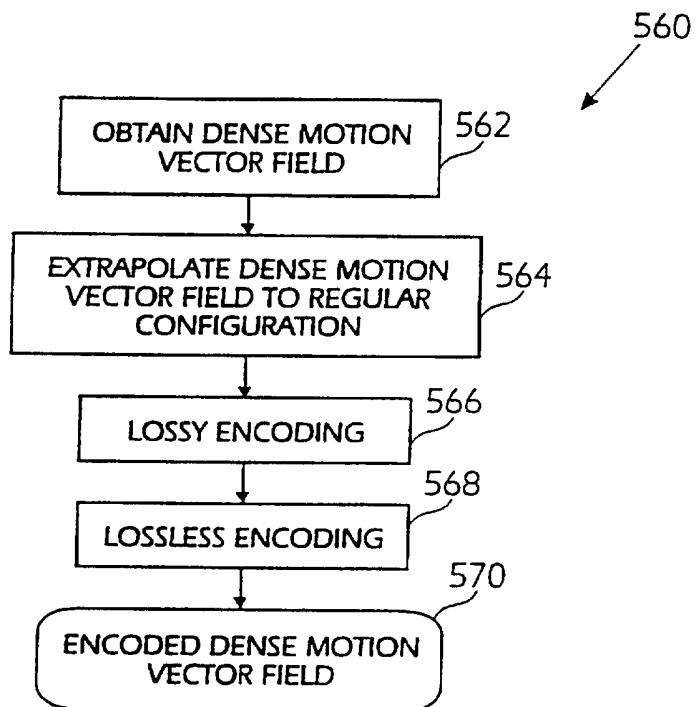


Fig. 22

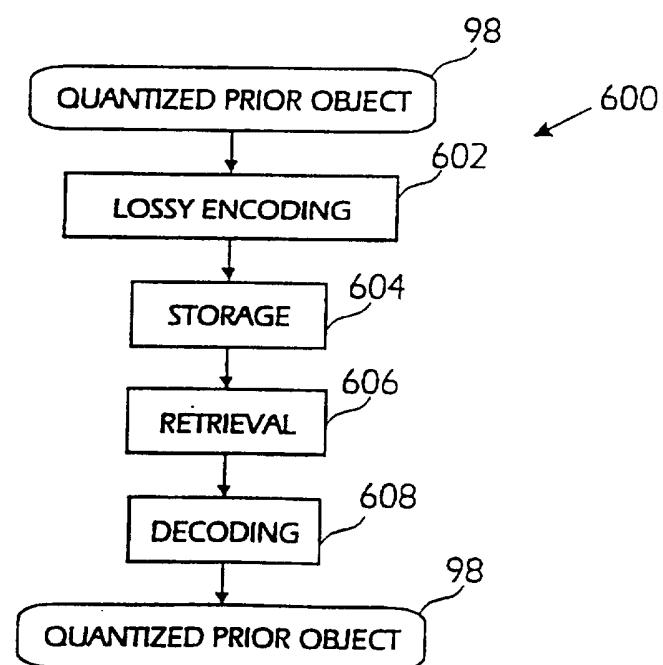

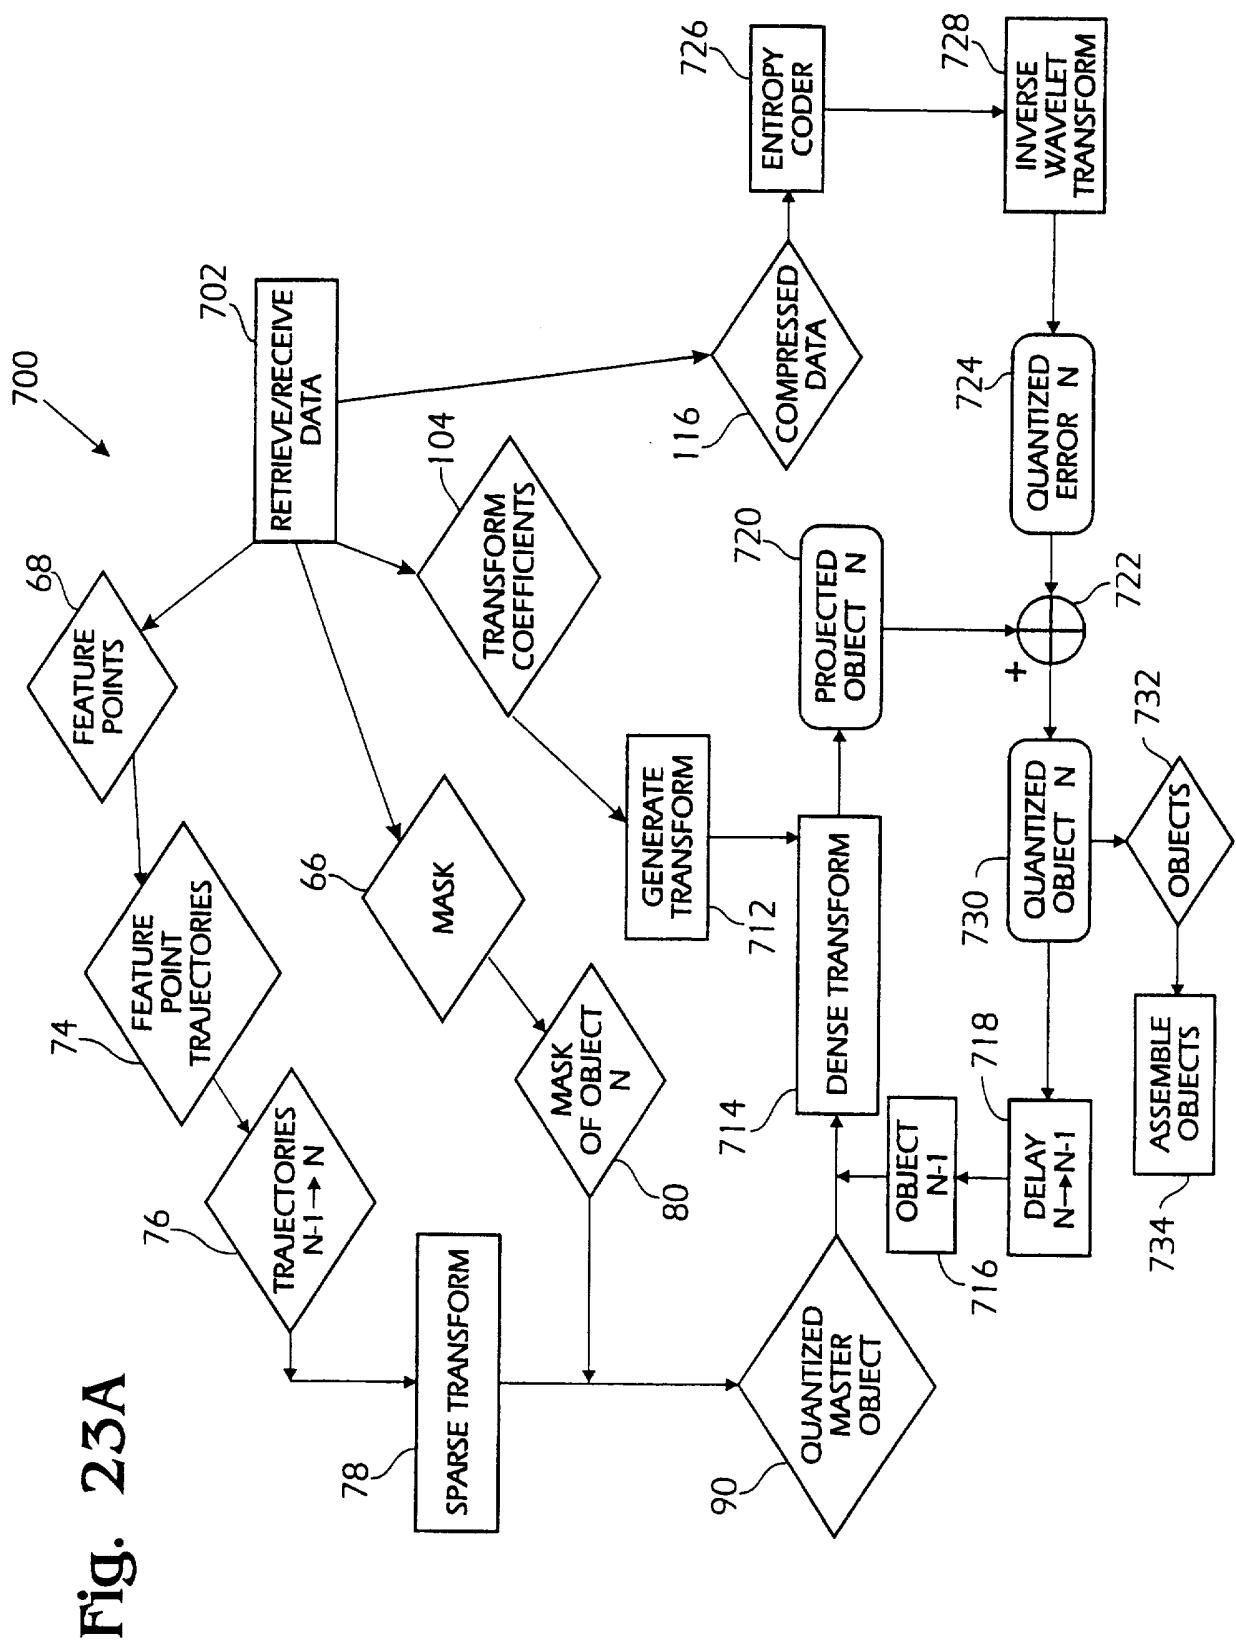

25/33

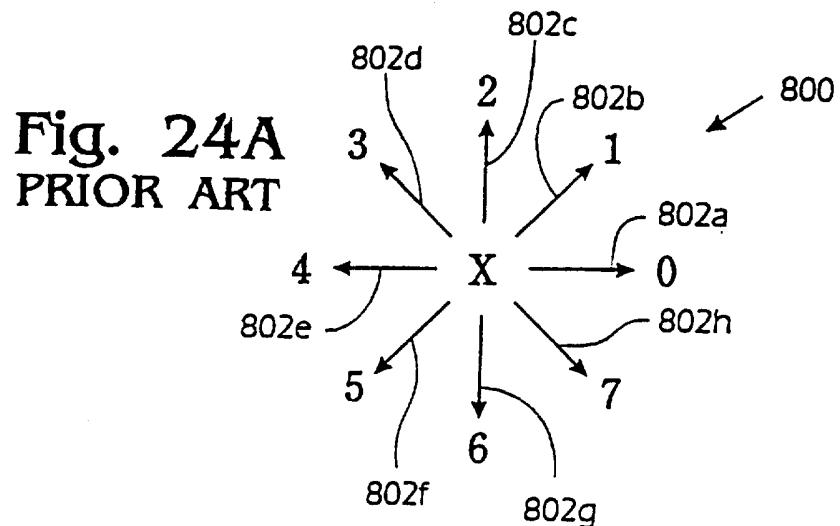


Fig. 24B
PRIOR ART


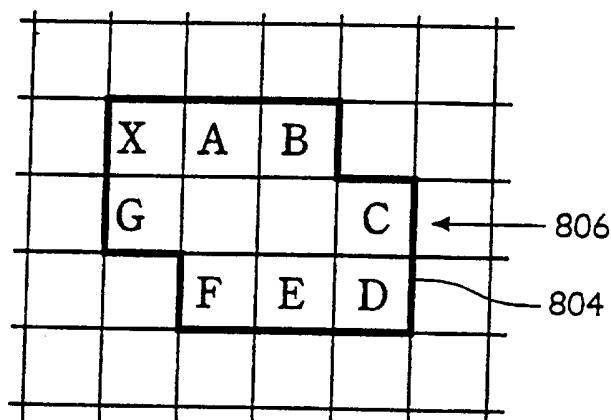



Fig. 25B

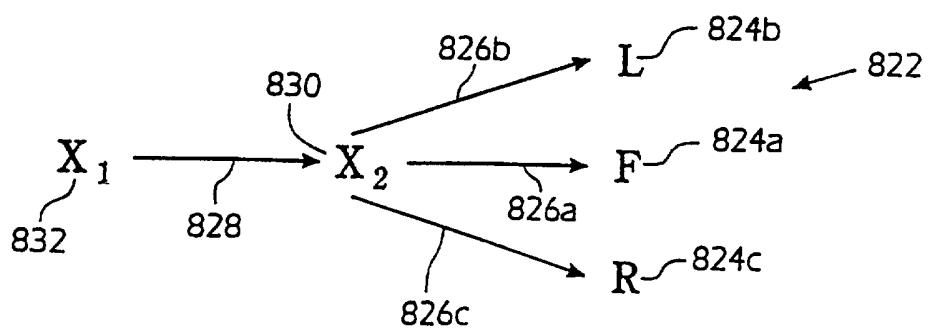

SUBSTITUTE SHEET (RULE 26)


26/33

Fig. 25A

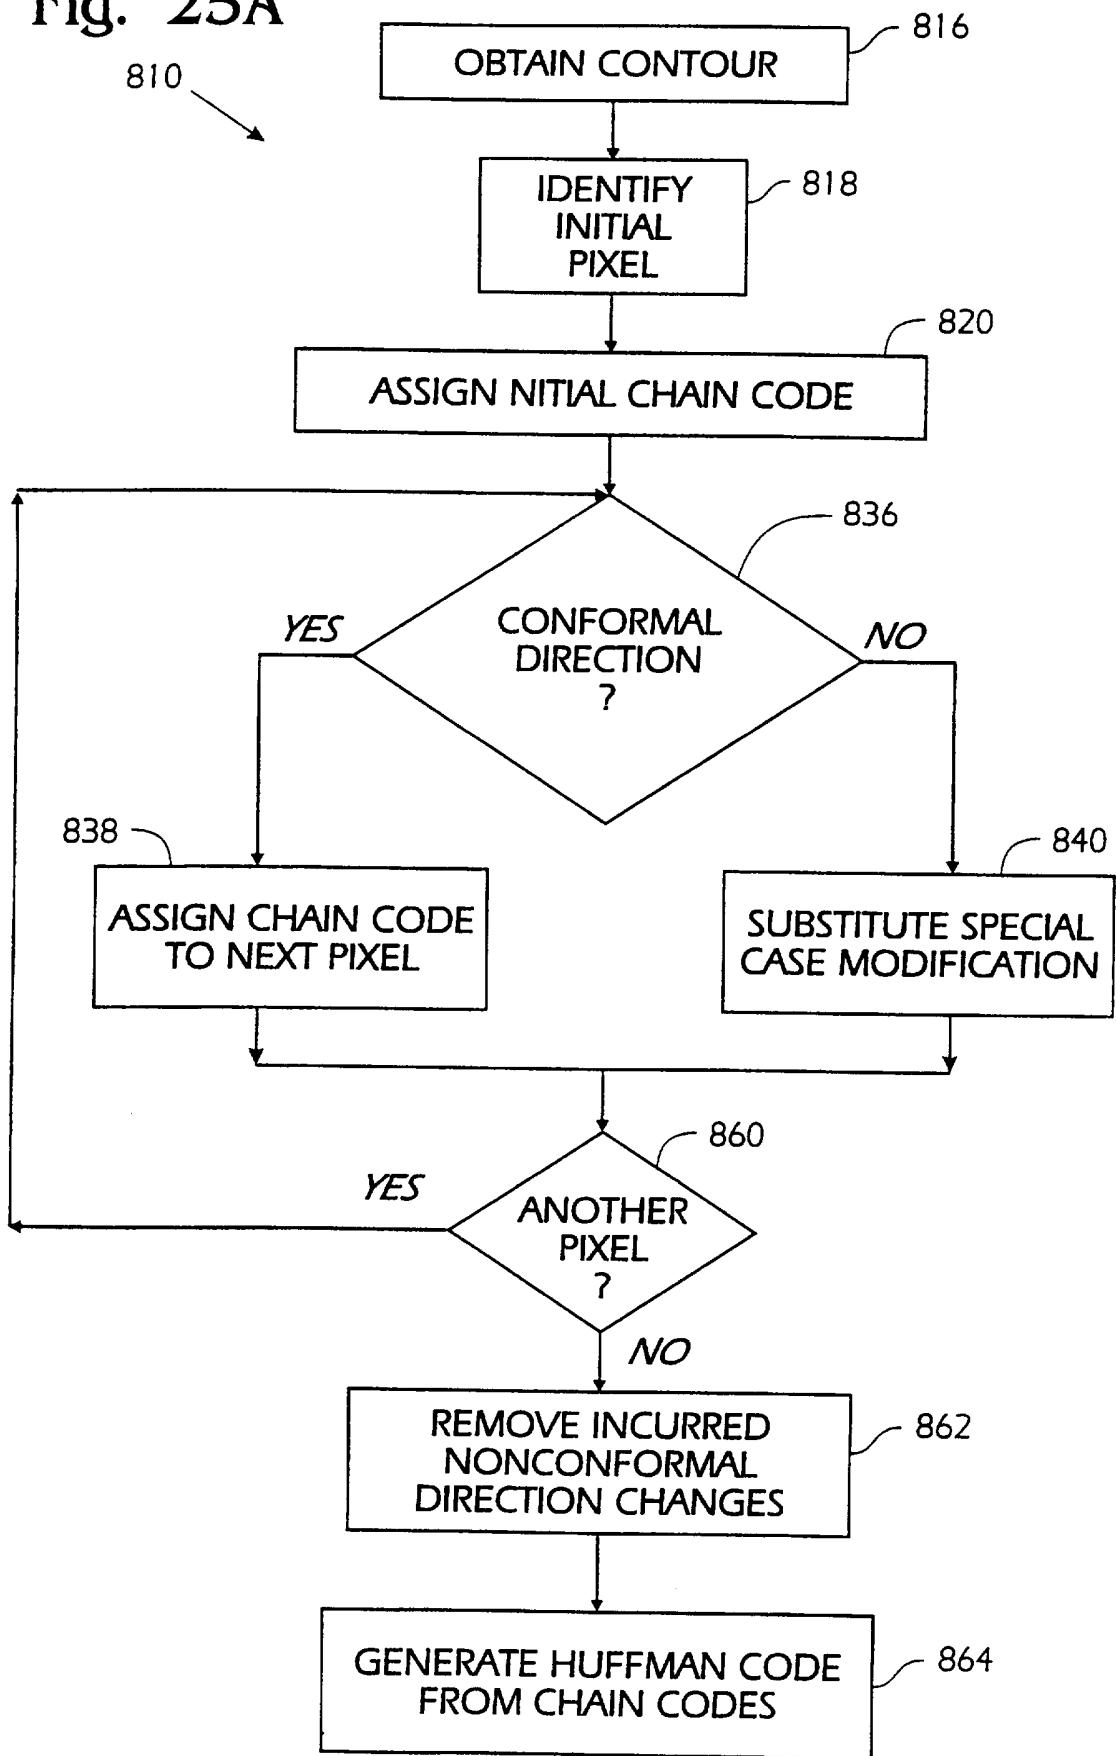

SUBSTITUTE SHEET (RULE 26)


27/33

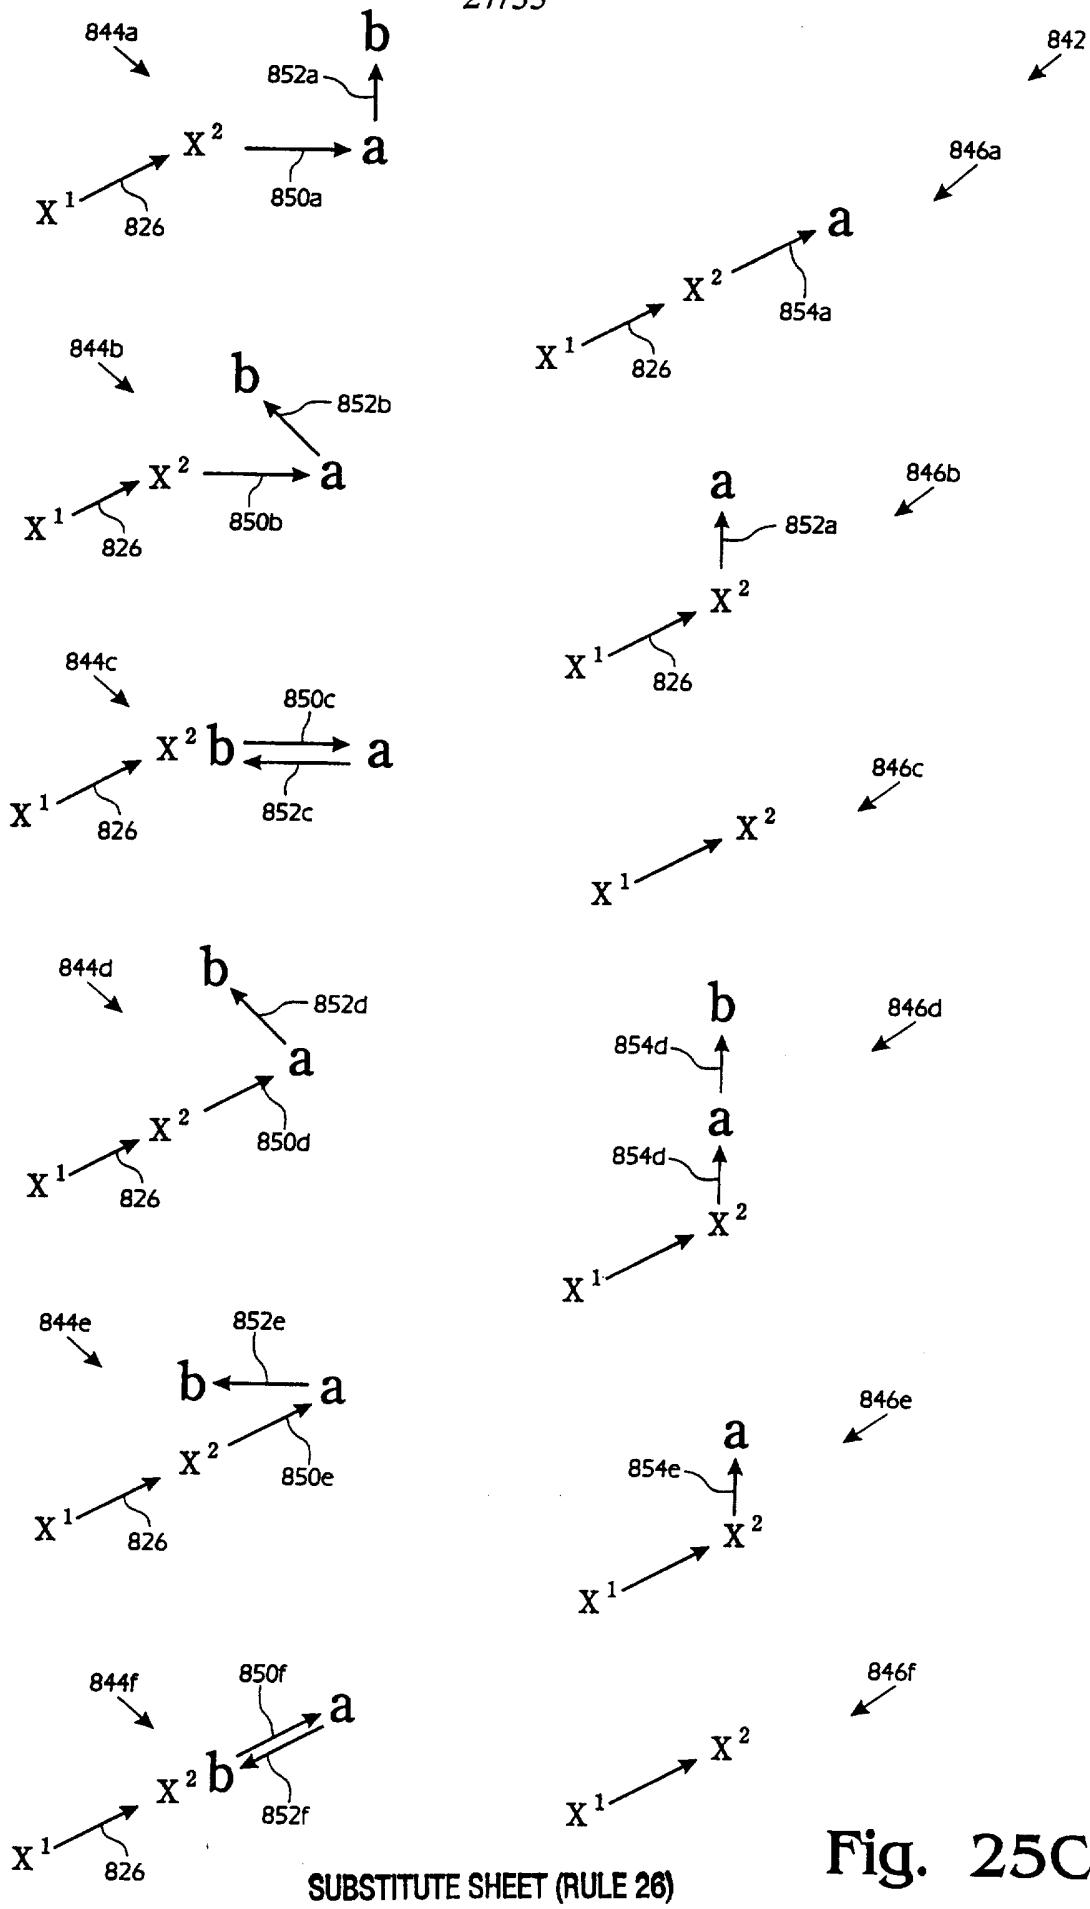

SUBSTITUTE SHEET (RULE 26)

Fig. 25C

Fig. 26

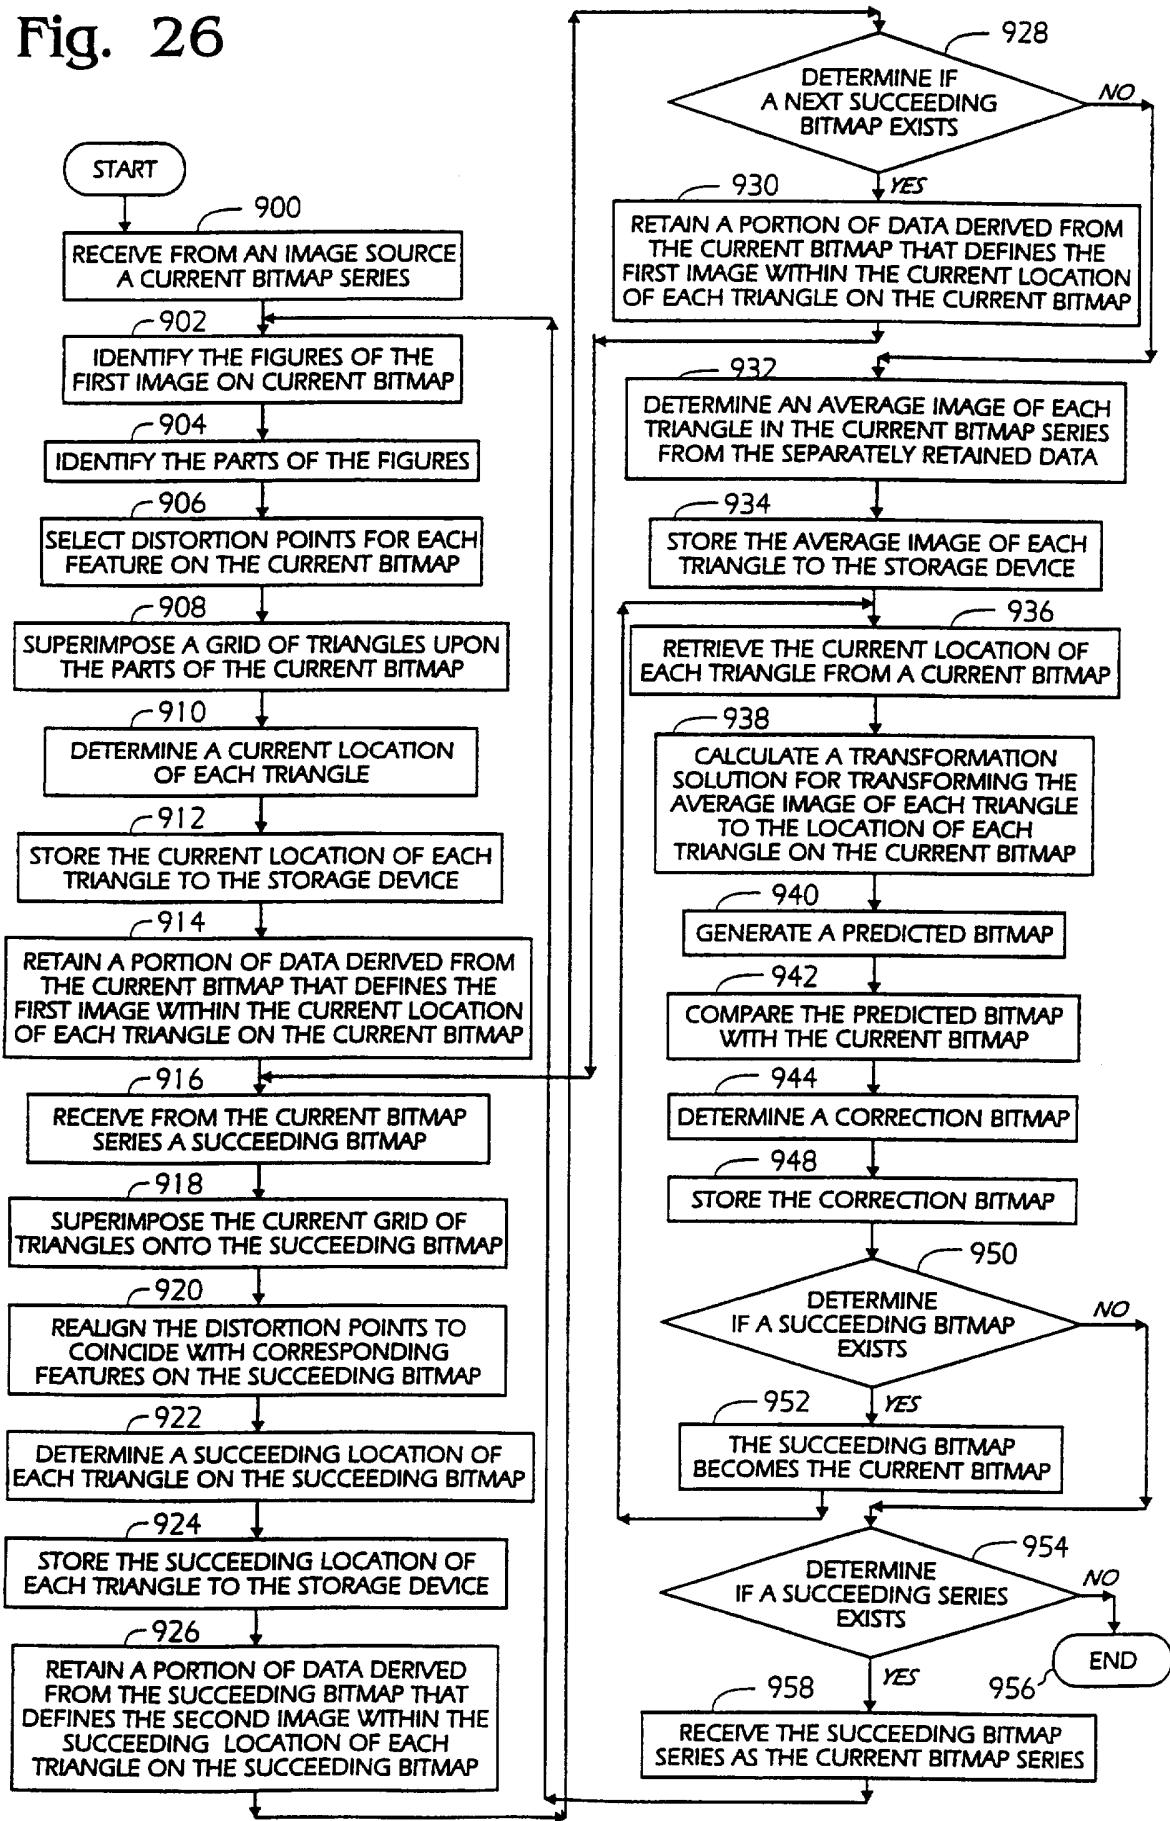

29/33

Fig. 27A



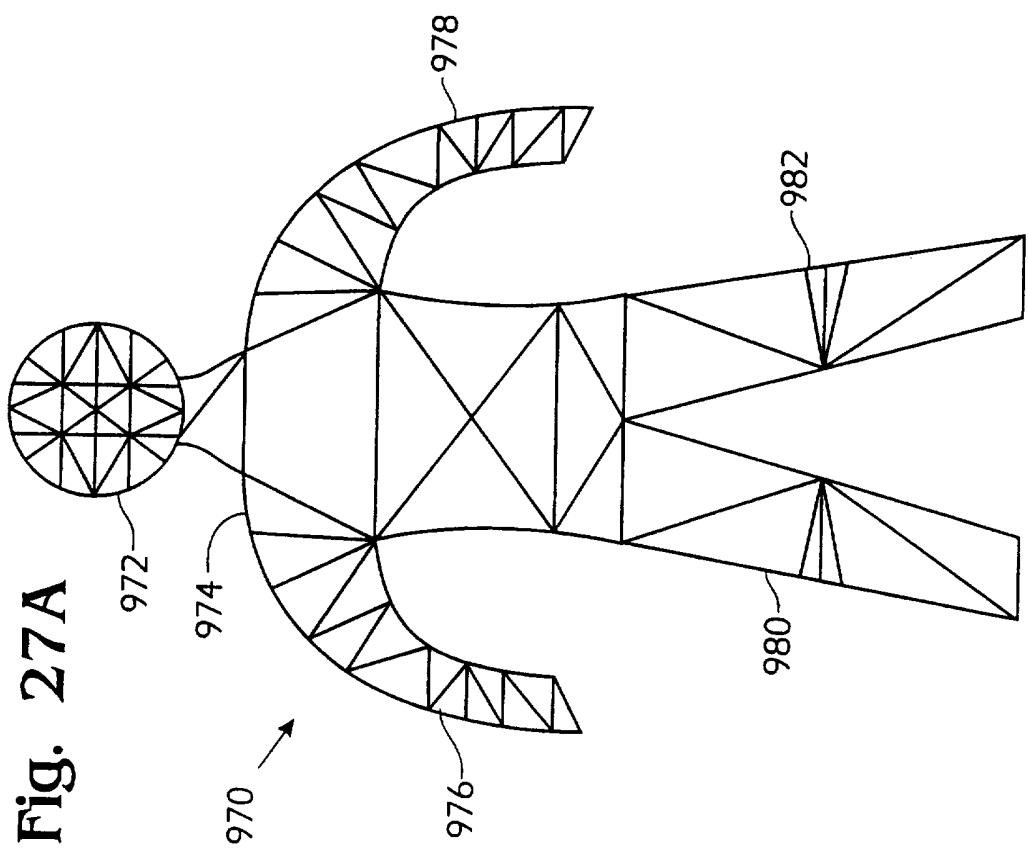


Fig. 27B

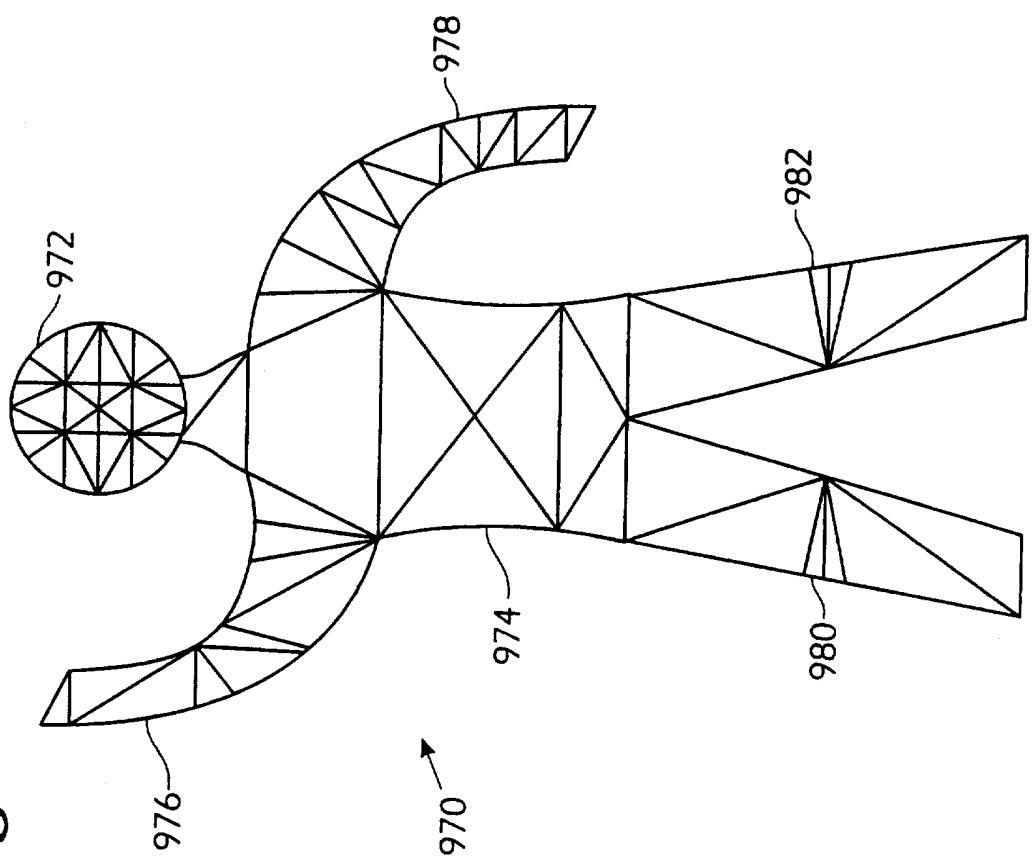

SUBSTITUTE SHEET (RULE 26)

Fig. 28

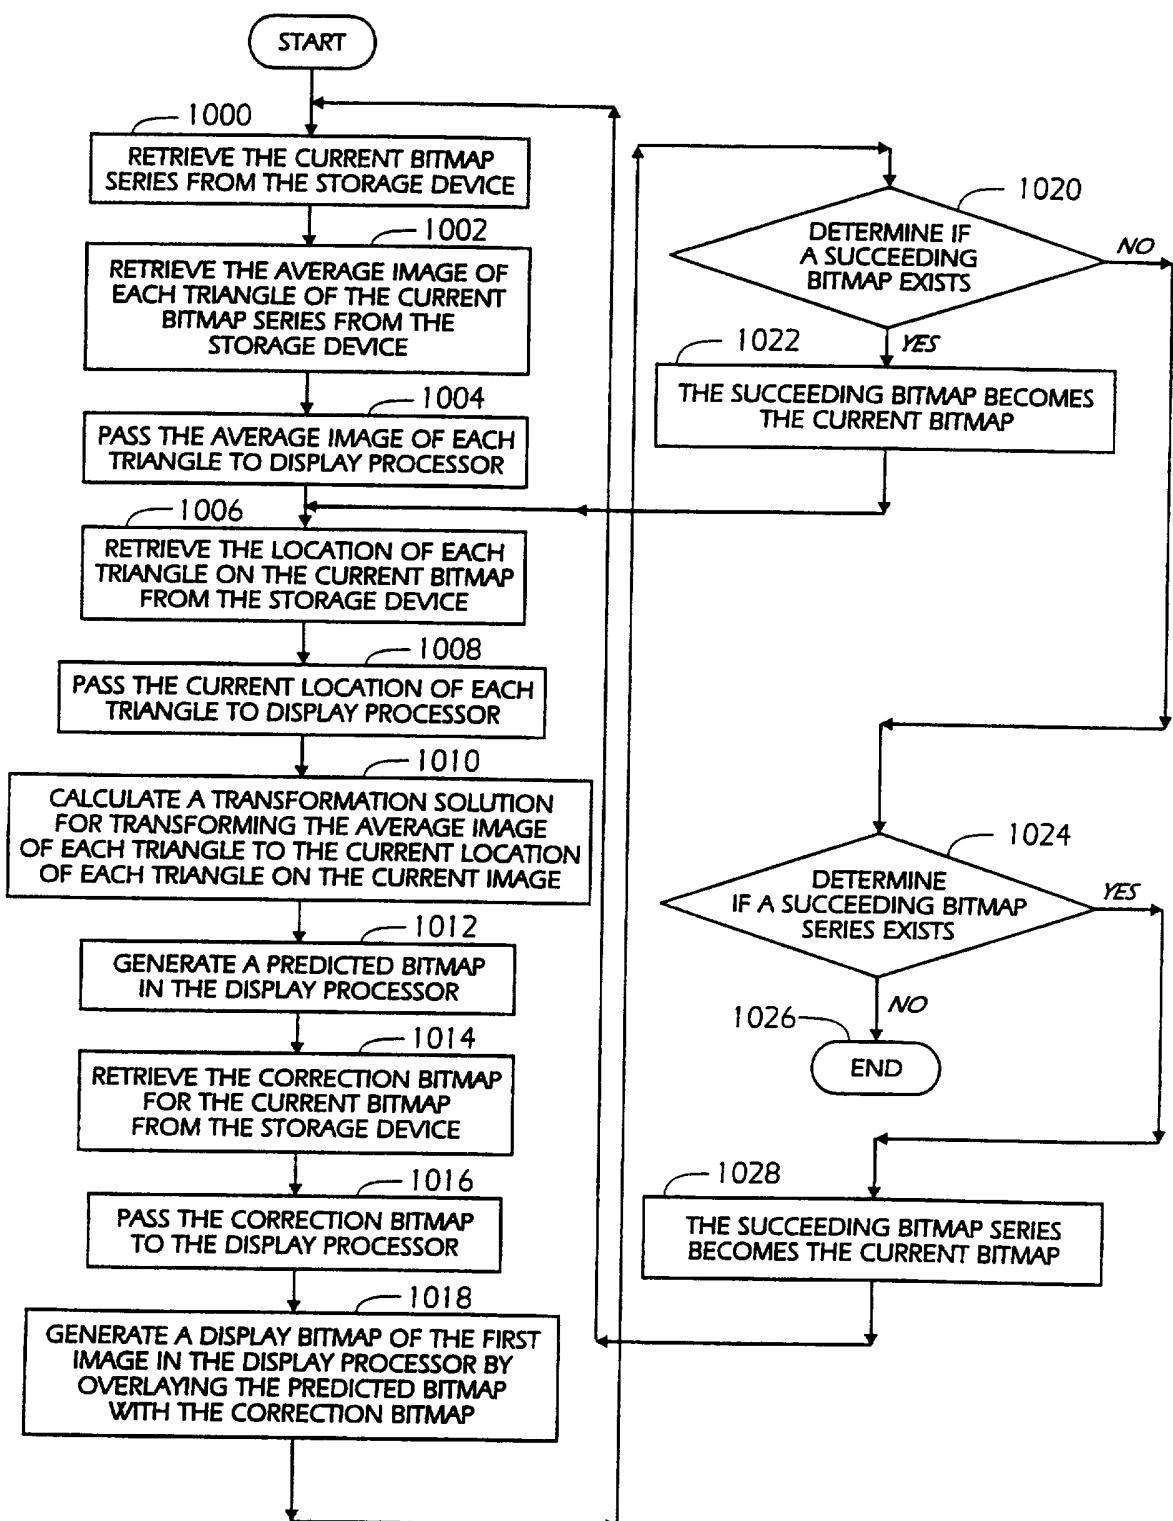

31/33

Fig. 29

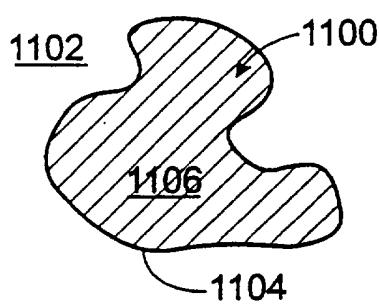


Fig. 30A

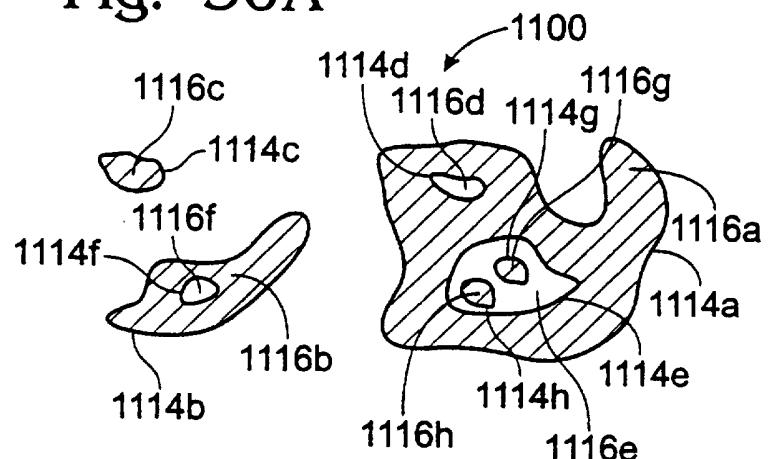


Fig. 30B

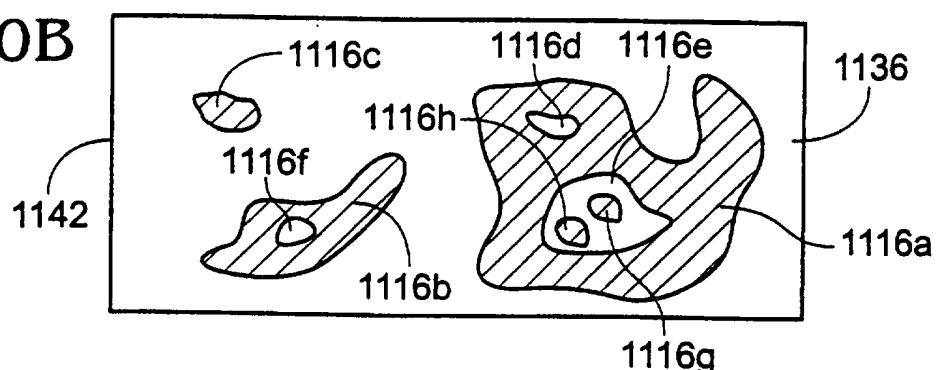


Fig. 30C


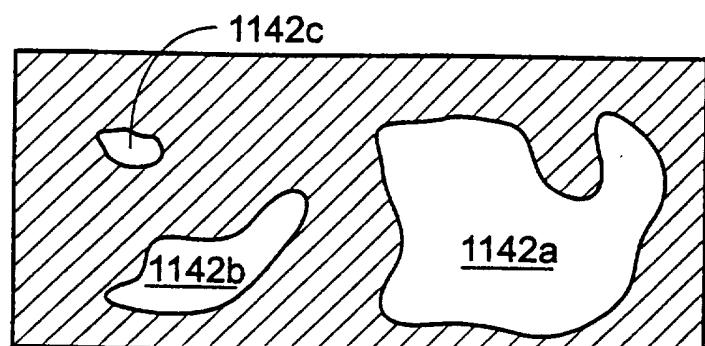


Fig. 30D

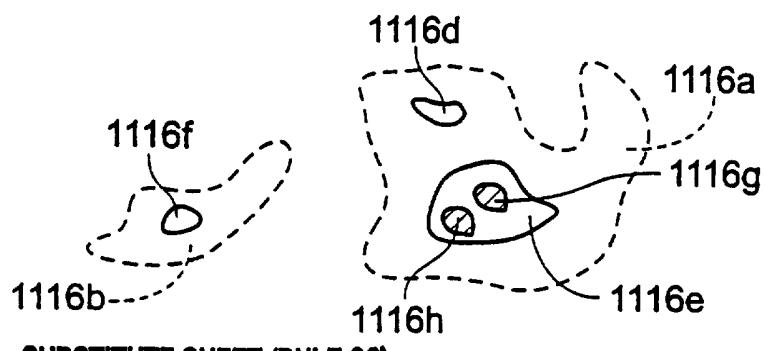

SUBSTITUTE SHEET (RULE 26)

Fig. 31

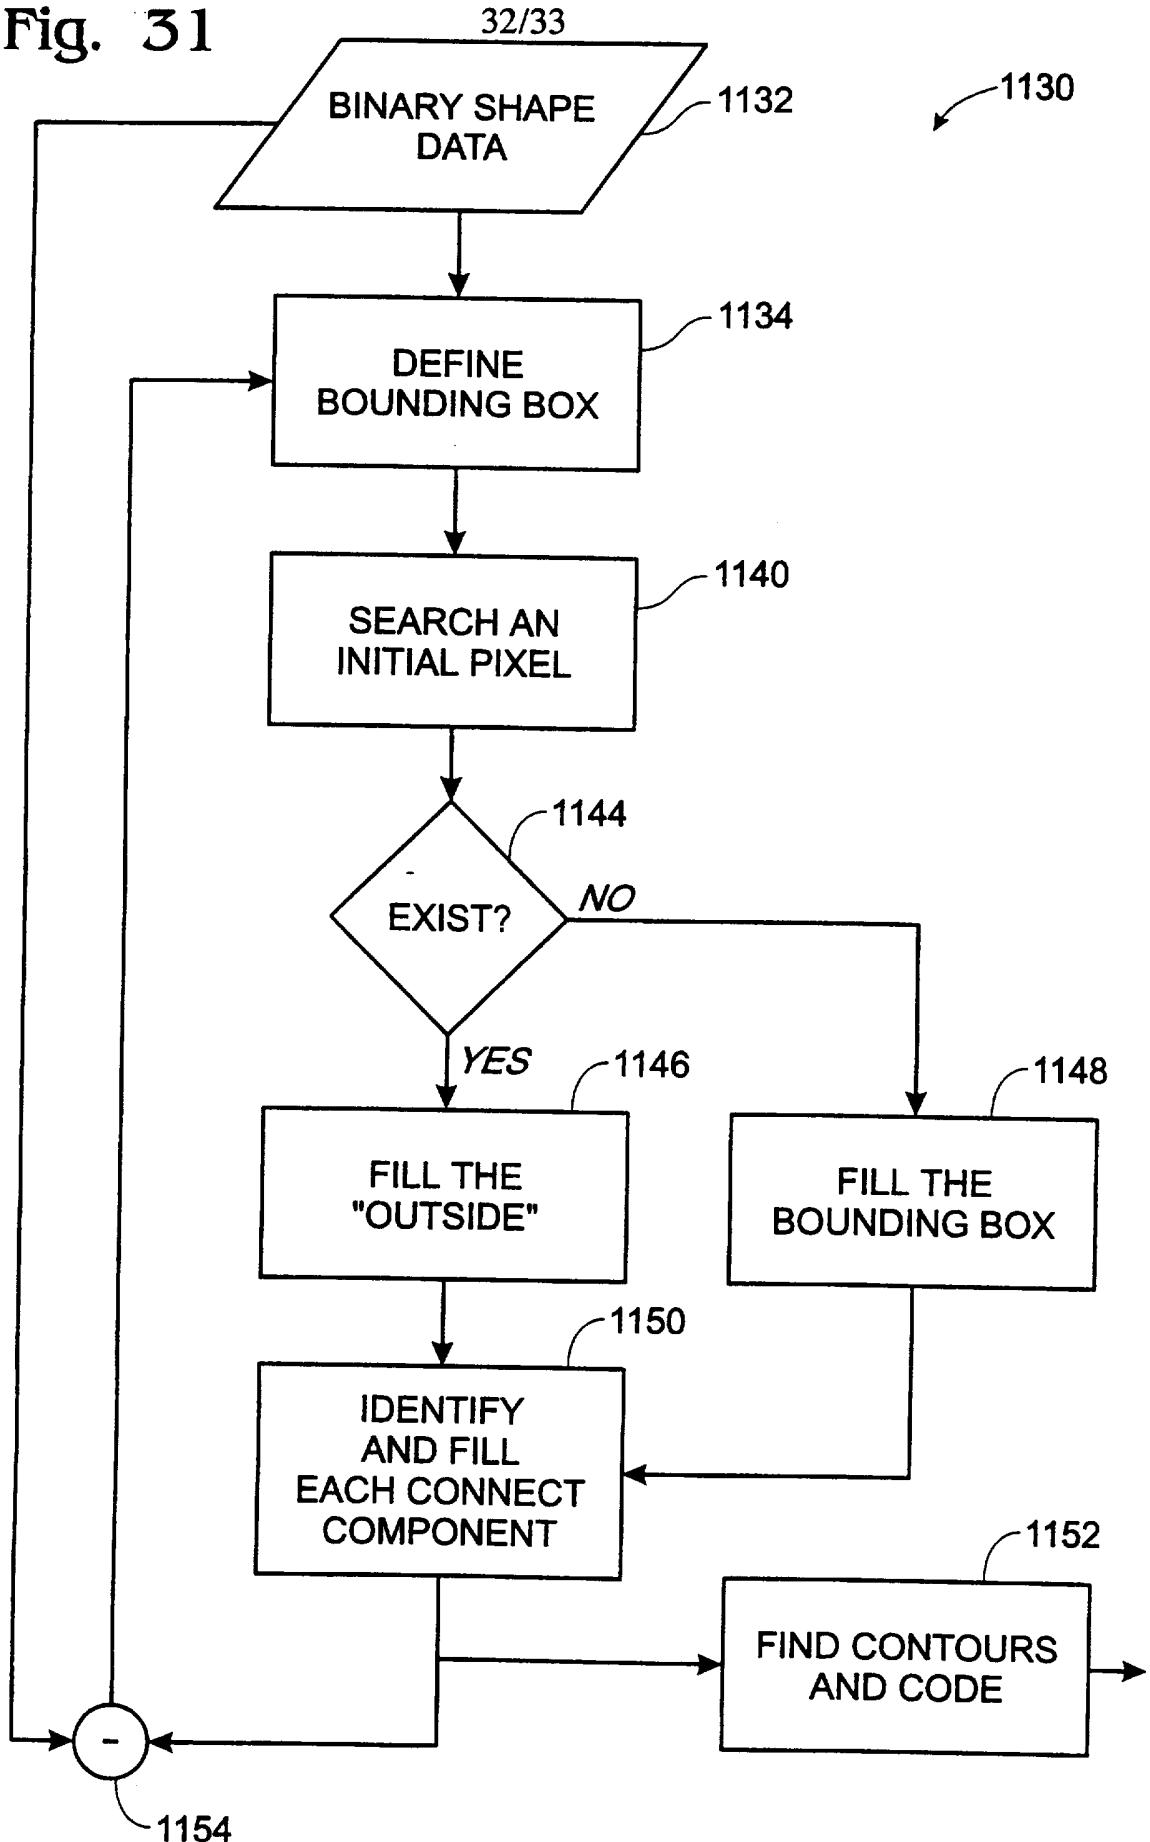
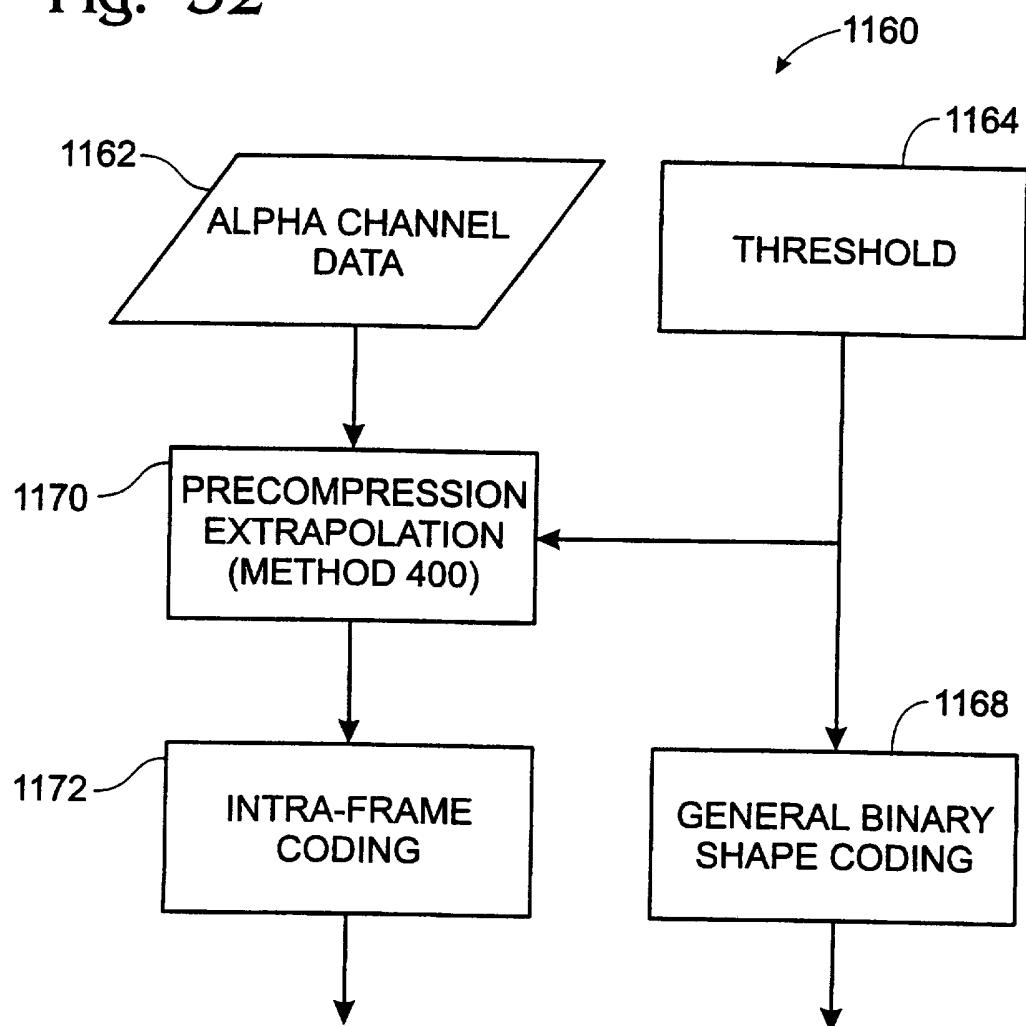


Fig. 32

INTERNATIONAL SEARCH REPORT

International application No.

PCT/US97/04662

A. CLASSIFICATION OF SUBJECT MATTER

IPC(6) : G06K 9/00

US CL : Please See Extra Sheet.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

U.S. : 382/232, 233, 235, 236, 238, 239, 240, 241, 242, 243, 251, 252, 253

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

APS

search terms: feature?, mask?, boundary

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 5,020,121 A (ROSENBERG) 28 May 1991, abstract, column 1, lines 13-40, column 2, lines 3-59, column 3, lines 1-23, column 5, lines 23-68.	1-28

 Further documents are listed in the continuation of Box C. See patent family annex.

•	Special categories of cited documents:	"T"	Later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"A"	document defining the general state of the art which is not considered to be of particular relevance	"X"	document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"E"	earlier document published on or after the international filing date	"Y"	document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
"L"	document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"A"	document member of the same patent family
"O"	document referring to an oral disclosure, use, exhibition or other means		
"P"	document published prior to the international filing date but later than the priority date claimed		

Date of the actual completion of the international search

05 MAY 1997

Date of mailing of the international search report

09 JUN 1997

Name and mailing address of the ISA/US
Commissioner of Patents and Trademarks
Box PCT
Washington, D.C. 20231

Facsimile No. (703) 305-3230

Authorized officer

Leo Boudreau

Telephone No. (703) 308-7595

INTERNATIONAL SEARCH REPORT

International application No.

PCT/US97/04662

A. CLASSIFICATION OF SUBJECT MATTER:
US CL :

382/232, 233, 235, 236, 238, 239, 240, 241, 242, 243, 251, 252, 253