

APPLICATION FOR A STANDARD PATENT

Imperial Chemical Industries PLC
Imperial Chemical House, Millbank, London SW1P 3JF, UNITED KINGDOM

ICI Composites Inc.
501-559 West Third Street, Winona, Minnesota, 55987, UNITED STATES OF
AMERICA

hereby applies for the grant of a standard patent for an invention entitled:

POLYMER COMPOSITION

which is described in the accompanying complete specification.

Details of basic application(s):-

391,279 UNITED STATES OF AMERICA 9 August 1989

Address for Service:

PHILLIPS ORMONDE & FITZPATRICK
Patent and Trade Mark Attorneys
367 Collins Street
Melbourne 3000 AUSTRALIA

DATED this THIRTIETH day of JULY 1990

PHILLIPS ORMONDE & FITZPATRICK

Attorneys for:

Imperial Chemical Industries PLC, ICI Composites Inc.

By:

David B Fitzpatrick

Our Ref : 183714

POF Code: 1453/1453

COMMONWEALTH OF AUSTRALIA

Patents Act

DECLARATION FOR A PATENT APPLICATION

In support of the Convention application made by
IMPERIAL CHEMICAL INDUSTRIES PLC and ICI COMPOSITES INC.

(hereinafter called "applicants") for a patent for an invention entitled:
POLYMER COMPOSITION

I, John Lindley Leng, Attorney
Officer duly appointed, of Imperial Chemical House, Millbank, London, SW1P 3JF, England
Glen M. Engelmann,
I, Officer duly appointed of 501-599 West Third Street, Winona,
do solemnly and sincerely declare as follows: Minnesota 55987, USA

- 1. I am authorised to made this declaration on behalf of the applicant.
- 2. PAUL DOMINIC MACKENZIE, ROBIN KELVIN MASKELL

~~is~~/are the actual inventors of the invention and the fact/s upon which the
applicant ~~is~~/are entitled to make the application ~~is~~/are as follows:

Applicant/s ~~is~~/are the assignee/s of the said invention from the actual
inventor/s.

- 3. The basic application/s for patent or similar protection on which the
application is based is identified by country, filing date, and basic
applicant is/are as follows:

Filed in USA on 9 AUG 1989
appln 391279
by ~~IMPERIAL CHEMICAL INDUSTRIES PLC~~ IN THE NAME OF THE INVENTORS
Paul Dominic Mackenzie and Robin Kelvin Maskell

- 4. The basic application/s referred to in paragraph 3 hereof was the
first application/s made in a Convention country in respect of the
invention the subject of the application.

Declared at Welwyn Garden City
Hertfordshire, England

Dated

IMPERIAL CHEMICAL INDUSTRIES PLC

John Lindley Leng, Attorney

Declared at Wilmington, DE 19897
USA

Dated

September 27, 1990

ICI COMPOSITES INC.

Glen M. Engelmann
Secretary


To: The Commissioner of Patents

(12) PATENT ABRIDGMENT (11) Document No. AU-B-59969/90
 (19) AUSTRALIAN PATENT OFFICE (10) Acceptance No. 630213

- (54) Title
 POLYARYLSULPHONE/CYANATE ESTER COMPOSITION
- International Patent Classification(s)
 (51)⁵ C08L 081/06 C08G 073/06 C08L 079/04
- (21) Application No. : 59969/90 (22) Application Date : 30.07.90
- (30) Priority Data
- (31) Number (32) Date (33) Country
 391279 09.08.89 US UNITED STATES OF AMERICA
- (43) Publication Date : 14.02.91
- (44) Publication Date of Accepted Application : 22.10.92
- (71) Applicant(s)
 IMPERIAL CHEMICAL INDUSTRIES PLC; ICI COMPOSITES INC.
- (72) Inventor(s)
 PAUL DOMINIC MACKENZIE; ROBIN KELVIN MASKELL
- (74) Attorney or Agent
 PHILLIPS ORMONDE & FITZPATRICK , 367 Collins Street, MELBOURNE VIC 3000
- (56) Prior Art Documents
 JP 57-165451
- (57) Claim


1. A curable polymer composition comprising:-
- a) a polymerisable cyanate ester thermoset component selected from one or more compounds, or oligomeric species thereof, of the group consisting of:-

- i) compounds of general formula



where Ar is a divalent aromatic radical and Z is a single atom group selected from the class consisting of O, S, SO, SO₂ and CR₁R₂ where R₁ and R₂ are hydrocarbon groups containing in all up to 12 carbon atoms and optionally are linked to form a ring structure; and


- ii) compounds of general formula

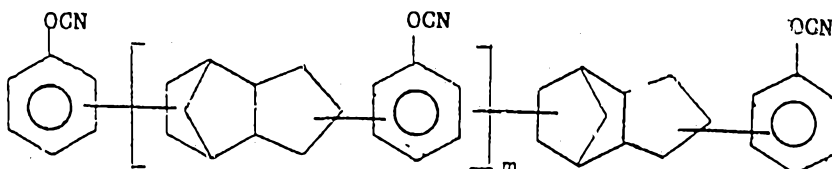


AU-B-59969/90
(10) 630213

where m is up to 3 and can be fractional; and

- b) a polyarylsulphone thermoplast component containing ether- and/or thioether-linked repeating units



and



where Ph is phenylene, a and n are independently 1 to 2

9. A structure made by curing a composition according to any one of the preceding claims in which the polymer components are combined in a network in which each extends continuously or in which islands of predominantly thermoset resin are dispersed in a continuous phase of predominantly thermoset resin are dispersed in a continuous phase of predominantly thermoplast polymer.

Polymer Composition

This invention relates to a polymer composition and more particularly to a composition containing a thermosettable cyanate resin precursor and a thermoplast effective to make said resin tougher when cured. It relates also such a composition containing reinforcing fibres and to cured resin structures made of such a composition.

Thermoset resins have been used for many years to make strong non-metallic structures, but have had somewhat limited fields of application because they are brittle. EP-A-311349 describes a polymer composition providing a useful improvement in fracture toughness and briefly review earlier attempts to meet this requirement. Whereas that application mentions in a general way that the thermoset component of its compositions may be a cyanate resin, we have now identified particular compositions affording a significant advance in performance. EP-A-0311341 describes a curable composition comprising a blend of a polycyanate ester of a polyhydric phenol and a broadly defined aromatic thermoplastic resin soluble in the blend.

The invention provides in its first aspect a curable polymer composition comprising a polymerisable cyanate ester thermoset component and a polyarylsulphone thermoplastic component containing ether- and/or thioether- linked repeating units $(\text{PhSO}_2\text{Ph})_n$ and $(\text{Ph})_a$ where Ph is phenylene, a and n are independently 1 to 2 and may be on average fractional and the phenylenes in $(\text{Ph})_a$ are (when a exceeds 1) linked by a single chemical bond.

In the polyarylsulphone component the relative proportions of the said repeating units is such that on average at least two units $(\text{PhSO}_2\text{Ph})_n$ are in ~~immediate mutual succession~~^{sequence} in each polymer chain present and is preferably in the range 1:99 to 99:1, especially 10:90 to 90:10, respectively. Typically the ratio is in the range 25-50 $(\text{Ph})_a$, balance $(\text{Ph SO}_2 \text{ Ph})_n$. In preferred polyarylsulphones the units are

I X Ph SO₂ Ph X Ph SO₂ Ph ("PES"); and

II X $(\text{Ph})_a$ X Ph SO₂ Ph ("PEES")

where X is O or S and may differ from unit to unit; the ratio of I to II (respectively) preferably between 10:90 and 80:20 especially between 10:90 and 55:45.


The relative proportions of the repeating units of the polyarylsulphone may be expressed in terms of the weight percent SO₂



content, defined as 100 times (weight of SO_2)/(weight of average repeat unit). A preferred SO_2 content is at least 22, preferably 23 to 25%. When $a = 1$ this corresponds to PES/PEES ratios of at least 20:80, preferably in the range 35:65 to 65:35.

5 The above proportions refer only to the units mentioned. In addition to such units the polyarylsulphone may contain up to 50 especially up to 25% molar of other repeating units: the preferred SO_2 content ranges (if used) then apply to the whole polymer. Such units may be for example of the formula

10



in which A is a direct link, oxygen, sulphur, $-CO-$ or a divalent hydrocarbon radical. When the polyarylsulphone is the product of nucleophilic synthesis, its units may have been derived for example from one or more of the following bisphenols and/or corresponding bistiols or phenol - thiols

15

hydroquinone

4,4'- dihydroxybiphenyl

20

resorcinol

dihydroxynaphthalene (2,6 and other isomers)

4,4'-dihydroxydiphenyl ether or -thioether

4,4'-dihydroxybenzophenone


2,2--di-(4-hydroxyphenyl)-propane or -methane.

25

If a bis-thiol is used, it may be formed in situ, that is, a dihalide as described for examples below may be reacted with an alkali sulphide or polysulphide or thiosulphate.


Other examples of such additional units are of the formula

30



in which Q and Q', which may be the same or different, are CO or SO_2 ; Ar is a divalent aromatic radical; and n is 0, 1, 2, or 3, provided that n is not zero where Q is SO_2 . Ar is preferably at least one divalent aromatic radical selected from phenylene, biphenylene or terphenylene. Particular units have the formula

35

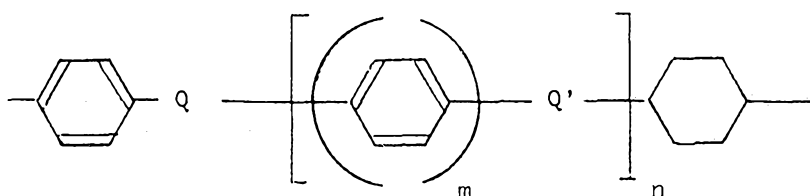

5

where m is 1, 2 or 3. When the polymer is the product of nucleophilic synthesis, such units may have been derived from one or more dihalides, for example:

10

4,4'-dihalobenzophenone

4,4'-bis-(4-chlorophenylsulphonyl)biphenyl

1,4 -bis-(4-halobenzoyl)benzene

4,4'-bis-(4-halobenzoyl)biphenyl

They may of course have been derived partly from the corresponding bisphenols.

15

The polyarylsulphone may be the product of nucleophilic synthesis from halophenols and/or halothiophenols. In any nucleophilic synthesis the halogen if chlorine or bromine may be activated by the presence of a copper catalyst. Such activation is often unnecessary if the halogen is activated by an electron withdrawing group. In any event fluoride is usually more active than chloride. Any nucleophilic synthesis of the polyarylsulphone is carried out preferably in presence of one or more alkali metal carbonates in up to 10% molar excess over the stoichiometric and of an aromatic sulphone solvent, at a temperature in the range 150-350°C.

20

If desired, the polyarylsulphone may be the product of electrophilic synthesis.

25

The polyarylsulphone preferably contains end groups and/or pendant groups of formula -A'Y where A' is a divalent hydrocarbon group, preferably aromatic, and Y is a group reactive with cyanate groups or with a curing agent or with like groups on other polymer molecules.

30

Examples of Y are groups providing active hydrogen especially OH, NH₂, NHR or -SH, where R is a hydrocarbon group containing up to 8 carbon atoms, or providing other cross-linking reactivity especially epoxy, cyanate, isocyanate, acetylene or ethylene, as in vinyl, allyl propenyl or maleimide. Suitable end groups are ^{those in which Y is} NH₂ and/or OH, to the extent of at least 70% by mols of its total end groups.

35



The number average molecular weight of the polyarylsulphone is suitably in the range 2000 to 60000. Preferably the lower limit of the molecular weight range is over 5000 especially over 10000 for example a preferred range being 110000 to 25000. Thus, structurally, as well as by chemical reaction, the polyarylsulphone increases toughness by comparison with that of the thermoset resin alone by providing zones of the tough thermoplast between cross-linked thermoset zones. Another useful sub-range is 3000-11000, especially 3000-9000 in which it acts more as a chain-extender for the thermoset resin, separating and diluting local cross-link zones and thus toughening the structure. Within the above definition of the polyarylsulphone those are preferably chosen which are miscible with suitable cyanate precursors, have high modulus and Tg and are tough.

It is convenient to use reduced viscosity (RV), measured on a solution of 1g of polymer in 100 ml of solution in dimethyl formamide at 25°C as an indication of molecular weight, the correlation being as follows:

| | | | | |
|---------------------|------|-------|-------|-------|
| RV | 0.15 | 0.25 | 0.45 | 0.92 |
| MW (number average) | 5000 | 13000 | 20000 | 60000 |

(Such molecular weights were in fact measured by vapour phase osmometry and are of course subject to the usual error range of about 10%).

The cyanate ester resin component preferably contains cyanate groups linked to aromatic nuclei. Suitably it comprises one or more compounds of general formula NCOArZArOCN , where Ar is a divalent aromatic radical, especially paraphenylene, and Z is a linking group. Examples of Z are single-atom groups such as O, S, SO, SO_2 and CR_1R_2 (where R_1 and R_2 are hydrocarbon groups containing in all up to 12 carbon atoms and are possibly linked externally to form a ring). In other examples Z is larger, for example includes the residue of a cyclic diene such as dicyclopentadiene as in the compound used in Example 1 below, where M is up to 3 and can be fractional. The term "component" includes monomeric cyanic esters and also



oligomeric derivatives thereof. In the curable composition according to the invention a mixture of monomeric and oligomeric cyanates, in proportions in the range 0.7:1 to 1.5:1 is preferably present.

5

The composition may contain a catalyst for curing the cyanate resin, for example a compound of a metal such as copper, zinc or

10

15

20

25

30

35

39

WDN



cobalt. Such a catalyst should be added shortly before curing unless it is of the "latent" type, examples of which are cobalt compounds and chelates. Hydroxy compounds may also be added.

The curable composition may, if desired, contain one or more additional thermosettable resin components, for example epoxy resin precursors. The weight ratio of cyanate to other thermosettable components is suitably in the range 4:1 to 10:1. Suitable epoxy resin precursors have 2-4 epoxy groups in the molecule. Such additional components may be monomeric or partly condensed or a mixture of both. Hardeners and catalysts appropriate to such resins may be used.

The weight proportion of the thermoplast component in the composition is typically in the range 10-60, especially 15-40, percent, calculated on the non-volatile constituents present after curing the thermoset resin.

The invention in a second aspect provides the composition in the cured state and structures made therefrom. In the cured state the thermoset and thermoplast components, the precursors of which were mutually miscible, form separate phases. There may be present a distinct continuous phase consisting substantially of one of the components, through which particles of the other are dispersed. In a preferred composition each component is present as a phase elongated in at least one dimension, for example as a network in which each extends continuously through any mass of the composition. Such a morphology, known also as co-continuous or semi-interpenetrating is, in the composition according to the invention, preferably the product of spinodal decomposition of the initial mixture as the thermoset component, in reacting with itself and any active groups on the thermoplast, becomes immiscible with the thermoplast.

The composition is particularly suitable for fabrication of structures, including load-bearing or impact resisting structures. For this purpose it may contain a reinforcing agent such as fibres. Fibres can be added short or chopped typically of mean fibre length not more than 2 cm, for example about 6 mm, typically at a concentration of 5 to

35, preferably at least 20%, by weight. For structural applications, it is preferred to use continuous fibre for example glass or carbon, especially at 30 to 70, more especially 50 to 70, % by volume.

5 The fibre can be organic, especially of stiff polymers such as poly
paraphenylene terephthalamide, or inorganic. Among inorganic fibres
glass fibres such as "E" or "S" can be used, or quartz, alumina,
zirconia, silicon carbide, other compound ceramics or metals. A very
suitable reinforcing fibre is carbon, especially as graphite. Organic
10 or carbon fibre is preferably unsized or is sized with a material that
is compatible with the composition according to the invention, in the
sense of being soluble in the liquid precursor composition without
adverse reaction or of bonding both to the fibre and to the thermoset/
thermoplastic composition according to the invention. In particular
carbon or graphite fibres that are unsized or are sized with epoxy resin
15 precursor or thermoplast such as polyarylsulphone are preferred.
Inorganic fibre preferably is sized with a material that bonds both to
the fibre and to the polymer composition; examples are the organo-silane
coupling agents applied to glass fibre.

20 The composition may contain for example conventional toughening
agents such as liquid rubbers having reactive groups, aggregates such as
glass beads, rubber particles and rubber-coated glass beads, fillers
such as polytetrafluorethylene, graphite, boron nitride, mica, talc and
vermiculite, pigments, nucleating agents, and stabilisers such as
phosphates. The total of such materials and any fibrous reinforcing
25 agent should be such that the composition contains at least 20% by
volume of the polysulphone/thermoset mixture. The percentages of fibres
and such other materials are calculated on the total composition after
curing at up to 200°C.

30 A further procedure comprises forming incompletely cured composition
into film by for example compression moulding, extrusion, melt-casting
or belt-casting, laminating such films to fibrous reinforcing agent in
the form of for example a non-woven mat of relatively short fibres, a
woven cloth or essentially continuous fibre in conditions of temperature
and pressure sufficient to cause the mixture to flow and impregnate the
35 fibres and curing the resulting laminate.

Plies of impregnated fibrous reinforcing agent, especially as made

by the procedure of one or more of EP-A 56703, 102158 and 102159, can be laminated together by heat and pressure, for example by compression moulding or by heated rollers, at a temperature above the curing temperature of the thermosetting resin or, if cure has already taken place, above the glass transition temperature of the mixture, conveniently at least 120°C and typically about 180°C, and at a pressure in particular at least 0.1, preferably at least 5, MN/m².

The resulting multi-ply laminate may be anisotropic in which the fibres are oriented essentially parallel to one another or quasi-isotropic in each ply of which the fibres are oriented at an angle, conveniently 45° as in most quasi-isotropic laminates but possibly for example 30° or 60° or 90° or intermediately, to those in the plies above and below. Orientations intermediate between anisotropic and quasi-isotropic, and combination laminates, may be used. Suitable laminates contain at least 4 preferably at least 8, plies. The number of plies is dependent on the application for the laminate, for example the strength required, and laminates containing 32 or even more, for example several hundred, plies may be desirable. There may be aggregates, as mentioned above in interlaminar regions.

Example 1

A polymer composition was made from the following components:


25 parts by weight of polyarylsulphone:

40 mol percent PES, 60 mol percent PEES (a=1)

100% NH₂ end groups

RV 0.24; T_g 198°C

40 parts by weight of cyanate oligomer derived from the phenol-dicyclopentadiene adduct in which m = 0.2

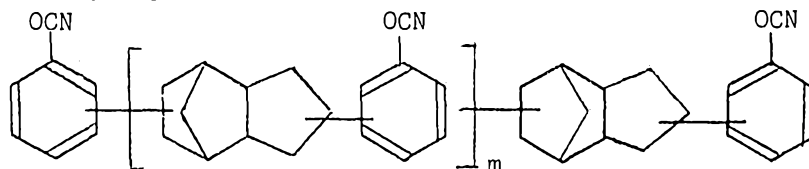

35 parts by weight of cyanate monomer: 1,1-diphenylethane-4,4'-dicyanate. The cyanate oligomer was melted at 80-90°C and the cyanate monomer was added. A solution of the polyarylsulphone in methylene

chloride was mixed in. The solvent was boiled off down to a volatiles level of about 3%. A solution of copper acetylacetonate (1% in nonylphenol) providing 63 ppm by weight of metal per 100 parts of cyanate resin was stirred in for 5 mins at 80-90°C. The mixture was cooled to ambient temperature.

A sample of the mixture was impregnated on to unidirectional carbon fibre "HITEX 468b" (supplied by HITCO) at a resin content of 35% by weight and a fibre a real weight of 145 g/sq.m.

The tape was cured in this cycle under 100 psi pressure:

heat up at 1.1°C per min

1h hold at 121°C

4h at 177°C; followed by

2h post cure at 220-240°C

Samples of the impregnated tape were subjected to standard tests.

The results are set out in the Table 1 following Example 4. A sample of neat polymer composition was subjected to the same curing cycle and examined microscopically. It was observed to have a co-continuous network structure.

Example 2

Example 1 was repeated subject to the modification that the proportions of the three components were 20:50:30 respectively, the fibre was "IM7" (supplied by Hercules Inc) and the polymer had RV 0.26, Tg 200°C.

The results of the standard tests are set out in Table 1 following Example 4.

Again a sample of cured neat polymer was observed to have a co-continuous network structure.

Example 3

Example 1 was repeated except that the polyarylsulphone had 100% hydroxy end groups and RV 0.32, Tg 203°C, and that the fibre was "IM7". Results of mechanical tests are shown in Table 1 following Example 4.

In cured neat composition a "phase-inverted" morphology was observed, with islands of predominantly thermoset resin dispersed in a continuous phase of predominantly thermoplast polymer.

Example 4

A polymer composition was made from the following component:

25 parts by weight of polyarylsulphone.

80 mol percent PES, 20 mol percent PEES (a=2)
over 90% OH end groups

RV 0.25; Mn estimated (from NMR) 9800; Tg 216°C

5 30 parts by weight of cyanate oligomer derived from
2,2-diphenylpropane - 4,4'-dicyanate

25 parts by weight of cyanate monomer as in Example 1. The procedure
for mixing, impregnation and cure were as in Example 1. A sample of
neat polymer composition was subjected to the same curing cycle and
10 examined microscopically. It was observed to have a co-continuous
morphology. Results of mechanical tests are shown in Table 1.




Table 1

| | Example | 1 | 2 | 3 | 4 |
|----|-----------------------|-------|-------|-------|-------|
| 5 | Property | | | | |
| | 0° Tensile St MPa | 2758 | 2303 | 2351 | 2558 |
| 10 | 0° Tensile Mod GPa | 166.9 | 166.9 | 135.8 | 168.9 |
| | 0° Tensile Strain % | 1.7 | 1.42 | 1.7 | 1.6 |
| | CAI, MPa | 255.1 | 234.4 | 206.8 | 213.7 |
| 15 | 0° Compressive St MPa | | | | |
| | RT | 1579 | 1296 | 1151 | 1234 |
| | 121°C | 1103 | 1103 | 1089 | 1145 |
| | 121°C | 999.7 | 1089 | 1034 | 1158 |
| 20 | 149°C | 1117 | 1248 | 910 | 1062 |
| | 149°C | 951 | 1200 | 951 | 1062 |
| | G ₁₂ , GPa | | | | |
| | RT | 4.41 | 4.48 | 4.41 | 4.27 |
| 25 | 121°C/wet** | 3.24 | 3.44 | 2.96 | 3.51 |
| | 149°C/wet** | 2.90 | 2.69 | 3.51 | 2.69 |
| | 177°C/wet** | -- | 1.10 | 1.79 | 1.17 |

30 Notes

* Wet = 7 days immersion at 71°C

** Wet = 85% RH at 66°C to saturation.

Example 5

Environmental resistance

Sample of impregnated tape from Examples 1 and 4 were laid up in a +/-45 4 ply laminate, and subjected to the curing cycle and post-cure described in Example 1.

Specimens were treated as follows:

JP4 or MEK 6 days' immersion at ambient temperature
water 14 days' immersion at 71°C

then tested for tensile strength and modulus weight increase. Results are shown in Table 2.

Table 2

| | Control | JP4 | MEK | Water |
|----------------------|---------|--------|-------|-------|
| Example 1 | | | | |
| Tensile strength MPa | 177.9 | 174.4 | 180.0 | 137.9 |
| Tensile modulus GPa | 15.3 | 14.3 | 13.0 | 13.1 |
| Weight increase, % | | - 0.02 | 0.87 | 0.65 |
| Example 4 | | | | |
| Tensile strength MPa | 150.3 | 146.9 | 165.5 | 113.1 |
| Tensile modulus GPa | 14.5 | 14.5 | 12.0 | 14.2 |
| Weight increase, % | | 0 | 0.71 | 0.81 |

Example 6

In a polymer composition was used a polyarylsulphone consisting of the ether-linked units (Ph SO₂ Ph)₂ 30 mol %; Ph SO₂Ph 50 mol % and Ph₂ 20 mol % (thus in the general formula n = 1.375 and a= 2), which had been made by reacting together the monomers Cl Ph SO₂ Ph Ph SO₂ Cl, Cl-Ph SO₂ Ph Cl, HO Ph SO₂ Ph OH and HO Ph Ph OH in the presence of alkali

carbonate and diphenylsulphone solvent, in proportions giving over 90 mol % OH end groups. Its RV was 0.26 and Tg 235°C. This polymer (25 parts by weight) was mixed with 45 parts by weight of cyanate oligomer derived from 2,2-diphenylpropane-4,4'-dicyanate and 35 parts by weight of a cyanate monomer 1,1-diphenylethane-4,4'-dicyanate. The procedure for mixing, impregnation and cure were as in Example 1, except the fiber used was IM7 from Hercules. A sample of neat resin was subjected to cure and examined microscopically. It was observed to have islands of predominantly thermoset resin dispersed in a continuous phase of predominantly thermoset polymer. Its mechanical properties were:

0° Tensile str, MPa 2227

0° Tensile mod GPa 149.6

0° Tensile strn, % 1.45

15

CAI,

1500 kJm⁻² 6.18

0° Comp str, MPa DRY WET (7 days at 71°C)

RT 1207 N/A

121°C 1103 1131

149°C/wet 1220 1186

20

G₁₂ GPa DRY WET (85% RH at 66°C saturation)

RT 3.93


121°C 2.83

149°C 2.48

163°C 2.48

177°C 2.07

30

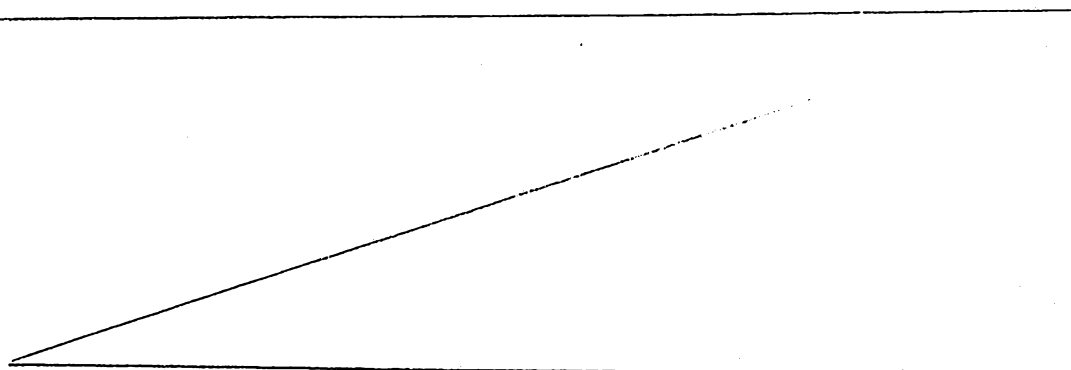


The claims defining the invention are as follows:

1. A curable polymer composition comprising:-


5 a) a polymerisable cyanate ester thermoset component selected from one or more compounds, or oligomeric species thereof, of the group consisting of:-

10 i) compounds of general formula




15 where Ar is a divalent aromatic radical and Z is a single atom group selected from the class consisting of O, S, SO, SO₂ and CR₁R₂ where R₁ and R₂ are hydrocarbon groups containing in all up to 12 carbon atoms and optionally are linked to form a ring structure; and

20 ii) compounds of general formula

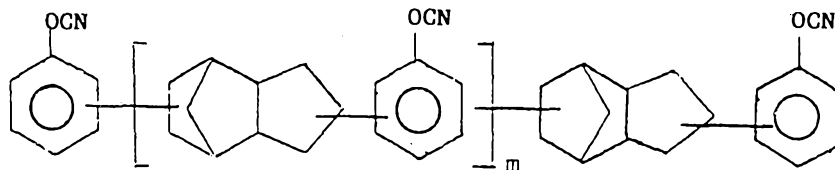

where m is up to 3 and can be fractional; and

30 b) a polyarylsulphone thermoplast component containing ether- and/or thioether-linked repeating units



35 and



where Ph is phenylene, a and n are independently 1 to 2



and may on average be fractional and the phenylenes in $(Ph)_a$ (when a exceeds 1) are linked by a single chemical bond.

5 2. A composition according to claim 1 in which the polyarylsulphone contains the units:

I X Ph SO₂ Ph X Ph SO₂ Ph (PES); and

II X (Ph)_a X Ph SO₂ Ph (PEES)

10 in a ratio of I to II between 10:90 and 55:45 wherein X is O or S and may differ from unit to unit.

3. A composition according to claim 2 in which a=1 and the ratio of I to II is in the range 35:65 to 65:35.

15 4. A composition according to any one of the preceding claims in which the polyarylsulphone carries end groups providing active hydrogen.

20 5. A composition according to claim 4 in which the active hydrogen is provided by NH₂ and/or OH to the extent of at least 70 mol percent of its total end groups.

25 6. A composition according to any one of the preceding claims in which the polyarylsulphone has a molecular weight in the range 2000 to 60000.

30 7. A composition according to any one of the preceding claims in which the cyanate ester component is a mixture of a dicyanate monomer and oligomer.

8. A composition according to any one of the preceding claims which contains reinforcing fibres.

35 9. A structure made by curing a composition according to any one of the preceding claims in which the polymer components are combined in a network in which each extends continuously or in which islands of predominantly thermoset resin are dispersed in a continuous phase of predominantly thermoset resin are dispersed in a continuous phase of

39

predominantly thermoplast polymer.

10. A composition according to claim 6 in which the molecular weight is over 5000.

5

11. A composition according to claim 1 substantially as hereinbefore described with reference to any one of the examples.

10

DATED: 3 August 1992

PHILLIPS ORMONDE & FITZPATRICK

Attorneys for:

IMPERIAL CHEMICAL INDUSTRIES PLC

and ICI COMPOSITES INC.

David B Fitzpatrick

15

0133N

20

25

30

35

35

39

WDN

