



US007298403B2

(12) **United States Patent**
Tamagawa

(10) **Patent No.:** **US 7,298,403 B2**
(45) **Date of Patent:** **Nov. 20, 2007**

(54) **IMAGE READING DEVICE**
(75) Inventor: **Toshimitsu Tamagawa**, Kyoto (JP)
(73) Assignee: **Rohm Co., Ltd.**, Kyoto (JP)
(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 868 days.

(21) Appl. No.: **10/001,791**
(22) Filed: **Dec. 5, 2001**

(65) **Prior Publication Data**
US 2003/0103152 A1 Jun. 5, 2003

(51) **Int. Cl.**
H04N 9/64 (2006.01)
H04N 3/14 (2006.01)
H04N 5/335 (2006.01)
H04N 1/04 (2006.01)
(52) **U.S. Cl.** **348/245**; 348/308; 358/482
(58) **Field of Classification Search** 348/230.1, 348/243, 245, 283, 294, 298, 300, 302-304, 348/307-311, 317, 321; 250/208.1, 214 A; 358/482-483; 382/321; 710/36; 378/98.8; 330/308

See application file for complete search history.

(56) **References Cited**
U.S. PATENT DOCUMENTS

| | | | |
|---------------|---------|----------------------|---------|
| 4,453,187 A * | 6/1984 | Komiya et al. | 348/309 |
| 4,573,079 A * | 2/1986 | Yamaguchi | 348/310 |
| 4,617,471 A * | 10/1986 | Suzuki et al. | 358/482 |
| 4,646,155 A * | 2/1987 | Miyazawa et al. | 358/471 |
| 4,661,860 A * | 4/1987 | Miyazawa | 348/241 |
| 4,691,114 A * | 9/1987 | Hasegawa et al. | 358/482 |
| 4,797,560 A * | 1/1989 | Berger et al. | 348/309 |
| 5,268,765 A * | 12/1993 | Yamashita | 348/245 |
| 5,363,216 A * | 11/1994 | Kim | 358/482 |

| | | | |
|----------------|---------|-----------------------|-----------|
| 5,452,001 A * | 9/1995 | Hosier et al. | 348/230.1 |
| 5,592,222 A * | 1/1997 | Nakamura et al. | 348/300 |
| 5,633,679 A * | 5/1997 | Hosier et al. | 348/243 |
| 5,654,755 A * | 8/1997 | Hosier | 348/245 |
| 5,717,459 A * | 2/1998 | Maki et al. | 348/312 |
| 5,724,094 A * | 3/1998 | Tseng et al. | 348/243 |
| 5,742,659 A * | 4/1998 | Atac et al. | 379/98.8 |
| 5,784,178 A * | 7/1998 | Tsai et al. | 358/482 |
| 5,801,850 A * | 9/1998 | Maki et al. | 358/483 |
| 5,867,212 A * | 2/1999 | Toma et al. | 348/311 |
| 5,969,759 A * | 10/1999 | Morimoto | 348/311 |
| 6,002,287 A * | 12/1999 | Ueno et al. | 327/307 |
| 6,130,712 A * | 10/2000 | Miyazaki et al. | 348/243 |
| 6,344,877 B1 * | 2/2002 | Gowda et al. | 348/245 |
| 6,445,413 B1 * | 9/2002 | Hosier et al. | 348/245 |
| 6,452,151 B1 * | 9/2002 | Tamagawa | 250/208.1 |
| 6,476,867 B1 * | 11/2002 | Kobayashi et al. | 348/307 |
| 6,553,437 B1 * | 4/2003 | Aswell et al. | 710/36 |
| 6,606,172 B1 * | 8/2003 | Moro | 358/483 |
| 6,750,912 B1 * | 6/2004 | Tennant et al. | 348/300 |

(Continued)

FOREIGN PATENT DOCUMENTS

JP 2001024947 A * 1/2001


(Continued)

Primary Examiner—John M. Vilecco
(74) *Attorney, Agent, or Firm*—Arent Fox LLP

(57) **ABSTRACT**

An image reading device ready to operate at higher speed is built as an IC chip having a plurality of processing sections, of which each has a plurality of image reading photoelectric conversion elements, a plurality of transistors for reading a photoelectric conversion signal from the image reading photoelectric conversion elements, a signal selection circuit for sequentially selecting the plurality of transistors, and a signal output line by way of which the photoelectric conversion signal is transmitted.

5 Claims, 4 Drawing Sheets

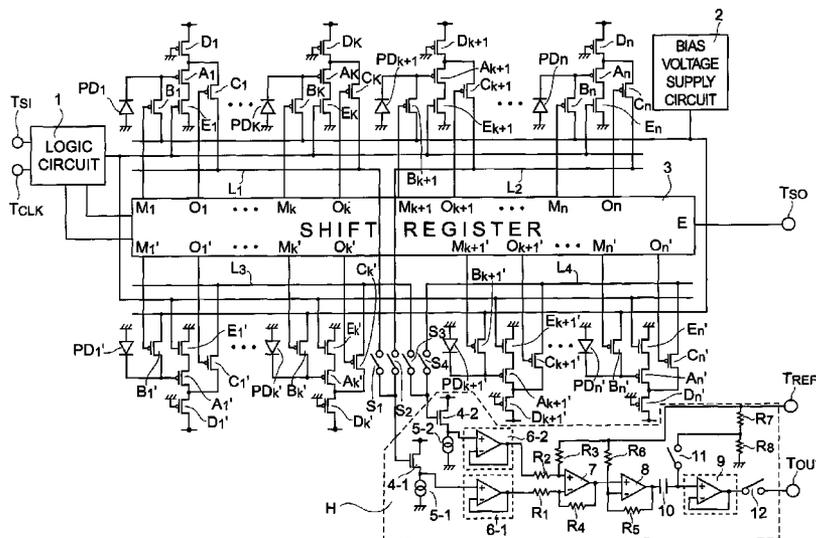

US 7,298,403 B2

Page 2

U.S. PATENT DOCUMENTS

6,798,453 B1 * 9/2004 Kaifu 348/304
6,853,402 B2 * 2/2005 Hosier et al. 348/241
6,950,132 B1 * 9/2005 Kozuka 348/243
7,045,758 B2 * 5/2006 Zarnowski et al. 348/300
7,095,004 B2 * 8/2006 Tsou et al. 250/214 A
7,167,284 B2 * 1/2007 Sawada 358/483
2002/0044210 A1 * 4/2002 Tamagawa 348/294
2002/0044699 A1 * 4/2002 Kozuka 382/312

2003/0123106 A1 * 7/2003 Sawada 358/483
2004/0245434 A1 * 12/2004 Yokomichi 250/208.1
2007/0058058 A1 * 3/2007 Lee 348/294
2007/0145244 A1 * 6/2007 Yokomichi 250/214 A

FOREIGN PATENT DOCUMENTS

JP 2001156989 A * 6/2001
JP 2002101261 A * 4/2002

* cited by examiner

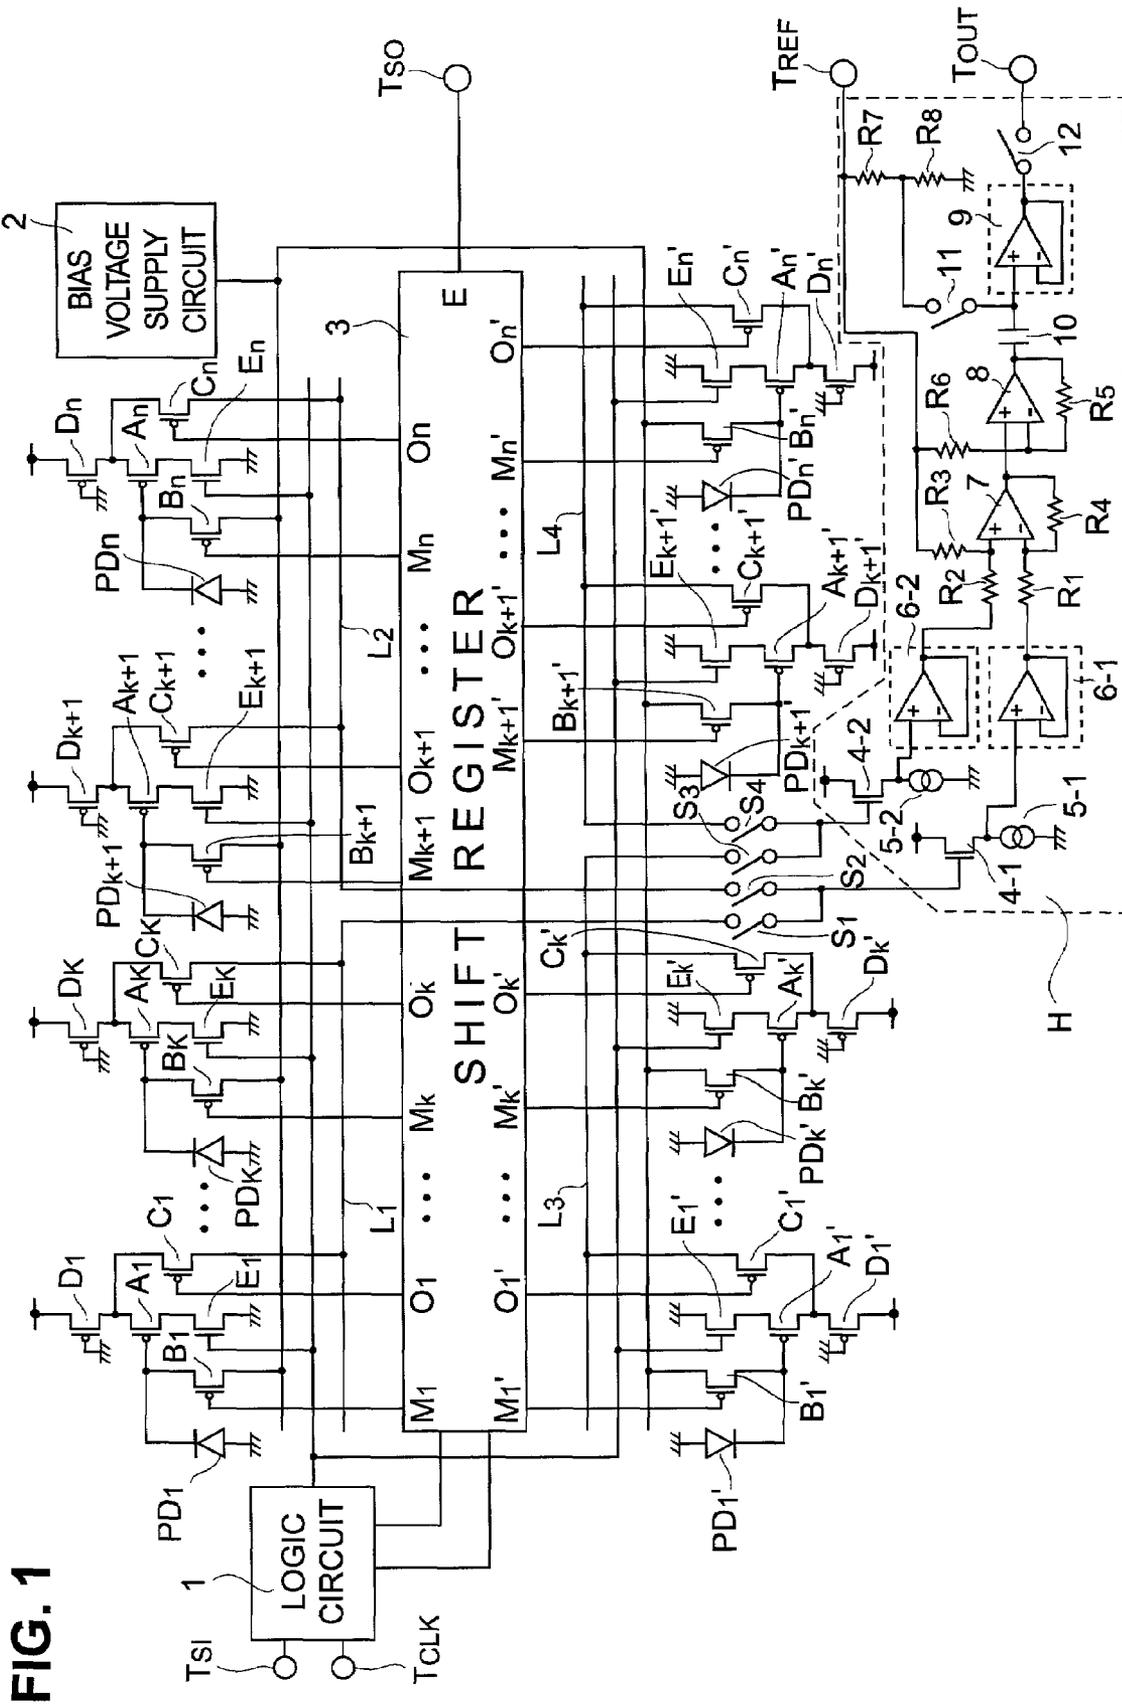


FIG. 1

FIG. 2

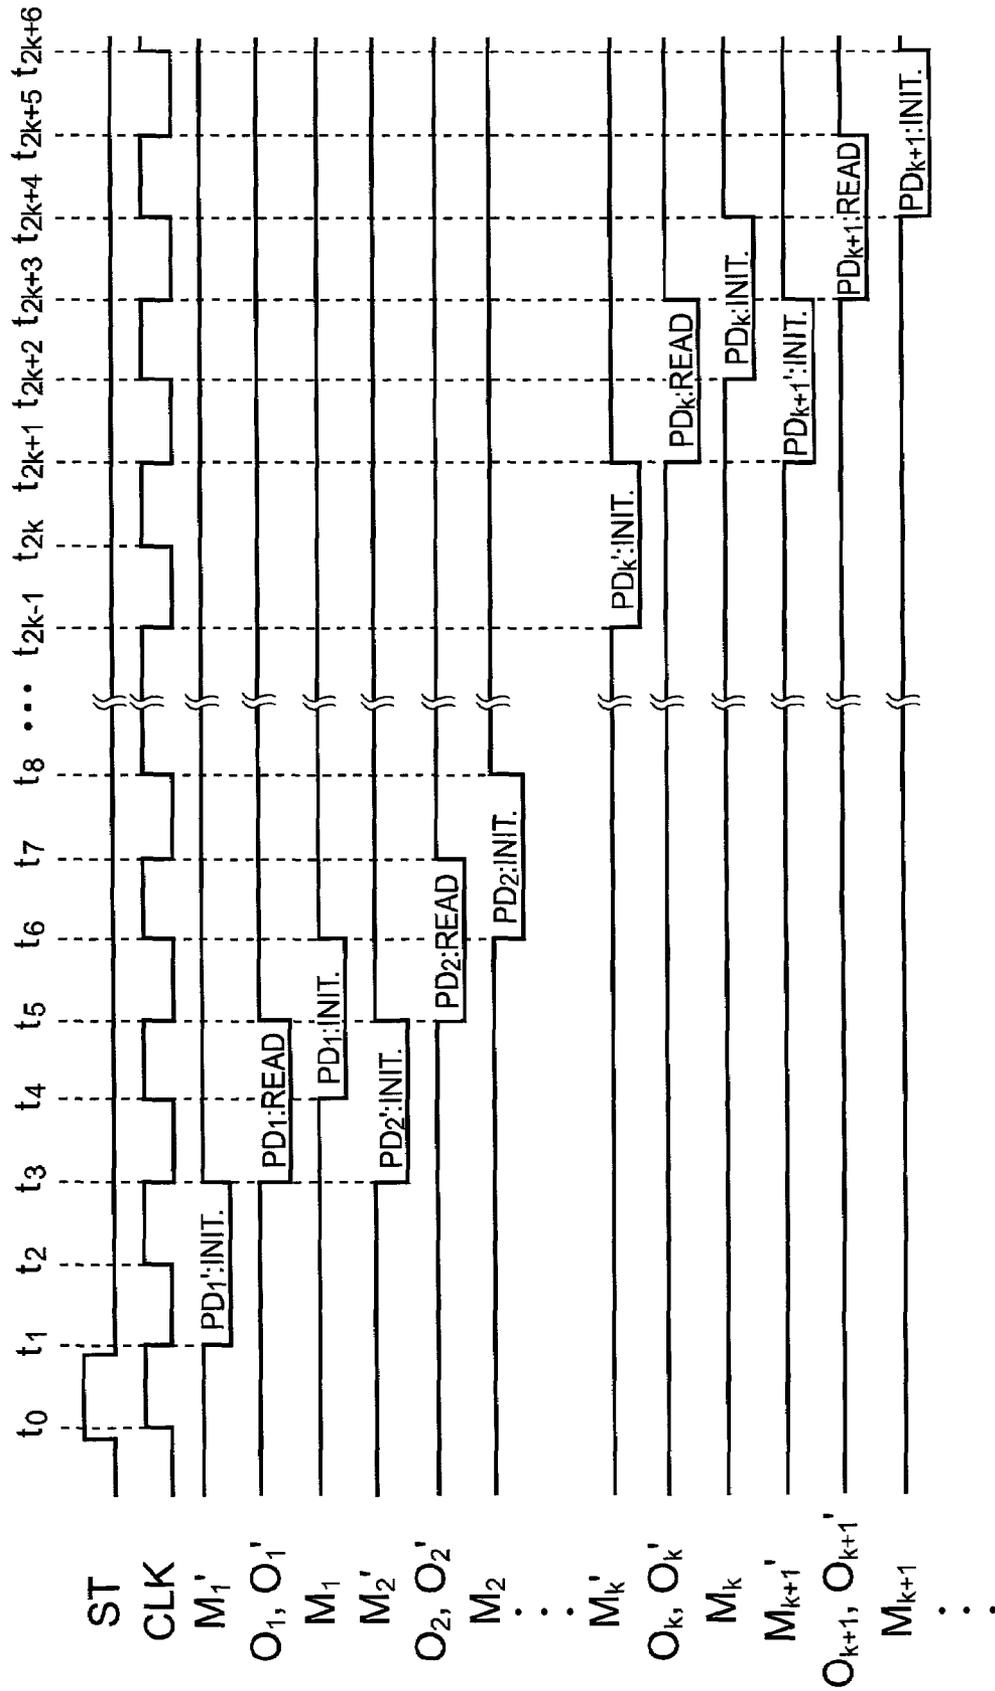


FIG. 3

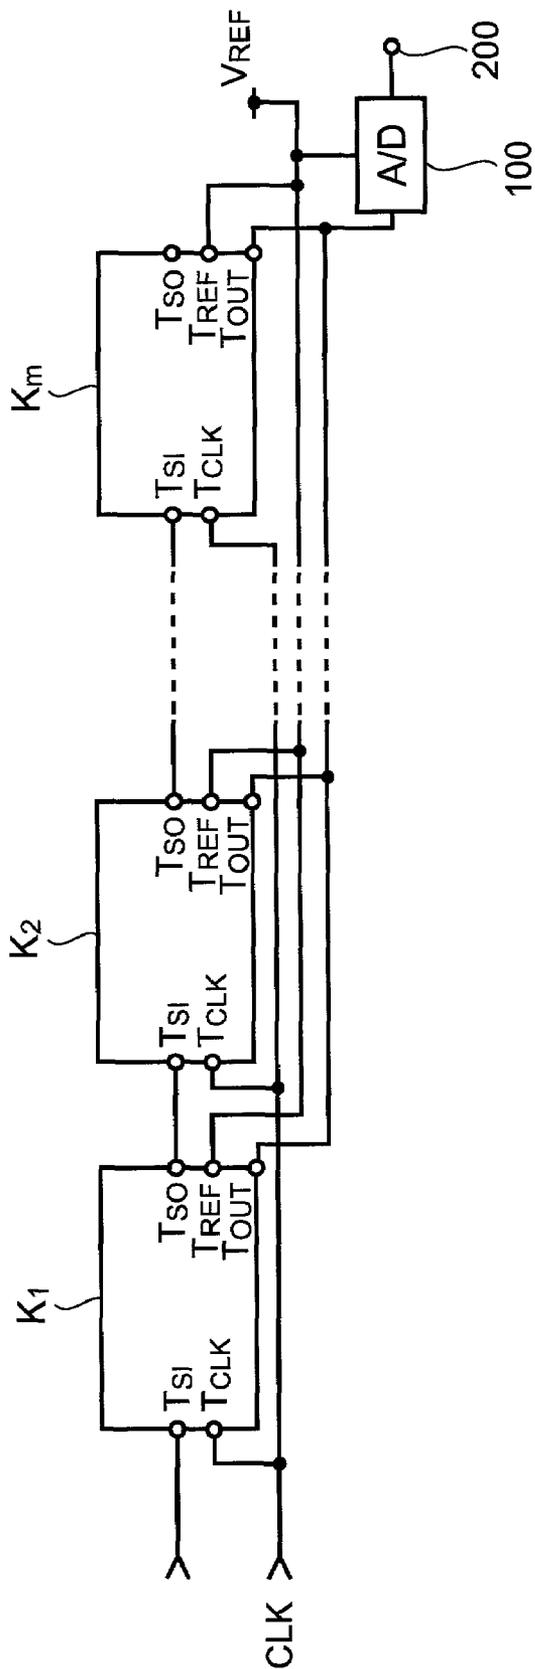


FIG. 4 PRIOR ART

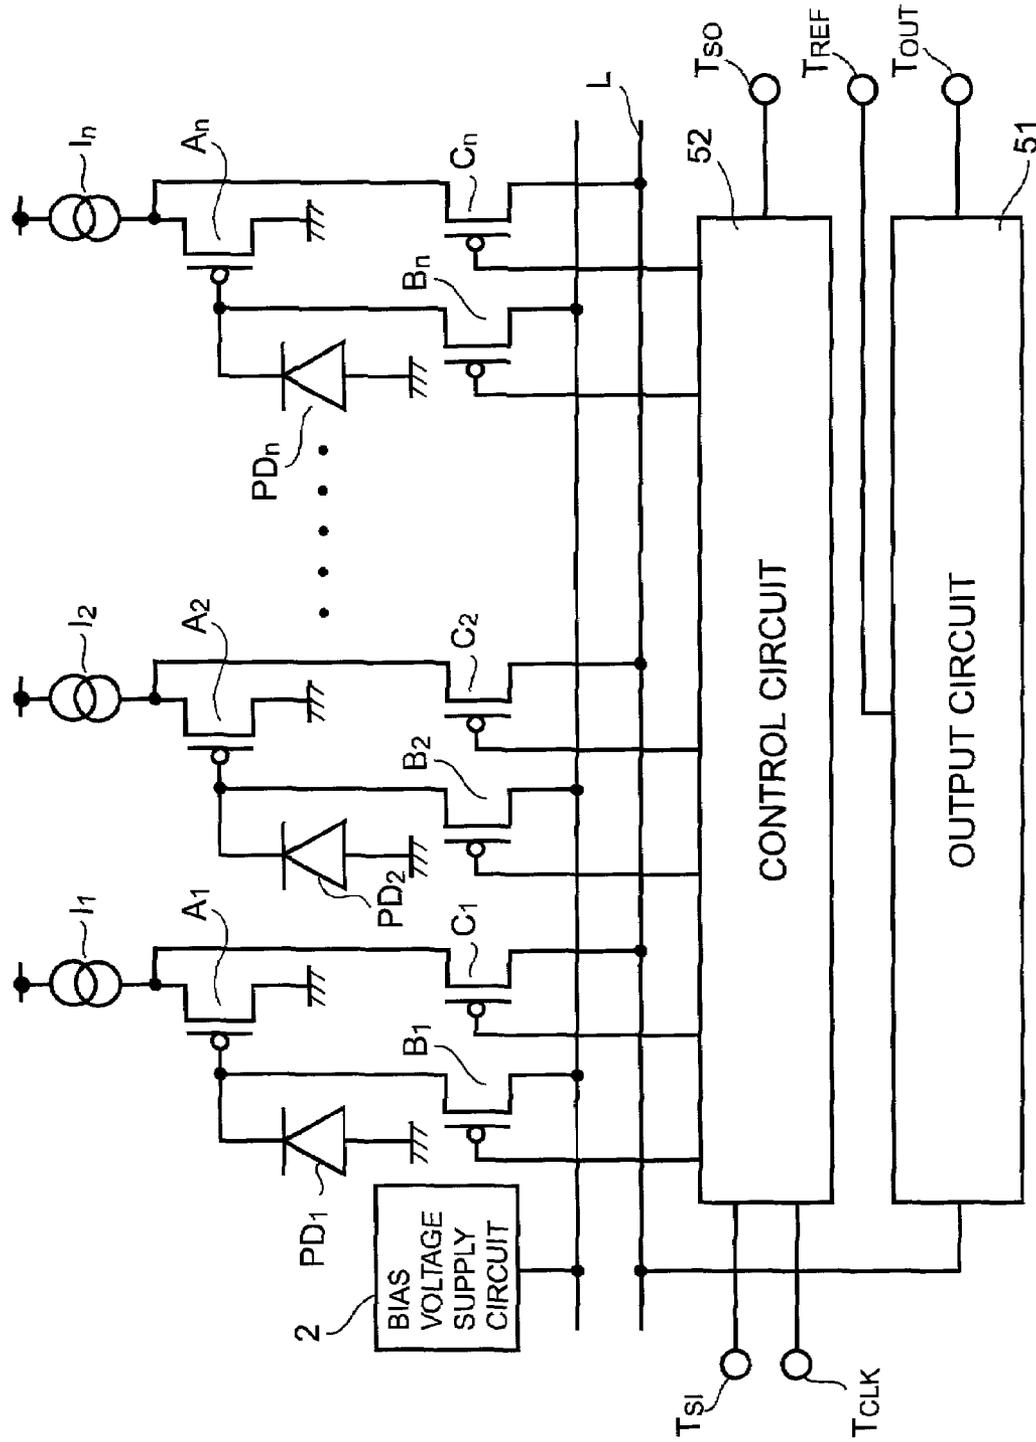


IMAGE READING DEVICE

BACKGROUND OF THE INVENTION

1. Field of the Invention

The present invention relates to an image reading device, such as an image sensor, that converts optical information to an electric signal.

2. Description of the Prior Art

As FIG. 3 shows, an image reading device is composed of IC chips K_1, K_2, \dots, K_m , for reading an image, arranged in a row and mounted on a printed circuit board (not shown). The IC chips K_1, K_2, \dots, K_m sequentially output photoelectric conversion signals, which are then converted by an A/D converter **100** into a digital signal, which is then fed out via an output terminal **200**. The IC chips K_1, K_2, \dots, K_m all have the same circuit configuration, of which a conventional example will be described below with reference to FIG. 4.

Photodiodes PD_1, PD_2, \dots, PD_n , serving as photoelectric conversion elements, have their anodes connected to ground, and have their cathodes connected respectively to the gates of p-channel MOSFETs (metal-oxide semiconductor field-effect transistors) A_1, A_2, \dots, A_n for amplification. The transistors A_1, A_2, \dots, A_n receive, at their sources, constant currents respectively from constant-current sources I_1, I_2, \dots, I_n , and have their drains connected to ground.

A bias voltage supply circuit **2** outputs a positive direct-current voltage stably. The voltage (hereinafter referred to as the "bias voltage") output from the bias voltage supply circuit **2** is applied, through the drain-source channels of p-channel MOSFETs B_1, B_2, \dots, B_n for switching, to the cathodes of the photodiodes PD_1, PD_2, \dots, PD_n respectively.

In this circuit configuration, when the transistor B_x ($x=1, 2, \dots, n$) remains on for a predetermined time or longer, a reverse bias is applied to the photodiode PD_x , and thus a predetermined amount of electric charge is accumulated therein. In the following descriptions, this will be depicted as "the photodiode PD_x being initialized."

When the transistor B_x turns from on to off, the initialization of the photodiode PD_x is broken off, and the accumulated electric charge is discharged in proportion to the amount of incident light, causing a current to flow. Thus, the photodiode PD_x gives a voltage proportional to the amount of incident light.

Moreover, a transistor C_x turns on, with the result that the voltage signal (hereinafter referred to simply as "the signal of the photodiode PD_x ") at the cathode of the photodiode PD_x is amplified by a source-follower circuit formed by the transistor A_x , is then subjected to further amplification, waveform shaping, and other processing by an output circuit **51**, and is then fed out via a terminal T_{OUT} (hereinafter, this will be depicted as "the signal of the photodiode PD_x being read out").

A control circuit **52** controls the transistors C_x in such a way that the signals of the photodiodes PD_1, PD_2, \dots, PD_n are output sequentially, and also controls the transistors B_x in such a way that the photodiode PD_x is initialized every time the signal of this photodiode PD_1 is read out.

However, in this conventional circuit configuration, the signals of all the photodiodes PD_1, PD_2, \dots, PD_n are transmitted to the output circuit **51** by way of a single output line L, which is thus provided so as to be common to as many as several tens to several hundred photodiodes. This makes the output line L considerably long, and thus imposes a limit on the operating frequency of the image reading

device, because, the longer the conductor laid as the output line L, the higher its resistance and capacitance, and thus the greater the resulting time constant.

Moreover, in the conventional circuit configuration, there are variations in the characteristics of the individual photodiodes PD_1, PD_2, \dots, PD_n , but nevertheless the signals read out from them are fed out intact. As a result, according to the position of the photodiodes within the IC chip, for example, the characteristics of the semiconductors, such as their degree of impurity and thickness, and the light shield conditions for the individual photodiodes vary, and thus the signals that these photodiodes output vary.

SUMMARY OF THE INVENTION

An object of the present invention is to provide an image reading device that is ready to operate at a higher operating frequency.

To achieve the above object, according to the present invention, an image reading device is built as an IC chip having a plurality of processing sections, of which each has a plurality of image reading photoelectric conversion elements, a plurality of transistors for reading a photoelectric conversion signal from the image reading photoelectric conversion elements, a signal selection circuit for sequentially selecting the plurality of transistors, and a signal output line by way of which the photoelectric conversion signal is transmitted.

This arrangement helps shorten the signal output line within each processing section. As a result, it is possible to reduce the resistance and capacitance of the conductor laid as the signal output line. Moreover, it is possible to reduce the number of transistors that are connected to a single signal output line and thereby reduce the parasitic capacitance connected to a single signal output line. This makes it possible to increase the operation speed.

BRIEF DESCRIPTION OF THE DRAWINGS

This and other objects and features of the present invention will become clear from the following description, taken in conjunction with the preferred embodiments with reference to the accompanying drawings in which:

FIG. 1 is a diagram showing the circuit configuration of each of the IC chips constituting an image reading device embodying the invention;

FIG. 2 is a timing chart of the relevant signals in each of the IC chips constituting the image reading device embodying the invention;

FIG. 3 is a diagram showing an outline of the circuit configuration of an image reading device; and

FIG. 4 is a diagram showing the circuit configuration of each of the IC chips constituting a conventional image reading device.

DESCRIPTION OF THE PREFERRED EMBODIMENTS

Hereinafter, an embodiment of the present invention will be described with reference to the drawings. First, the circuit configuration of each of the IC chips constituting an image reading device embodying the invention will be described with reference to FIG. 1.

Photodiodes $PD_1, \dots, PD_n, PD_1', \dots, PD_n'$, serving as photoelectric conversion elements, have their anodes connected to ground, and have their cathodes connected respec-

tively to the gates of p-channel MOSFETs $A_1, \dots, A_n, A_1', \dots, A_n'$ for amplification.

Here, the photodiodes PD_1', \dots, PD_n' are shielded from light so as not to be involved in image reading. In the following descriptions, these photodiodes will be referred to also as the "dummy photodiodes." On the other hand, the photodiodes PD_1, \dots, PD_n are not shielded from light, and are used in image reading. In the following descriptions, these photodiodes will be referred to also as the "image reading photodiodes."

The transistors $A_1, \dots, A_n, A_1', \dots, A_n'$ have their sources connected, through the drain-source channels of p-channel MOSFETs $D_1, \dots, D_n, D_1', \dots, D_n'$ respectively, to a supply voltage. The transistors $D_1, \dots, D_n, D_1', \dots, D_n'$ have their gates connected to ground, and the transistors $A_1, \dots, A_n, A_1', \dots, A_n'$ receive constant currents at their sources.

The transistors $A_1, \dots, A_n, A_1', \dots, A_n'$ have their drains connected, through the drain-source channels of n-channel MOSFETs $E_1, \dots, E_n, E_1', \dots, E_n'$ respectively, to ground. A logic circuit 1 controls the transistors $E_1, \dots, E_n, E_1', \dots, E_n'$ in such a way that they remain on only from immediately before the start of the reading of the signal from the first image reading photodiode PD_1 until the completion of the reading of the signal from the last image reading photodiode PD_n . This helps reduce electric power consumption.

A bias voltage (i.e. a stable direct-current voltage output from a bias voltage supply circuit 2) is applied, through the drain-source channels of p-channel MOSFETs $B_1, \dots, B_n, B_1', \dots, B_n'$ for switching, to the cathodes of the photodiodes $PD_1, \dots, PD_n, PD_1', \dots, PD_n'$ respectively. The transistors $B_1, \dots, B_n, B_1', \dots, B_n'$ respectively receive, at their gates, signals output from terminals $M_1, \dots, M_n, M_1', \dots, M_n'$ of a shift register 3.

The transistors A_1, \dots, A_k have their sources connected, respectively through the drain-source channels of p-channel MOSFETs C_1, \dots, C_k for switching, together to a first output line L1. The transistors A_{k+1}, \dots, A_n have their sources connected, respectively through the drain-source channels of p-channel MOSFETs C_{k+1}, \dots, C_n for switching, together to a second output line L2. The first and second output lines L1 and L2 are connected, respectively through a first and a second output line switching switch S1 and S2, together to the gate of an n-channel MOSFET 4-1.

The transistors A_1', \dots, A_k' have their sources connected, respectively through the drain-source channels of p-channel MOSFETs C_1', \dots, C_k' for switching, together to a third output line L3. The transistors A_{k+1}', \dots, A_n' have their sources connected, respectively through the drain-source channels of p-channel MOSFETs C_{k+1}', \dots, C_n' for switching, together to a fourth output line L4. The third and fourth output lines L3 and L4 are connected, respectively through a third and a fourth output line switching switch S3 and S4, together to the gate of an n-channel MOSFET 4-2.

The first, second, third, and fourth output line switching switches S1, S2, S3, and S4 are each composed of, for example, a p-channel MOSFET, and their on/off states are controlled by the logic circuit 1 in the manner described later.

The transistors $C_1, \dots, C_n, C_1', \dots, C_n'$ respectively receive, at their gates, signals output from terminals $O_1, \dots, O_n, O_1', \dots, O_n'$ of the shift register 3. The sources of the transistors 4-1 and 4-2 are connected, through constant current sources 5-1 and 5-2 respectively, to ground. The drains of the transistors 4-1 and 4-2 are connected to the supply voltage.

Buffer amplifiers 6-1 and 6-2 are each composed of an operational amplifier having its output fed back to its own inverting input terminal (-). The input sides of the buffer amplifiers 6-1 and 6-2 (i.e. the non-inverting input terminal (+) of each operational amplifier) are connected to the sources of the transistors 4-1 and 4-2 respectively.

That is, the signals of the image reading photodiodes PD_x ($x=1, 2, \dots, n$) are fed, through the source follower circuits formed by the transistors A_x respectively, and then through the source follower circuit formed by the transistor 4-1, to the buffer amplifier 6-1. On the other hand, the signals of the dummy photodiodes PD_x' are fed, through the source follower circuits formed by the transistors A_x' respectively, and then through the source follower circuit formed by the transistor 4-2, to the buffer amplifier 6-2.

The output side (the output terminal of the operational amplifier) of the buffer amplifier 6-1 is connected through a resistor R_1 to the inverting input terminal (-) of an operational amplifier 7. The output side of the buffer amplifier 6-2 is connected through a resistor R_2 to the non-inverting input terminal (+) of the operational amplifier 7.

To the non-inverting input terminal (+) of the operational amplifier 7, a direct-current reference voltage is fed from outside the IC chip via a terminal T_{REF} thereof through a resistor R_3 . The output terminal of the operational amplifier 7 is connected through a resistor R_4 to its own inverting input terminal (-), and also to the non-inverting input terminal (+) of an operational amplifier 8.

To the inverting input terminal (-) of the operational amplifier 8, its own output terminal is connected through a resistor R_5 , and also the reference voltage fed from outside via the terminal T_{REF} is applied through a resistor R_6 .

A buffer amplifier 9 is composed of an operational amplifier with its output fed back to its own inverting input terminal (-). To the input side of the buffer amplifier 9, the output terminal of the operational amplifier 8 is connected through a capacitor 10. Moreover, the input side of the buffer amplifier 9 is connected through a switch 11 to the node between resistors R_7 and R_8 that are connected in series between the terminal T_{REF} , to which the reference voltage is applied from outside, and ground.

The switch 11 is composed of, for example, an analog switch, and is controlled by the logic circuit 1 in such a way as to remain on only for a predetermined time before the start of the reading of the first image reading photodiode PD_1 .

The output of the buffer amplifier 9 is fed out through a switch 12 via a terminal T_{OUT} of the IC chip. The switch 12 is composed of, for example, an analog switch, and is controlled by the logic circuit 1 in such a way as to remain on only from immediately before the start of the reading of the signal from the first image reading photodiode PD_1 until the completion of the reading of the signal from the last image reading photodiode PD_n .

The logic circuit 1 receives a clock signal CLK fed in from outside via a terminal T_{CLK} of the IC chip and a start trigger signal ST fed in from outside via a terminal T_{ST} of the IC chip. The clock signal CLK fed to the individual IC chips are common to all of them. On the basis of the clock signal CLK and the start trigger signal ST fed thereto, the logic circuit 1 controls the transistors E_x and the switches 11 and 12 in the manner described above.

Moreover, before the start of the reading of the signal from the first image reading photodiode PD_1 , i.e. before time point t_3 shown in FIG. 2 described later, the logic circuit 1 turns on the first output line switching switch S1, turns off the second output line switching switch S2, turns on the third

output line switching switch S3, and turns off the fourth output line switching switch S4. Furthermore, in the last half of the period in which the signal from the photodiode PD_k is read, i.e. between time points t_{2k+2} and t_{2k+3} shown in FIG. 2 described later, the logic circuit 1 turns off the first output line switching switch S1, turns on the second output line switching switch S2, turns off the third output line switching switch S3, and turns on the fourth output line switching switch S4.

The start trigger signal ST, fed in via the terminal T_{ST} of the IC chip, and the clock signal CLK, fed in via the terminal T_{CLK} of the IC chip, are also fed through the logic circuit 1 to the shift register 3. As FIG. 2 shows, the shift register 3 sequentially outputs, in synchronism with the second and following trailing edges of the clock signal CLK after the rising edge of the start trigger signal ST, negative pulses, each having a pulse width equal to one period of the clock signal CLK, via its terminals O₁, O₂, O_n. The shift register 3 outputs the same signals as it outputs via its terminals O₁, O₁, O_n also via its terminals O₁', O₂', O_n'.

As a result, the transistors C₁ and C₁', the transistors C₂ and C₂', . . . , the transistors C_n and C_n' are sequentially kept on for one period of the clock signal CLK one pair after another, specifically in such a way that the transistors C₁ and C₁' remain on between time points t₃ and t₅, the transistors C₂ and C₂' remain on between time points t₅ and t₇, and so forth. Thus, the signals of the image reading photodiodes PD₁, PD₂, . . . , PD_n are sequentially fed to the gate of the transistor 4-1, and the signals of the dummy photodiodes PD₁', PD₂', . . . , PD_n' are sequentially fed to the gate of the transistor 4-2.

Moreover, as FIG. 2 shows, the shift register 3 also sequentially outputs, in synchronism with the third and following rising edges of the clock signal CLK after the rising edge of the start trigger signal ST, negative pulses, each having a pulse width equal to one period of the clock signal CLK, via its terminals M₁, M₂, . . . , M_n.

As a result, the transistors B₁, B₂, . . . , B_n are sequentially kept on for one period of the clock signal CLK one after another, specifically in such a way that the transistor B₁ remains on between time points t₄ and t₆, the transistor B₂ remains on between time points t₆ and t₈, and so forth. Thus, the image reading photodiodes PD₁, PD₂, . . . , PD_n are initialized sequentially.

In this way, if one pays attention to the first image reading photodiode PD₁, whereas the transistor C₁ is kept on between time points t₃ and t₅ so that the signal of the photodiode PD₁ is read out, the transistor B₁ is also kept on between time points t₄ and t₅ (i.e. during the last half of the read period) so that the photodiode PD₁ is initialized. Thus, only the signal read out between time points t₃ and t₄ (i.e. during the first half of the read period) is actually used. Likewise, also with the other image reading photodiodes PD₂, PD₃, . . . , PD_n, only the signals read out during the first half of their respective read period are actually used.

Moreover, as FIG. 2 shows, the shift register 3 also sequentially outputs, in synchronism with the trailing edges of the clock signal CLK after the rising edge of the start trigger signal ST, negative pulses, each having a pulse width equal to one period of the clock signal CLK, via its terminals M₁', M₂', . . . , M_n'.

As a result, the transistors B₁', B₂', . . . , B_n' are sequentially kept on for one period of the clock signal CLK one after another, specifically in such a way that the transistor B₁' remains on between time points t₁ and t₃, the transistor B₂'

remains on between time points t₃ and t₅, and so forth. Thus, the dummy photodiodes PD₁', PD₂', . . . , PD_n' are initialized sequentially.

Moreover, the shift register 3 outputs, at its terminal E, a signal, which is fed out of the IC chip via its terminal T_{SO} so as to be fed to the terminal T_{ST} of the next IC chip. That is, this signal is used as the start trigger signal ST in the next IC chip. Here, the shift register 3 outputs one positive pulse via its terminal E with such appropriate timing as to prevent interference between the reading of the signal of the last image reading photodiode PD_n of the IC chip under discussion and the reading of the signal of the first image reading photodiode PD₁ of the next IC chip.

In this circuit configuration, the differences between the signals of the image reading photodiodes PD_x and the signals of the corresponding dummy photodiodes PD_x' are output. Thus, even if there are variations among the output signals from the individual photodiodes within an IC chip according to their position, for example, due to variations in the characteristics of the semiconductors, such as their degree of impurity and thickness, and variations in the light shield conditions of the individual photodiodes, such variations are cancelled. This helps enhance the uniformity of the signal levels obtained.

Moreover, instead of transmitting all the signals from the individual image reading photodiodes PD₁, . . . , PD_n to the output circuit H by way of a single output line, the signals from the group of the image reading photodiode PD₁, . . . , PD_k are transmitted by way of the first output line L1, and the signals from the group of the image reading photodiode PD_{k+1}, . . . , PD_n are transmitted by way of the first output line L2. Likewise, instead of transmitting all the signals from the dummy photodiodes PD₁', . . . , PD_n' to the output circuit H by way of a single output line, the signals from the group of the dummy photodiode PD₁', . . . , PD_k' are transmitted by way of the third output line L3, and the signals from the group of the dummy photodiode PD_{k+1}', . . . , PD_n' are transmitted by way of the fourth output line L4. This makes it possible to shorten the output line substantially in half. Shortening the conductor laid as the output line results in reducing its resistance and capacitance, and also in reducing the parasitic capacitance due to the transistors connected thereto in half. This reduces the resulting time constant, and thus makes it possible to increase the operating frequency of the image reading device. Specifically, whereas the operating frequency conventionally achieved is limited to 1.5 to 2.0 MHz, that achieved in this embodiment is as high as 3.0 to 4.0 MHz.

Where, as in the embodiment described above, the image reading photodiodes are divided into two groups, they are classified, for example, according to whether the signals from them are read out in the first half or latter half of the period for reading one complete image. The image reading photodiodes may be divided into a plurality of groups, i.e. not only two but also three or more; in any case, output lines are provided one for each group.

It is possible to omit the dummy photodiodes completely, or provide only one dummy photodiode common to all the image reading photodiodes and output the differences between the signals of the individual image reading photodiodes and the signal of the dummy photodiode. This helps simplify the circuit configuration, and thus contributes to miniaturization and cost reduction.

Providing as many dummy photodiodes as image reading photodiodes, however, makes it possible to arrange the dummy photodiodes close to the corresponding image reading photodiodes. Thus, in this arrangement, outputting the

differences between the signals of the image reading photodiodes and the signals of the dummy photodiodes arranged close thereto makes it possible to reduce variations among the output signals from the individual photodiodes within an IC chip according to their position, for example, due to variations in the characteristics of the semiconductors, such as their degree of impurity and thickness, and variations in the light shield conditions of the individual photodiodes.

As described above, according to the present invention, in an image reading device, it is possible to shorten the output line by way of which signals obtained from photoelectric conversion elements are transmitted to an output circuit, and also reduce the number of transistors connected to one output line. That is, it is possible to reduce the resistance and capacitance of the conductor laid as the output line. This reduces the parasitic capacitance due to the transistors connected to the output line, and thereby reduces the resulting time constant. In this way, it is possible to increase the operating frequency of the image reading device and obtain outputs corrected for variations in the characteristics of photodiodes.

What is claimed is:

1. An IC chip for reading an image, comprising:

a plurality of image reading photoelectric conversion elements divided into a plurality of groups;

a read selection circuit for sequentially selecting the plurality of image reading photoelectric conversion elements and reading a photoelectric conversion signal from the selected image reading photoelectric conversion element;

a plurality of signal output lines by way of which the photoelectric conversion signal is transmitted, each of the plurality of signal output lines being independently provided from each other and corresponding to each of the plurality of groups;

an output circuit;

a signal output line switching circuit connected between the plurality of signal output lines and the output circuit for sequentially selecting among the plurality of signal output lines to lead the photoelectric conversion signal transmitted through the selected signal output line to the output circuit;

a logic circuit for controlling the signal output line switching circuit to switch from a signal output line currently selected to a signal output line corresponding to the next group after a last photoelectric conversion signal in the currently selected group has been read but before a first photoelectric conversion signal in the next group is read; and

an initialization selection circuit for sequentially selecting the plurality of image reading photoelectric conversion elements and initializing the selected image reading photoelectric conversion element,

wherein the read selection circuit reads the photoelectric conversion signal from the selected image reading photoelectric conversion element during one period of a clock signal, and

wherein the initialization selection circuit initializes the selected image reading photoelectric conversion element during a last half of said one period and during a first half of a next period of the clock signal.

2. An IC chip for reading an image, comprising:

a plurality of image reading photoelectric conversion elements divided into a plurality of first groups;

a first read selection circuit for sequentially selecting the plurality of image reading photoelectric conversion

elements and reading a first photoelectric conversion signal from the selected image reading photoelectric conversion element;

a plurality of first signal output lines by way of which the first photoelectric conversion signal is transmitted from the plurality of image reading photoelectric conversion elements, each of the plurality of first signal output lines being independently provided from each other and corresponding to each of the plurality of first groups;

a plurality of dummy photoelectric conversion elements divided into a plurality of second groups, each of the plurality of dummy photoelectric conversion elements shielded from light and forming an exclusive pair with one of the plurality of image reading photoelectric conversion elements by being arranged in close proximity thereto;

a second read selection circuit for sequentially selecting the plurality of dummy photoelectric conversion elements and reading a second photoelectric conversion signal from the selected dummy photoelectric conversion element;

a plurality of second signal output lines by way of which the second photoelectric conversion signal is transmitted from the plurality of dummy photoelectric conversion elements, each of the plurality of second signal output lines being independently provided from each other and corresponding to each of the plurality of second groups;

an output circuit;

a signal output line switching circuit connected between the plurality of first signal output lines and the output circuit for sequentially selecting among the plurality of first signal output lines to lead the first photoelectric conversion signal transmitted through the selected first signal output line to the output circuit and also connected between the plurality of second signal output lines and the output circuit for sequentially selecting among the plurality of second signal output lines to lead the second photoelectric conversion signal transmitted through the selected second signal output line to the output circuit; and

a logic circuit for controlling the signal output line switching circuit to switch from a first signal output line currently selected to a first signal output line corresponding to the first group subsequently selected and from a second signal output line currently selected to a second signal output line corresponding to the second group subsequently selected, after a last image reading photoelectric conversion element in a first group currently selected and a last dummy photoelectric conversion element in a second group currently selected have been read but before a first image reading photoelectric conversion element in a first group subsequently selected and a first dummy photoelectric conversion element in a second group subsequently selected are read.

3. An IC chip for reading an image as claimed in claim 2, further comprising:

a first initialization selection circuit for sequentially selecting the plurality of image reading photoelectric conversion elements and initializing the selected image reading photoelectric conversion element; and

a second initialization selection circuit for sequentially selecting the plurality of dummy photoelectric conversion elements and initializing the selected dummy photoelectric conversion element,

wherein the first read selection circuit reads the first photoelectric conversion signal from the selected image reading photoelectric conversion element during one period of a clock signal, and the first initialization selection circuit initializes the selected image reading photoelectric conversion element during a last half of said one period and during a first half of a next period of the clock signal, and

wherein the second read selection circuit reads the second photoelectric conversion signal from a dummy photoelectric conversion element that forms a pair with the selected image reading photoelectric conversion element during said one period, and the second initialization selection circuit initializes the dummy photoelectric conversion element that forms a pair with the selected image reading photoelectric conversion element during a full period prior to said one period of the clock signal.

4. An image reading device comprising:

one or more IC chips for reading an image, each comprising:

a plurality of image reading photoelectric conversion elements divided into a plurality of groups;
a read selection circuit for sequentially selecting the plurality of image reading photoelectric conversion elements and reading a photoelectric conversion signal from the selected image reading photoelectric conversion element;

a plurality of signal output lines by way of which the photoelectric conversion signal is transmitted, each of the plurality of signal output lines being independently provided from each other and corresponding to each of the plurality of groups;

an output circuit;

a signal output line switching circuit connected between the plurality of signal output lines and the output circuit for sequentially selecting among the plurality of signal output lines to lead the photoelectric conversion signal transmitted through the selected output line to the output circuit;

a clock input terminal by way of which a clock signal is fed in;

a start trigger signal input terminal by way of which a start trigger signal for sequentially scanning an image being read is fed in from an IC chip for reading an image in a previous stage;

a start trigger signal output terminal by way of which a start trigger signal for sequentially scanning the image being read is fed out to an IC chip for reading an image in a following stage;

a logic circuit for controlling the signal output line switching circuit to switch from a signal output line currently selected to a signal output line corresponding to a next group after a last photoelectric conversion signal in the currently selected group has been read but before a first photoelectric conversion signal in the next group is read; and

an initialization selection circuit for sequentially selecting the plurality of image reading photoelectric conversion elements and initializing the selected image reading photoelectric conversion element,

wherein the read selection circuit reads the photoelectric conversion signal from the selected image reading photoelectric conversion element during one period of a clock signal, and

wherein the initialization selection circuit initializes the selected image reading photoelectric conversion ele-

ment during a last half of said one period and during a first half of a next period of the clock signal, wherein the image reading device further comprises an A/D converter for converting a signal output from the output circuit of said one or more IC chips into a digital signal.

5. An image reading device comprising:

one or more IC chips for reading an image, each comprising:

a plurality of image reading photoelectric conversion elements divided into a plurality of first groups;

a first read selection circuit for sequentially selecting the plurality of image reading photoelectric conversion elements and reading a first photoelectric conversion signal from the selected image reading photoelectric conversion element;

a plurality of first signal output lines by way of which the first photoelectric conversion signal is transmitted from the plurality of image reading photoelectric conversion elements, each of the plurality of first signal output lines being independently provided from each other and corresponding to each of the plurality of first groups;

a plurality of dummy photoelectric conversion elements divided into a plurality of second groups, each of the plurality of dummy photoelectric conversion elements shielded from light and forming an exclusive pair with one of the plurality of image reading photoelectric conversion elements by being arranged in close proximity thereto;

a second read selection circuit for sequentially selecting the plurality of dummy photoelectric conversion elements and reading a second photoelectric conversion signal from the selected dummy photoelectric conversion element;

a plurality of second signal output lines by way of which the second photoelectric conversion signal is transmitted from the plurality of dummy photoelectric conversion elements, each of the plurality of second signal output lines being independently provided from each other and corresponding to each of the plurality of second groups;

an output circuit;

a signal output line switching circuit connected between the plurality of first signal output lines and the output circuit for sequentially selecting among the plurality of first signal output lines to lead the first photoelectric conversion signal transmitted through the selected first signal output line to the output circuit and also connected between the plurality of second signal output lines and the output circuit for sequentially selecting among the plurality of second signal output lines to lead the second signal output line to the output circuit; and

a clock input terminal by way of which a clock signal is fed in;

a start trigger signal input terminal by way of which a start trigger signal for sequentially scanning an image being read is fed in from an IC chip for reading an image in a previous stage;

a start trigger signal output terminal by way of which a start trigger signal for sequentially scanning the image being read is fed out to an IC chip for reading an image in a following stage; and

a logic circuit for controlling the signal output line switching circuit to switch from a first signal output line currently selected to a first signal output line

11

corresponding to the first group subsequently selected and from a second signal output line currently selected to a second signal output line corresponding to the second group subsequently selected, after a last image reading photoelectric conversion element in a first group currently selected and a last dummy photoelectric conversion element in a second group currently selected have been read but before a first image reading photoelectric conversion

12

element in a first group subsequently selected and a first dummy photoelectric conversion element in a second group subsequently selected are read, wherein the image reading device further comprises an A/D converter for converting a signal output from the output circuit of said one or more IC chips into a digital signal.

* * * * *