



(51) International Patent Classification:

B23B 45/00 (2006.01) **B23B 47/00** (2006.01)

(21) International Application Number:

PCT/US2018/000213

(22) International Filing Date:

16 August 2018 (16.08.2018)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

62/546,032 16 August 2017 (16.08.2017) US

(71) Applicant: **MILWAUKEE ELECTRIC TOOL CORPORATION** [US/US]; 13135 West Lisbon Road, Brookfield, Wisconsin 53005 (US).

(72) Inventors: **PETERSON, Kenneth D.**; 693 Winding Brook Trail, Little Suamico, Wisconsin 54141 (US). **WARD, Bryan C.**; 2473 N. 88th Street, Wauwatosa, Wisconsin

53226 (US). **PANGERC, James E.**; N32 W23450 Field-side Road, Pewaukee, Wisconsin 53072 (US).

(74) Agent: **MUTH, Jason, P.** et al.; Michael Best & Friedrich LLP, 100 East Wisconsin Avenue, Suite 3300, Milwaukee, Wisconsin 53202-4108 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ,

(54) Title: DUST COLLECTOR FOR POWER TOOL

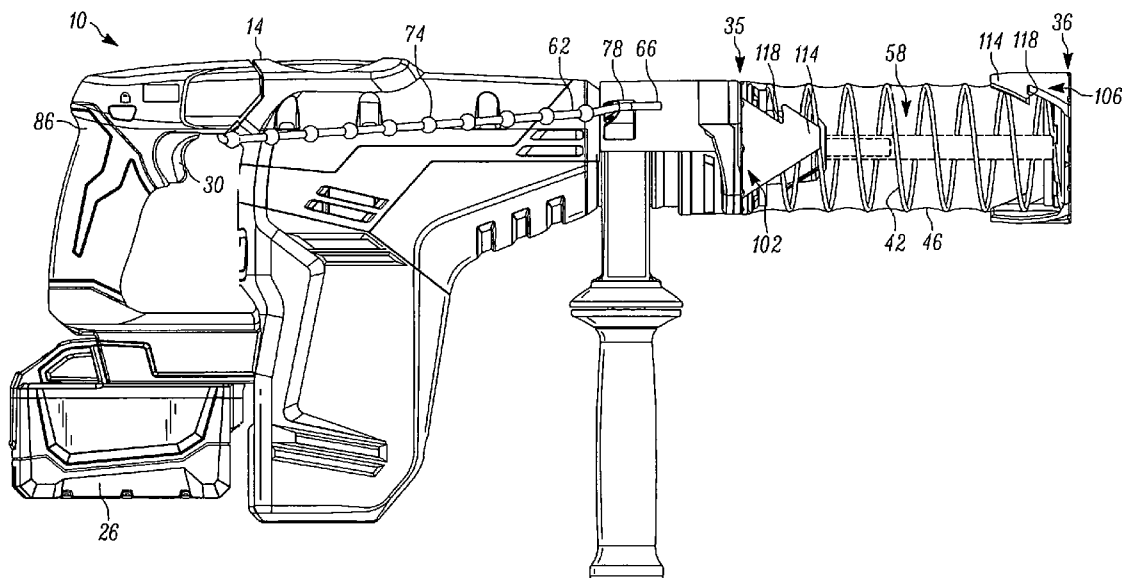


FIG. 2

(57) Abstract: A dust collector operable to collect dust and debris generated during operation of a power tool includes a mounting base configured to couple to the power tool. The mounting base defines a longitudinal axis. The dust collector also includes a shroud extending from the mounting base. The shroud includes a first end adjacent the mounting base, a second end operable to contact a workpiece, a sleeve extending between the first end and the second end, and a spring biasing the second end away from the first end. The second end is movable relative to the first end against the spring.



UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

- *with international search report (Art. 21(3))*
- *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))*

DUST COLLECTOR FOR POWER TOOL

CROSS-REFERENCE TO RELATED APPLICATIONS

[0001] This application claims priority to co-pending U.S. Provisional Patent Application No. 62/546,032, filed on August 16, 2017, the entire contents of which are incorporated herein by reference.

FIELD OF THE INVENTION

[0002] The present invention relates to dust containment for a power tool.

BACKGROUND OF THE INVENTION

[0003] During operation of a rotary power tool (e.g., a drill/driver, hammer drill, etc.), an operator may drive a fastener into a workpiece, drill a hole in a workpiece, or mount additional tools on the working end of the power tool to perform other various tasks. While performing, for example, a drilling operation, dust and other debris can be accumulated from the workpiece. In some situations, dust and other debris from the workpiece is undesirable as particles may become airborne and create a dusty or unsafe worksite. The workpiece may also be in hard-to-reach areas where cleanup of the debris is difficult or the workpiece may be overhead where unwanted debris may fall on the operator.

SUMMARY OF THE INVENTION

[0004] The invention provides, in one aspect, a dust collector operable to collect dust and debris generated during operation of a power tool. The dust collector includes a mounting base configured to couple to the power tool. The mounting base defines a longitudinal axis. The dust collector also includes a shroud extending from the mounting base. The shroud includes a first end adjacent the mounting base, a second end operable to contact a workpiece, a sleeve extending between the first end and the second end, and a spring biasing the second end away from the first end. The second end is movable relative to the first end against the spring.

[0005] The invention provides, in another aspect, a dust collector operable to collect dust and debris generated during operation of a power tool. The dust collector includes a mounting base configured to couple to the power tool. The mounting base defines a

longitudinal axis. The dust collector also includes a tether coupled to the mounting base. The tether is configured to be wrapped around a portion of the power tool. The dust collector further includes a shroud extending from the mounting base. The shroud includes a first end adjacent the mounting base, a second end operable to contact a workpiece, and a sleeve extending between the first end and the second end.

[0006] The invention provides, in yet another aspect, a power tool system including a power tool having a housing, a working end, and a tool bit extending from the working end. The power tool system also includes a dust collector operable to collect dust and debris generated during operation of the power tool. The dust collector includes a mounting base seated against the working end of the power tool. The mounting base defines an aperture through which the tool bit extends and a longitudinal axis along which the tool bit extends. The dust collector also includes a tether coupled to the mounting base. The tether is wrapped around a portion of the housing to secure the dust collector to the power tool. The dust collector further includes a shroud extending from the mounting base. The shroud has a first end adjacent the mounting base, a second end operable to contact a workpiece, a sleeve extending between the first end and the second end, and a spring biasing the second end away from the first end. The second end is movable relative to the first end against the spring.

[0007] Other features and aspects of the invention will become apparent by consideration of the following detailed description and accompanying drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

[0008] FIG. 1 is a side view of a rotary power tool to be used with a dust collector.

[0009] FIG. 2 is a side view of a dust collector attached to the power tool of FIG. 1 and having various tool bits coupled to the tool.

[0010] FIG. 3 is a top view of the dust collector attached to the power tool of FIG. 1 with a tether secured to the power tool.

[0011] FIG. 4 is a perspective view of the dust collector in an extended position.

[0012] FIG. 5 is an exploded view of the dust collector.

[0013] FIG. 6 is a partial cross-sectional view of the dust collector in a collapsed position, illustrating a vacuum pathway.

[0014] FIG. 7 is a perspective view of the dust collector, showing an end configured to abut a workpiece.

[0015] FIG. 8 is a top view of the dust collector, illustrating a tether in accordance with an alternative embodiment of the invention.

[0016] Before any embodiments of the invention are explained in detail, it is to be understood that the invention is not limited in its application to the details of construction and the arrangement of components set forth in the following description or illustrated in the accompanying drawings. The invention is capable of other embodiments and of being practiced or of being carried out in various ways. Also, it is to be understood that the phraseology and terminology used herein is for the purpose of description and should not be regarded as limiting.

DETAILED DESCRIPTION

[0017] FIG. 1 illustrates a rotary power tool 10, and more specifically a rotary hammer, including a housing 14, a motor (not shown) disposed within the housing 14, and a working end 18 driven by activation of the motor. A tool bit may be secured to the working end 18 for co-rotation with the working end 18 (e.g., using a spline fit) and performing work on a workpiece. In the illustrated construction, the rotary power tool 10 includes a quick-release mechanism 22 disposed at the working end 18 to facilitate quick removal and replacement of different tool bits. The motor of the rotary power tool 10 is configured as a DC motor that receives power from an on-board power source (e.g., a battery 26). The battery 26 may include any of a number of different nominal voltages (e.g., 12V, 18V, etc.), and may be configured having any of a number of different chemistries (e.g., lithium-ion, nickel-cadmium, etc.). Alternatively, the motor may be powered by a remote power source (e.g., a household electrical outlet) through a power cord. The motor is selectively activated by depressing a trigger 30 or other actuator.

[0018] FIGS. 2-5 illustrate a dust collector 34 for use with the power tool 10. The dust collector 34 is selectively coupled to the rotary power tool 10 and defines a first end 35 configured to abut the power tool 10 and a second end 36 configured to abut a workpiece

while in use, as shown in FIG. 2. The dust collector 34 effectively acts as a shroud 37 around the working end 18 and a tool bit to collect dust and debris during operation. The illustrated dust collector 34 includes a mounting base 38 adjacent the first end 35, a spring 42 extending away from the mounting base 38 toward the second end 36, and a sleeve 46 disposed around the spring 42.

[0019] The mounting base 38 defines a longitudinal axis 50 (FIG. 4) along which the dust collector 34 receives the rotary power tool 10. The base 38 seats against the working end 18 of the power tool 10 when the dust collector 34 is connected to the power tool 10. As best shown in FIGS. 2 and 3, the base 38 abuts an end of the tool 10, such as the chuck assembly. Through such an abutment, the dust collector 34 can be used with substantially any drill-style power tool 10, regardless of manufacture. Due to the engagement of the base 38 with the tool 10, the base 38 includes a hardened metal plate which is used as a bearing surface for the chuck assembly of the tool 10. In other embodiments, the hardened metal plate can be replaced with slip washers or bearings. Also, in some embodiments, the dust collector 34 can be configured such that the base 38 can fully receive the chuck assembly of the working end within the shroud 37 (opposed to abutting the end of the chuck assembly).

[0020] The base 38 includes an aperture 54 (FIG. 5) that allows a tool bit (e.g., a drill bit) to extend through the base 38 and into a space 58 defined within the sleeve 46. Depending upon the diameter of the bit used, different sized apertures can be provided in the base 38. In preferred embodiments, the aperture 54 is closely matched to the diameter of the bit (or a portion of the bit) to inhibit dust from escaping at this interface. In some embodiments, the base 38 can include a shutter and/or gasket around the aperture 54 to allow the space between the bit and the aperture 54 to be reduced or substantially eliminated.

[0021] The spring 42 is coupled to the base 38 and extends between the first end 35 and the second end 36. In the illustrated embodiment, the spring 42 is a coil spring. In other embodiments, the spring 42 may be a different type of spring extending between the first and second ends 35, 36. The spring 42 facilitates movement of the second end 36 relative to the first end 35 as a tool bit is gradually drilled into a workpiece. The spring 42 (and therefore the dust collector 34) compresses as the working end 18 of the power tool 10 moves closer to the workpiece such that the dust collector 34 does not interfere with the bit engaging the workpiece. The sleeve 46 also extends between the first end 35 and the second end 36, and entraps dust and debris within the space 58 during a drill operation. Due to the rigidity of the

spring 42 and the ends 35, 36, the bit does not engage or contact the sleeve 46 prior to engagement with the workpiece (e.g., while cantilevered) or during use. In other words, the spring 42 and the sleeve 46 are circumferentially disposed around the longitudinal axis 50.

[0022] The sleeve 46 is composed of a flexible material (e.g., fabric, plastic, etc.) that is capable of folding and bending onto itself while also inhibiting dust particles from escaping the sleeve 46. In other embodiments, the sleeve 46 may be a flexible bellows or other suitable device that is capable of longitudinal movement with the spring 42 and can entrap dust particles, yet is durable and robust. Additionally or alternatively, the sleeve 46 may be made of or coated with a material that resists dust from clinging to the sleeve 46. The sleeve 46 is made of a clear material to maintain visibility inside the shroud 37. In some embodiments, the sleeve 46 may be made of a material having a thickness of 0.003 inches (3 mil or 300 gauge) and a haze of 6.5%. For example, the sleeve 46 may be composed of high-abuse shrink film manufactured by CorTuff®. In other embodiments, the sleeve 46 may have a haze that is less than 6.5%. In further embodiments, the sleeve 46 may be composed of blow molded high-density polyethylene (HDPE) film having a thickness of, for example, 0.001 inches (1 mil).

[0023] In some embodiments, the sleeve 46 may be composed of a material having a natural resiliency. In such embodiments, the material of the sleeve 46 itself may provide a spring force to facilitate movement of the second end 36 away from the first end 35. The spring 46 may therefore be omitted or considered integrated into the sleeve 46.

[0024] With continued reference to FIGS. 2-5, the dust collector 34 includes a tether 62 for selectively mounting the dust collector 34 on the power tool 10. The tether 62 is composed of a polymer material having elasticity for allowing the tether 62 to flex slightly. As shown in FIG. 3, the tether 62 includes a first end 66, a second end 70, and a plurality of bulbous elements 74 disposed between the first end 66 and the second end 70. The first end 66 of the tether 62 is coupled to the mounting base 38 at a first anchor 78. One of the bulbous elements 74 is received within the anchor 78. In contrast, the second end 70 (or proximate thereto) of the tether 62 is selectively couplable to a second anchor 98 of the mounting base 38 via another one of the bulbous elements 74. The first and second anchors 78, 98 are disposed on opposite sides of the mounting base 38. In some embodiments, the tether 62 can be permanently (or semi-permanently (i.e., detachable for replacement)) coupled to the first anchor 78.

[0025] In order to maintain a connection between the dust collector 34 and the power tool 10, the tether 62 is coupled to the first anchor 78 and wrapped around various portions of the tool 10 to couple the dust collector 34 to the tool 10. The second end 70 (or proximate thereto) of the tether 62 is coupled to the second anchor 98. As illustrated in FIG. 2, for example, the tether 62 can pass through an opening in the housing 14 near the tool actuator or trigger 30. Alternatively, the tether 62 can be wrapped around a rear end 86 of the housing 14, as shown in FIG. 3. Depending upon the configuration of the tool 10, other features may be used to tether the dust collector 34 to the tool 10. A portion near the first end 66 of the tether 62 between adjacent bulbous elements 74 passes through a slot 89 in the first anchor 78, and one of the bulbous elements 74 seats within a concave seat 93 of the first anchor 78, as illustrated in FIG. 4. Similarly, a portion near the second end 70 of the tether 62 between adjacent bulbous elements 74 passes through a slot 90 in the second anchor 98 and one of the bulbous elements 74 seats within a concave seat 94 of the second anchor 98. The tether 62 is pulled taut so the bulbous element 74 remains seated within the concave seats 93, 94 as a result of the elasticity of the tether 62. The bulbous elements 74 are spaced apart at equal distances along the tether 62 to accommodate different sized power tools 10. Although the tether 62 of the illustrated embodiment is composed of an elastic polymer material, in other embodiments, the tether 62 may alternatively be a Velcro® strap or other suitable type strap or cord.

[0026] With reference to FIGS. 5 and 6, a plug 100 disposed near the first end 66 of the tether 62. The plug 100 selectively closes off a vacuum port 101. In a situation where an operator desires to vacuum the dust and debris from the space 58, a vacuum source 99 can be coupled to the vacuum port 101 once the plug 100 is removed. A passageway 103 formed in the mounting base 38 places the vacuum port 101 in fluid communication with the space 58, allowing the dust and debris to be drawn out. In such a situation, an operator would remove plug 100 from the vacuum port 101, and connect the tether 62 between the first anchor 78 and the second anchor 98 to maintain the dust collector 34 on the power tool 10. In some embodiments, the plug 100 may also be coupled to the tether 62 such that the tether 62 keeps the plug 100 coupled to the dust collector 34 when not in use to inhibit the plug 100 from getting lost.

[0027] With continued reference to FIGS. 4-6, the dust collector 34 is moveable between an extended position (FIG. 4) and a collapsed position (FIG. 6). The dust collector

34 includes a first connector 102 disposed at the first end 35 and a second connector 106 disposed at the second end 36 that maintain the dust collector 34 in the collapsed position. The first and second connectors 102, 106 each include an annular ring 110 with multiple projections 114 extending away from the annular ring 110. As illustrated in FIG. 5, the projections 114 of the first connector 102 extend toward the projections 114 of the second connector 106. Each projection 114 includes a stepped surface or shoulder 118. The shoulder 118, for example, of the first connector 102 interlocks with the shoulder 118 of the second connector 106 for maintaining the dust collector 34 in the collapsed position, as shown in FIG. 6. This arrangement can protect the shroud 37 from damage when not in use (e.g., during transport and storage) and can help hold the dust collector 34 in the collapsed position when changing tool bits. In contrast, the first and second connectors 102, 106 are spaced apart from each other when the dust collector 34 is in the extended position, as shown in FIG. 4.

[0028] As shown best in FIG. 6, the construction of the shroud 37 utilizing the spring 42 and the sleeve 46 allows the shroud 37 to change lengths quite substantially. In particular, in one embodiment, the shroud 37 measures over eight inches in the extended position (FIG. 4) and less than one inch in the collapsed position (FIG. 6). This allows the dust collector 34 to accommodate relatively short tool bits, such as stop bits, as well as relatively long tool bits, such as an eight inch drill bit (FIG. 2).

[0029] With reference to FIG. 6, the dust collector 34 further includes a locking mechanism 122 that removably locks the shroud 37 to the mounting base 38. The locking mechanism 122 may be, for example, a bayonet-style coupling. The shroud 37 is rotatable relative to the mounting base 38 about the longitudinal axis 50 between a locked position (as depicted when arrow 126 aligns with locked symbol 130) and an unlocked position (as depicted when the arrow 126 aligns with the unlock symbol 134). In the locked position, the shroud 37 is connected to the base 38, whereas the shroud 37 is removable from the base 38 in the unlocked position. The shroud 37 is connectable to the mounting base 38 at either the first end 35 or the second end 36. When connected, the shroud 37 and respective end 35 or 36 form a dust seal. In some situations, an operator may desire to remove the shroud 37 from the base 38 if the dust collector 34 is not needed without having to remove the mounting base 38 from the power tool 10. Alternatively, the shroud 37 can be removed from the base 38 when the shroud 37 needs to be replaced.

[0030] As shown in FIG. 7, ends of the shroud 37 may include air channels 138. The illustrated air channels 138 are formed in a face of the annular ring 110 of the connector 102, 106, facing away from the power tool 10. The air channels 138 can be formed on both the first connector 102 and the second connector 106 for use when either connector is facing outward from the power tool 10. The air channels 138 communicate with the space 58 within the sleeve 46 and extend radially outward. In the illustrated embodiment, the air channels 138 are linear, but may alternatively be curved or irregular. The air channels 138 help draw air through the dust collector 34, pulling dust with the air. In some embodiments, the arrangement of the air channels 138 also creates a vortex or swirl-effect inside the shroud 37.

[0031] Prior to a drilling or other operation, an operator places the dust collector 34 over the working end 18 of the power tool 10 until the mounting base 38 abuts the working end 18 (FIG. 2). If a tool bit has a diameter substantially less than the aperture 54 of the base 38, the dust collector 34 can be put into position over the bit. If, however, the tool bit has a diameter fairly close to the diameter of the aperture 54, it may be easier to attach the base 38 first, then couple the bit to the tool 10 through the aperture 54, and finally attach the shroud 37. To fasten the dust collector 34 to the power tool 10, an operator wraps the tether 62 around a portion of the housing 14 (e.g., the rear end 86, near the trigger 30, etc.), seats the first end 66 of the tether 62 in the first anchor 78, and seats the second end 70 of the tether 62 in the second anchor 98 (FIG. 3). If the shroud 37 is in the collapsed position, an operator simply twists the second connector 106 relative to the first connector 102 until the shoulders 118 no longer interfere with each other. At this point, the spring 42 will automatically move the shroud 37 to the extended position. With the shroud 37 adjacent the working end 18 and the tool bit, an operator may begin a drilling operation while collecting the dust and debris within the space 58 within the sleeve 46. If a vacuum source is connected to the vacuum port 101, the dust and debris within space 58 will be drawn out of the space 58, through the passageway 103, and out the vacuum port 101.

[0032] During a drilling or other operation, the second end 36 of the shroud 37 and the tool bit are placed in contact with a workpiece. As the operator actuates the trigger 30 (and therefore the motor), the tool bit sinks into the workpiece and the second end 36 of the shroud 37 will move toward the first end 35 until the tool bit travels a desired distance. As the tool bit is drawn out of the workpiece, the second end 36 maintains contact with the

workpiece via the spring 42 and dust and debris is collected within the shroud 37 from the drilling operation.

[0033] In some applications, a bit longer than a single shroud 37 may need to be used. In such situations, two or more shrouds 37 can be coupled together to fully enclose the bit during use. A connector can be used to connect two shrouds 37 end-to-end. The connector would have similar connecting features 122 as the base 38. The connector would have the connecting features on opposite sides to connect to a first shroud and a second shroud. This arrangement could be repeated to add additional shrouds for additional length.

[0034] FIG. 8 illustrated a tether 162 in accordance with another embodiment of the invention. Like components are shown with like reference numerals plus 100.

[0035] The tether 162 can be fabricated to include a non-bulbous segment 163 of the tether 162, in which the bulbous elements 174 are absent. The non-bulbous segment 163 is interposed between a plug holder 200 and an adjacent bulbous element 174. The non-bulbous segment 163 extends a length L, of which can vary in length. Multiple bulbous elements 174 are provided adjacent the second end 170 to ensure adjustability of the tether 162.

[0036] Although the invention has been described in detail with reference to certain preferred embodiments, variations and modifications exist within the scope and spirit of one or more independent aspects of the invention as described. Various features and advantages of the invention are set forth in the following claims.

CLAIMS

What is claimed is:

1. A dust collector operable to collect dust and debris generated during operation of a power tool, the dust collector comprising:
 - a mounting base configured to couple to the power tool, the mounting base defining a longitudinal axis; and
 - a shroud extending from the mounting base, the shroud including a first end adjacent the mounting base, a second end operable to contact a workpiece, a sleeve extending between the first end and the second end, and a spring biasing the second end away from the first end, the second end being movable relative to the first end against the spring.
2. The dust collector of claim 1, further comprising:
 - a first connector disposed at the first end of the shroud; and
 - a second connector disposed at the second end of the shroud;wherein the second connector interlocks with the first connector to hold the shroud in a collapsed position against a bias of the spring.
3. The dust collector of claim 2, wherein the first connector includes an annular ring and a projection extending from the annular ring, wherein the second connector includes an annular ring and a projection extending from the annular ring, and wherein the projection of the first connector engages the projection of the second connector to hold the shroud in the collapsed position.
4. The dust collector of claim 1, further comprising a connector disposed at the first end of the shroud, wherein the connector including a locking mechanism for removably coupling to the mounting base such that the shroud is removable from the mounting base.
5. The dust collector of claim 4, wherein the locking mechanism includes a bayonet-style coupling.
6. The dust collector of claim 4, wherein the connector is a first connector, and further comprising a second connector disposed at the second end of the shroud, wherein the second

connector includes a locking mechanism for removably coupling to the mounting base such that the shroud is reversible relative to the mounting base.

7. The dust collector of claim 1, wherein the sleeve and the spring are configured to be circumferentially disposed about a tool bit coupled to the power tool and extending along the longitudinal axis.

8. The dust collector of claim 1, further comprising a tether coupled to the mounting base, wherein the tether is configured to be wrapped around a portion of the power tool.

9. The dust collector of claim 8, wherein the mounting base includes an anchor, wherein the tether includes a first end coupled to the mounting base, a second end opposite the first end, and a bulbous element adjacent the second end, and wherein the bulbous element engages the anchor to secure the dust collector to the power tool.

10. The dust collector of claim 9, wherein the tether includes a plurality of bulbous elements spaced apart along a length of the tether, and wherein one of the plurality of bulbous elements engages the anchor to secure the dust collector to the power tool.

11. The dust collector of claim 10, wherein the anchor is a first anchor, wherein the mounting base further includes a second anchor disposed on an opposite side of the mounting base from the first anchor, and wherein another of the plurality of bulbous elements adjacent the first end of the tether engages the second anchor to removably couple the tether to mounting base.

12. The dust collector of claim 8, wherein the tether is composed of a polymer material that enables elastic deformation of the tether.

13. The dust collector of claim 1, wherein the mounting base includes a vacuum port in fluid communication with a space defined by the shroud, and wherein the vacuum port allows dust and debris to be drawn from the space.

14. The dust collector of claim 13, further comprising a plug selectively coupled to the vacuum port to cover the vacuum port.
15. The dust collector of claim 14, further comprising a tether coupled to the mounting base, wherein the tether is configured to secure the mounting base to the power tool, and wherein the plug is coupled to the tether.
16. The dust collector of claim 1, further comprising an annular ring disposed on the second end of the shroud, wherein the annular ring defines an air channel in communication with a space defined by the shroud.
17. The dust collector of claim 16, wherein the annular ring defines a plurality of air channels formed in a face of the annular ring facing away from the power tool.
18. The dust collector of claim 1, wherein the shroud is made of a transparent material.
19. A dust collector operable to collect dust and debris generated during operation of a power tool, the dust collector comprising:
- a mounting base configured to couple to the power tool, the mounting base defining a longitudinal axis;
 - a tether coupled to the mounting base, the tether configured to be wrapped around a portion of the power tool; and
 - a shroud extending from the mounting base, the shroud including a first end adjacent the mounting base, a second end operable to contact a workpiece, and a sleeve extending between the first end and the second end.
20. The dust collector of claim 19, wherein the mounting base includes an anchor, wherein the tether includes a first end coupled to the mounting base, a second end opposite the first end, and a bulbous element adjacent the second end, and wherein the bulbous element engages the anchor to secure the dust collector to the power tool.

21. The dust collector of claim 20, wherein the tether includes a plurality of bulbous elements spaced apart along a length of the tether, and wherein one of the plurality of bulbous elements engages the anchor to secure the dust collector to the power tool.

22. The dust collector of claim 21, wherein the anchor is a first anchor, wherein the mounting base further includes a second anchor disposed on an opposite side of the mounting base from the first anchor, and wherein another of the plurality of bulbous elements adjacent the first end of the tether engages the second anchor to removably couple the tether to mounting base.

23. The dust collector of claim 19, wherein the tether is composed of a polymer material that enables elastic deformation of the tether.

24. A power tool system comprising:

- a power tool including a housing, a working end, and a tool bit extending from the working end; and

- a dust collector operable to collect dust and debris generated during operation of the power tool, the dust collector including

- a mounting base seated against the working end of the power tool, the mounting base defining an aperture through which the tool bit extends and a longitudinal axis along which the tool bit extends,

- a tether coupled to the mounting base, the tether wrapped around a portion of the housing to secure the dust collector to the power tool, and

- a shroud extending from the mounting base, the shroud having a first end adjacent the mounting base, a second end operable to contact a workpiece, a sleeve extending between the first end and the second end, and a spring biasing the second end away from the first end, the second end being movable relative to the first end against the spring.

1/8

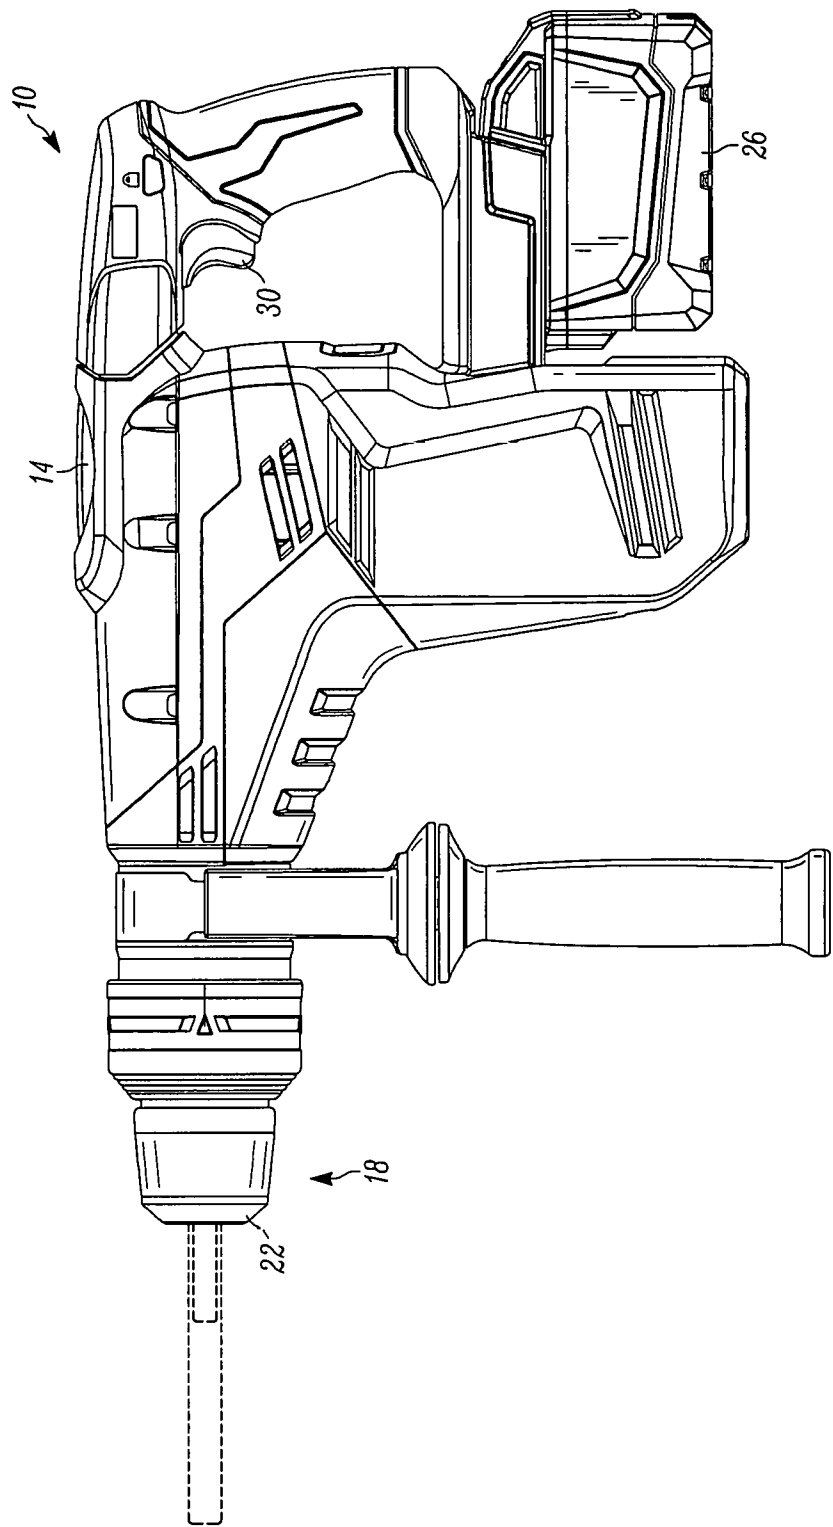


FIG. 1

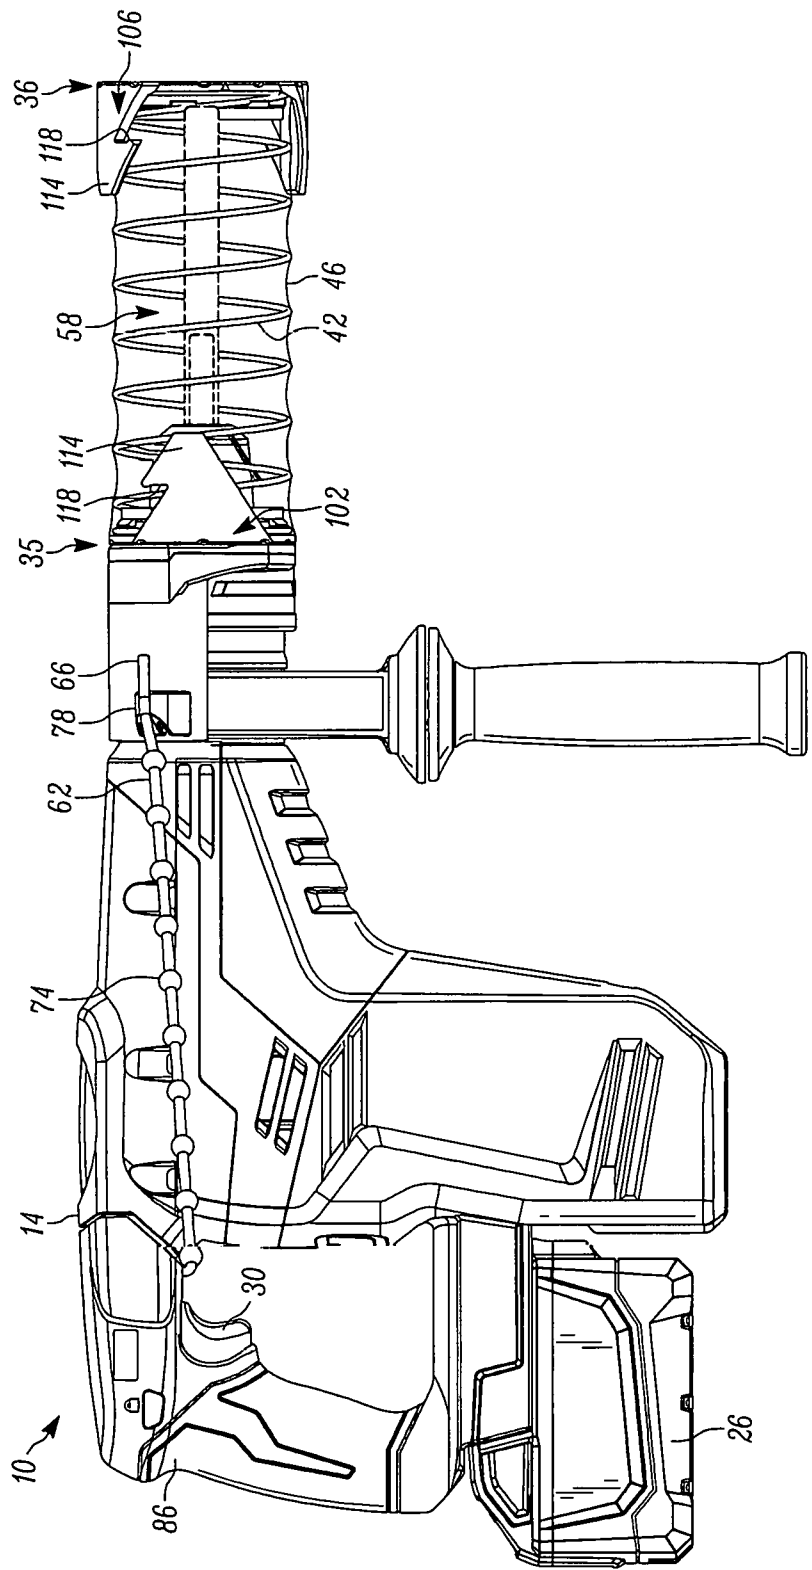


FIG. 2

3/8



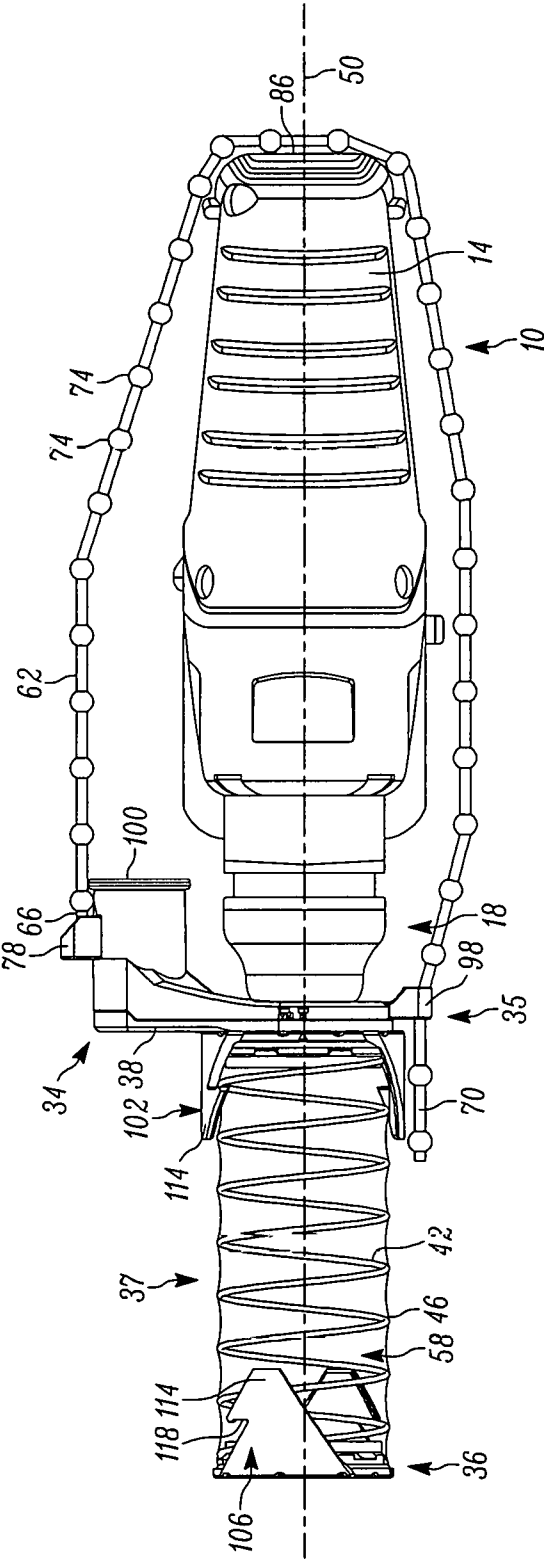


FIG. 3

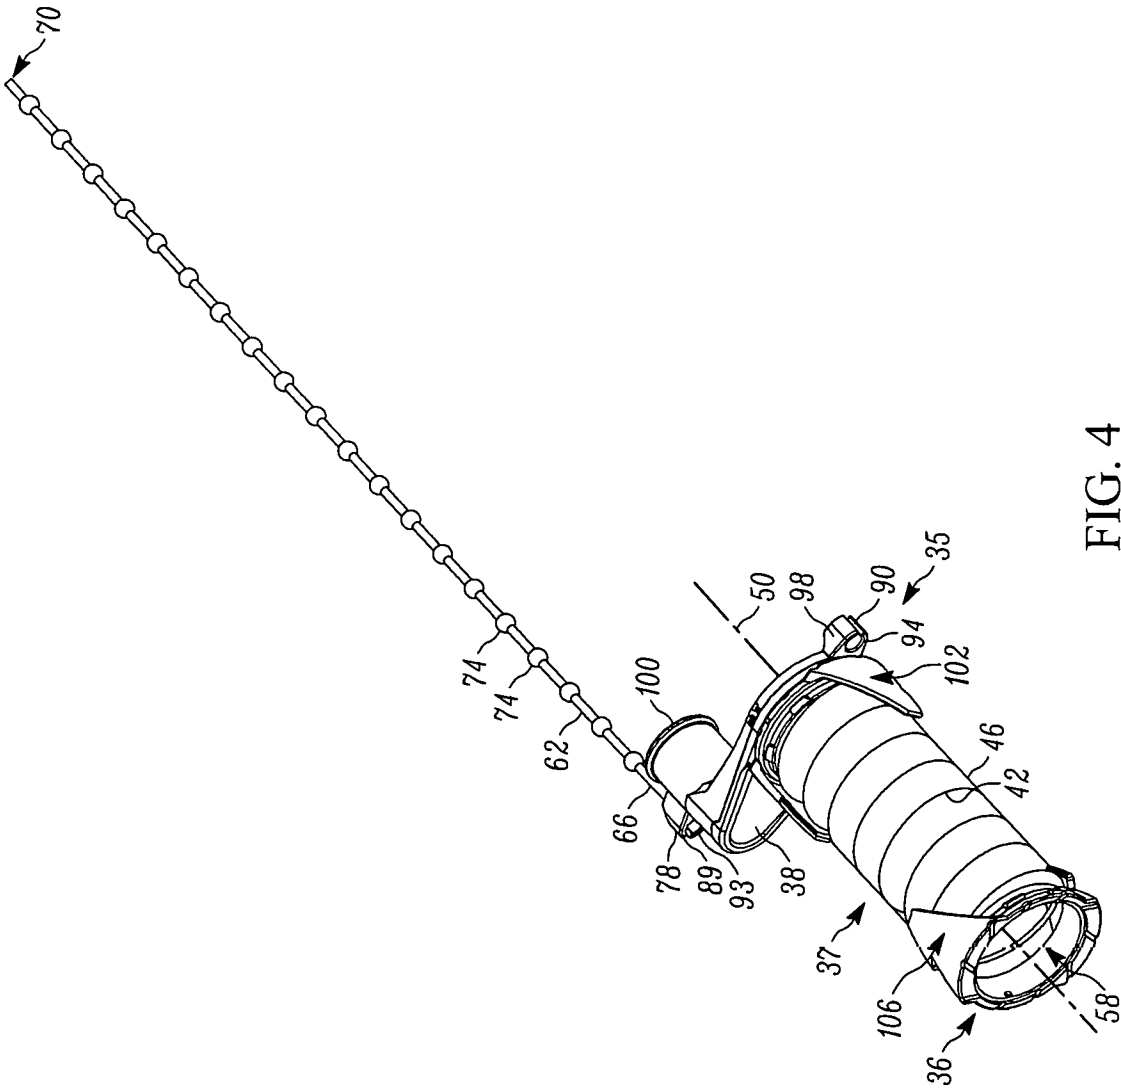

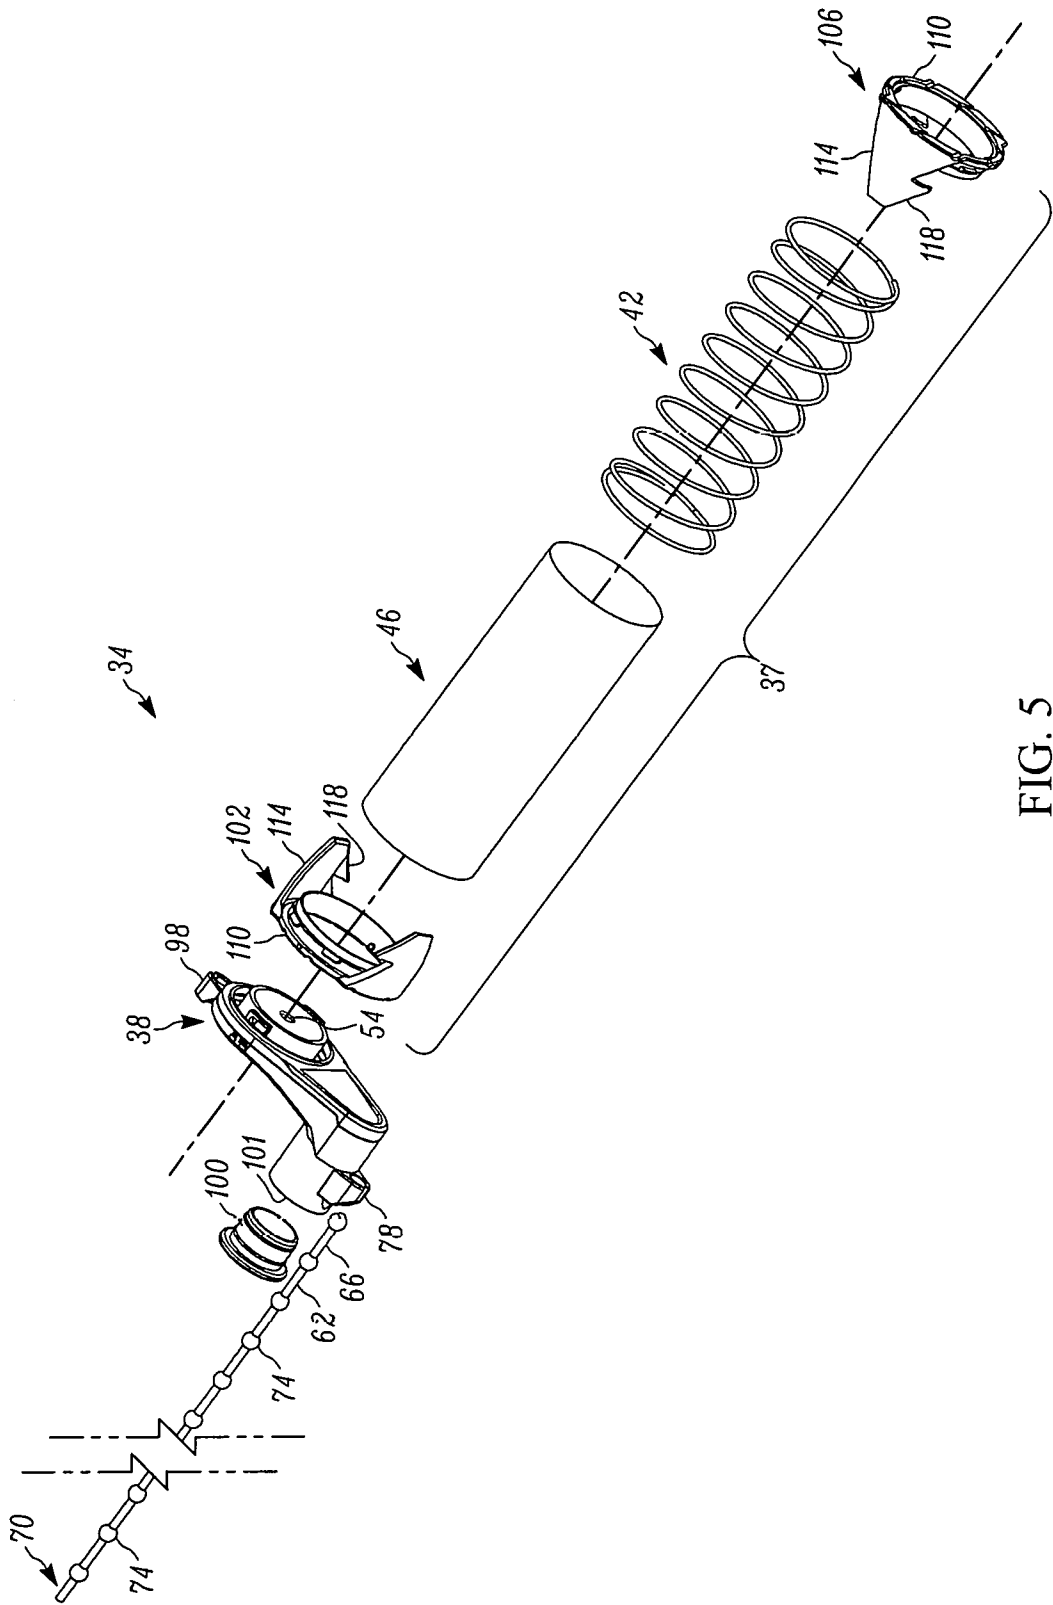

6/8

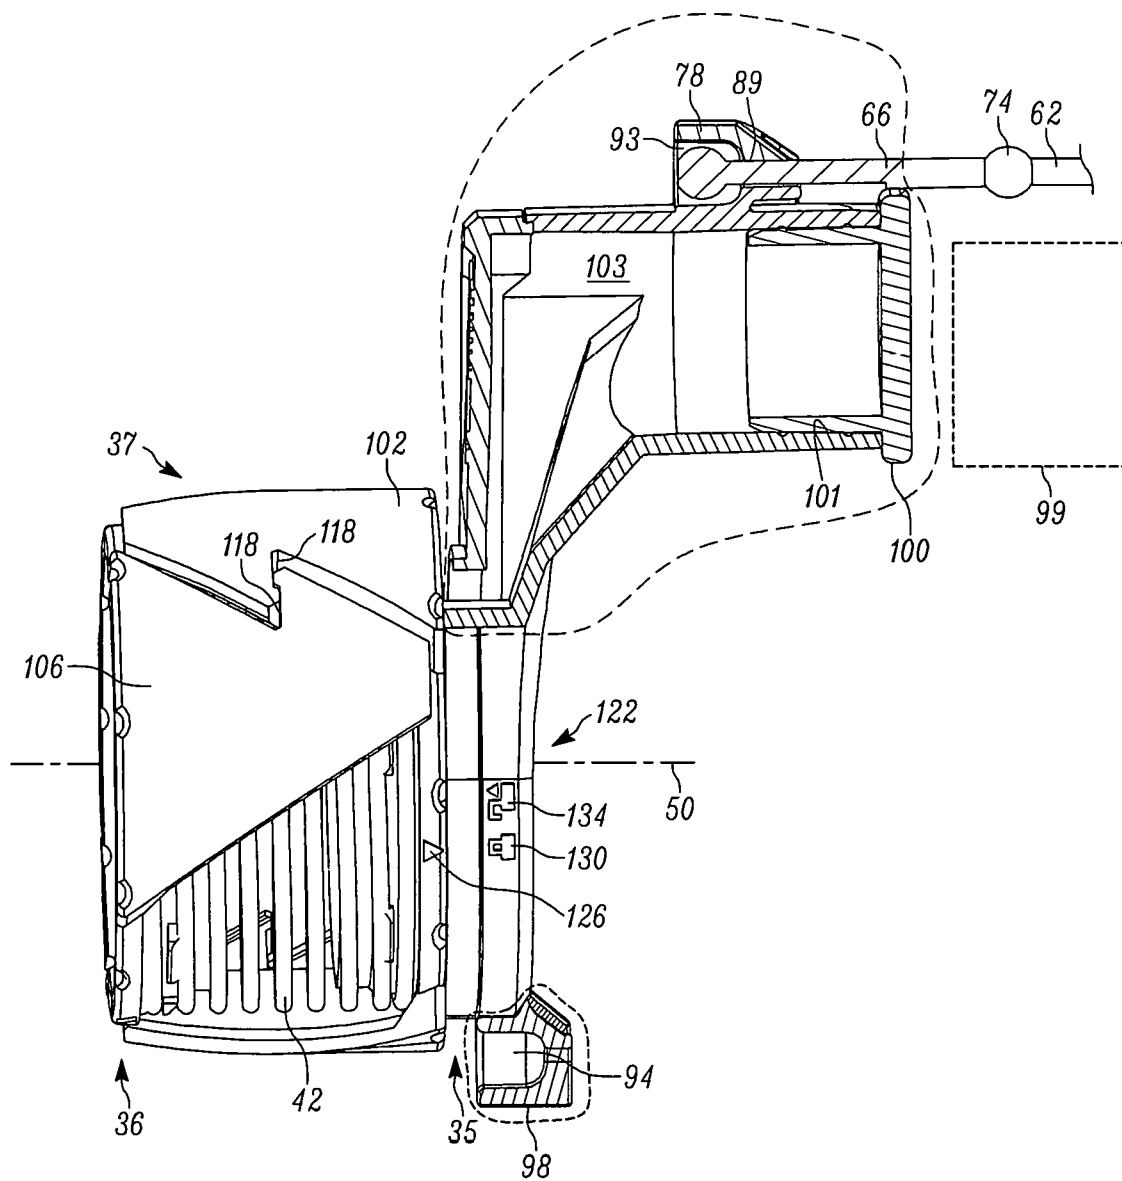


FIG. 6


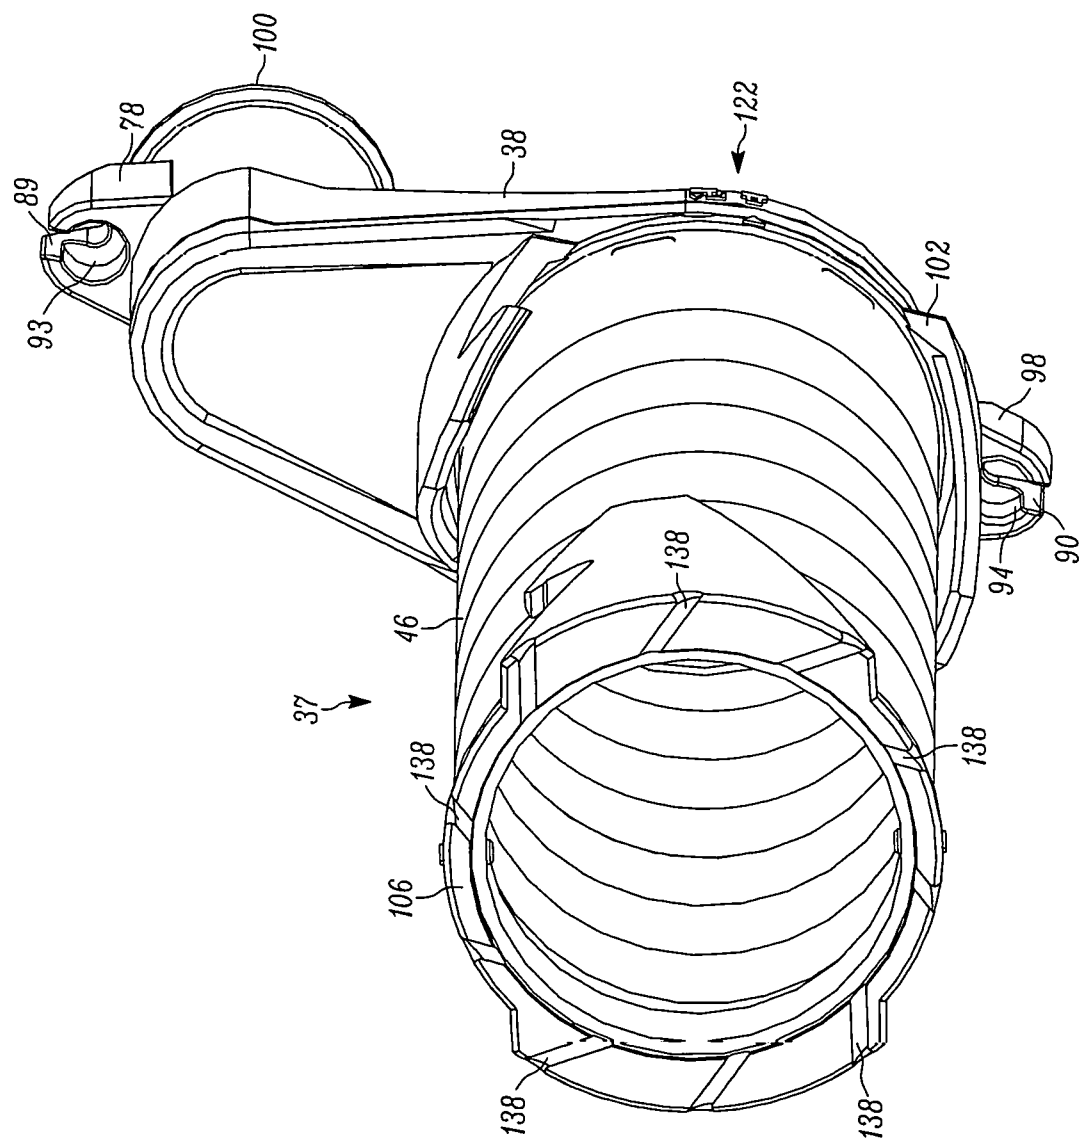


FIG. 7

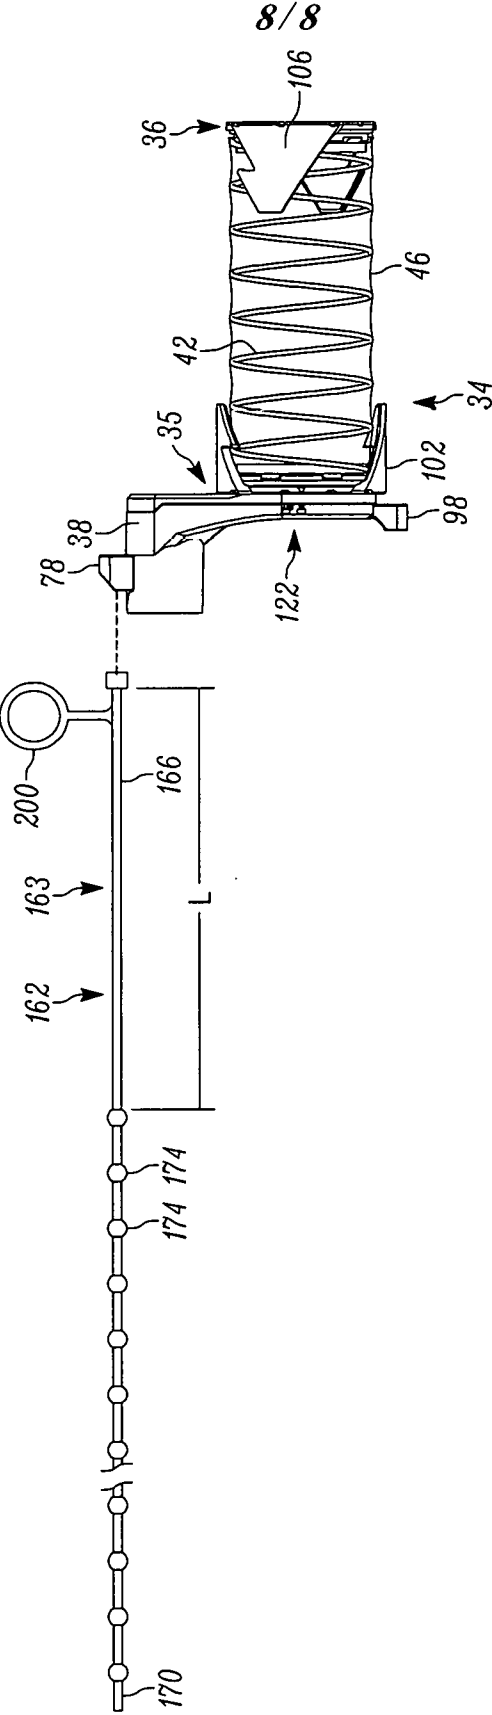

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US2018/000213**A. CLASSIFICATION OF SUBJECT MATTER****B23B 45/00(2006.01)i, B23B 47/00(2006.01)i**

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

B23B 45/00; B23B 47/34; B23Q 11/00; B23B 47/00

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Korean utility models and applications for utility models

Japanese utility models and applications for utility models

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

eKOMPASS(KIPO internal) & Keywords: dust, collector, power tool, spring, shroud

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 3776647 A (HART, HERMAN) 04 December 1973	1, 7, 13-14, 16-18
A	See column 1, line 36 - column 3, line 45; claims 1, 7; and figure 1.	2-6, 8-12, 15, 19-24
X	US 2012-0308320 A1 (TSENG, KUAN-LI) 06 December 2012	1, 7, 18
	See paragraphs [0035]-[0044]; claims 1-10; and figures 1-6.	
A	US 2004-0208715 A1 (ARICH, KLAUS-DIETER) 21 October 2004	1-24
	See paragraphs [0025]-[0039]; claim 1; and figures 1-3, 4A-4B.	
A	US 2013-0213683 A1 (BREWSTER et al.) 22 August 2013	1-24
	See paragraphs [0039]-[0072]; and figures 1-4.	
A	EP 1457288 A1 (BLACK & DECKER INC.) 15 September 2004	1-24
	See claims 1-6; and figures 1-5.	



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

12 December 2018 (12.12.2018)

Date of mailing of the international search report

12 December 2018 (12.12.2018)

Name and mailing address of the ISA/KR

International Application Division

Korean Intellectual Property Office

189 Cheongsa-ro, Seo-gu, Daejeon, 35208, Republic of Korea




Facsimile No. +82-42-481-8578

Authorized officer

LEE, Jong Kyung

Telephone No. +82-42-481-3360



INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/US2018/000213

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 3776647 A1	04/12/1973	None	
US 2012-0308320 A1	06/12/2012	CN 203092501 U US 9073161 B2 WO 2012-065305 A1	31/07/2013 07/07/2015 24/05/2012
US 2004-0208715 A1	21/10/2004	AT 337887 T DE 602004002132 T2 EP 1459841 A1 EP 1459841 B1 ES 2271725 T3 GB 2399525 A GB 2399525 B US 6951439 B2	15/09/2006 19/07/2007 22/09/2004 30/08/2006 16/04/2007 22/09/2004 12/04/2006 04/10/2005
US 2013-0213683 A1	22/08/2013	DE 112009001126 T5 EP 2639010 A1 EP 2639010 B1 EP 2952292 A1 EP 2952292 B1 EP 3222386 A1 GB 2471643 A GB 2471643 B US 2011-0120741 A1 US 2013-0183111 A1 US 2014-0326476 A1 US 2017-0348812 A1 US 8813868 B2 US 8967923 B2 US 9776296 B2 WO 2009-137808 A1	21/07/2011 18/09/2013 01/07/2015 09/12/2015 19/07/2017 27/09/2017 05/01/2011 17/04/2013 26/05/2011 18/07/2013 06/11/2014 07/12/2017 26/08/2014 03/03/2015 03/10/2017 12/11/2009
EP 1457288 A1	15/09/2004	AT 309882 T DE 602004000181 T2 EP 1457288 B1 ES 2248779 T3 US 2004-0192184 A1 US 6887146 B2	15/12/2005 10/08/2006 16/11/2005 16/03/2006 30/09/2004 03/05/2005