



(51) International Patent Classification:
C09J 9/00 (2006.01) **B82B 3/00** (2006.01)

(21) International Application Number:
PCT/SG2010/000056

(22) International Filing Date:
12 February 2010 (12.02.2010)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
61/153,134 17 February 2009 (17.02.2009) US

(71) Applicant (for all designated States except US): **AGENCY FOR SCIENCE, TECHNOLOGY AND RESEARCH** [SG/SG]; 1 Fusionopolis Way, #20-10 Connexis, Singapore 138632 (SG).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **HO, Yoke Yee, Audrey** [MY/SG]; Institute of Materials Research and Engineering, 3 Research Link, Singapore 117602 (SG). **RODRIGUEZ FERNANDEZ, Isabel** [ES/SG]; Institute of Materials Research and Engineering, 3 Research Link, Singapore 117602 (SG).

(74) Agent: **ONG, Kheng Lu, Lucille, Frances**; Marks & Clerk Singapore LLP, Tanjong Pagar, P O Box 636, Singapore 910816 (SG).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

— of inventorship (Rule 4.17(iv))

Published:

— with international search report (Art. 21(3))

(54) Title: A HIGH ASPECT RATIO ADHESIVE STRUCTURE AND A METHOD OF FORMING THE SAME

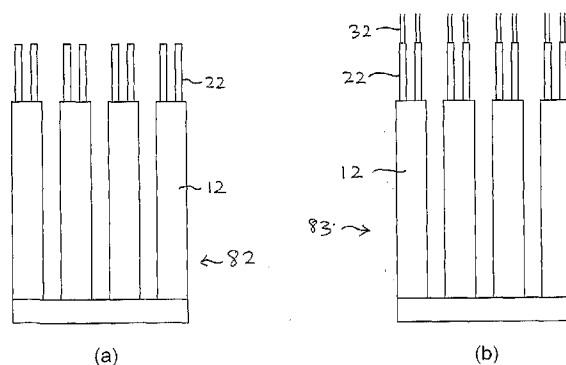


FIG. 2

(57) Abstract: A method of forming a high aspect ratio adhesive structure, the method comprising fabricating a porous template comprising at least a first tier and a second tier; introducing a softened polymer into the template; and separating the polymer from the template.

A HIGH ASPECT RATIO ADHESIVE STRUCTURE AND A METHOD OF
FORMING THE SAME

Field of the Invention

5 The invention relates to a high aspect ratio adhesive structure and a method of forming the same and particularly, though not exclusively, relates to forming a high aspect ratio adhesive structure mimicking setae on gecko footpads.

Background

10 Geckos have specially adapted footpads on their feet, with each square millimetre of footpad containing about 14,000 foot hairs or setae. This provides them with remarkable adhesive capability, allowing them to adhere to most surfaces as a result of van der Waals interactions between the setae and a surface. Each seta has a diameter of about 5 micrometers and is tipped with between 100 and 1,000 terminal bristles or spatulae,
15 with each spatula having a length of about 0.2 micrometers. Each foot hair thus has a hierarchical structure comprising a seta with multiple spatulae. Rigidity from the relatively thick setae fibrils and flexibility from the relatively fine spatulae fibrils provide excellent conformal contact between footpad and surface such that a gecko can support about eight times its own weight with just one toe on smooth glass.

20

As the adhesive capability of gecko footpads is achieved without requiring liquid or surface tension, it is desirable to develop a man-made surface mimicking the setae structure on gecko footpads having similar adhesive properties arising from the surface structure alone, so as to obtain a completely dry adhesive that does not leave any residue

and can be reused. This will be especially useful in low load applications such as pick-and-place handling of delicate microchips, so as to avoid load deformation or damage due to contact with chemical adhesives.

- 5 Template-assisted fabrication, based on deposition or introduction of a desired material into arrays of micro- and nano-channels, is a method of forming one-dimensional micro- and nanostructures. Considerable efforts have been made in designing and controlling fabrication of templates for forming gecko-like micro/nanostructures, including electron beam lithography, intermediate film moulding or photolithographic
10 methods followed by silicon micromachining to construct templates for casting or hot embossing polymeric structures.

Among potential templates, nano-porous anodic alumina (NPAA) has drawn attention because it provides a self-assembled array of relatively uniformly-sized parallel pores or
15 channels with large depths, in large scale and low cost. Availability of NPAA films has triggered investigations into their utilization as templates or masks to fabricate various nanostructures including nanotubes, nanowires, nanoporous films and nanodot arrays for wide ranging applications such as catalysis, electronics, optics, and biosensing. It has been reported that low viscosity polymeric solutions were used to cast polymer in
20 NPAA templates in attempts to fabricate nanofibrils. However, long solvent evaporation times (e.g. 24 hours) make this an unsuitable method for use in mass production. Furthermore, the long and thin nanotube fibrils are apt to bend, entangle or clump together especially during removal of the NPAA template by wet etching, thereby impairing adhesive efficacy. Attempts have also been made to produce hierarchical

PMMA fibrils using bonded alumina membranes or intermediate film moulds.

However, these methods are complex and time consuming as they require precise alignment of multiple layers of membranes or moulds and involve numerous fabrication steps.

5

Summary of the Invention

According to a first exemplary aspect, there is provided a method of forming a high aspect ratio adhesive structure. The method comprises fabricating a porous template comprising at least a first tier and a second tier; introducing a softened polymer into the
10 template; and separating the polymer from the template.

The polymer may be introduced into the template by capillary force or by nanoimprinting.

15 Fabricating the template may comprise creating a first plurality of pores in the template, the first plurality of pores forming the first tier of the template; and creating a second plurality of pores in the template, the second plurality of pores being created within the first plurality of pores, the second plurality of pores forming the second tier of the template.

20

Fabricating the template may further comprise creating a third plurality of pores in the template, the third plurality of pores being created within the second plurality of pores, the third plurality of pores forming a third tier of the template.

The template preferably comprises an aluminium substrate and fabricating the template preferably includes anodizing the aluminium substrate.

Separating the polymer from the template may comprise peeling the template away
5 from the polymer after the polymer has cooled in the template.

According to a second exemplary aspect, there is provided a high aspect ratio adhesive structure obtained by the method of the first exemplary aspect.

10 The adhesive structure preferably comprises at least a first tier of pillars and a second tier of pillars, the second tier of pillars each having a smaller diameter than the first tier of pillars, the second tier of pillars being disposed on the first tier of pillars.

The adhesive structure may further comprise a third tier of pillars, the third tier of pillars
15 each having a smaller diameter than the second tier of pillars, the third tier of pillars being disposed on the second tier of pillars.

According to a third exemplary aspect, there is provided an adhesive tape comprising the high aspect ratio adhesive structure of the second exemplary aspect.

20

Brief Description of the Drawings

In order that the invention may be fully understood and readily put into practical effect there shall now be described by way of non-limitative example only exemplary

embodiments of the present invention, the description being with reference to the accompanying illustrative drawings.

In the drawings:

- 5 FIG. 1 is schematic cross-sectional side views and plan views of a template being fabricated by an exemplary embodiment of a method of forming an adhesive structure;
- FIG. 2 is a schematic side view of exemplary adhesive structures according;
- FIG. 3 is a collage of scanning electron micrographs of templates fabricated by an
- 10 exemplary embodiment of a method of forming an adhesive structure;
- FIG. 4 is a collage of scanning electron micrographs of exemplary adhesive structures;
- FIG. 5 is a sequence of photographs comparing use of an exemplary adhesive structure with another structure;
- FIG. 6 is a photograph of use of an exemplary adhesive structure;
- 15 FIG. 7 is a flowchart of an exemplary method of fabricating an adhesive structure according to the present invention;
- FIG. 8 (a) is a schematic side view of an experimental set-up for measuring frictional adhesion of an adhesive tape comprising an adhesive structure according to the present invention;
- 20 FIG. 8 (b) is a schematic plan view of the experimental set-up of FIG. 8 (a)
- FIG. 9 is a graph of the frictional adhesion force of the adhesive tape of FIG. 8 against glass; and
- FIG. 10 is a graph of the frictional adhesion force for branched pillars and linear pillars.

Detailed Description of the Exemplary Embodiments

Exemplary embodiments of a high aspect ratio adhesive structure and a method of fabricating the same according to the present invention are described with reference to FIGS. 1 to 10.

5

The method 100 of fabricating high aspect ratio adhesive structures 82, 83 as shown in FIG. 2 comprises first fabricating a tiered porous template 102 as given in the flowchart of FIG. 7. To do so, a commercially available aluminium sheet of 99.999% purity and 0.25 mm thick is first cut into substrates having a typical sample size of 20 mm x 30 mm. The substrates are then electropolished for 4 minutes in a 1:4 mixture of 60 % perchloric acid and ethanol, at a constant potential of 25 V and a temperature of 5 °C. Edges of the substrates are insulated, for example with a polymer coating, to prevent excess charge formation at the edges, so that during subsequent anodization, non-homogeneous anodization across the substrates may be avoided.

15

During anodization, each substrate 92 is immersed in a thermally insulated anodization bath containing an electrolyte, with the anodization bath being placed on a cold plate to maintain a constant temperature. A platinum mesh acting as a counter electrode is then immersed into the electrolyte. Positive and negative terminals of a power supply are connected to the aluminium substrate 92 and platinum mesh respectively.

20

To form a first tier 10 of the porous template 90, as shown in FIG. 1(a), an aluminium substrate 92 is anodized for a first time in an electrolyte comprising a 1:10 mixture of 0.3 M $C_2H_2O_4$ acid and 0.3 M H_3PO_4 acid at a constant potential of 195 V and a temperature of 0 °C for 75 minutes. As a result of this first anodization, a first plurality

of pores 11 is created on the aluminium substrate 92 of the template 90, each pore 11 having a pore depth of approximately 5 μm . A plan view of the template having a first tier 10 of pores 11 is shown in FIG. 1(g).

- 5 A barrier oxide layer 16 is also formed as a result of anodization. Thinning of the barrier layer 16 as shown in FIG. 1(b) is subsequently carried out by immersing the anodized substrate 92 in 5 wt % H_3PO_4 at room temperature for 330 minutes.

A second tier 20 of the porous template 90 is formed by anodizing the substrate 92 for a
10 second time at 140 V in an electrolyte comprising a 1:1.5 mixture of 0.3 M $\text{C}_2\text{H}_2\text{O}_4$ acid and 0.3 M H_3PO_4 acid at a temperature of 0 $^\circ\text{C}$ for 9 minutes, as shown in FIG. 1(c). As a result of this second anodization, a second plurality of pores 21 is created within the first plurality of pores 11 on the aluminium substrate 92 of the template 90. The second tier 20 is thus integral with the first tier 10 in the porous template 90. A plan view of the
15 template 90 having a first tier 10 and a second tier 20 of pores 11, 21 respectively can be seen in FIG. 1(h).

The anodizing current dropped from a high current upon first turning on the power to stabilize after 30 seconds at around 9 mA during creation of the first tier 10 of the
20 porous template 90. A subsequent increase in current thus signalled creation of the second tier 20. Anodization was further continued for 3 minutes in order for the desired pore depth of the second tier 20 to be reached, thereby forming a desired branched or tiered nano-porous anodic alumina (NPAA) template 90.

Subsequent pore-widening by thinning the barrier layer 16 as shown in FIG. 1(d) was performed for 60 minutes using the same barrier layer thinning solution of 5 wt % H_3PO_4 .

5 A third tier 30 of the porous template 90 can be obtained by anodizing the substrate 92 a third time in 0.3 M $\text{C}_2\text{H}_2\text{O}_4$ at 50 V for 15 minutes in order to create a third plurality of pores 31 within the second plurality of pores 21 in the template 90, as shown in FIG. 1(e). The third tier 30 is thus integral with the second tier 20 of the porous template 90. A plan view of the template 90 having a first tier 10, a second tier 20, and a third tier 30
10 of pores 11, 21, 31 respectively can be seen in FIG. 1(i). Similarly, thinning of the barrier layer 16 as shown in FIG. 1(f) is carried out for 40 minutes.

Each tiered or branched NPAA template 90 fabricated as described above is thus of a single or integral piece, having tiers of plurality of pores integrally formed therein. The
15 porous template 90 can subsequently be transformed into a hard nickel mould by techniques of electroplating.

FIGS. 3(a) and (b) show a top and cross-sectional view of a two-tiered branched NPAA template respectively. FIGS. 3 (c) and (d) show a top and cross-sectional view of a
20 three-tiered branched NPAA respectively. The top view micrographs FIGS. 3(a) and 3(c) show a network structure of pores 21, 31 within pores 11, 21 respectively on a thin film substrate, while the cross-sectional view micrographs FIGS. 3(b) and 3(d) show pores 11, 21, 31 normal to the film's surface, with branching of sub-pores 21, 31 from preceding pores 11, 21 respectively.

After fabricating the tiered porous template 90, a viscous polymer is introduced into the template 90, 104 in order to form tiered or branched high aspect ratio polymeric pillars or fibrils for high conformal surface contact. By introducing a softened polymer into the template instead of solution casting, higher molecular weight polymers having superior mechanical properties can be used to form the high aspect ratio tiered pillars required for good adhesion. To do so, a polycarbonate (PC) sheet with a thickness between 20 microns to 1 mm, preferably 0.1 mm, is placed in contact with a tiered branched NPAA template 90 that is fabricated as described above. By applying a slight contact pressure and increasing the temperature well above the glass transition temperature of the polymer, the viscous, softened polymer enters the pores 11, 21, 31 of the template 90 by capillary action for a duration ranging from 10 minutes to 40 minutes. The duration of introducing the polymer into the template 90 depends on the aspect ratio (height/width) of the pores 11, 21, 31 in the template 90 as well as the pore size, i.e., the height or thickness of the various tiers 10, 20, 30. The polymer in the template 90 is then cooled to approximately 40 °C before separating the polymer and the template 90, 106.

Separating the polymer and the template 90 is preferably performed by simply peeling off the template 90 from the cooled polymer, thereby minimizing clumping or matting of the tiered pillars formed. This is readily performed for templates 90 having a tier 10, 20, 30 height or thickness of about 2.5 μm . For templates 90 having a greater tier 10, 20, 30 height or thicknesses, for example about 5.5 μm or about 10 μm , separating the polymer and the template 90 may alternatively be performed by removal of the template 90 by first etching off the bulk aluminium of the substrate 92 of the template 90 using a

1:1 mixture of 20 wt% HCl acid and 0.3 M CuSO₄, and subsequently etching off any remaining alumina or barrier layer 16 using 1 M KOH.

After separation of the polymer and the template 90, a dry adhesive tape comprising a polymer film having high aspect ratio high density of branched nano-pillars is obtained. Various samples of adhesive structures of different dimensions were formed using the method described above, according to parameters given in Table 1 below.

Samples- templates (Var. Thickness)	Immerging Temp. [°C]	Chamber Vacuum [mbar]	Tool Pressure [mbar]	Duration [min]	Template Removal Method
~ 2.5 µm	160	8.0×10^{-2}	500	40	Peel Off
~ 5.5 µm	180	8.0×10^{-2}	500	40	Etched Off
~ 10 µm	200	8.0×10^{-2}	500	40	Etched Off

Table 1

FIG. 4 provides oblique views of 2-tier high aspect ratio adhesive structures 82 comprising polymeric branched gecko-like pillars obtained after separating the cooled polymer from a two-tier template 90. The high aspect ratio adhesive structure 82 has an integral two-tier pillar structure comprising a first tier 12 of pillars and a second tier 22 of pillars or branches disposed on the first tier 12 of pillars. The first tier 12 is replicated from the first plurality of pores 11 in the template 90 while the second tier 22 is replicated from the second plurality of pores 21 in the template 90. A schematic side view of the adhesive structures of FIG. 4 is shown in FIG. 2(a). The second tier 22 of pillars each have a smaller diameter than the first tier 12 of pillars.

In FIG. 4(a), the adhesive structure 82 comprises a first tier of pillars having a dimension of about 2.5 μm in height and 350 nm in width with branches or a second tier of pillars of about 600 nm in height and 200 nm in width disposed thereon. FIG. 4(b) shows an adhesive structure 82 having a first tier of pillars of about 2.5 μm in height and 300 nm in width and a second tier of pillars or branches of about 300 nm in height and 100 nm in width. FIG. 4(c) shows a first tier of pillars of about 6.5 μm in height and 320 nm in width with branches or a second tier of pillars of about 750 nm in height and 100 nm in width, while FIG. 4(d) shows a first tier of pillars of about 2.5 μm in height and 300 nm in width with branches or a second tier of pillars of about 3.5 μm in height and 120 nm in width. Centre-to-centre distance between the first tier of pillars is approximately 500 nm.

FIG. 2(b) shows a schematic side view of a three-tier adhesive structure that can be obtained using a three-tier template.

By having a high density of high aspect ratio tiered or branched pillars, the adhesive structures 82, 83 thus achieve high conformal surface contact when placed against a surface, thereby achieving good adhesive properties.

A demonstration of the adhesive properties of polymeric branched nanostructures formed according to the present invention is shown in FIG. 5. As shown in FIG. 5(a), a replicated PC film having branched nano-pillars (i.e. a two-tier pillar structure) 25 and a replicated PC film having linear nano-pillars (i.e. a single-tier pillar structure) 15 were each adhered to a Singaporean 5-cent coin (C2 and C1 respectively) using silicone glue, with the nano-pillars facing away from the coins. The replicated branched nanopillars

had first-tier pillars of about 2 μm in height and 300 nm in width and second-tier pillars of about 0.5 μm in height and 100 nm in width (second tier), with an average aspect ratio of about 10:1. The replicated linear nanopillars were about 2.5 μm in height with an aspect ratio of about 10:1. The silicone glue was left to set for an hour. A new glass slide was cleaned with acetone, rinsed with ethanol and subsequently with deionized water before being blown dry with nitrogen. Both coins were placed on the glass slide with the nano-pillars in contact with the glass slide as shown in FIG. 5(b). The glass slide was then tilted until one of the coins slid off. As shown in FIG. 5(c), the coin C1 with linear nano-pillars slid off the glass slide 40 first whereas the coin C2 with branched nano-pillars remained adhered to the slide 40.

A further demonstration of the adhesive capability of the polymeric branched nanostructures formed according to the present invention is shown in Figure 6, wherein a replicated PC film having first-tier pillars of about 2.5 μm in height and 300 nm in width and second-tier pillars or branches of about 300nm in height and 100 nm in width can be seen to adhere a 5-cent coin C to a glass slide 40 held at an angle of about 90°.

To determine the frictional adhesion force of an adhesive tape comprising the high aspect ratio adhesive structures of the present invention, 1 x 1 cm² test samples were prepared and tested against a glass surface 70 using a universal mechanical testing machine as shown in FIGS. 8 (a) and (b). Each sample comprised a PC film 62 having nano-pillars formed according to the exemplary method described above, and affixed to a relatively flat surface of a planar test substrate 64 using conventional double-sided adhesive tape (not shown), such that the nano-pillars faced away from the test substrate

64. Each test sample 60 was then placed face down on a horizontally oriented glass surface 70 with the nano-pillars in contact with the glass 70. A weight 80 of 3 g or 30 mN was placed on top of the test sample 60 to load the PC film 62 against the glass 70. The sample 60 was attached to a 2.5 N load cell 72 of the universal testing machine via a thin copper wire 74 having a diameter of about 30 μm . As the test sample 60 and glass surface 70 were horizontally oriented, the thin copper wire 74 was passed through a PTFE pulley 76 before attachment to the vertically oriented load cell 72. Linear guides 76 comprising PTFE tape were positioned with a gap width of 0.5mm on either side of the test sample 60 to constrain the test sample 60 to only linear motion against the glass 70.

The test for each test sample 60 was then run by raising the load cell 72 at a displacement rate of 5mm/min, thereby pulling on the copper wire 74 and shearing the test sample 60 against the glass 70. In this way, the frictional shear adhesion force of the test sample 60 against the glass 70 could be determined as being proportional to the tensile force sensed by the load cell 72 during raising of the load cell 72.

Test samples 60 comprising single-tier or linear pillar structures of about 2 μm in height and 200 nm were prepared and tested. Test samples 60 comprising double-tier or branched pillar structures with first tier pillars of about 2 μm in height and 200 nm were similarly prepared and tested. In addition, a control sample comprising a pristine PC film without any pillar structures was prepared and tested.

FIG. 9 shows the frictional shear adhesion force for the control sample to be about $1.5 \times 10^2 \text{ N/m}^2$. FIG. 10 shows the frictional shear adhesion force for PC films 62 having linear pillar structures 66 and branched pillar structures 68. As can be seen in FIG. 10, linear pillar structures 68 achieved frictional adhesive forces of about $5.5 \times 10^2 \text{ N/m}^2$, which is more than three times greater than that of a pristine PC film. Branched pillar structures 68 achieved maximum frictional adhesion values of about $16.5 \times 10^2 \text{ N/m}^2$, which is three times the frictional force achieved by linear pillar structures 66 or more than ten times greater than that of a pristine PC film.

The tests therefore demonstrate a significant increase in adhesive performance provided by branched pillar structures 68 compared to linear pillar structures 66. This can be attributed to the fact that branched pillar structures 68 provide a more effective and greater number of close-proximity contact points with a surface than similarly-sized linear pillars 66 of the same aspect ratio. Branched pillar structures thus conform better to a surface to enhance adhesion to the surface. It is therefore important for adhesive tapes comprising adhesive pillar structures to have high density and high aspect ratio nanometer scale-sized pillar structures, as provided and demonstrated by the double tier or branched nano-pillars, so as to enhance the adhesive properties of such adhesive tapes.

Whilst there has been described in the foregoing description exemplary embodiments of the present invention, it will be understood by those skilled in the technology concerned that many variations in details of design, construction and/or operation may be made without departing from the present invention. For example, other than by capillary force

as described above, the softened polymer may be introduced into the tiered template by nanoimprinting.

The Claims

1. A method of forming a high aspect ratio adhesive structure, the method comprising:
fabricating a porous template comprising at least a first tier and a second tier;
5 introducing a softened polymer into the template; and
separating the polymer from the template.
2. The method of claim 1, wherein the polymer is introduced into the template by
capillary force.
- 10 3. The method of claim 1, wherein the polymer is introduced into the template by
nanoimprinting.
4. The method of any one of the preceding claims, wherein fabricating the template
15 comprises
creating a first plurality of pores in the template, the first plurality of pores
forming the first tier of the template; and
creating a second plurality of pores in the template, the second plurality of pores
being created within the first plurality of pores, the second plurality of pores
20 forming the second tier of the template.
5. The method claim 4, wherein fabricating the template further comprises creating a
third plurality of pores in the template, the third plurality of pores being created

within the second plurality of pores, the third plurality of pores forming a third tier of the template.

6. The method of any one of the preceding claims, wherein the template comprises an aluminium substrate and fabricating the template includes anodizing the aluminium substrate.

7. The method of any one of the preceding claims, wherein separating the polymer from the template comprises peeling the template away from the polymer after the polymer has cooled in the template.

8. A high aspect ratio adhesive structure obtained by the method of any one of claims 1 to 7, the adhesive structure comprising at least a first tier of pillars and a second tier of pillars, the second tier of pillars each having a smaller diameter than the first tier of pillars, the second tier of pillars being disposed on the first tier of pillars.

9. The high aspect ratio adhesive structure of claim 8, further comprising a third tier of pillars, the third tier of pillars each having a smaller diameter than the second tier of pillars, the third tier of pillars being disposed on the second tier of pillars.

10. An adhesive tape comprising the high aspect ratio adhesive structure of any one of claims 8 or 9.

1 / 6

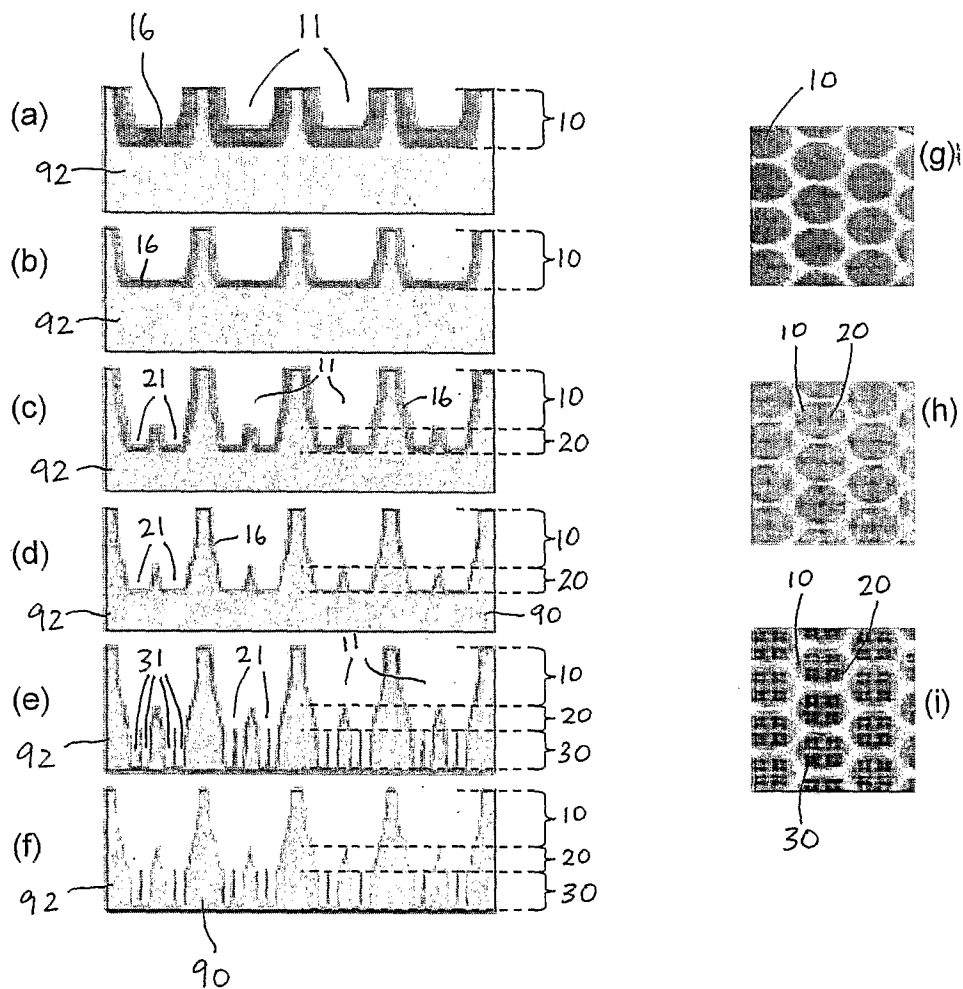


FIG. 1



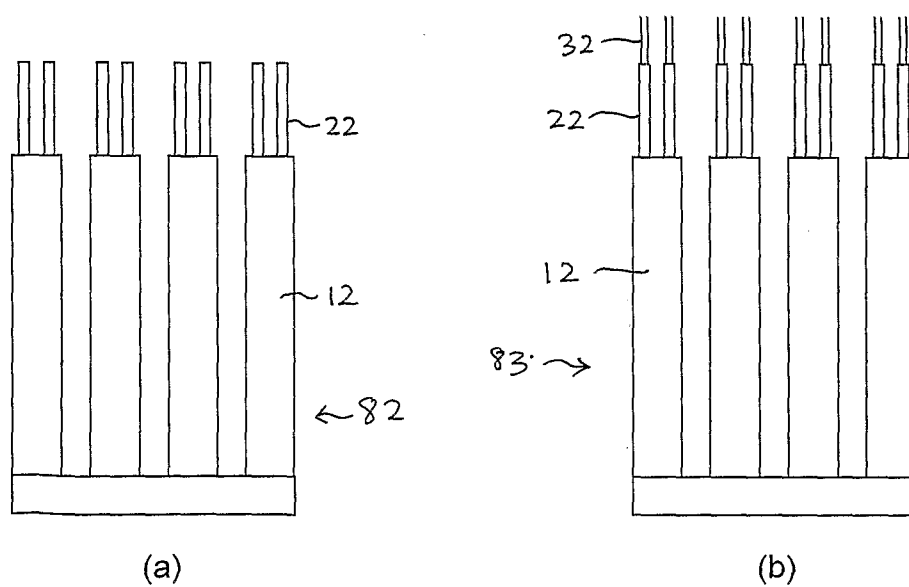


FIG. 2

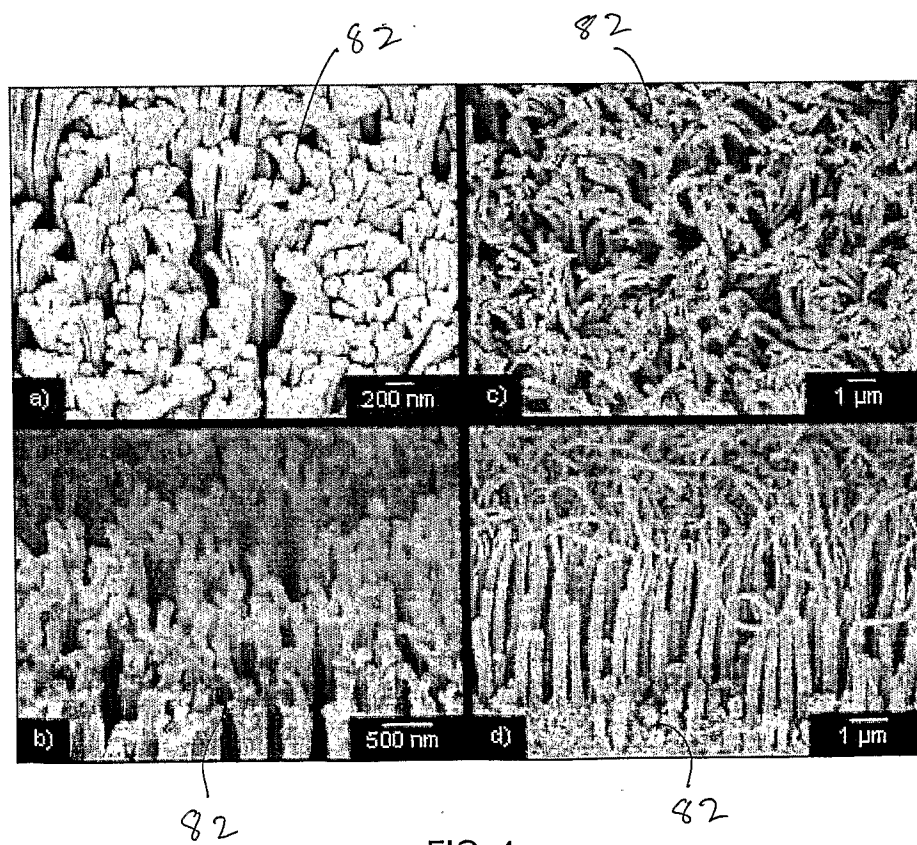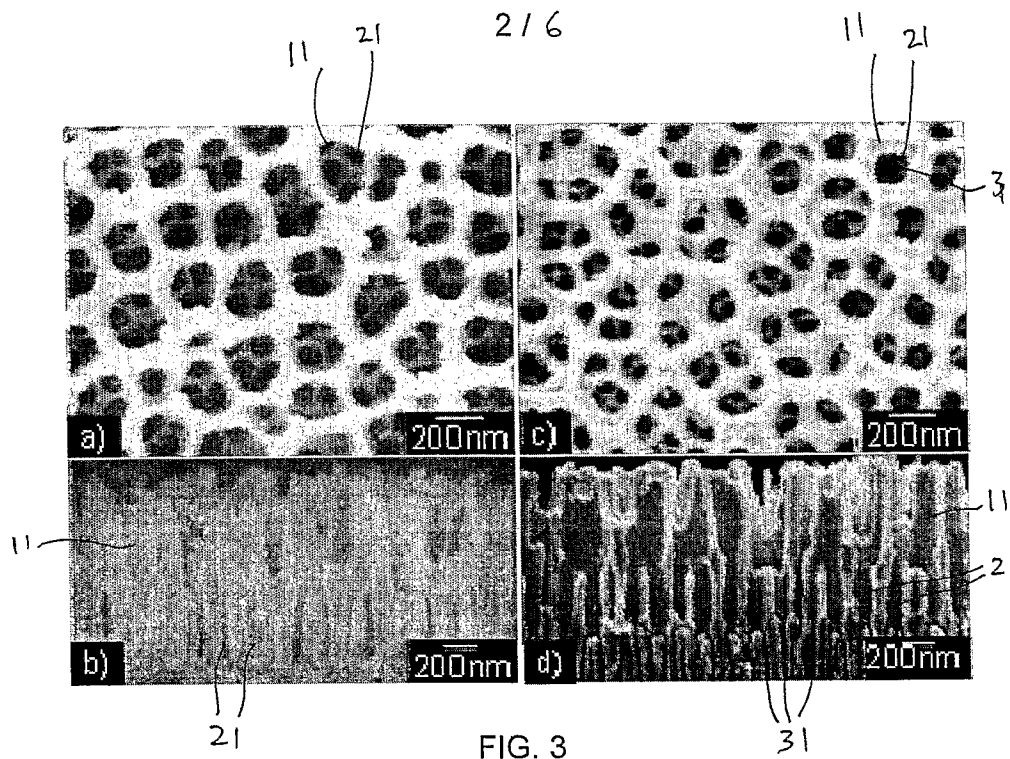

3 / 6

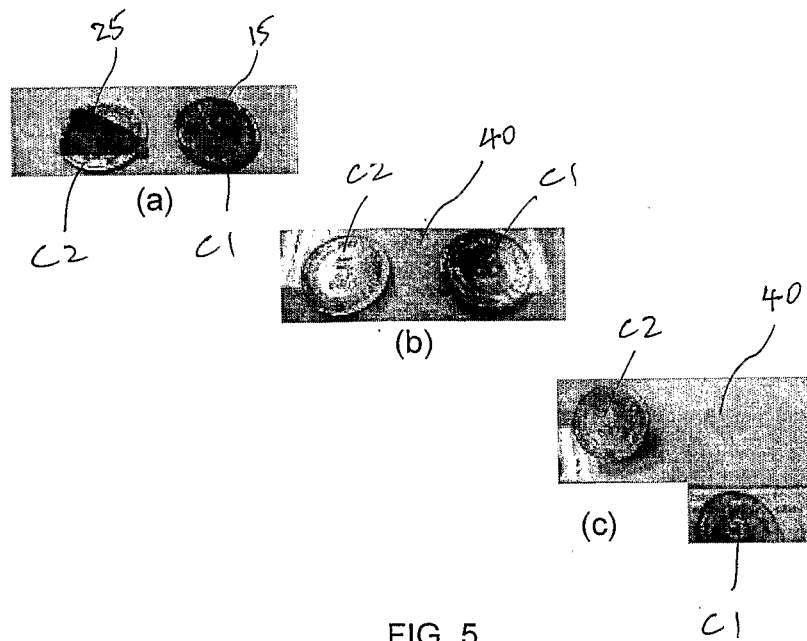


FIG. 5

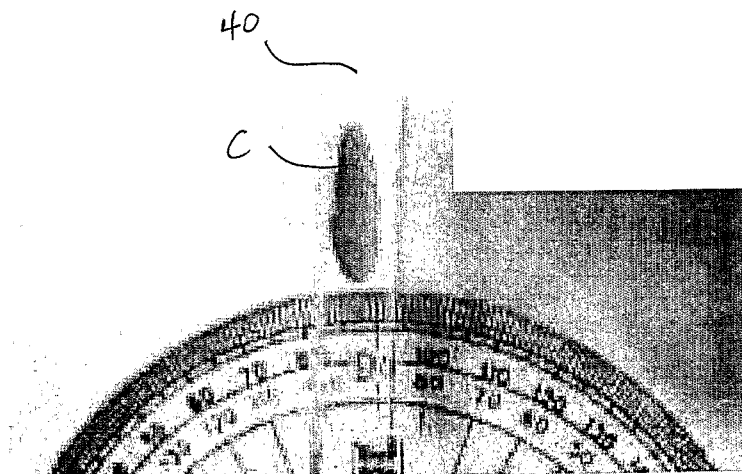


FIG. 6

4 / 6

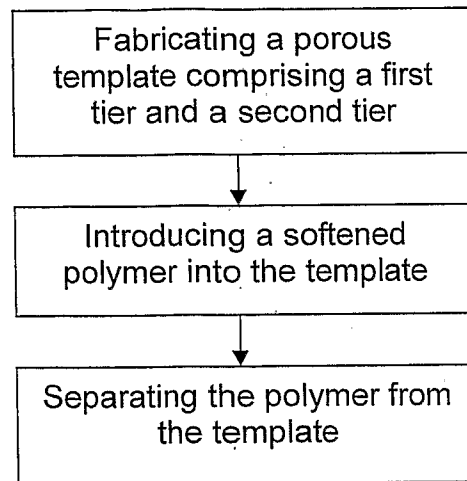


FIG. 7

5 / 6

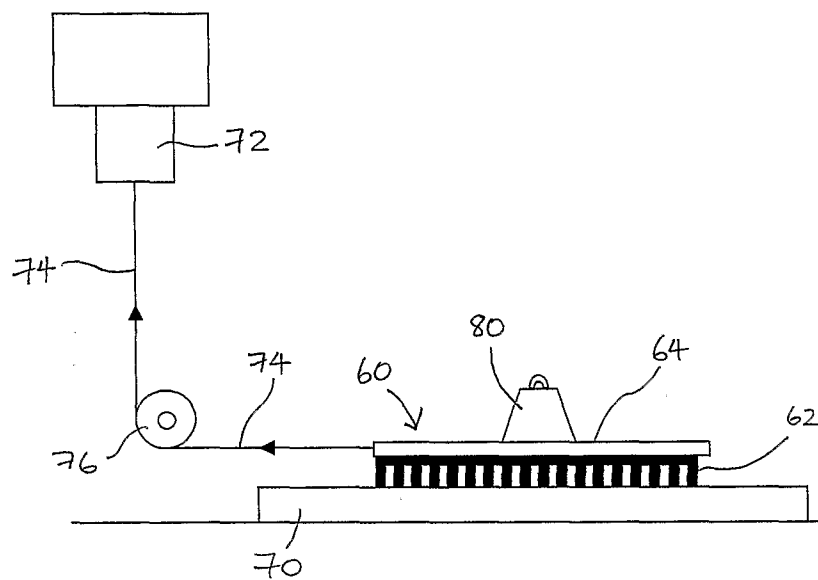


FIG. 8 (a)

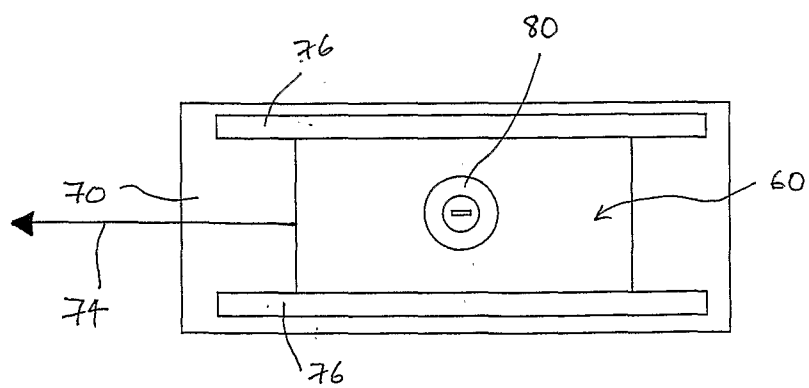


FIG. 8 (b)

6 / 6

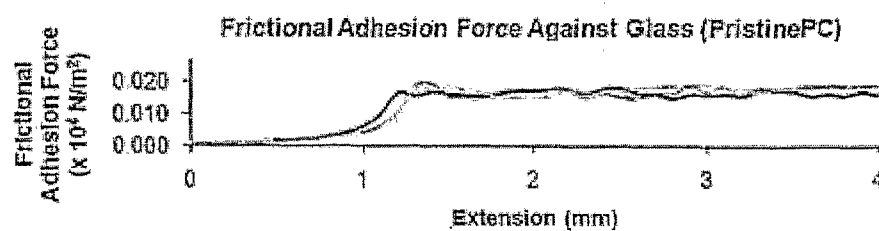


FIG. 9

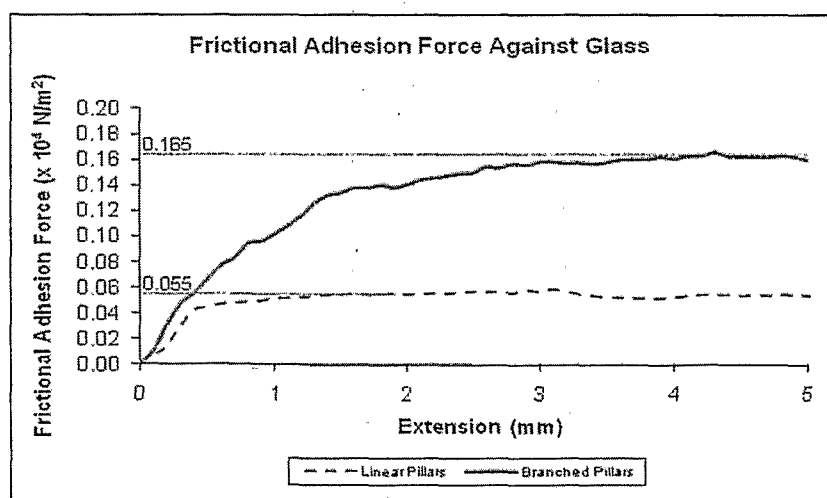


FIG. 10

INTERNATIONAL SEARCH REPORT

International application No.
PCT/SG2010/000056

A. CLASSIFICATION OF SUBJECT MATTER

Int. Cl.

C09J 9/00 (2006.01)

B82B 3/00 (2006.01)

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

WPI, EPODOC: IPC C09J, B82B; Keywords (nanorod, organorod, nanopillar, aspect ratio, adhesive, adhesion, gecko) and similar terms

STN: Keywords (nano, micro, template, mould, mold, adhesive, adhesion) and similar terms

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	Cho et al, "Fabrication of Hairy Polymeric Films Inspired by Geckos: Wetting and High Adhesion Properties", Adv. Funct. Mater., 2008, 18, pp 1089-1096	1, 4-10
Y	Figure 1	9
X	Kim et al, "Biologically inspired polymer microfibers with spatulate tips as repeatable fibrillar adhesives", Appl. Phys. Lett., 2006, 89, 261911, pp1-4	1, 4-5, 7-10
Y	Figures 1, 2	9



Further documents are listed in the continuation of Box C



See patent family annex

* Special categories of cited documents:	
"A" document defining the general state of the art which is not considered to be of particular relevance	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"E" earlier application or patent but published on or after the international filing date	"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
"O" document referring to an oral disclosure, use, exhibition or other means	"&" document member of the same patent family
"P" document published prior to the international filing date but later than the priority date claimed	

Date of the actual completion of the international search

12 April 2010

Date of mailing of the international search report

04 MAY 2010

Name and mailing address of the ISA/AU

AUSTRALIAN PATENT OFFICE
PO BOX 200, WODEN ACT 2606, AUSTRALIA
E-mail address: pct@ipaustalia.gov.au
Facsimile No. +61 2 6283 7999

Authorized officer

RANDALL ENGLISH
AUSTRALIAN PATENT OFFICE
(ISO 9001 Quality Certified Service)
Telephone No : +61 2 6283 2744

INTERNATIONAL SEARCH REPORT

International application No.

PCT/SG2010/000056

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X Y	Davies et al, "A practical approach to the development of a synthetic Gecko tape", International Journal of Adhesion & Adhesives, 2009, 29, pp 380-390, (Available online 26 August 2008) Figure 4	1, 4-10 9
X Y	Sitti, "High Aspect Ratio Polymer Micro/Nano-Structure Manufacturing using Nanoembossing, Nanomolding and Directed Self-Assembly", Proceedings 2003 IEEE/ASME International Conference on Advanced Intelligent Mechatronics, (AIM 2003), 2003, Vol. 2, pp 886-890 Figure 7	1, 4-5, 8-10 9
X Y	Kim et al, "Replication of high-aspect-ratio nanopillar array for biomimetic gecko foot-hair prototype by UV nano embossing with anodic aluminum oxide mold", Microsyst. Technol., 13, 2007, pp 601-606 Figure 1, page 603	1, 3-10 9
X Y	Campo et al, "Contact Shape Controls Adhesion of Bioinspired Fibrillar Surfaces", Langmuir, 2007, 23, pp 10235-10243 Figures 1e, 1f	8-10 9
X Y	Jeong et al, "High aspect-ratio polymer nanostructures by tailored capillarity and adhesive force", Colloids and Surfaces A: Physicochem. Eng. Aspects, 2008, 313-314, pp 359-364 Figure 1d	8-10 9
X Y	Kustandi et al, "Fabrication of a gecko-like hierarchical fibril array using a bonded porous alumina template", J. Micromech. Microeng., 2007, 17, N75-N81 Item 2 "Experimental details", page N78	1-2, 6, 8-10 9
X Y	US 2005/0271869 A1 (Jackson) 8 December 2005 Figures 7B, 14 Figure 14	8-10 9
X Y	WO 2005/065619 A1 (KIMBERLY-CLARK WORLDWIDE, INC) 21 July 2005 Figure 1	8-10 9

INTERNATIONAL SEARCH REPORT

International application No.

PCT/SG2010/000056

C (Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 2008/102621 A1 (NITTO DENKO CORPORATION) 28 August 2008 Figure 1	8-10
Y		9
P, X	WO 2009/117456 A2 (AVERY DENNISON CORPORATION) 24 September 2009 Figures 1, 15	8-10
P, X	Murphy et al, "Enhanced Adhesion by Gecko-Inspired Hierarchical Fibrillar Adhesives", ACS Applied Materials & Interfaces, Vol. 1, No. 4, 2009, pp 840-855 Figures 1, 4	8-10
A	Sitti et al, "Synthetic gecko foot-hair micro/nano-structures as dry adhesives", J. Adhesion Sci. Technol., 2003, Vol. 17, No. 8, pp 1055-1073 Figure 1	1-10

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/SG2010/000056

This Annex lists the known "A" publication level patent family members relating to the patent documents cited in the above-mentioned international search report. The Australian Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

Patent Document Cited in Search Report				Patent Family Member			
US	2005271869	US	2005271870	US	2008023439		
WO	2005065619	CN	1897906	EP	1699403	KR	20060114356
		US	2005148984				
WO	2008102621	JP	2008201883				
WO	2009117456	NONE					
Due to data integration issues this family listing may not include 10 digit Australian applications filed since May 2001.							
END OF ANNEX							