



Europäisches Patentamt  
European Patent Office  
Office européen des brevets



(11) **EP 1 294 534 B1**

(12) **EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention  
of the grant of the patent:  
**18.01.2006 Bulletin 2006/03**

(51) Int Cl.:  
**B24B 37/04** (2006.01) **B24B 49/02** (2006.01)  
**B24B 49/12** (2006.01)

(21) Application number: **01937595.5**

(86) International application number:  
**PCT/US2001/016290**

(22) Date of filing: **18.05.2001**

(87) International publication number:  
**WO 2001/089765 (29.11.2001 Gazette 2001/48)**

(54) **IN-SITU ENDPOINT DETECTION AND PROCESS MONITORING METHOD AND APPARATUS FOR  
CHEMICAL MECHANICAL POLISHING**

VERFAHREN UND VORRICHTUNG ZUR "IN-SITU" ÜBERWACHUNG DER DICKE WÄHREND DES  
CHEMISCH-MECHANISCHEN PLANIERVORGANGES

DETECTION DE POINTE IN SITU ET PROCEDE DE SURVEILLANCE DE PROCESSUS AINSI  
QU'APPAREIL DE POLISSAGE CHIMIQUE MECANIQUE

(84) Designated Contracting States:  
**AT BE CH CY DE FR GB IT LI NL**

(30) Priority: **19.05.2000 US 574008**  
**10.07.2000 US 217228 P**  
**27.07.2000 US 221668 P**

(43) Date of publication of application:  
**26.03.2003 Bulletin 2003/13**

(60) Divisional application:  
**05077315.9**

(73) Proprietor: **APPLIED MATERIALS, INC.**  
**Santa Clara,**  
**California 95054 (US)**

(72) Inventors:  
• **HANAWA, Hiroji**  
**Sunnyvale, CA 94086 (US)**

- **JOHANSSON, Nils**  
**Los Gatos, CA 95032 (US)**
- **SWEDEK, Boguslaw, A.**  
**San Jose, CA 95131 (US)**
- **BIRANG, Manoocher**  
**Los Gatos, CA 95033 (US)**
- **REDEKER, Fritz, C.**  
**Fremont, CA 94539 (US)**
- **BAJAJ, Rajeev**  
**Fremont, CA 94539 (US)**

(74) Representative: **Bayliss, Geoffrey Cyril et al**  
**BOULT WADE TENNANT,**  
**Verulam Gardens**  
**70 Gray's Inn Road**  
**London WC1X 8BT (GB)**

(56) References cited:  
**EP-A- 0 460 348** **US-A- 4 829 251**  
**US-A- 5 355 083** **US-A- 5 644 221**  
**US-A- 5 660 672**

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

## Description

[0001] The present invention relates to an apparatus and a method as per the preambles of claims 1 and 33.

[0002] An example of such an apparatus and method is disclosed by US 5 660 672 A.

[0003] An integrated circuit is typically formed on a substrate by the sequential deposition of conductive, semiconductive or insulative layers on a silicon wafer. One fabrication step involves depositing a filler layer over a non-planar surface, and planarizing the filler layer until the non-planar surface is exposed. For example, a conductive filler layer can be deposited on a patterned insulative layer to fill the trenches or holes in the insulative layer. The filler layer is then polished until the raised pattern of the insulative layer is exposed. After planarization, the portions of the conductive layer remaining between the raised pattern of the insulative layer form vias, plugs and lines that provide conductive paths between thin film circuits on the substrate. In addition, planarization is needed to planarize the substrate surface for photolithography.

[0004] Chemical mechanical polishing (CMP) is one accepted method of planarization. This planarization method typically requires that the substrate be mounted on a carrier or polishing head. The exposed surface of the substrate is placed against a rotating polishing disk pad or belt pad. The polishing pad can be either a "standard" pad or a fixed-abrasive pad. A standard pad has a durable roughened surface, whereas a fixed-abrasive pad has abrasive particles held in a containment media. The carrier head provides a controllable load on the substrate to push it against the polishing pad. A polishing slurry, including at least one chemically-reactive agent, and abrasive particles if a standard pad is used, is supplied to the surface of the polishing pad.

[0005] One problem in CMP is determining whether the polishing process is complete, i.e., whether a substrate layer has been planarized to a desired flatness or thickness, or when a desired amount of material has been removed. Overpolishing (removing too much) of a conductive layer or film leads to increased circuit resistance. On the other hand, underpolishing (removing too little) of a conductive layer leads to electrical shorting. Variations in the initial thickness of the substrate layer, the slurry composition, the polishing pad condition, the relative speed between the polishing pad and the substrate, and the load on the substrate can cause variations in the material removal rate. These variations cause variations in the time needed to reach the polishing endpoint. Therefore, the polishing endpoint cannot be determined merely as a function of polishing time.

[0006] One way to determine the polishing endpoint is to remove the substrate from the polishing surface and examine it. For example, the substrate can be transferred to a metrology station where the thickness of a substrate layer is measured, e.g. with a profilometer or a resistivity measurement. If the desired specifications are not met,

the substrate is reloaded into the CMP apparatus for further processing. This is a time-consuming procedure that reduces the throughput of the CMP apparatus. Alternatively, the examination might reveal that an excessive amount of material has been removed, rendering the substrate unusable.

[0007] More recently, in-situ monitoring of the substrate has been performed, e.g., with optical or capacitance sensors, in order to detect the polishing endpoint. Other proposed endpoint detection techniques have involved measurements of friction, motor current, slurry chemistry, acoustics and conductivity. One detection technique that has been considered is to induce an eddy current in the metal layer and measure the change in the eddy current as the metal layer is removed.

[0008] Another reoccurring problem in CMP is dishing of the substrate surface when polishing a filler layer to expose an underlying layer. Specifically, once the underlying layer is exposed, the portion of the filler layer located between the raised areas of the patterned underlying layer can be overpolished, creating concave depressions in the substrate surface. Dishing can render the substrate unsuitable for integrated circuit fabrication, thereby lowering process yield.

[0009] US-A-5,660,672 discloses a method and apparatus for in situ monitoring of conductive films on semiconductor wafer. The change in thickness of a film on a semiconductor wafer is monitored in situ by inducing a current in the film and as the thickness of the film changes, the changes in the current are detected. With a conductive film, eddy currents are induced in the film by generating an alternating electromagnetic field for the sensor which includes a capacitor and an inductor.

[0010] This invention provides a chemical mechanical polishing apparatus, comprising a polishing pad, a carrier to hold a substrate against a first side of the polishing pad, an eddy current sensor including at least one inductor, an oscillator electrically coupled to the at least one inductor to induce an alternating current in a coil of the inductor and thereby generate an alternating magnetic field, and a capacitor electrically coupled to the at least one inductor, and a motor coupled to at least one of the polishing pad and carrier for generating relative motion therebetween, wherein the inductor is positioned on a second side of the polishing pad opposite the substrate and the inductor includes a core positioned at least partially in a recess in the polishing pad on the second side of the polishing pad.

[0011] In one arrangement a sensor for monitoring a conductive film in a substrate has a core positionable in proximity to the substrate as aforesaid, a first coil wound around a first portion of the core, an oscillator electrically coupled to the first coil to induce an alternating current in the first coil and generate an alternating magnetic field in proximity to the substrate, and a second coil wound around a second portion of the core. A capacitor is electrically coupled to the second coil, and an amplifier is electrically coupled to the second coil and the capacitor

to generate an output signal.

**[0012]** The oscillator may induce an alternating current with a frequency selected to provide a resonant frequency when the substrate is not in proximity to the core. The core may consist essentially of ferrite, and may include two prongs and a connecting portion between the two prongs. The first coil may be wound around the connecting portion, and the second coil may be wound around at least one of the two prongs. The second coil and the capacitor may be connected in parallel. The sensor may be positioned on a side of a polishing pad opposite the substrate. The polishing pad may include an upper layer and a lower layer, and an aperture may be formed in at least a portion of the lower layer adjacent the core. A computer may receive the output signal.

**[0013]** In a further arrangement the apparatus has a polishing pad, a carrier to hold a substrate against a first side of the polishing surface, an eddy current sensor, and a motor coupled to at least one of the polishing pad and carrier head for generating relative motion therebetween. The sensor includes at least one inductor positioned on a second side of the polishing pad opposite the substrate, an oscillator electrically coupled to the at least one inductor to induce an alternating current in the coil and generate an alternating magnetic field, and a capacitor electrically coupled to the at least one inductor.

**[0014]** A platen may support the polishing pad, and the at least one inductor may be positioned in a recess in a top surface of the platen. The platen may rotate, and a position sensor may determine an angular position of the platen and a controller to sample data from the eddy current sensor when the at least one inductor is positioned adjacent the substrate. A recess may be formed in the second side of the polishing pad. The polishing pad may include a cover layer on the first side of the polishing pad and a backing layer on the second side of the polishing pad, and the recess may be formed by removing a portion of the backing layer. The eddy current sensor may include a core having two poles positioned adjacent the recess in the polishing pad, and the at least one inductor is wound around a first portion of the core. The eddy current sensor may include a core, and the at least one inductor may include a first inductor wound around a first portion of the core and a second inductor wound around a second portion of the core. The oscillator may be electrically coupled to the first coil to induce an alternating current in the first coil. The capacitor may be electrically coupled to the second coil. The oscillator may induce an alternating current with a frequency selected to provide a resonant frequency when the substrate is not in proximity to the core. An endpoint detection system may receive an output signal from the eddy current sensor. The endpoint detection system may be configured to signal a polishing endpoint if the output signal exceeds a predetermined threshold.

**[0015]** The invention also provides a method of monitoring a thickness of a conductive layer in a substrate during a polishing operation, comprising positioning a substrate on a first side of a polishing surface; generating

an alternating magnetic field from an inductor positioned opposite the substrate, the magnetic field extending through the polishing surface to induce eddy currents in the conductive layer; and detecting a change in the alternating magnetic field caused by a change in the thickness of the conductive layer; wherein the inductor includes a core positioned at least partially in a recess on a second side of the polishing surface.

**[0016]** Implementations of the method may include one or more of the following features. A first coil may be driven with an oscillator at a first frequency. The first frequency may be a resonant frequency when the substrate is not in proximity to the magnetic field. The alternating magnetic field may be sensed with a second coil. The second coil may be connected in parallel with a capacitor. The first coil may be wound around a first portion of a core, and the second coil may be wound around a second portion of the core. When the inductor is adjacent the substrate may be determined. The inductor may be driven with a first signal, and a second signal may be generated from the alternating magnetic field. A change in amplitude in the second signal may be determined. A change in a phase difference between the first signal and the second signal may be determined.

**[0017]** In the method, a substrate having a conductive layer is positioned on a first side of a polishing surface. An alternating magnetic field is generated from an inductor positioned on a second side of the polishing surface opposite the substrate. The magnetic field extends through the polishing surface to induce eddy currents in the conductive layer. Relative motion is created between the substrate and the polishing surface to polish the conductive layer. The eddy currents in the substrate are sensed, and polishing is halted when the sensed eddy currents exhibit an endpoint criteria.

**[0018]** Implementations of the invention may include one or more of the following features. The endpoint criteria may be the eddy currents passing a threshold strength or leveling off.

**[0019]** The apparatus has a polishing pad with a polishing surface, a carrier to hold a substrate against the polishing surface, a motor coupled to at least one of the polishing pad and carrier head for generating relative motion therebetween, and a conductive layer thickness monitoring system. The conductive layer thickness monitoring system including at least one inductor, a current source that generates a drive signal, the current source electrically coupled to the at least one inductor to induce an alternating current in the at least one inductor and generate an alternating magnetic field, sense circuitry including a capacitor electrically coupled to the at least one inductor to sense the alternating magnetic field and generate a sense signal, and phase comparison circuitry coupled to the current source and the sense circuitry to measure a phase difference between the sense signal and the drive signal.

**[0020]** Implementations of the invention may include one or more of the following features. At least one first

gate, e.g., an XOR gate, may convert sinusoidal signals from the inductor and the oscillator into first and second square-wave signals. A comparator, e.g., an XOR gate, may compare the first square-wave signal to the second square-wave signal to generate a third square-wave signal. A filter may convert the third square-wave signal into differential signal having an amplitude proportional to the phase difference between the first and second square wave signals. The phase comparison circuitry may generate a signal with a duty cycle proportional to the phase difference.

**[0021]** In the method, a coil is energized with a first signal to generate an alternating magnetic field. The alternating magnetic field induces eddy currents in a conductive layer of the substrate. The alternating magnetic field is measured and a second signal is generated indicative of the magnetic field. The first and second signals are compared to determine a phase difference therebetween.

**[0022]** The apparatus has a polishing pad, a carrier to hold a substrate against a first side of the polishing surface, an eddy current monitoring system positioned to generate an alternating magnetic field in proximity to the substrate, an optical monitoring system that generates a light beam and detects reflections of the light beam from the substrate, a controller to receive signals from the eddy current monitoring system and the optical monitoring system, and a motor coupled to at least one of the polishing pad and carrier head for generating relative motion therebetween.

**[0023]** Implementations of the invention may include one or more of the following features. The eddy current monitoring system may include an inductor positioned on a second side of the polishing pad opposite the substrate. The inductor may be positioned in a first cavity in a platen below the polishing pad. The optical monitoring system may include a light source and a photodetector positioned on a second side of the polishing pad opposite the substrate. The light source and photodetector may be positioned in the first cavity in a platen below the polishing pad, or in a second cavity. The eddy current monitoring system and the optical monitoring system may be positioned to monitor substantially the same radial position on the substrate. The controller may be configured to detect endpoint criteria in signals from both the eddy current monitoring system and the optical monitoring system.

**[0024]** In the method, a substrate is positioned on a first side of a polishing surface, relative motion is created between the substrate and the polishing surface to polish the substrate, a first signal is generated from an eddy current monitoring system, a second signal is generated from an optical monitoring system, and the first and second signals are monitored for endpoint criteria.

**[0025]** Implementations of the invention may include one or more of the following features. Polishing may be halted when endpoint criteria have been detected in both the first and second signals, or when an endpoint criterion

has been detected in either the first or second signal. The substrate may include a metal layer, and the monitoring step may include monitoring the signal from the eddy current monitoring system until the metal layer reaches a predetermined thickness and then monitoring the signal from the optical monitoring system.

**[0026]** The substrate is polished at a first polishing station with a first polishing surface at a first polishing rate. Polishing at the first polishing station is monitored with an eddy current monitoring system, and the substrate is transferred to a second polishing station when the eddy current monitoring system indicates that a predetermined thickness of the metal layer remains on the substrate. The substrate is polished at the second polishing station with a second polishing surface at a second polishing rate that is lower than the first polishing rate. Polishing is monitored at the second polishing station with an optical monitoring system, polishing is halted when the optical monitoring system indicates that a first underlying layer is at least partially exposed.

**[0027]** Implementations of the invention may include one or more of the following features. The first underlying layer may be a barrier layer. The substrate may be transferred to a third polishing station and polished with a third polishing surface. Polishing at the third polishing station may be monitored with a second optical monitoring system, and polishing may be halted when the second optical monitoring system indicates that a second underlying layer is at least partially exposed. Polishing at the third polishing station may continue until the second underlying layer is substantially entirely exposed. Polishing at the second polishing station may continue until the first underlying layer is substantially entirely exposed. Polishing the substrate at the second polishing station may include an initiation polishing step at a higher pressure than the remaining polishing at the second polishing station.

**[0028]** The substrate is polished at a first polishing station with a first polishing surface at a first polishing rate. Polishing at the first polishing station is monitored with an eddy current monitoring system, and the polishing rate at the first polishing station is reduced when the eddy current monitoring system indicates that a predetermined thickness of the metal layer remains on the substrate. Polishing at the first polishing station is monitored with an optical monitoring system, and polishing is halted when the optical monitoring system indicates that a first underlying layer is at least partially exposed.

**[0029]** Implementations of the invention may include one or more of the following features. The first underlying layer may be a barrier layer. The substrate may be transferred to a second polishing station and polished with a second polishing surface. Polishing at the second polishing station may be monitored with a second optical monitoring system, and polishing may be halted when the second optical monitoring system indicates that a second underlying layer is at least partially exposed. The substrate may be transferred to a third Polishing station and buffed with a buffing surface. Polishing at the second

polishing station may continue until the first underlying layer is substantially entirely exposed.

**[0030]** Polishing is monitored with an eddy current monitoring system, and the polishing rate is reduced when the eddy current monitoring system indicates that a predetermined thickness of the metal layer remains on the substrate. Polishing is monitored with an optical monitoring system, and polishing is halted when the optical monitoring system indicates that an underlying layer is at least partially exposed.

**[0031]** Possible advantages of implementations of the invention can include one or more of the following. During bulk polishing of the metal layer, the pressure profile applied by the carrier head can be adjusted to compensate for non-uniform polishing rates and non-uniform thickness of the incoming substrate. In addition, the polishing monitoring system can sense the polishing endpoint of a metal layer in-situ. Furthermore, the polishing monitoring system can determine the point at which the polishing apparatus should switch polishing parameters. For example, the polishing monitoring system can be used to trigger a polishing rate slow-down during polishing of a metal layer prior to the polishing endpoint. Polishing can be stopped with high accuracy. Overpolishing and underpolishing can be reduced, as can dishing and erosion, thereby improving yield and throughput.

**[0032]** Other features and advantages of the invention will become apparent from the following description reference being made to the accompanying drawings in which:

FIG. 1 is a schematic exploded perspective view of a chemical mechanical polishing apparatus.

FIG. 2 is a schematic cross-sectional view of a carrier head.

FIG. 3 is a schematic side view, partially cross-sectional, of a chemical mechanical polishing station that includes an eddy current monitoring system and an optical monitoring system.

FIGS. 4A-4E are schematic top views of a platen from the polishing station of FIG. 3.

FIG. 5 is a schematic cross-sectional view illustrating a magnetic field generated by the eddy current monitoring system.

FIG. 6 is a schematic perspective view of a core from an eddy current sensor.

FIGS. 7A-7D schematically illustrate a method of detecting a polishing endpoint using an eddy current sensor.

FIG. 8 is a graph illustrating an amplitude trace from the eddy current monitoring system.

FIGS. 9A and 9B are schematic circuit diagrams of an eddy current monitoring systems.

FIG. 10 is a graph illustrating a phase shift trace from the eddy current monitoring system.

FIG. 11 is a graph illustrating an amplitude trace from the optical monitoring system.

FIG. 12 is a flowchart illustrating a method of polish-

ing a metal layer.

FIG. 13 is a flowchart illustrating an alternative method of polishing a metal layer.

FIG. 14 is a schematic side view, partially cross-sectional, of a chemical mechanical polishing station that includes an eddy current monitoring system.

FIGS. 15A-15B are schematic cross-sectional views of a polishing pad.

**[0033]** Referring to FIGS. 1, one or more substrates 10 can be polished by a CMP apparatus 20. A description of a similar polishing apparatus 20 can be found in U.S. Patent No. 5,738,574, the entire disclosure of which is incorporated herein by reference. Polishing apparatus 20 includes a series of polishing stations 22a, 22b and 22c, and a transfer station 23. Transfer station 23 transfers the substrates between the carrier heads and a loading apparatus.

**[0034]** Each polishing station includes a rotatable platen 24 on which is placed a polishing pad 30. The first and second stations 22a and 22b can include a two-layer polishing pad with a hard durable outer surface or a fixed-abrasive pad with embedded abrasive particles. The final polishing station 22c can include a relatively soft pad or a two-layer pad. Each polishing station can also include a pad conditioner apparatus 28 to maintain the condition of the polishing pad so that it will effectively polish substrates.

**[0035]** Referring to FIG. 3A, a two-layer polishing pad 30 typically has a backing layer 32 which abuts the surface of platen 24 and a covering layer 34 which is used to polish substrate 10. Covering layer 34 is typically harder than backing layer 32. However, some pads have only a covering layer and no backing layer. Covering layer 34 can be composed of foamed or cast polyurethane, possibly with fillers, e.g., hollow microspheres, and/or a grooved surface. Backing layer 32 can be composed of compressed felt fibers leached with urethane. A two-layer polishing pad, with the covering layer composed of IC-1000 and the backing layer composed of SUBA-4, is available from Rodel, Inc., of Newark, Delaware (IC-1000 and SUBA-4 are product names of Rodel, Inc.).

**[0036]** During a polishing step, a slurry 38 containing a liquid (e.g., deionized water for oxide polishing) and a pH adjuster (e.g., potassium hydroxide for oxide polishing) can be supplied to the surface of polishing pad 30 by a slurry supply port or combined slurry/rinse arm 39. If polishing pad 30 is a standard pad, slurry 38 can also include abrasive particles (e.g., silicon dioxide for oxide polishing).

**[0037]** Returning to FIG. 1, a rotatable multi-head carousel 60 supports four carrier heads 70. The carousel is rotated by a central post 62 about a carousel axis 64 by a carousel motor assembly (not shown) to orbit the carrier head systems and the substrates attached thereto between polishing stations 22 and transfer station 23. Three of the carrier head systems receive and hold substrates, and polish them by pressing them against the polishing

pads. Meanwhile, one of the carrier head systems receives a substrate from and delivers a substrate to transfer station 23.

**[0038]** Each carrier head 70 is connected by a carrier drive shaft 74 to a carrier head rotation motor 76 (shown by the removal of one quarter of cover 68) so that each carrier head can independently rotate about its own axis. In addition, each carrier head 70 independently laterally oscillates in a radial slot 72 formed in carousel support plate 66. A description of a suitable carrier head 70 can be found in US-A-6422927 and US-A-6450868. In operation, the platen is rotated about its central axis 25, and the carrier head is rotated about its central axis 71 and translated laterally across the surface of the polishing pad.

**[0039]** As disclosed in the foregoing patent application and as shown in FIG. 2, an exemplary carrier head 70 includes a housing 202, a base assembly 204, a gimbal mechanism 206 (which can be considered part of the base assembly 204), a loading chamber 208, a retaining ring 210, and a substrate backing assembly 212 which includes three pressurizable chambers, such as a floating upper chamber 236, a floating lower chamber 234, and an outer chamber 238. The loading chamber 208 is located between the housing 202 and the base assembly 204 to apply a load to and to control the vertical position of the base assembly 204. A first pressure regulator (not shown) can be fluidly connected to the loading chamber 208 by a passage 232 to control the pressure in the loading chamber and the vertical position of base assembly 204.

**[0040]** The substrate backing assembly 212 includes a flexible internal membrane 216, a flexible external membrane 218, an internal support structure 220, an external support structure 230, an internal spacer ring 222 and an external spacer ring 232. The flexible internal membrane 216 includes a central portion which applies pressure to the wafer 10 in a controllable area. The volume between the base assembly 204 and the internal membrane 216 that is sealed by an inner flap 244 provides the pressurizable floating lower chamber 234. The annular volume between the base assembly 204 and the internal membrane 216 that is sealed by the inner flap 244 and outer flap 246 defines the pressurizable floating upper chamber 236. The sealed volume between the internal membrane 216 and the external membrane 218 defines a pressurizable outer chamber 238. Three pressure regulators (not shown) can be independently connected to the floating lower chamber 234, the floating upper chamber 236 and the outer chamber 238. Thus, a fluid such as a gas can be directed into or out of each chamber independently.

**[0041]** The combination of pressures in the floating upper chamber 236, the floating lower chamber 234 and the outer chamber 238 control both the contact area and the pressure of the internal membrane 216 against a top surface of the external membrane 218. For example, by pumping fluid out of the floating upper chamber 236, the

edge of the internal membrane 216 is lifted away from the external membrane 218, thereby decreasing the contact diameter  $D_C$  of the contact area between the internal membrane and external membrane. Conversely, by pumping fluid into the floating upper chamber 236, the edge of the internal membrane 216 is lowered toward the external membrane 218, thereby increasing the contact diameter  $D_C$  of the contact area. In addition, by pumping fluid into or out of the floating lower chamber 234, the pressure of the internal membrane 216 against the external membrane 218. Thus, but the pressure in and the diameter of the area loaded by the carrier head can be controlled.

**[0042]** Referring to FIGS. 3A and 3B, a recess 26 is formed in platen 24, and a transparent section 36 is formed in polishing pad 30 overlying recess 26. Aperture 26 and transparent section 36 are positioned such that they pass beneath substrate 10 during a portion of the platen's rotation, regardless of the translational position of the carrier head. Assuming that polishing pad 32 is a two-layer pad, thin pad section 36 can be constructed by removing a portion of backing layer 32 and inserting a transparent plug 36 into the cover layer 34. The plug 36 can be a relatively pure polymer or polyurethane, e.g., formed without fillers. In general, the material of transparent section 36 should be non-magnetic and non-conductive.

**[0043]** Referring to FIGS. 3 and 4A to 4E, the first polishing station 22a includes an in-situ eddy current monitoring system 40 and an optical monitoring system 140. The eddy current monitoring system 40 and optical monitoring system 140 can function as a polishing process control and endpoint detection system. The second polishing station 22b and the final polishing station 22c can both include just an optical monitoring system, although either may additionally include an eddy current monitoring system.

**[0044]** The eddy current monitoring system 40 includes a drive system to induce eddy currents in a metal layer on the substrate and a sensing system to detect eddy currents induced in the metal layer by the drive system. The monitoring system 40 includes a core 42 positioned in recess 26 to rotate with the platen, a drive coil 44 wound around one part of core 42, and a sense coil 46 wound around second part of core 42. For drive system, monitoring system 40 includes an oscillator 50 connected to drive coil 44. For sense system 58, monitoring system 40 includes a capacitor 52 connected in parallel with sense coil 46, an RF amplifier 54 connected to sense coil 46, and a diode 56. The oscillator 50, capacitor 52, RF amplifier 54, and diode 56 can be located apart from platen 24, and can be coupled to the components in the platen through a rotary electrical union 29.

**[0045]** Referring to FIG. 5, in operation the oscillator 50 drives drive coil 44 to generate an oscillating magnetic field that extends through the body of core 42 and into the gap 46 between the two poles 42a and 42b of the core. At least a portion of magnetic field 48 extends

through-thin portion 36 of polishing pad 30 and into substrate 10. If a metal layer 12 is present on substrate 10, oscillating magnetic field generates eddy current in the metal layer 12. The eddy currents cause the metal layer 12 to act as an impedance source in parallel with sense coil 46 and capacitor 52. As the thickness of the metal layer changes, the impedance changes, resulting in a change in the Q-factor of sensing mechanism. By detecting the change in the Q-factor of the sensing mechanism, the eddy current sensor can sense the change in the strength of the eddy currents, and thus the change in thickness of metal layer 12.

**[0046]** Referring to FIG. 6, core 42 can be a U-shaped body formed of a non-conductive material with a relatively high magnetic permeability (e.g., of about 2500). Specifically, core 42 can be ferrite. In one implementation, the two poles 42a and 42b are about 0.6 inches apart, the core is about 0.6 inches deep, and the cross-section of the core is a square about 0.2 inches on a side.

**[0047]** In general, the in-situ eddy current monitoring system 40 is constructed with a resonant frequency of about 50 kHz to 10 MHz, e.g., 2 MHz. For example, the sense coil 46 can have an inductance of about 0.3 to 30 microH and the capacitor 52 can have a capacitance of about 0.2 to 20 nF. The driving coil can be designed to match the driving signal from the oscillator. For example, if the oscillator has a low voltage and a low impedance, the drive coil can include fewer turns to provide a small inductance. On the other hand, if the oscillator has a high voltage and a high impedance, the drive coil can include more turns to provide a large inductance.

**[0048]** In one implementation, the sense coil 46 includes nine turns around each prong of the core, and the drive coil 44 includes two turns around the base of the core, and the oscillator drives the drive coil 44 with an amplitude of about 0.1 V to 5.0 V. Also, in one implementation, the sense coil 46 has an inductance of about 2.8 microH, the capacitor 52 has a capacitance of about 2.2 nF, and the resonant frequency is about 2 MHz. In another implementation, the sense coil has an inductance of about 3 microH and the capacitor 52 has a capacitance of about 400 pF. Of course, these values are merely exemplary, as they are highly sensitive to the exact winding configuration, core composition and shape, and capacitor size.

**[0049]** In general, the greater the expected initial thickness of the conductive film, the lower the desired resonant frequency. For example, for a relatively thin film, e.g., 2000 Angstroms, the capacitance and inductance can be selected to provide a relatively high resonant frequency, e.g., about 2 MHz. On the other hand, for a relatively thicker film, e.g., 20000 Angstroms, the capacitance and inductance can be selected to provide a relatively lower resonant frequency, e.g., about 50 kHz. However, high resonant frequencies may still work well with thick copper layers. In addition, very high frequencies (above 2 MHz) can be used to reduce background noise from metal parts in the carrier head.

**[0050]** Initially, referring to FIGS. 3A, 4 and 7A, before conducting polishing, oscillator 50 is tuned to the resonant frequency of the LC circuit, without any substrate present. This resonant frequency results in the maximum amplitude of the output signal from RF amplifier 54.

**[0051]** As shown in FIGS. 7B and 8, for a polishing operation, a substrate 10 is placed in contact with polishing pad 30. Substrate 10 can include a silicon wafer 12 and a conductive layer 16, e.g., a metal such as copper, disposed over one or more patterned underlying layers 14, which can be semiconductor, conductor or insulator layers. A barrier layer 18, such as tantalum or tantalum nitride, may separate the metal layer from the underlying dielectric. The patterned underlying layers can include metal features, e.g., vias, pads and interconnects. Since, prior to polishing, the bulk of conductive layer 16 is initially relatively thick and continuous, it has a low resistivity, and relatively strong eddy currents can be generated in the conductive layer. As previously mentioned, the eddy currents cause the metal layer to function as an impedance source in parallel with sense coil 46 and capacitor 52. Consequently, the presence of conductive film 16 reduces the Q-factor of the sensor circuit, thereby significantly reducing the amplitude of the signal from RF amplifier 56.

**[0052]** Referring to FIGS. 7C and 8, as substrate 10 is polished, the bulk portion of conductive layer 16 is thinned. As the conductive layer 16 thins, its sheet resistivity increases, and the eddy currents in the metal layer become dampened. Consequently, the coupling between metal layer 16 and sensor circuitry 58 is reduced (i.e., increasing the resistivity of the virtual impedance source). As the coupling declines, the Q-factor of the sensor circuit 58 increases toward its original value.

**[0053]** Referring to FIGS. 7D and 8, eventually the bulk portion of conductive layer 16 is removed, leaving conductive interconnects 16' in the trenches between the patterned insulative layer 14. At this point, the coupling between the conductive portions in the substrate, which are generally small and generally non-continuous, and sensor circuit 58 reaches a minimum. Consequently, the Q-factor of the sensor circuit reaches a maximum value (although not as large as the Q-factor when the substrate is entirely absent). This causes the amplitude of the output signal from the sensor circuit to plateau.

**[0054]** Thus, by sensing when the amplitude of the output signal is no longer increasing and has leveled off (e.g., reached a local plateau), computer 90 can sense a polishing endpoint. Alternatively, by polishing one or more test substrates, the operator of the polishing machine can determine the amplitude of the output signal as a function of the thickness of the metal layer. Thus, the endpoint detector can halt polishing when a particular thickness of the metal layer remains on the substrate. Specifically, computer 90 can trigger the endpoint when the output signal from the amplifier exceeds a voltage threshold corresponding to the desired thickness. Alternatively, the eddy current monitoring system can also be

used to trigger a change in polishing parameters. For example, when the monitoring system detects a polishing criterion, the CMP apparatus can change the slurry composition (e.g., from a high-selectivity slurry to a low selectivity slurry). As another example, as discussed below, the CMP apparatus can change the pressure profile applied by the carrier head.

**[0055]** Referring to FIG. 9A, in addition to sensing changes in amplitude, the eddy current monitoring system can include a phase shift sensor 94 to calculate a phase shift in the sensed signal. As the metal layer is polished, the phase of the sensed signal changes relative to the drive signal from the oscillator 50. This phase difference can be correlated to the thickness of the polished layer.

**[0056]** An implementation for both the amplitude and phase shift portions of the eddy current monitoring system is shown in FIG. 9B. This implementation, as shown in FIG. 9B, combines the drive and sense signals to generate a phase shift signal with a pulse width or duty cycle which is proportional to the phase difference. In this implementation, two XOR gates 100 and 102 are used to convert sinusoidal signals from the sense coil 46 and oscillator 50, respectively, into square-wave signals. The two square-wave signals are fed into the inputs of a third XOR gate 104. The output of the third XOR gate 104 is a phase shift signal with a pulse width or duty cycle proportional to the phase difference between the two square wave signals. The phase shift signal is filtered by an RC filter 106 to generate a DC-like signal with a voltage proportional to the phase difference. Alternatively, the signals can be fed into a programmable digital logic, e.g., a Complex Programmable Logic Device (CPLD) or Field Programmable Gate Array (FPGA) that performs the phase shift measurements. Another implementation of the amplitude sensing portion of the eddy current monitoring system is shown in FIG. 9C. An example of a trace generated by an eddy current monitoring system that measures the phase difference between the drive and sense signals is shown in FIG. 10. Since the phase measurements are highly sensitive to the stability of the driving frequency, phase locked loop electronics may be added.

**[0057]** A possible advantage of the phase difference measurement is that the dependence of the phase difference on the metal layer thickness may be more linear than that of the amplitude. In addition, the absolute thickness of the metal layer may be determined over a wide range of possible thicknesses.

**[0058]** Returning to FIG. 3A, the optical monitoring system 140, which can function as a reflectometer or interferometer, can be secured to platen 24 in recess 26 adjacent the eddy current monitoring system 40. Thus, the optical monitoring system 140 can measure the reflectivity of substantially the same location on the substrate as is being monitored by the eddy current monitoring system 40. Specifically, the optical monitoring system 140 can be positioned to measure a portion of the substrate at the same radial distance from the axis of rotation of

the platen 24 as the eddy current monitoring system 40. Thus, the optical monitoring system 140 can sweep across the substrate in the same path as the eddy current monitoring system 40.

**[0059]** The optical monitoring system 140 includes a light source 144 and a detector 146. The light source generates a light beam 142 which propagates through transparent window section 36 and slurry to impinge upon the exposed surface of the substrate 10. For example, the light source 144 may be a laser and the light beam 142 may be a collimated laser beam. The light laser beam 142 can be projected from the laser 144 at an angle from an axis normal to the surface of the substrate 10. In addition, if the hole 26 and the window 36 are elongated, a beam expander (not illustrated) may be positioned in the path of the light beam to expand the light beam along the elongated axis of the window. In general, the optical monitoring system functions as described in U.S. Patent No. 6,159,073, and U.S. Patent Application No. 09/184,767, filed November 2, 1998, the entire disclosures of which are incorporated herein by references.

**[0060]** An example of a trace 250 generated by an optical monitoring system that measures the phase difference between the drive and sense signals is shown in FIG. 11. The overall shape of intensity trace 250 may be explained as follows. Initially, the metal layer 16 has some initial topography because of the topology of the underlying patterned layer 14. Due to this topography, the light beam scatters when it impinges the metal layer. As the polishing operation progresses in section 252 of the trace, the metal layer becomes more planar and the reflectivity of the polished metal layer increases. As the bulk of the metal layer is removed in section 254 of the trace, the intensity remains relatively stable. Once the oxide layer begins to be exposed in the trace, the overall signal strength drops quickly in section 256 of the trace. Once the oxide layer is entirely exposed in the trace, the intensity stabilizes again in section 258 of the trace, although it may undergo small oscillations due to interferometric effects as the oxide layer is removed.

**[0061]** Returning to FIGS. 3 and 4A to 4E, the CMP apparatus 20 can also include a position sensor 80, such as an optical interrupter, to sense when core 42 and light source 44 are beneath substrate 10. For example, the optical interrupter could be mounted at a fixed point opposite carrier head 70. A flag 82 is attached to the periphery of the platen. The point of attachment and length of flag 82 is selected so that it interrupts the optical signal of sensor 80 while transparent section 36 sweeps beneath substrate 10. Alternately, the CMP apparatus can include an encoder to determine the angular position of platen.

**[0062]** A general purpose programmable digital computer 90 receives the intensity signals and phase shift signals from the eddy current sensing system, and the intensity signals from the optical monitoring system. Since the monitoring systems sweep beneath the substrate with each rotation of the platen, information on the

metal layer thickness and exposure of the underlying layer is accumulated in-situ and on a continuous real-time basis (once per platen rotation). The computer 90 can be programmed to sample measurements from the monitoring system when the substrate generally overlies the transparent section 36 (as determined by the position sensor). As polishing progresses, the reflectivity or thickness of the metal layer changes, and the sampled signals vary with time. The time varying sampled signals may be referred to as traces. The measurements from the monitoring systems can be displayed on an output device 92 during polishing to permit the operator of the device to visually monitor the progress of the polishing operation. In addition, as discussed below, the traces may be used to control the polishing process and determine the end-point of the metal layer polishing operation.

**[0063]** Since signals from both the eddy current monitoring system 40 and the optical monitoring system 140 are fed into the computer 90, either or both monitoring systems can be used for endpoint determination. This permits the chemical mechanical polisher to have robust endpoint detection capabilities for polishing of both dielectric and metallic materials. The signals from the both systems can be monitored for endpoint criteria, and the detection of the endpoint criteria from the two systems can be combined with various Boolean logic operations (e.g., AND or OR) to trigger the polishing endpoint or change in process parameters. Possible process control and endpoint criteria for the detector logic include local minima or maxima, changes in slope, threshold values in amplitude or slope, or combinations thereof. One monitoring system may serve to confirm the other monitoring system. For example, the polishing apparatus could halt polishing only upon detection of appropriate endpoint criteria in both the eddy current signal and the optical intensity signal. Alternatively, one system may serve as a backup endpoint detector. For example, the polishing apparatus could halt polishing only upon detection of a first endpoint criteria from one system, e.g., the eddy current monitoring system, and if the endpoint criteria is not detected in a certain time frame, polishing could be halted upon detection of a second endpoint criteria from the other system, e.g., the optical monitoring system. In addition, the two systems may be used during different portions of the polishing operation. For example, during metal polishing (particularly copper polishing) a majority of the substrate could be polished while being monitored with the eddy current monitoring system.

**[0064]** In a polishing operation for a metal layer, CMP apparatus 20 uses eddy current monitoring system 40 and optical monitoring system 140 to determine when the bulk of the filler layer has been removed and to determine when the underlying stop layer has been substantially exposed. The computer 90 applies process control and endpoint detection logic to the sampled signals to determine when to change process parameters and to detect the polishing endpoint. When the eddy current monitoring system determines that the metal film

has reached a predetermined thickness, the optical monitoring system may be used to detect when the underlying insulator layer is exposed.

**[0065]** In addition, the computer 90 can be programmed to divide the measurements from both the eddy current monitoring system 40 and the optical monitoring system 140 from each sweep beneath the substrate into a plurality of sampling zones 96, to calculate the radial position of each sampling zone, to sort the amplitude measurements into radial ranges, to determine minimum, maximum and average measurements for each sampling zone, and to use multiple radial ranges to determine the polishing endpoint, as discussed in U.S. Patent Application Serial No. 09/460,529, filed December 13, 1999, the entirety of which is incorporated herein by reference.

**[0066]** Computer 48 may also be connected to the pressure mechanisms that control the pressure applied by carrier head 70, to carrier head rotation motor 76 to control the carrier head rotation rate, to the platen rotation motor (not shown) to control the platen rotation rate, or to slurry distribution system 39 to control the slurry composition supplied to the polishing pad. Specifically, after sorting the measurements into radial ranges, information on the metal film thickness can be fed in real-time into a closed-loop controller to periodically or continuously modify the polishing pressure profile applied by a carrier head, as discussed in U.S. Patent Application Serial No. 09/609,426, filed July 5, 2000, the entirety of which is incorporated herein by reference. For example, the computer could determine that the endpoint criteria have been satisfied for the outer radial ranges but not for the inner radial ranges. This would indicate that the underlying layer has been exposed in an annular outer area but not in an inner area of the substrate. In this case, the computer could reduce the diameter of the area in which pressure is applied so that pressure is applied only to the inner area of the substrate, thereby reducing dishing and erosion on the outer area of the substrate.

**[0067]** A method of polishing a metal layer, such as a copper layer, is shown in flowchart form in FIG. 12. First, the substrate is polished at the first polishing station 22a to remove the bulk of the metal layer. The polishing process is monitored by the eddy current monitoring system 40. When a predetermined thickness, e.g., 2000 Angstroms, of the copper layer 14 remains over the underlying barrier layer 16 (see FIG. , the polishing process is halted and the substrate is transferred to the second polishing station 22b. This first polishing endpoint can be triggered when the phase shift signal exceeds an experimentally determined threshold value. Exemplary polishing parameters for the first polishing station include a platen rotation rate of 93 rpm, a carrier head pressure of about 3 psi, and an IC-1010 polishing pad. As polishing progresses at the first polishing station, the radial thickness information from the eddy current monitoring system 40 can be fed into a closed-loop feedback system to control the pressure and/or the loading area of the

carrier head 200 on the substrate. The pressure of the retaining ring on the polishing pad may also be adjusted to adjust the polishing rate. This permits the carrier head to compensate for the non-uniformity in the polishing rate or for non-uniformity in the thickness of the metal layer of the incoming-substrate. As a result, after polishing at the first polishing station, most of the metal layer has been removed and the surface of the metal layer remaining on the substrate is substantially planarized.

**[0068]** At the second polishing station 22b, the substrate is polished at a lower polishing rate than at the first polishing station. For example, the polishing rate is reduced by about a factor of 2 to 4, i.e., by about 50% to 75%. To reduce the polishing rate, the carrier head pressure can be reduced, the carrier head rotation rate can be reduced, the composition of the slurry can be changed to introduce a slower polishing slurry, and/or the platen rotation rate could be reduced. For example, the pressure on the substrate from the carrier head may be reduced by about 33% to 50%, and the platen rotation rate and carrier head rotation rate may both be reduced by about 50%. Exemplary polishing parameters for the second polishing station 22b include a platen rotation rate of 43 rpm, a carrier head pressure of about 2 psi, and an IC-1010 polishing pad.

**[0069]** Optionally, when the polishing begins at the second polishing station, the substrate may be briefly polished, e.g., for about 10 seconds, at a somewhat higher pressure, e.g., 3 psi, and rotation rate, e.g., 93 rpm. This initial polishing, which can be termed an "initiation" step, may be needed to remove native oxides formed on the metal layer or to compensate for ramp-up of the platen rotation rate and carrier head pressure so as to maintain the expected throughput.

**[0070]** The polishing process is monitored at the second polishing station 22b by an optical monitoring system. Polishing proceeds at the second polishing station 22b until the metal layer is removed and the underlying barrier layer is exposed. Of course, small portions of the metal layer can remain on the substrate, but the metal layer is substantially entirely removed. The optical monitoring system is useful for determining this endpoint, since it can detect the change in reflectivity as the barrier layer is exposed. Specifically, the endpoint for the second polishing station can be triggered when the amplitude or slope of the optical monitoring signal falls below an experimentally determined threshold value across all the radial ranges monitored by the computer. This indicates that the barrier metal layer has been removed across substantially all of the substrate. Of course, as polishing progresses at the second polishing station 22b, the reflectivity information from the optical monitoring system can be fed into a closed-loop feedback system to control the pressure and/or the loading area of the carrier head 200 on the substrate to prevent the regions of the barrier layer that are exposed earliest from becoming overpolished.

**[0071]** By reducing the polishing rate before the barrier

layer is exposed, dishing and erosion effects can be reduced. In addition, the relative reaction time of the polishing machine is improved, enabling the polishing machine to halt polishing and transfer to the third polishing station with less material removed after the final endpoint criterion is detected. Moreover, more intensity measurements can be collected near the expected polishing end time, thereby potentially improving the accuracy of the polishing endpoint calculation. However, by maintaining a high polishing rate throughout most of the polishing operation at the first polishing station, high throughput is achieved. Preferably, at least 75%, e.g., 80-90%, of the bulk polishing of the metal layer is completed before the carrier head pressure is reduced or other polishing parameters are changed.

**[0072]** Once the metal layer has been removed at the second polishing station 22b, the substrate is transferred to the third polishing station 22c for removal of the barrier layer. Exemplary polishing parameters for the second polishing station include a platen rotation rate of 103 rpm, a carrier head pressure of about 3 psi, and an IC-1010 polishing pad. Optionally, the substrate may be briefly polished with an initiation step, e.g., for about 5 seconds, at a somewhat higher pressure, e.g., 3 psi, and platen rotation rate, e.g., 103 rpm. The polishing process is monitored at the third polishing station 22c by an optical monitoring system, and proceeds until the barrier layer is substantially removed and the underlying dielectric layer is substantially exposed. The same slurry solution may be used at the first and second polishing stations, whereas another slurry solution may be used at the third polishing station.

**[0073]** An alternative method of polishing a metal layer, such as a copper layer, is shown in flowchart form in FIG. 13. This method is similar to the method shown in FIG. 12. However, both the fast polishing step and the slow polishing step are performed at the first polishing station 22a. Removal of the barrier layer is performed at the second polishing station 22b, and a buffing step is performed at the final polishing station 22c.

**[0074]** The eddy current and optical monitoring systems can be used in a variety of polishing systems. Either the polishing pad, or the carrier head, or both can move to provide relative motion between the polishing surface and the substrate. The polishing pad can be a circular (or some other shape) pad secured to the platen, a tape extending between supply and take-up rollers, or a continuous belt. The polishing pad can be affixed on a platen, incrementally advanced over a platen between polishing operations, or driven continuously over the platen during polishing. The pad can be secured to the platen during-polishing, or there could-be a fluid bearing between the platen and polishing pad during polishing. The polishing pad can be a standard (e.g., polyurethane with or without fillers) rough pad, a soft pad, or a fixed-abrasive pad. Rather than tuning when the substrate is absent, the drive frequency of the oscillator can be tuned to a resonant frequency with a polished or unpolished sub-

strate present (with or without the carrier head), or to some other reference.

[0075] Although illustrated as positioned in the same hole, the optical monitoring system 140 could be positioned at a different location on the platen than the eddy current monitoring system 40. For example, the optical monitoring system 140 and eddy current monitoring system 40 could be positioned on opposite sides of the platen, so that they alternately scan the substrate surface.

[0076] Referring to FIG. 14, in another implementation, the first polishing station includes only an eddy current monitoring system 40, and no optical monitoring system. In this case, section 36' of the pad would not need to be transparent. However, it might be beneficial for section 36' to be relatively thin. For example, assuming that polishing pad 30 is a two-layer pad, thin pad section 36' can be constructed as shown in FIG. 15A by removing a portion 33' of backing layer 32'. Alternatively, as shown in FIG. 15B, thin pad section 36" can be formed by removing a portion 33" of both backing layer 32" and a portion of cover layer 34". Thus, this implementation has a recess in the bottom surface of cover layer 34" in the thin pad section 36". If the polishing pad is a single-layer pad, thin pad section 36 can be formed by removing a portion of the pad material to create a recess in the bottom surface of the pad. If the polishing pad is itself sufficiently thin or has a magnet permeability (and conductivity) that does not interfere with the eddy current measurements; then the pad does not need any modifications or recesses.

[0077] Various aspects of the invention, such as placement of the coil on a side of the polishing surface opposite the substrate or the measurement of a phase difference, still apply if the eddy current sensor uses a single coil. In a single coil system, both the oscillator and the sense capacitor (and other sensor circuitry) are connected to the same coil.

[0078] The present invention has been described in terms of a preferred embodiment. The invention, however, is not limited to the embodiment depicted and described. Rather, the scope of the invention is defined by the appended claims.

## Claims

1. A chemical mechanical polishing apparatus, comprising:

a polishing pad (30);  
a carrier (70) to hold a substrate (10) against a first side of the polishing pad;  
an eddy current sensor (58) including at least one inductor (42,44,46), an oscillator (50) electrically coupled to the at least one inductor to induce an alternating current in a coil of the inductor and thereby generate an alternating magnetic field, and a capacitor (52) electrically cou-

pled to the at least one inductor; and  
a motor (76) coupled to at least one of the polishing pad (30) and carrier (70) for generating relative motion therebetween;

**characterised in that** the inductor is positioned on a second side of the polishing pad opposite the substrate and the inductor includes a core (42) positioned at least partially in a recess in the polishing pad on the second side of the polishing pad.

2. An apparatus as claimed in claim 1, **characterised in that** the core (42) consists essentially of ferrite.
3. An apparatus as claimed in claim 1, **characterised in that** the core (42) includes two prongs and a connecting portion between the two prongs.
4. An apparatus as claimed in claim 3, **characterised in that** the inductor (40) comprises a first coil (44) and a second coil (46), and wherein the first coil is wound around the connecting portion of the core (42) and the second coil is wound around at least one of the two prongs of the core (42).
5. An apparatus as claimed in claim 1, **characterised in that** the inductor (40) comprises a first coil (44) and a second coil (46), and wherein the second coil and the capacitor (52) are connected in parallel.
6. An apparatus as claimed in claim 1, **characterised in that** the oscillator (50) induces an alternating current with a substantially constant frequency selected to provide a resonant frequency when the substrate (10) is not in proximity to the core (42).
7. An apparatus as claimed in claim 1, **characterised in that** the polishing pad (30) includes an upper layer (34) and a lower layer (32), and the recess (33) is formed in at least a portion of the lower layer (33) adjacent the core (42).
8. An apparatus as claimed in claim 1, further comprising a platen (24) to support the polishing pad (30), **characterised in that** the inductor (40) comprises at least one coil (44,46) wrapped around the core.
9. An apparatus as claimed in claim 8, **characterised in that** the platen (24) is rotatable.
10. An apparatus as claimed in claim 1, further comprising a platen (24) to support the polishing pad (30), a position sensor (140) to determine an angular position of the platen, and a controller to sample data from the eddy current sensor (50) when the at least one inductor (40) is positioned adjacent the substrate (10).

11. An apparatus as claimed in claim 1, further comprising a computer (90) to receive and monitor the output signal from the sensor (140) while the substrate (10) contacts the polishing pad and the oscillator (50) induces the alternating current.
12. An apparatus as claimed in claim 1, **characterised in that** the polishing pad includes a cover layer (34) on the first side of the polishing pad (31) and a backing layer (32) on the second side of the polishing pad, and the recess (33) is formed by removing a portion of the backing layer.
13. An apparatus as claimed in claim 1, **characterised in that** the core (42) includes two poles positioned adjacent the recess (33) in the polishing pad (30), and the at least one inductor (44) is wound around a first portion of the core (42).
14. An apparatus as claimed in claim 1, **characterised in that** the oscillator (50) induces the alternating current with a substantially constant frequency.
15. An apparatus as claimed in claim 14, **characterised in that** the inductor (40) comprises a first coil (44) and a second coil (46), and wherein the oscillator (50) is electrically coupled to the first coil (44) to induce an alternating current in the first coil.
16. An apparatus as claimed in claim 15, **characterised in that** the capacitor (52) is electrically coupled to the second coil (46).
17. An apparatus as claimed in claim 1, **characterised in that** the oscillator (50) induces an alternating current with a frequency selected to provide a resonant frequency when the substrate (10) is not in proximity to the core (42).
18. An apparatus as claimed in claim 17, further comprising an endpoint detection system to receive an output signal from the eddy current sensor (58), the endpoint detection system configured to signal a polishing endpoint if the output signal exceeds a predetermined threshold.
19. An apparatus as claimed in claim 1, **characterised in that** the eddy current sensor (58) is included in a conductive layer thickness monitoring system (40), **in that** the oscillator (50) generates a drive signal, and **in that** the capacitor (52) is included in sense circuitry to sense the alternating magnetic field and generate a sense signal, and further comprising phase comparison circuitry coupled to the oscillator and the sense circuitry to measure a phase difference between the sense signal and the drive signal and generate a phase difference signal therefrom; and
- a computer (90) to receive the phase difference signal and monitor the phase difference signal for polishing endpoint criteria.
20. An apparatus as claimed in claim 19, further comprising at least one first gate (100,102) to convert sinusoidal signals from the inductor (42,44,46) and the oscillator (50) into first and second square-wave signals.
21. An apparatus as claimed in claim 20, **characterised in that** the at least one first gate (100,102) is an XOR gate.
22. An apparatus as claimed in claim 20, further comprising a comparator (104) to compare the first square-wave signal to the second square-wave signal to generate a third square-wave signal.
23. An apparatus as claimed in claim 22, **characterised in that** the comparator is an XOR gate (104).
24. An apparatus as claimed in claim 22, further comprising a filter (106) to convert the third square-wave signal into differential signal having an amplitude proportional to the phase difference between the first and second square wave signals.
25. An apparatus as claimed in claim 19, **characterised in that** the phase comparison circuitry generates a signal with a duty cycle proportional to the phase difference.
26. An apparatus as claimed in claim 1, **characterised in that** the eddy current sensor is included in an eddy current monitoring system positioned to generate the alternating magnetic field in proximity to the substrate, and further comprising:
  - an optical monitoring system that generates a light beam and detects reflections of the light beam from the substrate; and
  - a controller to receive signals from the eddy current monitoring system and the optical monitoring system.
27. An apparatus as claimed in claim 26, **characterised in that** the optical monitoring system includes a light source and a photodetector positioned on a second side of the polishing pad opposite the substrate.
28. An apparatus as claimed in claim 27, further comprising a platen, and **characterised in that** the light source and photodetector are positioned in a first cavity in a platen below the polishing pad.
29. An apparatus as claimed in claim 28, **characterised**

in that the inductor is positioned at least partially in the first cavity in the platen.

30. An apparatus as claimed in claim 28, **characterised in that** the inductor is positioned at least partially in a second cavity in the platen separate from the first cavity. 5
31. An apparatus as claimed in claim 26, **characterised in that** the eddy current monitoring system and the optical monitoring system are positioned to monitor substantially the same radial position on the substrate. 10
32. An apparatus as claimed in claim 26, **characterised in that** the controller is configured to detect endpoint criteria in signals from both the eddy current monitoring system and the optical monitoring system. 15
33. A method of monitoring a thickness of a conductive layer in a substrate during a polishing operation, comprising: 20
  - positioning a substrate on a first side of a polishing surface; 25
  - generating an alternating magnetic field from an inductor positioned opposite the substrate, the magnetic field extending through the polishing surface to induce eddy currents in the conductive layer; and 30
  - detecting a change in the alternating magnetic field caused by a change in the thickness of the conductive layer; 35
  - characterised in that** the inductor includes a core positioned at least partially in a recess on a second side of the polishing surface. 35
34. A method as claimed in claim 33, **characterised in that** generating the alternating magnetic field from an inductor includes driving a first coil with an oscillator at a first frequency. 40
35. A method as claimed in claim 34, **characterised in that** the first frequency is a resonant frequency when the substrate is not in proximity to the magnetic field. 45
36. A method as claimed in claim 34, **characterised in that** detecting a change in the alternating magnetic field includes sensing the alternating magnetic field with a second coil. 50
37. A method as claimed in claim 36, **characterised in that** the second coil is connected in parallel with a capacitor. 55
38. A method as claimed in claim 36, **characterised in that** the first coil is wound around a first portion of the core and the second coil is wound around a sec-

ond portion of the core.

39. A method as claimed in claim 33, further comprising determining when the inductor is adjacent the substrate. 5
40. A method as claimed in claim 33, **characterised in that** generating an alternating magnetic field from an inductor includes driving the inductor with a first signal, and detecting a change in the alternating magnetic field includes generating a second signal from the alternating magnetic field. 10
41. A method as claimed in claim 40, further comprising determining a change in amplitude in the second signal. 15
42. A method as claimed in claim 40, further comprising determining a change in a phase difference between the first signal and the second signal. 20
43. A method as claimed in claim 33, further comprising: 25
  - halting polishing when an eddy current signal associated with the detected change in the alternating magnetic field exhibits one or more endpoint criteria. 30
44. A method as claimed in claim 43, **characterised in that** the endpoint criteria comprises the eddy current signal passing a threshold strength. 35
45. A method as claimed in claim 43, **characterised in that** the endpoint criteria comprises a slope of the eddy current signal leveling off. 40
46. A method as claimed in claim 33, **characterised in that** generating the alternating magnetic field comprises energizing a coil included in the inductor with a first signal; 45
  - and **in that** detecting a change in the alternating magnetic field caused by a change in the thickness of the conductive layer comprises measuring the alternating magnetic field and generating a second signal indicative of the magnetic field; and further comprising: 50
    - comparing the first and second signals to determine a phase difference therebetween; and
    - monitoring the phase difference for polishing endpoint criteria. 55
47. A method as claimed in claim 33, **characterised in that** the inductor is included in an eddy current monitoring system, and further comprising: 60
  - generating a first signal from an eddy current monitoring system; 65

- generating a second signal from an optical monitoring system;  
monitoring the first and second signals for endpoint criteria.
48. A method as claimed in claim 47, further comprising halting polishing when endpoint criteria have been detected in both the first and second signals.
49. A method as claimed in claim 47, further comprising halting polishing when an endpoint criterion has been detected in either the first or second signal.
50. A method as claimed in claim 47, **characterised in that** the monitoring step includes monitoring the signal from the eddy current monitoring system until the conductive layer reaches a predetermined thickness and then monitoring the signal from the optical monitoring system.
51. A method as claimed in claim 33, **characterised in that** the inductor is included in an eddy current monitoring system, and further comprising:
- polishing the substrate at a first polishing station with a first polishing surface at a first polishing rate;  
monitoring polishing at the first polishing station with an eddy current monitoring system;  
transferring the substrate to a second polishing station when the eddy current monitoring system indicates that a predetermined thickness of the conductive layer remains on the substrate;  
polishing the substrate at the second polishing station with a second polishing surface at a second polishing rate that is lower than the first polishing rate;  
monitoring polishing at the second polishing station with an optical monitoring system; and  
halting polishing when the optical monitoring system indicates that a first underlying layer is at least partially exposed.
52. A method as claimed in claim 51, **characterised in that** the first underlying layer is a barrier layer.
53. A method as claimed in claim 52, further comprising transferring the substrate to a third polishing station and polishing the substrate with a third polishing surface.
54. A method as claimed in claim 53, further comprising monitoring polishing at the third polishing station with a second optical monitoring system, and halting polishing when the second optical monitoring system indicates that a second underlying layer is at least partially exposed.
55. A method as claimed in claim 53, **characterised in that** polishing at the third polishing station continues until the second underlying layer is substantially entirely exposed.
56. A method as claimed in claim 51, **characterised in that** polishing at the second polishing station continues until the first underlying layer is substantially entirely exposed.
57. A method as claimed in claim 51, **characterised in that** polishing the substrate at the second polishing station includes an initiation polishing step at a higher pressure than the remaining polishing at the second polishing station.
58. A method as claimed in claim 33, **characterised in that** the inductor is included in an eddy current monitoring system, and further comprising:
- polishing the substrate at a first polishing station with a first polishing surface at a first polishing rate;  
monitoring polishing at the first polishing station with the eddy current monitoring system;  
reducing the polishing rate at the first polishing station when the eddy current monitoring system indicates that a predetermined thickness of the conductive layer remains on the substrate;  
monitoring polishing at the first polishing station with an optical monitoring system; and  
halting polishing when the optical monitoring system indicates that a first underlying layer is at least partially exposed.
59. A method as claimed in claim 58, **characterised in that** the first underlying layer is a barrier layer.
60. A method as claimed in claim 58, further comprising transferring the substrate to a second polishing station and polishing the substrate with a second polishing surface.
61. A method as claimed in claim 60, further comprising monitoring polishing at the second polishing station with a second optical monitoring system, and halting polishing when the second optical monitoring system indicates that a second underlying layer is at least partially exposed.
62. A method as claimed in claim 61, further comprising transferring the substrate to a third polishing station and buffing the substrate with a buffing surface.
63. A method as claimed in claim 58, **characterised in that** polishing at the second polishing station continues until the first underlying layer is substantially entirely exposed.

64. A method as claimed in claim 33, **characterised in that** the inductor is included in an eddy current monitoring system and further comprising:

polishing the substrate at a first polishing rate;  
monitoring polishing with the eddy current monitoring system;  
reducing the polishing rate when the eddy current monitoring system indicates that a predetermined thickness of the metal layer remains on the substrate;  
monitoring polishing with an optical monitoring system; and  
halting polishing when the optical monitoring system indicates that an underlying layer is at least partially exposed.

#### Patentansprüche

1. Chemisch-mechanisches Poliergerät, umfassend:

ein Polierkissen (30);  
einen Träger (70), um ein Substrat (10) gegen eine erste Seite des Polierkissens zu halten;  
einen Wirbelstromsensor (58), der mindestens einen Induktor (42, 44, 46), einen Oszillator (50), der elektrisch mit dem mindestens einen Induktor gekoppelt ist, um einen Wechselstrom in einer Spule des Induktors zu induzieren und um somit ein magnetisches Wechselfeld zu erzeugen, und einen Kondensator (52), der elektrisch mit dem mindestens einen Induktor gekoppelt ist, einschließt, und  
einen Motor (76), der mit dem Polierkissen (30) und/oder dem Träger (70) gekoppelt ist, um eine relative Bewegung zwischen ihnen zu erzeugen;

**dadurch gekennzeichnet, dass** der Induktor auf einer zweiten Seite des Polierkissens entgegengesetzt zum Substrat angeordnet ist, und dass der Induktor einen Kern (42) einschließt, der mindestens teilweise in einer Vertiefung im Polierkissen auf der zweiten Seite des Polierkissens angeordnet ist.

2. Gerät nach Anspruch 1, **dadurch gekennzeichnet, dass** der Kern (42) im wesentlichen aus Ferrit besteht.
3. Gerät nach Anspruch 1, **dadurch gekennzeichnet, dass** der Kern (42) zwei Schenkel und einen Verbindungsabschnitt zwischen den zwei Schenkeln einschließt.
4. Gerät nach Anspruch 3, **dadurch gekennzeichnet, dass** der Induktor (40) eine erste Spule (44) und eine zweite Spule (46) umfasst, wobei die erste Spu-

le um den Verbindungsabschnitt des Kerns (42) und die zweite Spule um mindestens einen der zwei Schenkel des Kerns (42) gewickelt ist.

5. Gerät nach Anspruch 1, **dadurch gekennzeichnet, dass** der Induktor (40) eine erste Spule (44) und eine zweite Spule (46) umfasst, wobei die zweite Spule und der Kondensator (52) parallel verbunden sind.
6. Gerät nach Anspruch 1, **dadurch gekennzeichnet, dass** der Oszillator (50) einen Wechselstrom mit einer im wesentlichen konstanten Frequenz induziert, die so ausgewählt ist, dass sie eine Resonanzfrequenz liefert, wenn sich das Substrat (10) nicht in der Nähe des Kerns (42) befindet.
7. Gerät nach Anspruch 1, **dadurch gekennzeichnet, dass** das Polierkissen (30) eine obere Schicht (34) und eine untere Schicht (32) einschließt, und die Vertiefung (33) zumindest in einem Abschnitt der unteren Schicht (33) neben dem Kern (42) ausgebildet ist.
8. Gerät nach Anspruch 1, wobei es weiter eine Platte (24) umfasst, um das Polierkissen (30) zu tragen, **dadurch gekennzeichnet, dass** der Induktor (40) mindestens eine Spule (44, 46), die um den Kern gewickelt ist, umfasst.
9. Gerät nach Anspruch 8, **dadurch gekennzeichnet, dass** die Platte (24) drehbar ist.
10. Gerät nach Anspruch 1, wobei es weiter eine Platte (24), um das Polierkissen (30) zu tragen, einen Positionssensor (140), um eine Winkelposition der Platte zu bestimmen, und eine Steuerung, um Daten vom Wirbelstromsensor (50) zu nehmen, wenn der mindestens eine Induktor (40) neben dem Substrat (10) angeordnet ist, umfasst.
11. Gerät nach Anspruch 1, wobei es weiter einen Computer (90) umfasst, um das Ausgangssignal vom Sensor (140) zu empfangen und zu überwachen, während das Substrat (10) das Polierkissen kontaktiert und der Oszillator (50) einen Wechselstrom induziert.
12. Gerät nach Anspruch 1, **dadurch gekennzeichnet, dass** das Polierkissen eine Deckschicht (34) auf der ersten Seite des Polierkissens (31) und eine Trägerschicht (32) auf der zweiten Seite des Polierkissens einschließt, und die Vertiefung (33) durch das Entfernen eines Teils der Trägerschicht ausgebildet wird.
13. Gerät nach Anspruch 1, **dadurch gekennzeichnet, dass** der Kern (42) zwei Pole einschließt, die neben

der Vertiefung (33) im Polierkissen (30) angeordnet sind, und dass der mindestens eine Induktor (44) um einen ersten Abschnitt des Kerns (42) gewickelt ist.

14. Gerät nach Anspruch 1, **dadurch gekennzeichnet, dass** der Oszillator (50) den Wechselstrom mit einer im wesentlichen konstanten Frequenz induziert. 5
15. Gerät nach Anspruch 14, **dadurch gekennzeichnet, dass** der Induktor (40) eine erste Spule (44) und eine zweite Spule (46) umfasst, wobei der Oszillator (50) elektrisch mit der ersten Spule (44) gekoppelt ist, um einen Wechselstrom in der ersten Spule zu induzieren. 10
16. Gerät nach Anspruch 15, **dadurch gekennzeichnet, dass** der Kondensator (52) mit der zweiten Spule (46) elektrisch gekoppelt ist, 15
17. Gerät nach Anspruch 1, **dadurch gekennzeichnet, dass** der Oszillator (50) einen Wechselstrom mit einer Frequenz induziert, die ausgewählt ist, um eine Resonanzfrequenz zu liefern, wenn sich das Substrat (10) nicht in der Nähe des Kerns (42) befindet. 20
18. Gerät nach Anspruch 17, wobei es weiter ein Endpunktdetektionssystem umfasst, um ein Ausgangssignal vom Wechselstromsensor (58) zu empfangen, wobei das Endpunktdetektionssystem konfiguriert ist, um einen Polierendpunkt zu signalisieren, wenn das Ausgangssignal einen vorbestimmten Schwellwert überschreitet. 25
19. Gerät nach Anspruch 1, **dadurch gekennzeichnet, dass** der Wechselstromsensor (58) in einem Dickenüberwachungssystem (40) der leitenden Schicht eingeschlossen ist, dass der Oszillator (50) ein Ansteuersignal erzeugt, und dass der Kondensator (52) in der Messschaltung eingeschlossen ist, um das magnetische Wechselfeld zu messen und ein Messsignal zu erzeugen, und weiter eine Phasenvergleichsschaltung umfasst, die mit dem Oszillator und der Messschaltung verbunden ist, um eine Phasendifferenz zwischen dem Messsignal und dem Ansteuersignal zu messen und daraus ein Phasendifferenzsignal zu erzeugen; und 30
- es einen Computer (90) umfasst, um das Phasendifferenzsignal zu empfangen und das Phasendifferenzsignal auf Polierendpunktkriterien zu überwachen. 35
20. Gerät nach Anspruch 19, wobei es weiter mindestens ein erstes Gatter (100, 102) umfasst, um sinusförmige Signale vom Induktor (42, 44, 46) und vom Oszillator (50) in erste und zweite Rechteckwellensignale umzuwandeln. 40
21. Gerät nach Anspruch 20, **dadurch gekennzeichnet,** 45

**net, dass** das mindestens eine erste Gatter (100, 102) ein XOR-Gatter (Exklusiv-Oder-Gatter) ist.

22. Gerät nach Anspruch 20, wobei es weiter eine Vergleichsvorrichtung (104) umfasst, um das erste Rechteckwellensignal mit dem zweiten Rechteckwellensignal zu vergleichen, um ein drittes Rechteckwellensignal zu erzeugen. 50
23. Gerät nach Anspruch 22, **dadurch gekennzeichnet, dass** die Vergleichsvorrichtung ein XOR-Gatter (Exklusiv-Oder-Gatter) 104 ist. 10
24. Gerät nach Anspruch 22, wobei es weiter einen Filter (106) umfasst, um das dritte Rechteckwellensignal in ein Differentialsignal umzuwandeln, das eine Amplitude aufweist, die proportional der Phasendifferenz zwischen den ersten und zweiten Rechteckwellensignalen ist. 15
25. Gerät nach Anspruch 19, **dadurch gekennzeichnet, dass** die Phasenvergleichsschaltung ein Signal mit einem Tastverhältnis proportional zur Phasendifferenz erzeugt. 20
26. Gerät nach Anspruch 1, **dadurch gekennzeichnet, dass** der Wechselstromsensor in einem Wechselstromüberwachungssystem eingeschlossen ist, das positioniert ist, um das magnetische Wechselfeld in der Nähe des Substrats zu erzeugen, und weiter umfasst: 25
- ein optisches Überwachungssystem, das einen Lichtstrahl erzeugt und Reflektionen des Lichtstrahls vom Substrat detektiert; und
- eine Steuerung, um die Signale vom Wirbelstromüberwachungssystem und dem optischen Überwachungssystem zu empfangen. 30
27. Gerät nach Anspruch 26, **dadurch gekennzeichnet, dass** das optische Überwachungssystem eine Lichtquelle und einen Photodetektor, der auf einer zweiten Seite des Polierkissens gegenüber dem Substrat angeordnet ist, einschließt. 35
28. Gerät nach Anspruch 27, wobei es weiter eine Platte umfasst und **dadurch gekennzeichnet ist, dass** die Lichtquelle und der Photodetektor in einem ersten Hohlraum in einer Platte unterhalb des Polierkissens angeordnet sind. 40
29. Gerät nach Anspruch 28, **dadurch gekennzeichnet, dass** der Induktor zumindest teilweise im ersten Hohlraum in der Platte angeordnet ist. 45
30. Gerät nach Anspruch 28, **dadurch gekennzeichnet, dass** der Induktor zumindest teilweise in einem zweiten Hohlraum in der Platte getrennt vom ersten 50

Hohlraum angeordnet ist.

31. Gerät nach Anspruch 26, **dadurch gekennzeichnet, dass** das Wirbelstromüberwachungssystem und das optische Überwachungssystem angeordnet sind, um im wesentlichen dieselbe radiale Position auf dem Substrat zu überwachen.
32. Gerät nach Anspruch 26, **dadurch gekennzeichnet, dass** die Steuerung konfiguriert ist, um Endpunktkriterien in Signalen sowohl vom Wirbelstromüberwachungssystem als auch vom optischen Überwachungssystem zu detektieren.
33. Verfahren zur Überwachung einer Dicke einer leitenden Schicht in einem Substrat während eines Poliervorgangs, umfassend;
- Positionieren eines Substrats auf einer ersten Seite einer Polierfläche;
- Erzeugen eines magnetischen Wechselfeldes von einem Induktor, der gegenüber dem Substrat angeordnet ist, wobei sich das Magnetfeld durch die Polierfläche erstreckt, um Wirbelströme in der leitenden Schicht zu induzieren; und
- Detektieren einer Änderung im magnetischen Wechselfeld, die durch eine Änderung der Dicke der leitenden Schicht verursacht wird;
- dadurch gekennzeichnet, dass** der Induktor einen Kern einschließt, der zumindest teilweise in einer Vertiefung auf einer zweiten Seite der Polierfläche angeordnet ist.
34. Verfahren nach Anspruch 33, **dadurch gekennzeichnet, dass** das Erzeugen eines magnetischen Wechselfeldes von einem Induktor das Ansteuern einer ersten Spule mit einem Oszillator bei einer ersten Frequenz einschließt.
35. Verfahren nach Anspruch 34, **dadurch gekennzeichnet, dass** die erste Frequenz eine Resonanzfrequenz ist, wenn sich das Substrat nicht in der Nähe des Magnetfeldes befindet.
36. Verfahren nach Anspruch 34, **dadurch gekennzeichnet, dass** das Detektieren einer Änderung im magnetischen Wechselfeld das Messen des magnetischen Wechselfeldes mit einer zweiten Spule einschließt.
37. Verfahren nach Anspruch 36, **dadurch gekennzeichnet, dass** die zweite Spule parallel mit einem Kondensator verbunden ist.
38. Verfahren nach Anspruch 36, **dadurch gekennzeichnet, dass** die erste Spule um einen ersten Abschnitt des Kerns und die zweite Spule um einen zweiten Abschnitt des Kerns gewickelt ist.

39. Verfahren nach Anspruch 33, wobei es weiter die Bestimmung, wann der Induktor sich neben dem Substrat befindet, umfasst.

40. Verfahren nach Anspruch 33, **dadurch gekennzeichnet, dass** das Erzeugen eines magnetischen Wechselfeldes von einem Induktor das Ansteuern des Induktors mit einem ersten Signal einschließt, und dass das Detektieren einer Änderung im magnetischen Wechselfeld das Erzeugen eines zweiten Signals vom magnetischen Wechselfeld einschließt.

41. Verfahren nach Anspruch 40, wobei es weiter das Bestimmen einer Änderung der Amplitude im zweiten Signal umfasst.

42. Verfahren nach Anspruch 40, wobei es weiter das Bestimmen einer Änderung der Phasendifferenz zwischen dem ersten Signal und dem zweiten Signal umfasst.

43. Verfahren nach Anspruch 33, wobei es weiter umfasst:

das Anhalten des Polierens, wenn ein Wirbelstromsignal, das mit der detektierten Änderung im magnetischen Wechselfeld verbunden ist, ein oder mehrere Endpunktkriterien zeigt.

44. Verfahren nach Anspruch 43, **dadurch gekennzeichnet, dass** die Endpunktkriterien das Wirbelstromsignal, das einen Stärkeschwellwert durchläuft, umfassen.

45. Verfahren nach Anspruch 43, **dadurch gekennzeichnet, dass** die Endpunktkriterien eine Neigung der Abflachung des Wirbelstromsignals umfassen.

46. Verfahren nach Anspruch 33, **dadurch gekennzeichnet, dass** das Erzeugen des magnetischen Wechselfeldes das Erregen einer Spule, die im Induktor eingefügt ist, mit einem ersten Signal umfasst;

und dass das Detektieren einer Änderung im magnetischen Wechselfeld, die durch eine Änderung der Dicke der leitenden Schicht verursacht wird, das Messen des magnetischen Wechselfeldes und das Erzeugen eines zweiten Signals, das das Magnetfeld anzeigt, umfasst; und weiter umfassend:

Vergleichen der ersten und zweiten Signale, um eine Phasendifferenz zwischen ihnen zu bestimmen; und

Überwachen der Phasendifferenz auf Polierendpunktkriterien hin.

47. Verfahren nach Anspruch 33, **dadurch gekennzeichnet, dass** der Induktor in einem Wirbelstromüberwachungssystem eingefügt ist, und weiter umfassend:

Erzeugen eines ersten Signals von einem Wirbelstromüberwachungssystem;  
 Erzeugen eines zweiten Signals von einem optischen Überwachungssystem;  
 Überwachen der ersten und zweiten Signale auf Endpunktkriterien.

48. Verfahren nach Anspruch 47, wobei es weiter das Anhalten des Polierens umfasst, wenn die Endpunktkriterien sowohl in den ersten als auch den zweiten Signalen detektiert werden.

49. Verfahren nach Anspruch 47, wobei es weiter das Anhalten des Polierens umfasst, wenn die Endpunktkriterien im ersten oder im zweiten Signal detektiert werden.

50. Verfahren nach Anspruch 47, **dadurch gekennzeichnet, dass** der Überwachungsschritt das Überwachen des Signals vom Wirbelstromüberwachungssystem, bis die leitenden Schicht eine vorbestimmte Dicke erreicht, und dann das Überwachen des Signals vom optischen Überwachungssystem umfasst.

51. Verfahren nach Anspruch 33, **dadurch gekennzeichnet, dass** der Induktor in einem Wirbelstromüberwachungssystem eingeschlossen ist, und weiter umfassend:

Polieren des Substrats in einer ersten Polierstation mit einer ersten Polierfläche mit einer ersten Poliergeschwindigkeit;  
 Überwachen des Polierens an der ersten Polierstation mit einem Wirbelstromüberwachungssystem;  
 Überführen des Substrats auf eine zweite Polierstation, wenn das Wirbelstromüberwachungssystem anzeigt, dass eine vorbestimmte Dicke der leitenden Schicht auf dem Substrat verbleibt;  
 Polieren des Substrats an der zweiten Polierstation mit einer zweiten Polierfläche mit einer zweiten Poliergeschwindigkeit, die geringer als die erste Poliergeschwindigkeit ist;  
 Überwachen des Polierens an der zweiten Polierstation mit einem optischen Überwachungssystem; und  
 Anhalten des Polierens, wenn das optische Überwachungssystem anzeigt, dass eine erste darunter liegende Schicht mindestens teilweise freigelegt ist.

52. Verfahren nach Anspruch 51, **dadurch gekennzeichnet, dass** die erste darunter liegende Schicht eine Barrierschicht ist.

53. Verfahren nach Anspruch 52, wobei es weiter das Überführen des Substrats auf eine dritte Polierstation und das Polieren des Substrats mit einer dritten Polierfläche umfasst.

54. Verfahren nach Anspruch 53, wobei es weiter das Überwachen des Polierens an der dritten Polierstation mit einem zweiten optischen Überwachungssystem und das Anhalten des Polierens, wenn das zweite optische Überwachungssystem anzeigt, dass eine zweite darunter liegende Schicht zumindest teilweise freigelegt ist, umfasst.

55. Verfahren nach Anspruch 53, **dadurch gekennzeichnet, dass** das Polieren an der dritten Polierstation sich fortsetzt, bis die zweite darunter liegende Schicht im wesentlichen vollständig freigelegt ist.

56. Verfahren nach Anspruch 51, **dadurch gekennzeichnet, dass** das Polieren an der zweiten Polierstation sich fortsetzt, bis die erste darunter liegende Schicht im wesentlichen vollständig freigelegt ist.

57. Verfahren nach Anspruch 51, **dadurch gekennzeichnet, dass** das Polieren des Substrats an der zweiten Polierstation einen anfänglichen Polierschritt mit einem höheren Druck als das verbleibende Polieren an der zweiten Polierstation einschließt.

58. Verfahren nach Anspruch 33, **dadurch gekennzeichnet, dass** der Induktor in einem Wirbelstromüberwachungssystem eingeschlossen ist und es weiter umfasst:

Polieren des Substrats an der ersten Polierstation mit einer ersten Polierfläche mit einer ersten Poliergeschwindigkeit;  
 Überwachen des Polierens an der ersten Polierstation mit dem Wirbelstromüberwachungssystem;  
 Reduzieren der Poliergeschwindigkeit an der ersten Polierstation, wenn das Wirbelstromüberwachungssystem anzeigt, dass eine vorbestimmte Dicke der leitenden Schicht auf dem Substrat verbleibt;  
 Überwachen des Polierens an der ersten Polierstation mit einem optischen Überwachungssystem; und  
 Anhalten des Polierens, wenn das optische Überwachungssystem anzeigt, dass eine erste darunter liegende Schicht zumindest teilweise freigelegt ist.

59. Verfahren nach Anspruch 58, **dadurch gekennzeichnet,**

**zeichnet, dass** die erste darunter liegende Schicht eine Barrierschicht ist.

60. Verfahren nach Anspruch 58, wobei es weiter das Überführen des Substrats auf eine zweite Polierstation und das Polieren des Substrats mit einer zweiten Polieroberfläche umfasst. 5
61. Verfahren nach Anspruch 60, wobei es weiter das Überwachen des Polierens an der zweiten Polierstation mit einem zweiten optischen Überwachungssystem und das Anhalten des Polierens, wenn das zweite optische Überwachungssystem anzeigt, dass eine zweite darunter liegende Schicht zumindest teilweise freigelegt ist, umfasst. 10 15
62. Verfahren nach Anspruch 61, wobei es weiter das Überführen des Substrats auf eine dritte Polierstation und das Hochglanzpolieren des Substrats mit einer Hochglanzpolierfläche umfasst. 20
63. Verfahren nach Anspruch 58, **dadurch gekennzeichnet, dass** das Polieren an der zweiten Polierstation sich fortsetzt, bis die erste darunter liegende Schicht im wesentlichen vollständig freigelegt ist. 25
64. Verfahren nach Anspruch 33, **dadurch gekennzeichnet, dass** der Induktor in einem Wirbelstromüberwachungssystem eingeschlossen ist, und es weiter umfasst: 30
  - Polieren des Substrats mit einer ersten Poliergeschwindigkeit;
  - Überwachen des Polierens mit dem Wirbelstromüberwachungssystem;
  - Reduzieren der Poliergeschwindigkeit, wenn das Wirbelstromüberwachungssystem anzeigt, dass eine vorbestimmte Dicke der Metallschicht auf dem Substrat verbleibt;
  - Überwachen des Polierens mit einem optischen Überwachungssystem; und
  - Anhalten des Polierens, wenn das optische Überwachungssystem anzeigt, dass eine darunter liegende Schicht zumindest teilweise freigelegt ist. 40 45

## Revendications

1. Appareil de polissage chimico-mécanique comprenant : 50
  - un tampon de polissage (30),
  - un support (70) destiné à retenir un substrat (10) contre une première face du tampon de polissage,
  - un capteur à courants de Foucault (58) comprenant au moins un inducteur (42, 44, 46), un os-

cillateur (50) relié électriquement à le au moins un inducteur pour induire un courant alternatif dans un bobinage de l'inducteur et générer ainsi un champ magnétique alternatif, et un condensateur (52) relié électriquement à la au moins un inducteur, et un moteur (76) relié à au moins l'un du tampon de polissage (30) et du support (70) afin d'engendrer un mouvement relatif entre eux,

**caractérisé en ce que** l'inducteur est positionné sur une seconde face du tampon de polissage opposée au substrat et l'inducteur comprend un noyau (42) positionné au moins partiellement dans un évidement dans le tampon de polissage sur la seconde face du tampon de polissage.

2. Appareil selon la revendication 1, **caractérisé en ce que** le noyau (42) est constitué essentiellement de ferite.
3. Appareil selon la revendication 1, **caractérisé en ce que** le noyau (42) comprend deux griffes et une partie de liaison entre les deux griffes.
4. Appareil selon la revendication 3, **caractérisé en ce que** l'inducteur (40) comprend un premier bobinage (44) et un second bobinage (46), et dans lequel le premier bobinage est enroulé autour de la partie de liaison du noyau (42) et le second bobinage est enroulé autour d'au moins l'une des deux griffes du noyau (42).
5. Appareil selon la revendication 1, **caractérisé en ce que** l'inducteur (40) comprend un premier bobinage (44) et un second bobinage (46), et dans lequel le second bobinage et le condensateur (52) sont reliés en parallèle.
6. Appareil selon la revendication 1, **caractérisé en ce que** l'oscillateur (50) induit un courant alternatif ayant une fréquence sensiblement constante choisie pour procurer une fréquence de résonance lorsque le substrat (10) n'est pas à proximité du noyau (42).
7. Appareil selon la revendication 1 **caractérisé en ce que** le tampon de polissage (30) comprend une couche supérieure (34) et une couche inférieure (32), et l'évidement (33) est formé dans au moins une partie de la couche inférieure (33) adjacente au noyau (42).
8. Appareil selon la revendication 1, comprenant en outre une platine (24) pour supporter le tampon de polissage (30), **caractérisé en ce que** l'inducteur (40) comprend au moins un bobinage (44, 46) enroulé autour du noyau.

9. Appareil selon la revendication 8, **caractérisé en ce que** la platine (24) peut tourner.
10. Appareil selon la revendication 1, comprenant en outre une platine (24) pour supporter le tampon de polissage (30), un capteur de position (140) pour déterminer une position angulaire de la platine, et un contrôleur pour échantillonner des données provenant du capteur à courants de Foucault (50) lorsque le au moins un inducteur (40) est positionné de façon adjacente au substrat (10). 5
11. Appareil selon la revendication 1, comprenant en outre un ordinateur (90) pour recevoir et surveiller le signal de sortie provenant du capteur (140) pendant que le substrat (10) est en contact avec le tampon de polissage et l'oscillateur (50) induit le courant alternatif. 10
12. Appareil selon la revendication 1, **caractérisé en ce que** le tampon de polissage comprend une couche de couverture (34) sur la première face du tampon de polissage (31) et une couche de soutien (32) sur la seconde face du tampon de polissage, et l'évidement (33) est formé en retirant une partie de la couche de soutien. 15
13. Appareil selon la revendication 1, **caractérisé en ce que** le noyau (42) comprend deux pôles positionnés de façon adjacente à l'évidement (33) dans le tampon de polissage (30), et le au moins un inducteur (44) est enroulé autour d'une première partie du noyau (42). 20
14. Appareil selon la revendication 1, **caractérisé en ce que** l'oscillateur (50) induit le courant alternatif avec une fréquence sensiblement constante. 25
15. Appareil selon la revendication 14, **caractérisé en ce que** l'inducteur (40) comprend un premier bobinage (44) et un second bobinage (46), et dans lequel l'oscillateur (50) est relié électriquement au premier bobinage (44) pour induire un courant alternatif dans le premier bobinage. 30
16. Appareil selon la revendication 15, **caractérisé en ce que** le condensateur (52) est relié électriquement au second bobinage (46). 35
17. Appareil selon la revendication 1, **caractérisé en ce que** l'oscillateur (50) induit un courant alternatif avec une fréquence choisie pour procurer une fréquence de résonance lorsque le substrat (10) n'est pas à proximité du noyau (42). 40
18. Appareil selon la revendication 17, comprenant en outre un système de détection de point d'extrémité destiné à recevoir un signal de sortie provenant du capteur à courants de Foucault (58), le système de détection de point d'extrémité étant configuré pour signaler un point d'extrémité de polissage si le signal de sortie dépasse un seuil prédéterminé. 45
19. Appareil selon la revendication 1, **caractérisé en ce que** le capteur à courants de Foucault (58) est inclus dans un système de surveillance d'épaisseur de couche conductrice (40) **en ce que** l'oscillateur (50) génère un signal d'attaque, et **en ce que** le condensateur (52) est inclus dans un circuit de mesure destiné à mesurer le champ magnétique alternatif et générer un signal de mesure, et comprenant en outre un circuit de comparaison de phase relié à l'oscillateur et au circuit de mesure pour mesurer une différence de phase entre le signal de mesure et le signal d'attaque et générer un signal de différence de phase à partir de celui-ci, et un ordinateur (90) destiné à recevoir le signal de différence de phase et surveiller le signal de différence de phase pour les critères de point d'extrémité de polissage. 50
20. Appareil selon la revendication 19, comprenant en outre au moins une première porte (100, 102) destinée à convertir des signaux sinusoïdaux provenant de l'inducteur (42, 44, 46) et l'oscillateur (50) en des premier et second signaux à onde carrée. 55
21. Appareil selon la revendication 20, **caractérisé en ce que** la au moins une porte est une porte OU EXCLUSIF (XOR) (100, 102).
22. Appareil selon la revendication 20, comprenant en outre un comparateur (104) pour comparer le premier signal à onde carrée au second signal à onde carrée afin de générer un troisième signal à onde carrée.
23. Appareil selon la revendication 22, **caractérisé en ce que** le comparateur est une porte OU EXCLUSIF (104).
24. Appareil selon la revendication 22, comprenant en outre un filtre (106) destiné à convertir le troisième signal à onde carrée en un signal différentiel présentant une amplitude proportionnelle à la différence de phase entre les premier et second signaux à onde carrée.
25. Appareil selon la revendication 19, **caractérisé en ce que** le circuit de comparaison de phase génère un signal ayant un rapport cyclique proportionnel à la différence de phase.
26. Appareil selon la revendication 1, **caractérisé en ce que** le capteur à courants de Foucault est inclus dans un système de surveillance à courants de Fou-

cault positionné de façon à engendrer le champ magnétique alternatif à proximité du substrat, et comprenant en outre :

un système de surveillance optique qui génère un faisceau de lumière et détecte des réflexions du faisceau de lumière provenant du substrat, et un contrôleur destiné à recevoir des signaux provenant du système de surveillance à courants de Foucault et du système de surveillance optique.

27. Appareil selon la revendication 26, **caractérisé en ce que** le système de surveillance optique comprend une source de lumière et un photodétecteur positionné sur une seconde face du tampon de polissage opposée au substrat.

28. Appareil selon la revendication 27, comprenant en outre une platine et **caractérisé en ce que** la source de lumière et le photodétecteur sont positionnés dans une première cavité dans une platine en dessous du tampon de polissage.

29. Appareil selon la revendication 28, **caractérisé en ce que** l'inducteur est positionné au moins partiellement dans la première cavité dans la platine.

30. Appareil selon la revendication 28, **caractérisé en ce que** l'inducteur est positionné au moins partiellement dans une seconde cavité dans la platine, séparée de la première cavité.

31. Appareil selon la revendication 26, **caractérisé en ce que** le système de surveillance à courants de Foucault et le système de surveillance optique sont positionnés de façon à surveiller sensiblement la même position radiale sur le substrat.

32. Appareil selon la revendication 26, **caractérisé en ce que** le contrôleur est configuré pour détecter des critères de point d'extrémité dans des signaux provenant à la fois du système de surveillance à courants de Foucault et du système de surveillance optique.

33. Procédé de surveillance d'une épaisseur d'une couche conductrice dans un substrat pendant une opération de polissage, comprenant :

le positionnement d'un-substrat sur une première face d'une surface de polissage, la génération d'un champ magnétique alternatif à partir d'un inducteur positionné à l'opposé du substrat, le champ magnétique s'étendant au travers de la surface de polissage pour induire des courants de Foucault dans la couche conductrice, et

la détection d'une variation du champ magnétique alternatif provoquée par une variation de l'épaisseur de la couche conductrice,

**caractérisé en ce que** l'inducteur comprend un noyau positionné au moins partiellement dans un évidement sur une seconde face de la surface de polissage.

34. Procédé selon la revendication 33, **caractérisé en ce que** la génération du champ magnétique alternatif provenant d'un inducteur comprend l'attaque d'un premier bobinage avec un oscillateur à une première fréquence.

35. Procédé selon la revendication 34, **caractérisé en ce que** la première fréquence est une fréquence de résonance lorsque le substrat n'est pas à proximité du champ magnétique.

36. Procédé selon la revendication 34, **caractérisé en ce que** la détection d'une variation du champ magnétique alternatif comprend la mesure du champ magnétique alternatif avec un second bobinage.

37. Procédé selon la revendication 36, **caractérisé en ce que** le second bobinage est relié en parallèle avec un condensateur.

38. Procédé selon la revendication 36, **caractérisé en ce que** le premier bobinage est enroulé autour d'une première partie du noyau et le second bobinage est enroulé autour d'une seconde partie du noyau.

39. Procédé selon la revendication 33, comprenant en outre la détermination du moment où l'inducteur est adjacent au substrat.

40. Procédé selon la revendication 33, **caractérisé en ce que** la génération d'un champ magnétique alternatif à partir d'un inducteur comprend l'attaque de l'inducteur avec un premier signal, et la détection d'une variation du champ magnétique alternatif comprend la génération d'un second signal à partir du champ magnétique alternatif.

41. Procédé selon la revendication 40, comprenant en outre la détermination d'une variation de l'amplitude du second signal.

42. Procédé selon la revendication 40, comprenant en outre la détermination d'une variation d'une différence de phase entre le premier signal et le second signal.

43. Procédé selon la revendication 33, comprenant en outre :

l'arrêt du polissage lorsqu'un signal de courants de Foucault associé à la variation détectée dans le champ magnétique alternatif présente un ou plusieurs critères de point d'extrémité.

44. Procédé selon la revendication 43, **caractérisé en ce que** les critères de point d'extrémité comprennent le franchissement d'une intensité seuil par le signal de courants de Foucault.

45. Procédé selon la revendication 43, **caractérisé en ce que** les critères de point d'extrémité comprennent une pente de stabilisation du signal de courants de Foucault.

46. Procédé selon la revendication 33, **caractérisé en ce que** la génération du champ magnétique alternatif comprend l'excitation d'un bobinage inclus dans l'inducteur avec un premier signal, et **en ce que** la détection d'une variation du champ magnétique alternatif provoquée par une variation de l'épaisseur de la couche conductrice comprend la mesure du champ magnétique alternatif et la génération d'un second signal indicatif du champ magnétique, et comprenant en outre :

la comparaison des premier et second signaux pour déterminer une différence de phase entre eux, et  
la surveillance de la différence de phase pour rechercher les critères de point d'extrémité du polissage.

47. Procédé selon la revendication 33, **caractérisé en ce que** l'inducteur est inclus dans un système de surveillance à courants de Foucault, et comprenant en outre :

la génération d'un premier signal provenant d'un système de surveillance à courants de Foucault, la génération d'un second signal depuis un système de surveillance optique, la surveillance des premier et second signaux pour rechercher les critères de point d'extrémité.

48. Procédé selon la revendication 47, comprenant en outre l'arrêt du polissage lorsque des critères de point d'extrémité ont été détectés à la fois dans les premier et second signaux.

49. Procédé selon la revendication 47, comprenant en outre l'arrêt du polissage lorsqu'un critère de point d'extrémité a été détecté dans l'un ou l'autre du premier ou du second signal.

50. Procédé selon la revendication 47, **caractérisé en ce que** l'étape de surveillance comprend la surveillance du signal provenant du système de sur-

veillance à courants de Foucault jusqu'à ce que la couche conductrice atteigne une épaisseur prédéterminée et ensuite la surveillance du signal provenant du système de surveillance optique.

51. Procédé selon la revendication 33, **caractérisé en ce que** l'inducteur est inclus dans un système de surveillance à courants de Foucault, et comprenant en outre :

le polissage du substrat à un premier poste de polissage avec une première surface de polissage à une première vitesse de polissage, la surveillance du polissage au premier poste de polissage avec un système de surveillance à courants de Foucault, le transfert du substrat vers un second poste de polissage lorsque le système de surveillance à courants de Foucault indique qu'une épaisseur prédéterminée de la couche conductrice subsiste sur le substrat, le polissage du substrat au second poste de polissage avec une seconde surface de polissage à une seconde vitesse de polissage qui est inférieure à la première vitesse de polissage, la surveillance du polissage au second poste de polissage avec un système de surveillance optique, et l'arrêt du polissage lorsque le système de surveillance optique indique qu'une première couche sous-jacente est au moins partiellement exposée.

52. Procédé selon la revendication 51, **caractérisé en ce que** la première couche sous-jacente est une couche de barrière.

53. Procédé selon la revendication 52, comprenant en outre le transfert du substrat vers un troisième poste de polissage et le polissage du substrat avec une troisième surface de polissage.

54. Procédé selon la revendication 53, comprenant en outre la surveillance du polissage au troisième poste de polissage avec un second système de surveillance optique, et l'arrêt du polissage lorsque le second système de surveillance optique indique qu'une seconde couche sous-jacente est au moins partiellement exposée.

55. Procédé selon la revendication 53, **caractérisé en ce que** le polissage au troisième poste de polissage se poursuit jusqu'à ce que la seconde couche sous-jacente soit pratiquement entièrement exposée.

56. Procédé selon la revendication 51, **caractérisé en ce que** le polissage au second poste de polissage

se poursuit jusqu'à ce que la première couche sous-jacente soit pratiquement entièrement exposée.

57. Procédé selon la revendication 51, **caractérisé en ce que** le polissage du substrat au second poste de polissage comprend une étape de polissage de début à une pression supérieure à celle du polissage restant au second poste de polissage.

58. Procédé selon la revendication 33, **caractérisé en ce que** l'inducteur est inclus dans un système de surveillance à courants de Foucault, et comprenant en outre :

le polissage du substrat à un premier poste de polissage avec une première surface de polissage à une première vitesse de polissage, la surveillance du polissage au premier poste de polissage avec le système de surveillance à courants de Foucault, la réduction de la vitesse de polissage au premier poste de polissage lorsque le système de surveillance à courants de Foucault indique qu'une épaisseur prédéterminée de la couche conductrice subsiste sur le substrat, la surveillance du polissage au premier poste de polissage avec un système de surveillance optique, et l'arrêt du polissage lorsque le système de surveillance optique indique qu'une première couche sous-jacente est au moins partiellement exposée.

59. Procédé selon la revendication 58, **caractérisé en ce que** la première couche sous-jacente est une couche de barrière.

60. Procédé selon la revendication 58, comprenant en outre le transfert du substrat vers un second poste de polissage et le polissage du substrat avec une seconde surface de polissage.

61. Procédé selon la revendication 60, comprenant en outre la surveillance du polissage au second poste de polissage avec un second système de surveillance optique, et l'arrêt du polissage lorsque le second système de surveillance optique indique qu'une seconde couche sous-jacente est au moins partiellement exposée.


62. Procédé selon la revendication 61, comprenant en outre le transfert du substrat vers un troisième poste de polissage et tamponnage du substrat avec une surface de polissage.

63. Procédé selon la revendication 58, **caractérisé en ce que** le polissage au second poste de polissage


se poursuit jusqu'à ce que la première couche sous-jacente soit pratiquement entièrement exposée.


- 5 64. Procédé selon la revendication 33, **caractérisé en ce que** l'inducteur est inclus dans un système de surveillance à courants de Foucault et comprenant en outre :


10 le polissage du substrat à une première vitesse de polissage, la surveillance du polissage avec le système de surveillance à courants de Foucault, la réduction de la vitesse de polissage lorsque le système de surveillance à courants de Foucault indique qu'une épaisseur prédéterminée de la couche métallique subsiste sur le substrat, la surveillance du polissage avec un système de surveillance optique, et l'arrêt du polissage lorsque le système de surveillance optique indique qu'une couche sous-jacente est au moins partiellement exposée.

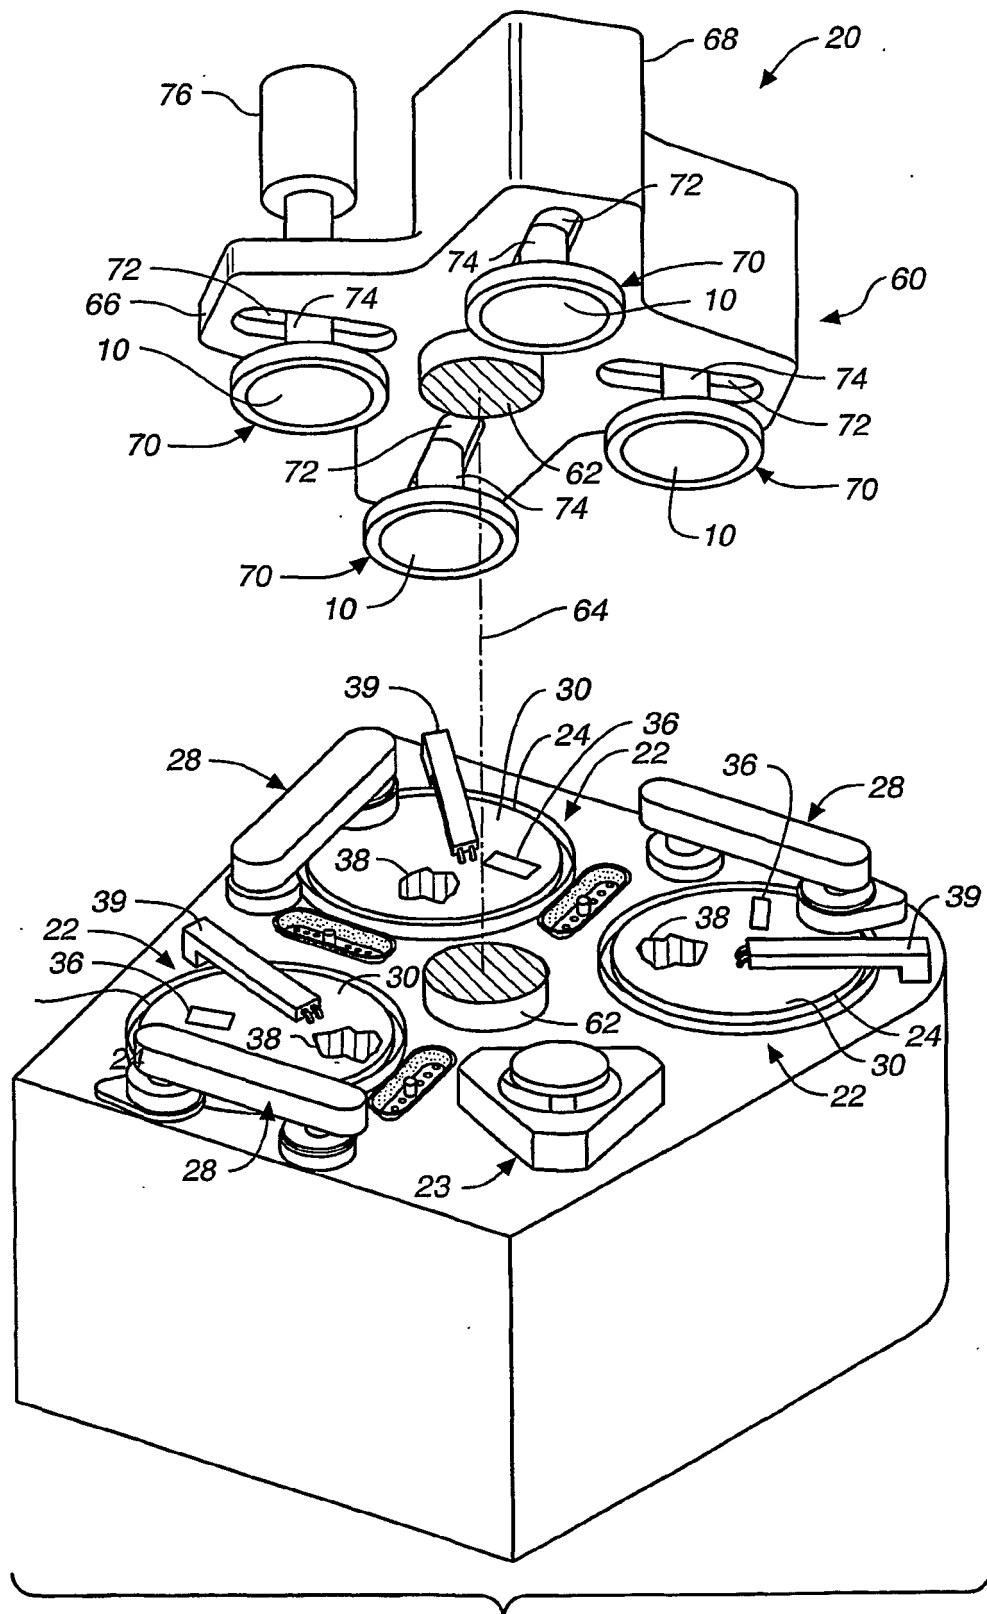


**FIG. 1**

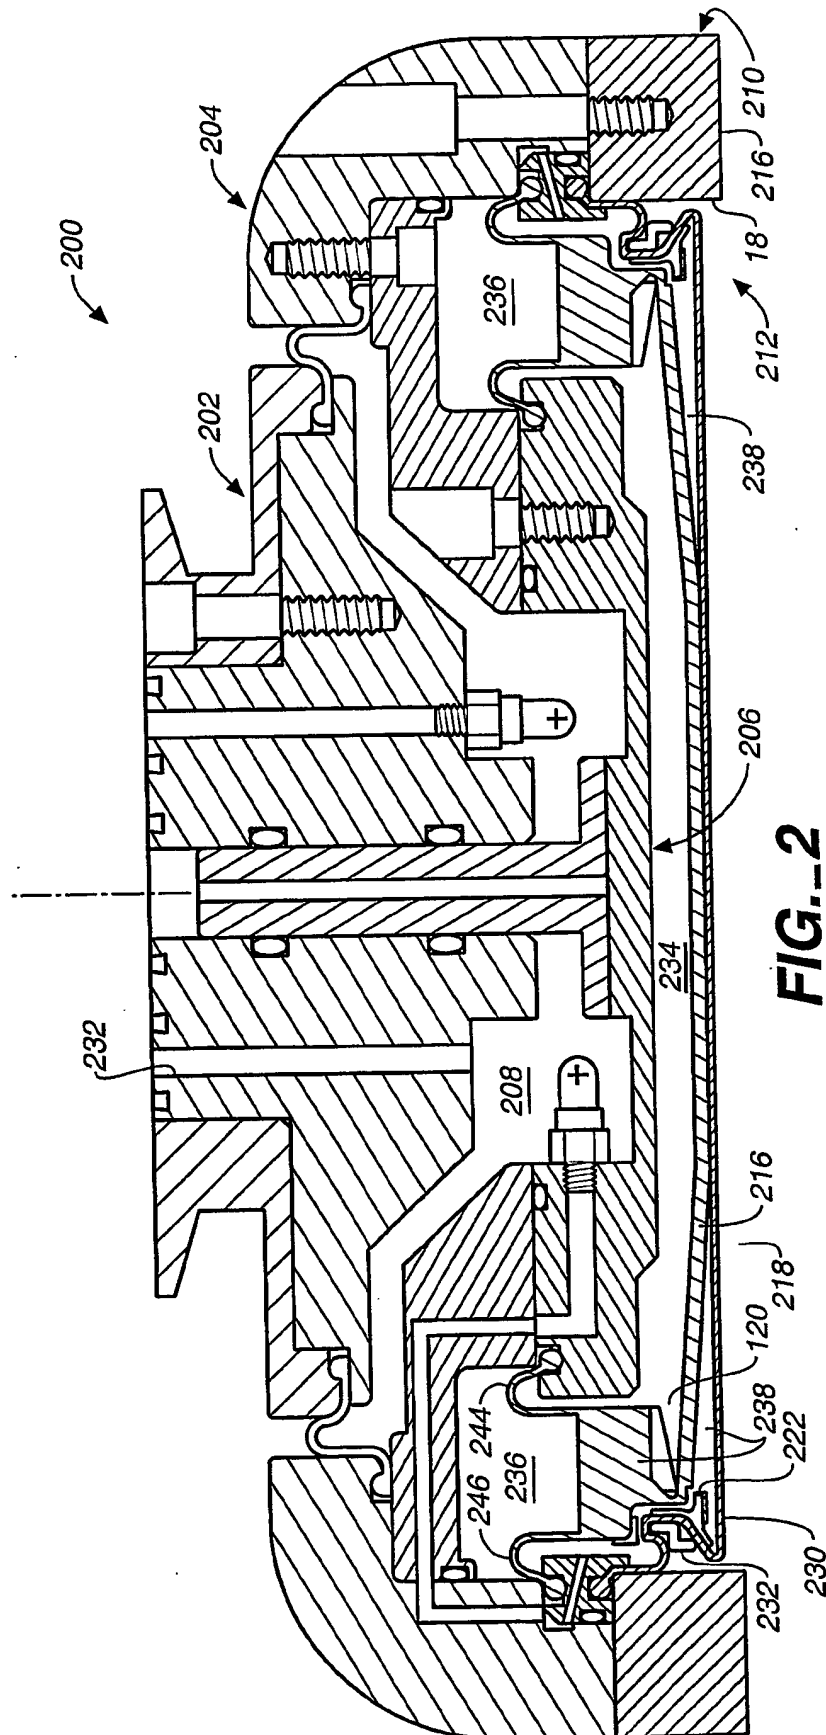

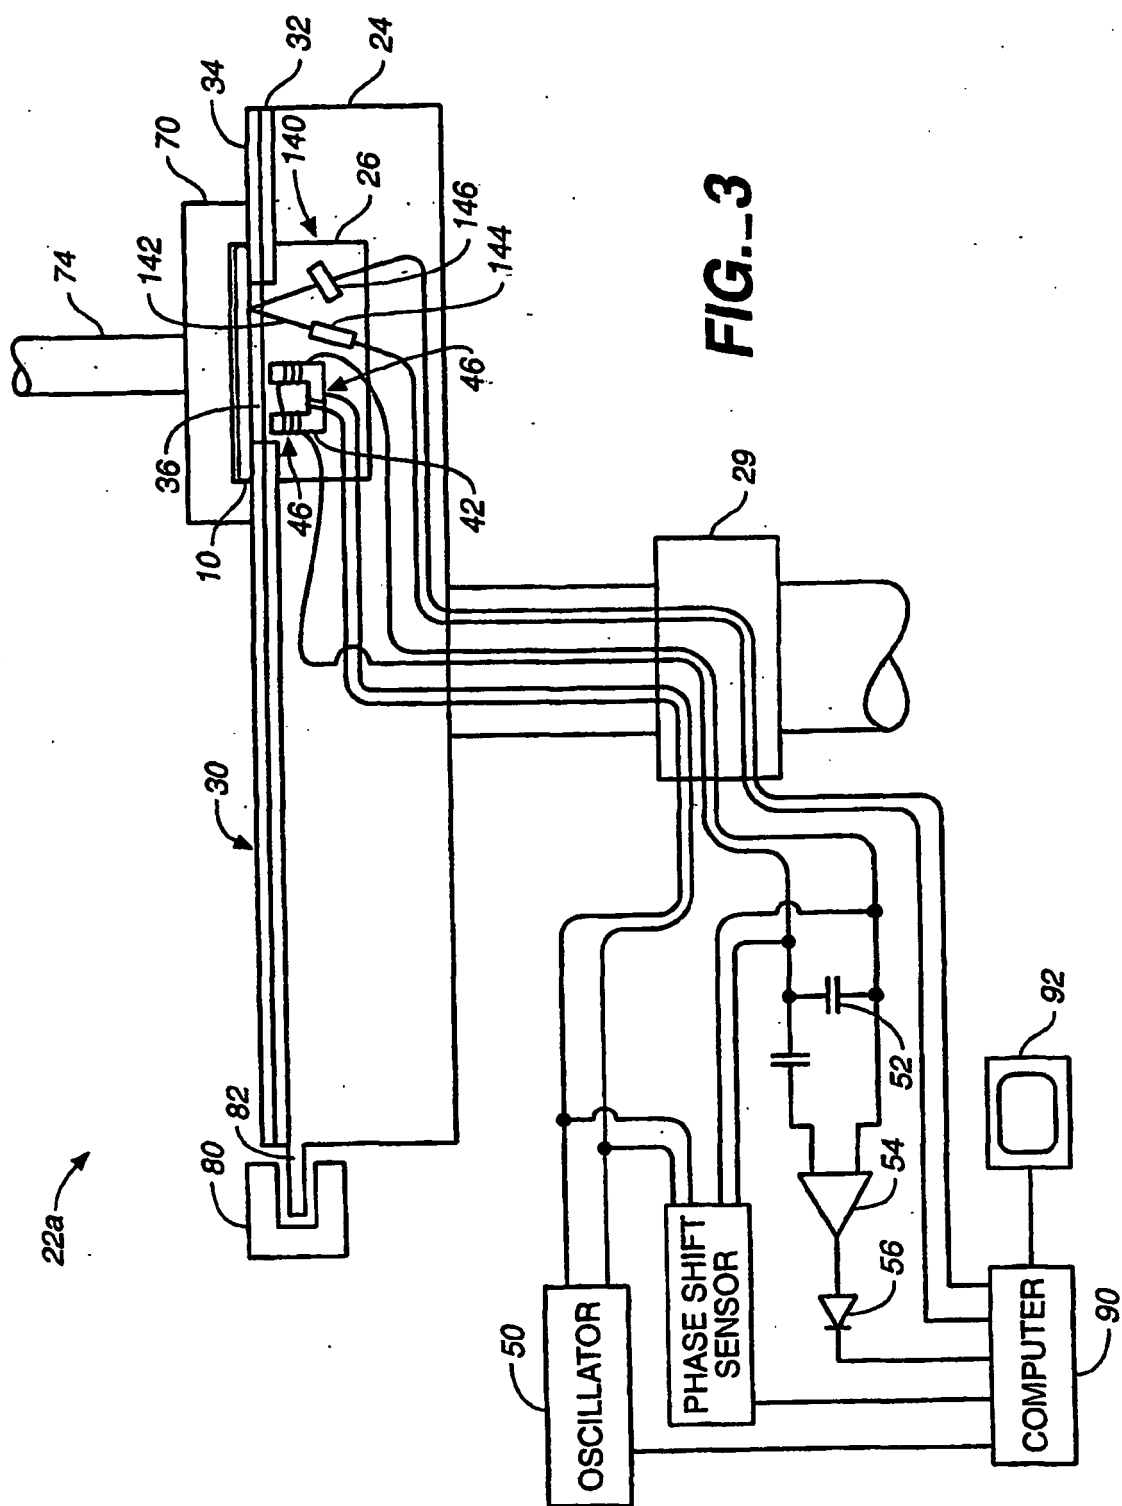


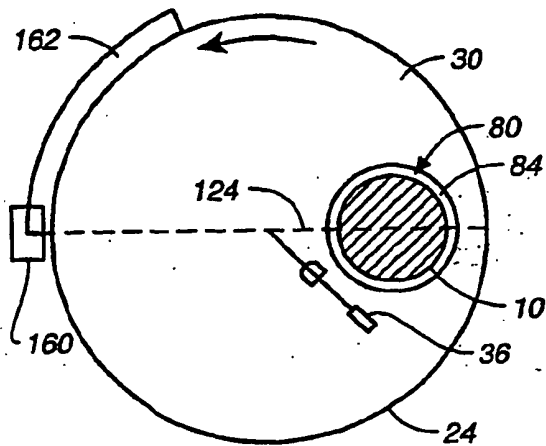


**FIG. 4A**

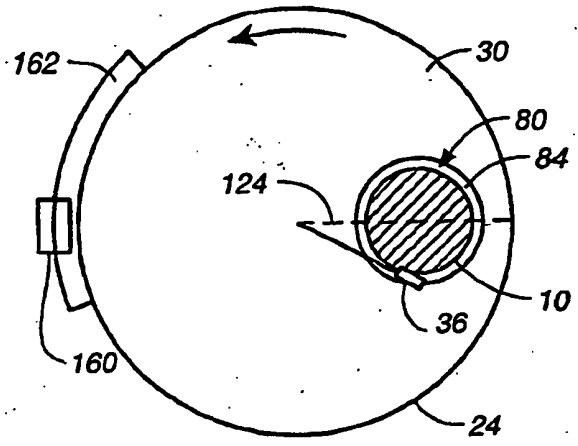


**FIG. 4B**

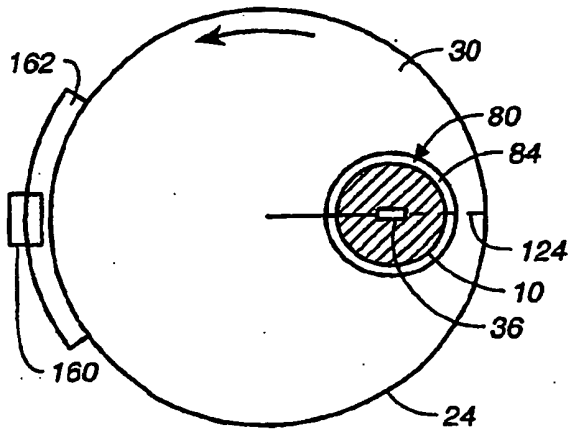


**FIG. 4C**

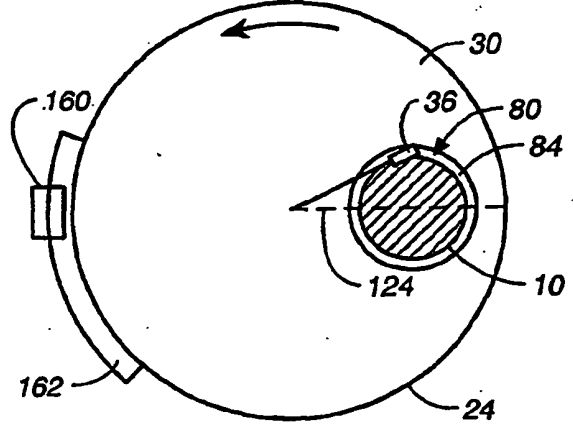


**FIG. 4D**

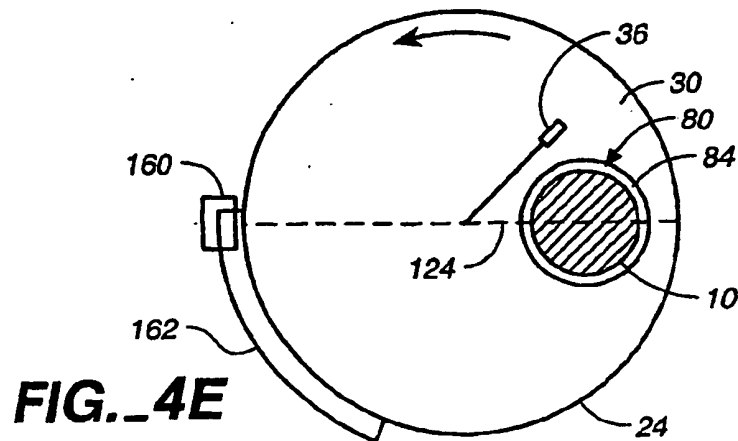





**FIG. 4E**

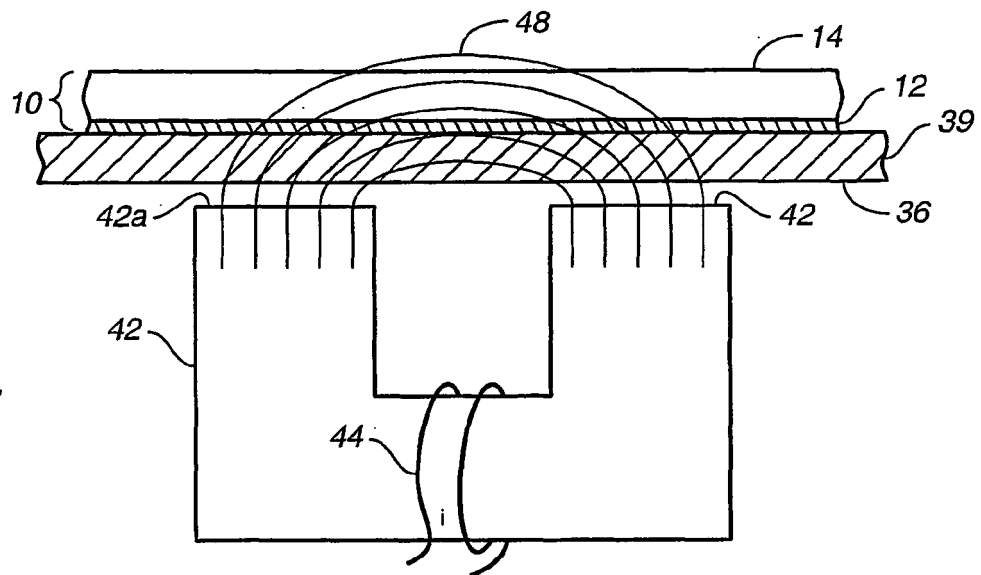


**FIG.\_5**

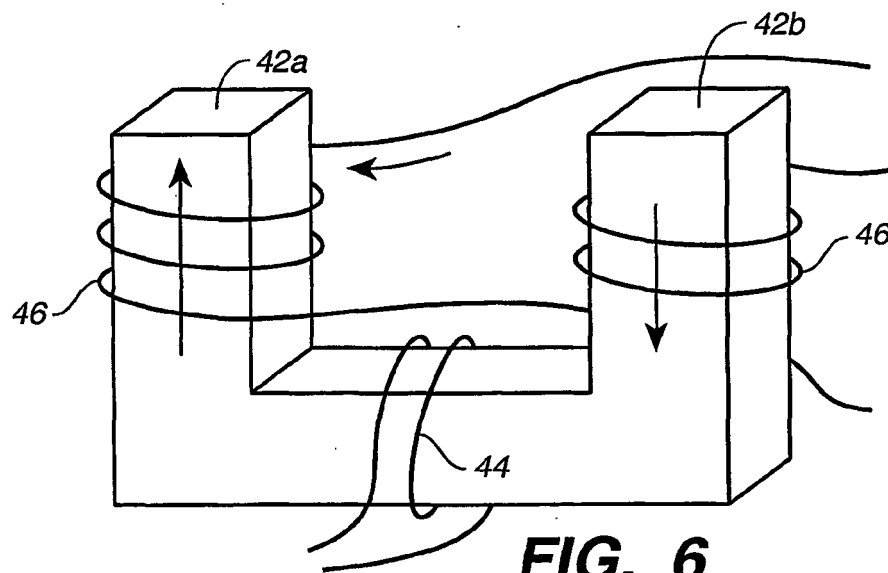


**FIG.\_6**

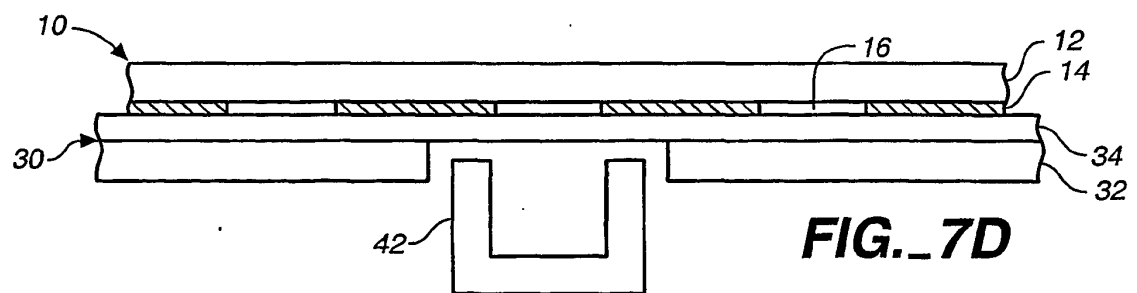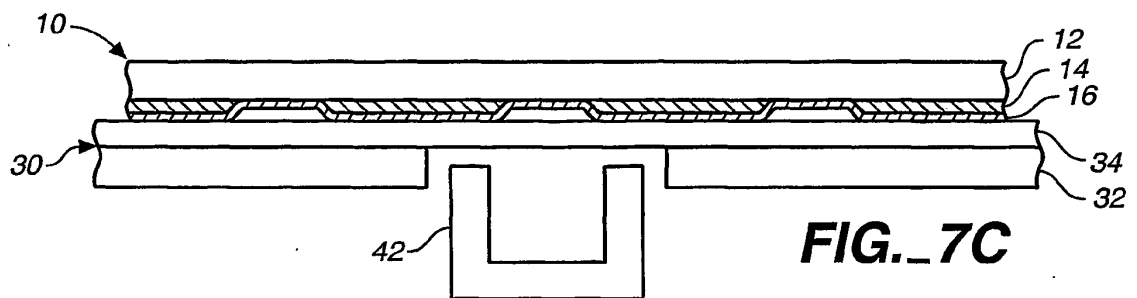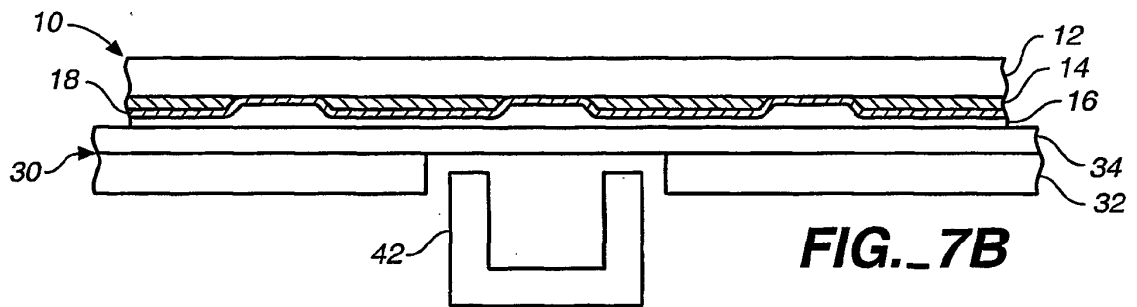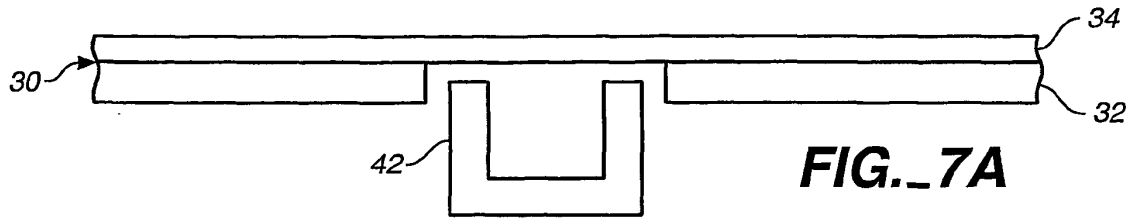


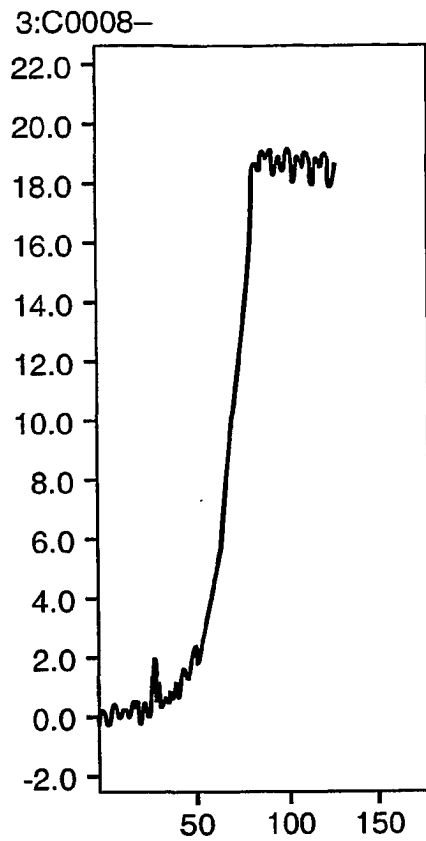


**FIG.\_8**

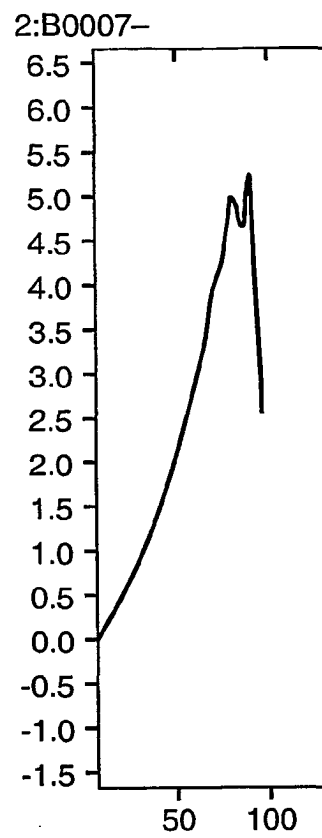


**FIG.\_10**

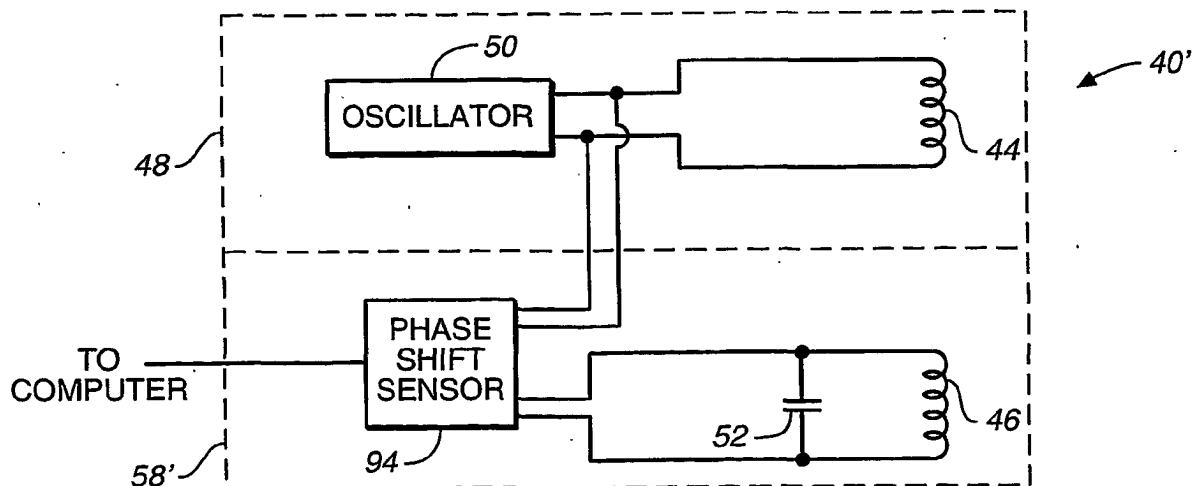


**FIG.\_9A**

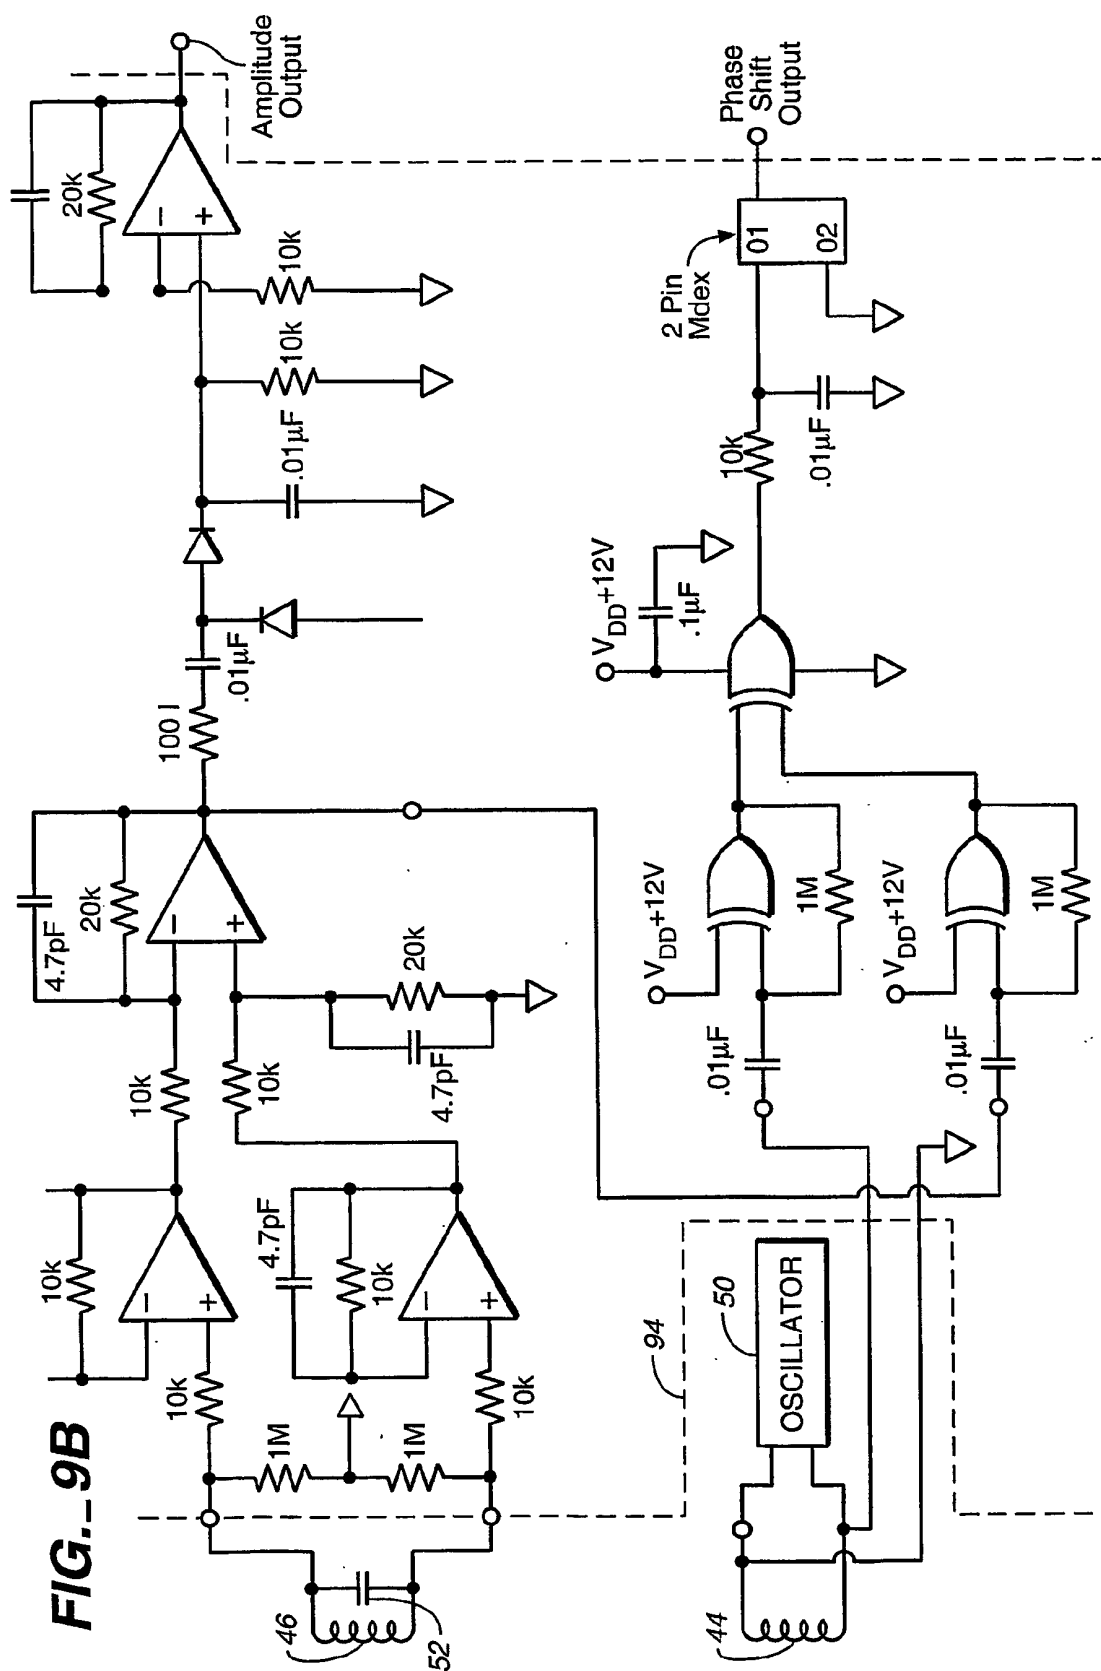


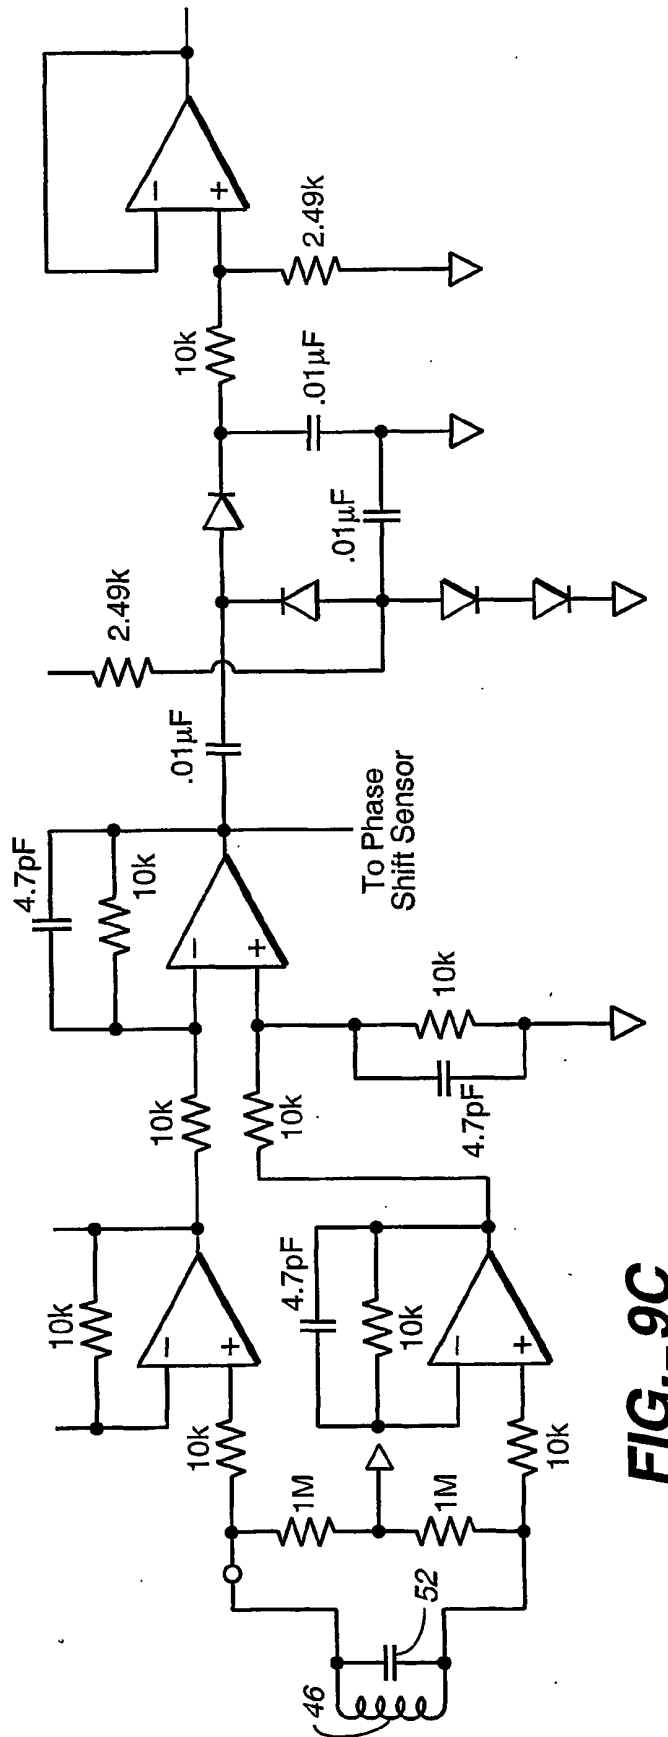


**FIG.-9C**

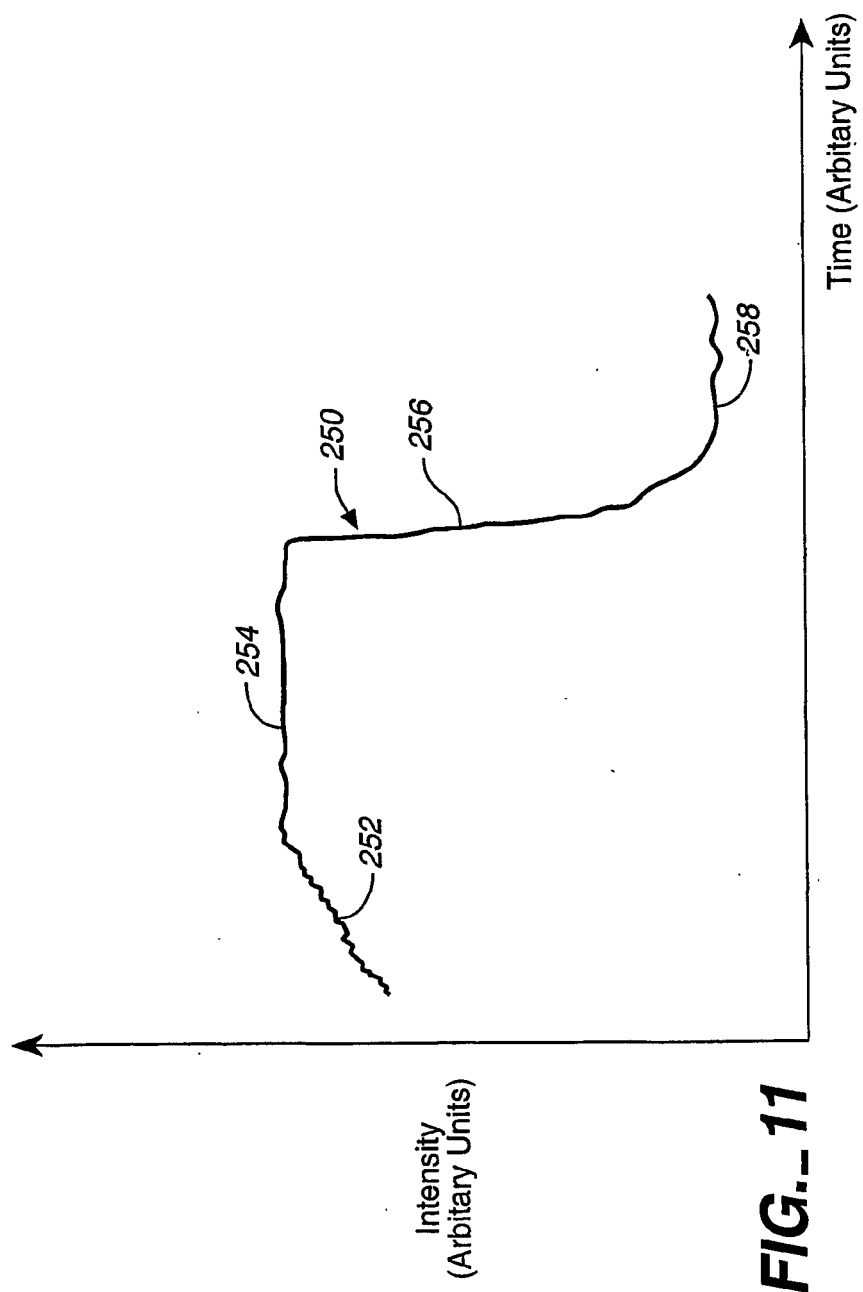

**FIG. 11**

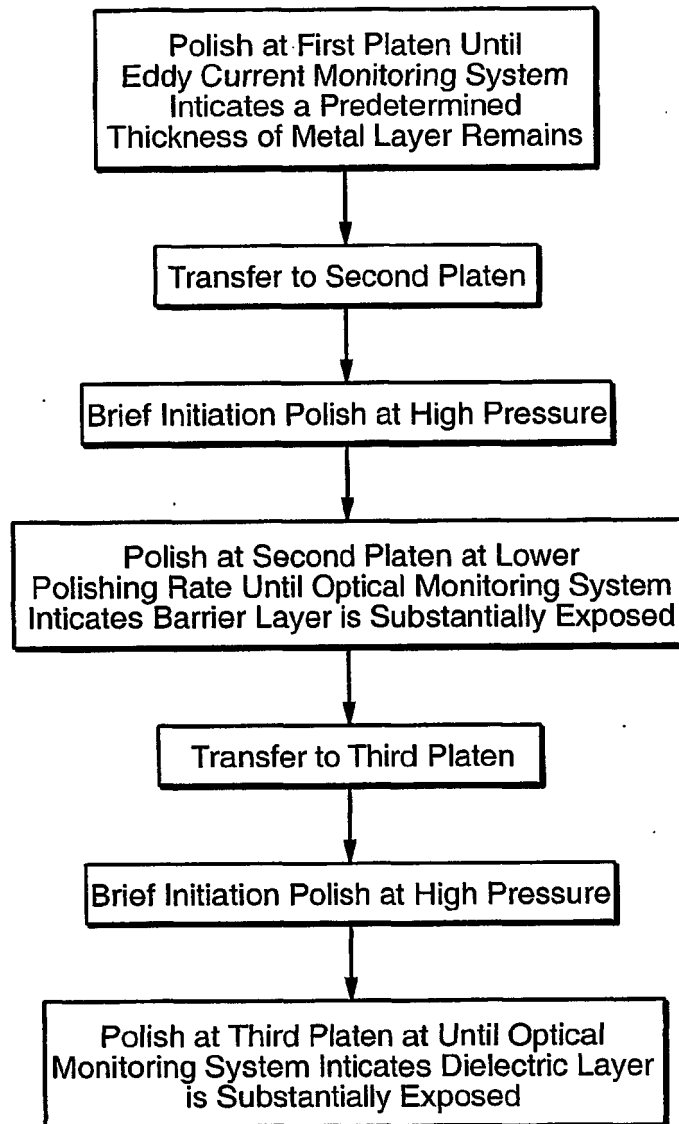

**FIG. 12**

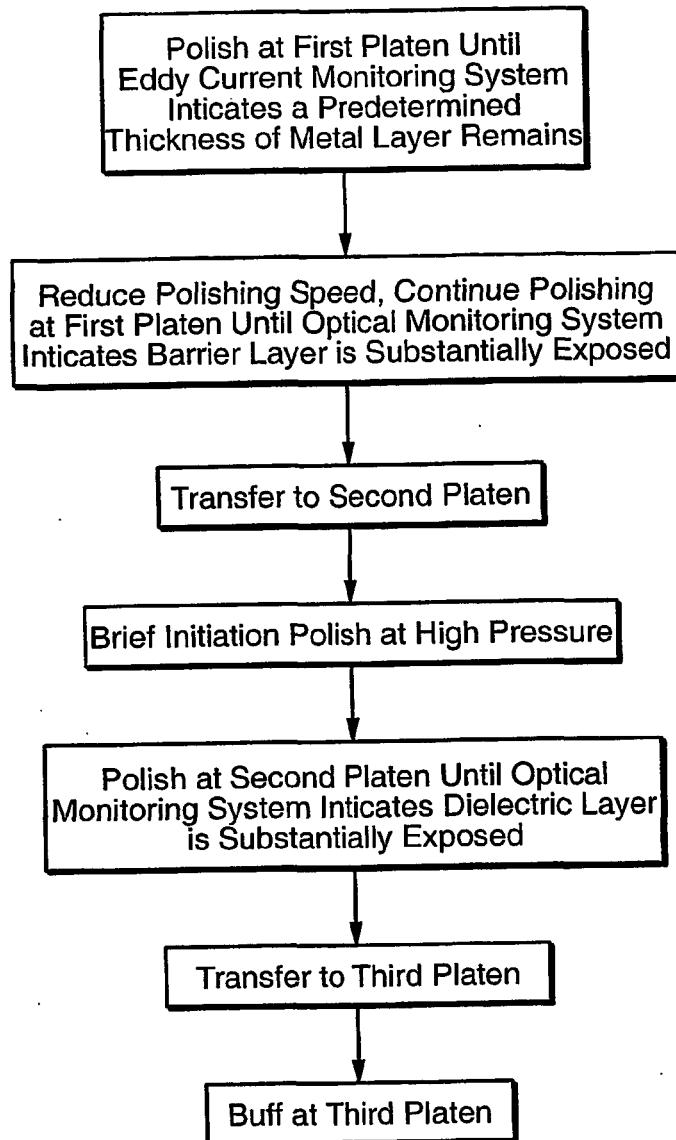

**FIG. 13**

