




(86) Date de dépôt PCT/PCT Filing Date: 1999/03/16
(87) Date publication PCT/PCT Publication Date: 1999/09/23
(45) Date de délivrance/Issue Date: 2006/08/29
(85) Entrée phase nationale/National Entry: 2000/09/14
(86) N° demande PCT/PCT Application No.: IL 1999/000146
(87) N° publication PCT/PCT Publication No.: 1999/047298
(30) Priorité/Priority: 1998/03/16 (IL123685)

(51) Cl.Int./Int.Cl. *B23B 29/12* (2006.01),
B23B 27/16 (2006.01), *B23B 27/00* (2006.01)
(72) Inventeurs/Inventors:
SATRAN, AMIR, IL;
SOKOL, RAFI, IL
(73) Propriétaire/Owner:
ISCAR LTD., IL
(74) Agent: DIMOCK STRATTON LLP

(54) Titre : ENSEMBLE MODULAIRE OUTILS DE COUPE
(54) Title: MODULAR CUTTING TOOL ASSEMBLY

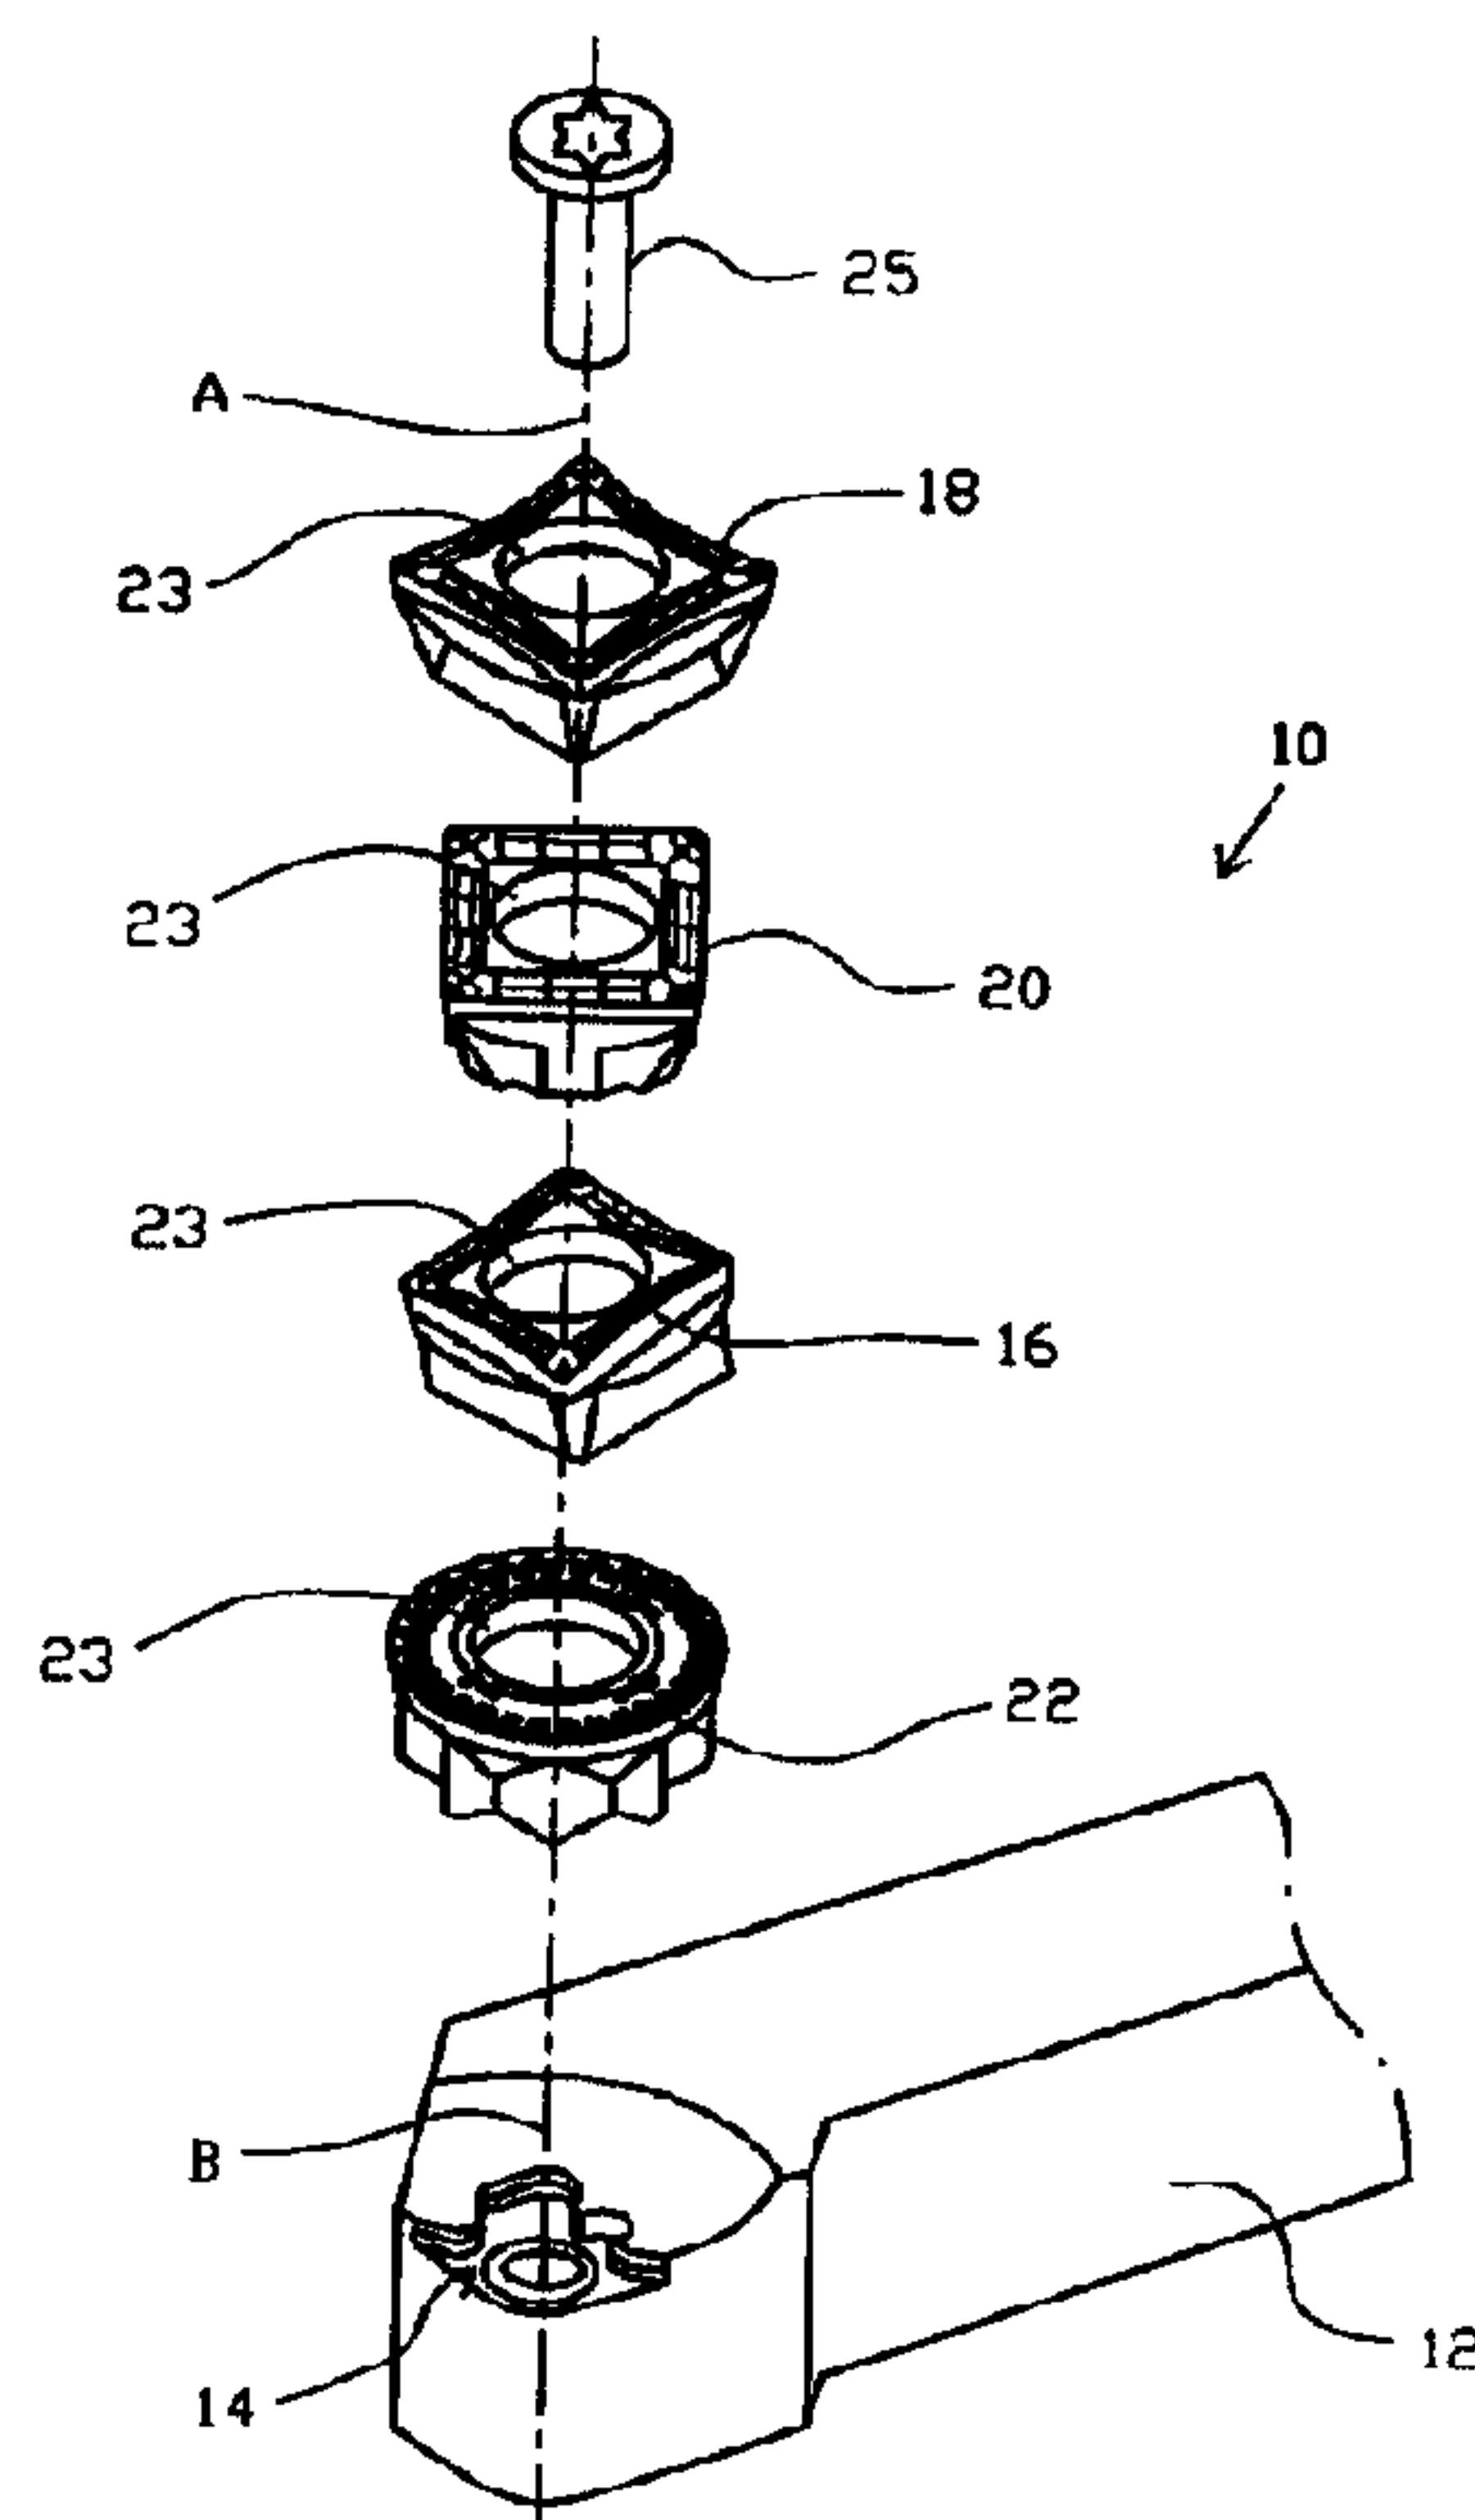

(57) **Abrégé/Abstract:**

A modular cutting tool assembly includes a tool holder having at least one insert receiving pocket, and at least two cutting inserts interchangeably receivable within the pocket. The pocket has a first lateral support surface forming an angle θ with a second lateral support surface as measured in a plane perpendicular to the pocket axis. Each of the cutting inserts has a peripheral flank surface configured to provide a number of abutment features appropriately angled for positioning in abutment with the lateral support surfaces. The peripheral flank surface of one cutting insert is further configured to provide at least two cutting points having a first nose angle, and the peripheral flank surface of the other cutting insert is further configured to provide at least two cutting points having a second nose angle different from the first nose angle.



PCTWORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : B23B 29/12	A1	(11) International Publication Number: WO 99/47298 (43) International Publication Date: 23 September 1999 (23.09.99)
--	-----------	--

(21) International Application Number: PCT/IL99/00146

(22) International Filing Date: 16 March 1999 (16.03.99)

(30) Priority Data:
123685 16 March 1998 (16.03.98) IL(71) Applicant (for all designated States except US): ISCAR LTD.
[IL/IL]; P.O. Box 11, 24959 Tefen (IL).

(72) Inventors; and

(75) Inventors/Applicants (for US only): SATRAN, Amir [IL/IL];
Moran Street 6, 25147 Kfar Vradim (IL). SOKOL, Rafi
[IL/IL]; 25227 Moshav Shvai Tzion (IL).(74) Agent: FRIEDMAN, Mark, M.; Beit Samueloff, Haomanim 7,
67897 Tel Aviv (IL).


(81) Designated States: AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

Published*With international search report.**Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.*

(54) Title: MODULAR CUTTING TOOL ASSEMBLY

(57) Abstract

A modular cutting tool assembly includes a tool holder having at least one insert receiving pocket, and at least two cutting inserts interchangeably receivable within the pocket. The pocket has a first lateral support surface forming an angle θ with a second lateral support surface as measured in a plane perpendicular to the pocket axis. Each of the cutting inserts has a peripheral flank surface configured to provide a number of abutment features appropriately angled for positioning in abutment with the lateral support surfaces. The peripheral flank surface of one cutting insert is further configured to provide at least two cutting points having a first nose angle, and the peripheral flank surface of the other cutting insert is further configured to provide at least two cutting points having a second nose angle different from the first nose angle.

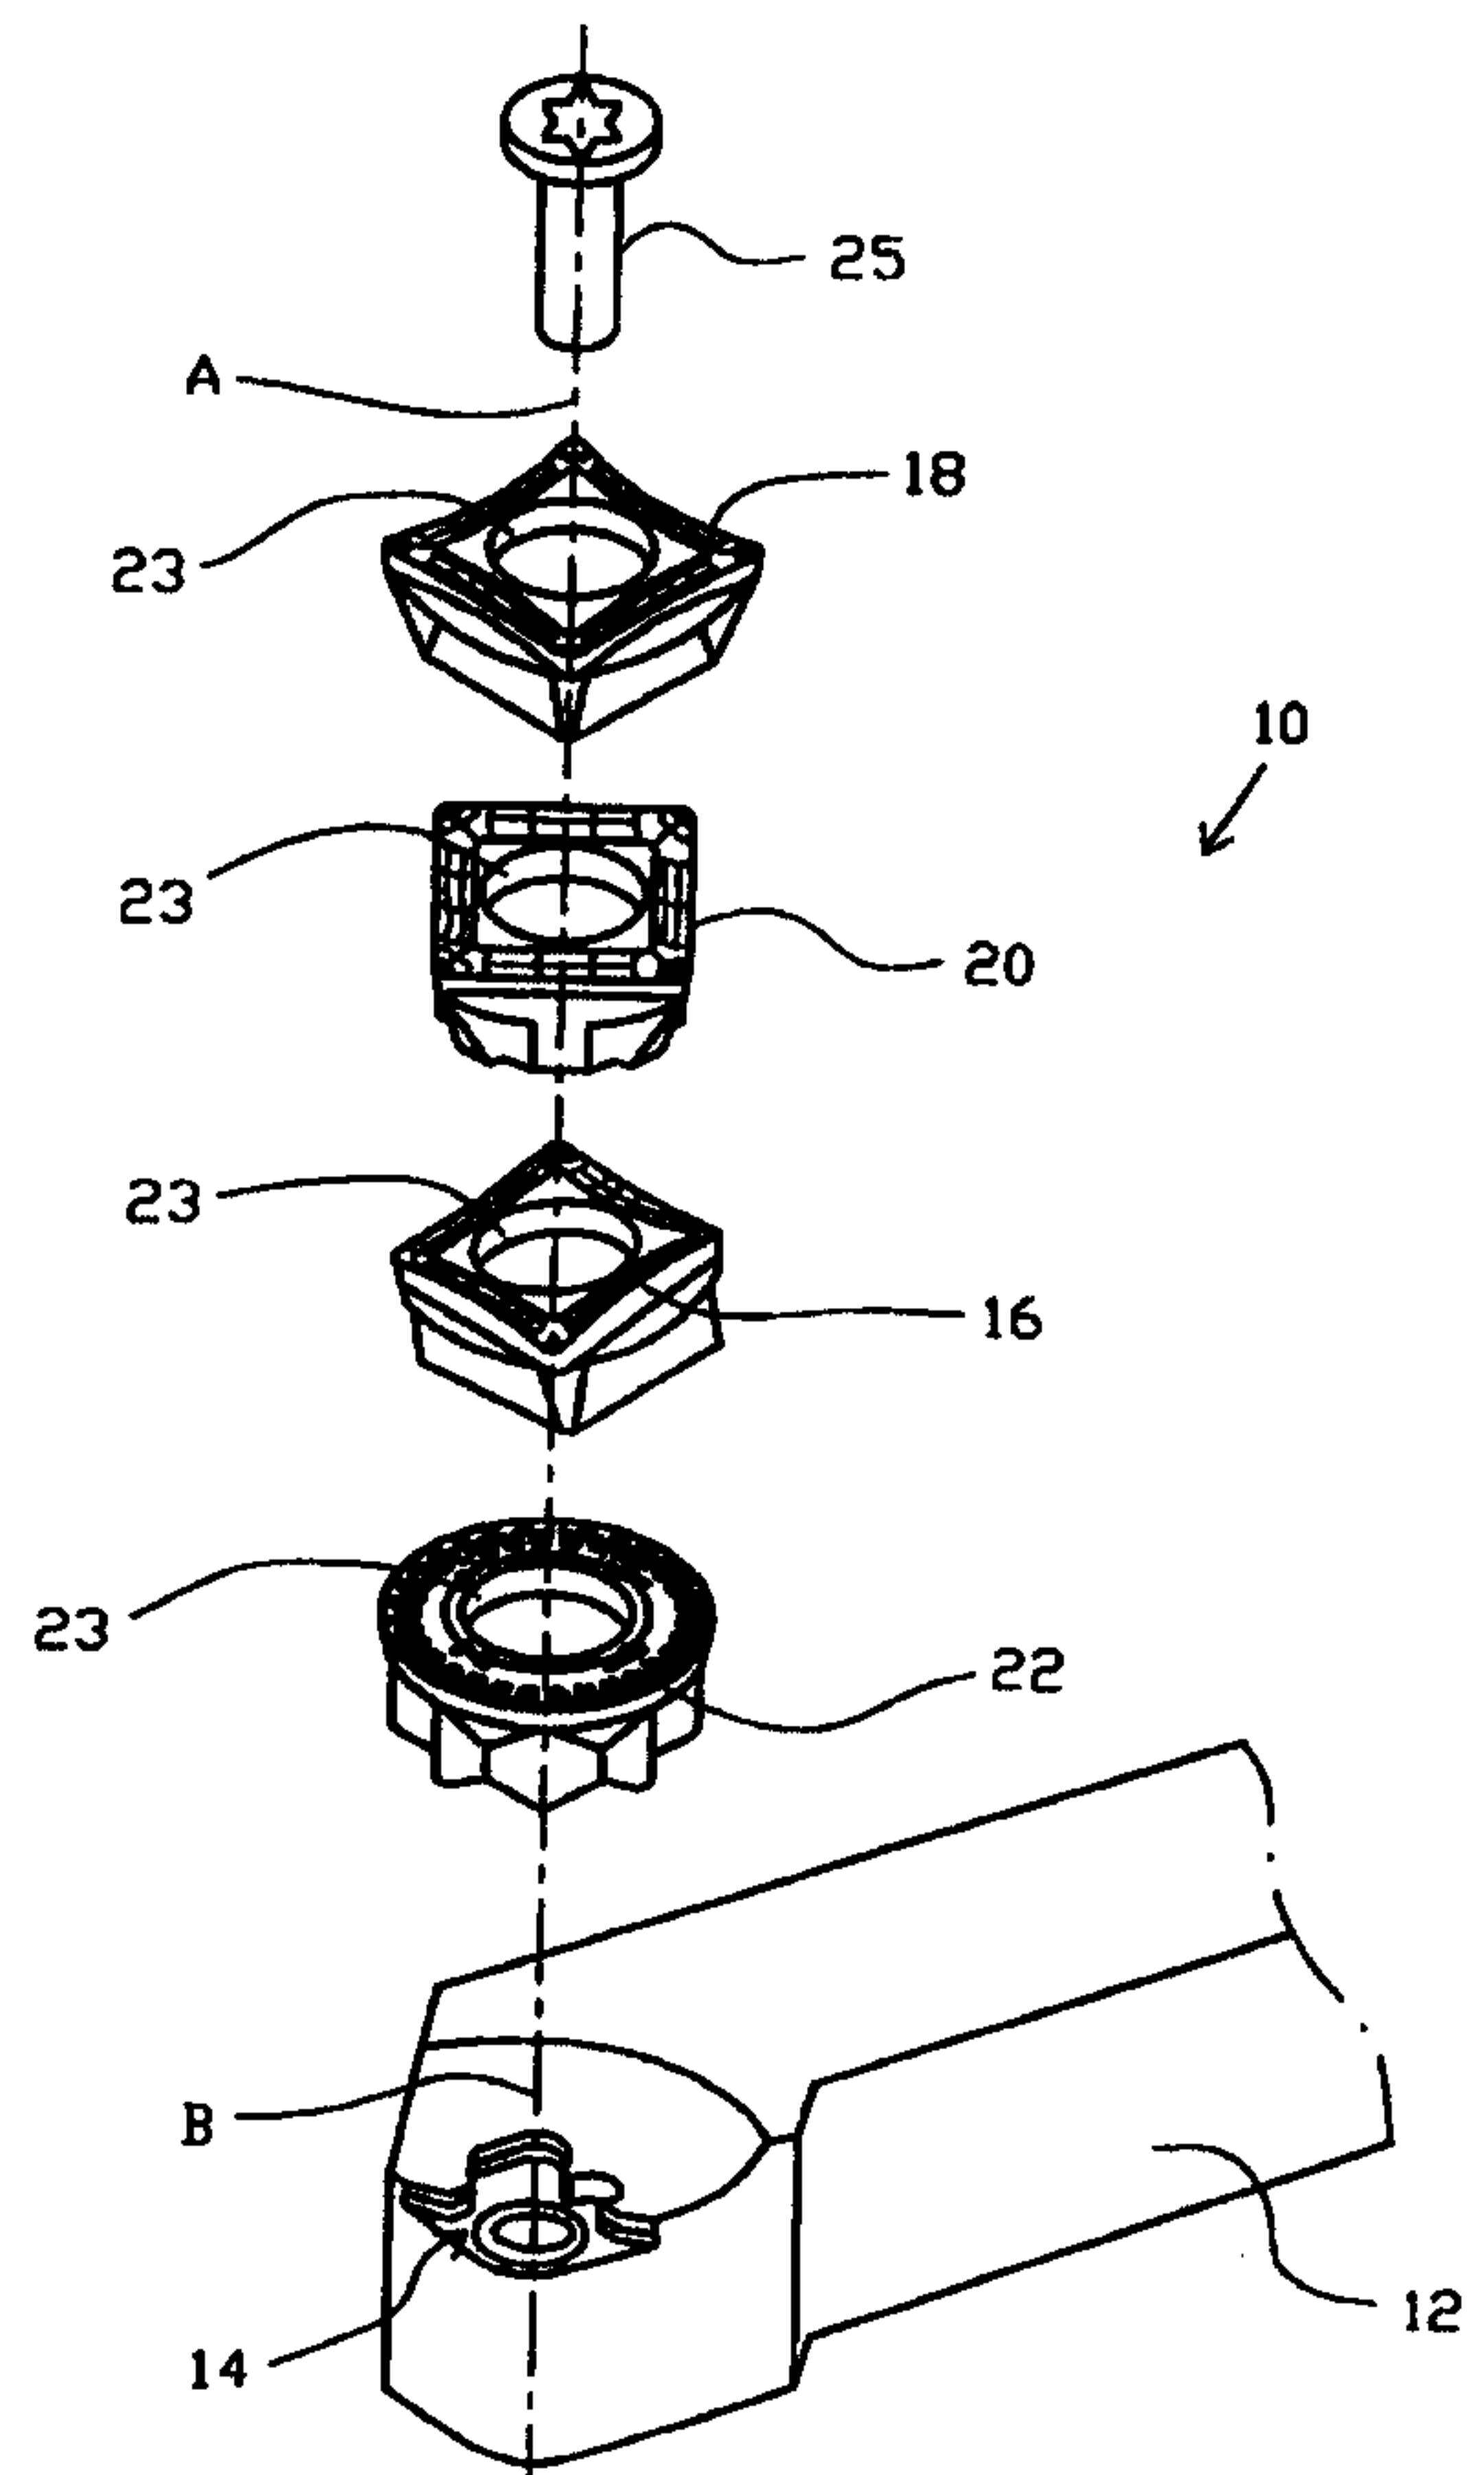

MODULAR CUTTING TOOL ASSEMBLY

FIELD AND BACKGROUND OF THE INVENTION

The present invention relates to cutting tools and, in particular, it concerns a modular cutting tool assembly in which cutting inserts with different cutting point nose angles may be used interchangeably.

It is known to employ cutting inserts made of various hard materials which have polygonal, round, or otherwise rotationally symmetric cutting edges mounted in a receiving pocket of the tool holder of a cutting tool. During a machining operation (turning, milling, etc.), a portion of the available cutting edge cuts the workpiece, typically along edges adjacent to a cutting point. When the cutting edges adjacent to one point of a regular insert have been worked, the insert is indexed to present a whole new cutting point.

Many different forms of cutting inserts are commonly used. In turning operations, for example, one of the primary criteria for selecting an appropriate insert type is the nose angle required. In order to define the term "nose angle", it should be noted that most cutting points as seen in plan view are made up of two straight or low-curvature lines meeting at a point, sometimes modified by rounding to a relatively small nose radius in the point region. The angle which would be made between the straight or low-curvature lines, disregarding the rounding of the point itself, is referred to herein as the "nose angle". The nose angle so defined generally has a well defined value for any cutting insert with

WO 99/47298

PCT/IL99/00146

the notable exception of round inserts in which the nose radius becomes the radius of the entire insert cutting geometry.

A range of nose insert angles are conventionally provided by cutting inserts of various different overall shapes as indicated in Figure 1. Near 90°
5 angles are provided by "S" type square inserts. Eighty degree cutting points are provided by "Q" type concave-sided square, "W" type convex triangle or "Trigon", and "C" type diamond. Sixty degree cutting points are provided by "T" type triangular inserts. Smaller nose angles are typically provided by diamond shapes such as the 55° "D" type and 35° "V" type, or by the "K" type
10 55° parallelogram.

Clearly, the requirements for effectively restraining these different types of cutting insert within a pocket are highly specific to the geometry of the cutting edge. Thus each type of insert is provided with a dedicated tool holder design with a corresponding pocket shape. As a result, the use of multiple insert
15 types is accompanied by the expense of providing and storing multiple tool holders, and necessitates the additional labor of exchanging the entire tool between cutting operations.

In an attempt to reduce these costs and labor, modular systems based on replaceable cartridges have been developed. These systems employ replaceable
20 adapter cartridges each of which provides a pocket with clamping geometry suited to a specific cutting insert. Although these systems do allow the primary tool holder to be used with different cutting insert types, the replacement of the

WO 99/47298

PCT/IL99/00146

cartridges still adds a wasteful additional disassembly/assembly step to the changeover.

There is therefore a need for a modular cutting tool assembly which allows alternate use of multiple cutting inserts with differing nose angles within
5 a single tool holder pocket. There is also a need for cutting inserts and tool holders for use in such an assembly.

SUMMARY OF THE INVENTION

The present invention is a modular cutting tool assembly and corresponding insert design which allow alternate use of multiple cutting inserts
10 with differing nose angles within a single tool holder pocket.

According to the teachings of the present invention there is provided, a modular cutting tool assembly comprising: (a) a tool holder having at least one insert receiving pocket with a base and a plurality of lateral support surfaces, reference being made to a pocket axis of the insert receiving pocket with which
15 an axis of symmetry of an insert is to be aligned, a first of the lateral support surfaces forming an angle θ with a second of the lateral support surfaces as measured in a plane perpendicular to the pocket axis; (b) at least two cutting inserts interchangeably receivable within the pocket, each of the cutting inserts having an upper surface, a bottom surface, a peripheral flank surface and an
20 insert axis of rotational symmetry, the peripheral flank surface being configured to provide a plurality of abutment features, a first of the abutment surfaces forming an angle θ with a second of the abutment surfaces as measured in a

plane perpendicular to the insert axis for positioning in abutment with the lateral support surfaces, wherein the peripheral flank surface of a first of the cutting inserts is further configured to provide at least two cutting points having a first nose angle, and wherein the peripheral flank surface of a second of the cutting inserts is further configured to provide at least two cutting points having a second nose angle different from the first nose angle.

According to a further feature of the present invention, θ is substantially equal to 90° .

According to a further feature of the present invention, the first nose angle is substantially 80° .

There is also provided according to the teachings of the present invention, a cutting insert comprising a unitary structure having an upper surface bounded by a cutting edge, a base, a peripheral flank surface and a central axis, wherein the cutting edge is substantially diamond shaped with a nose angle $\phi < 90^\circ$, the peripheral flank surface being configured to provide a plurality of lateral abutment surfaces forming therebetween angles θ as measured in a plane perpendicular to the central axis, where $\theta > \phi$.

According to a further feature of the present invention, θ is substantially 90° .

According to a further feature of the present invention, ϕ is substantially 80° .

There is also provided according to the teachings of the present invention, a method for designing a modular cutting tool assembly including a first cutting insert having a plurality of cutting points with a first nose angle and a second cutting insert having a plurality of cutting points with a second nose angle different from the first nose angle, the method comprising the steps of:

(a) defining a first cutting geometry for the first cutting insert so as to provide a plurality of cutting points with the first nose angle; (b) defining a second cutting geometry for the second cutting insert so as to provide a plurality of cutting points with the second nose angle; (c) defining a common set of abutment features including a plurality of lateral abutment surfaces angularly spaced around an axis; (d) designing a first peripheral flank surface having an upper portion corresponding to the first cutting geometry and a lower portion providing the common set of abutment features; and (e) designing a second peripheral flank surface having an upper portion corresponding to the second cutting geometry and a lower portion providing the common set of abutment features.

According to a further feature of the present invention, the first cutting geometry and the second cutting geometry have different degrees of rotational symmetry.

According to a further feature of the present invention, the different degrees of rotational symmetry are 2 and 4.

According to a further feature of the present invention, the plurality of lateral abutment surfaces exhibit four-fold rotational symmetry.

There is also provided according to the teachings of the present invention, a cutting insert comprising a unitary structure having an upper surface bounded by a cutting edge, a base, a peripheral flank surface and a central axis, wherein the cutting edge is configured to provide a plurality of cutting points, at least one of the cutting points having a nose angle ϕ , the peripheral flank surface being configured to provide a plurality of lateral abutment surfaces, the two of the lateral abutment surfaces closest to the at least one cutting point forming between them an angle θ as measured in a plane perpendicular to the central axis, where $\theta \neq \phi$.

According to a further feature of the present invention, angle ϕ is substantially equal to 80° and angle θ is substantially equal to 90° .

There is also provided according to the teachings of the present invention, a cutting insert comprising a unitary structure having an upper surface bounded by a cutting edge, a base, a peripheral flank surface and a central axis, wherein the cutting edge includes n substantially straight portions arranged so as to exhibit n -fold rotational symmetry about the central axis, where $n \geq 2$, the peripheral flank surface being configured to provide a plurality of lateral abutment surfaces, the lateral abutment surfaces being located such that lines of intersection between the lateral abutment surfaces and a plane perpendicular to the central axis form an angle θ relative to a projection of the substantially straight portions onto the plane, where $0 < \theta < 360^\circ/n$.

BRIEF DESCRIPTION OF THE DRAWINGS

The invention is herein described, by way of example only, with reference to the accompanying drawings, wherein:

FIG. 1 is a key to the conventional nomenclature used to refer to
5 polygonal cutting insert shapes;

FIG. 2 is an isometric view of a modular cutting tool assembly, constructed and operative according to the teachings of the present invention, including a tool holder and a set of four interchangeable cutting inserts;

FIGS. 3A-3D are top views of the tool holder of Figure 2, each view
10 showing a different one of the four cutting inserts attached to the tool holder;

FIG. 4A is a top view of an insert receiving pocket of the tool holder of Figure 2;

FIG. 4B is an isometric view of the insert receiving pocket of Figure 4A;

FIG. 5A is an upper isometric view of a first of the cutting inserts from
15 the set of Figure 2;

FIG. 5B is a lower isometric view of the cutting insert of Figure 5A;

FIG. 5C is a bottom view of the cutting insert of Figure 5A;

FIG. 5D is a cross-section taken along the line I-I of Figure 5C;

FIG. 5E is a cross-section taken along the line II-II of Figure 5C;

FIG. 6A is an upper isometric view of a second of the cutting inserts
20 from the set of Figure 2;

FIG. 6B is a lower isometric view of the cutting insert of Figure 6A;

FIG. 6C is a bottom view of the cutting insert of Figure 6A;

FIG. 6D is a cross-section taken along the line III-III of Figure 6C;

FIG. 6E is a cross-section taken along the line IV-IV of Figure 6C;

FIG. 7A is an upper isometric view of a third of the cutting inserts from
5 the set of Figure 2;

FIG. 7B is a lower isometric view of the cutting insert of Figure 7A;

FIG. 7C is a bottom view of the cutting insert of Figure 7A;

FIG. 7D is a cross-section taken along the line V-V of Figure 7C;

FIG. 7E is a cross-section taken along the line VI-VI of Figure 7C;

FIG. 8A is an upper isometric view of a fourth of the cutting inserts from
10 the set of Figure 2;

FIG. 8B is a lower isometric view of the cutting insert of Figure 8A;

FIG. 8C is a bottom view of the cutting insert of Figure 8A;

FIG. 8D is a cross-section taken along the line VII-VII of Figure 8C;

FIG. 8E is a cross-section taken along the line VIII-VIII of Figure 8C;
15

FIGS. 9A and 9B are top views of a further embodiment of a modular
cutting tool assembly, each showing a three-fold symmetry insert with a
different nose angle.

DESCRIPTION OF THE PREFERRED EMBODIMENTS

20 The present invention is a modular cutting tool assembly and
corresponding insert design which allow alternate use of multiple cutting inserts
with differing nose angles within a single tool holder pocket.

The principles and operation of modular cutting tools and cutting inserts according to the present invention may be better understood with reference to the drawings and the accompanying description.

Referring now to the drawings, Figures 2 and 3A-3D show a modular
5 cutting tool assembly, generally designated 10, constructed and operative according to the teachings of the present invention, including a tool holder 12 with an insert receiving pocket 14 for receiving a number of interchangeable cutting inserts, exemplified here by cutting inserts 16, 18, 20 and 22. Each cutting insert features a mounting hole 23 which allows the insert to be retained
10 within pocket 14 by use of a clamping screw 25. The structure of pocket 14 is shown in Figures 4A and 4B, while the details of the various exemplary inserts are shown in Figures 5-8.

Generally speaking, cutting tool assembly 10 provides tool holder 12 having at least one insert receiving pocket 14 with a base 24 and a number of
15 lateral support surfaces 26, 28 and 30. At least two of these lateral support surfaces form between them an angle θ as measured in a plane perpendicular to an axis of the insert receiving pocket with which the axis of symmetry of an insert is to be aligned. Cutting tool assembly 10 also includes at least two cutting inserts interchangeably receivable within pocket 14. Each of the cutting
20 inserts has a peripheral flank surface configured to provide abutment features. The peripheral flank surface is, in general, divided into an upper relief flank surface proximal to the cutting edge which provides mechanical support for the cutting edge, and a lower flank surface which provides the abutment features.

The abutment features form between them an angle θ as measured in a plane perpendicular to an insert axis of rotational symmetry of the insert axis so as to mate with lateral support surfaces 26, 28 and 30. The peripheral flank surface of one of the cutting inserts is configured to provide cutting points having a first
5 nose angle, and the peripheral flank surface of a second of the cutting inserts is configured to provide cutting points having a second nose angle different from the first nose angle.

By way of example, the invention is exemplified here by a set of four cutting inserts interchangeably mounted within pocket 14 for which θ is 90°
10 (see Figure 4A). As will be evident from Figures 3A-3D, this set provides inserts with a range of different nose angle options. In addition, the set of inserts may be further supplemented according to the principles of the present invention to provide further options for these and other parameters.

It should be appreciated that the present invention is applicable to a wide
15 range of cutting inserts with rotationally-symmetric cutting edges. The term “rotationally-symmetric” is used herein in the description and claims to refer to shapes which are invariant under rotation through an angle of $360^\circ/n$ where n is at least two. The term so defined includes diamonds, parallelograms and regular polygons, whether straight-sided or made up of more complex combinations of
20 straight or curved line segments. The term also includes circular shapes. It will be noted that the symmetry of the inserts of the present invention, unless otherwise stated, is taken to refer to the symmetry of the underlying geometry of the cutting edge, independent of secondary features such as chip breaking

features or reference indicia. Thus, in certain cases, a repetitive pattern such as serrations, and scalloped or wavy cutting edges may be superimposed over the basic shape. The cutting edge may exhibit equivalent or higher degrees of symmetry than the abutment surfaces. It will be appreciated that rotational
5 symmetry does not imply symmetry under reflection.

Reference will be made throughout the specification and claims to a central axis of an insert **A**, and an insert-receiving pocket axis **B** (see Figure 2). Axis **A** is the axis about which the cutting edge exhibits rotational symmetry. Reference is also made to the "top" and "bottom" of the insert. Wherever such
10 references appear, the insert is assumed to be mounted with its base downwards so as to present its cutting edge upwards and with its axis vertical. Axis **B** of the insert receiving pocket is correspondingly defined as a line through the pocket with which the cutting insert axis **A** is to be aligned.

Turning now to the features of modular cutting tool assembly 10 in more
15 detail, pocket 14 preferably features at least one lateral relief hollow 32. The positioning and size of relief hollows 32 are chosen to provide clearance for various cutting edge lateral reinforcement features of certain inserts without obstructing the lateral support surfaces.

The specific example shown here employs a set of inserts with vertical
20 abutment surfaces, i.e., all standing parallel to axis **A** of the insert. Correspondingly, lateral support surfaces 26, 28 and 30 are all vertical, i.e., stand parallel to the pocket axis **B**. It will be clear that this feature is not critical to the present invention and that the insert abutment surfaces and pocket lateral

WO 99/47298

PCT/IL99/00146

support surfaces could be sloped upwardly outwards with respect to the insert and pocket axes, respectively.

Furthermore, it is important to note that the present invention renders the geometrical characteristics of the abutment surfaces largely independent from those of the upper relief flank surfaces. As a result, the abutment surfaces may be vertical while the upper relief flank surfaces, adjacent to the cutting edges of the inserts described here, are angled to provide inherent relief between the upper relief flank surfaces and the surface of the workpiece being machined.

As mentioned earlier, one of the support surfaces 26 forms an angle $\theta = 90^\circ$ with one, or in this case both, of the other support surfaces 28 and 30. It will be understood that the innermost support surface, i.e. support surface 28 may be omitted since the remaining support surfaces 26 and 30 fully define an effective lateral support/restraint system. However, in most cases, a three-point or more accurately three-surface support geometry is preferred.

In the example shown here, base 24 is substantially planar and features a central threaded bore 34 for receiving clamping screw 25. Threaded bore 34 is preferably very slightly off-set from the pocket axis to ensure that the abutment surfaces of the insert are biased against the corresponding support surfaces of the receiving pocket. It should be appreciated that the specific clamping technique employed to clamp the cutting inserts within pocket 14 does not, *per se*, constitute a part of the present invention, and that variations may be made in accordance with any other clamping technique without straying from the scope of the present invention.

WO 99/47298

PCT/IL99/00146

Turning now to Figures 5A-5E, a diamond shaped cutting insert 16, constructed and operative according to the teachings of the present invention, will be described in more detail. The phrase "diamond shaped" is used herein to denote an insert for which the plan view of the cutting edge corresponds
5 substantially to an equilateral but non-orthogonal parallelogram. Included within this definition are modifications such as rounding of corners and chip-breaking features such as are shown.

Cutting insert 16 has a unitary structure including an upper surface 36 bounded by a cutting edge 38, a base 40, and a peripheral flank surface 42.
10 Cutting edge 38 is substantially diamond shaped. Peripheral flank surface 42 is configured to provide a plurality of lateral abutment surfaces 44 forming therebetween angles of substantially 90° as measured in a plane perpendicular to a central axis of the insert. This makes insert 16 compatible with the orthogonal support surfaces of pocket 14 while providing a nose angle of
15 significantly less than 90° . This structure is particularly advantageous for a diamond shaped cutting edge with a nose angle of substantially 80° replacing the conventional "C" type insert.

Abutment surfaces 44 may be most simply implemented as a square portion of insert 16 adjacent to base 40 (see Figures 5C and 5D). In order to
20 provide effective support for the projecting cutting points 46, flank surface 42 preferably also includes tapered reinforcement features 48.

Turning now to Figures 6A-6E, these show a cutting insert 18 with a convex-sided square cutting edge 50 replacing the conventional "Q" type insert.

Here too, the lower part of the insert assumes a regular square form to provide the required orthogonal abutment surfaces 58 with the upper part 60 of the peripheral flank surfaces being contoured appropriately to support the cutting edge. Specifically, the peripheral flank surface here includes four tapered reinforcement features 62. Insert 18 provides an option of four indexable cutting positions instead of the two of insert 16.

Turning now to Figures 7A-7E, these illustrate how an insert, in this case insert 20 with a regular square cutting edge 54, can be configured to provide cutting edges rotated through an angle, here 45°, relative to the orientation of the pocket lateral support surfaces. The implications of this rotation may be appreciated by comparing the orientations of inserts 18 and 20 within pocket 14 as shown in Figures 3B and 3C. Clearly, a rotated configuration could equally be constructed with shapes of cutting edge other than a regular square.

The rotated mounting orientation is achieved by providing orthogonal abutment surfaces 52 rotated through about 45° from the directions of the straight portions of cutting edge 54. Support for the corners of the insert is provided by tapered reinforcement features 56 positioned to lie in the lateral relief hollow 32 between the support surfaces of pocket 14 when the insert is mounted therein.

Finally with respect to assembly 10, Figures 8A-8E show a circular insert 22 mountable in four indexable positions within pocket 14. Here again, orthogonal abutment surfaces 64 are provided by a primarily square lower portion of the insert with intermediate reinforcement projections 66 lending

additional support to the cutting edge 68 at intermediate positions around the insert.

At this stage, it may be appreciated that modular cutting tool assembly 10 may be viewed as the result of a generalizable method for designing a modular cutting tool assembly. The method begins by defining the objective, i.e., choosing at least two particular cutting insert geometries which one wishes to use interchangeably. Based on the desired cutting geometries, a common set of abutment features is chosen. The abutment features include a plurality of lateral abutment surfaces angularly spaced around an axis and lying within the outlines of both desired cutting geometries. For each insert, a peripheral flank surface is then designed to have an upper portion corresponding to the respective cutting geometry and a lower portion providing the common set of abutment features. The orientation of the abutment surfaces is chosen in accordance with a desired orientation of the insert when mounted in the tool holder pocket.

Optionally, the first cutting geometry and the second cutting geometry may have different degrees of rotational symmetry as exemplified by the two-fold symmetry of insert 16 and the four-fold symmetry of insert 18 described above. In this context, the term "degree of rotational symmetry" is used exclusively to refer to the maximum degree of rotational symmetry present.

A further application of this method is illustrated schematically in Figures 9A and 9B. These show an assembly for a set of cutting inserts with

WO 99/47298

PCT/IL99/00146

three-fold rotational symmetry. In this example, lateral support surfaces 70 and 72 form an angle of 60° with a third lateral support surface 74.

It will be appreciated that the above descriptions are intended only to serve as examples, and that many other embodiments are possible within the
5 spirit and the scope of the present invention.

LIST OF NOMENCLATURE

10 modular cutting tool assembly
 12 tool holder
 14 insert receiving pocket
 16 diamond cutting insert
 18 "Q"-type cutting insert
 20 square cutting insert
 22 round cutting insert
 23 mounting hole
 25 clamping screw

Pocket 14

24 base of insert receiving pocket
 26 first lateral support surface
 28 second lateral support surface
 30 third lateral support surface
 32 lateral relief hollow
 34 central threaded bore

Diamond Insert 16

36 upper surface
 38 cutting edge
 40 base
 42 peripheral flank surface
 44 lateral abutment surfaces
 46 projecting cutting points
 48 tapered reinforcement features

"Q" Type Insert 18

50 convex-sided square cutting edge
 58 orthogonal abutment surfaces
 60 upper part of the peripheral flank surfaces
 62 tapered reinforcement features

Square Insert 20

52 orthogonal abutment surfaces
 54 cutting edges
 56 tapered reinforcement features

Round Insert 22

64 orthogonal abutment surfaces
 66 intermediate reinforcement projections

68 cutting edge

3-Fold Symmetry Cutting Insert Assembly

70 first lateral support surface
 72 second lateral support surface
 74 third lateral support surface

WHAT IS CLAIMED IS:

1. A modular cutting tool assembly comprising:

(a) a tool holder having at least one insert receiving pocket with a base and a plurality of lateral support surfaces, reference being made to a pocket axis of said insert receiving pocket with which an axis of symmetry of an insert is to be aligned, a first of said lateral support surfaces forming an angle θ with a second of said lateral support surfaces as measured in a plane perpendicular to said pocket axis, where θ is substantially equal to 90° ;

(b) at least two cutting inserts interchangeably receivable within said pocket, each of said cutting inserts having an upper surface bounded by a cutting edge, a bottom surface, a peripheral flank surface and an insert axis of rotational symmetry, said peripheral flank surface being configured to provide a plurality of abutment surfaces, a first of said abutment surfaces forming an angle θ with a second of said abutment surfaces as measured in a plane perpendicular to said insert axis for positioning in abutment with said lateral support surfaces,










wherein said cutting edge of a first of said cutting inserts is configured to provide at least two cutting points each having a first nose angle measured between portions of said cutting edge substantially equal to 80° , and wherein said cutting edge of a second of said cutting inserts is configured to provide at least two cutting points each having a second nose angle different from said first nose angle.

2. A cutting insert comprising a unitary structure having an upper surface bounded by a cutting edge, a base, a peripheral flank surface and a central axis, wherein said cutting edge is substantially diamond shaped with a nose angle ϕ measured between portions of said cutting edge of less than 90° , said peripheral flank surface being configured to provide a plurality of lateral abutment surfaces forming therebetween angles θ as measured in a plane perpendicular to said central axis, where $\theta > \phi$.

3. The cutting insert of claim 2, wherein θ is substantially 90° .

4. The cutting insert of claim 3, wherein ϕ is substantially 80° .
5. A cutting insert comprising a unitary structure having an upper surface bounded by a cutting edge, a base, a peripheral flank surface and a central axis, wherein said cutting edge exhibits a substantially square shape formed primarily from four substantially straight portions, said peripheral flank surface being configured to provide a plurality of lateral abutment surfaces, said lateral abutment surfaces being located such that lines of intersection between said lateral abutment surfaces and a plane perpendicular to said central axis form an angle of substantially 45° relative to a projection of said substantially straight portions onto said plane.
6. A cutting insert comprising a unitary structure having an upper surface bounded by a cutting edge, a base, a peripheral flank surface and a central axis of rotational symmetry, said peripheral flank surface being configured to provide a plurality of abutment surfaces, a first of said abutment surfaces forming an angle substantially equal to 90° with a second of said abutment surfaces as measured in a plane perpendicular to said central axis, wherein said cutting edge includes at least two cutting points having a nose angle measured between portions of said cutting edge substantially equal to 80° .
7. The cutting insert of claim 6, wherein said cutting edge is substantially diamond shaped.
8. The cutting insert of claim 6, wherein said cutting edge includes four cutting points having a nose angle substantially equal to 80° .

FIG. 1

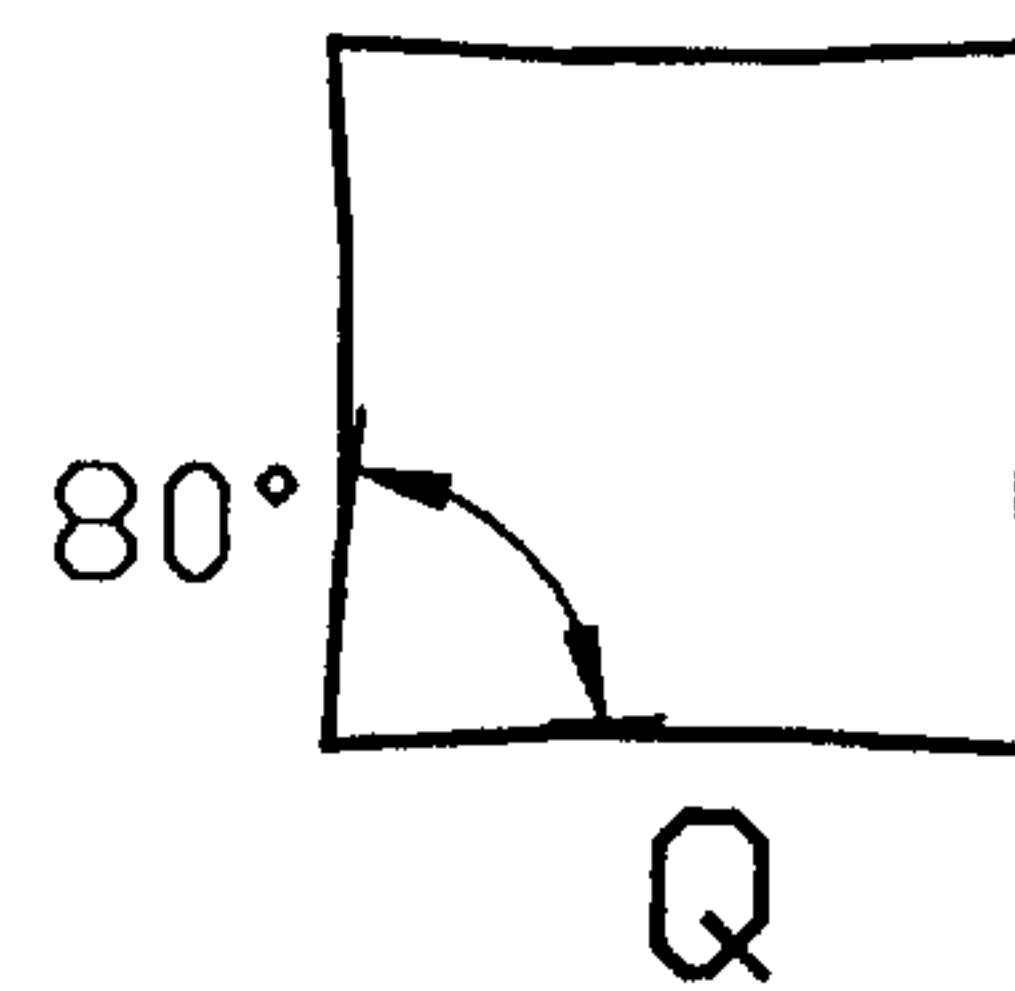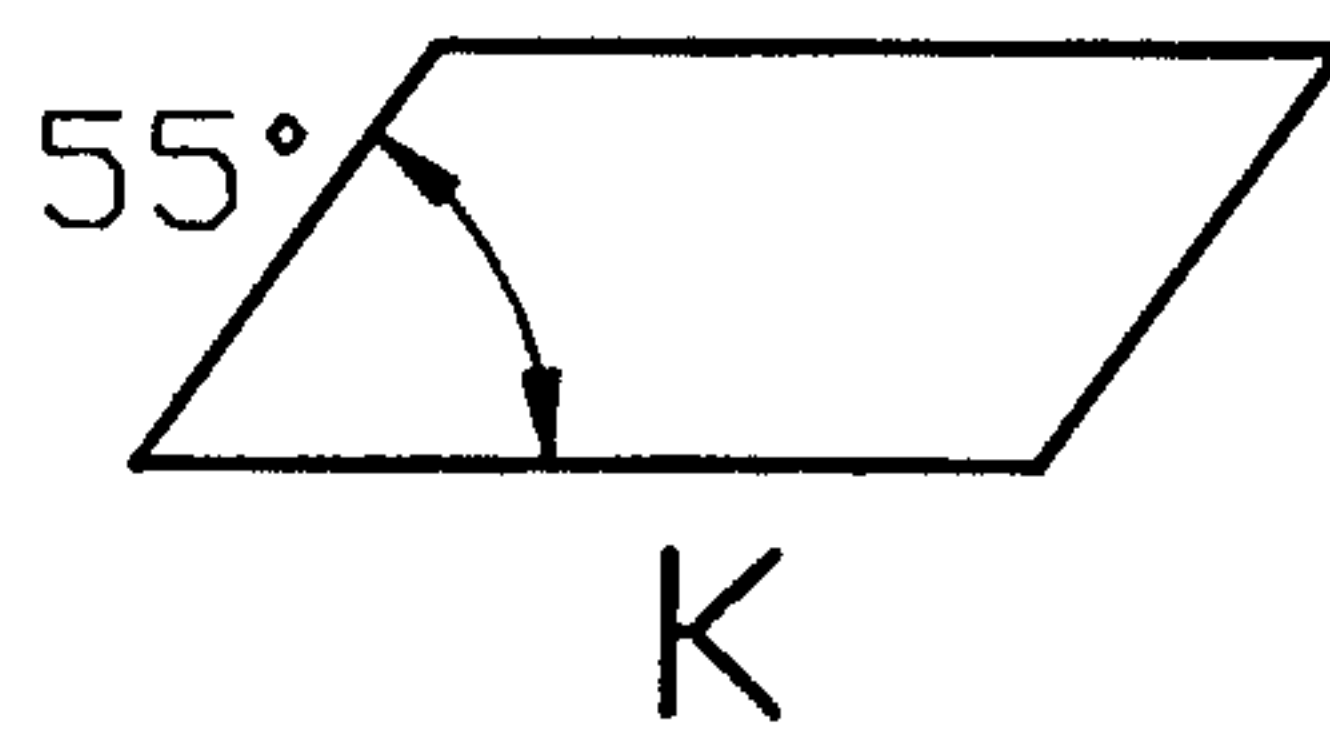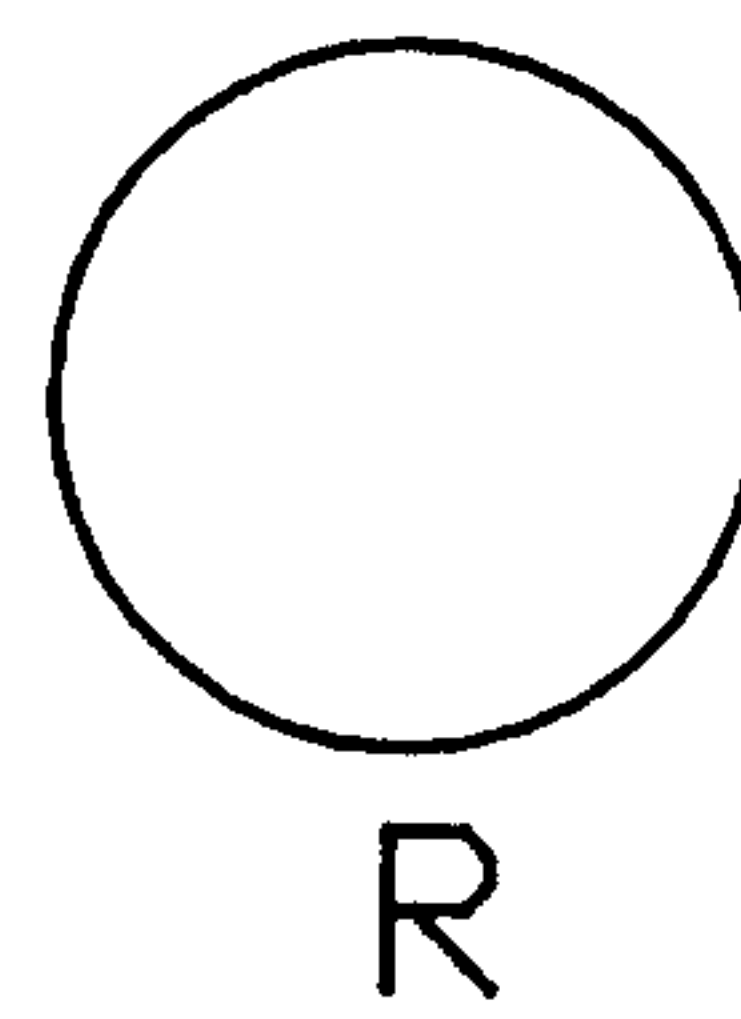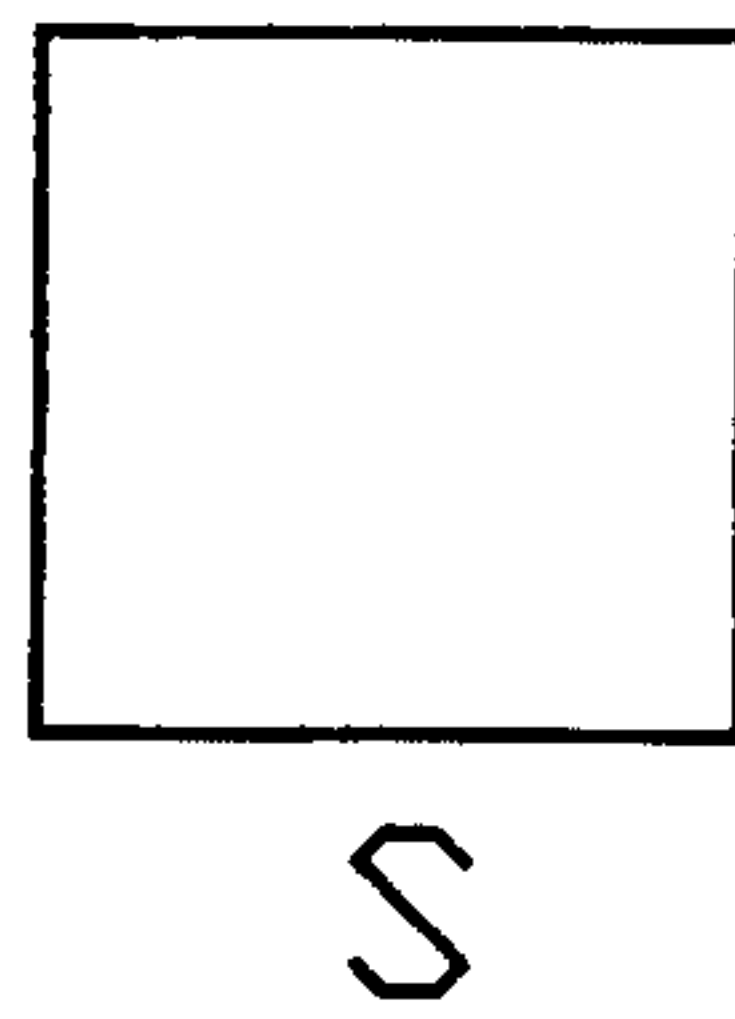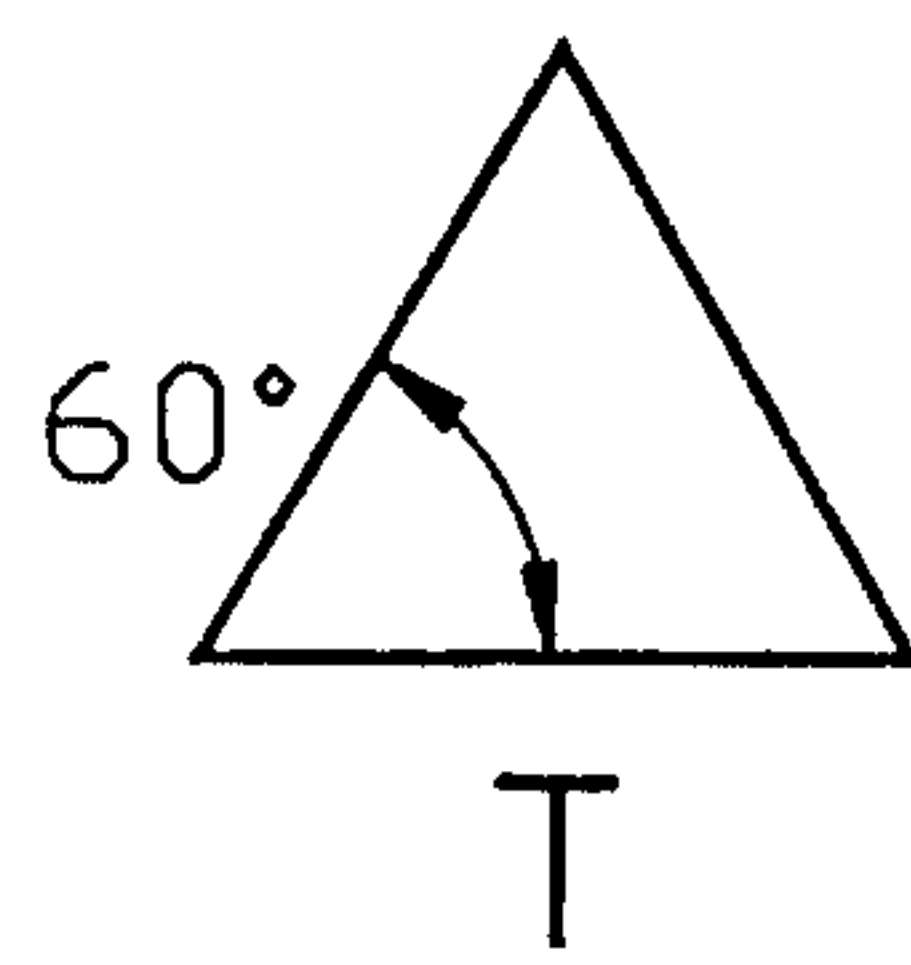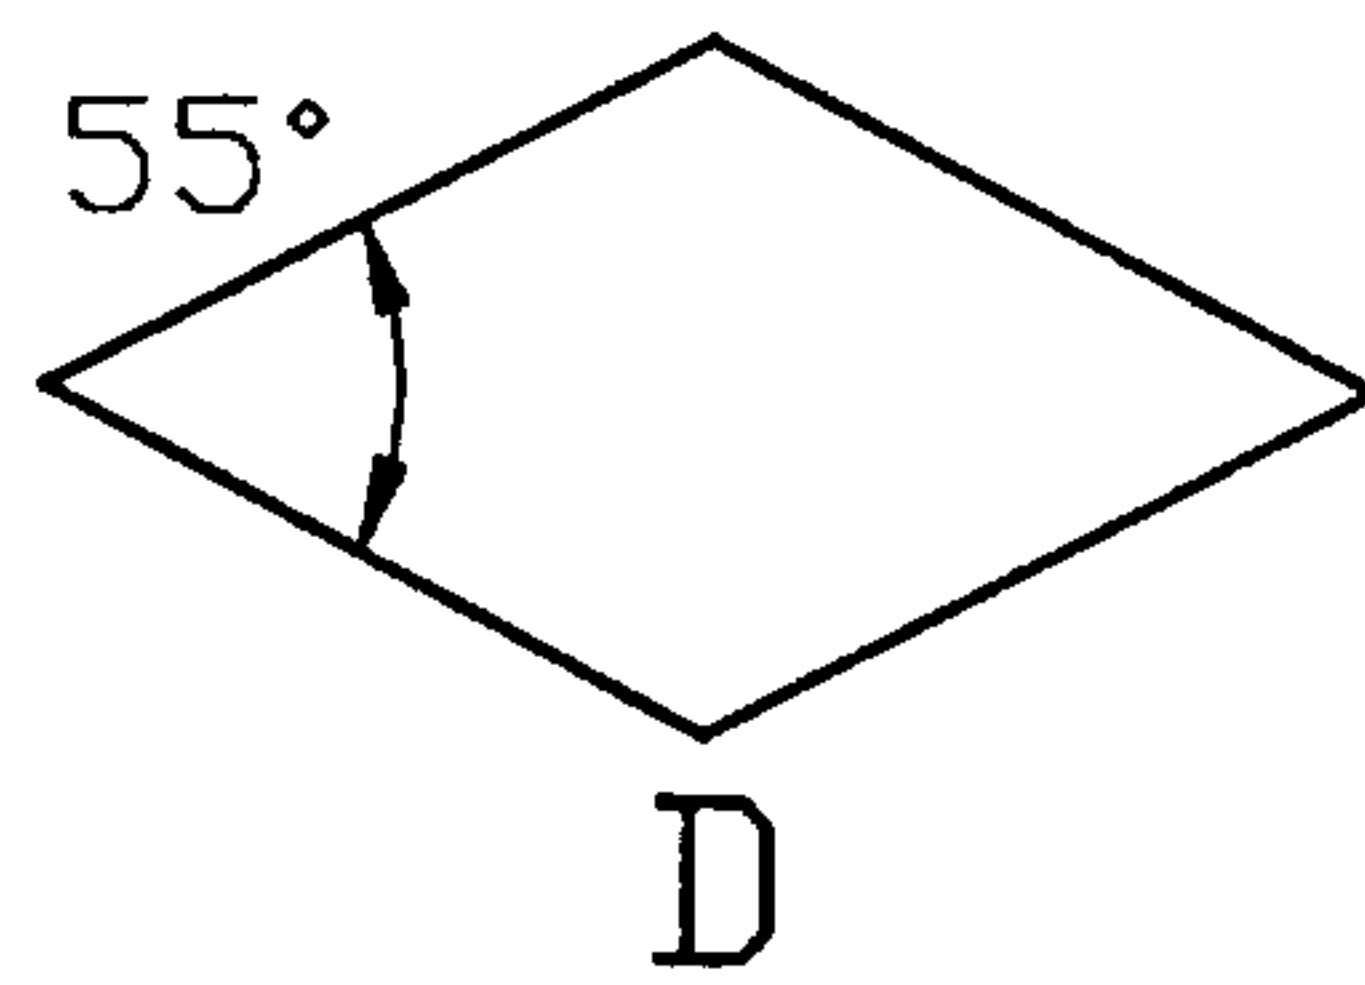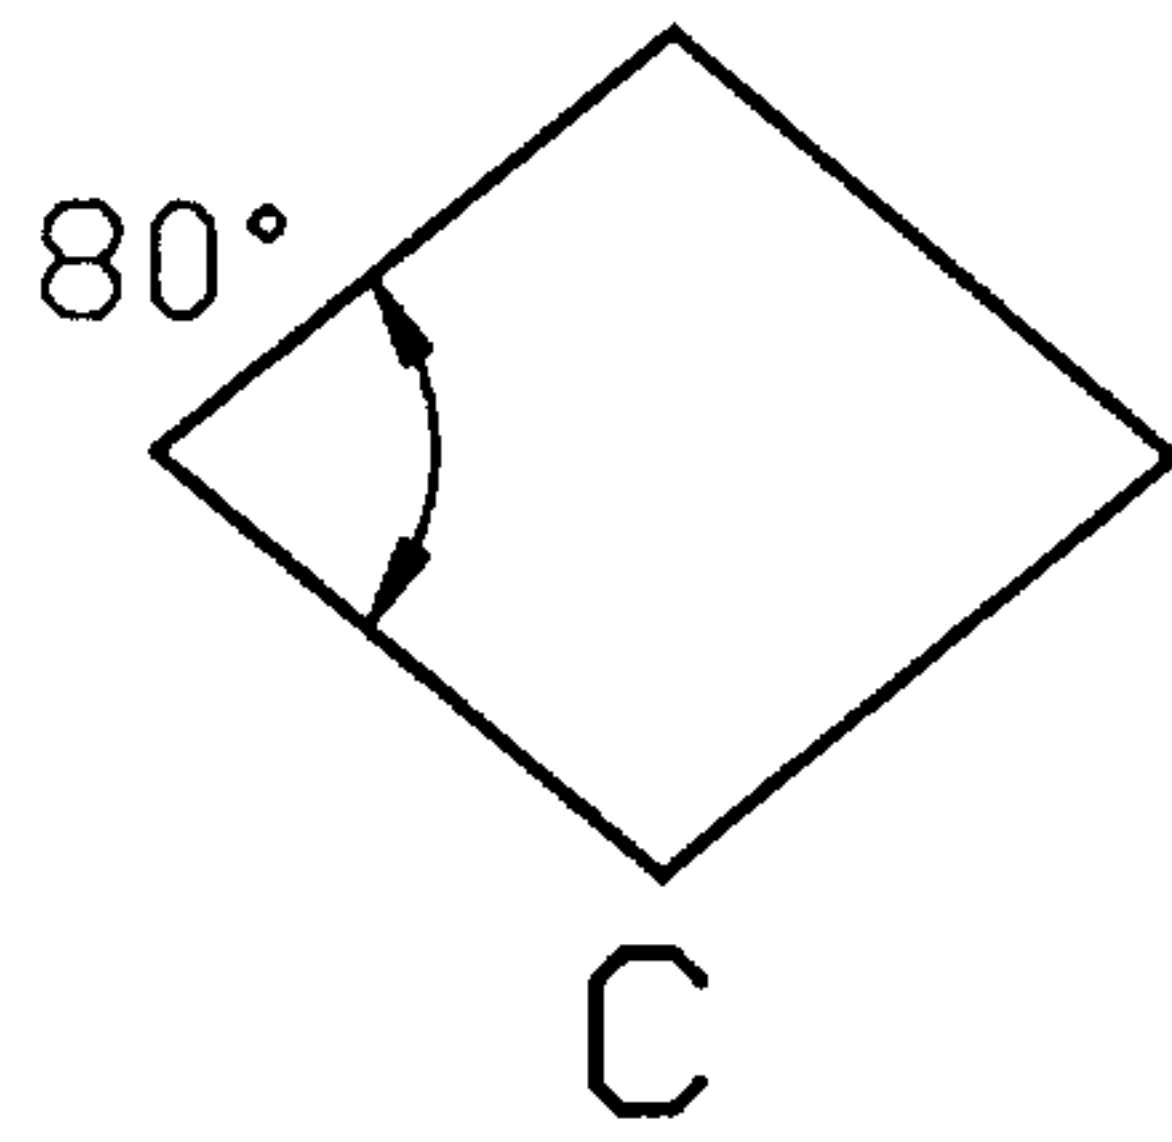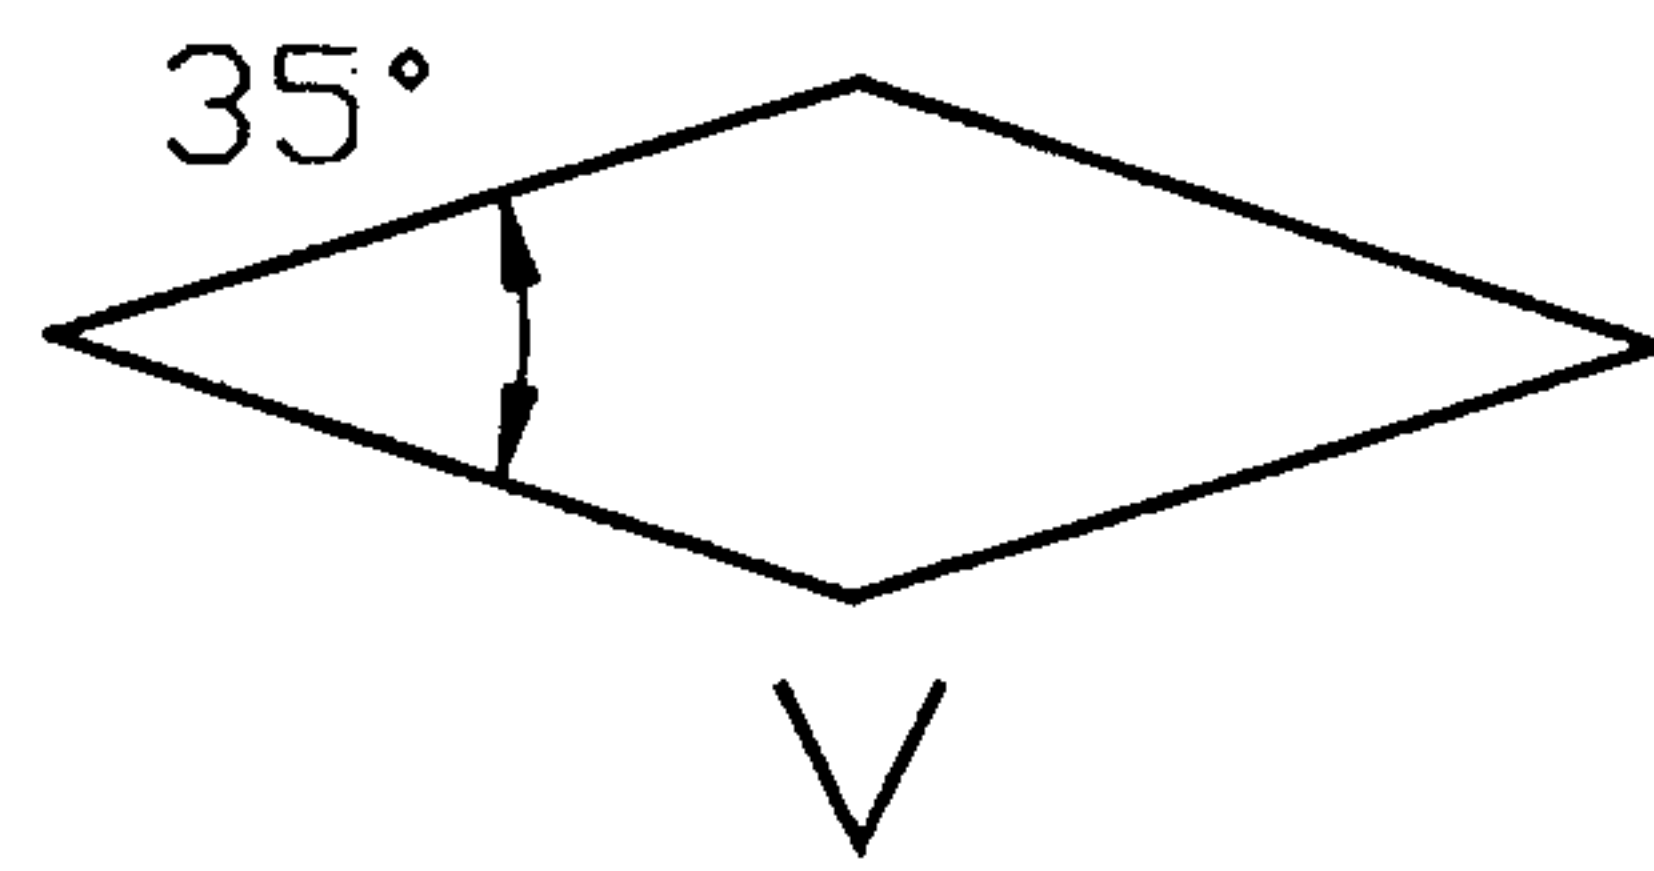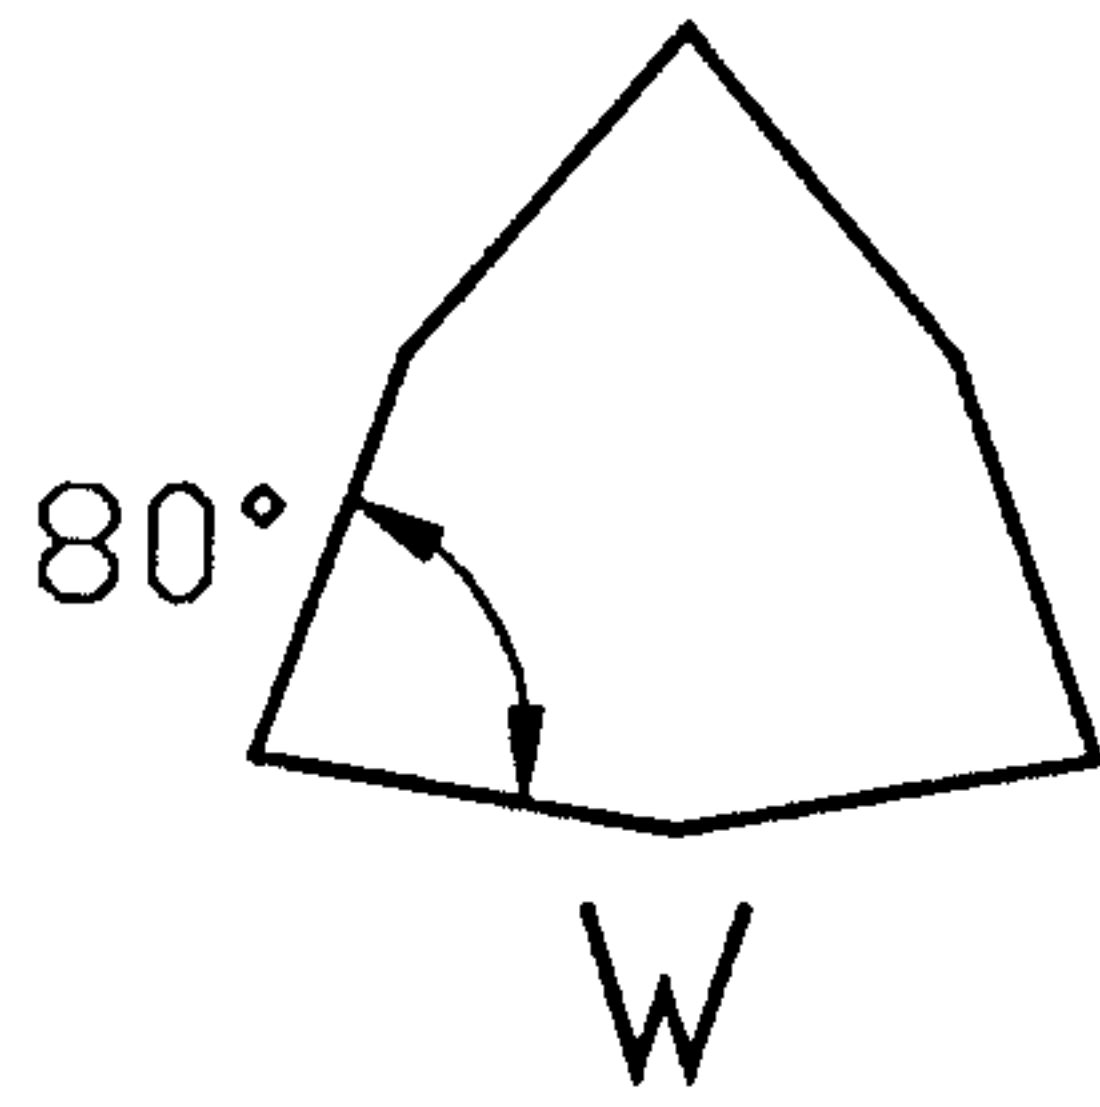

2/9

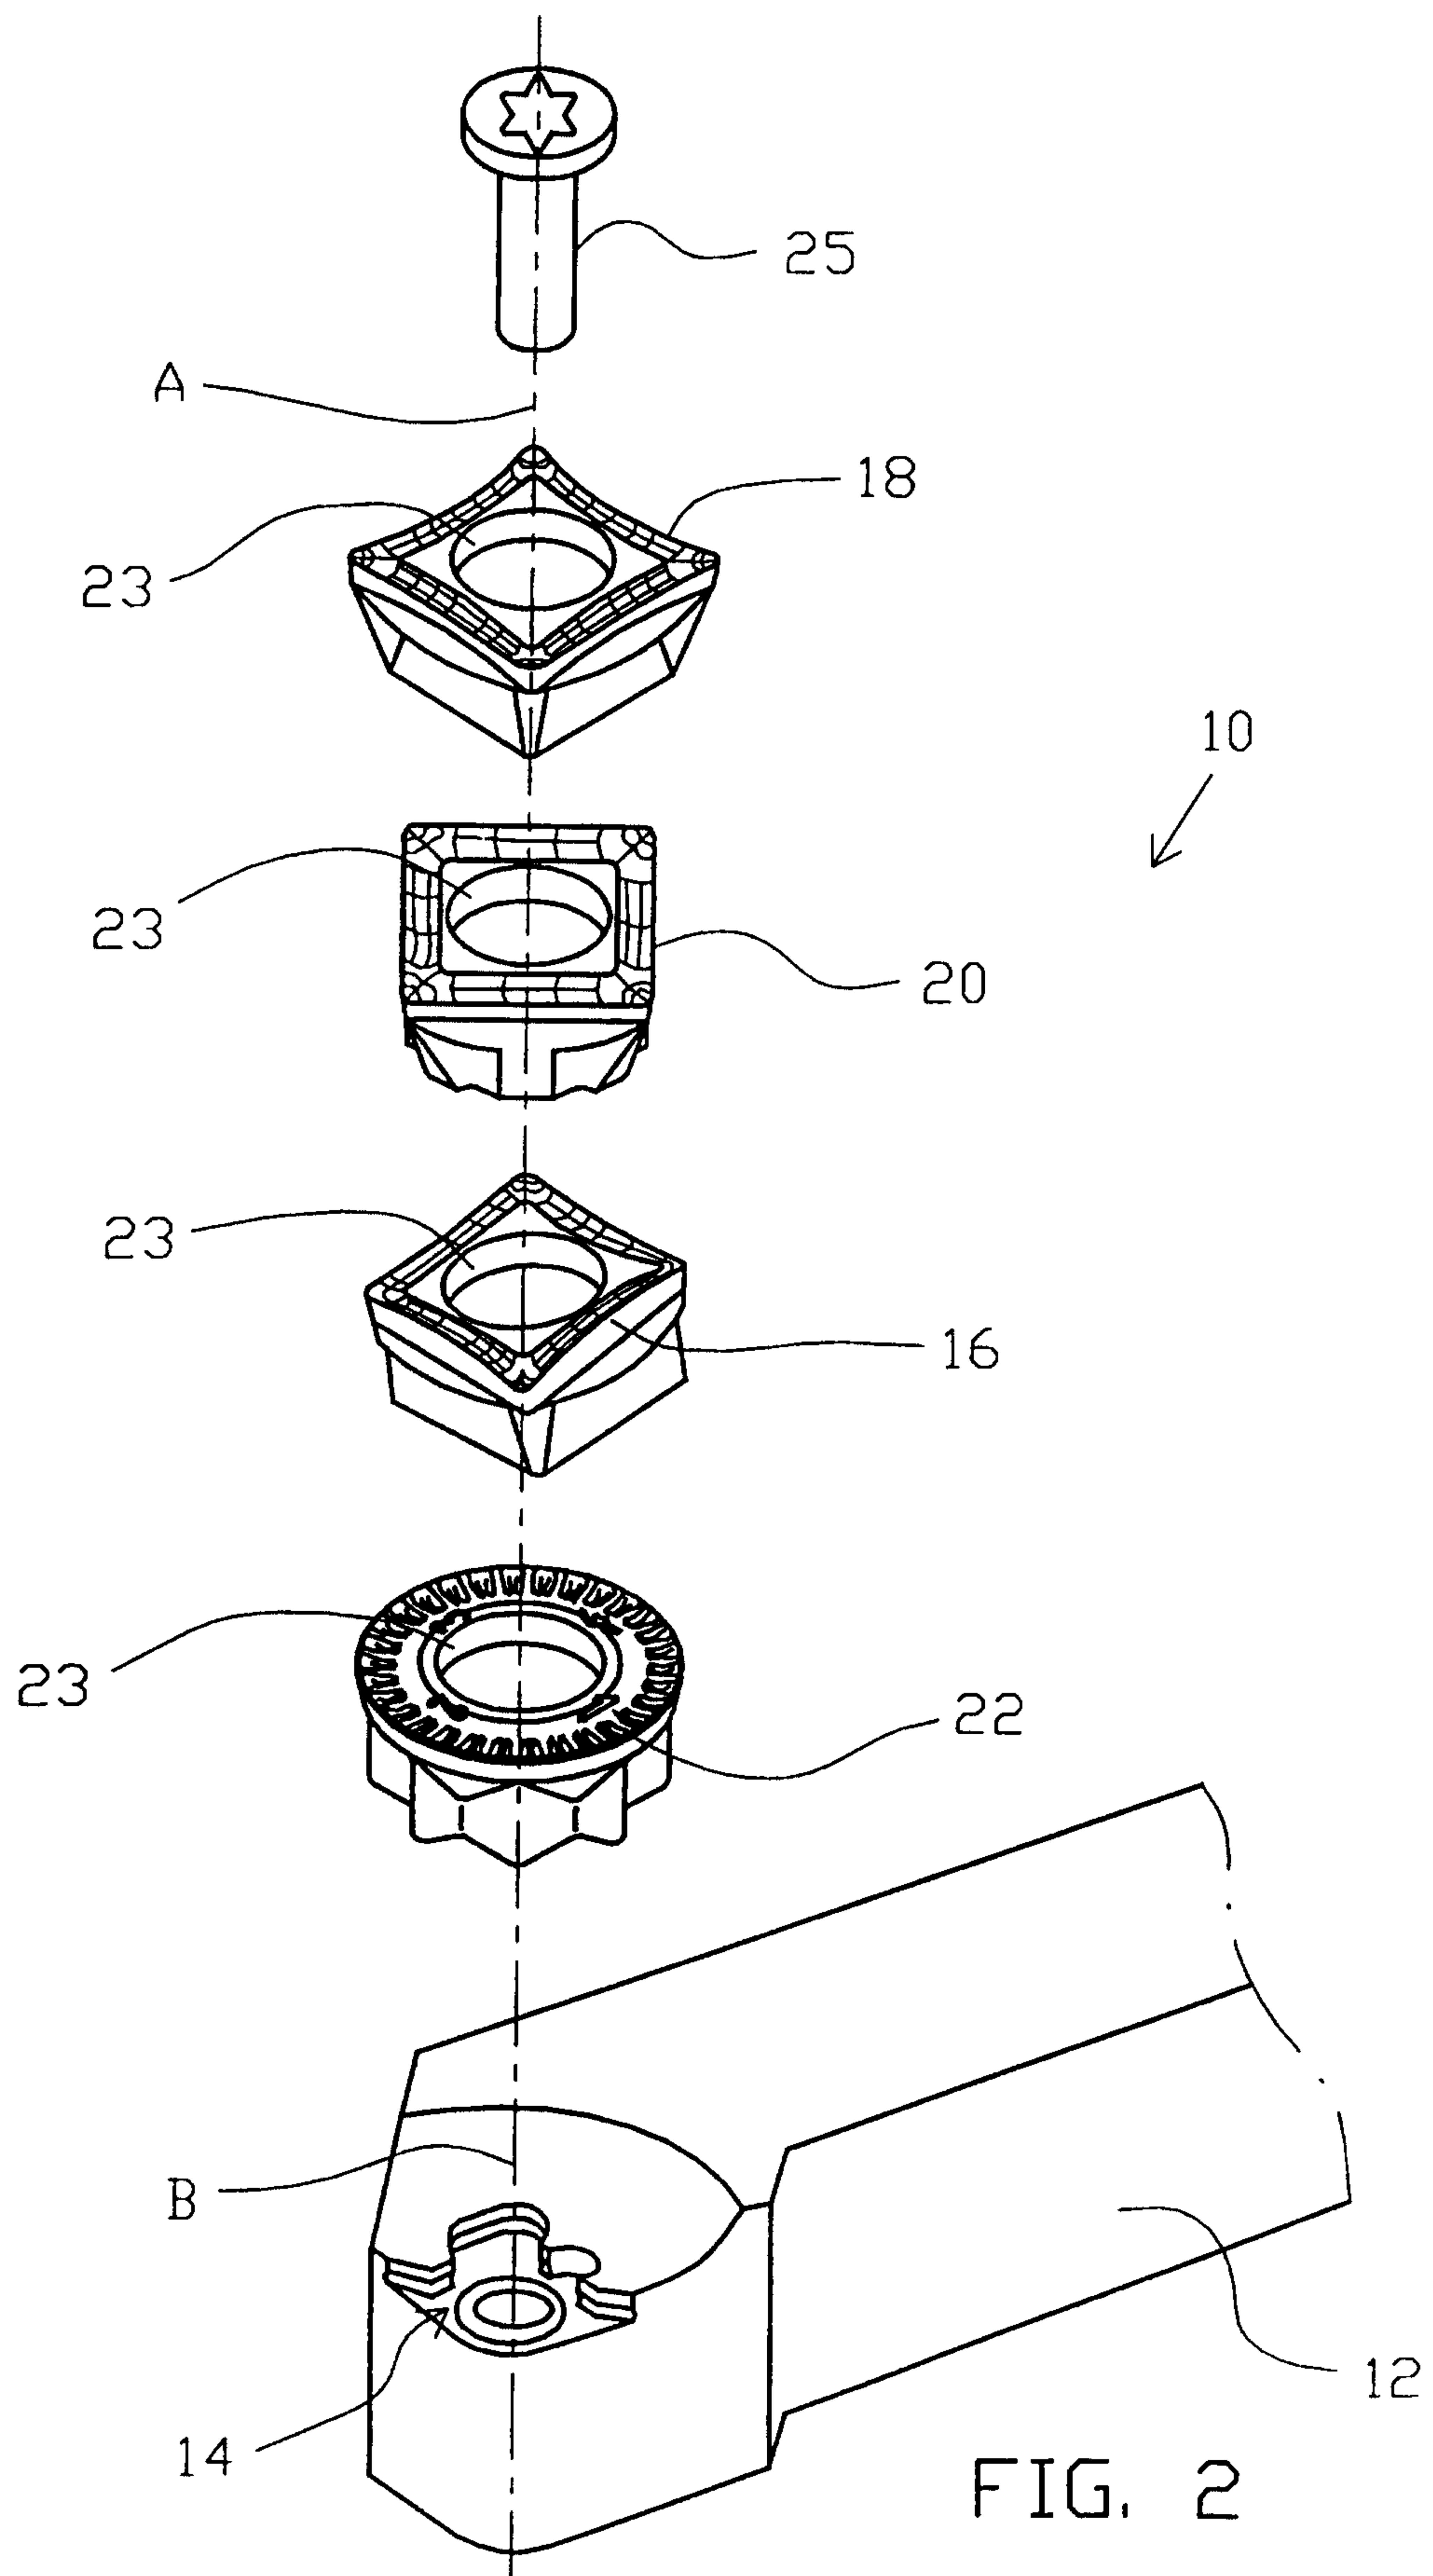


FIG. 2

3/9

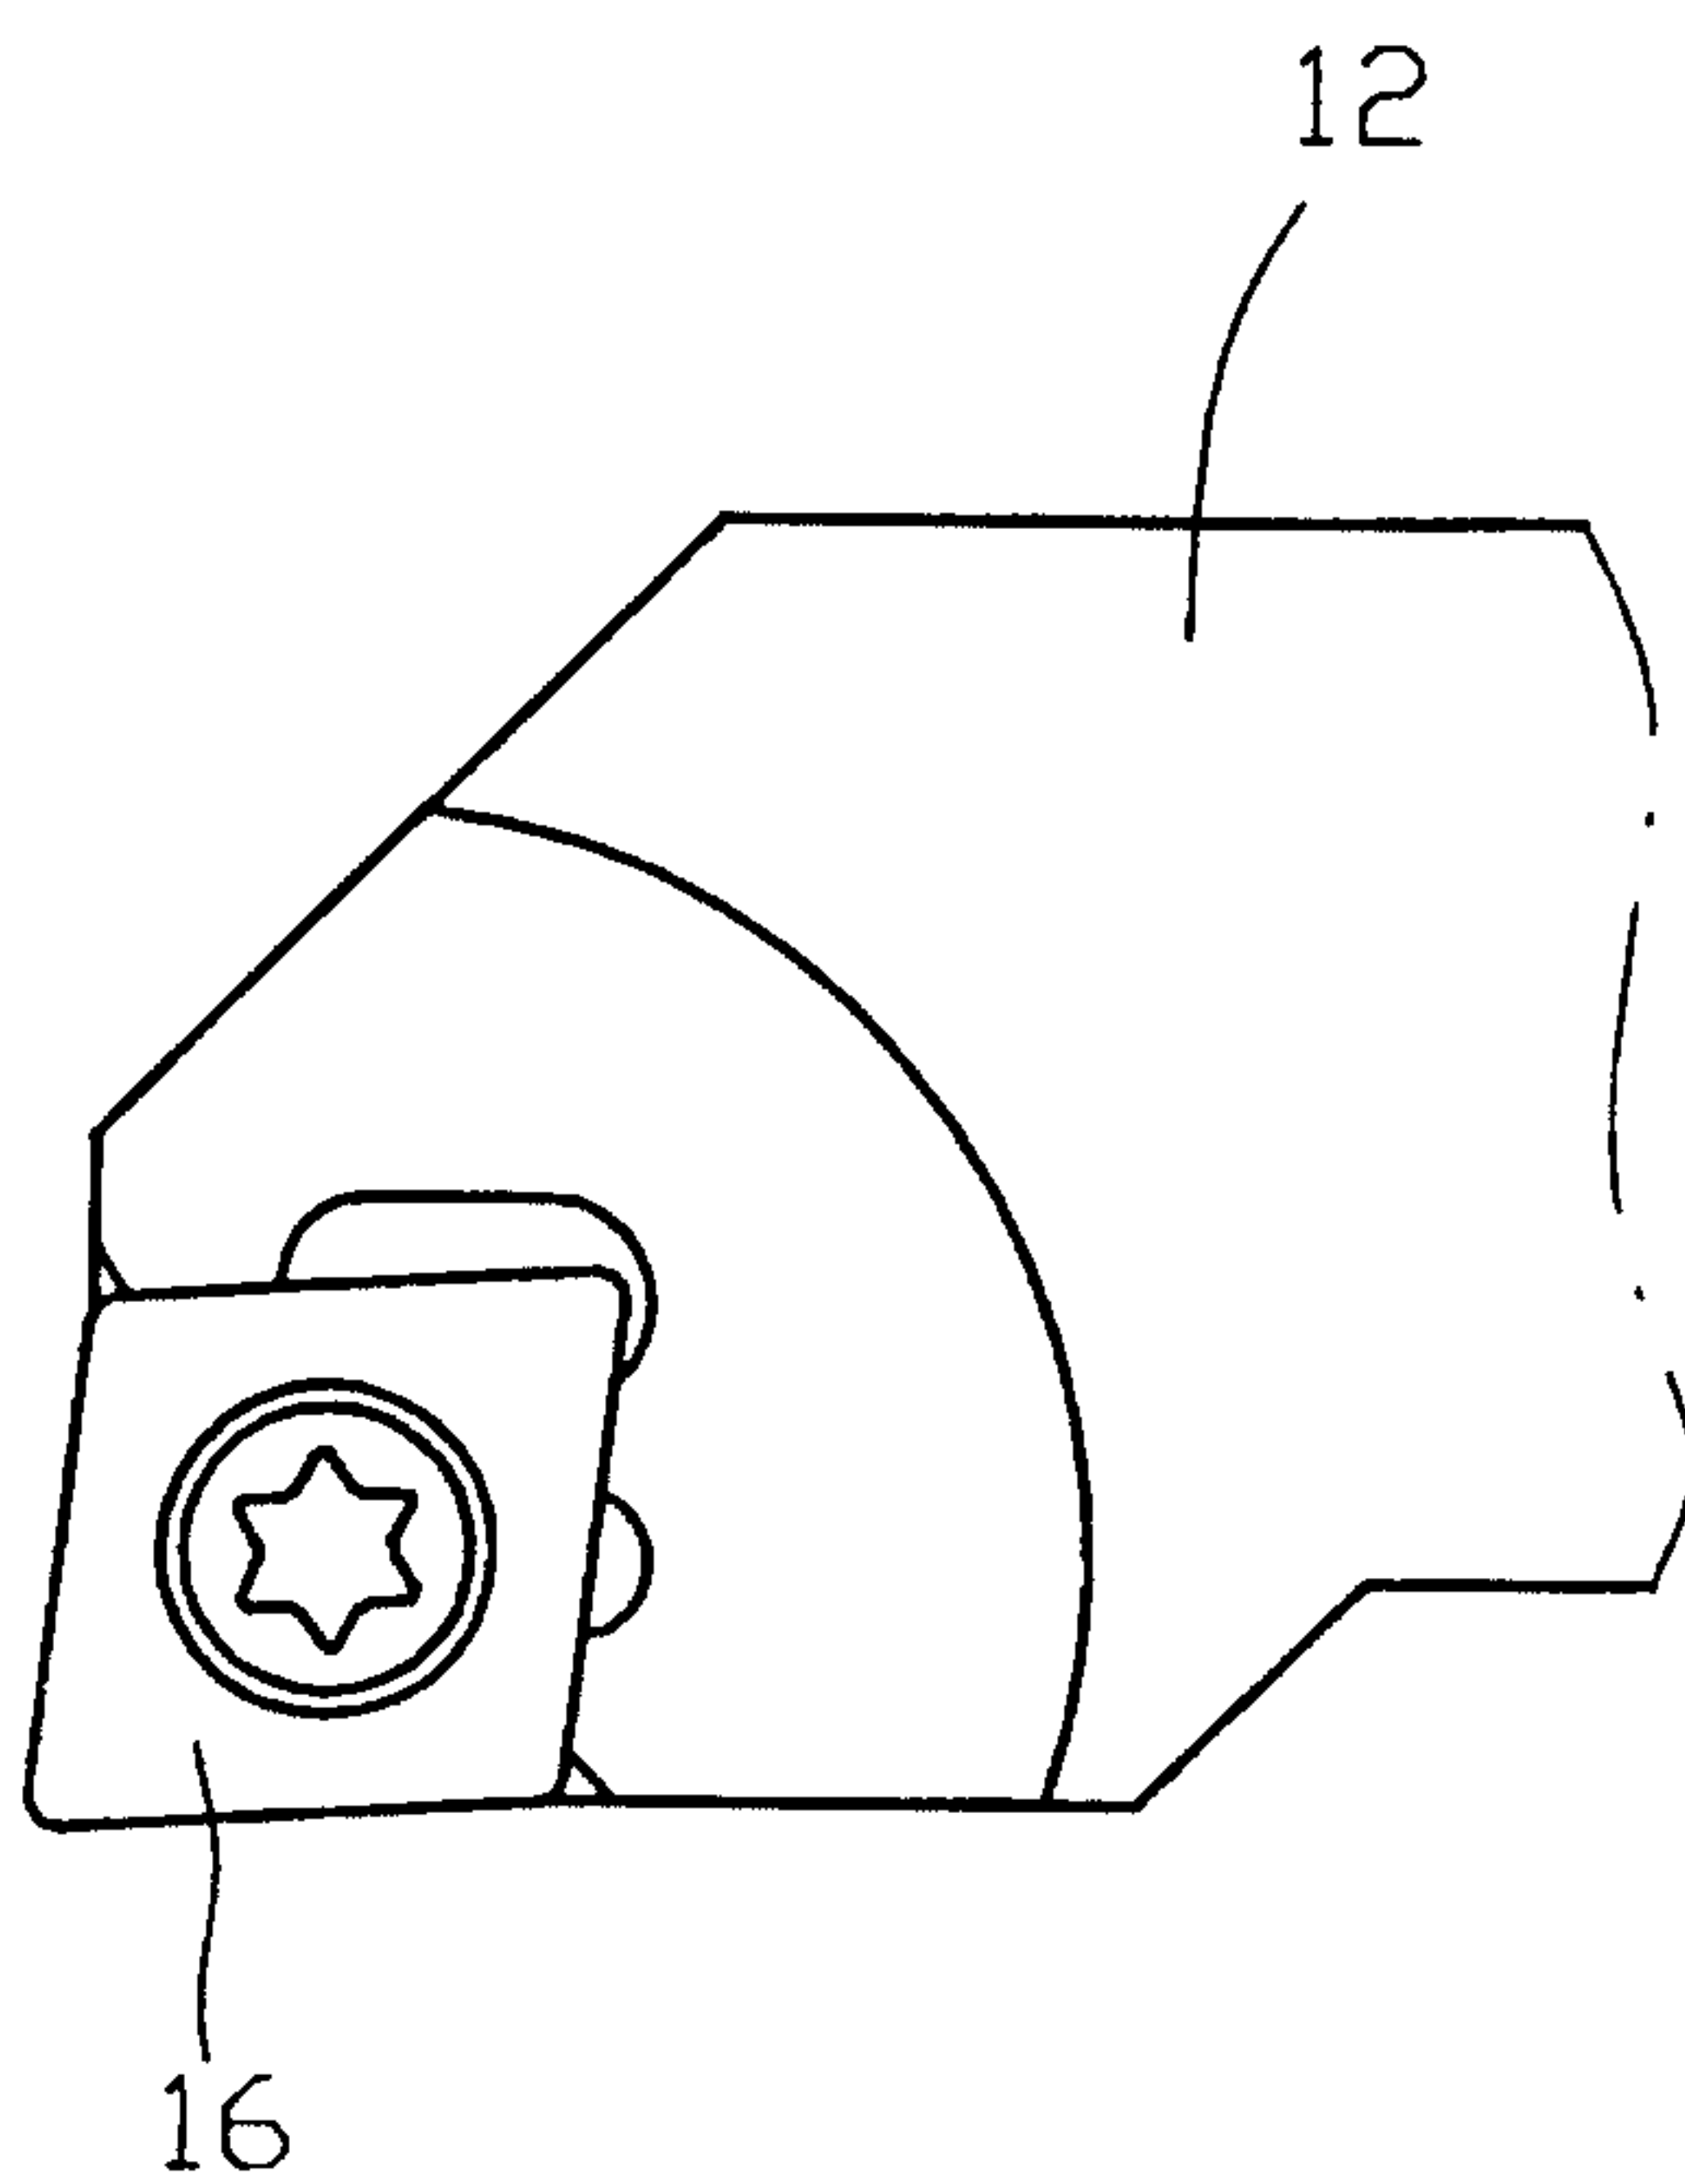


FIG. 3A

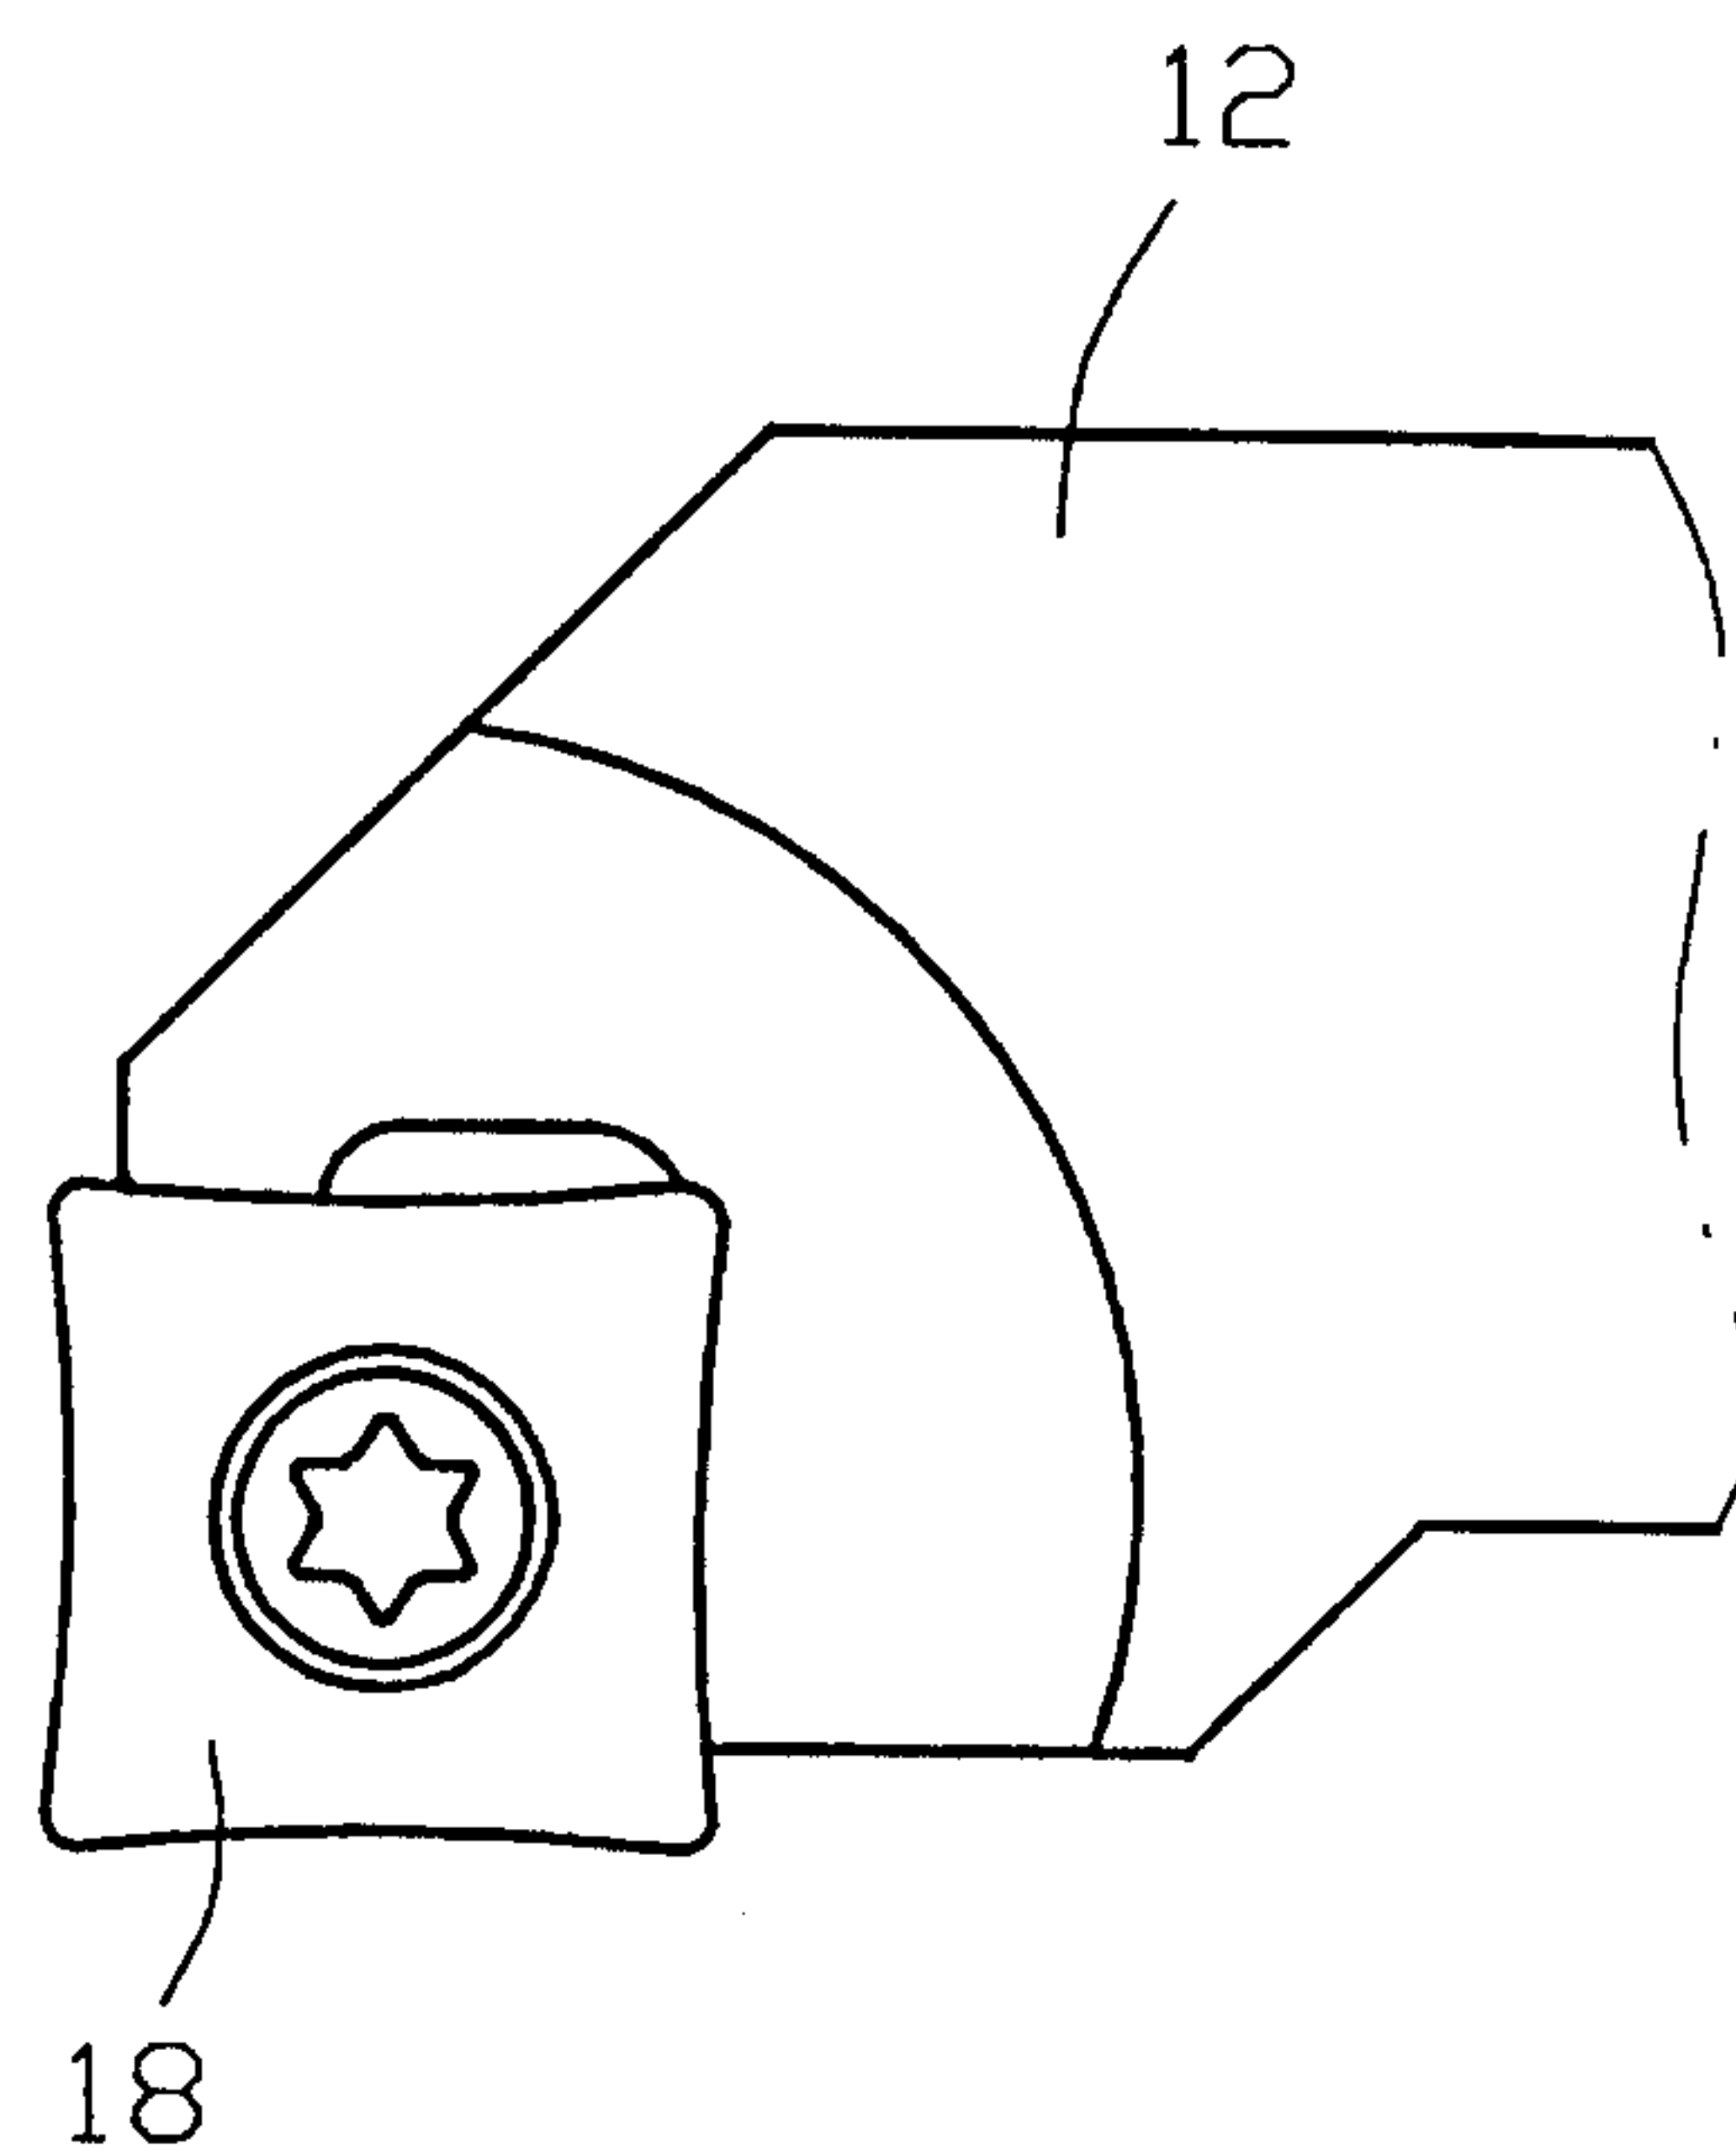


FIG. 3B

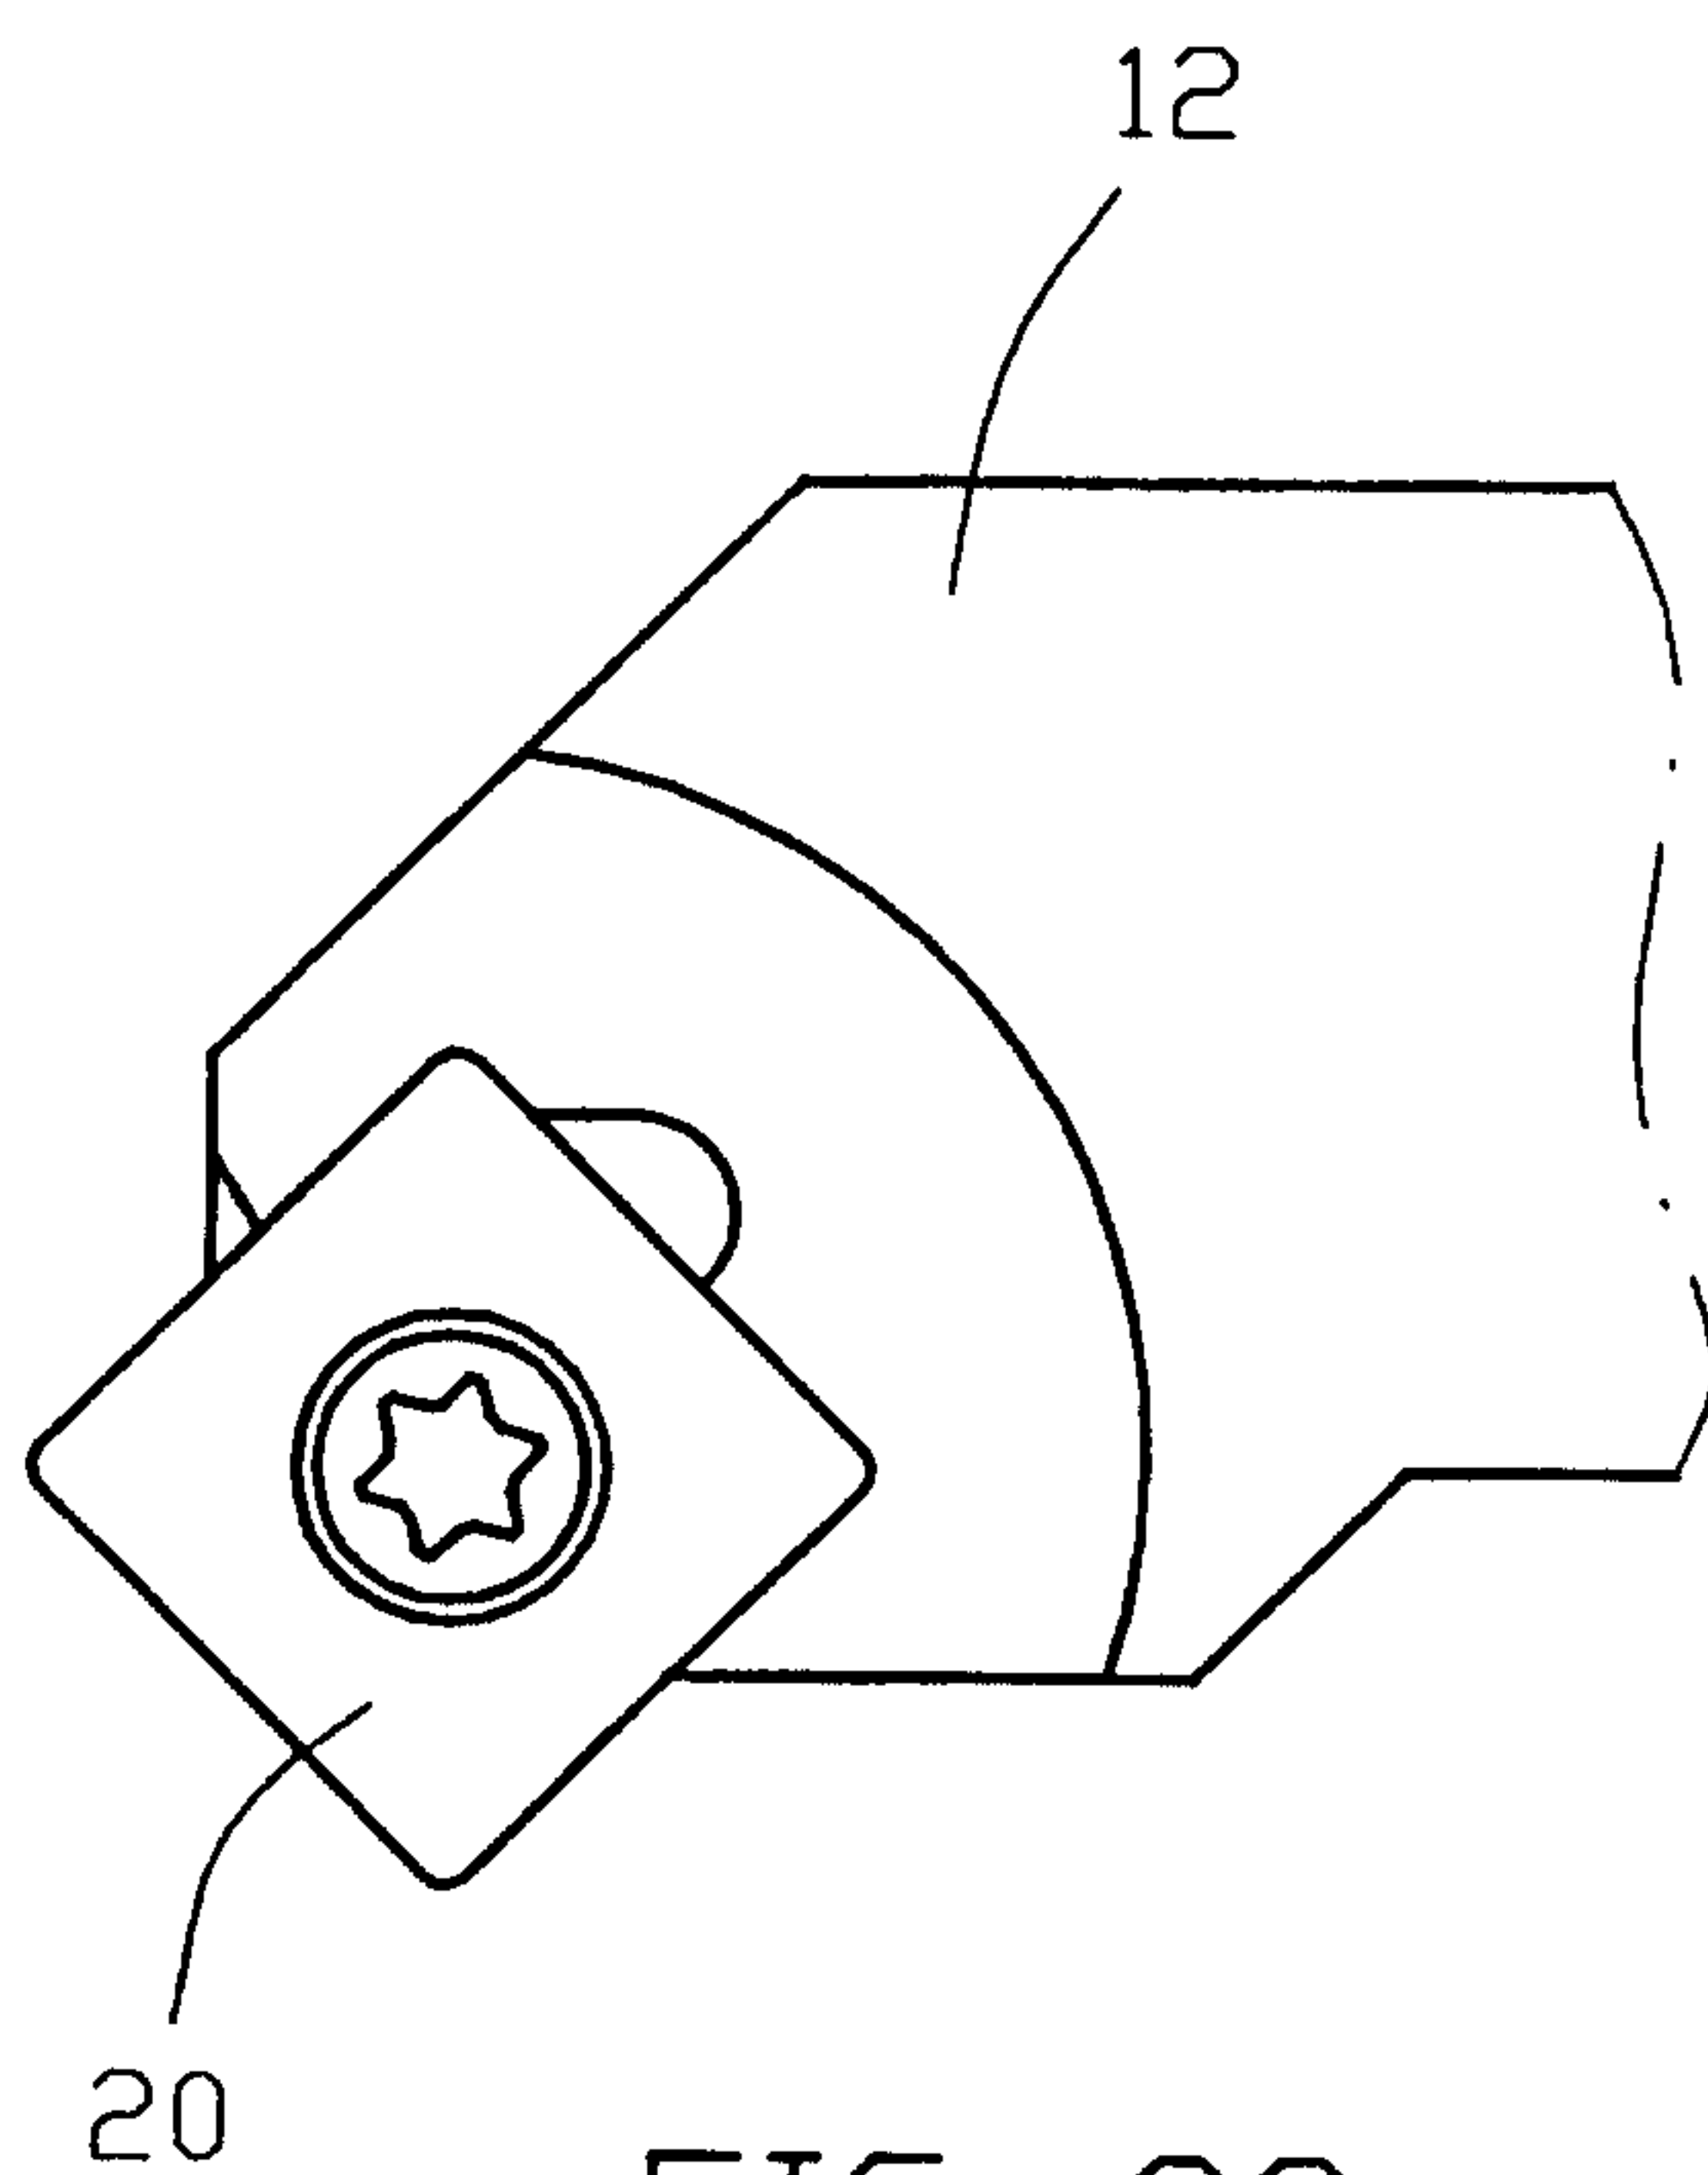


FIG. 3C

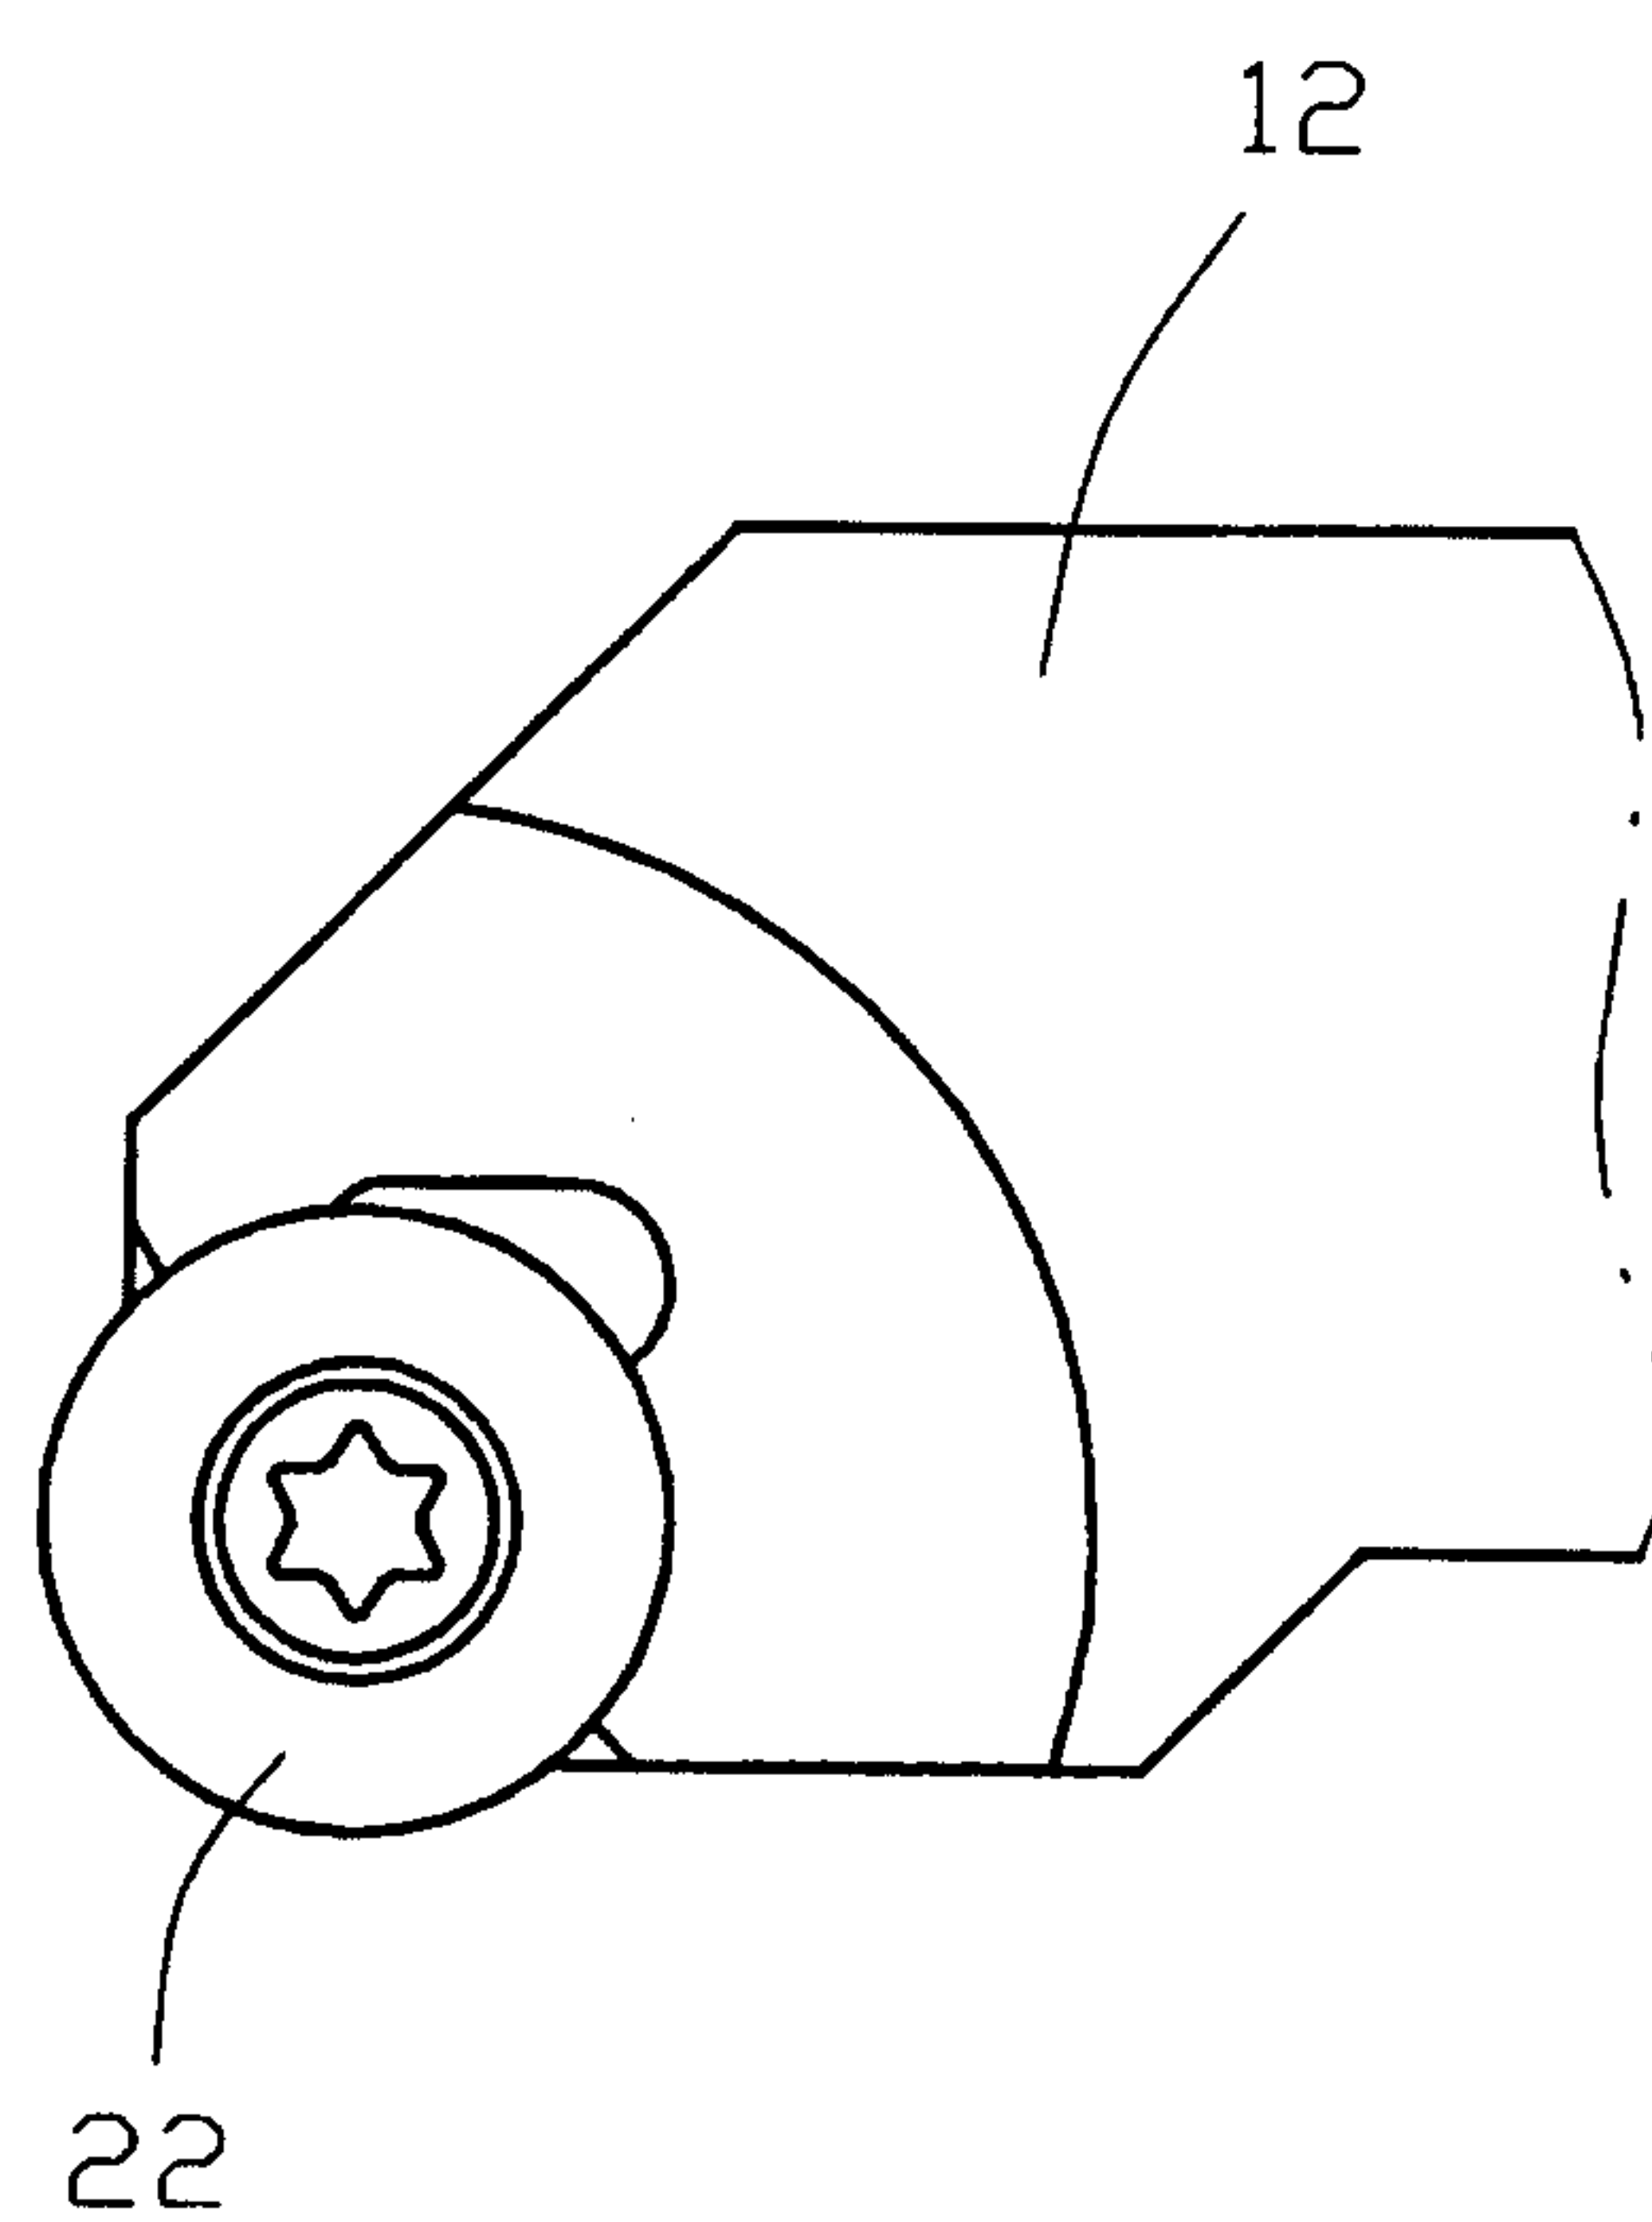


FIG. 3D

4/9

FIG. 4A

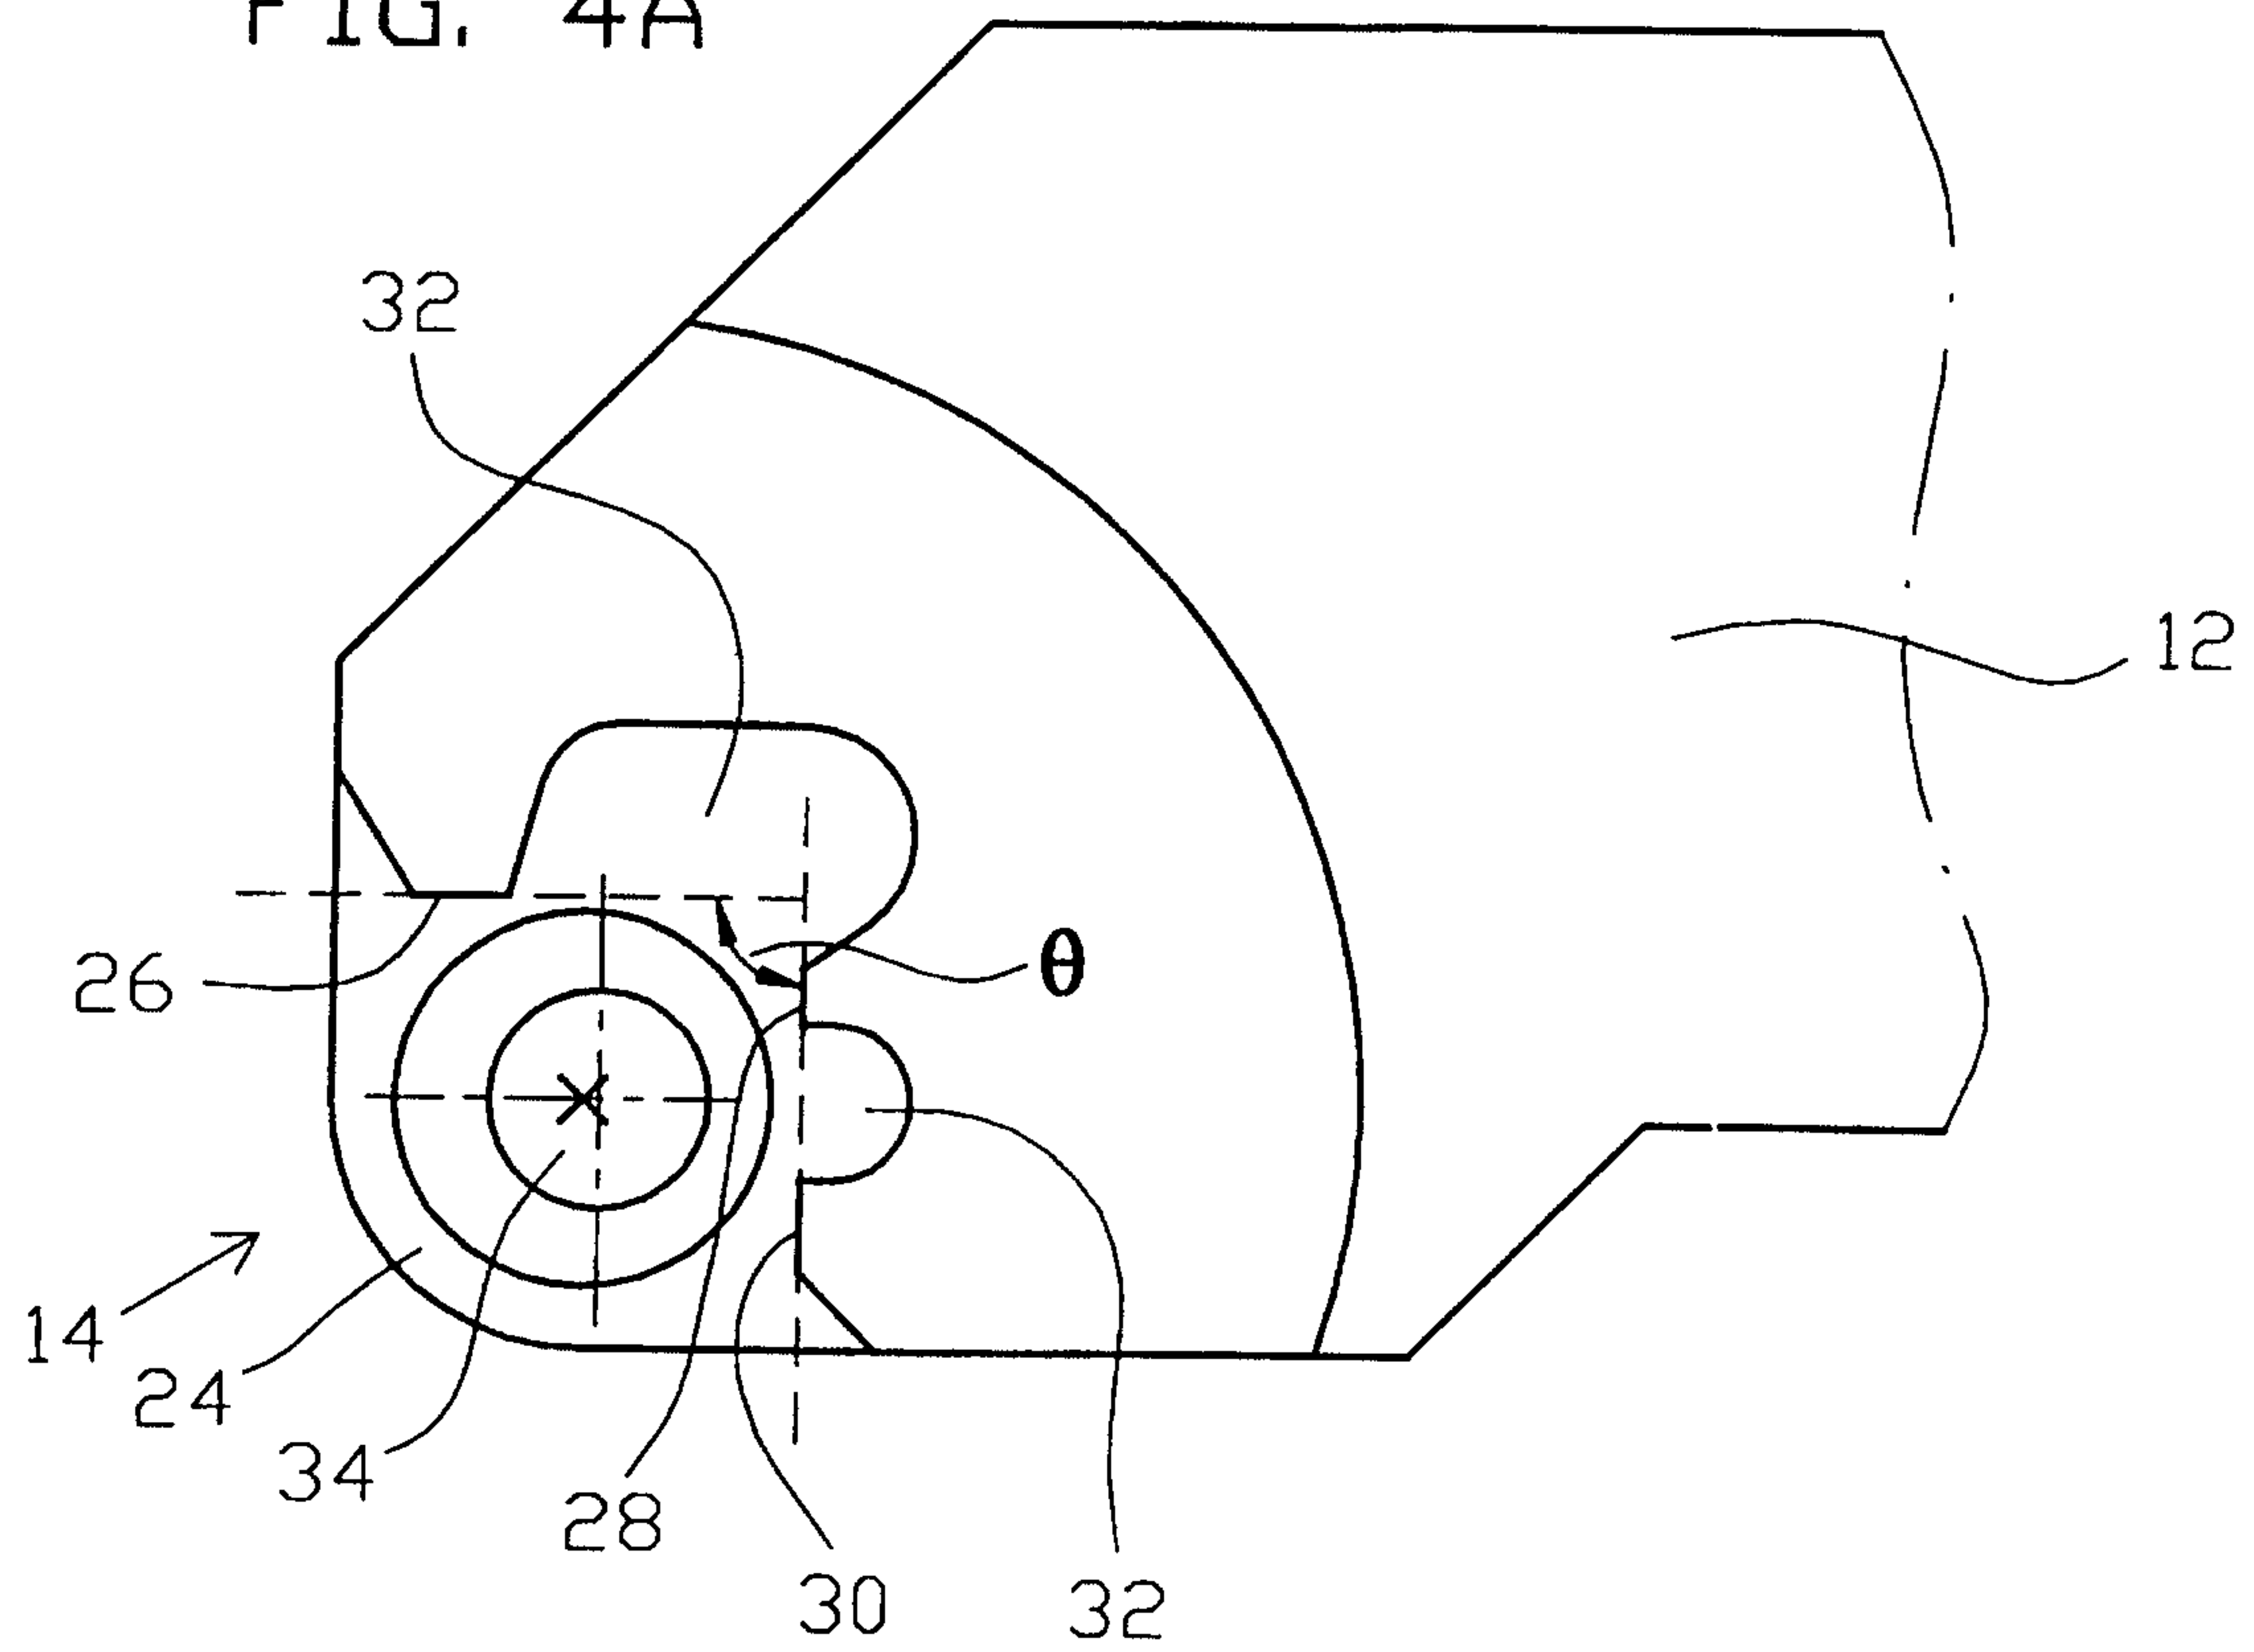


FIG. 4B

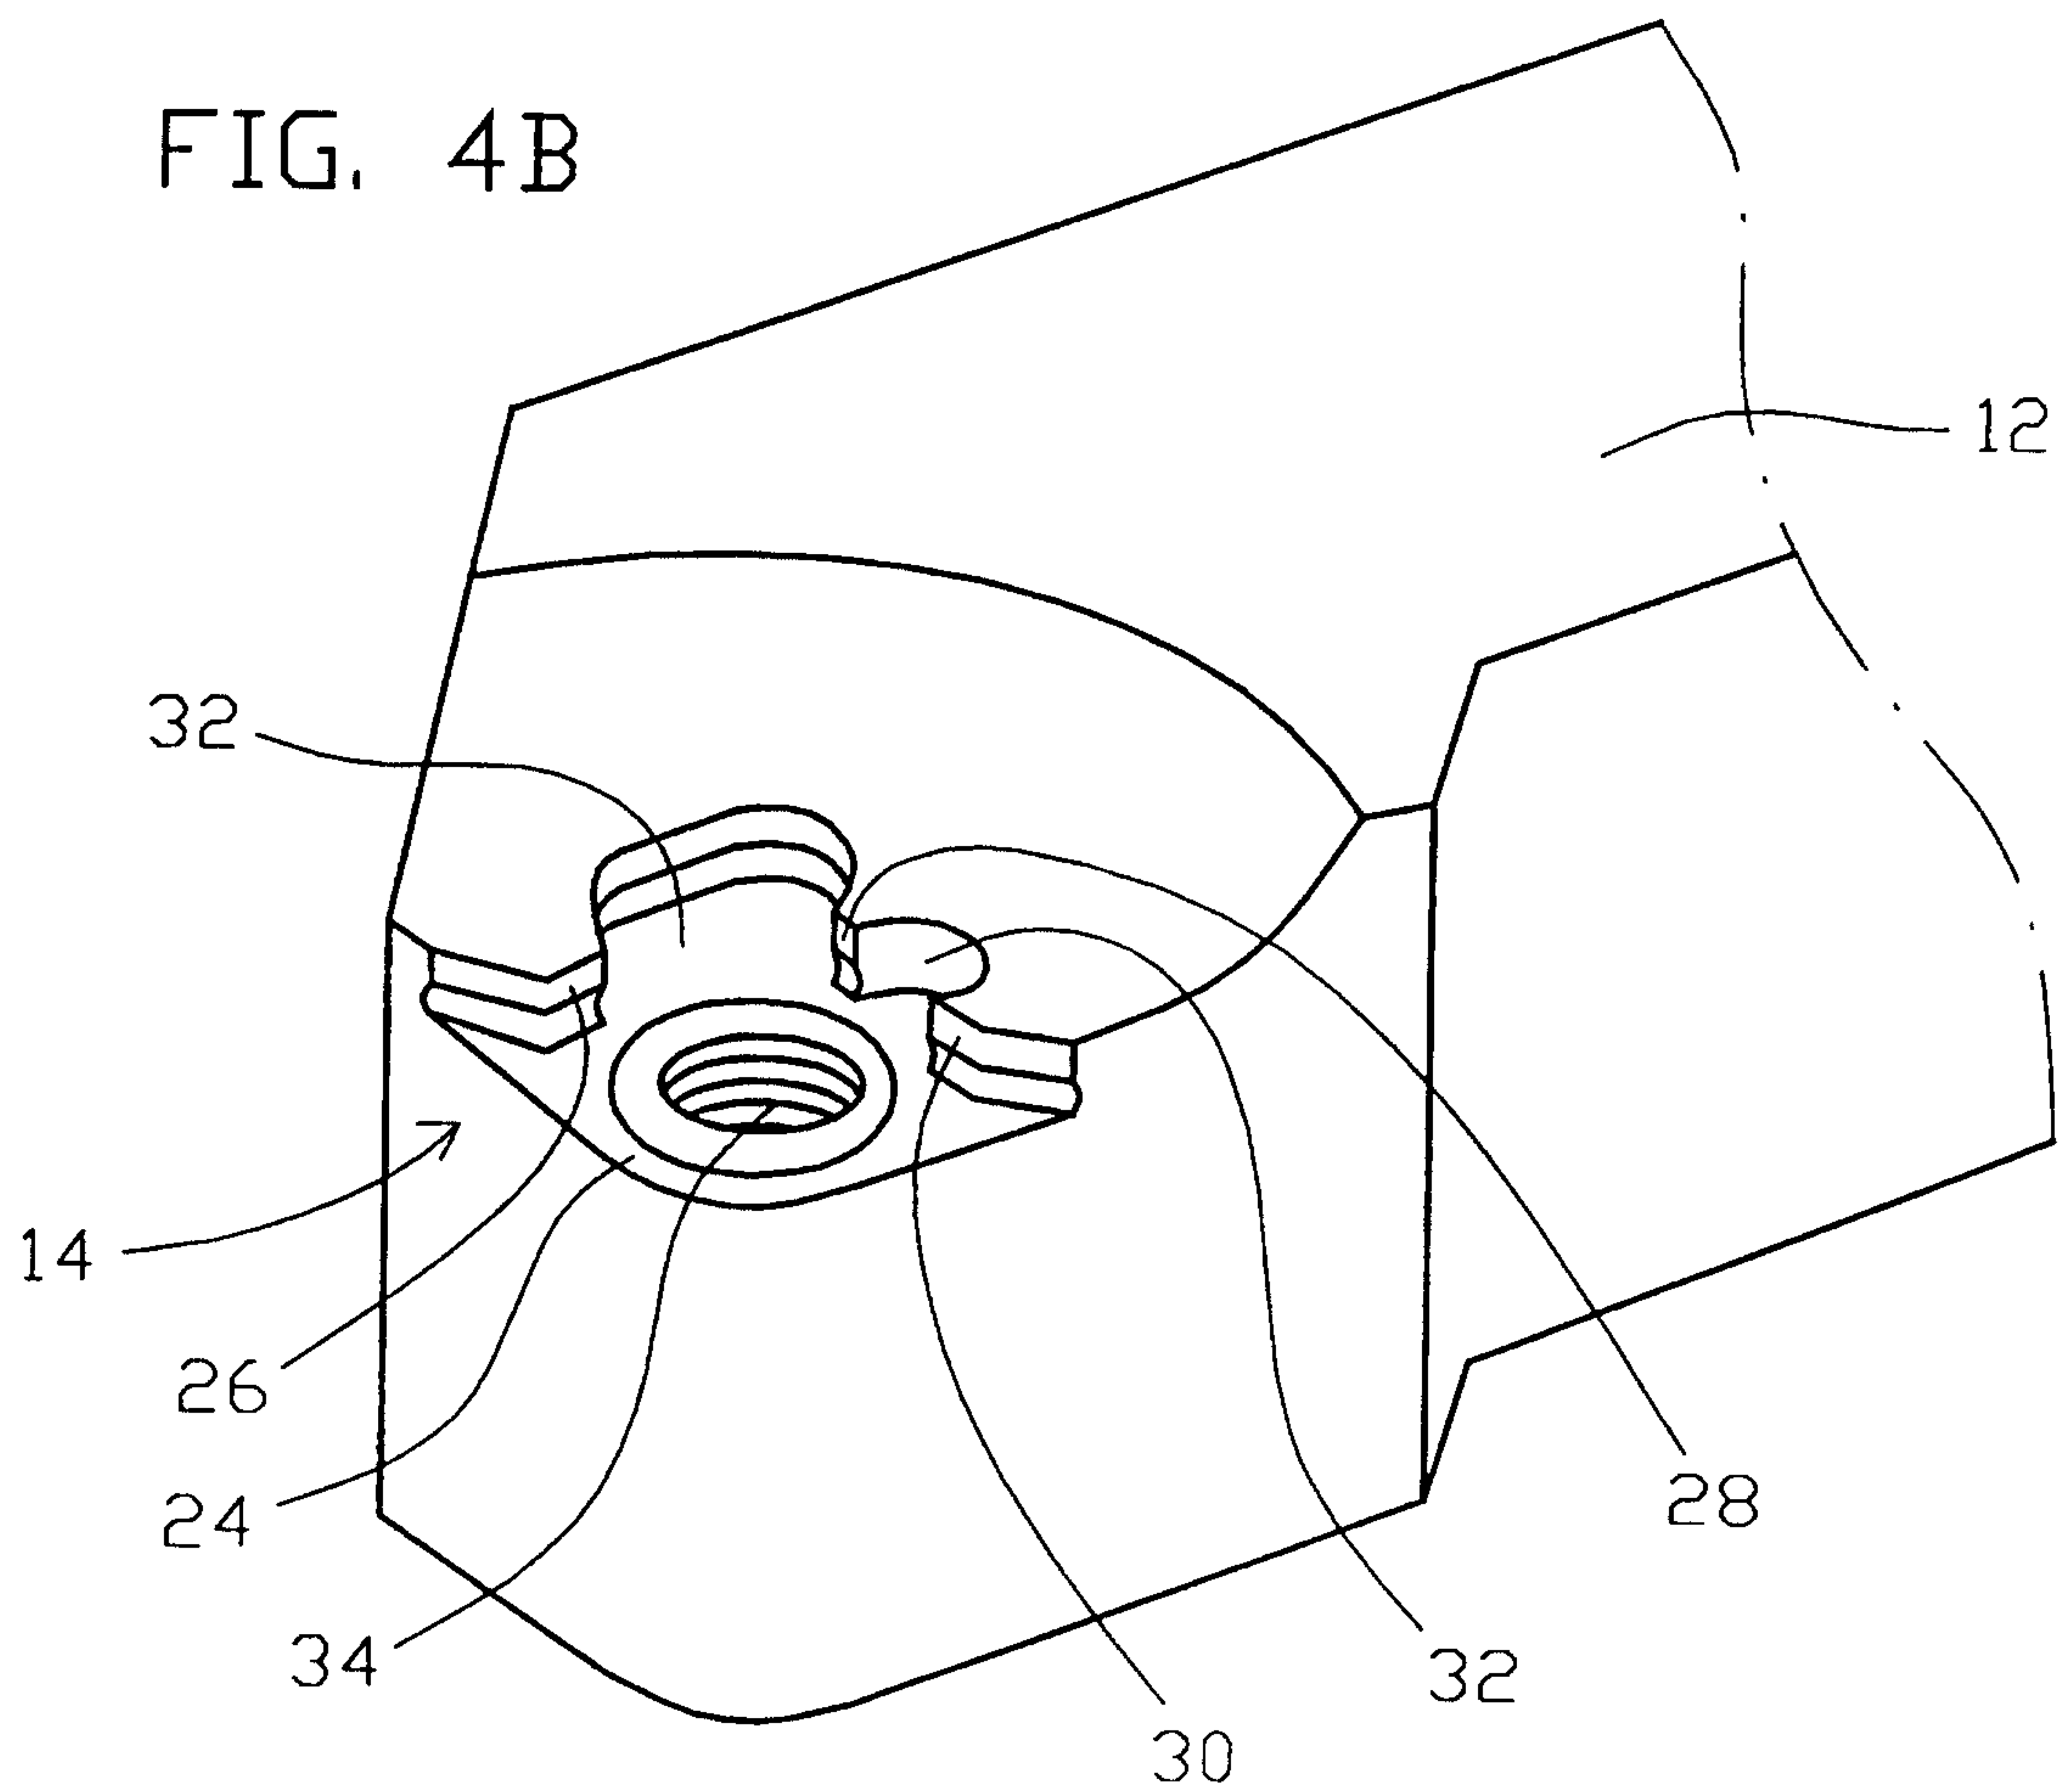


FIG. 5A

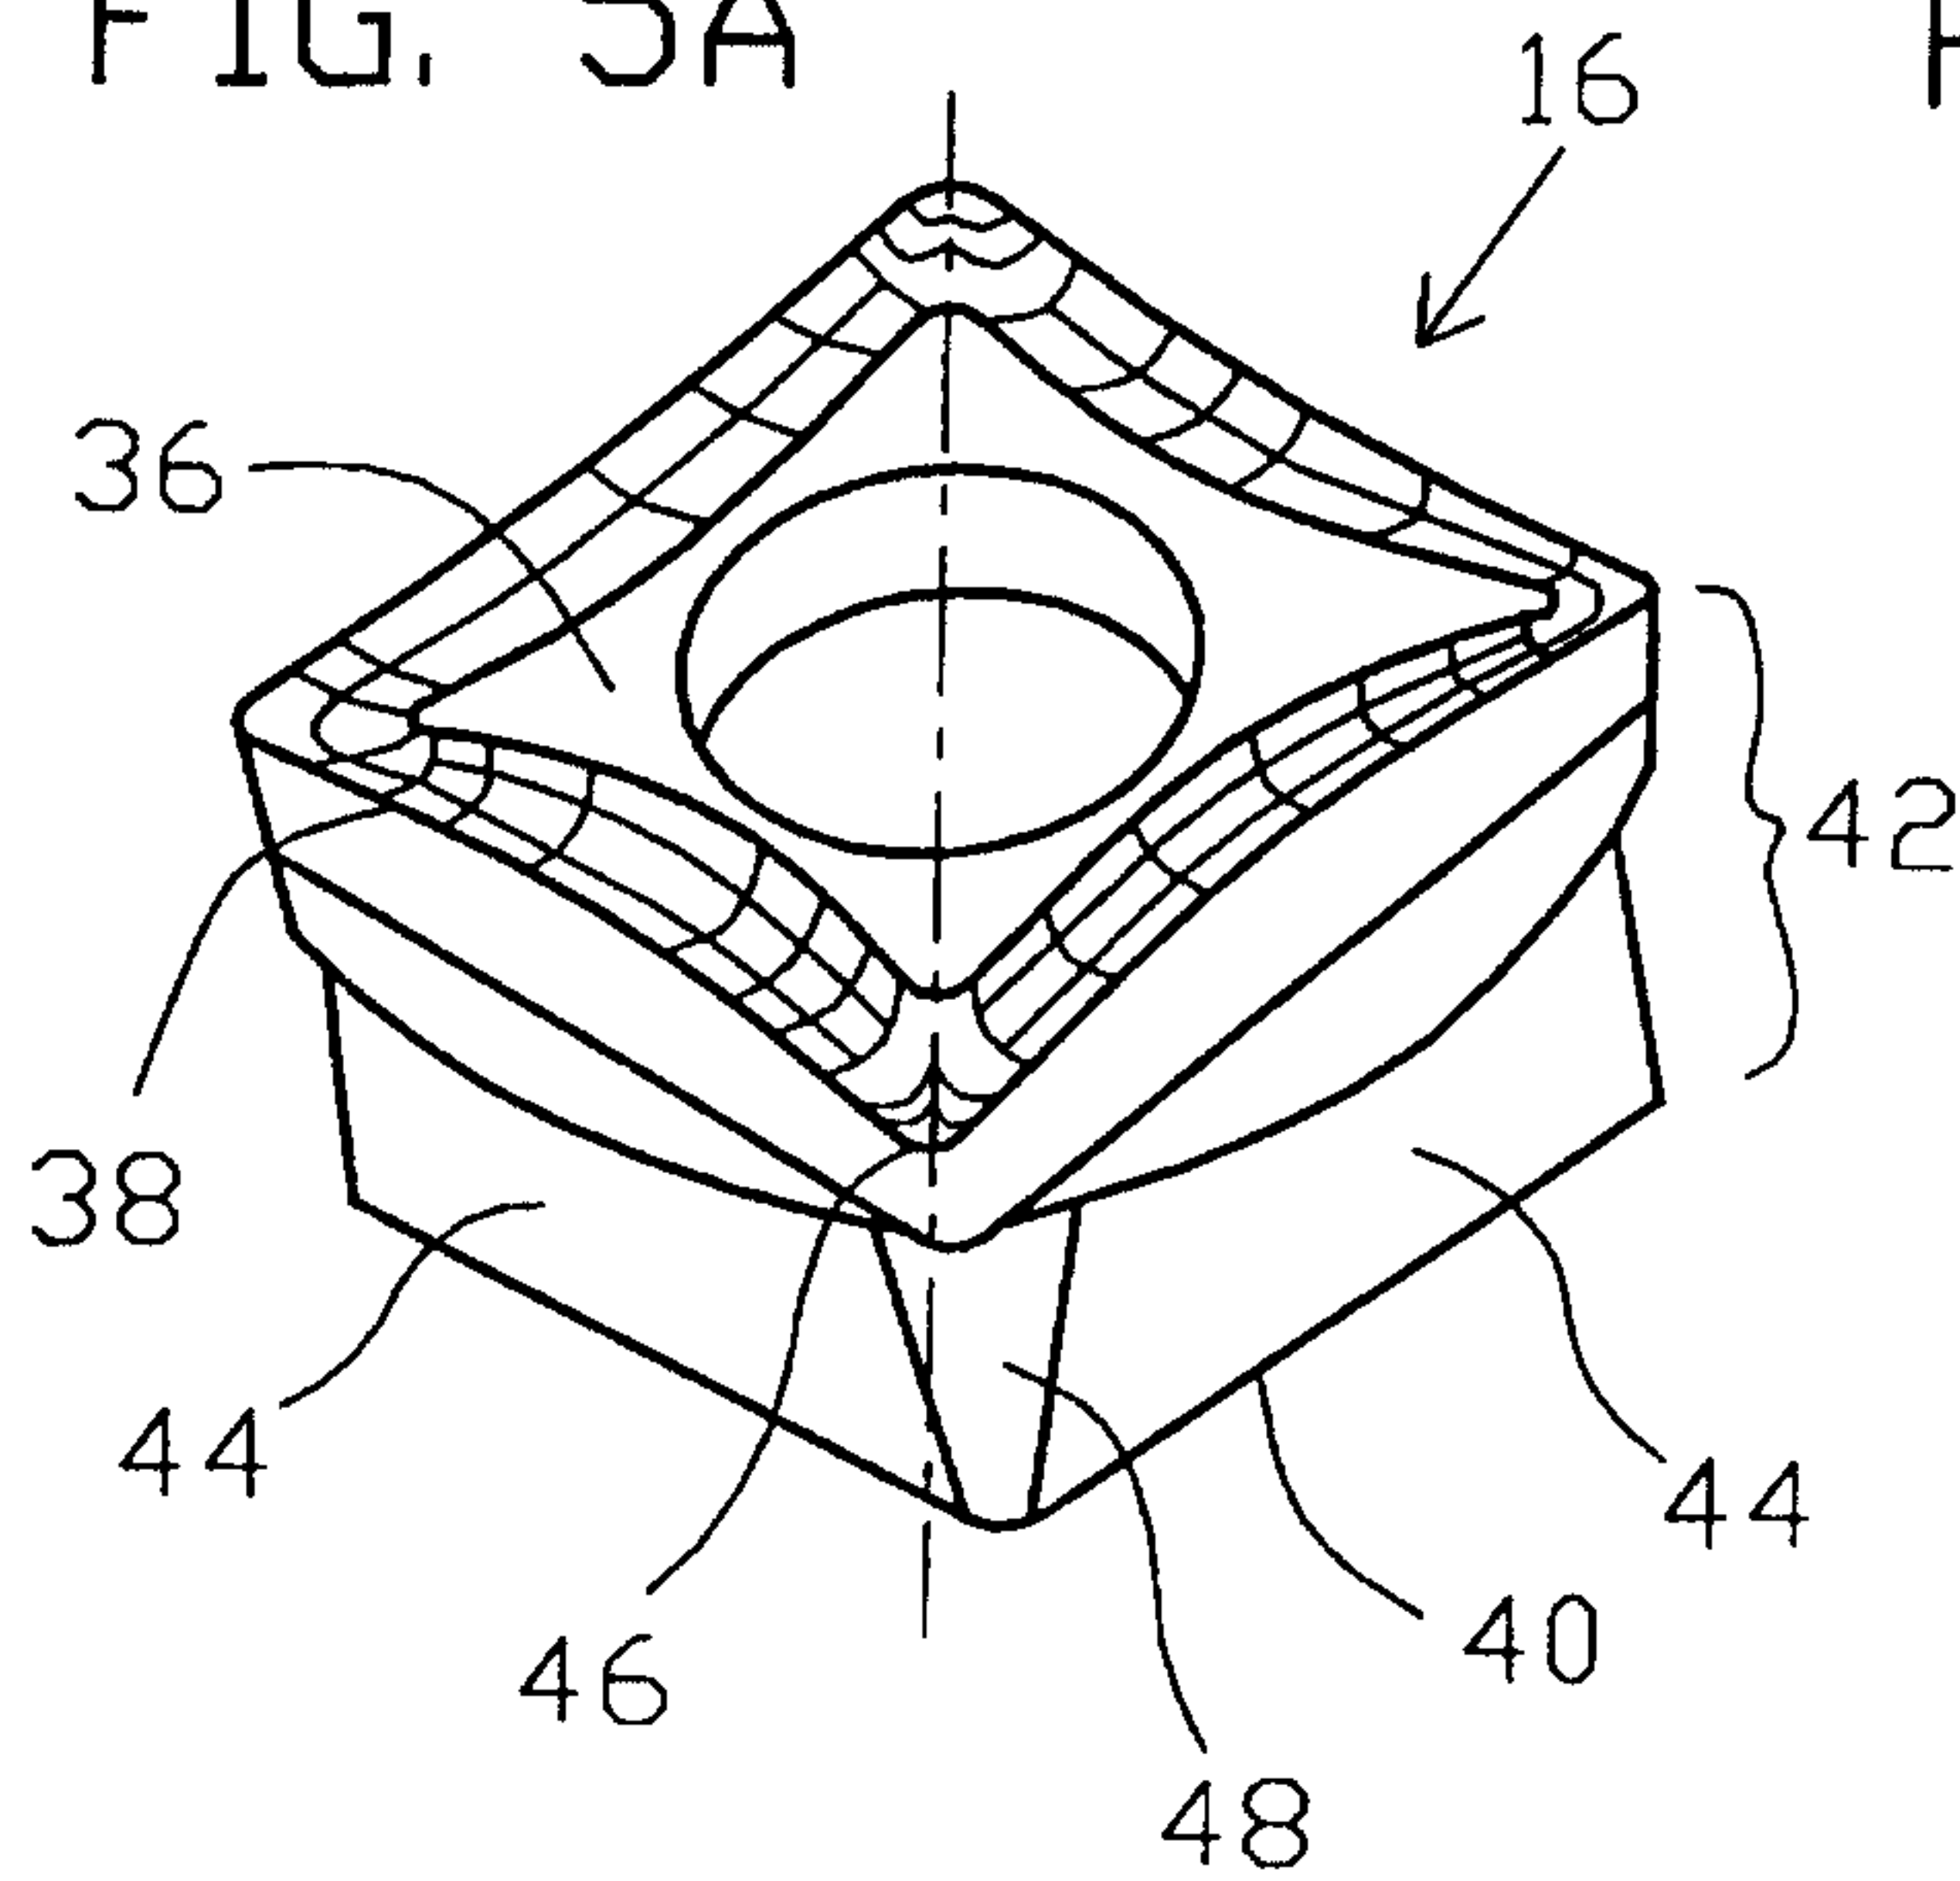


FIG. 5B

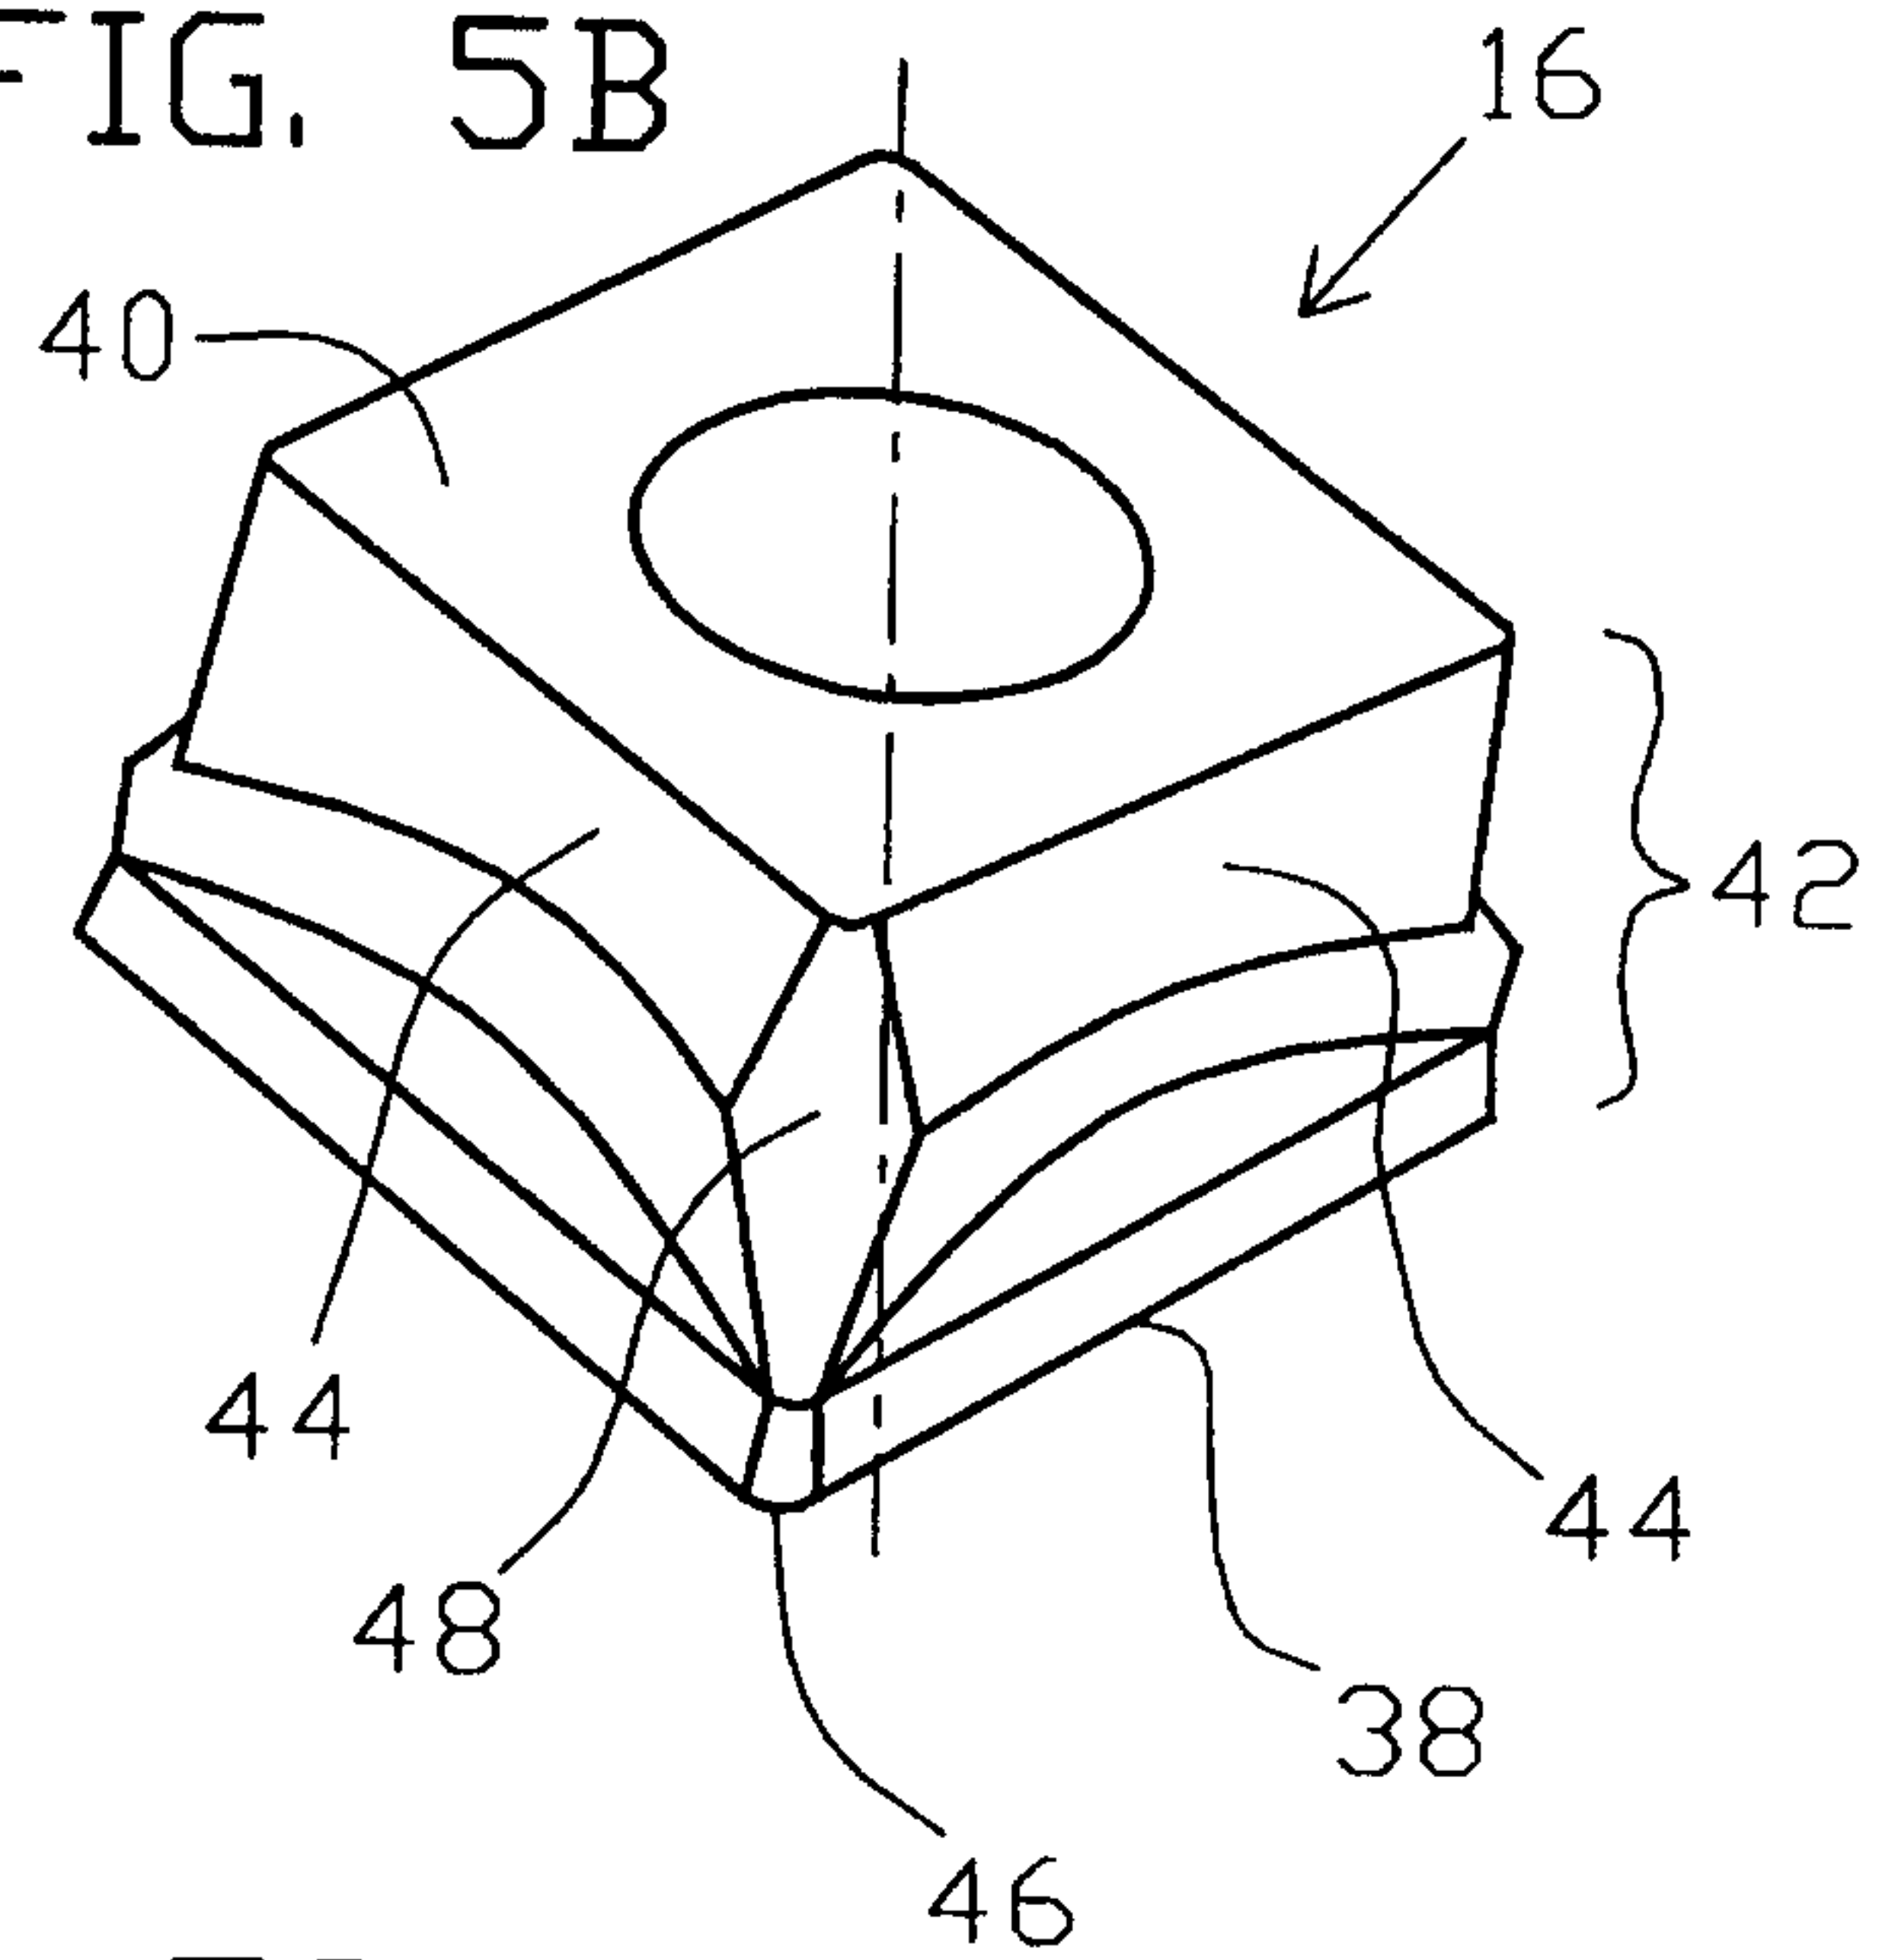


FIG. 5C

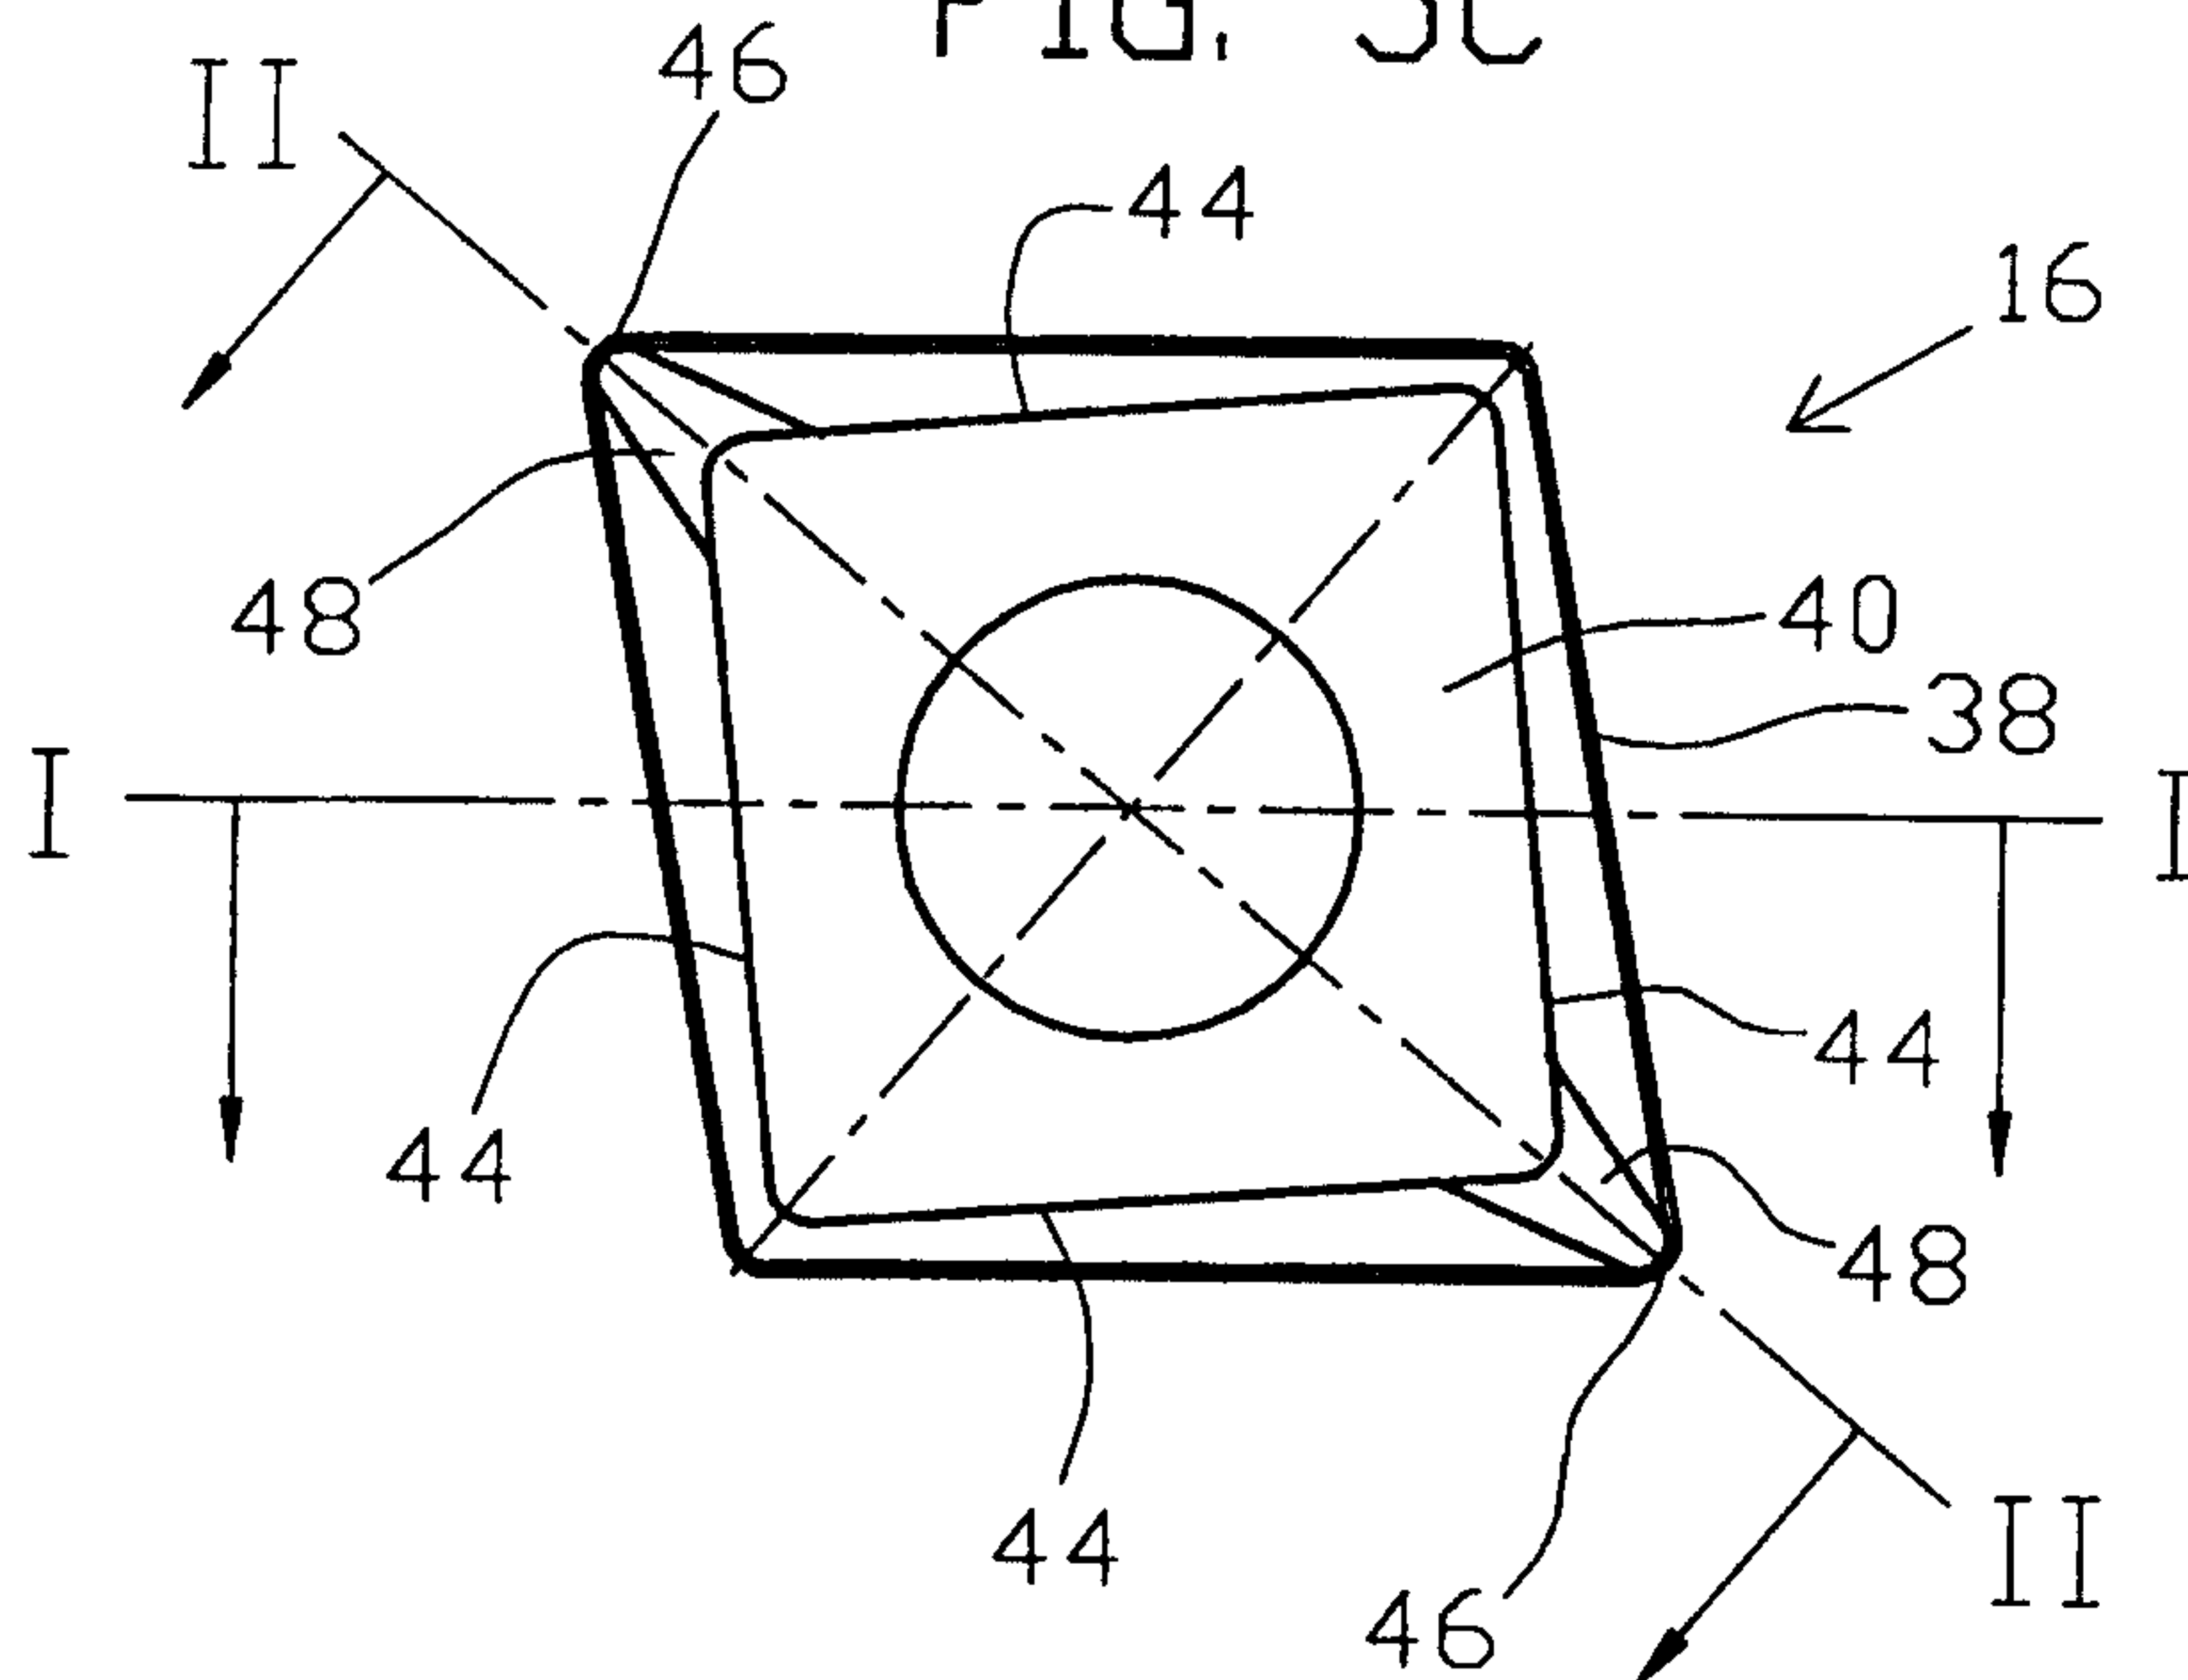


FIG. 5D

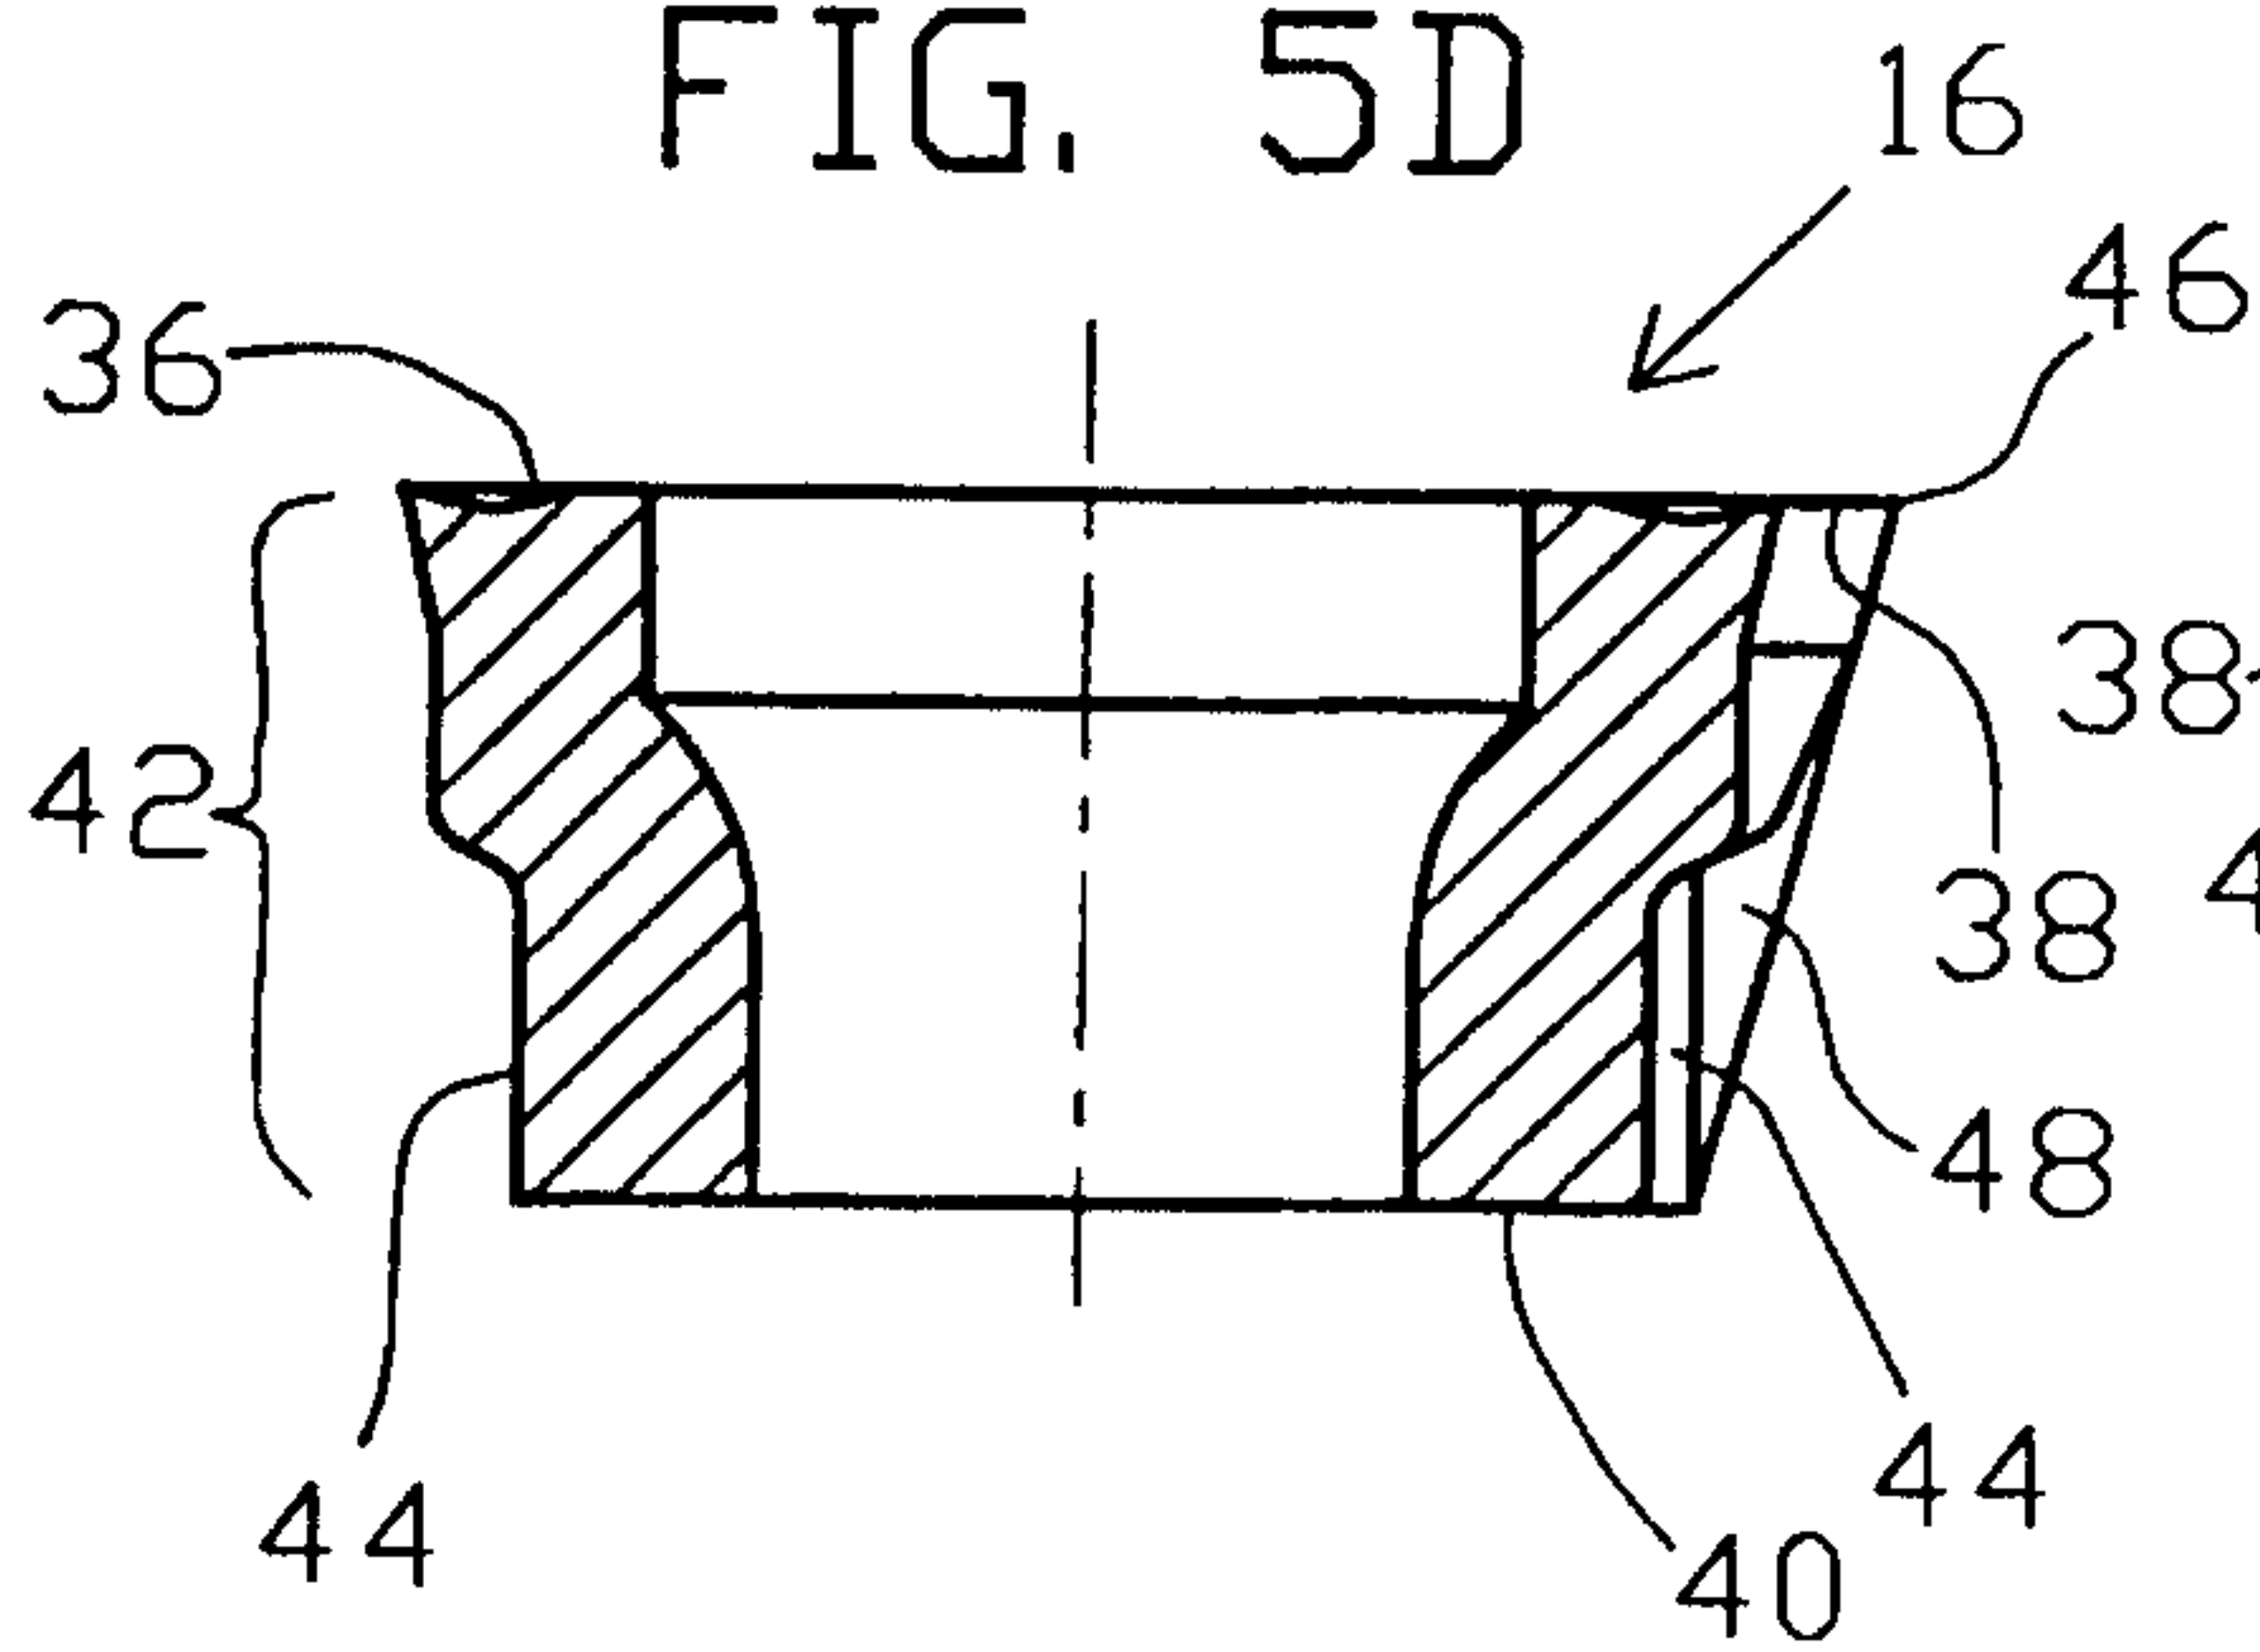


FIG. 5E

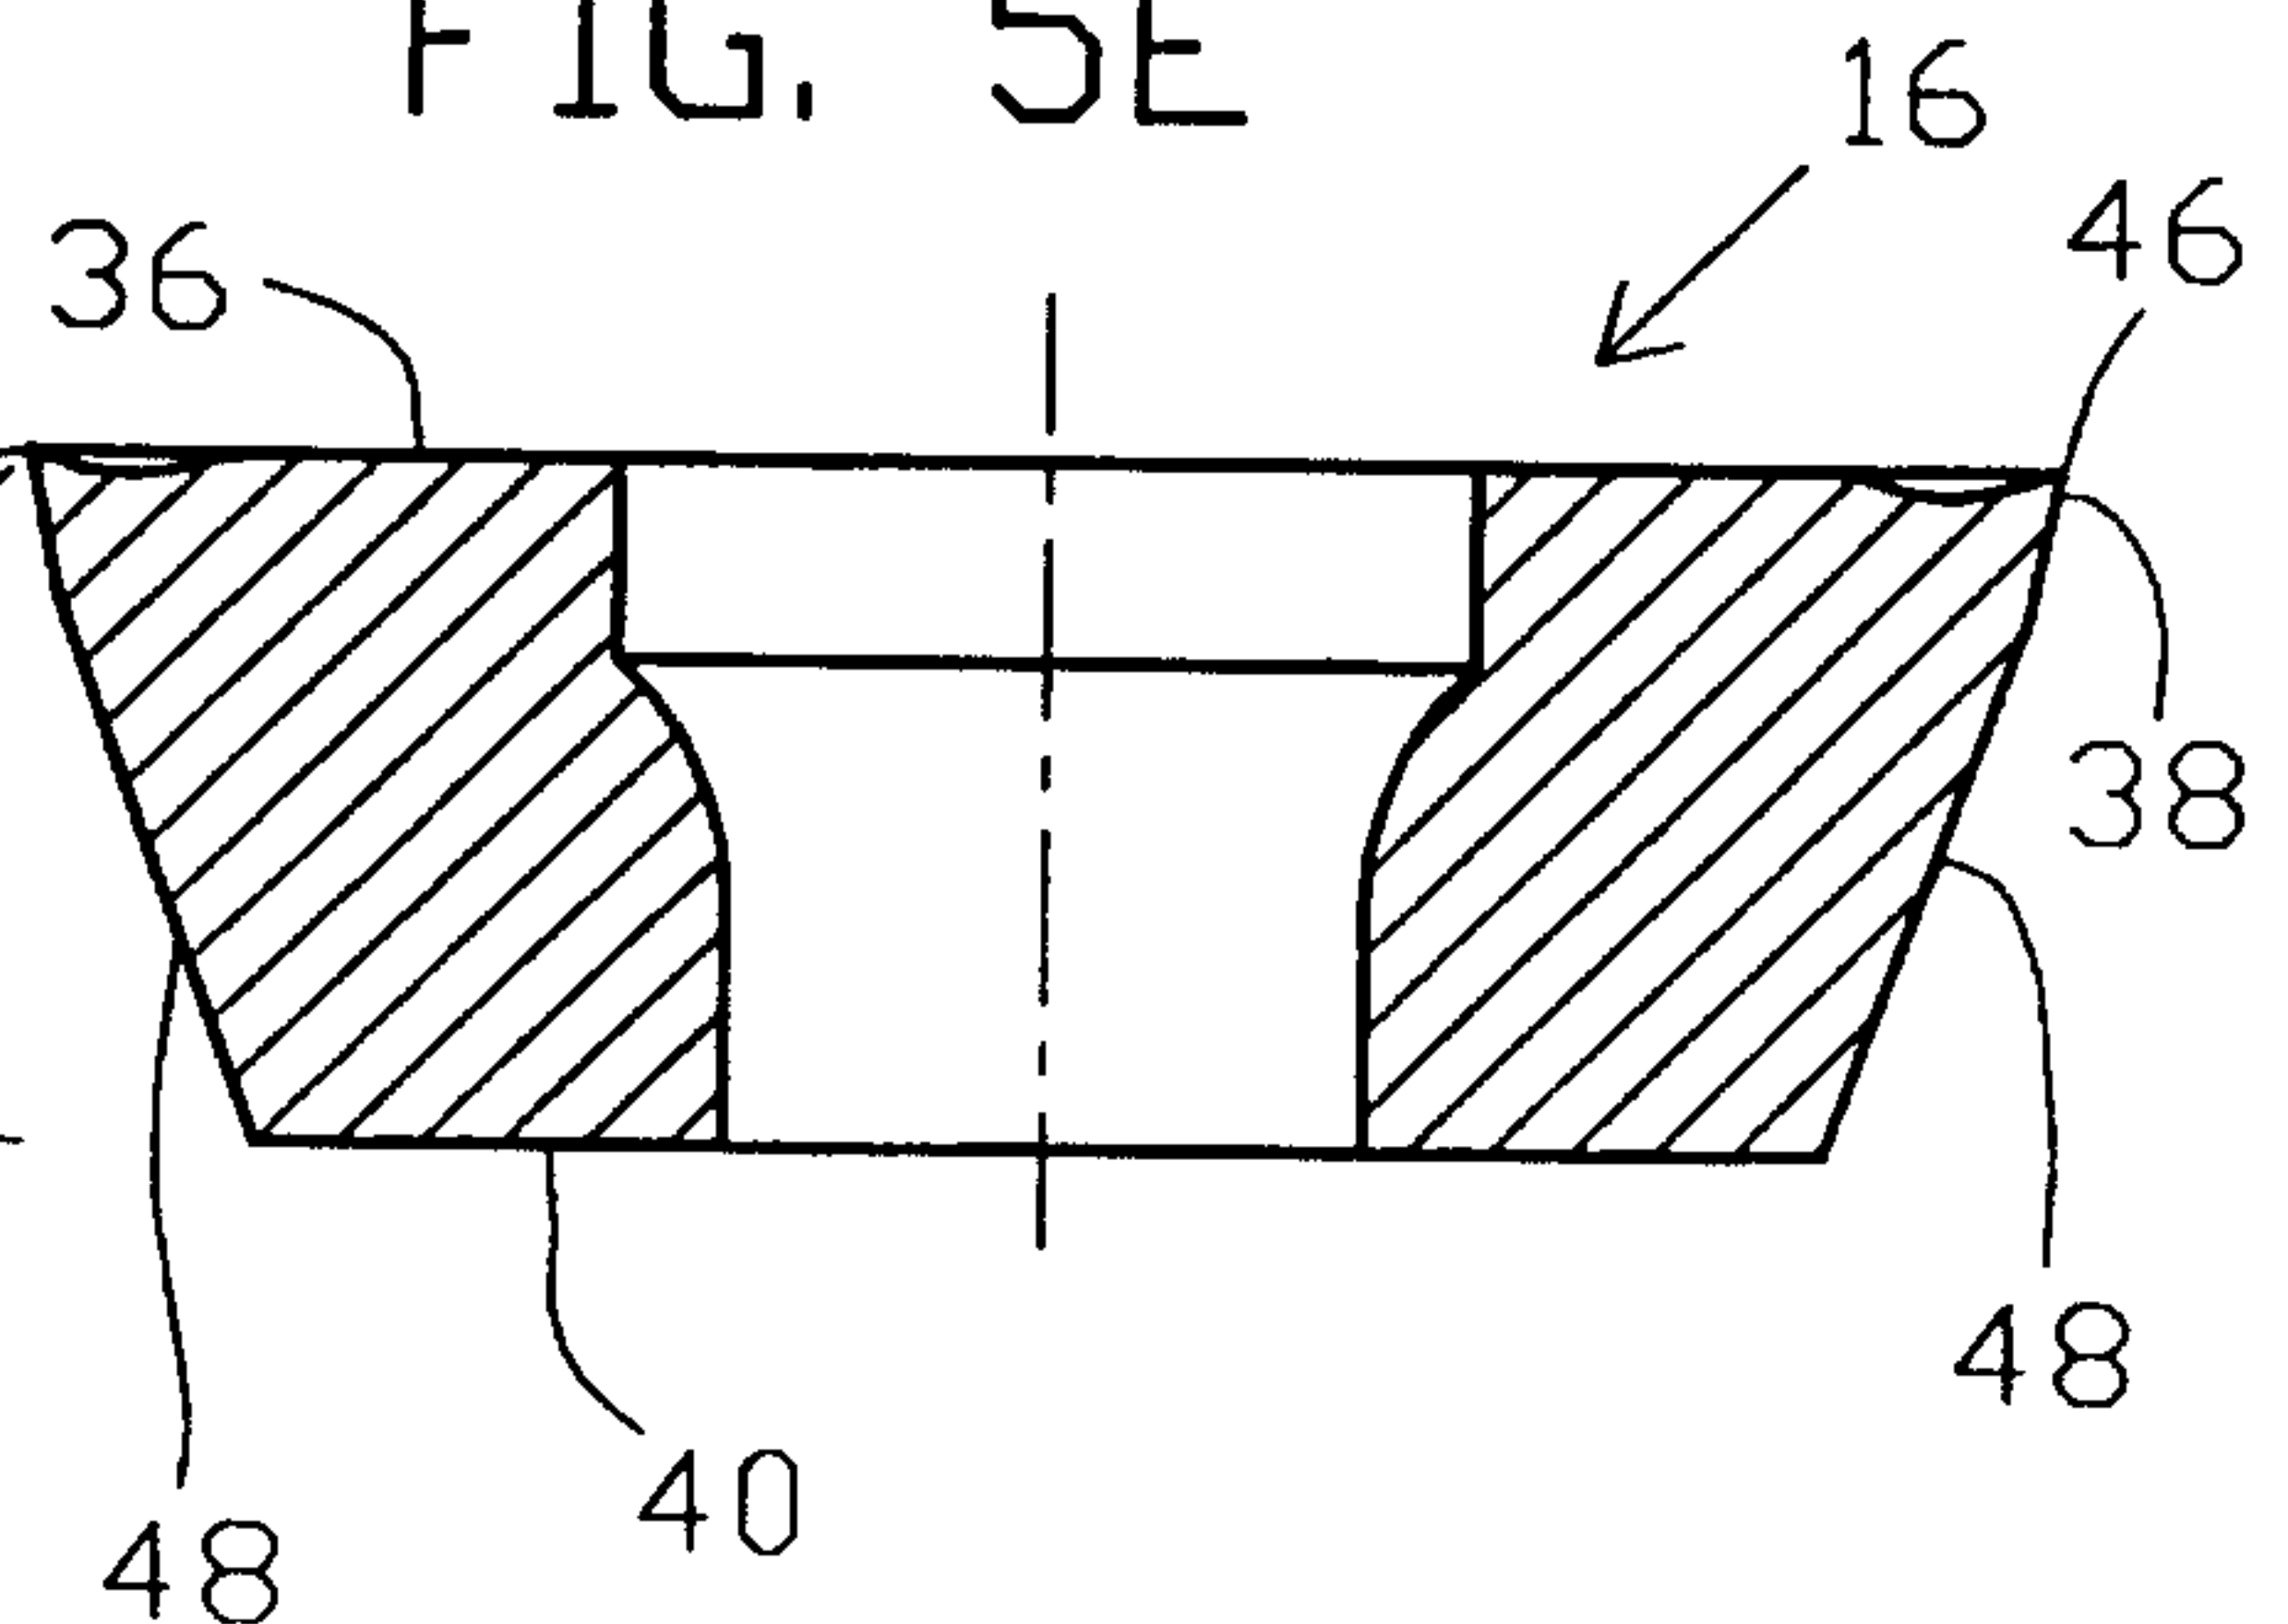


FIG. 6A

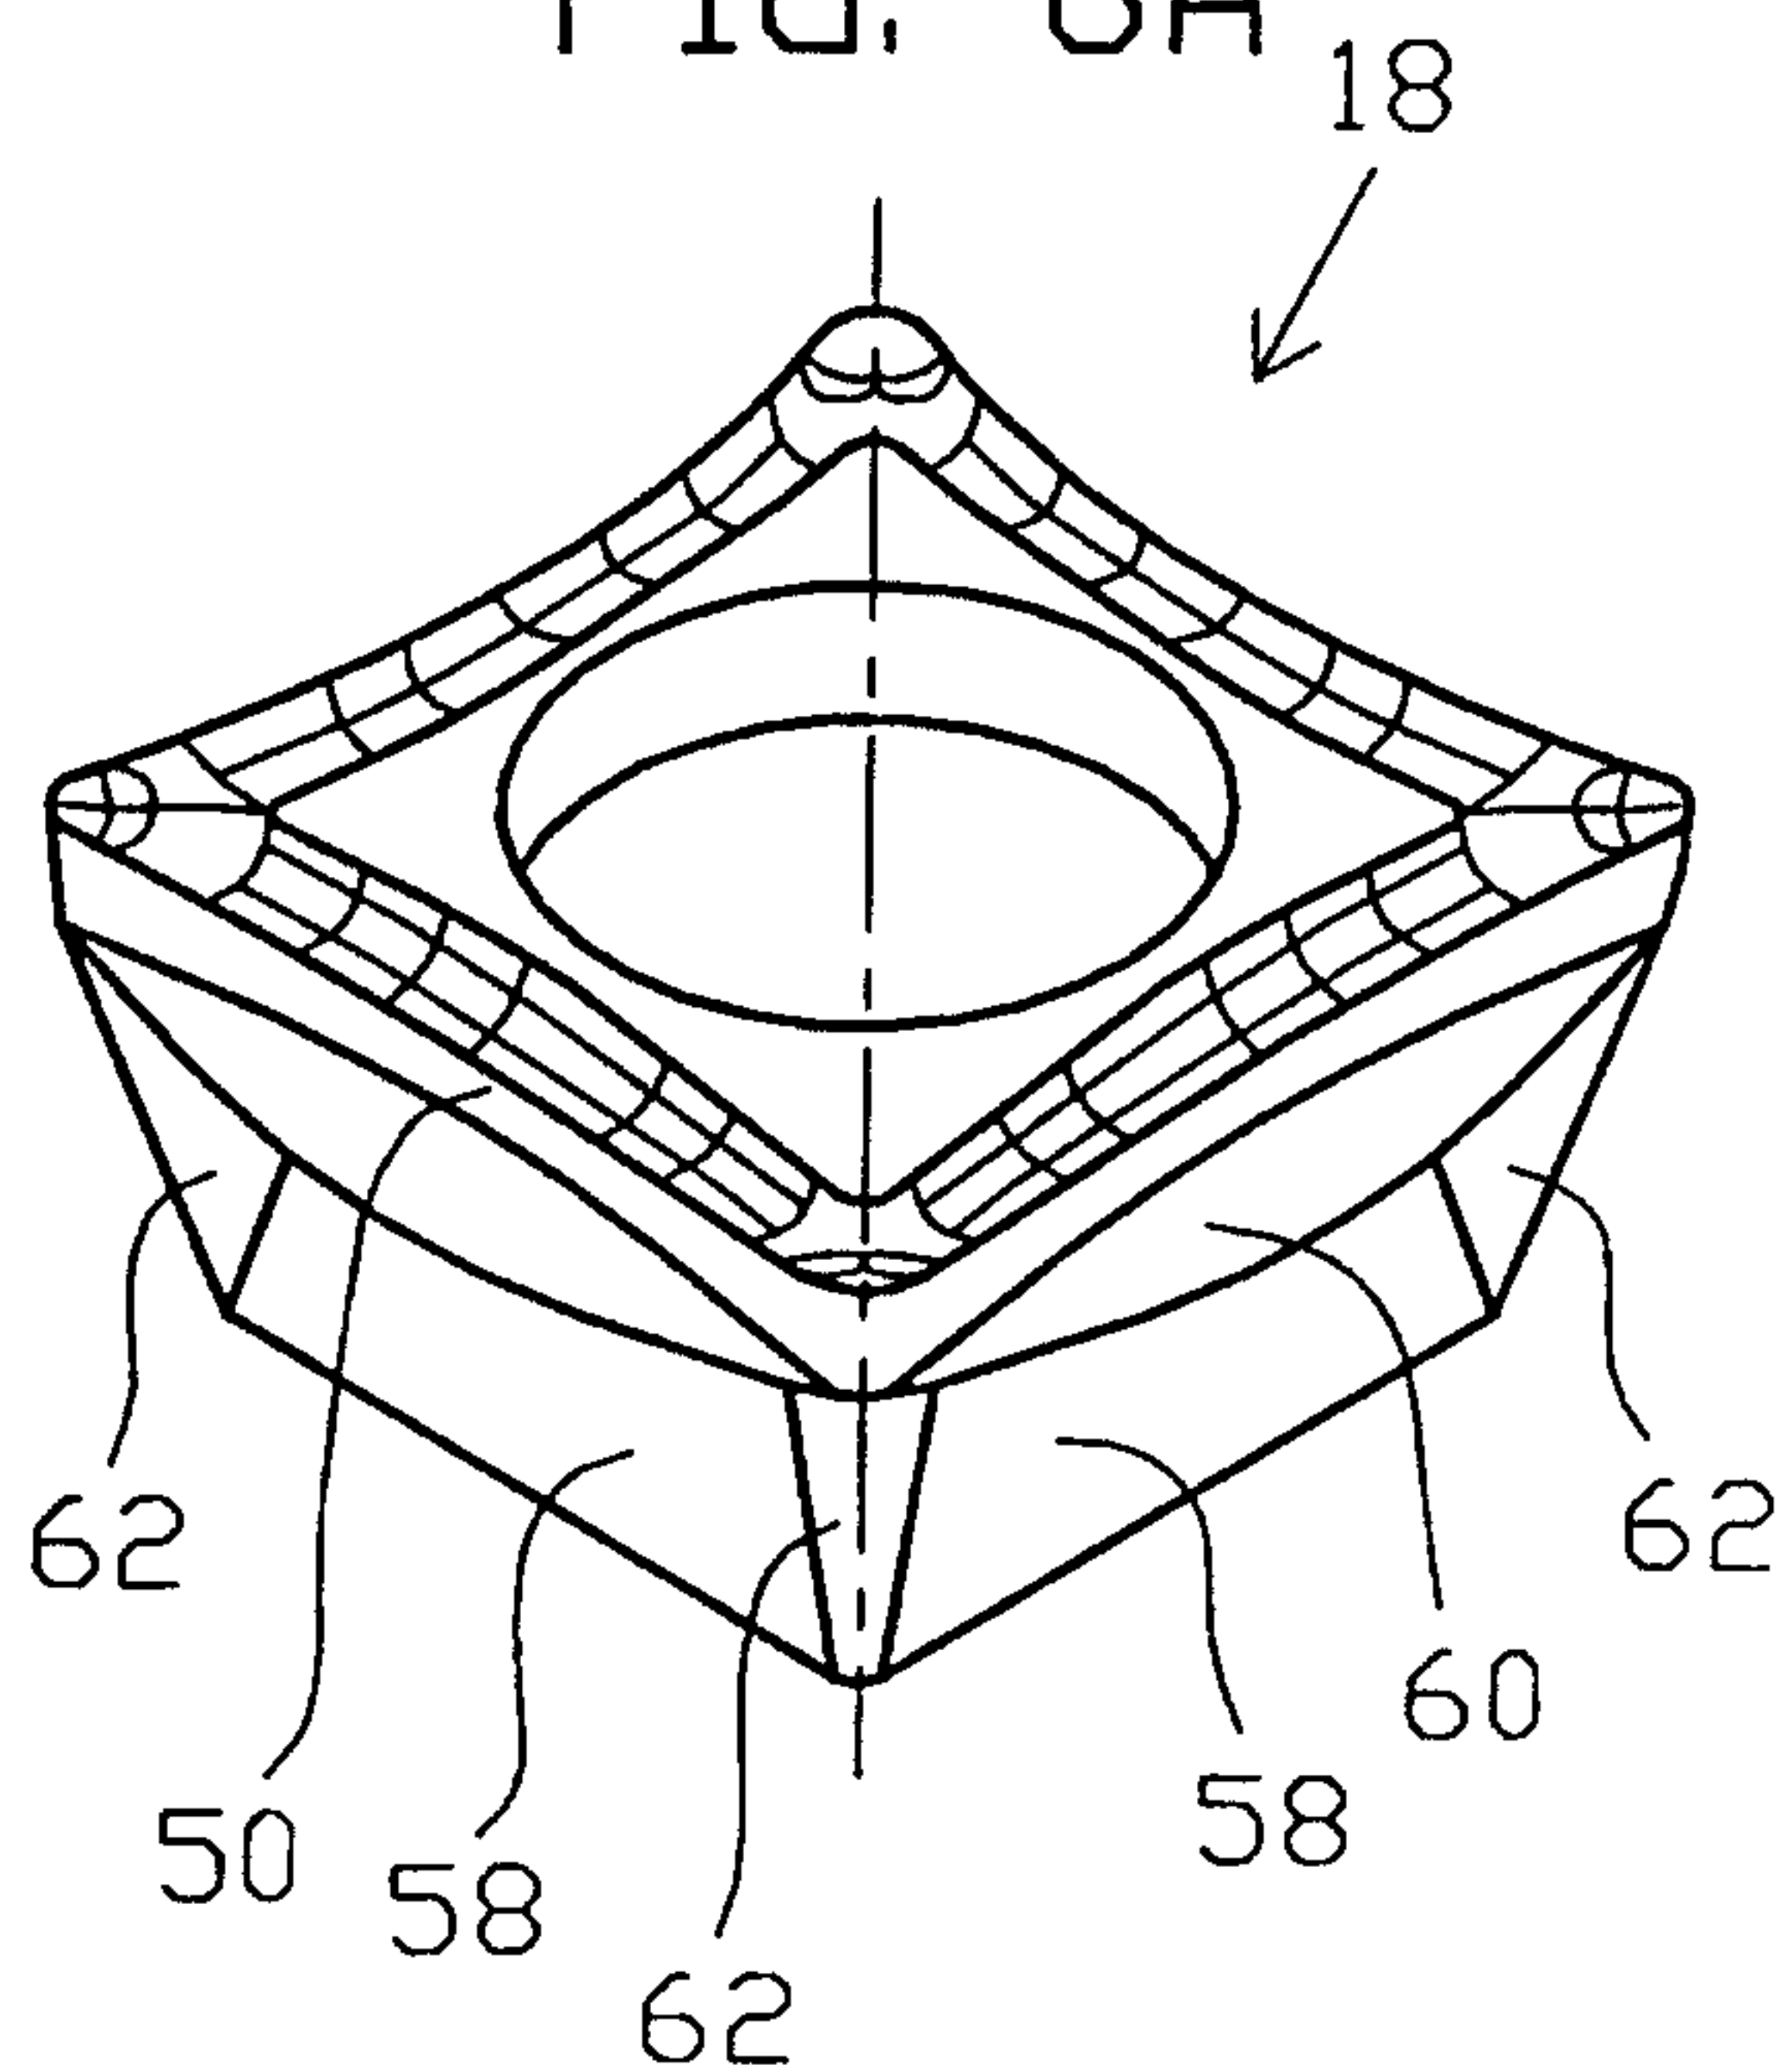


FIG. 6B

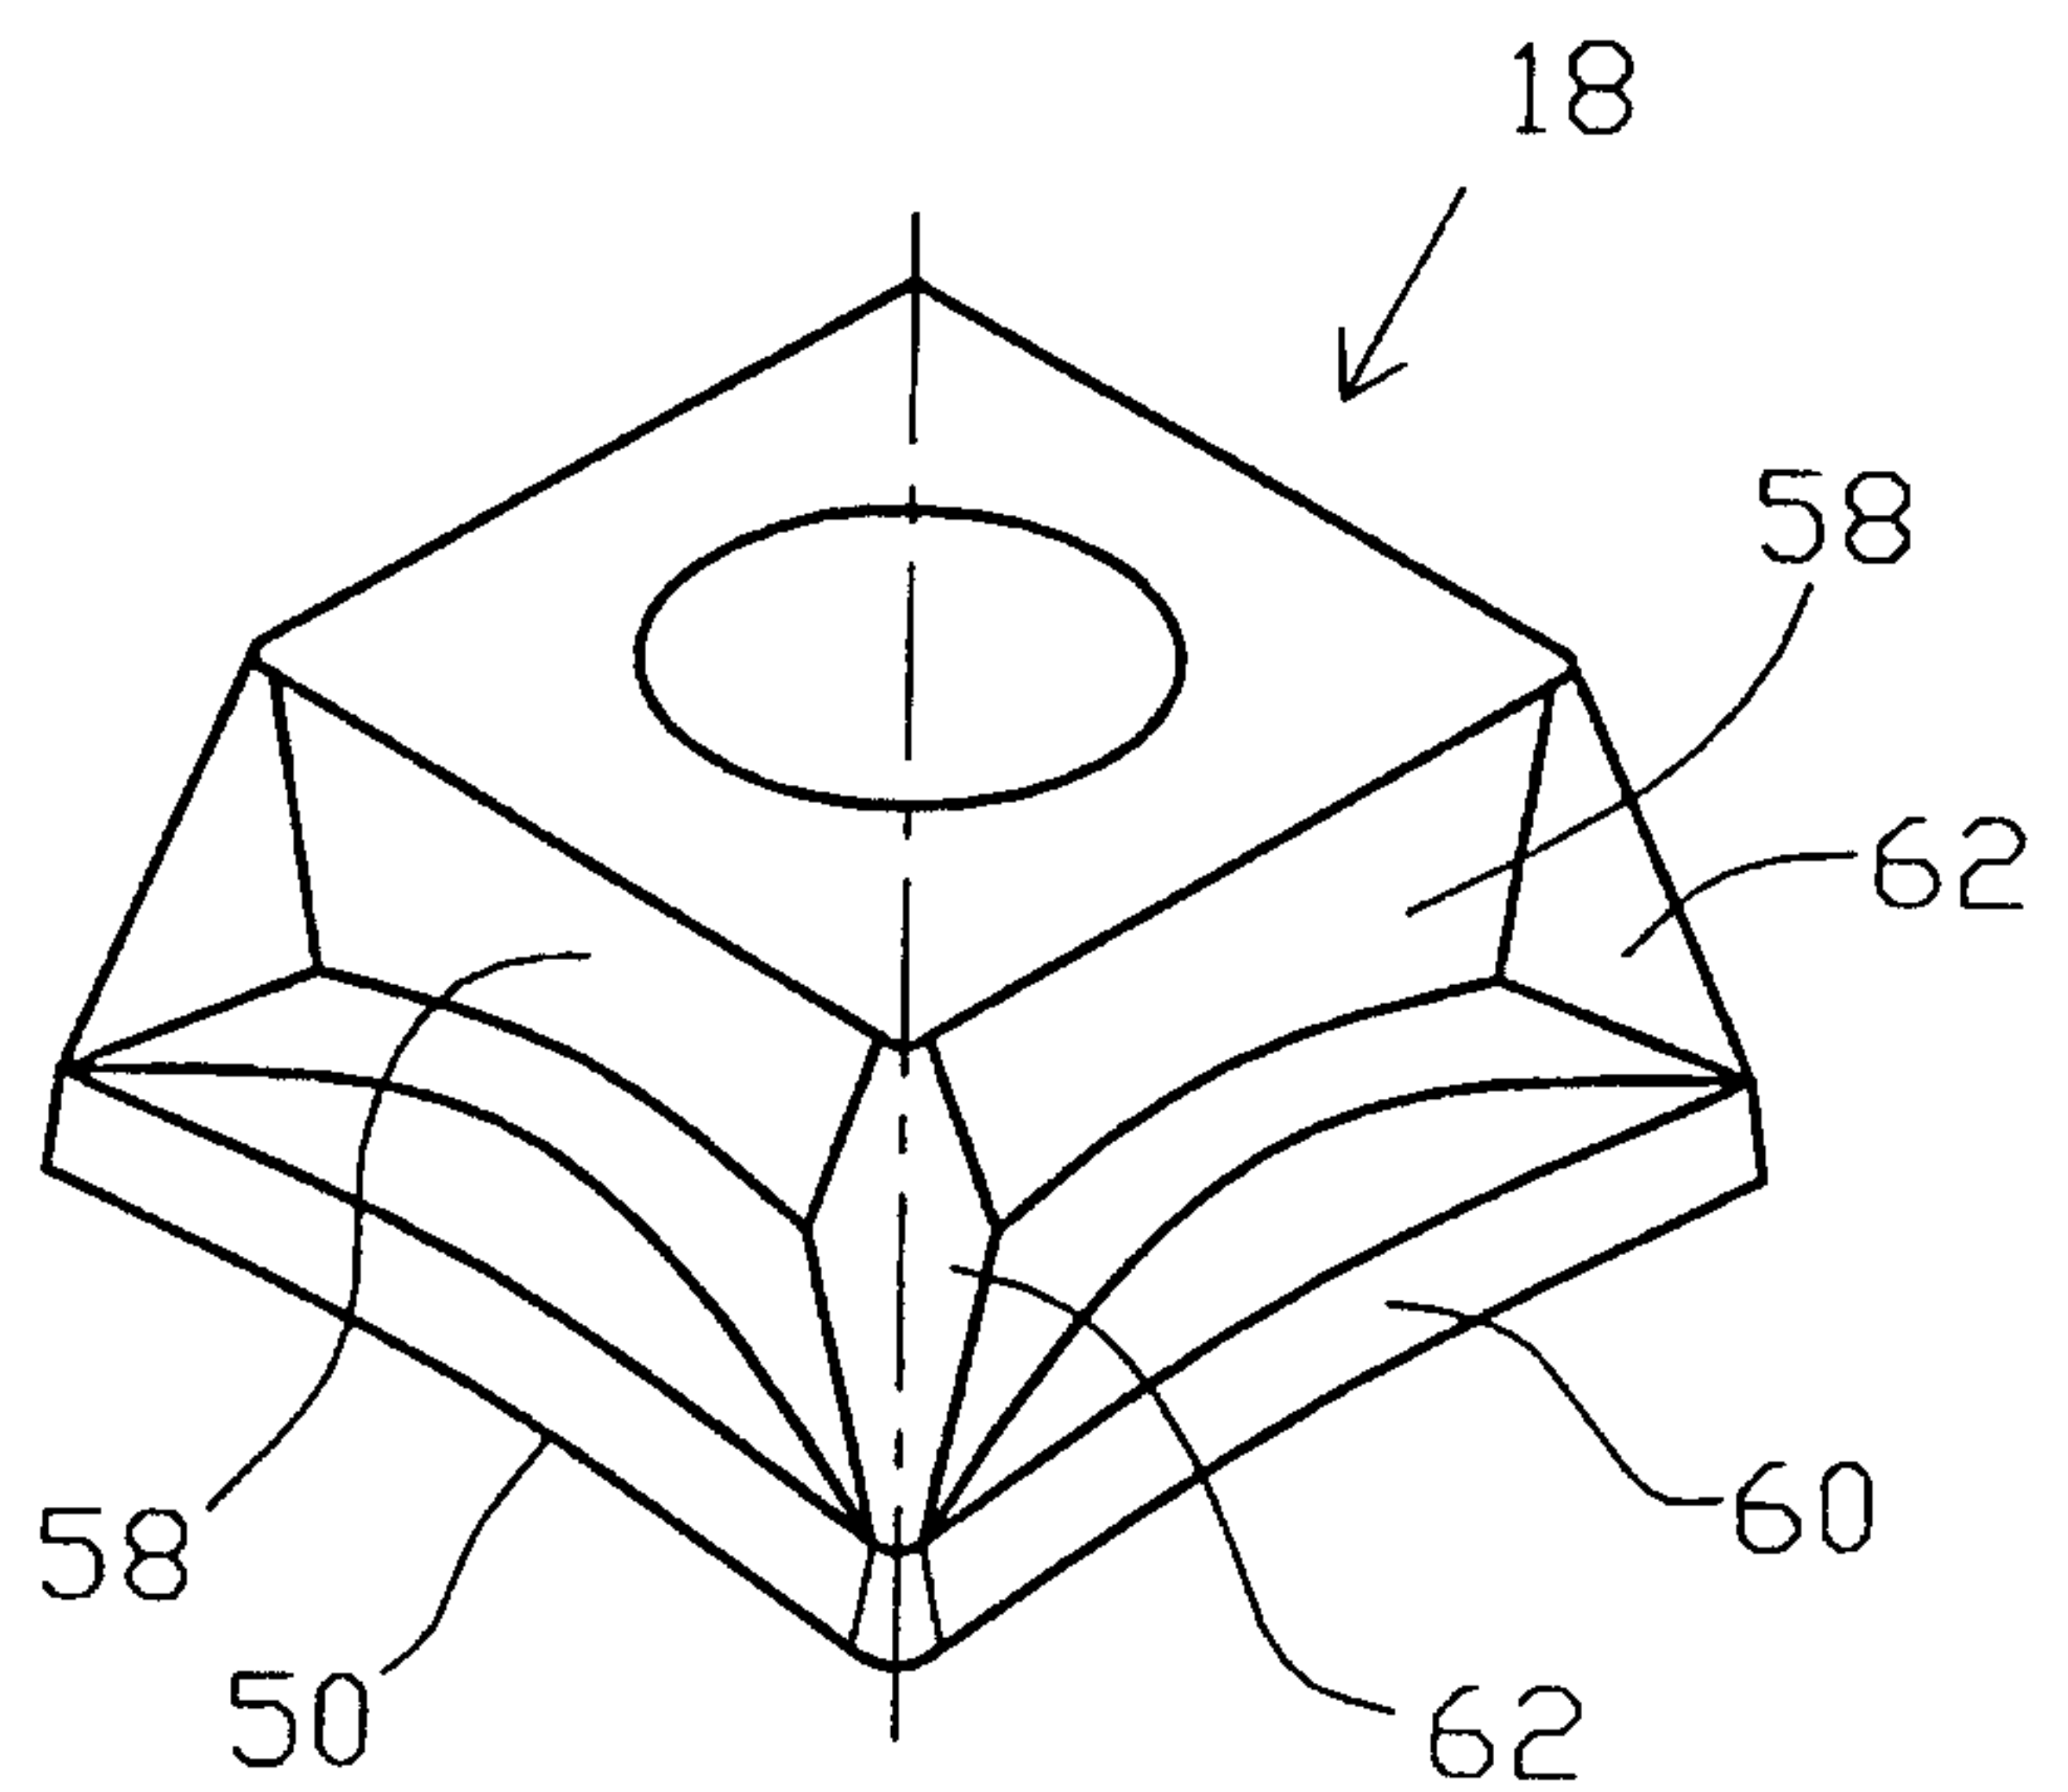


FIG. 6C

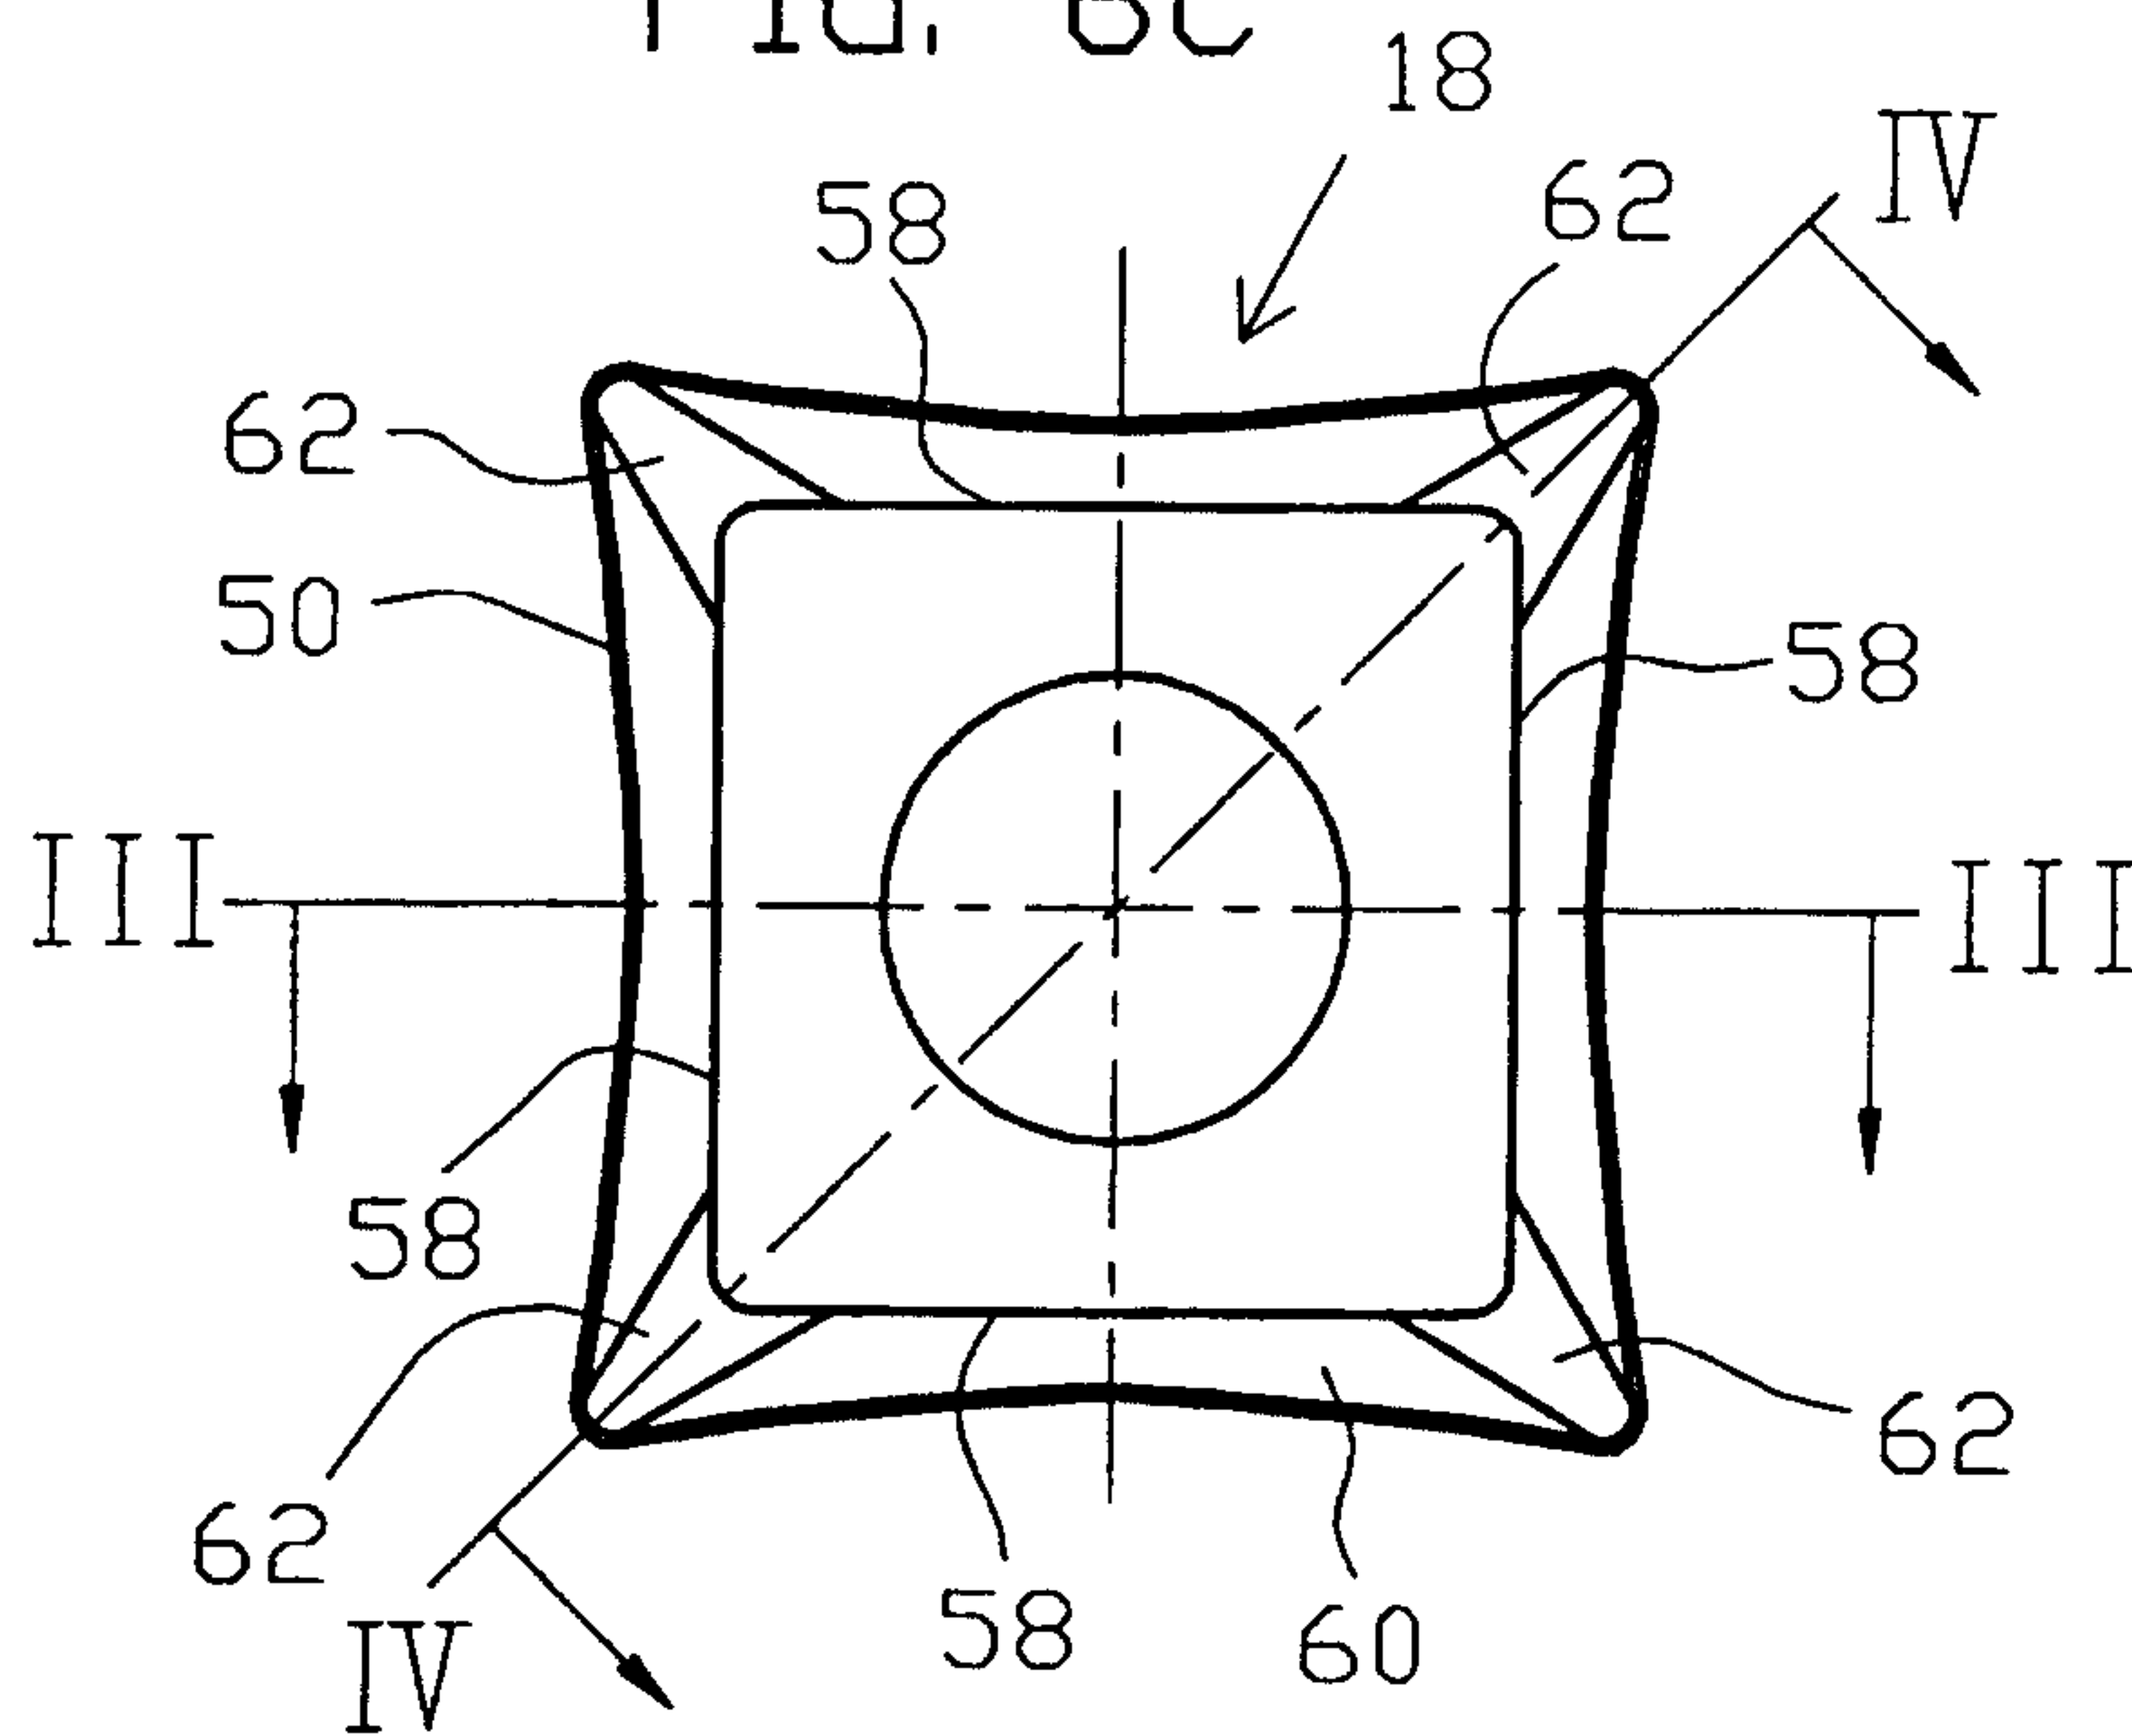


FIG. 6D


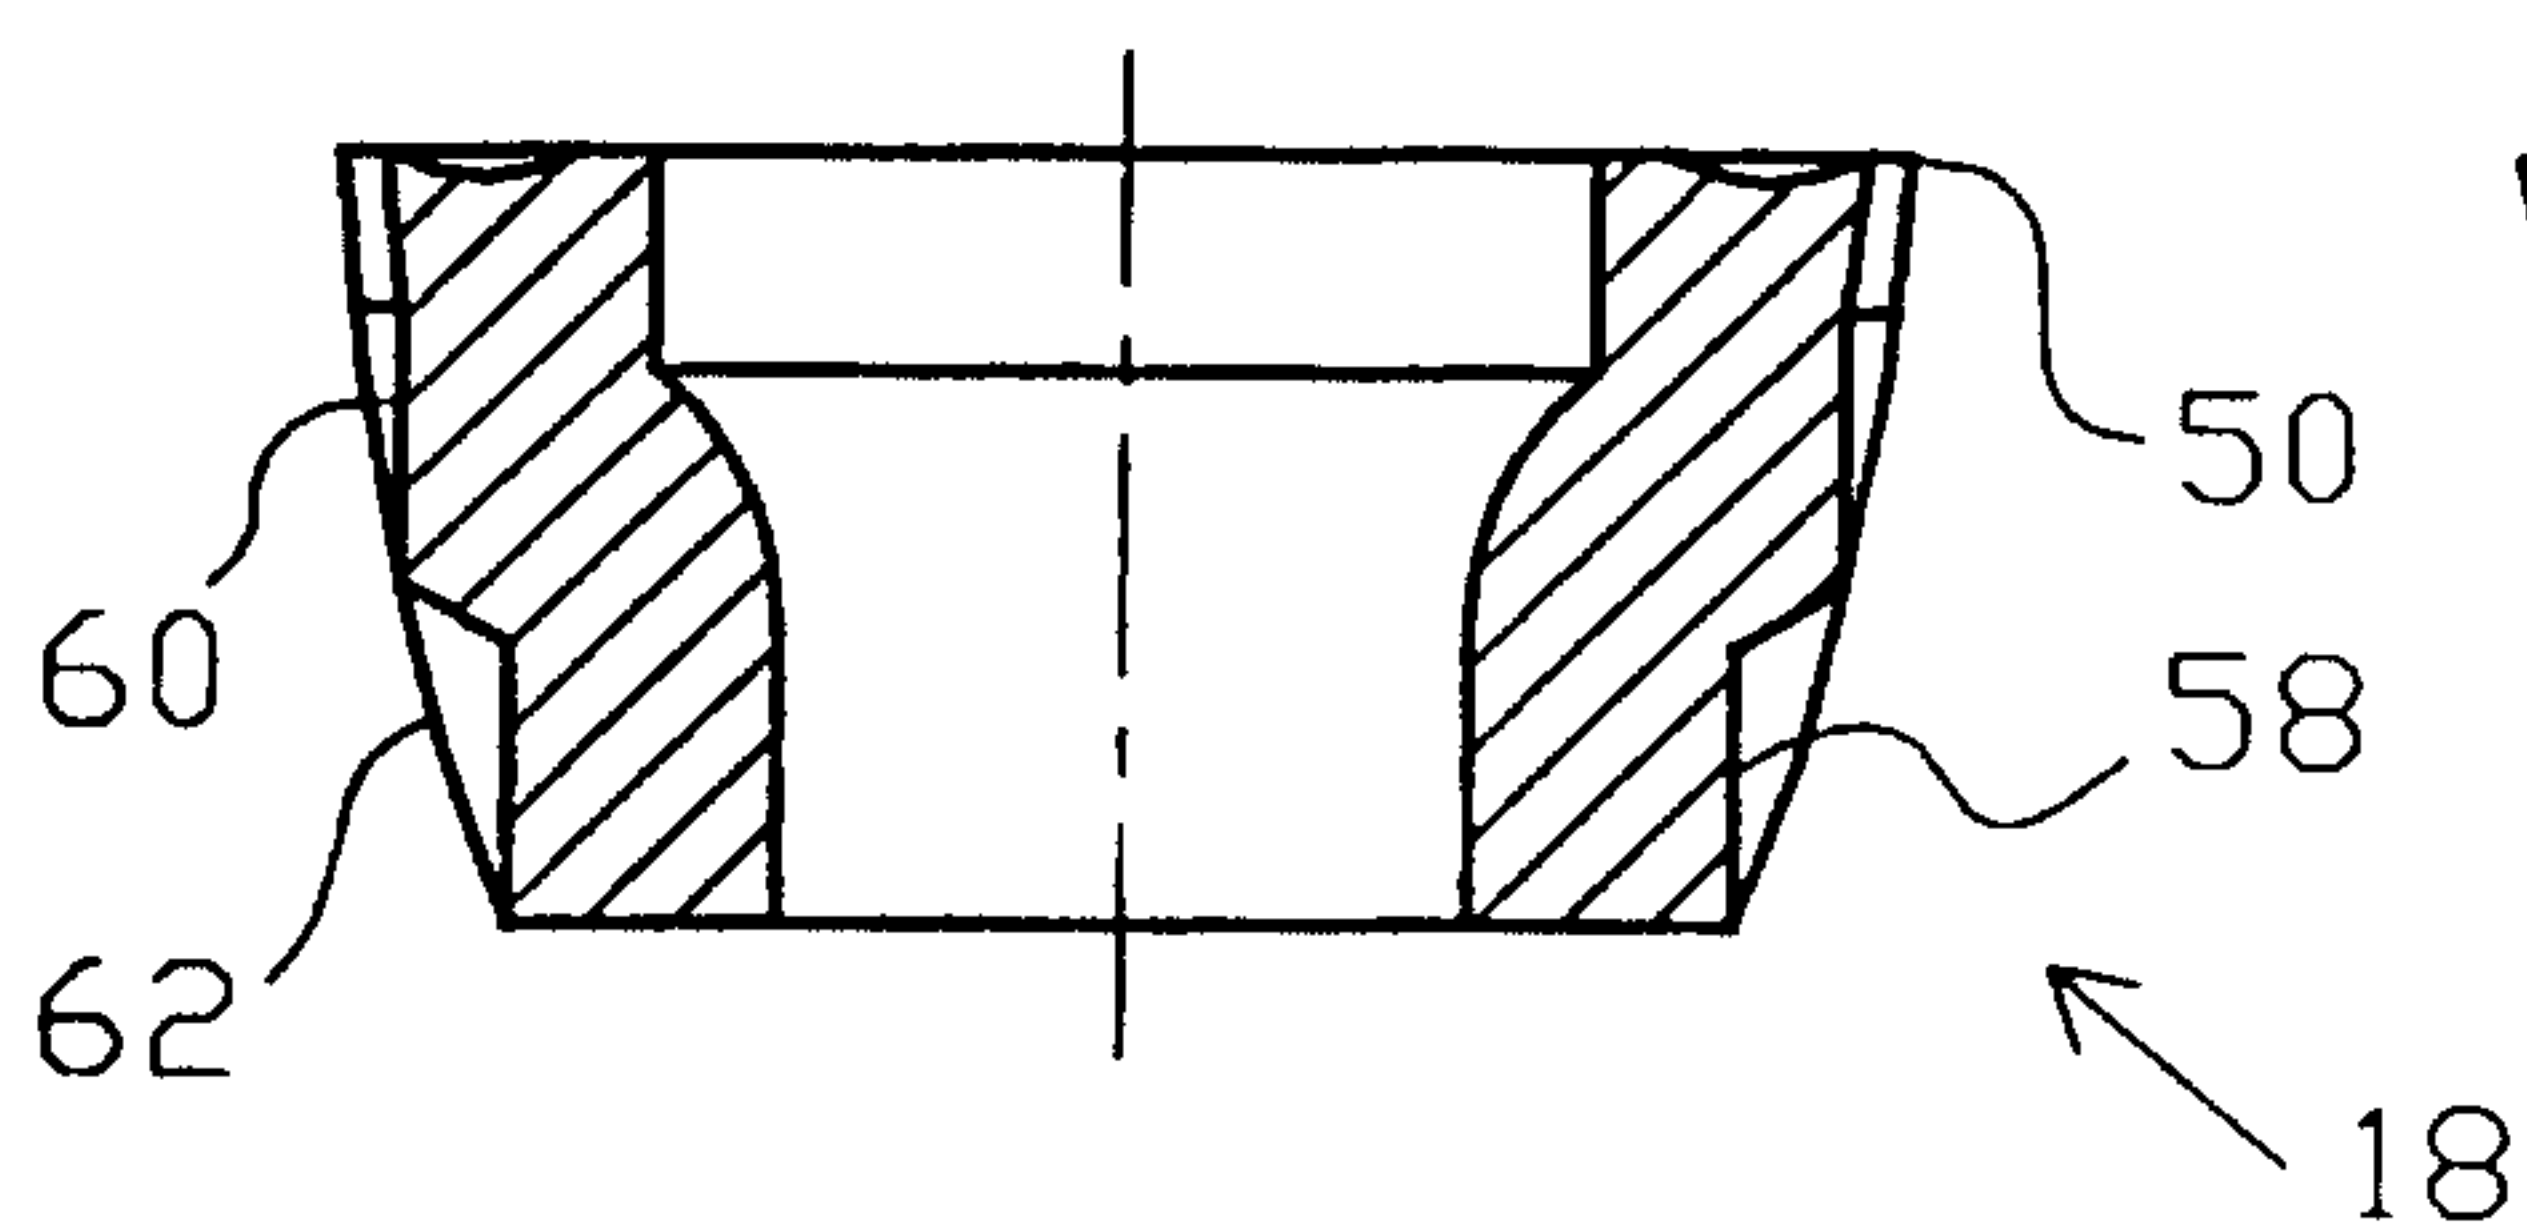


FIG. 6E

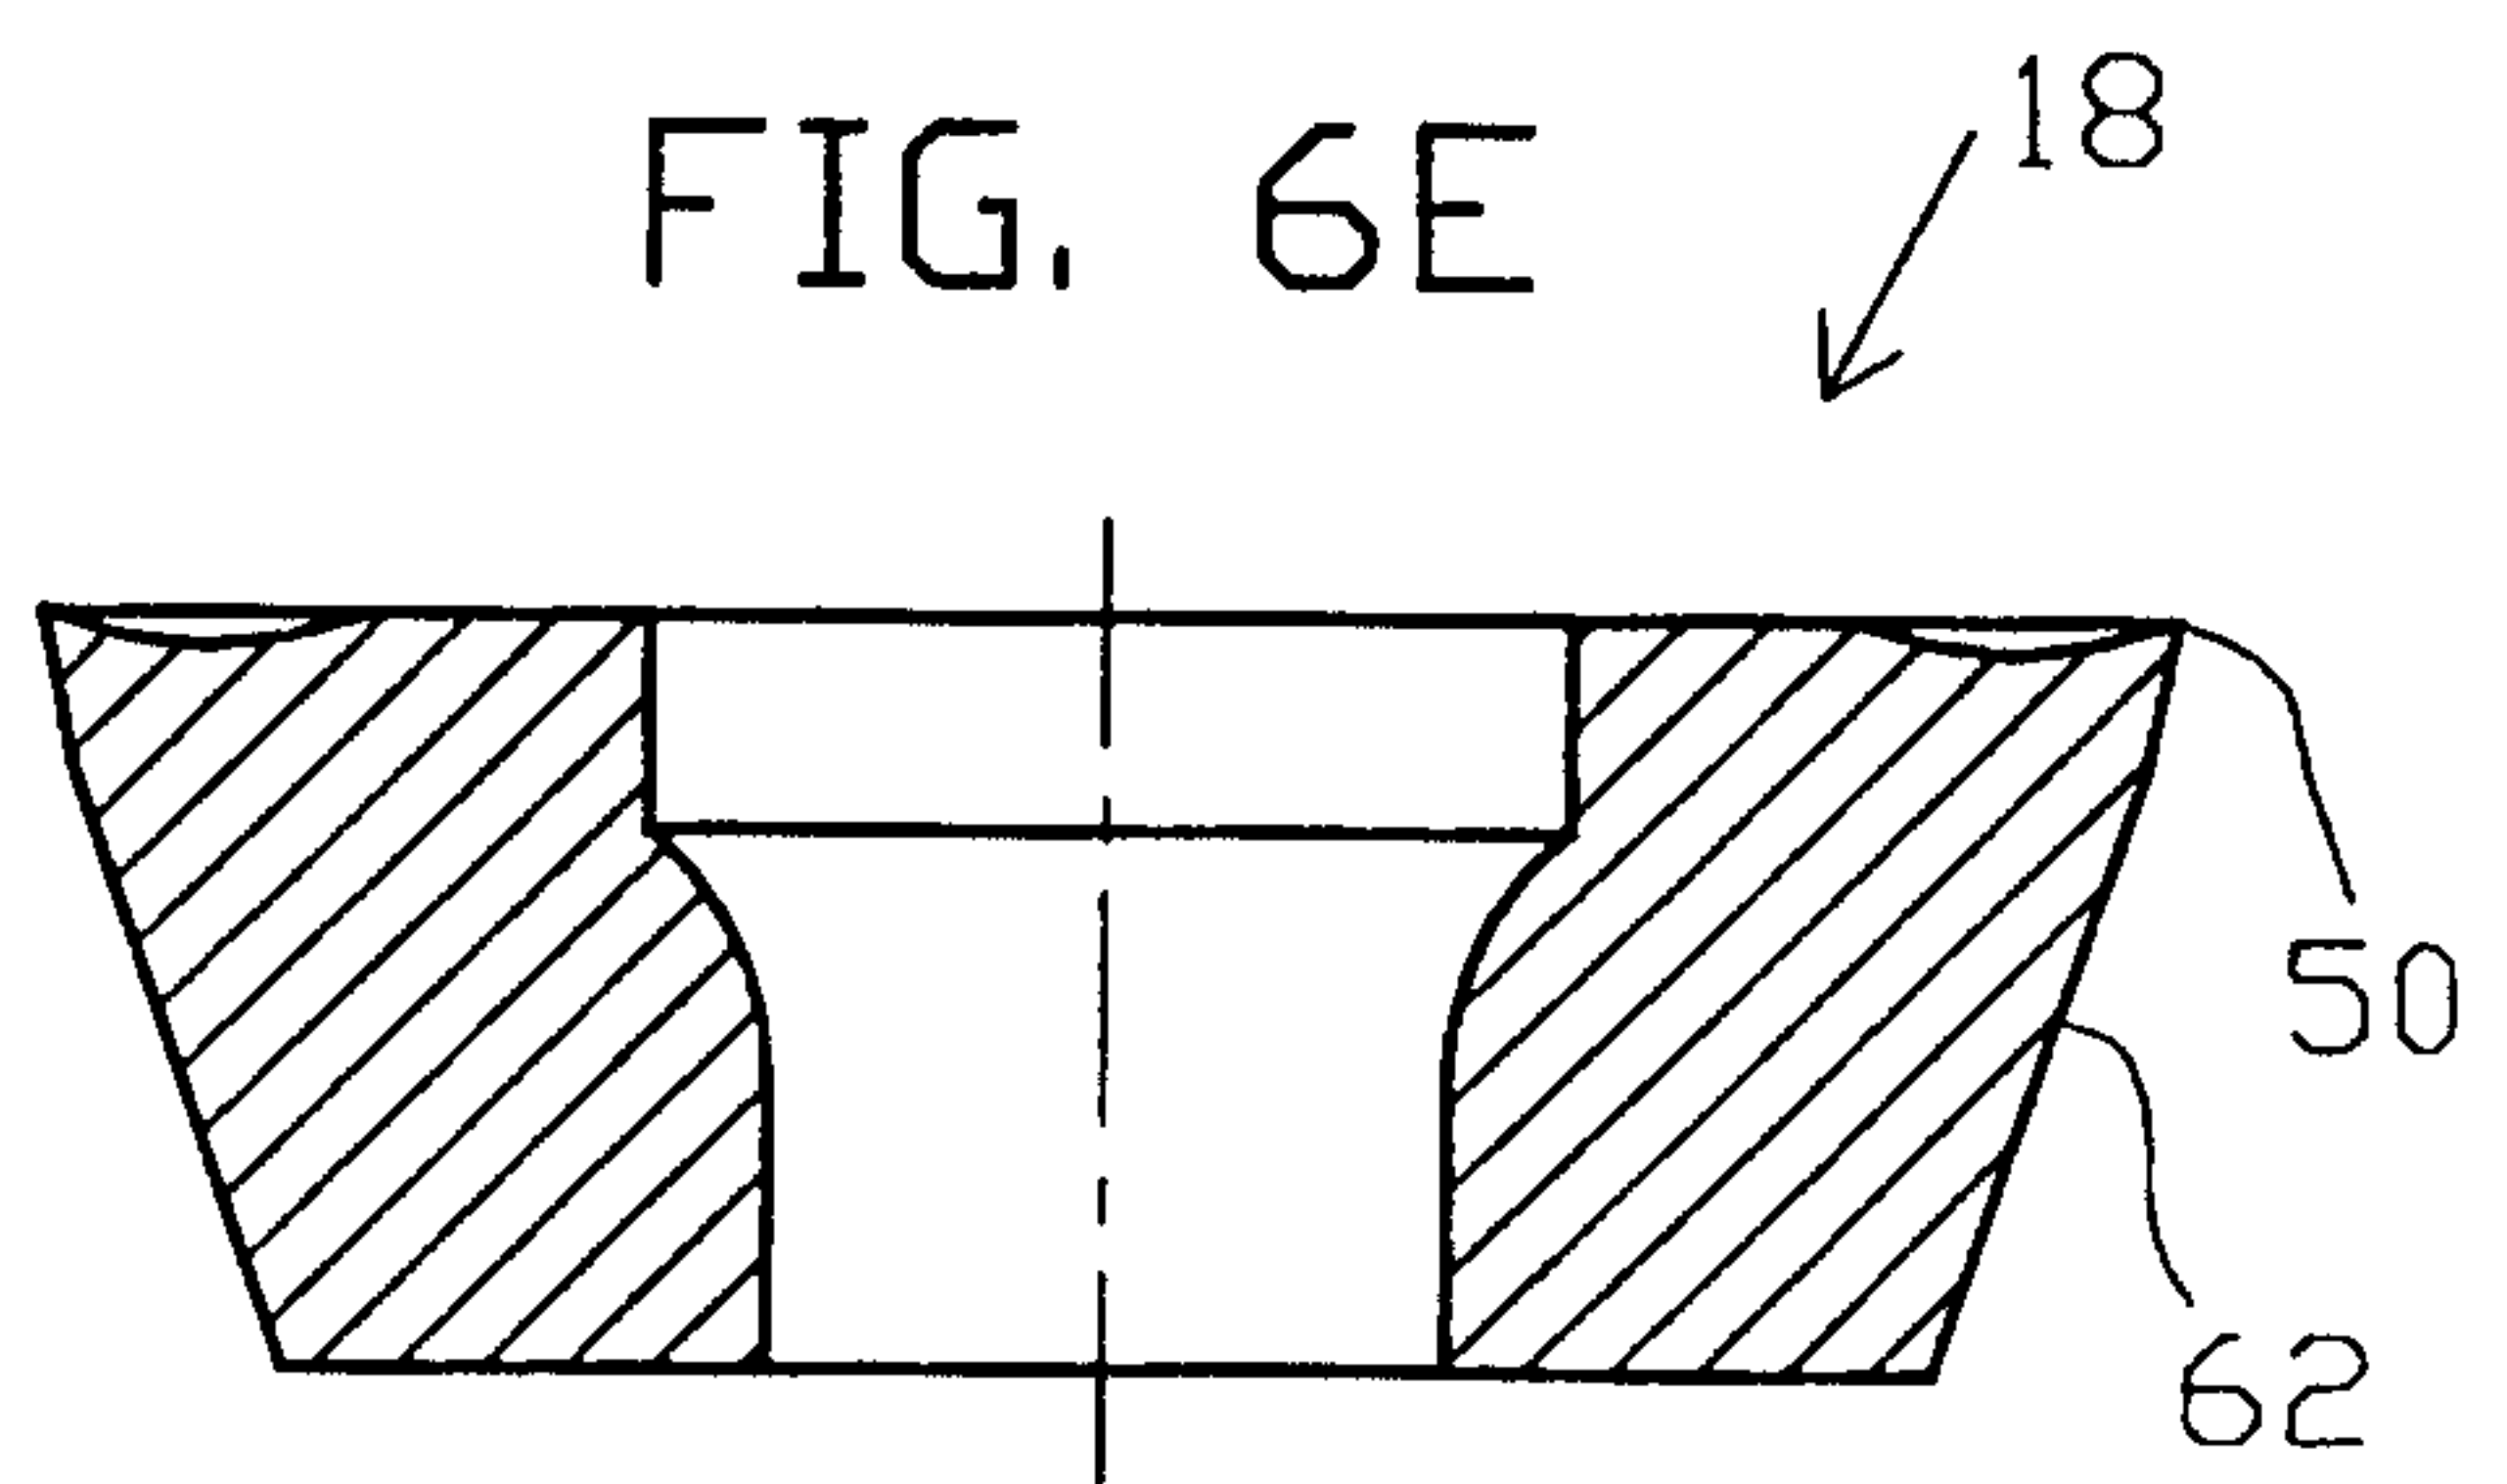

7/9

FIG. 7A

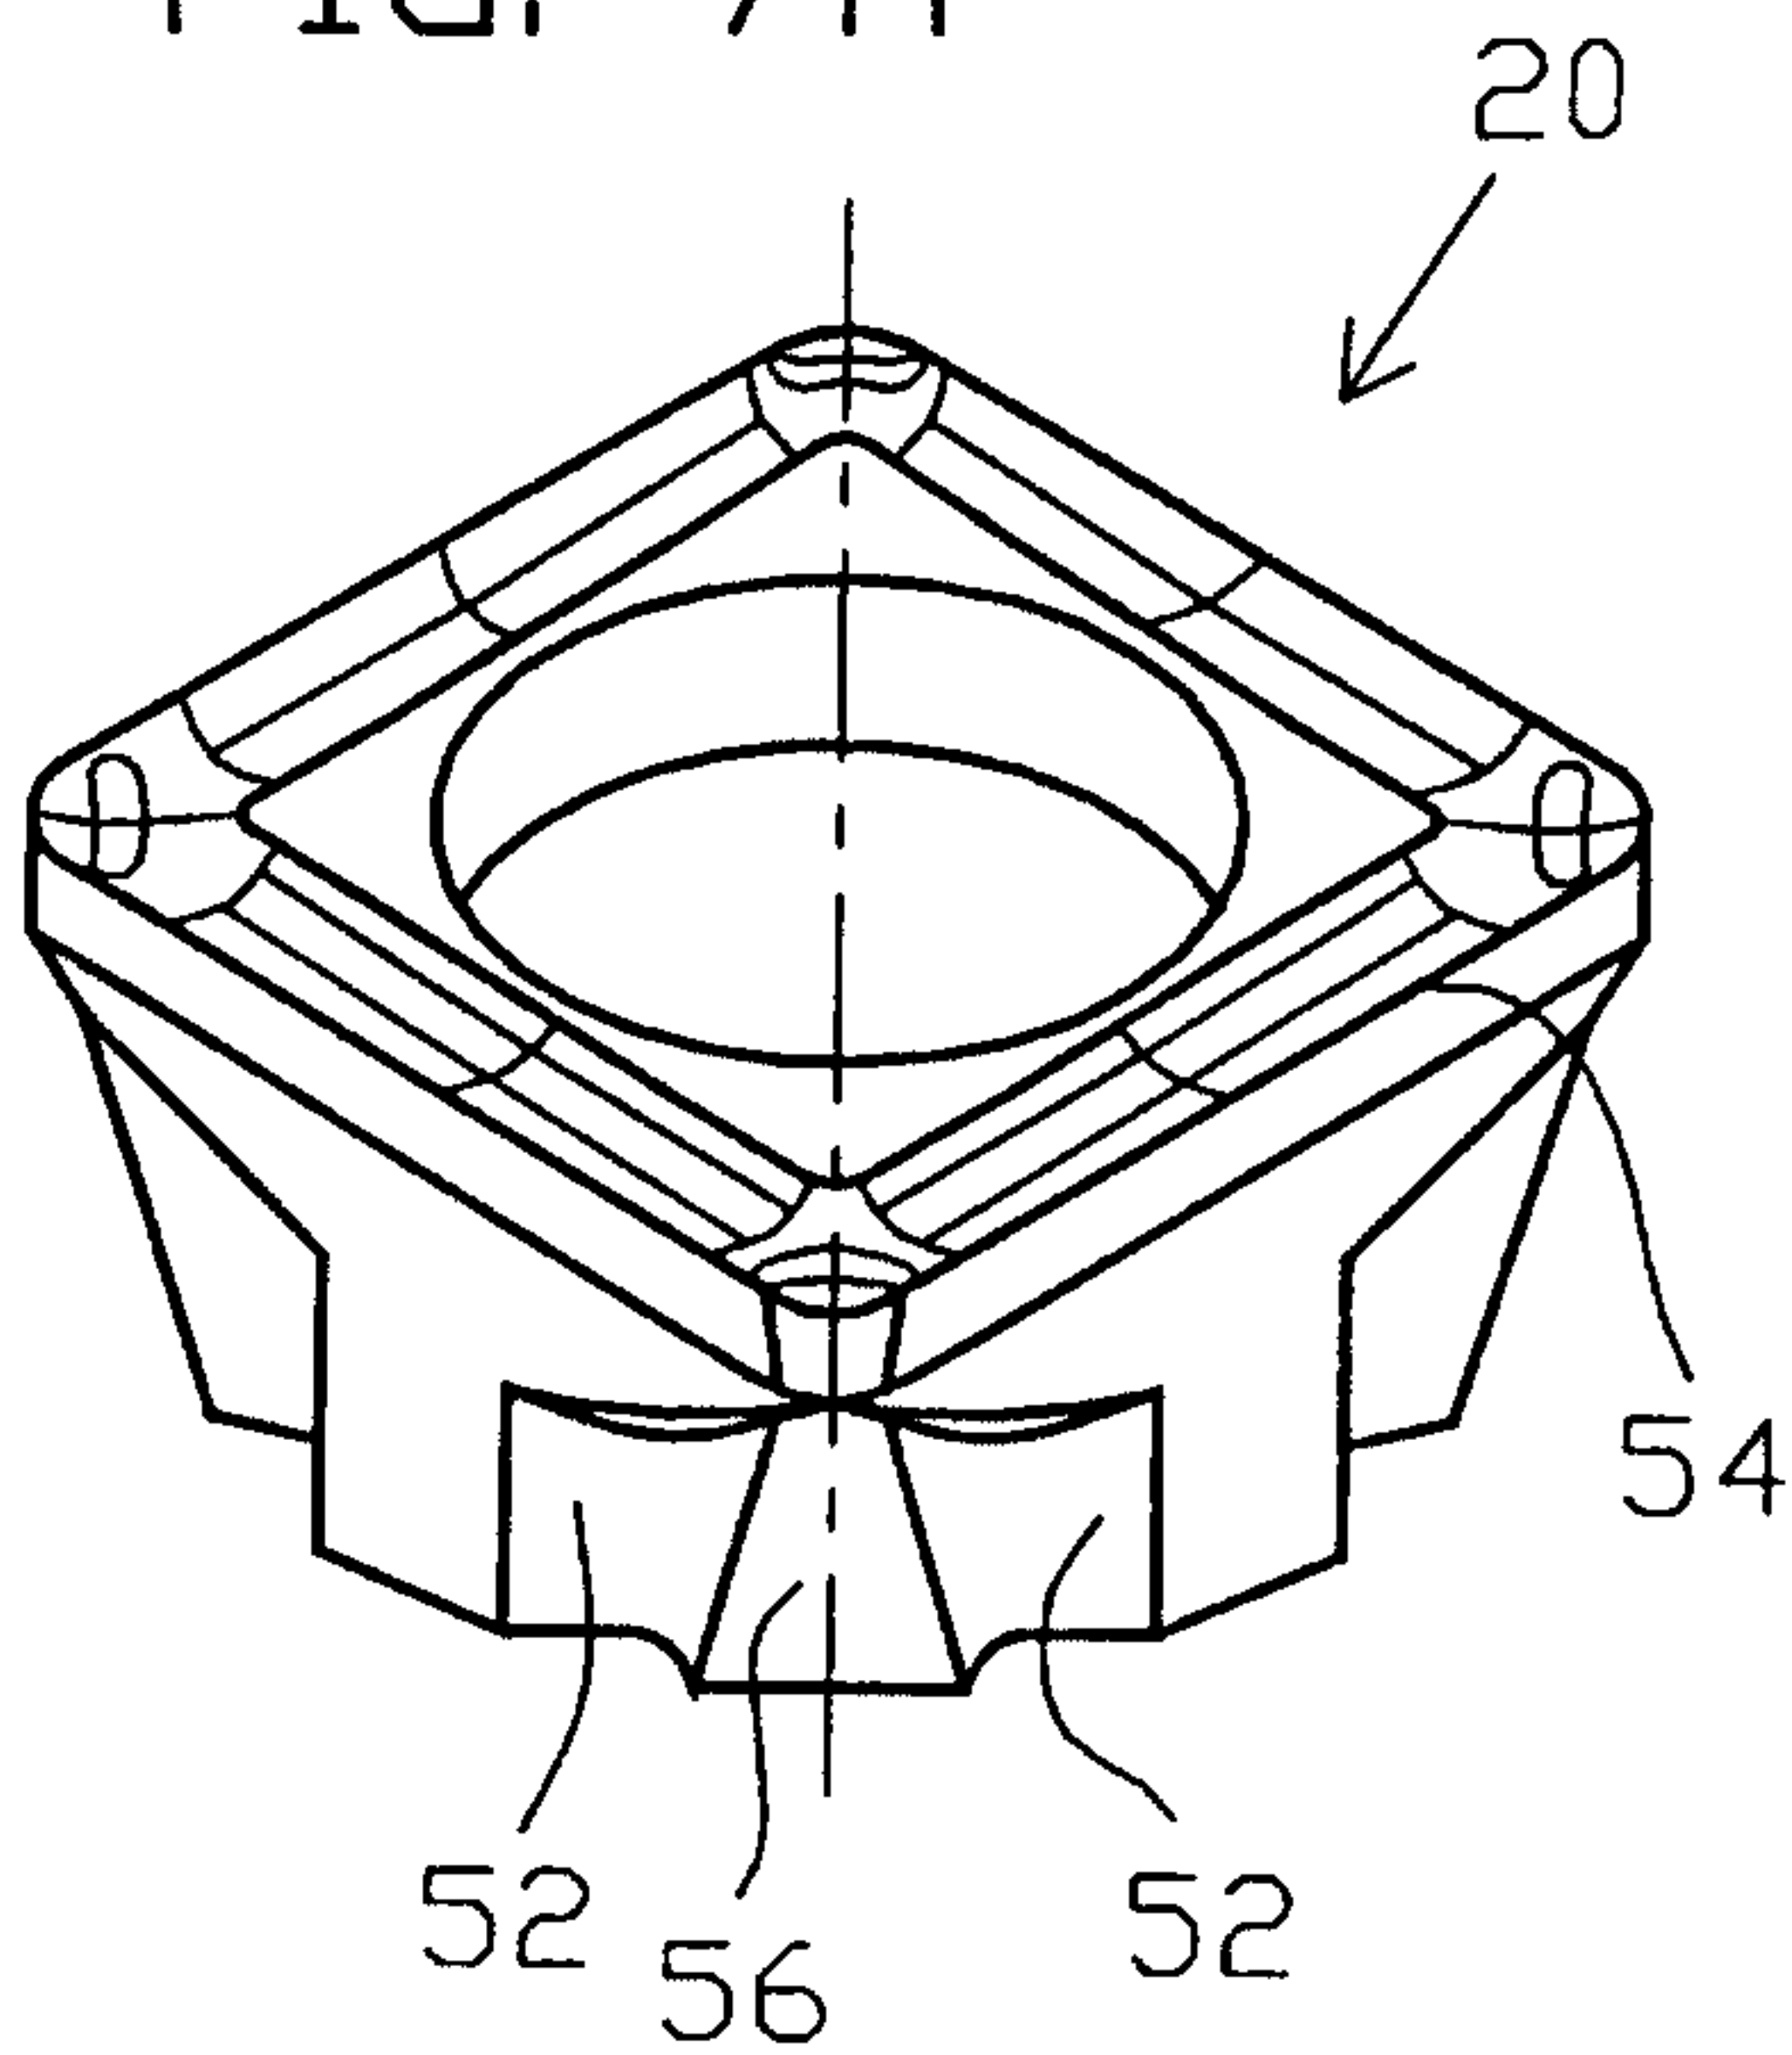


FIG. 7B

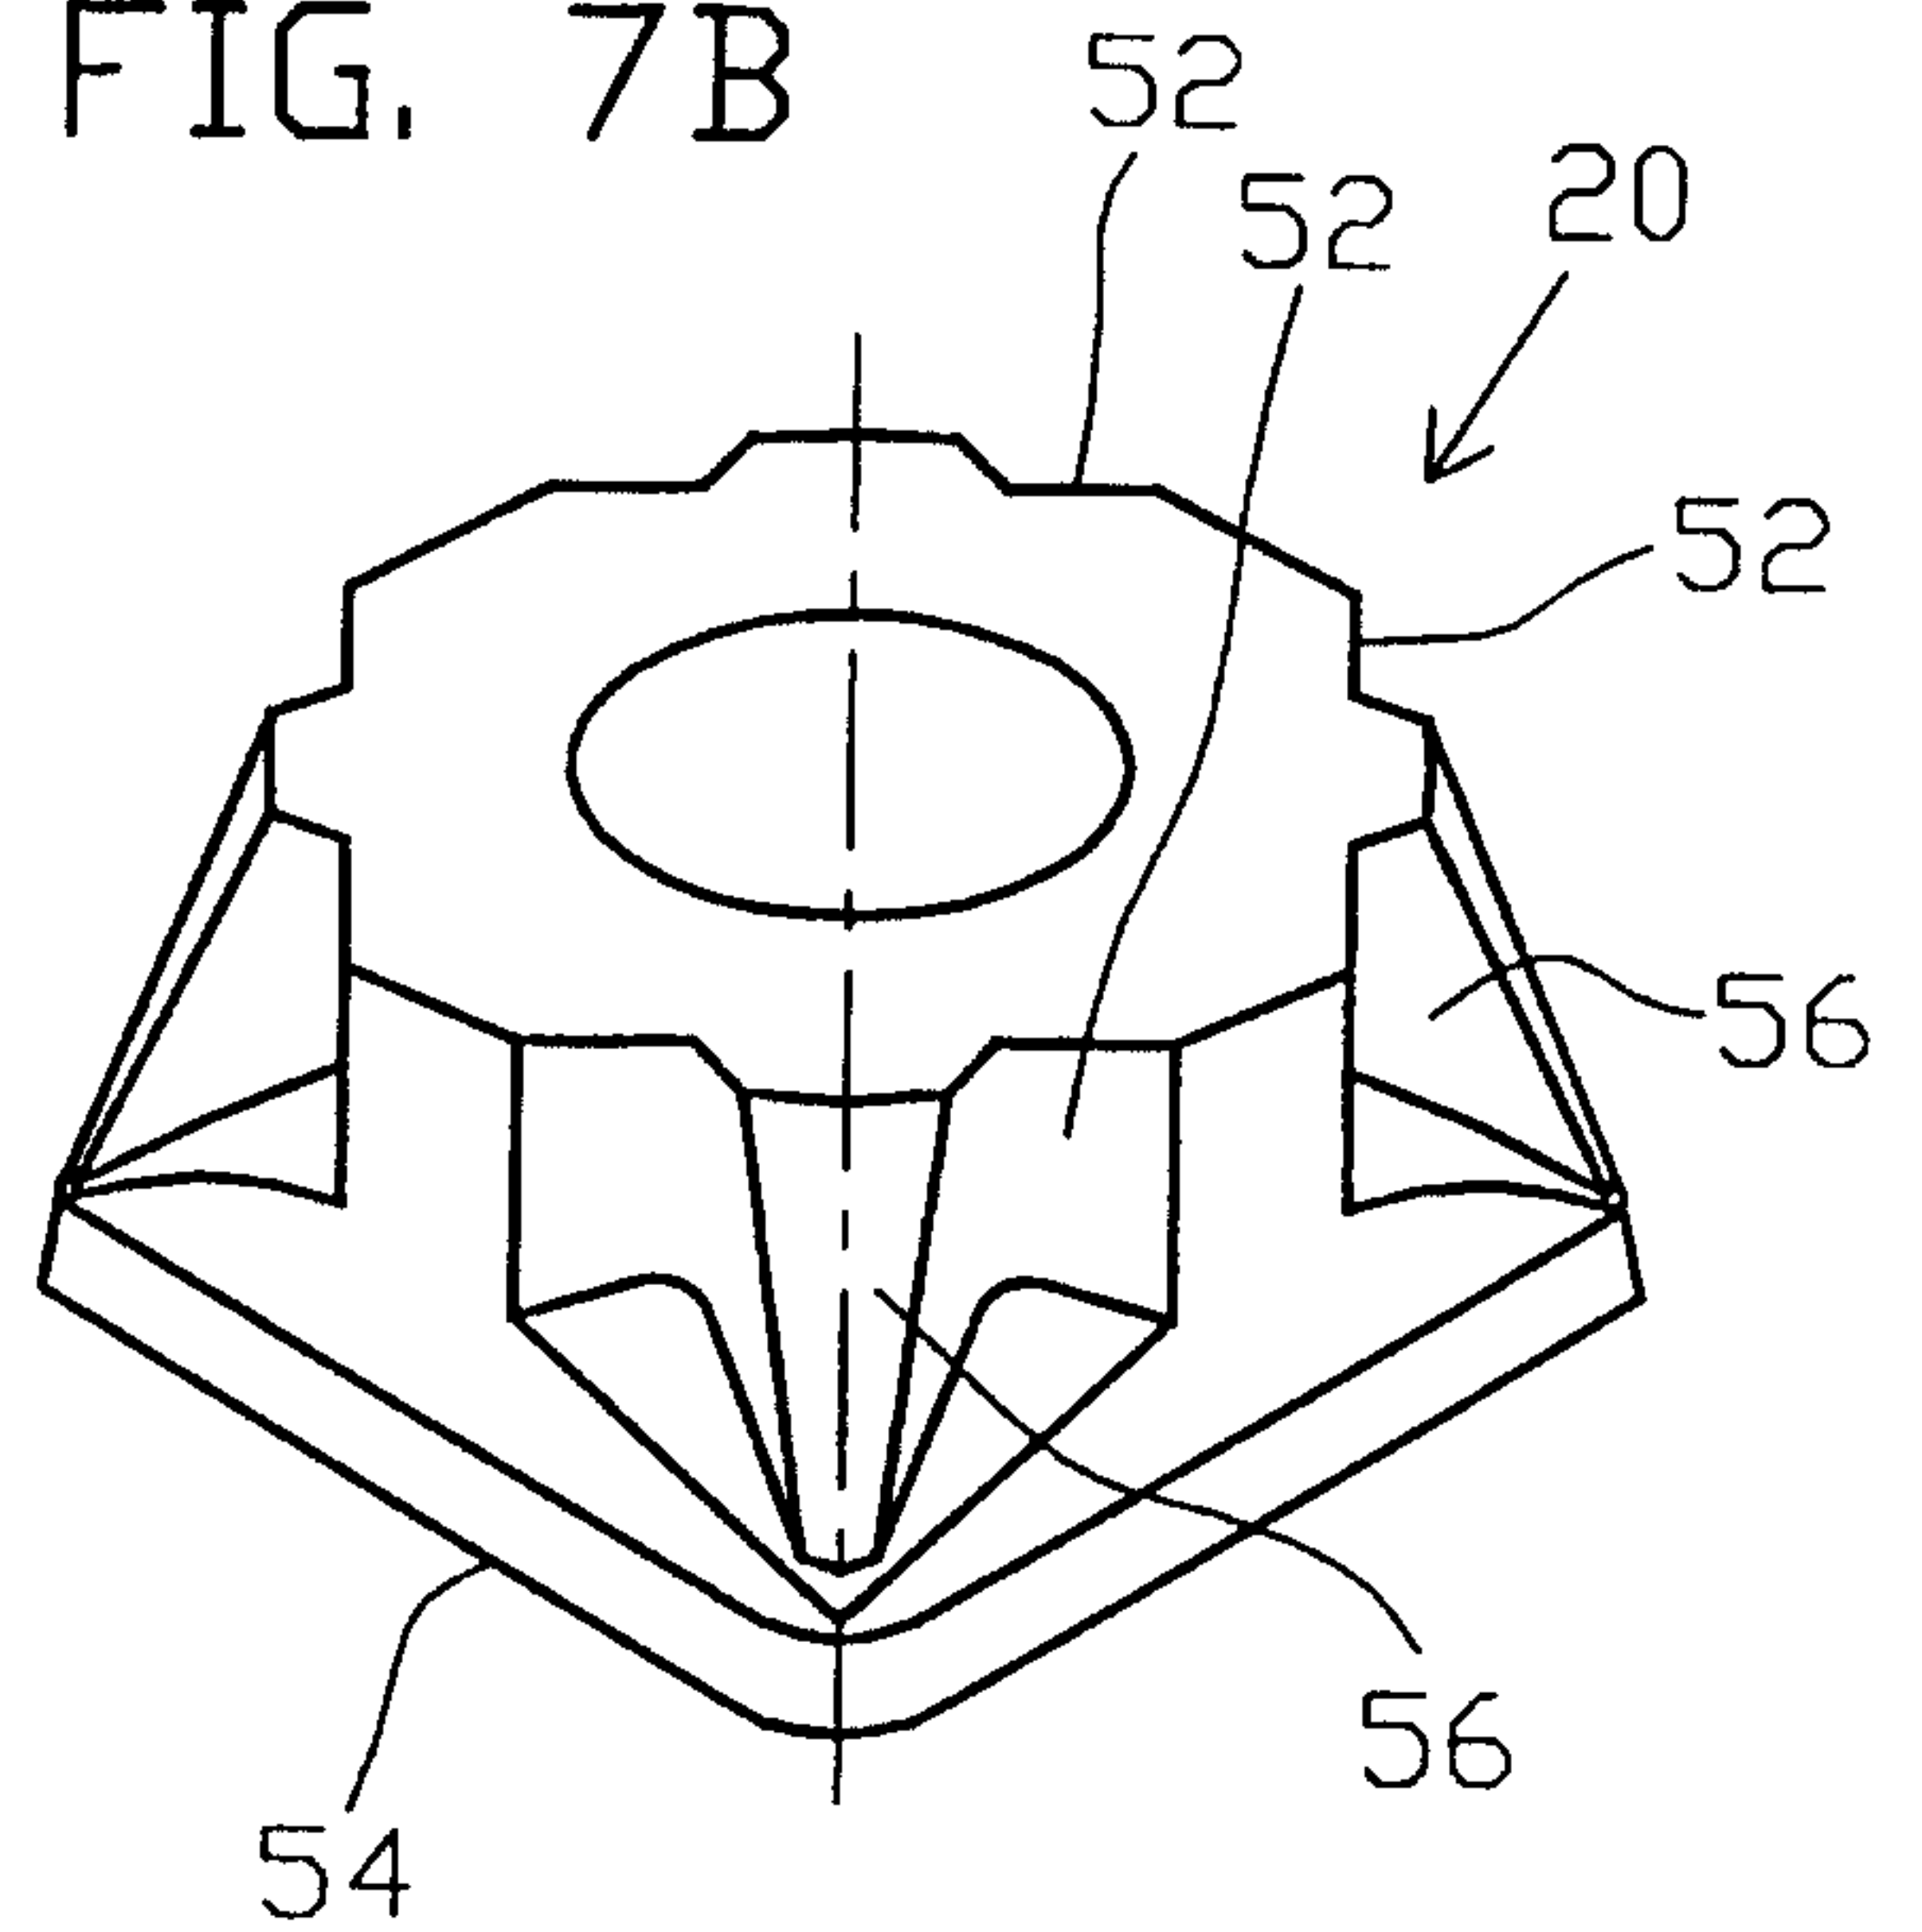


FIG. 7C

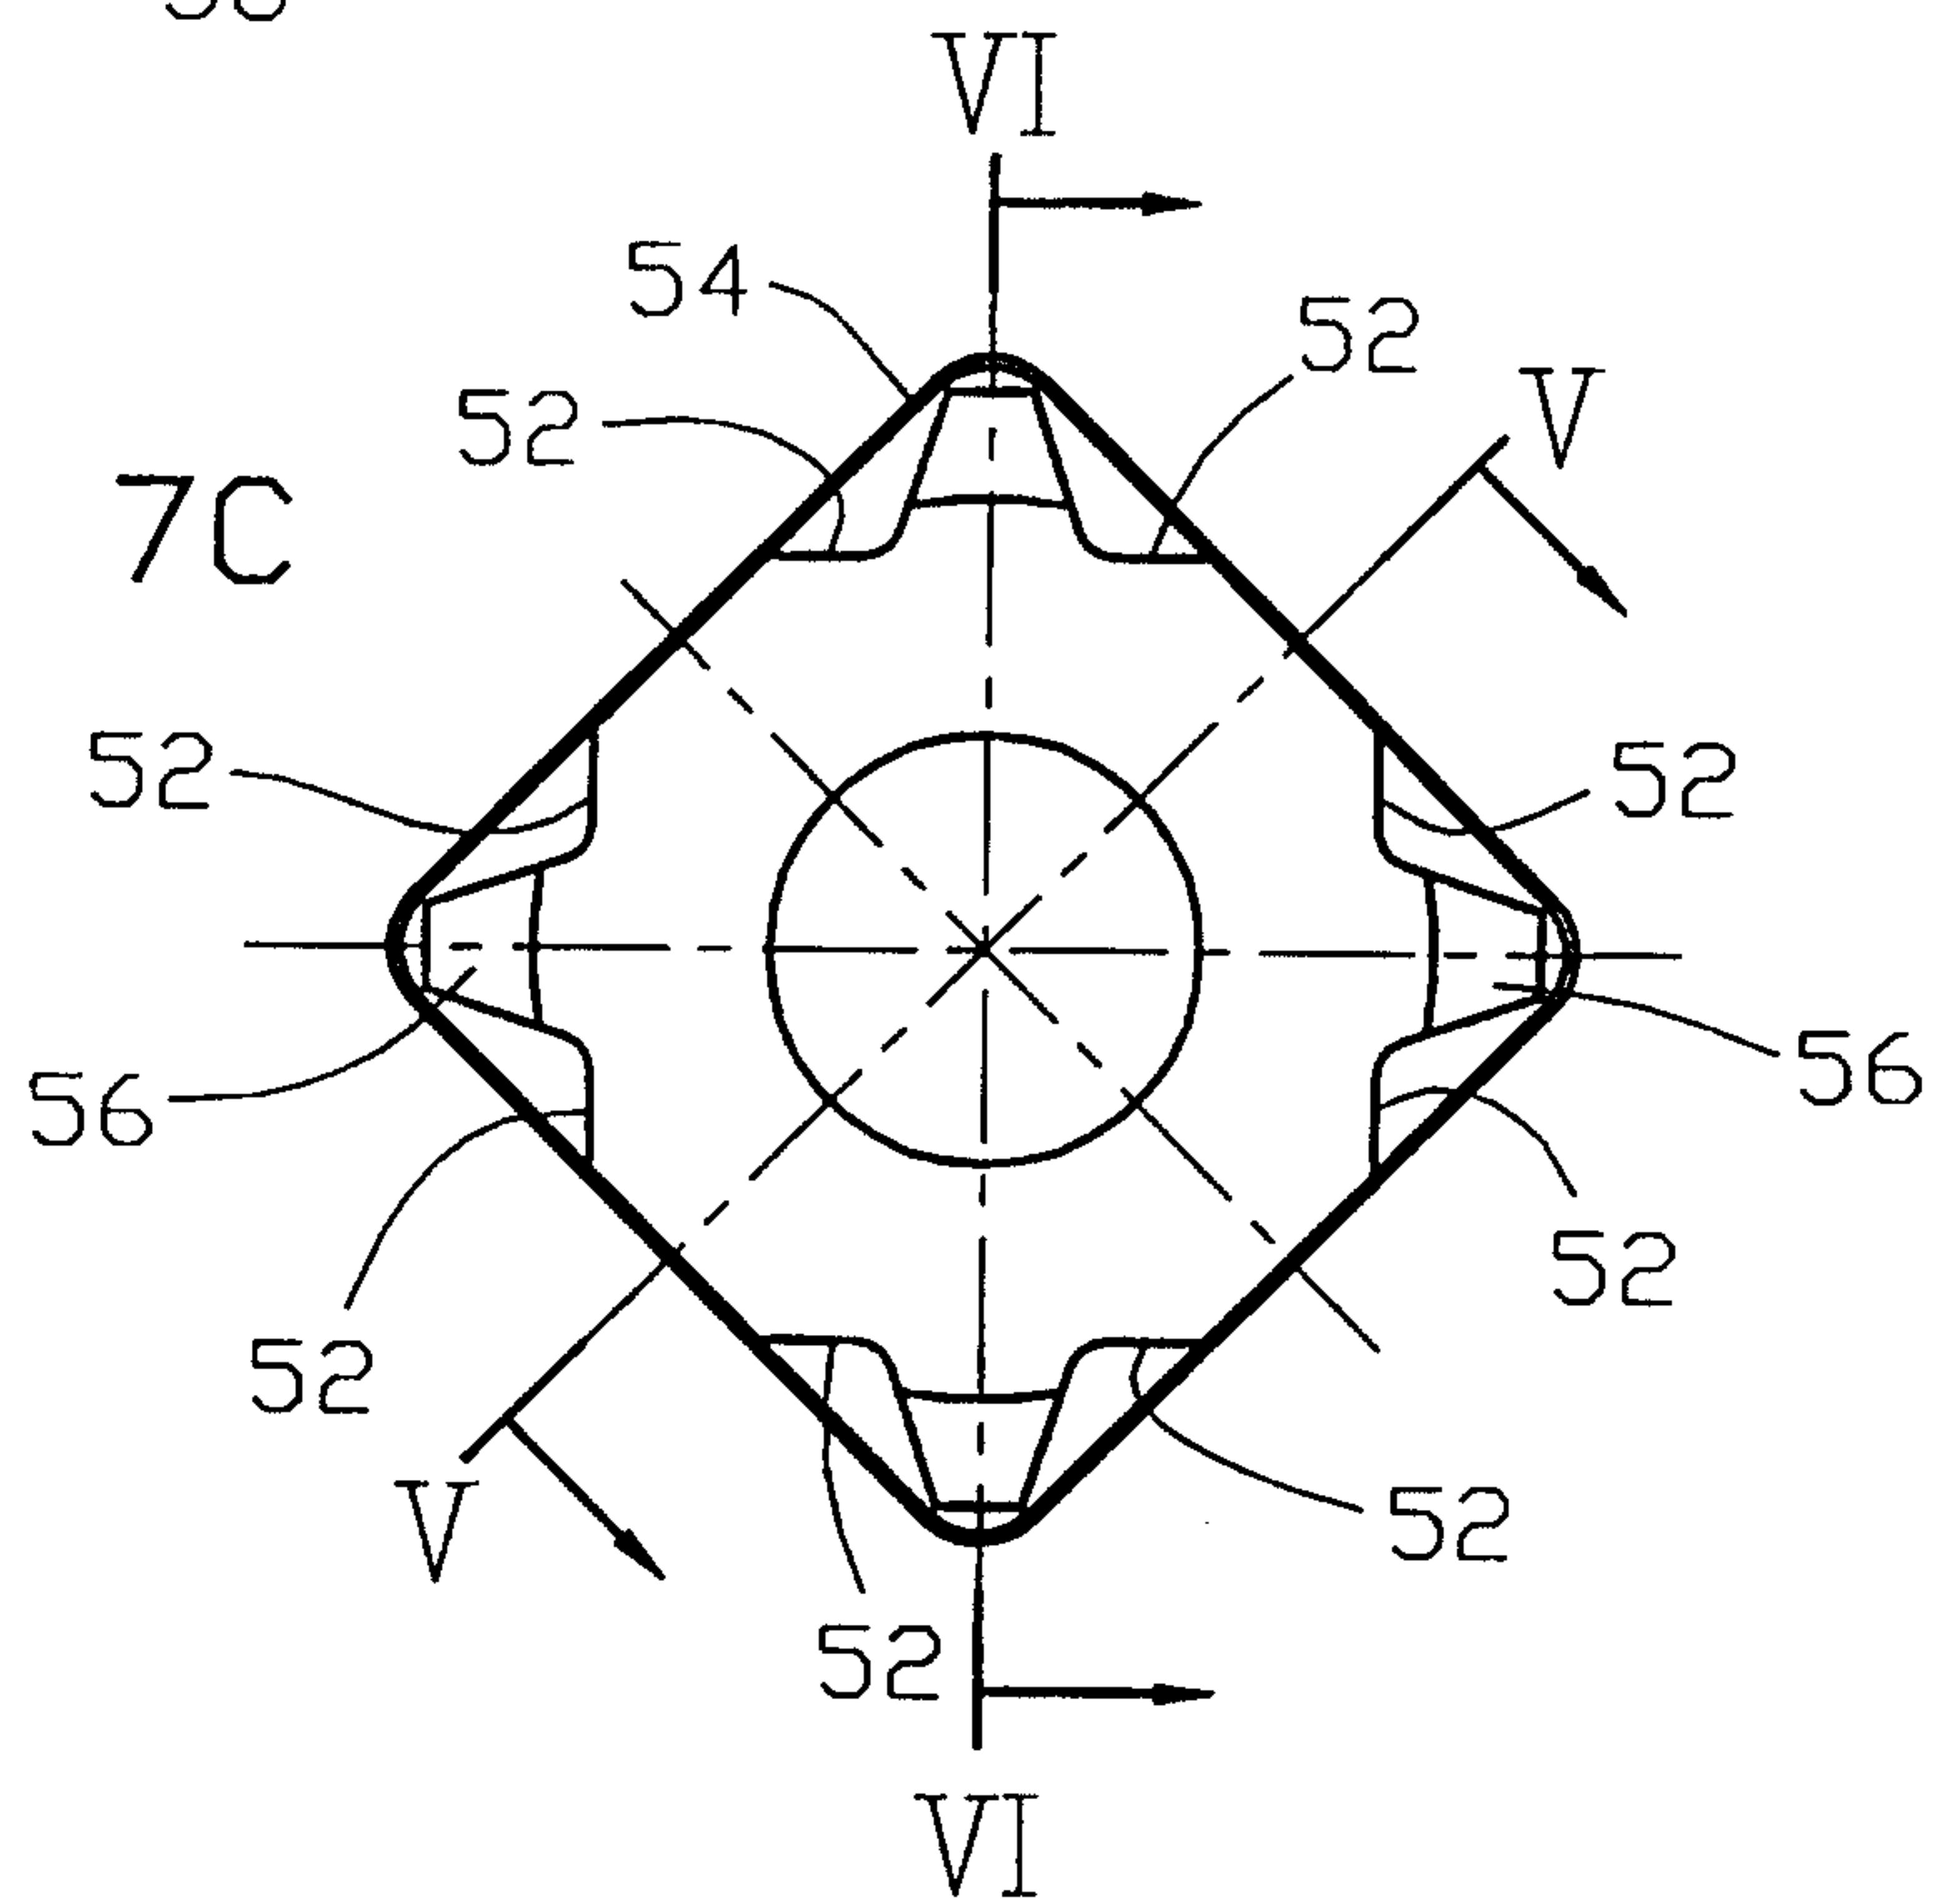


FIG. 7D


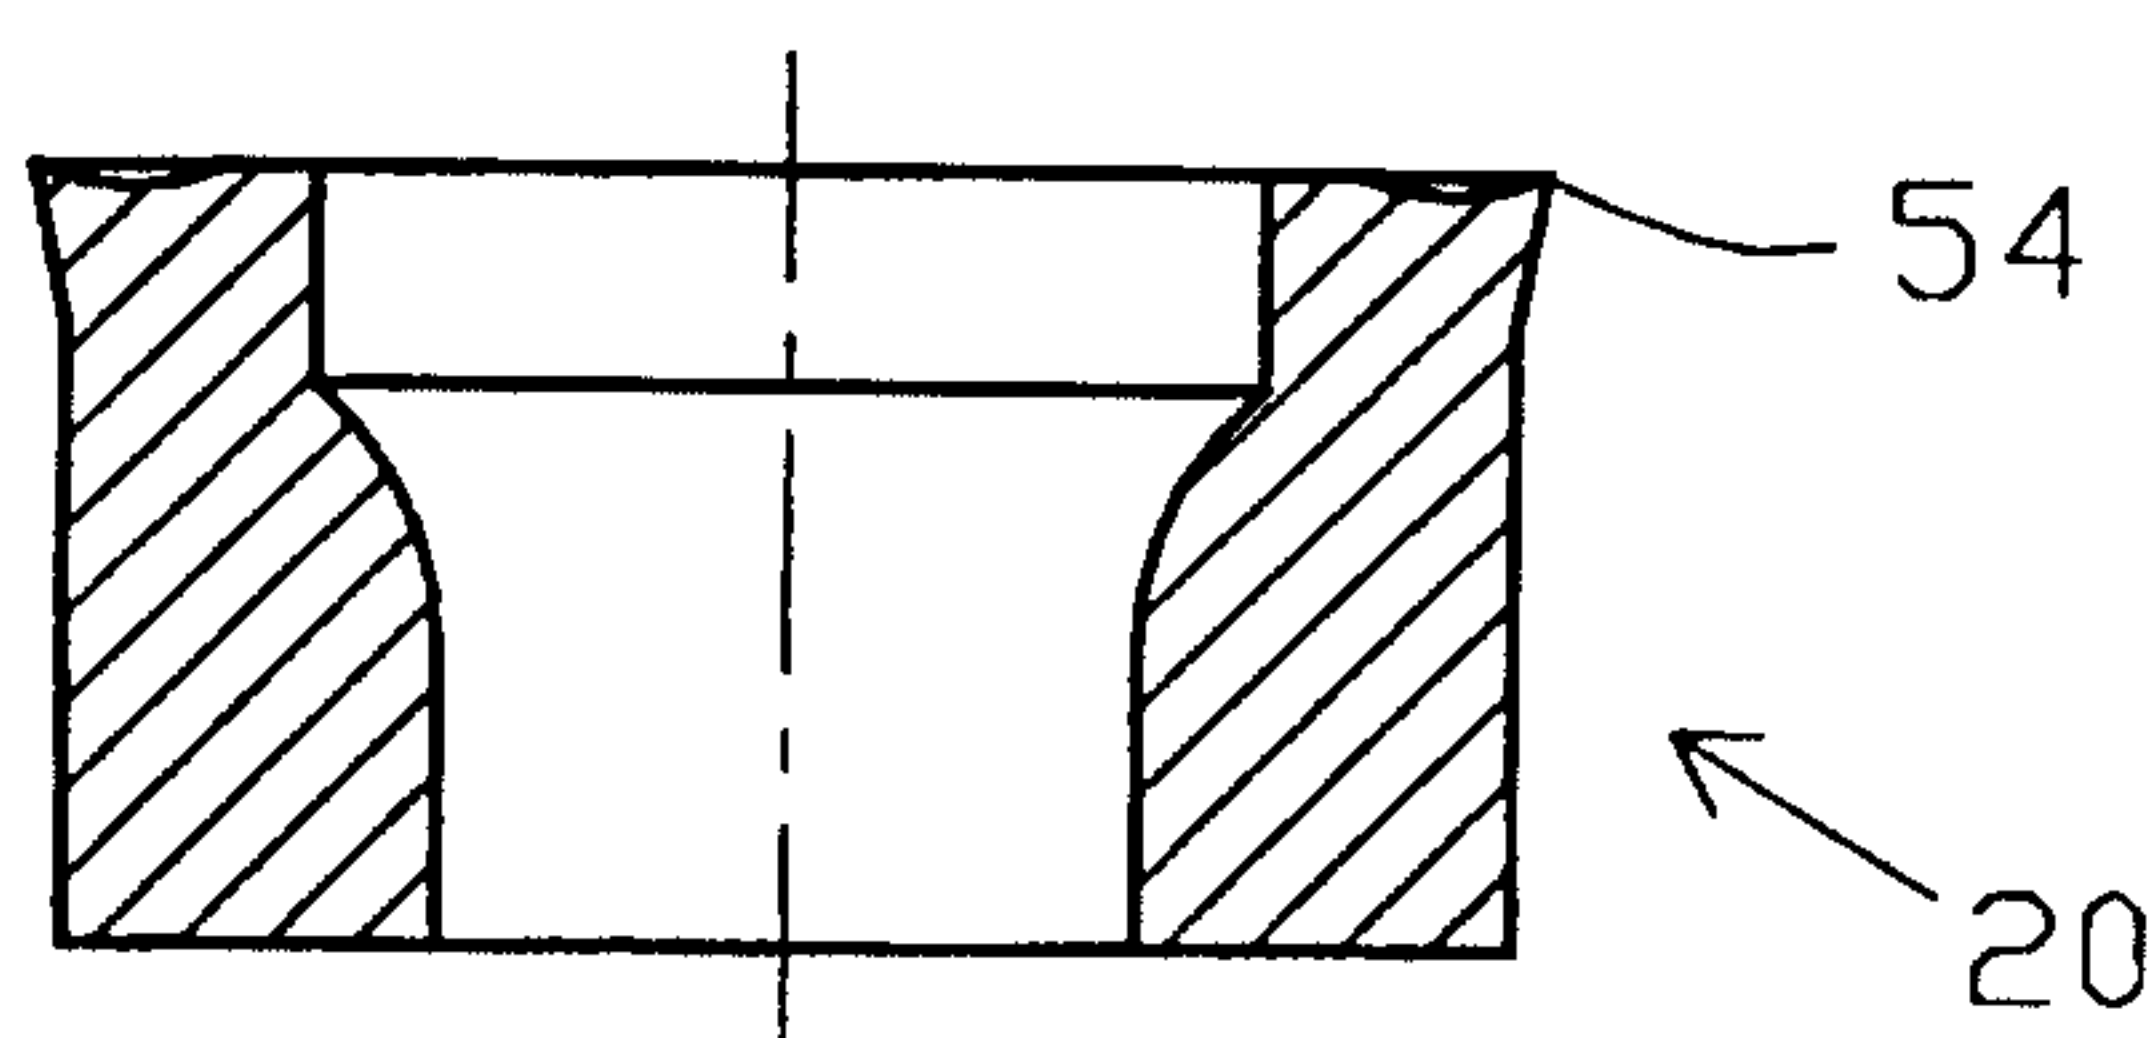


FIG. 7E

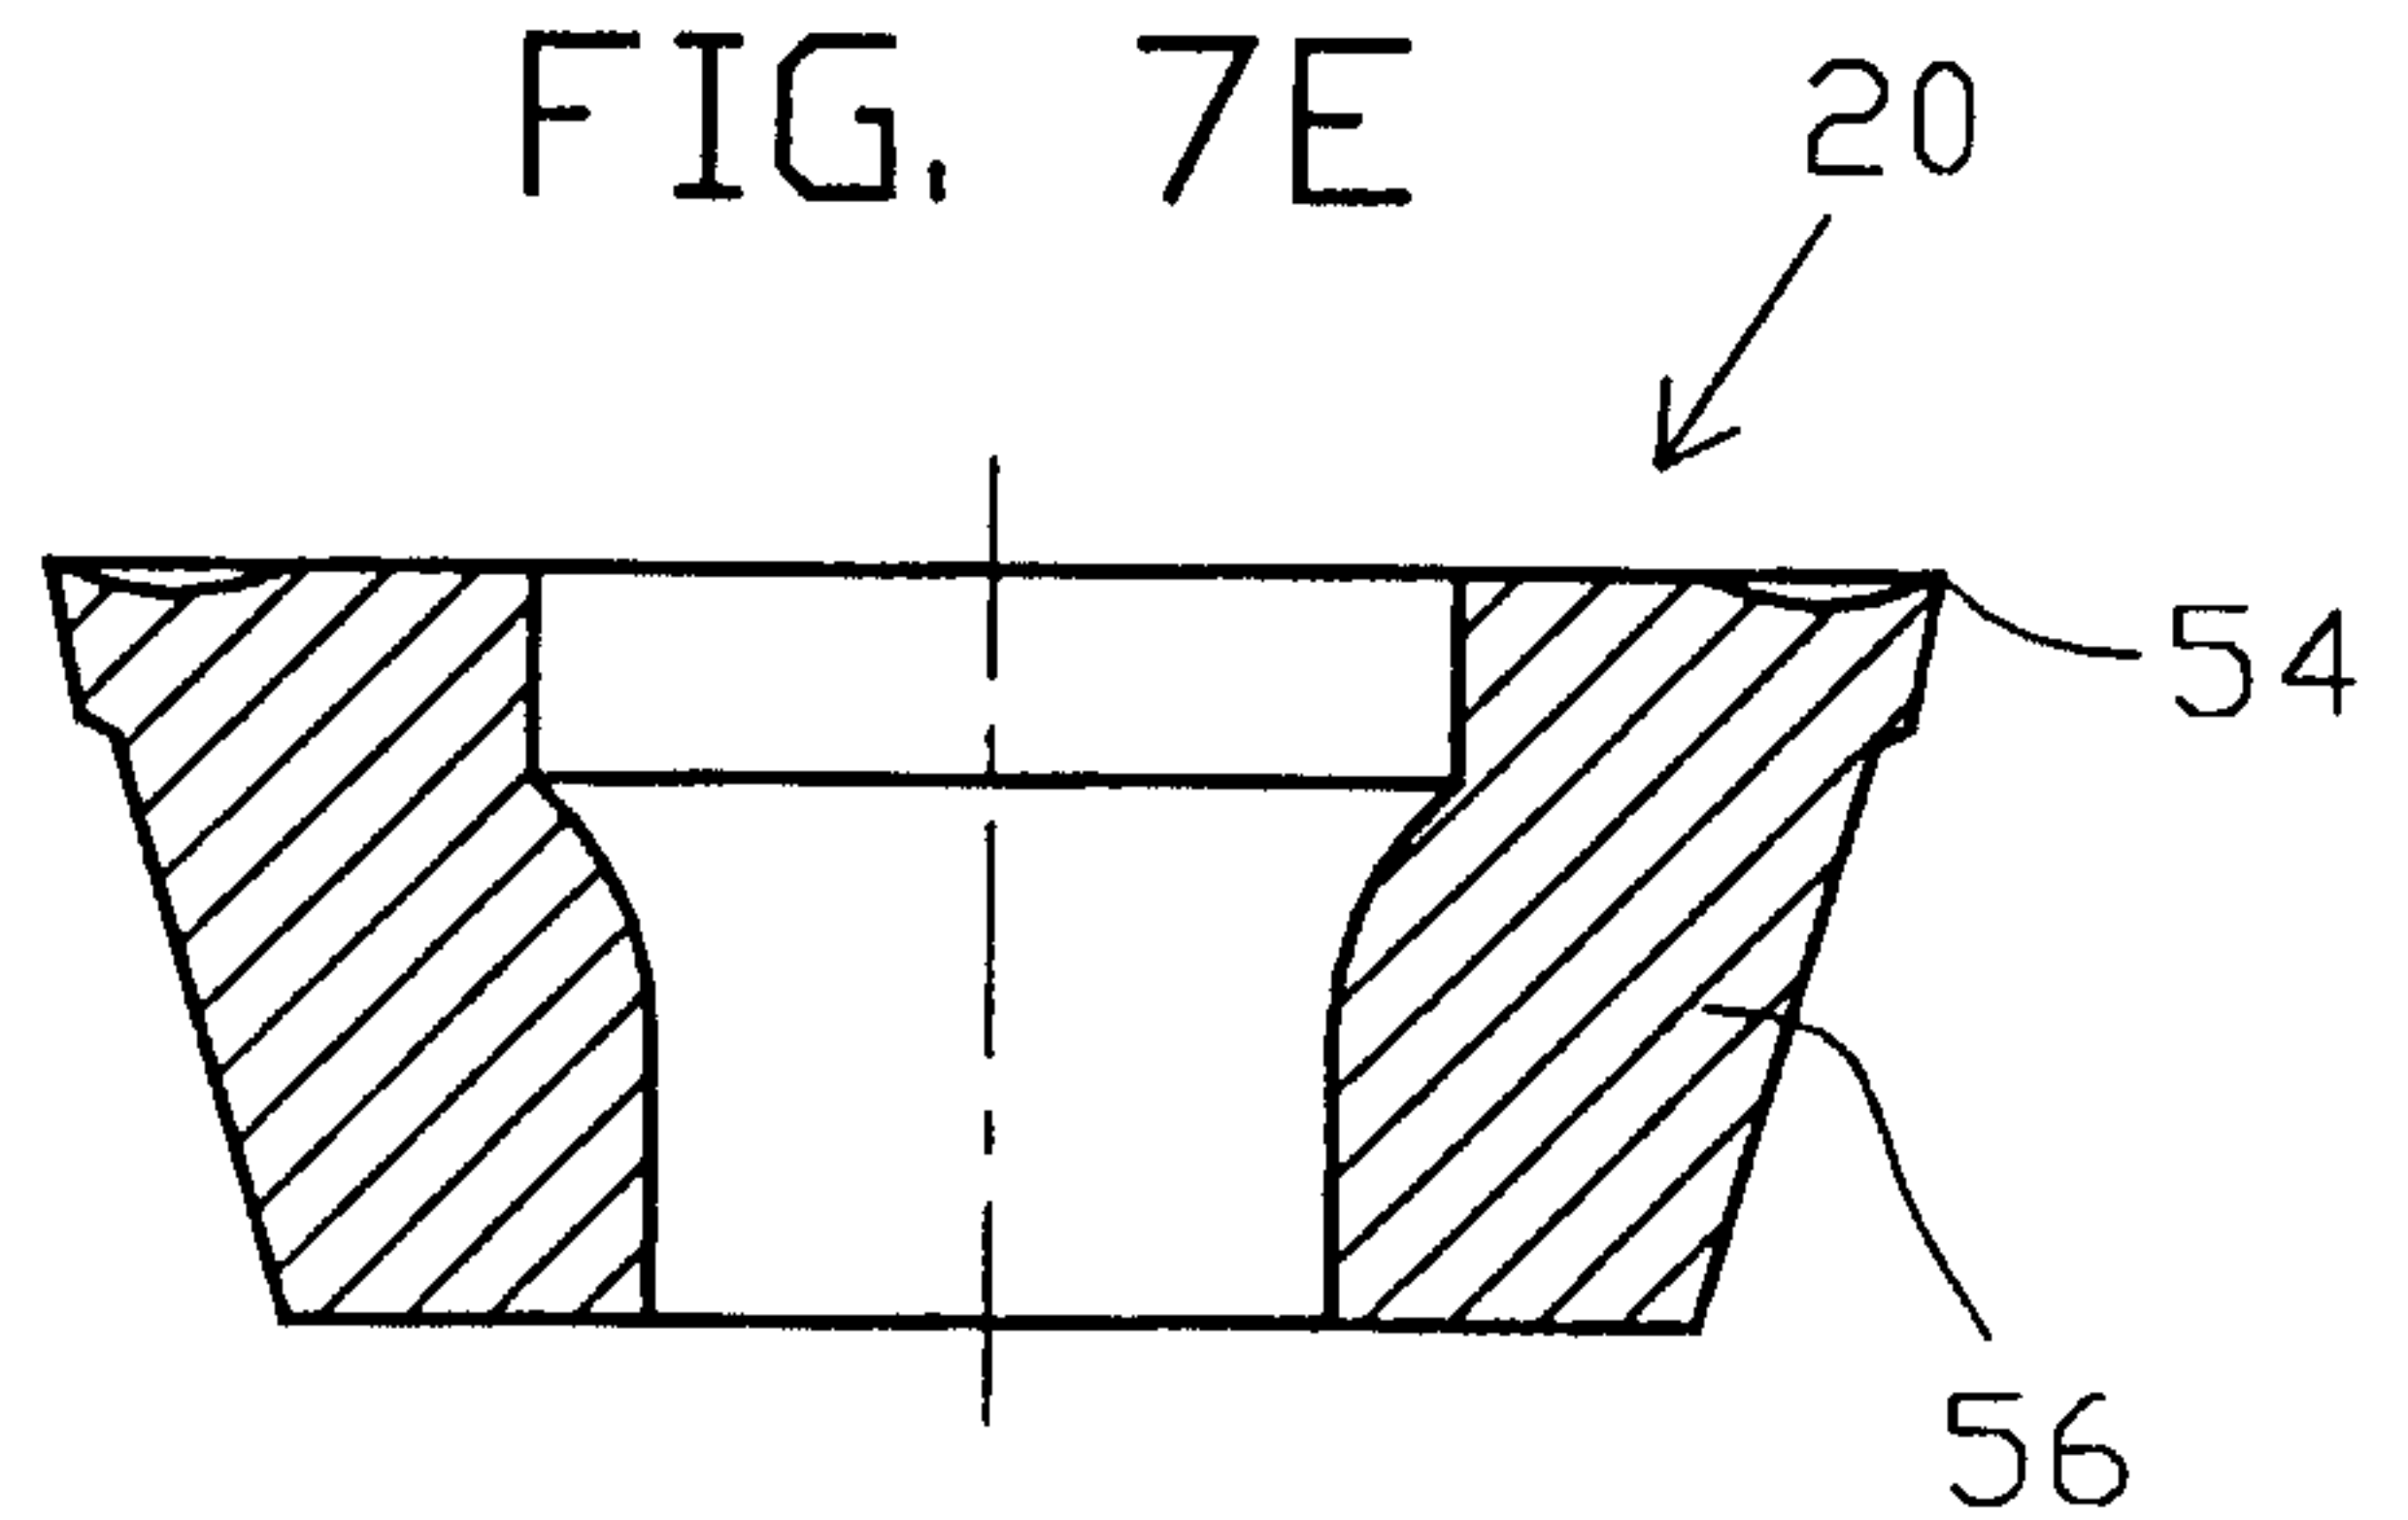

9/9

FIG. 9A


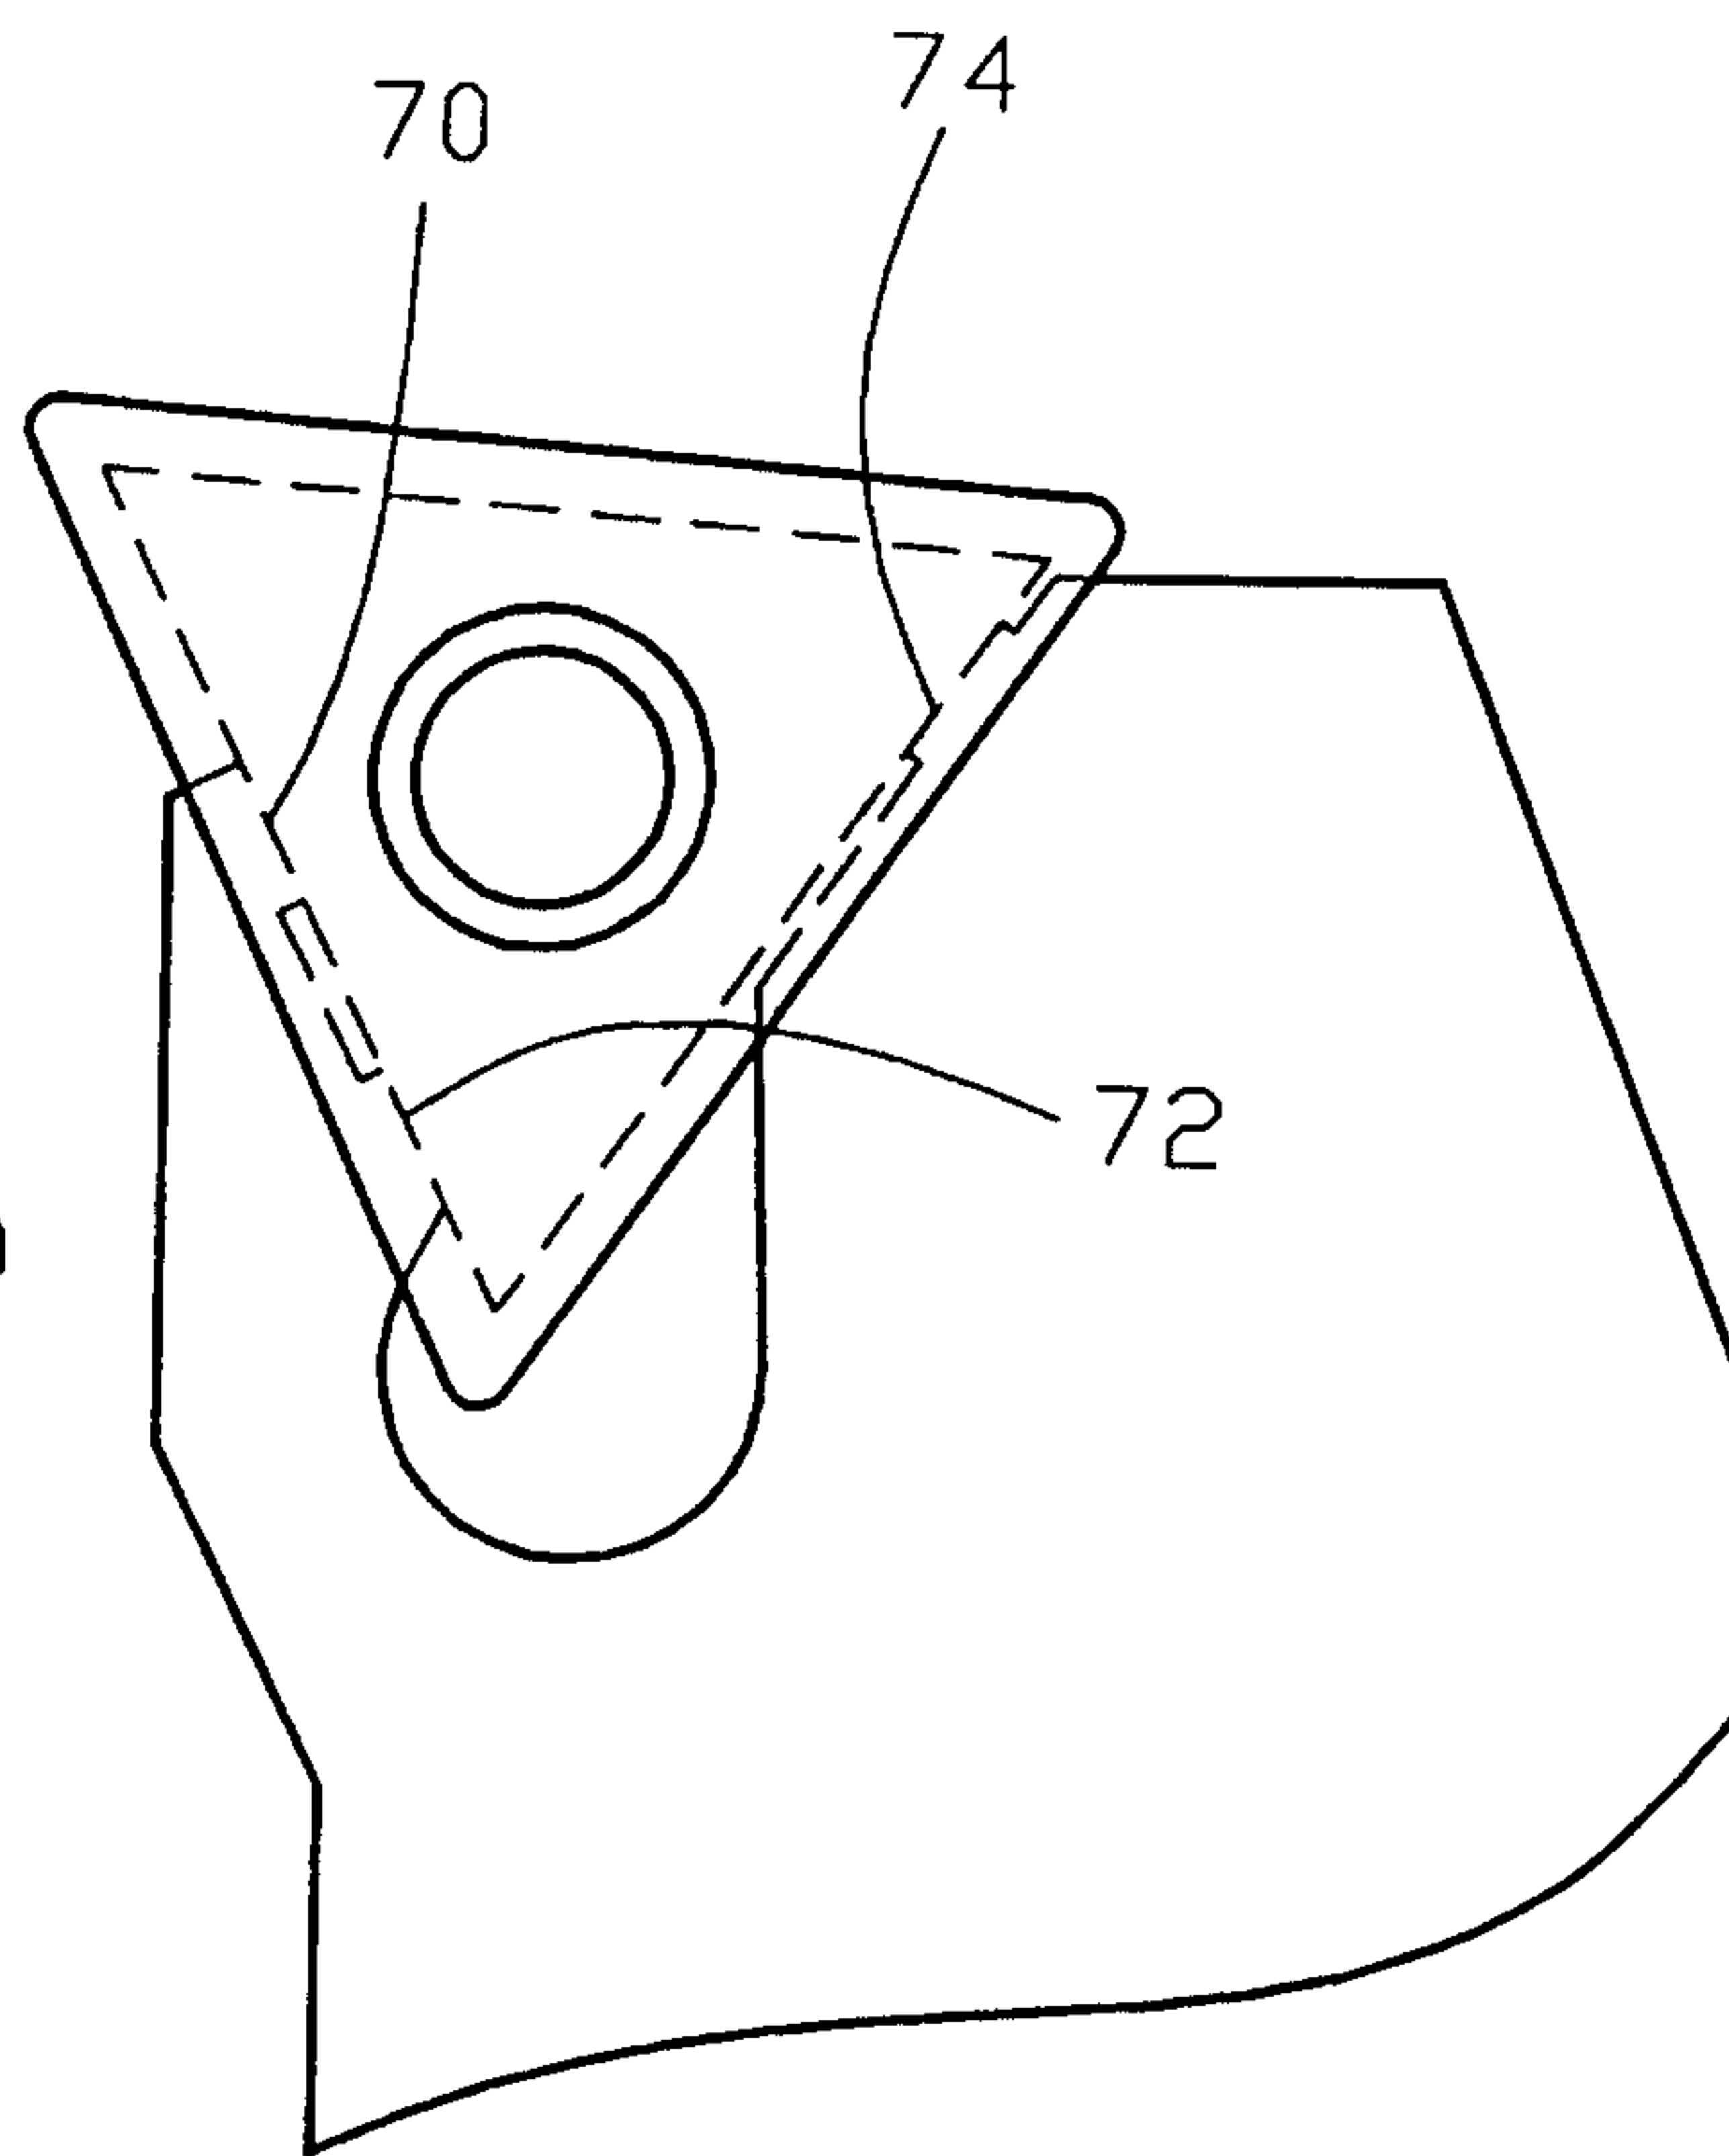


FIG. 9B

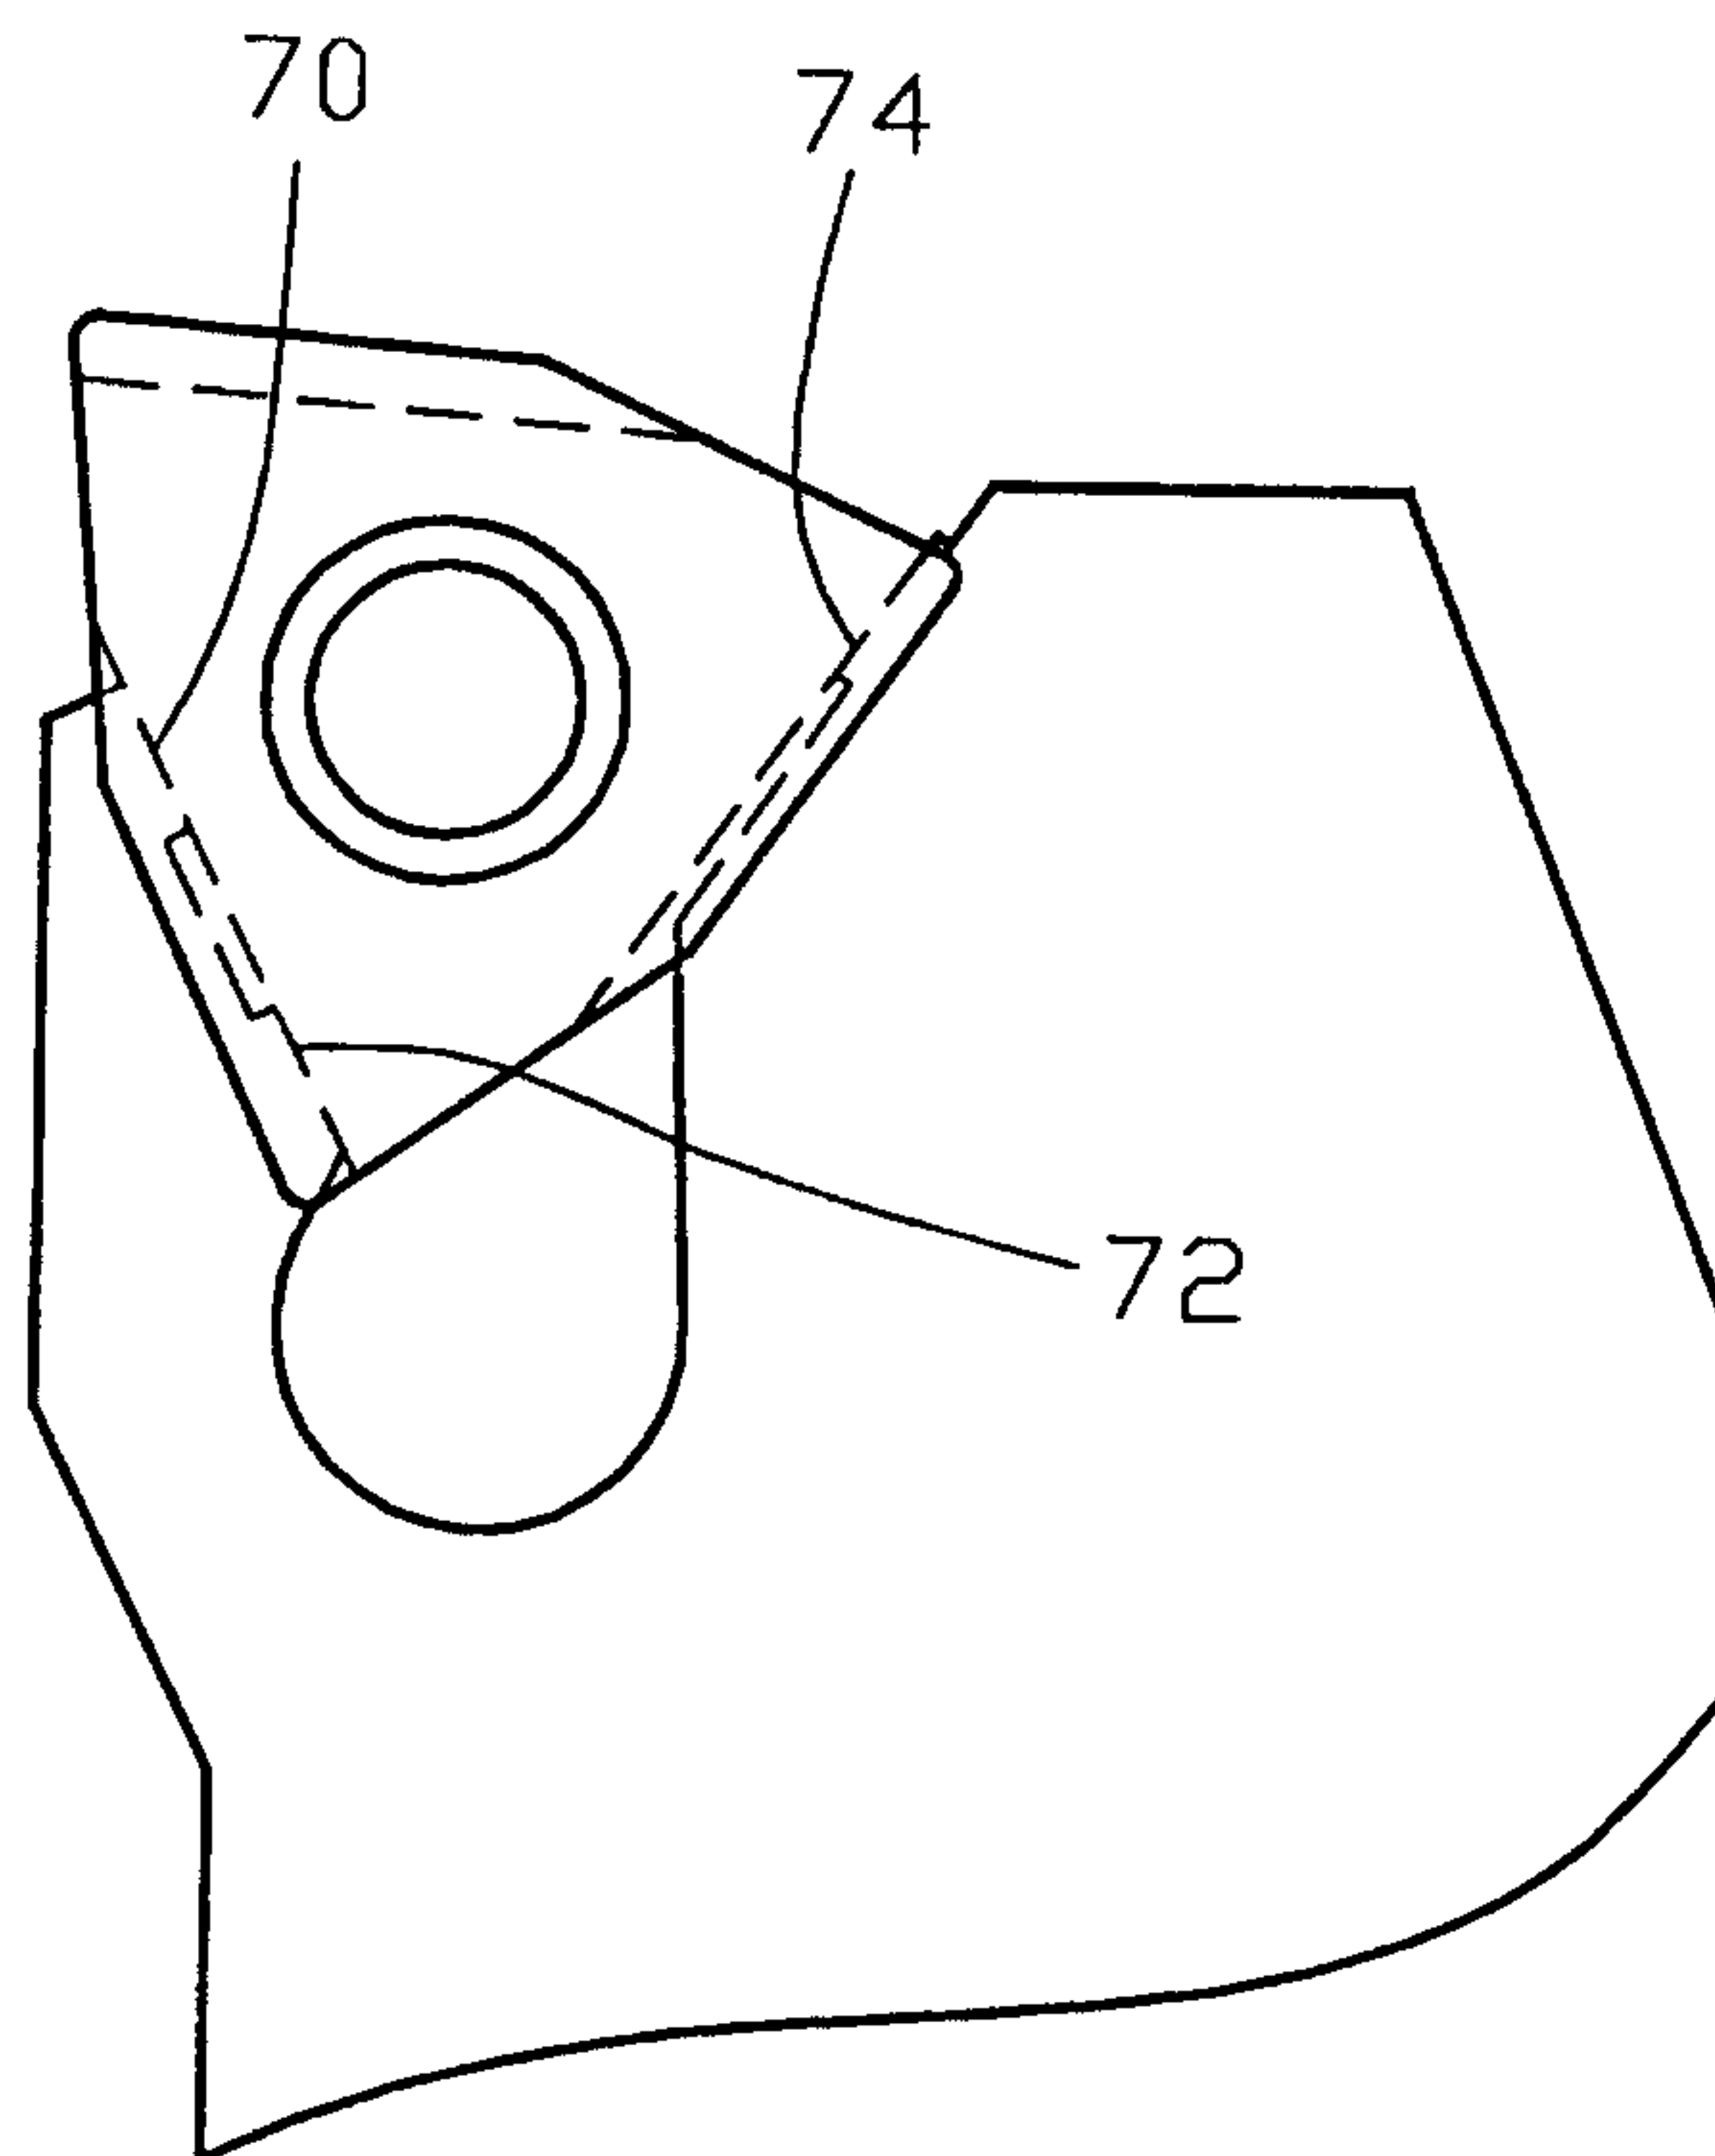

WO 99/47298

8/9

FIG. 8A

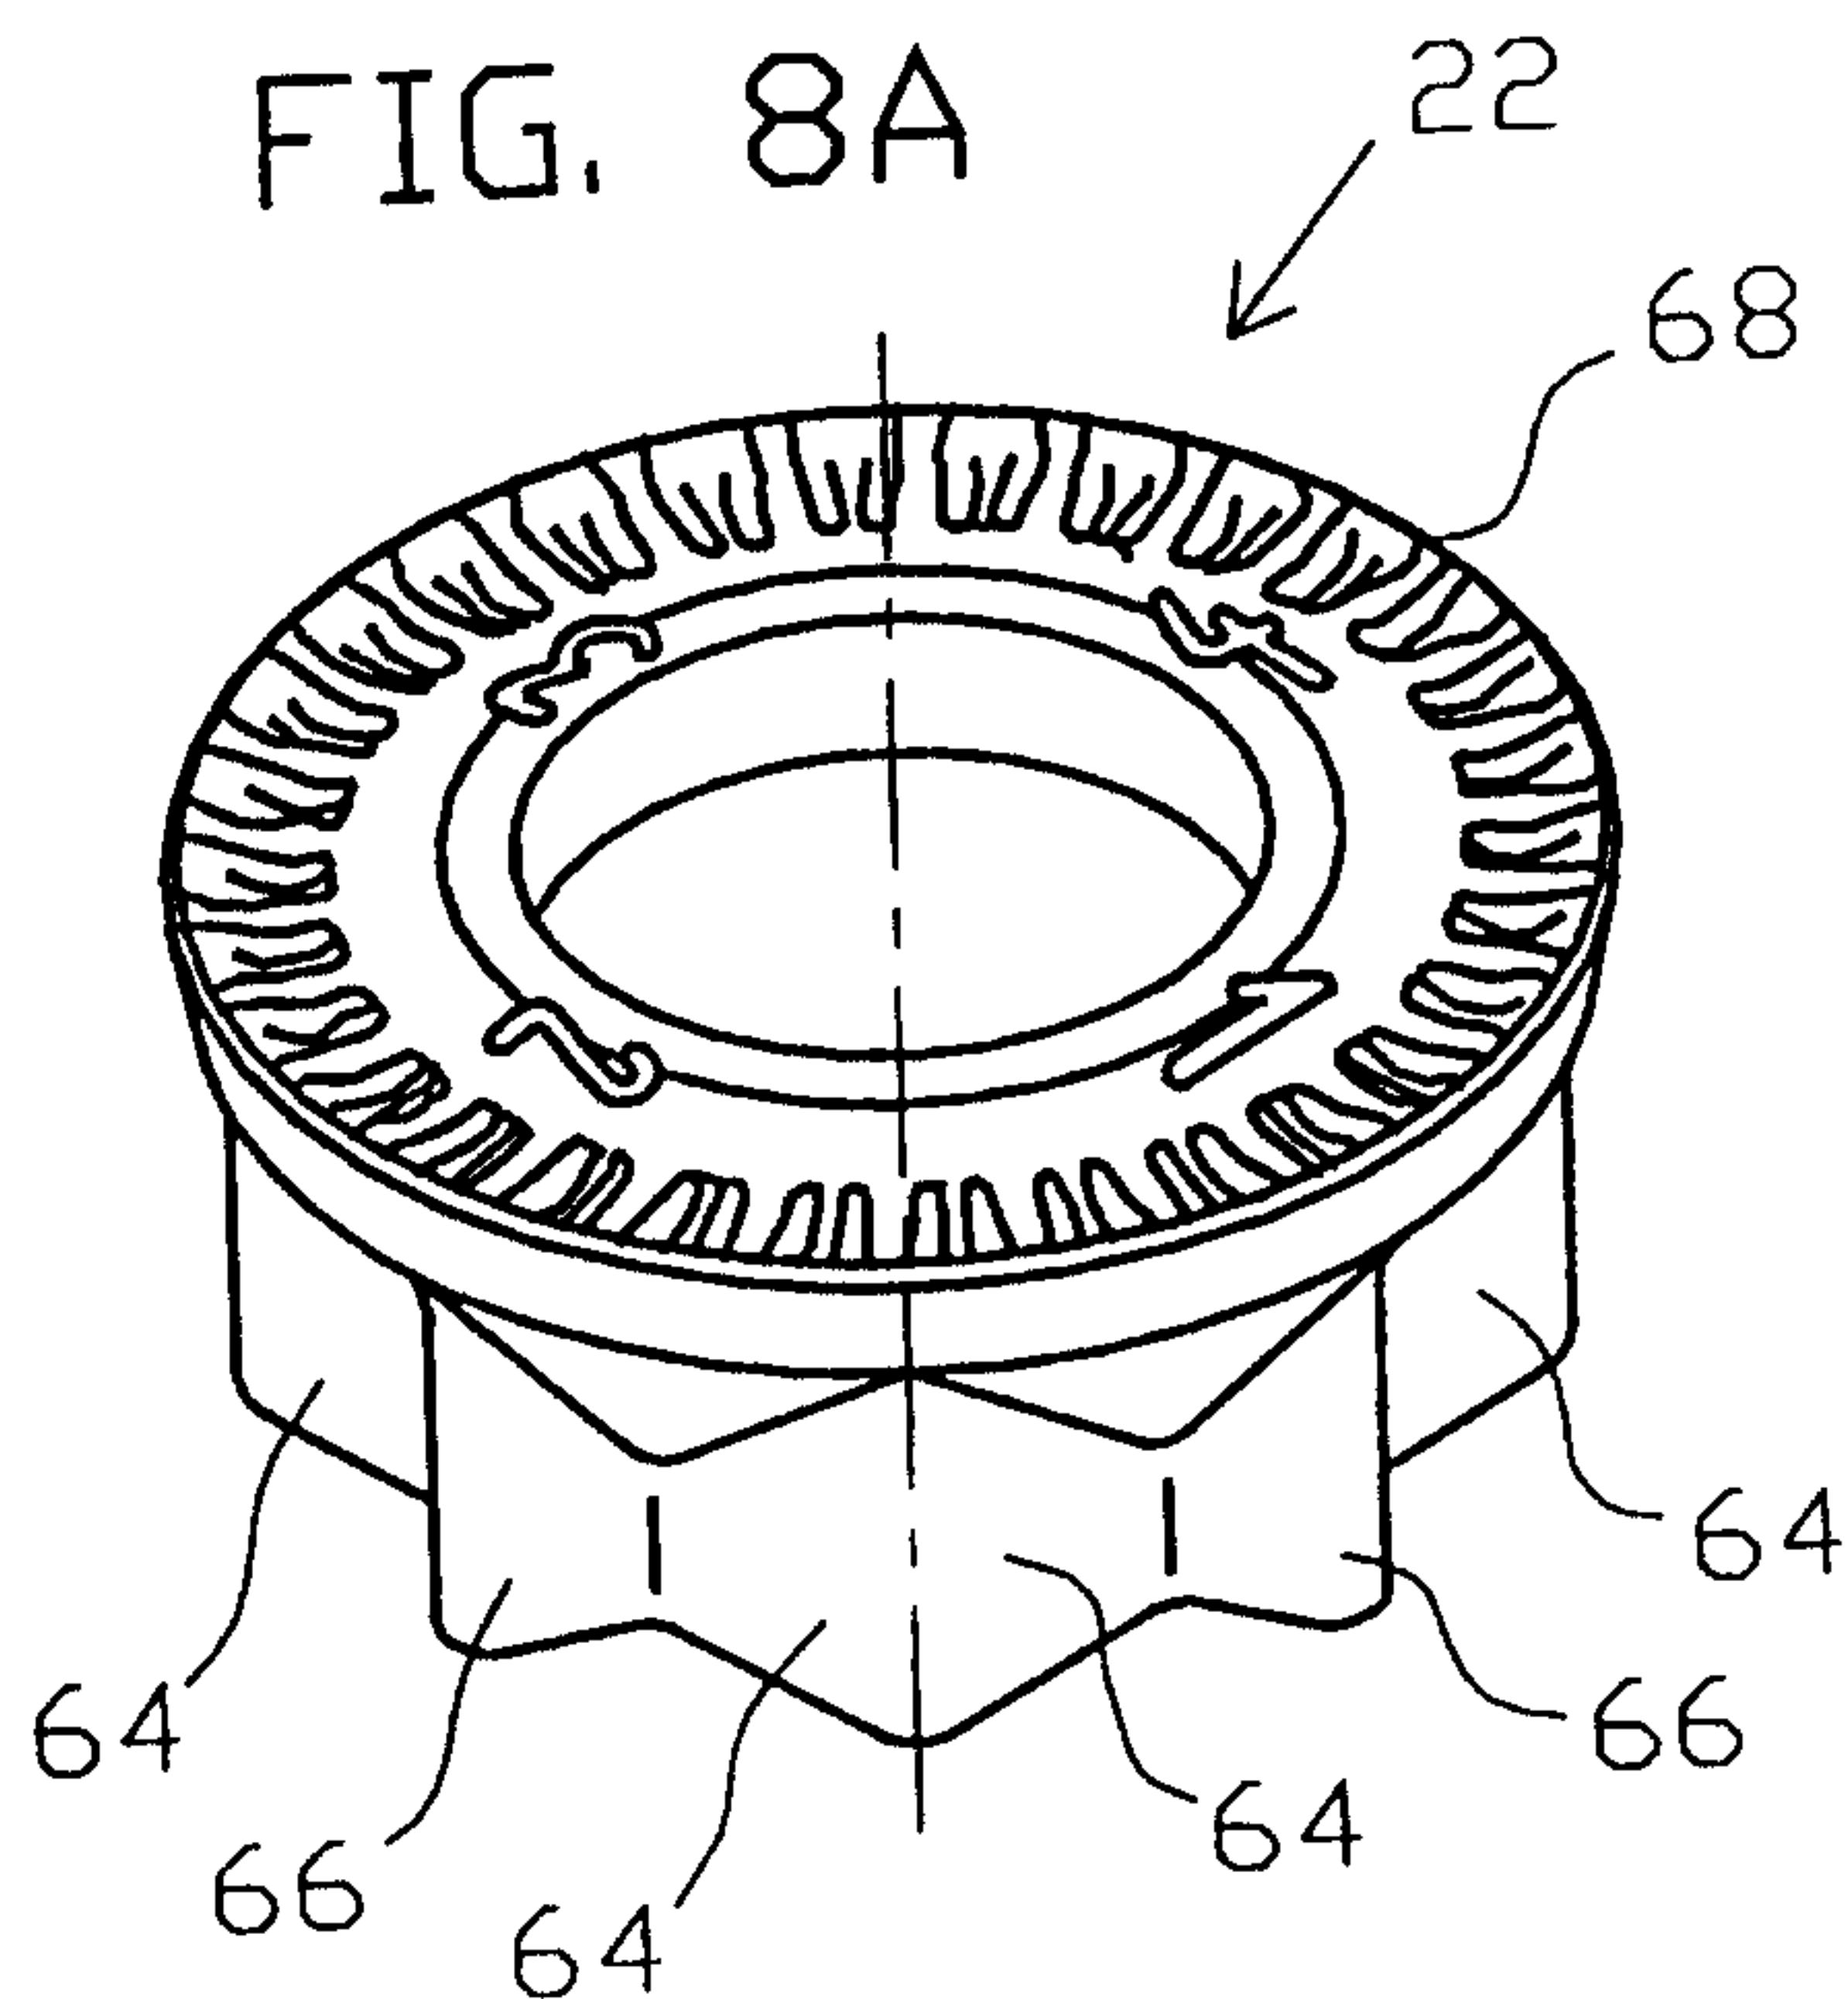


FIG. 8B

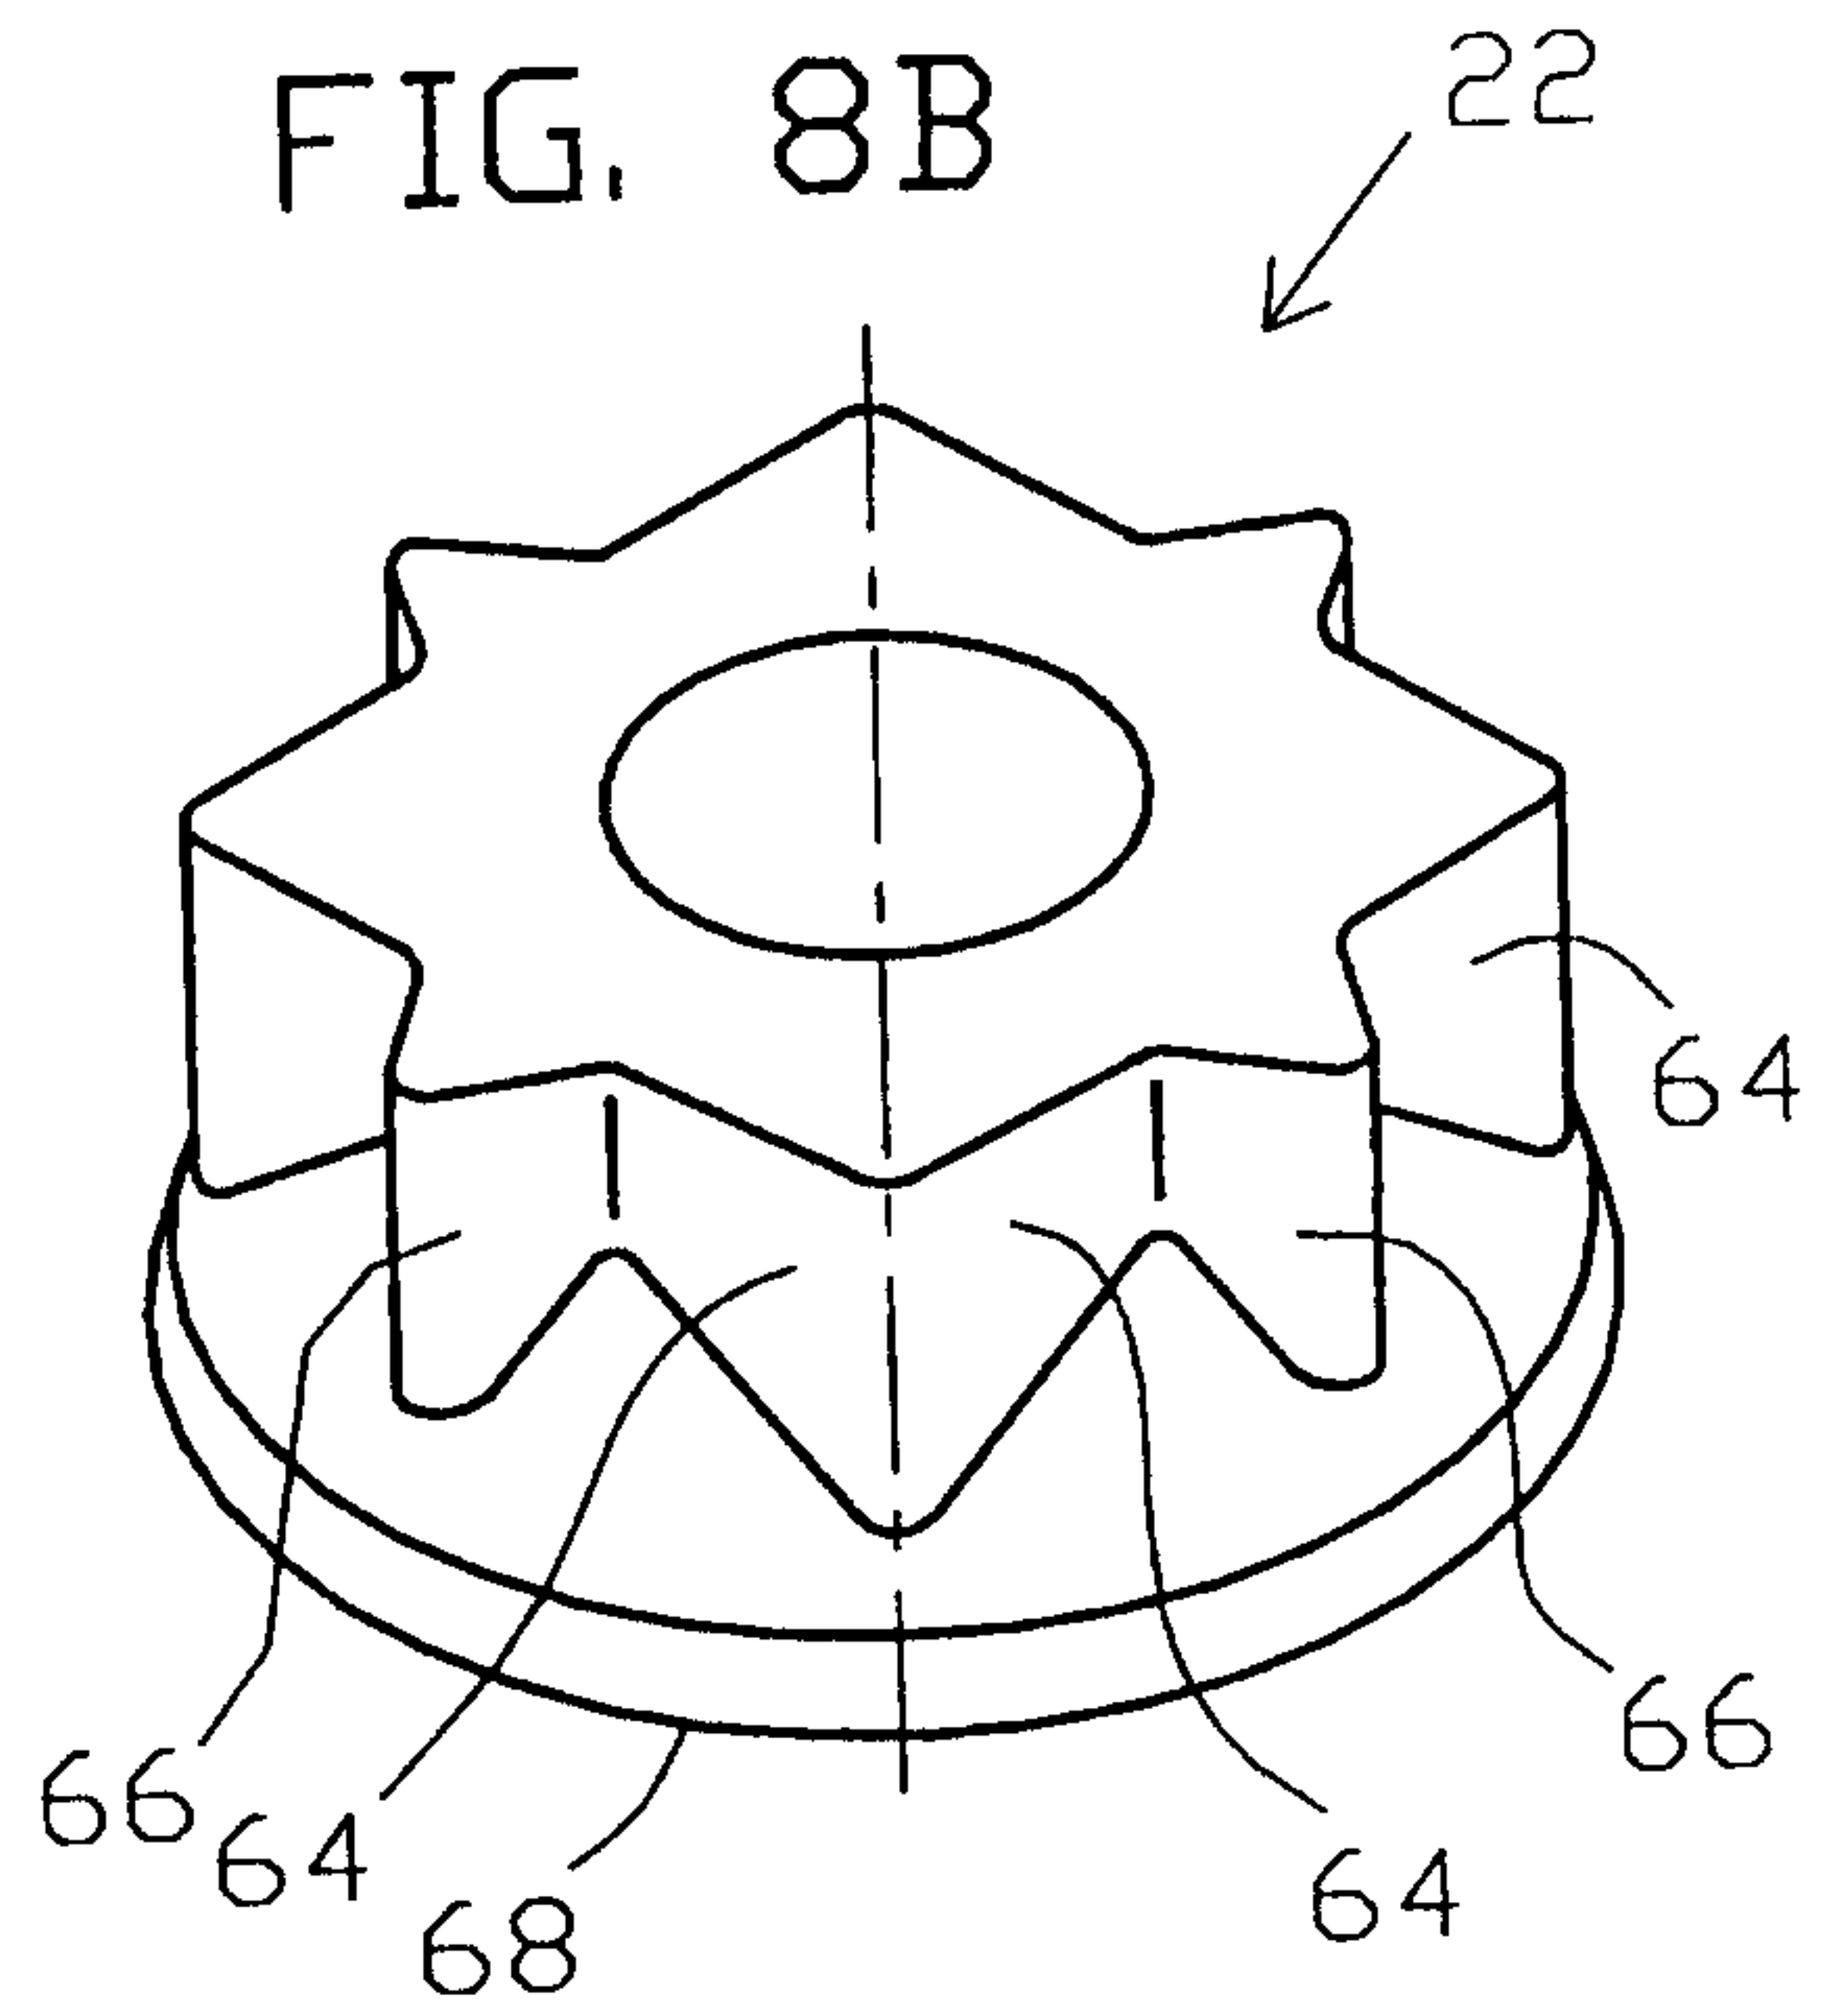


FIG. 8C

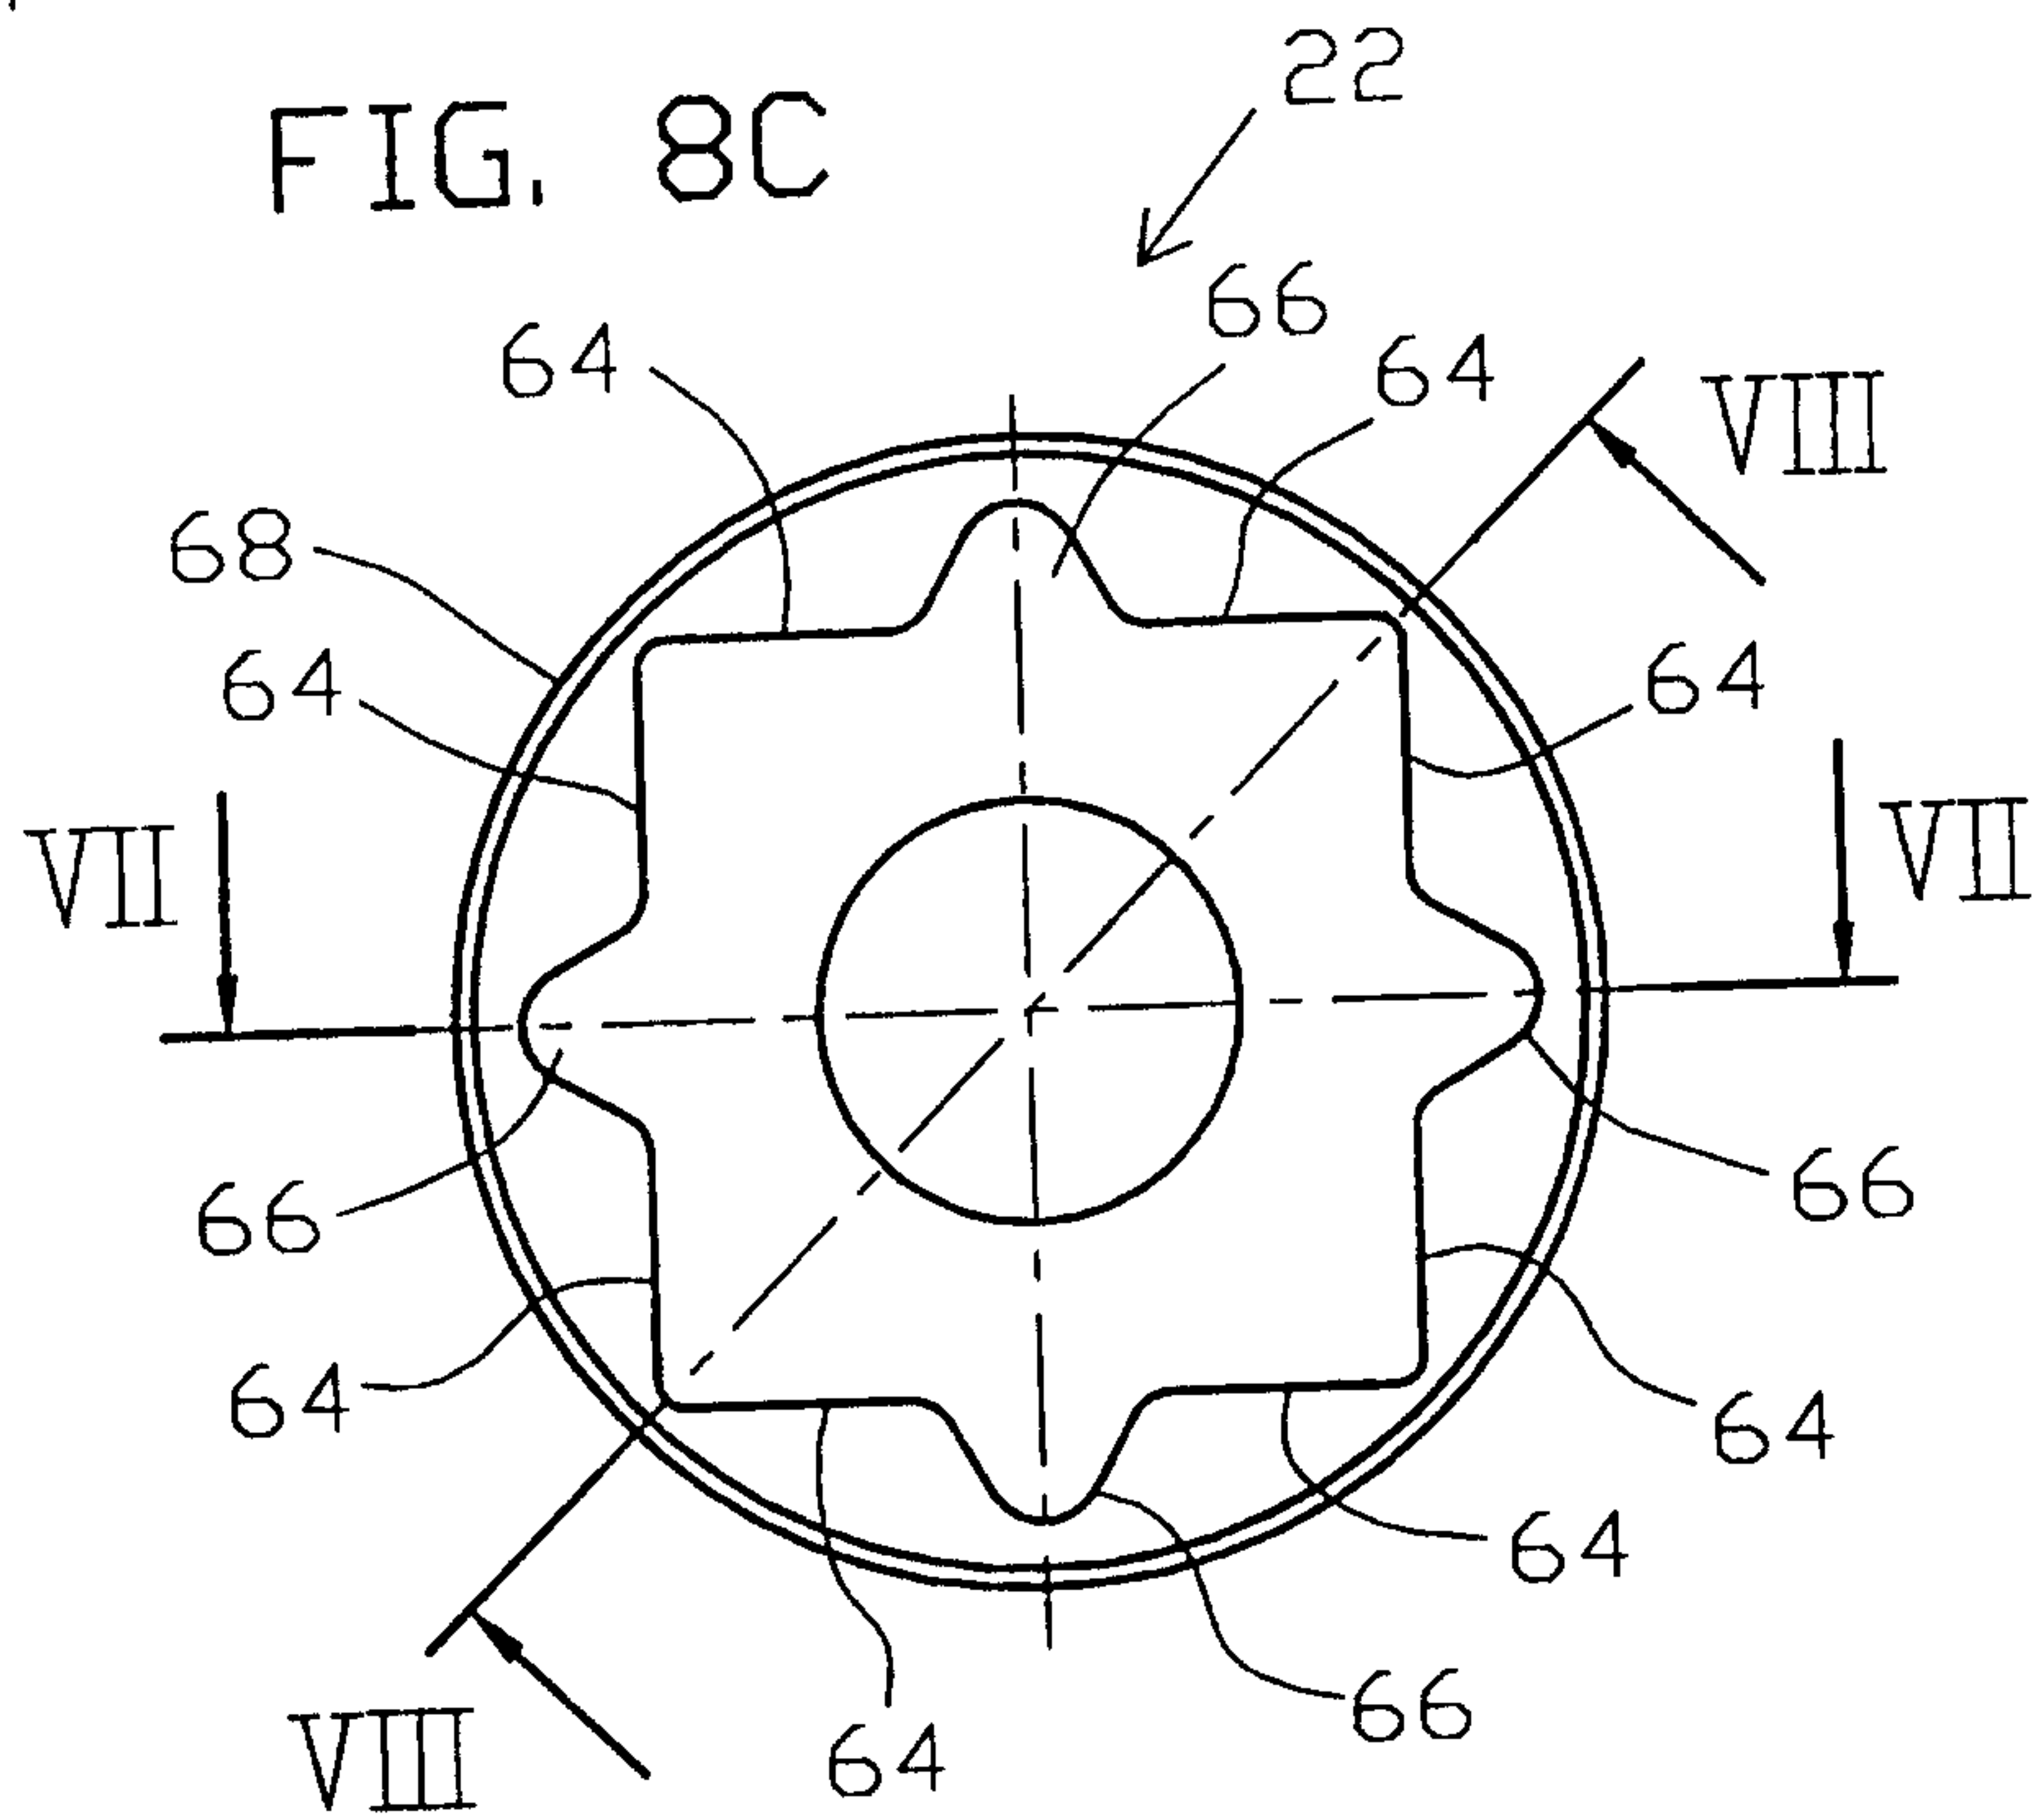


FIG. 8D

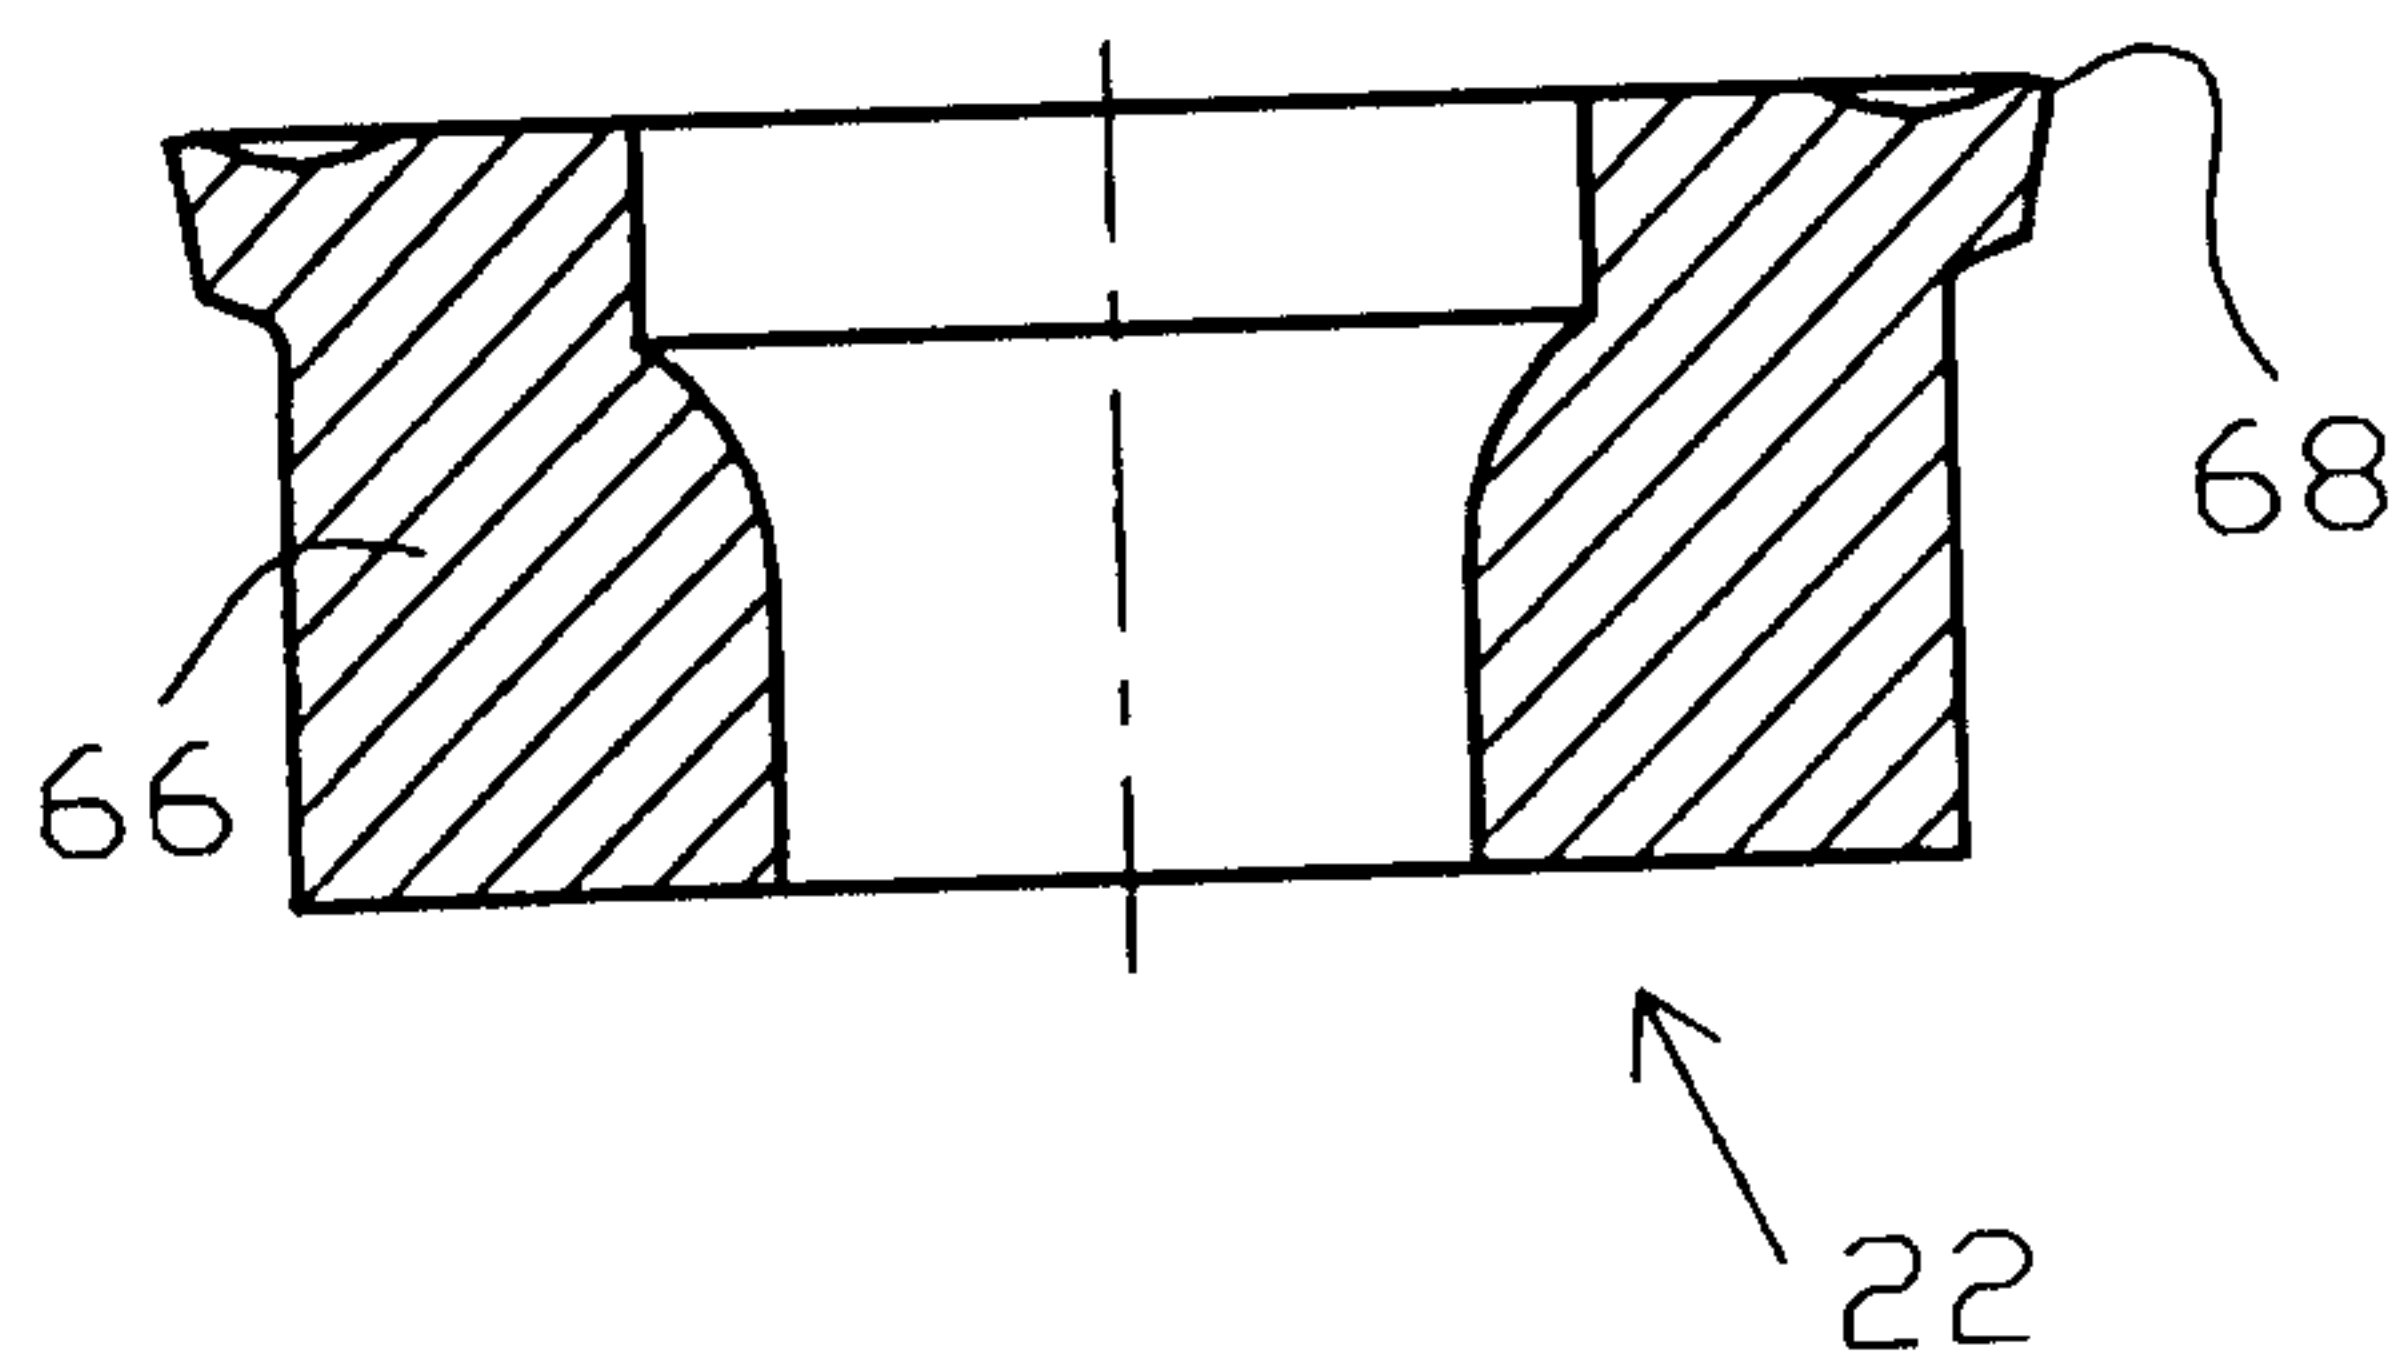


FIG. 8E

