



(51) International Patent Classification:

H04N 1/00 (2006.01) B41L 47/00 (2006.01)

(21) International Application Number:

PCT/US2016/051398

(22) International Filing Date:

12 September 2016 (12.09.2016)

(25) Filing Language:

English

(26) Publication Language:

English

(71) Applicant: HEWLETT-PACKARD DEVELOPMENT COMPANY, L. P. [US/US]; 11445 Compaq Center Drive West, Houston, Texas 77070 (US).

(72) Inventors: VALENZUELA-RIVAS, Rene; 16399 W Bernardo Dr., San Diego, California 92127-1899 (US). SMITH, Ryan M.; 16399 W Bernardo Dr., San Diego, California 92127-1899 (US). QUIJANO, Christopher J.; 11311 Chinden Blvd, Boise, Idaho 83714-0021 (US). HOPPER, Craig L.; 11311 Chinden Blvd, Boise, Idaho 83714-0021 (US).

(74) Agent: HASAN, Nishat; Hewlett-packard Development Company, L.P., 3390 E. Harmony Road, Mail Stop 35, Fort Collins, Colorado 80528 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

(54) Title: FRAME WITH TRANSPARENT PANEL

(57) Abstract: Examples disclosed herein relate to a device including a frame with a transparent panel. In examples, the device includes a frame defining an opening of a scanner sub-assembly, the frame including a first side and a second side in contact with the first side; and a transparent panel coupled to the frame to cover the opening, a first side of the transparent panel disposed to be substantially planar with a first side of the frame, and a second side of the transparent panel disposed to be substantially planar with the second side of the frame.



FRAME WITH TRANSPARENT PANEL

BACKGROUND

[0001] Imaging devices – including scanners, copiers, facsimile machines, multifunction printers, all-in-one devices, or other devices – convert physical objects (e.g., documents, photographs, etc.) into electronic data. In some examples, imaging devices can include a surface to receive objects to be imaged by a scanner.

BRIEF DESCRIPTION OF THE DRAWINGS

[0002] The following detailed description references the drawings, wherein:

[0003] FIG. 1 is a partial schematic exploded view of a device according to an example.

[0004] FIG. 2 is a partial schematic exploded view of the device of FIG. 1 according to an example.

[0005] FIG. 3 is a schematic view of the device of FIG. 1 according to an example.

[0006] FIG. 4 is a partial exploded view of the device of FIG. 1 according to an example.

[0007] FIG. 5 is a partial top view of the device of FIG. 1 according to an example.

[0008] FIG. 6 is a cross-sectional view of the device of FIG. 5 taken along line 6-6' according to an example.

[0009] FIG. 7 is a cross-sectional view of the device of FIG. 5 taken along line 7-7' according to an example.

[0010] FIG. 8 is a bottom view of the frame of the device of FIG. 1 according to an example.

[0011] FIG. 9 is a bottom view of the installation of the transparent panel into the frame of the device of FIG. 1 according to an example.

[0012] FIG. 10 is a flow diagram illustrating a method for installing a transparent panel in a frame according to an example.

DETAILED DESCRIPTION

[0013] An imaging device may include a surface to receive objects for imaging. In examples, a flatbed scanner may include a surface to receive media for imaging and may be coupled to a lid to cover the media during imaging. A user interacting with a flatbed scanner may seek to remove the media by sliding it across the receiving surface of the flatbed scanner. However, an edge of the flatbed scanner surrounding the receiving surface may be higher than the receiving surface interfering with a user removing the medium.

[0014] To address these issues, in the examples described herein, a device in which two sides of a frame are disposed to be substantially planar with sides of a transparent panel to receive objects for imaging is described. In the examples, the edges of the device disposed to be parallel with the transparent panel are disposed to be in a front portion and side portion of the device from which a user may remove an object being imaged (e.g., a medium).

[0015] Accordingly, the present specification describes, in one example, a device that includes a frame defining an opening of a scanner sub-assembly, the frame including a first side and a second side in contact with the first side; and a transparent panel coupled to the frame to cover the opening, a first side of the transparent panel disposed to be substantially planar with a first side of the frame, and a second side of the transparent panel disposed to be substantially planar with the second side of the frame.

[0016] In another example, the present specification describes a process for installing a transparent panel in a frame that includes depositing adhesive on a first side of the frame defining an opening; inserting transparent panel in a gap formed in two corners of the frame; and rotating the transparent panel to affix a first side of the transparent panel with the first side of the frame, a second side of the transparent panel and a third side of the transparent panel to be substantially planar with the frame.

[0017] In yet another example, the present specification describes an imaging device that includes a frame defining an opening, the frame including a first side and a second side in contact with the first side; a transparent panel affixed to the frame to cover the opening, a first side of the transparent panel disposed to be substantially planar with a first side of the frame, and a second side of the transparent panel disposed to be substantially planar with the second side of the frame; and an adhesive layer disposed between a third side of the frame and a third side of the transparent panel, the third side of the transparent panel spaced apart from the first side of the transparent panel and the second side of the transparent panel.

[0018] Referring now to the drawings, FIG. 1 is a partial schematic exploded view of a device 10 according to an example. FIG. 2 is a partial schematic exploded view of device 10 of FIG. 1 according to an example. FIG. 3 is a schematic view of device 10 of FIG. 1 according to an example. FIG. 4 is a partial exploded view of device 10 of FIG. 1 according to an example. FIG. 5 is a partial top view of device 10 of FIG. 1 according to an example. FIG. 6 is a cross-sectional view of device 10 of FIG. 5 taken along line 6-6' according to an example. FIG. 7 is a cross-sectional view of device 10 of FIG. 5 taken along line 7-7' according to an example. FIG. 8 is a bottom view of the frame of device 10 of FIG. 1 according to an example. FIG. 9 is a bottom view of the installation of the transparent panel into the frame of device 10 of FIG. 1 according to an example. The example device 10 includes a frame 20 and a transparent panel 30. In examples, device 10 further includes an adhesive layer 40, a scanner sub-assembly 100, a lid 12, and a scanner 17. In examples, a medium 5 may be placed on transparent panel 30 to be imaged by scanner 17. In examples, medium 5 may be any physical object.

[0019] The device 10 may have a scanner sub-assembly 100 on which a transparent panel 30 may be positioned. For example, transparent panel 30 may be coupled to a frame 20 and be disposed to form an upper section of scanner sub-assembly 100. In the following discussion and in the claims, the term "couple" or "couples" is intended to include suitable indirect and/or direct

connections. Thus, if a first component is described as being coupled to a second component, that coupling may, for example, be: (1) through a direct electrical or mechanical connection, (2) through an indirect electrical or mechanical connection via other devices and connections, (3) through an optical electrical connection, (4) through a wireless electrical connection, and/or (5) another suitable coupling. The term “connect” or “connected” is intended to include suitable direct connections. In examples, device 10 may also include a lid 12 that is rotatably mounted to scanner sub-assembly 100. In the example of FIG. 3, lid 12 is depicted as being in an open position in which the lid 12 is extended away from transparent panel 30. In examples, lid 12 may also be moved to a closed position in which the lid 12 covers the transparent panel 30, for instance, to block ambient light from entering into the scanner sub-assembly 100 through the transparent panel 30.

[0020] In examples, device 10 may be any imaging device to image a document disposed thereon. An “imaging device” may be a hardware device, such as a scanner, copier, multifunction printer (MFP), or any other device with functionalities to produce electronic data representing physical objects. In some examples, an MFP may be capable of performing a combination of multiple different functionalities such as, for example, printing, photocopying, scanning, faxing, etc. In examples, medium 5 may be any type of paper, photopolymers, thermopolymers, plastics, fabric, composite, metal, wood, etc., which may be disposed on transparent panel 30 of device 10.

[0021] In examples, scanner 17 may be a hardware component to scan a physical object to produce electronic representations of the object. In examples, scanner 17 may scan or image a variety of physical objects placed in a scan zone of the scanner. In examples, scanner 17 may remain stationary to image an object. In other examples, scanner 17 may traverse the scan zone to image an object.

[0022] In examples, frame 20 may be a structure which encloses or defines an opening 25. In examples, frame 20 may include side 20a, side 20b, side 20c, and side 20d to enclose opening

25. Although depicted with four sides, frame 20 is not limited thereto and can have any number of sides without departing from the scope of this present disclosure. In examples, side 20a may be disposed opposite side 20c such that side 20a and side 20c may not intersect with each other. Similarly, side 20b may be disposed opposite side 20d such that side 20b and side 20d may not intersect with each other. In such an example, side 20a may be substantially perpendicular to side 20b and side 20d. Similarly, side 20c may be substantially perpendicular to side 20b and 20d. In examples, frame 20 may be disposed such that opening 25 is disposed over scanner 17. In examples, frame 20 and transparent panel 30 may be disposed to form an upper surface of scanner sub-assembly 100. In examples, frame 20 may be composed of any material to retain transparent panel 30, such as, a composite, a metal, a wood, etc. In examples, frame 20 may be a single piece. In such an example, frame 20 may be manufactured using any manufacturing technology to produce a single non-joined object, such as, injection molding, die casting, extruding, 3-D printing, etc. In other examples, frame 20 may be composed of multiple components coupled together.

[0023] In examples, a transparent panel 30 may be disposed to cover a scan zone of scanner 17 while coupled to frame 20. In examples, transparent panel 30 may be composed of any ridged transparent material with structural integrity to support an object being imaged. In examples, transparent panel 30 may be a glass, a plexi-glass, a transparent plastic, etc. In examples, transparent panel 30 may include side 30a, side 30b, side 30c, and side 30d. In examples, side 30a of transparent panel 30 may be disposed adjacent to side 20a of frame 20. In examples, side 30b of transparent panel 30 may be disposed adjacent to side 20b of frame 20. In examples, side 30c of transparent panel 30 may be disposed adjacent to side 20c of frame 20. In examples, side 30d of transparent panel 30 may be disposed adjacent to side 20d of frame 20.

[0024] In examples, frame 20 may retain transparent panel 30 over opening 25. In such example, frame 20 may include a number of rails on which transparent panel 30 may be disposed.

In examples, rail 23a, rail 23b, rail 23c, and rail 23d may be disposed on frame 20 to retain transparent panel 30. In examples, rail 23a may be disposed along an inner portion of side 20a. In examples, rail 23a may be dimensioned to be shorter than a length of side 20a. In examples, rail 23b may be disposed along an inner portion of side 20b. In examples, rail 23b may be dimensioned to be shorter than a length of side 20b. In examples, rail 23c may be disposed along an inner portion of side 20c. In examples, rail 23c may be dimensioned to be shorter than a length of side 20c. In examples, rail 23d may be disposed along an inner portion of side 20d. In examples, rail 23d may be dimensioned to be shorter than a length of side 20d. In examples, rail 23a and rail 23d may be disposed to form a gap 23f at intersections of side 20a and side 20d, in other words a corner of frame 20, as depicted in FIG. 8. In examples, rail 23b and rail 23c may be disposed to form a gap 23g at intersections of side 20b and side 20c, in other words a corner of frame 20, as depicted in FIG. 8. In examples, gap 23f and gap 23g may be formed at diagonally opposed corners of frame 20.

[0025] In examples, rail 23a may be disposed such that side 30a of transparent panel 30 may be disposed to be substantially planar with side 20a of frame 20 as shown in FIG. 7. In contrast, rail 23c may be disposed such that side 30c of transparent panel 30 may be disposed to be lower than or below side 20c of frame 20 in the z-direction. In examples, rail 23b may be disposed such that side 30b of transparent panel 30 may be disposed to be substantially planar with side 20b of frame 20 as shown in FIG. 6. In contrast, rail 23d may be disposed such that side 30d of transparent panel 30 may be disposed to be lower than side 20d of frame 20 in the z-direction. In such examples, a normal 27 of frame 20 may be substantially parallel to a normal 37 of transparent panel 30. In other words, transparent panel 30 remains flat relative to the z-axis when coupled to frame 20 while allowing at least two sides of transparent panel 30 to be substantially flush with sides of frame 20. In such examples, a user may not encounter a barrier when removing medium 5 from device 10 along the two sides. In examples, the two sides of

transparent panel 30 substantially flush with the side of frame 20 may be disposed in a front side and a right side of device 10. In other examples, the two sides of transparent panel 30 substantially flush with the side of frame 20 may be disposed in a front side and a left side of device 10.

[0026] In examples, an adhesive layer 40 may be disposed to affix transparent panel 30 to frame 20. In such an examples, adhesive layer 40 may affix side 30c to side 20c and side 30d to side 20d. In examples, adhesive layer 40 may be any type of adhesive to couple a transparent panel 30 to a frame 20.

[0027] FIG. 10 is a flowchart of an example method 1000 for installing transparent panel 30 in frame 20 according to an example. Although execution of method 1000 is described below with reference to device 10 described above, other suitable systems for the execution of method 1000 can be utilized. Additionally, implementation of method 1000 is not limited to such examples.

[0028] At 1002 of method 1000, an adhesive layer 40 is deposited on a side 20c of frame 20.

[0029] At 1004, transparent panel 30 is inserted into gap 23f and gap 23g formed in two corners of frame 20 as shown in FIG. 8 and FIG. 9.

[0030] At 1006, transparent panel 30 is rotated to affix side 30c to side 20c of frame 20 along arrow 90, as shown in FIG. 9. In such an example, once rotated into a final position side 30a and side 30b of transparent panel 30 are disposed to be substantially planar with side 20a and side 20b, respectively, of frame 20.

[0031] While certain implementations have been shown and described above, various changes in form and details may be made. For example, some features that have been described in relation to one implementation and/or method can be related to other implementations. In other words, processes, features, components, and/or properties described in relation to one

implementation can be useful in other implementations. Furthermore, it should be understood that the systems, apparatuses, and methods described herein can include various combinations and/or sub-combinations of the components and/or features of the different implementations described. Thus, features described with reference to one or more implementations can be combined with other implementations described herein.

[0032] The above discussion is meant to be illustrative of the principles and various embodiments of the present disclosure. Numerous variations and modifications will become apparent to those skilled in the art once the above disclosure is fully appreciated. It is intended that the following claims be interpreted to embrace all such variations and modifications.

What is claimed is:

1. A device comprising:

a frame defining an opening of a scanner sub-assembly, the frame including a first side and a second side in contact with the first side; and

a transparent panel coupled to the frame to cover the opening, a first side of the transparent panel disposed to be substantially planar with a first side of the frame, and a second side of the transparent panel disposed to be substantially planar with the second side of the frame.

2. The device of claim 1, further comprising:

an adhesive layer disposed to affix the transparent panel to the frame, the adhesive layer disposed between a third side of the frame and a third side of the transparent panel, the third side of the transparent panel spaced apart from the first side of the transparent panel and the second side of the transparent panel.

3. The device of claim 2, wherein the third side of the transparent panel is disposed below the frame.

4. The device of claim 3, wherein a fourth side of the transparent panel in contact with the third side is disposed below the frame.

5. The device of claim 1, further comprising:

a scanner to image an object disposed on the transparent panel.
6. The device of claim 1, wherein a normal of the transparent panel is parallel to a normal of the frame.
7. The device of claim 1, wherein the frame is a single piece.
8. The device of claim 1, wherein the first side and the second side are substantially perpendicular to each other.
9. A process for installing a transparent panel in a frame, comprising:

depositing adhesive on a first side of the frame defining an opening;

inserting transparent panel in a gap formed in two corners of the frame; and

rotating the transparent panel to affix a first side of the transparent panel with the first side of the frame, a second side of the transparent panel and a third side of the transparent panel to be substantially planar with the frame.
10. The process of claim 9, further comprising:

depositing adhesive on a second side of the frame, the second side substantially perpendicular to the first side of the frame.

11. The process of claim 10, wherein a fourth side of the transparent panel is affixed to the second side of the frame.

12. The process of claim 9, wherein a normal of the transparent panel is parallel to a normal of the frame.

13. An imaging device, comprising:

a frame enclosing an opening, the frame including a first side and a second side in contact with the first side;

a transparent panel affixed to the frame to cover the opening, a first side of the transparent panel disposed to be substantially planar with a first side of the frame, and a second side of the transparent panel disposed to be substantially planar with the second side of the frame; and

an adhesive layer disposed between a third side of the frame and a third side of the transparent panel, the third side of the transparent panel spaced apart from the first side of the transparent panel and the second side of the transparent panel.

14. The imaging device of claim 13, wherein a normal of the transparent panel is parallel to a normal of the frame.

15. The imaging device of claim 13, wherein the third side of the transparent panel and a fourth side of the transparent panel are disposed to be below the frame.

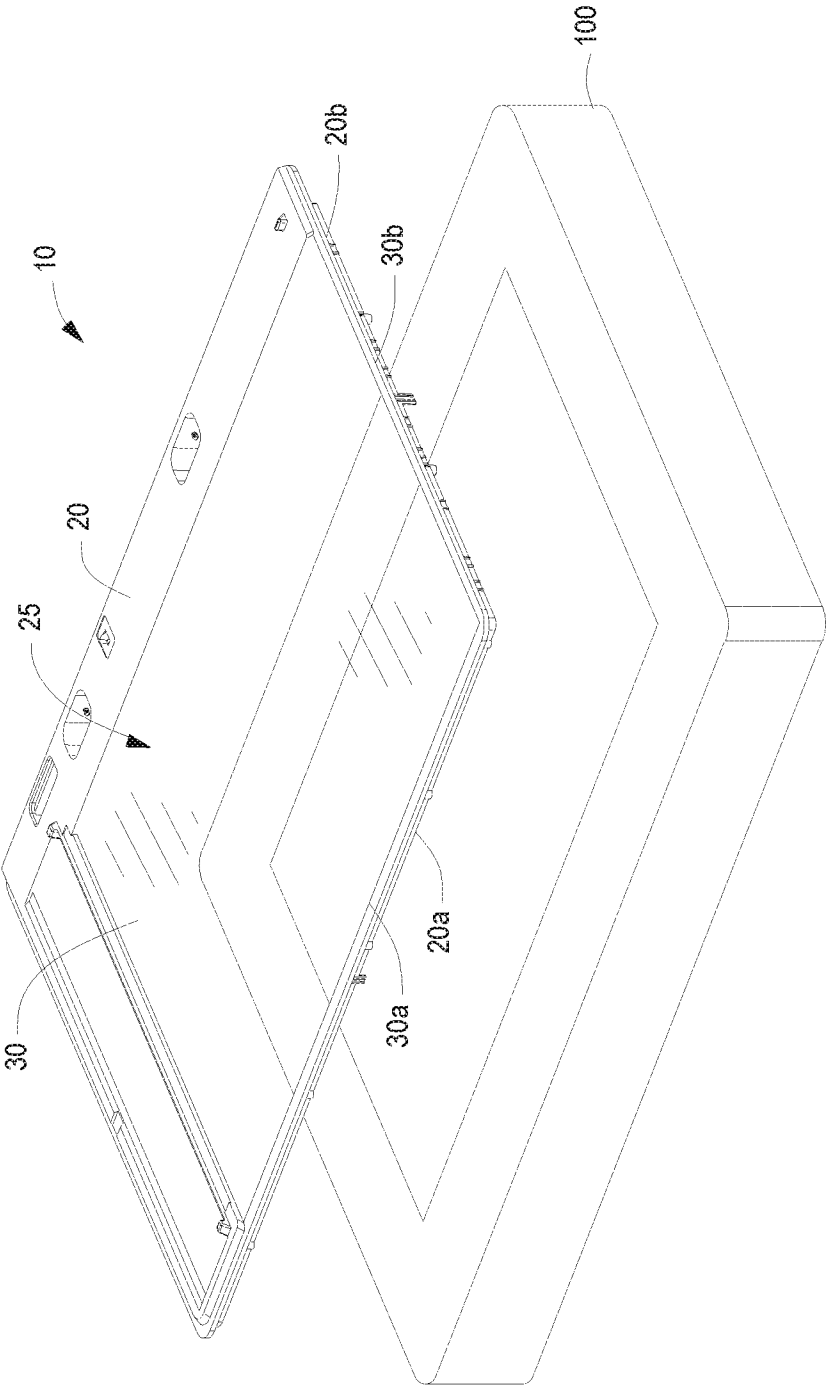


FIG. 1

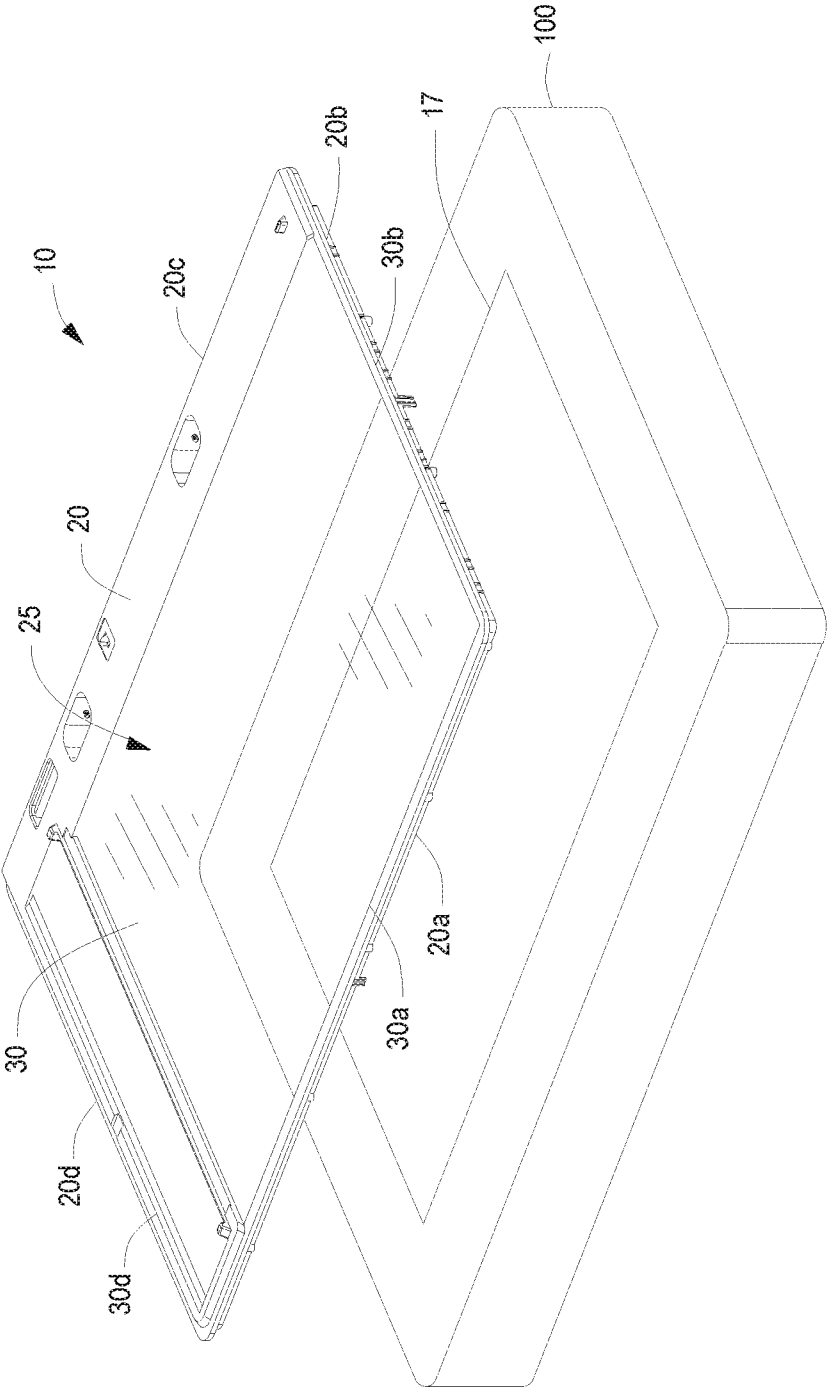


FIG. 2

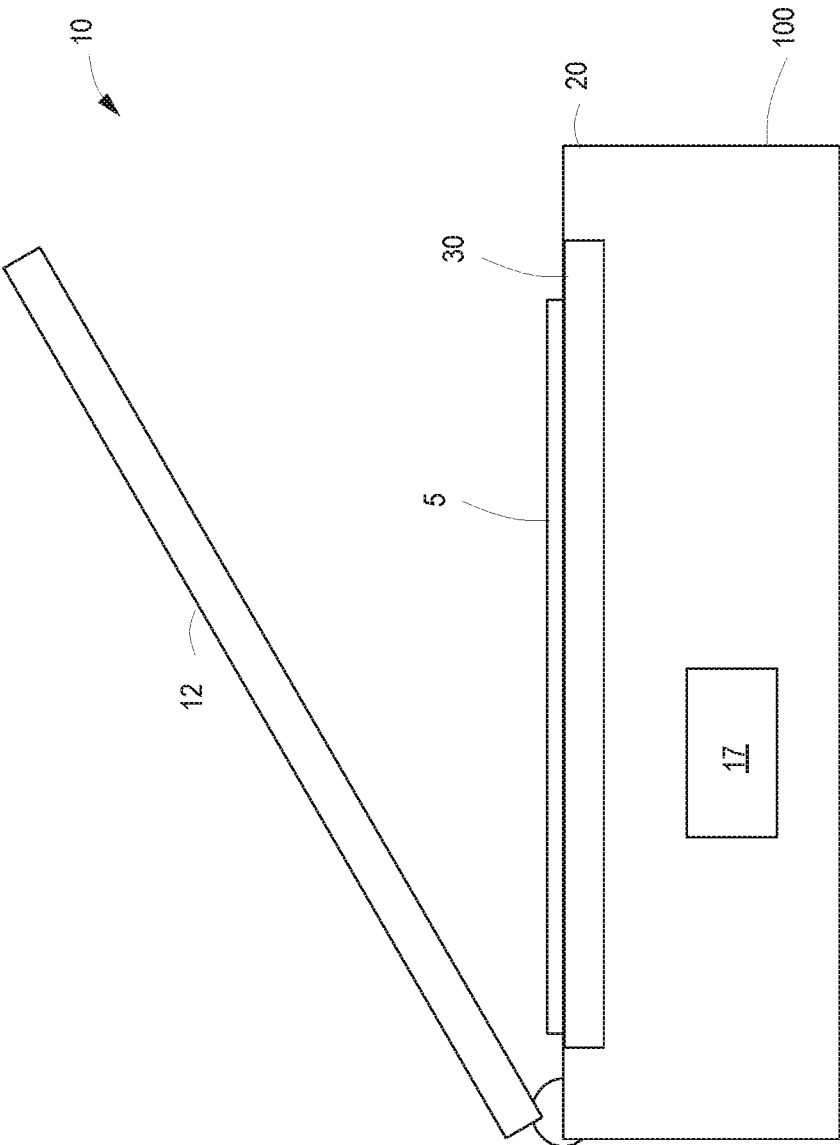


FIG. 3

┐

4/10

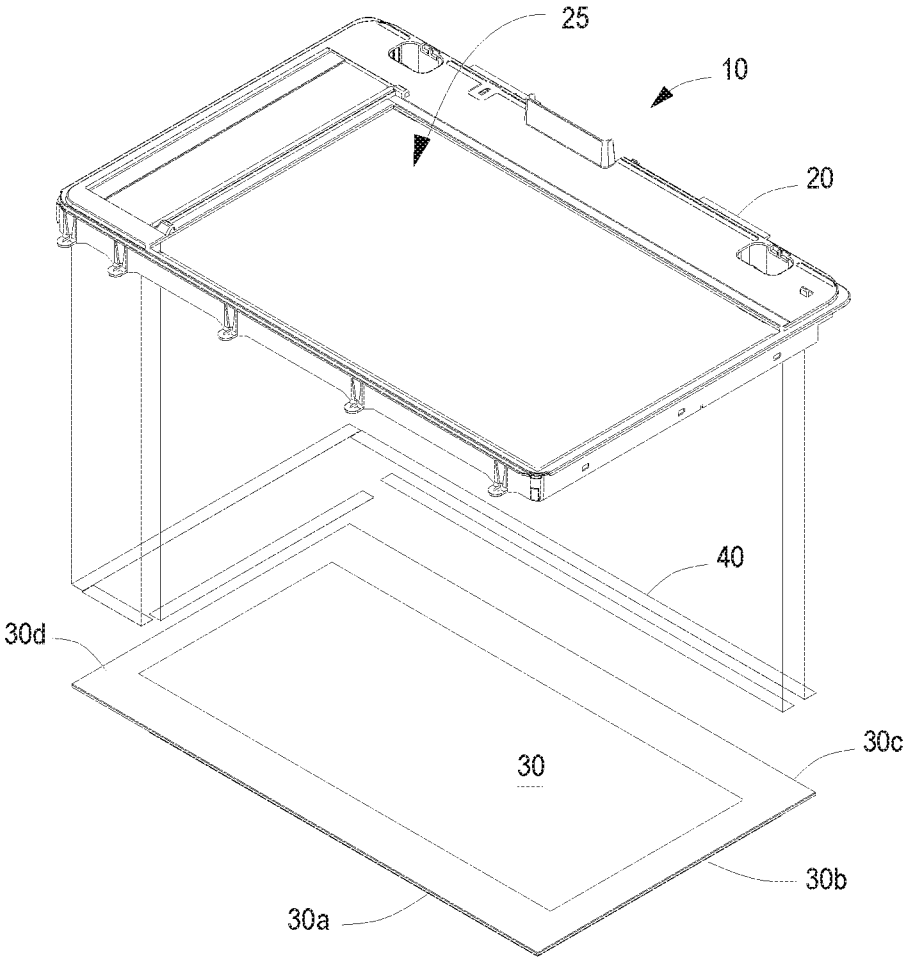


FIG. 4


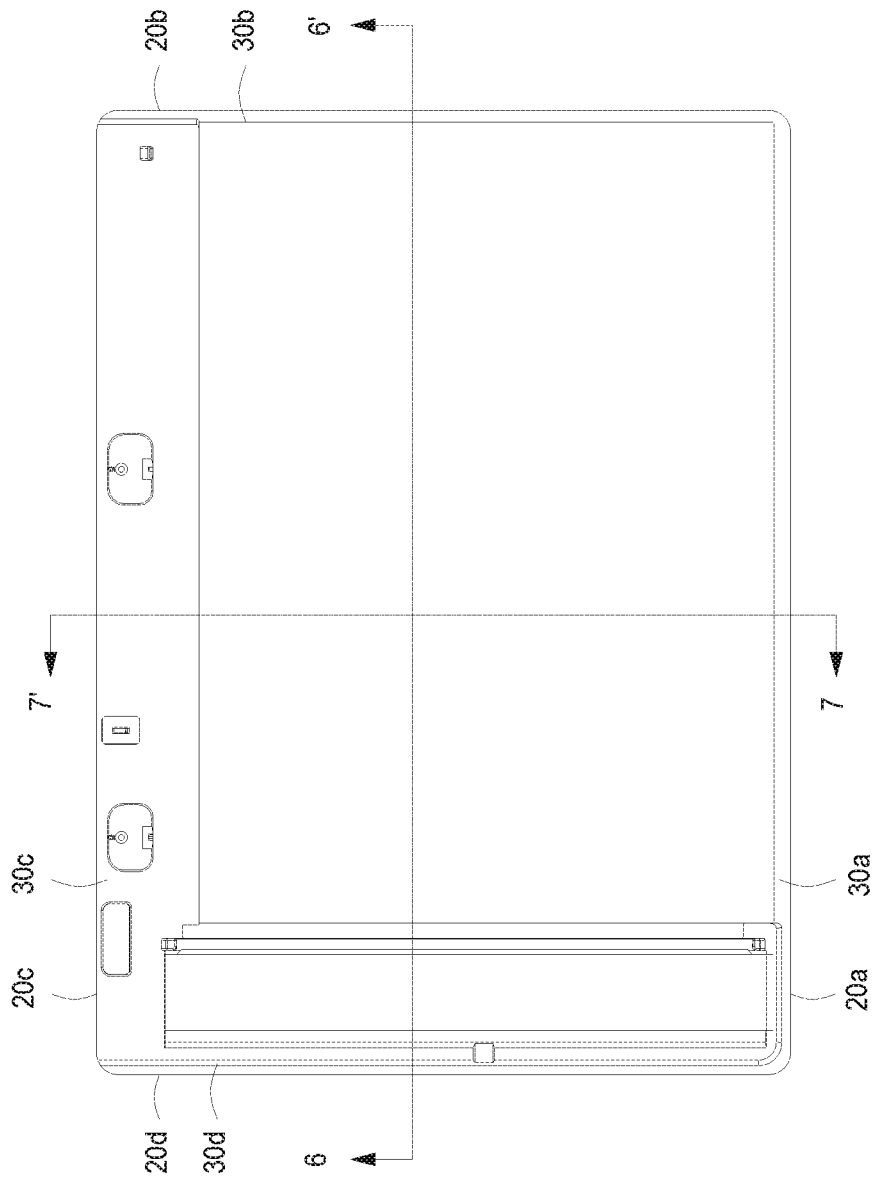


FIG. 5

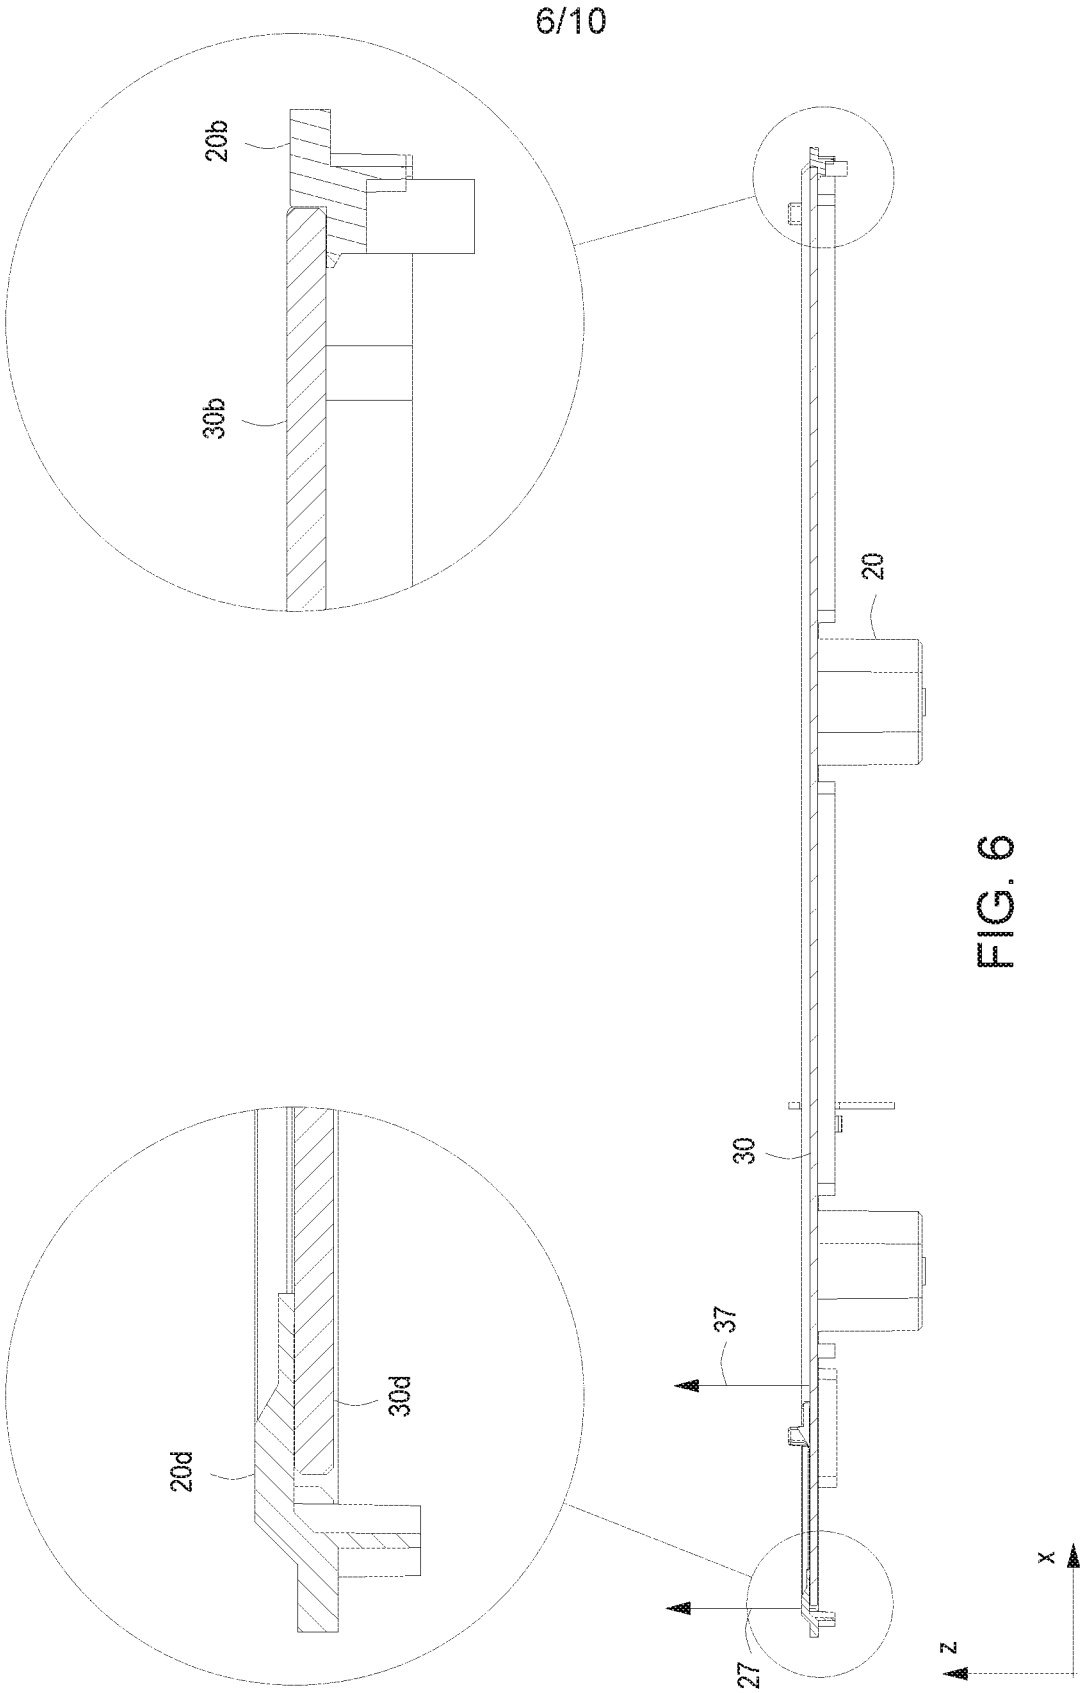

7/10

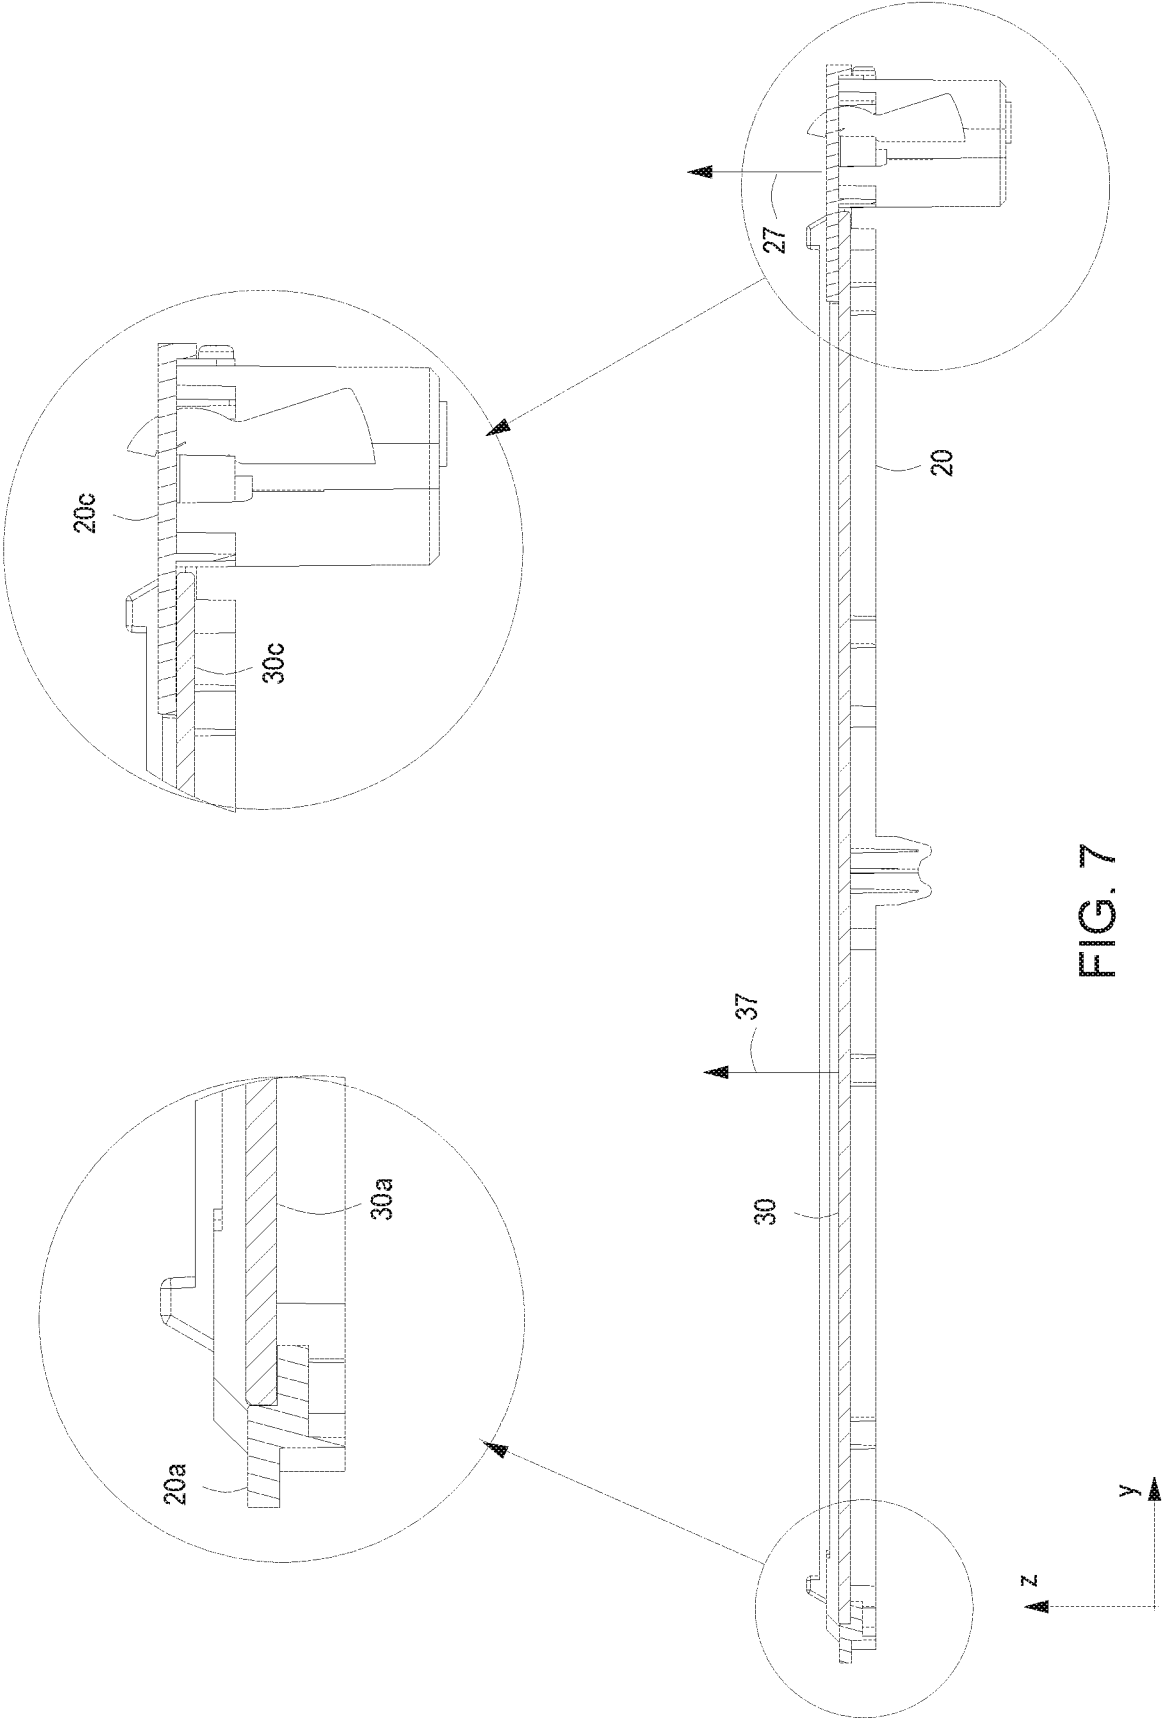
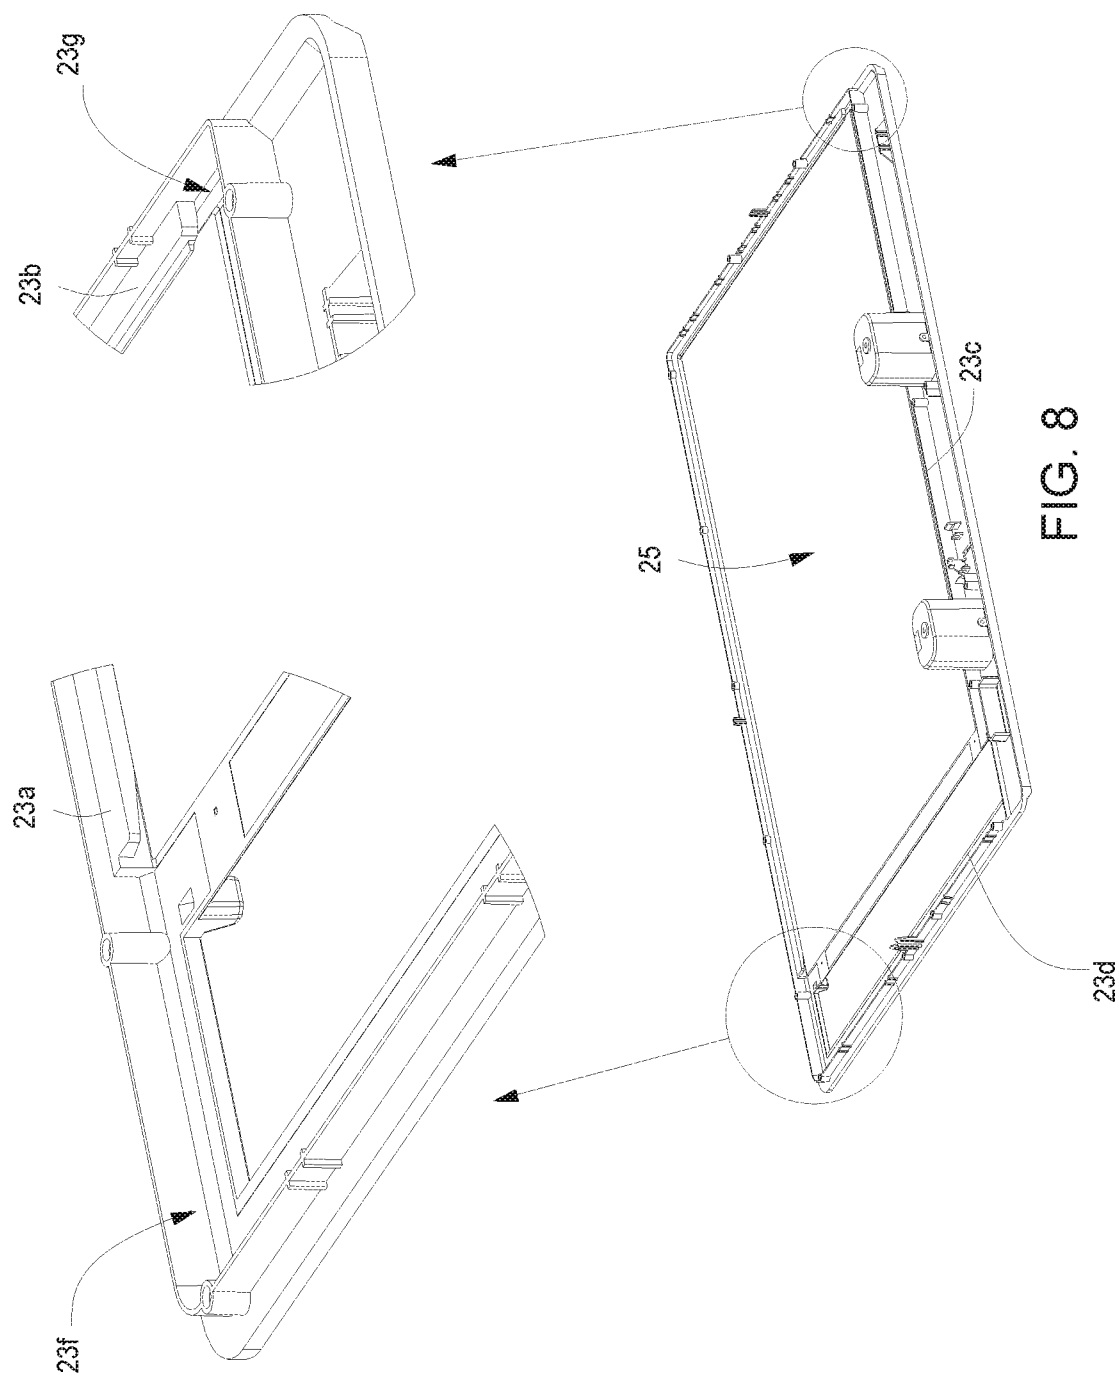


FIG. 7



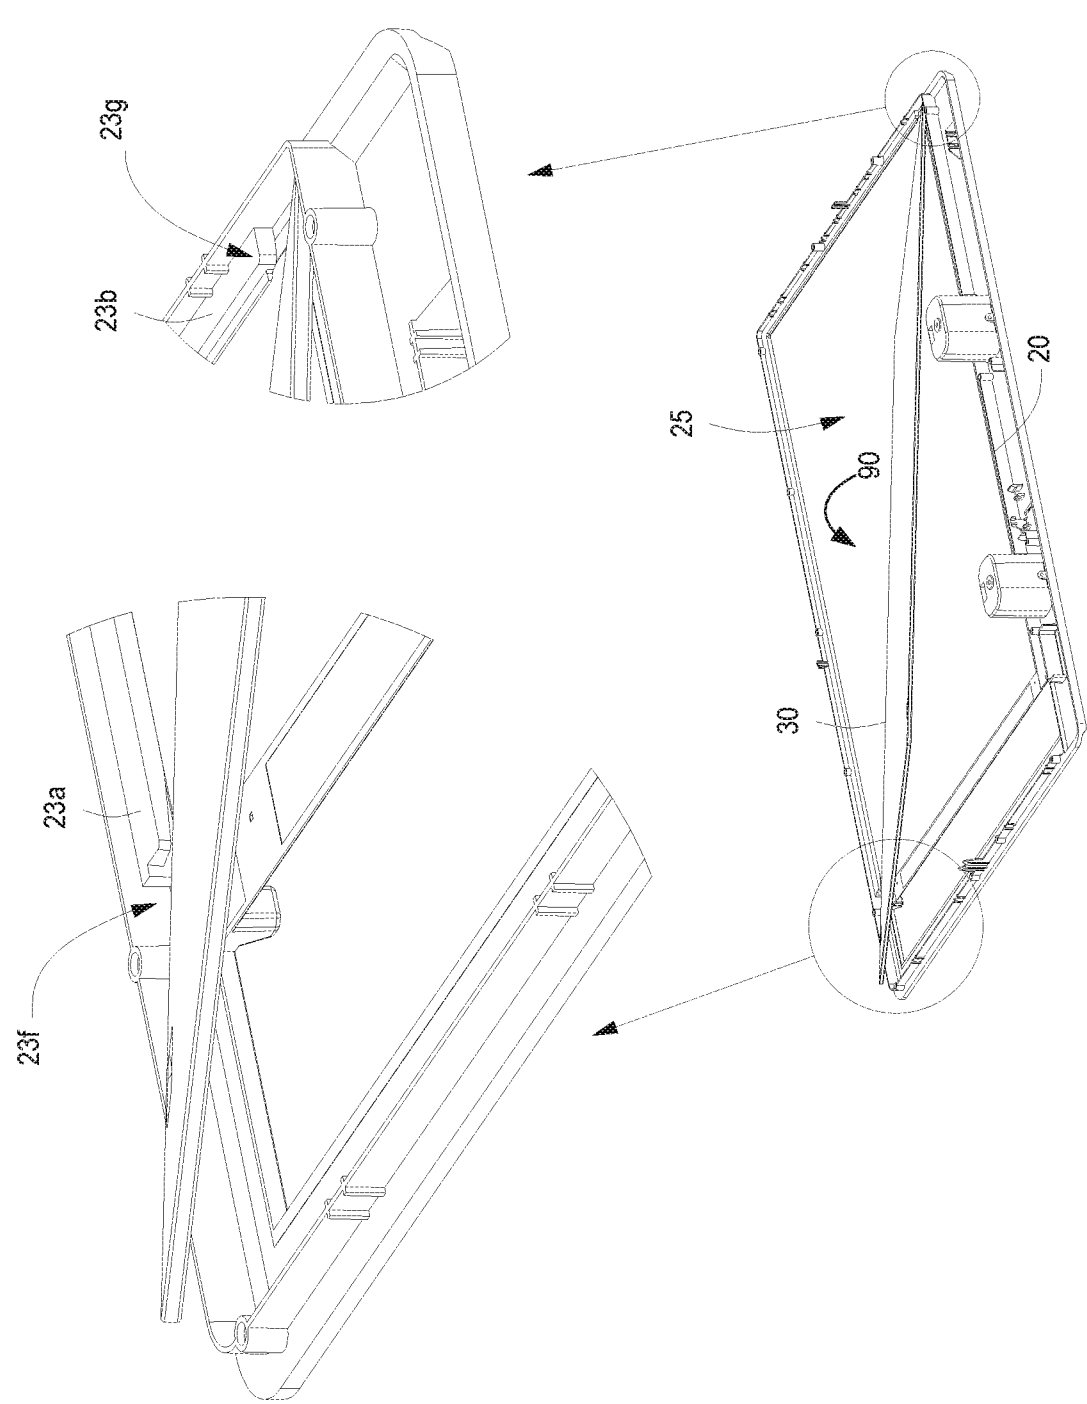


FIG. 9

10/10

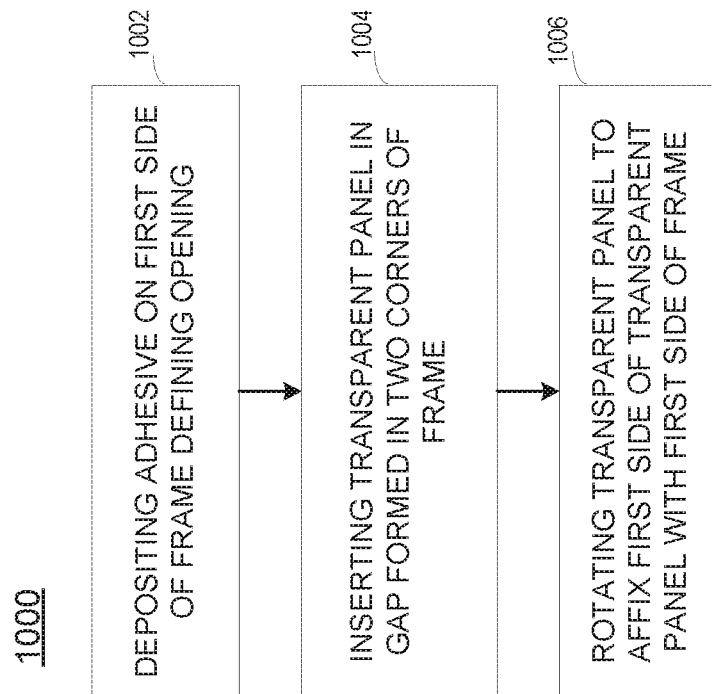


FIG. 10

INTERNATIONAL SEARCH REPORT

International application No.

PCT/US 2016/051398

A. CLASSIFICATION OF SUBJECT MATTER <i>H04N 1/00 (2006.01)</i> <i>B41L 47/00 (2006.01)</i> According to International Patent Classification (IPC) or to both national classification and IPC		
B. FIELDS SEARCHED Minimum documentation searched (classification system followed by classification symbols) G06K 7/00-7/14, H04N 1/00-1/64, B41L 47/00 Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched Electronic data base consulted during the international search (name of data base and, where practicable, search terms used) PatSearch (RUPTO internal), USPTO, PAJ, Esp@cenet, Information Retrieval System of FIPS		
C. DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X Y A	US 2014/0029066 A1 (LITE-ON TECHNOLOGY CORP. et al) 30.06.2014, paragraphs [0027]-[0030], fig. 5, 9	1, 5-8 2, 13, 14 3, 4, 9-12, 15
Y	US 6481626 B1 (NCR CORPORATION) 19.11.2002, column 2, lines 29-64, fig. 1-3	2, 13, 14
A	US 7051942 B2 (HEWLETT-PACKARD DEVELOPMENT COMPANY, L.P.) 30.05.2006	1-15
☐ Further documents are listed in the continuation of Box C. ☐ See patent family annex.		
* Special categories of cited documents: “A” document defining the general state of the art which is not considered to be of particular relevance “E” earlier document but published on or after the international filing date “L” document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) “O” document referring to an oral disclosure, use, exhibition or other means “P” document published prior to the international filing date but later than the priority date claimed	“T” later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention “X” document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone “Y” document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art “&” document member of the same patent family	
Date of the actual completion of the international search 25 January 2017 (25.01.2017)	Date of mailing of the international search report 01 June 2017 (01.06.2017)	
Name and mailing address of the ISA/RU: Federal Institute of Industrial Property, Berezhkovskaya nab., 30-1, Moscow, G-59, GSP-3, Russia, 125993 Facsimile No: (8-495) 531-63-18, (8-499) 243-33-37	Authorized officer P. Bystrov Telephone No. (495) 531-64-81	