

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
13 January 2011 (13.01.2011)

(10) International Publication Number
WO 2011/005940 A1

(51) International Patent Classification:

A23L 3/3409 (2006.01)

(21) International Application Number:

PCT/US2010/041340

(22) International Filing Date:

8 July 2010 (08.07.2010)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

61/224,755 10 July 2009 (10.07.2009) US
12/651,409 31 December 2009 (31.12.2009) US

(71) Applicant (for all designated States except US): L'AIR LIQUIDE SOCIETE ANONYME POUR L'ETUDE ET L'EXPLOITATION DES PROCEDES GEORGES CLAUDE [FR/FR]; 75 quai d'Orsay, F-75007 Paris (FR).

(72) Inventors; and

(75) Inventors/Applicants (for US only): MEYERS, Pierre [FR/FR]; 10, rue Marcel Pagnol, F-78530 Buc (FR). ROSTAING, Jean-Christophe [FR/FR]; 57, rue Exelmans, F- Versailles (FR). AGRAWAL, Rajat [CA/US]; 21 Briarcliff Ct., Newark, Delaware 19702 (US).

(74) Agents: CRONIN, Christopher, J. et al.; 2700 Post Oak Blvd., Suite 1800, Houston, Texas 77056 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

- with international search report (Art. 21(3))
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))

(54) Title: SYSTEM AND METHOD FOR NON-THERMAL PLASMA TREATMENT OF FOODSTUFFS

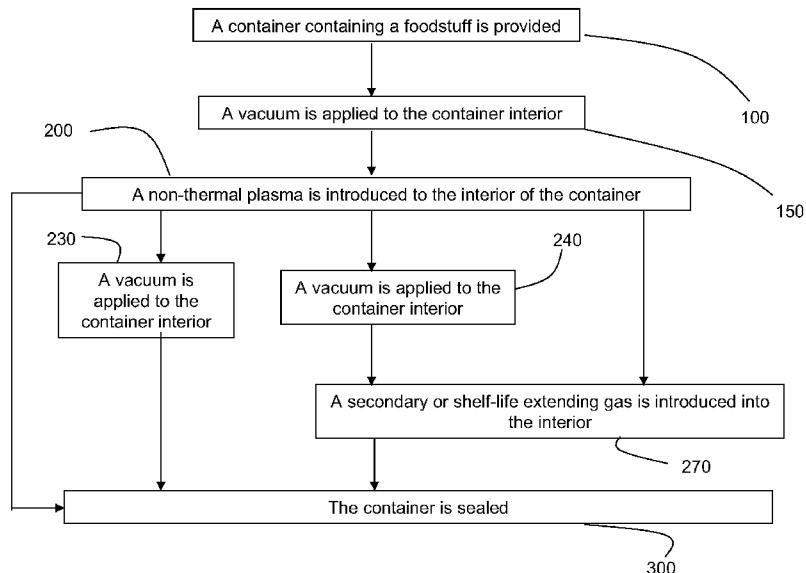


FIG 2

(57) Abstract: A method for sanitation and preservation of foodstuffs includes the following steps. A container containing a foodstuff is provided. A non-thermal plasma is introduced to an interior of the container. The container is sealed.

SYSTEM AND METHOD FOR NON-THERMAL PLASMA TREATMENT OF FOODSTUFFS

Cross-Reference to Related Applications

5 None.

Background

According to estimates from the U.S. Centers for Disease and Controls (CDC), food born pathogens account for 756 million illnesses, 325,000 10 hospitalizations, and 5000 deaths each year in the U.S. Moreover, fresh produce is catching up with ground beef as a major source of *e. coli* 0157 H7 and with chicken as a major source of *Salmonella*. Fresh-cut produce is one of the fastest growing sectors of the fresh produce industry. Processing produce into fresh-cut form increases the risk of bacterial contamination and growth because the natural external 15 barrier of the produce is broken by peeling, slicing, coring, trimming, and mashing.

This is also true for Ready-to-Eat (RTE) products for which starting from generally a stabilized raw material, more than 60% of the lifespan of the product can be lost because of these preparation and repackaging steps. For example, a raw block of ham packed under vacuum generally has a lifespan of 90 days whereas 20 sliced ham stored under similar conditions seldom reaches more than 30 days even by following all the hygienic conditions. Hence there is a need for a process which can be applied after the food is processed to reduce or destroy microorganisms just before it is packaged for the preservation of the quality and shelf-life.

The importance of preserving food quality while providing safety is well known 25 and has led to increased interest in nonthermal processing of meat, poultry, and dairy products, produce and beverage. Some of the nonthermal based technologies include high presses processing (HPP), treatment with electric pulse field, irradiation, ultrasonic, etc.

In recent years, nonthermal plasma (also referred to as so-called "cold 30 plasma" or "non-equilibrium plasma") has been investigated to sanitize food products. A plasma is an ionized gas which is formed by the passage of energy, for example by applying a high continuous or alternative voltage to it, or by providing energy in other forms such as microwave, radiation, laser light, or by other means.

Compared to gas in its natural state, plasma contains free charged particles, electrons and ions, although it is overall electrically neutral. A nonthermal plasma is in general any plasma which is not in thermodynamic equilibrium, either because the ion temperature is different from the electron temperature, or because the velocity

5 distribution of one of the species does not follow a Maxwell-Boltzmann distribution.

As opposed to thermal plasmas where all particles of the medium (neutral molecules, atoms and radicals, ions and electrons have roughly the same energy distribution (meaning a common temperature), in nonthermal plasma electrons have a much higher average energy than heavy species. A limit to such a situation is with

10 the so called cold plasma, corresponding to gas temperature (meaning average energy of the heavy species) is close to ambient. However there may exist plasmas that are nonthermal but not cold, with heavy species temperature less than one order of magnitude below electron temperature. In general such plasmas are sustained by electrical discharges in a gas close to atmospheric pressure and must be

15 distinguished from other mature, industrially applied plasma technologies like welding, cutting and thermal spraying.

For nonthermal plasma, free electrons are excited by the means described above, namely acceleration by the electric field imposed by the external source of excitation. In parallel to this acceleration, electrons undergo random frequent elastic

20 collisions with the molecules and ions, also called heavy particles. Thus electrons continuously gain energy over time in the form of a disordered motion that has similarities with thermal agitation, but is "forced" by electrical energy input and much more intense. The average electron energy corresponds to an equivalent

25 temperature of the order of tens of thousands of degrees. The average energy of electrons is much higher than the heavy particles. If the collisions are not too frequent, in the case of a rarefied gas, for example, they transfer only little energy to the heavy particles and preserve their movement of thermal agitation corresponding to the ambient. If the electrons acquire a very high "temperature" (i.e. average

30 agitation energy) of the order of 10^4 K they produce inelastic collisions with the heavy particles that produces excitation (in terms of electronic level or vibrational quantified level), ionization (that constantly replenishes the population of electrons and ions to sustain a steady plasma), or dissociation into smaller fragments, atoms and radicals. The excited particles conceal very high "chemical energy" and can be reactive

enough to produce surface treatments to a material, without the need to heat the material.

In particular, it is known that cold plasma can destroy, or at least irreversibly inactivate microorganisms.

5 On the other hand, Modified Atmosphere Packaging (MAP) or controlled atmosphere packaging is a known technique used to extend the shelf-life of fresh or ready-to-eat food products. In this technique, the air surrounding the food in the package is removed partially or entirely and replaced by another gas or gas mixture. The effects of MAP are based on the often observed slowing of plant respiration in
10 low O₂ environment. The commonly used gases in MAP are N₂, CO₂ O₂, rare gases (such as Ar), and their mixtures.

Summary

15 There is disclosed a method for sanitation and preservation of foodstuffs that includes the following steps. A container containing a foodstuff is provided. A non-thermal plasma is introduced to an interior of the container. The container is sealed.

The method may include one or more of the following aspects.

- the container is sealed while containing the non-thermal plasma or the non-thermal plasma in a de-excited state.
- 20 - the method further comprises the step of generating the non-thermal plasma from a treatment gas selected from the group consisting of N₂, CO₂ O₂, Ar, Xe, Kr, He, Ne, N₂O, H₂, H₂O₂, CO, NO, and mixtures thereof.
- the method further comprises the step of introducing a secondary gas to the interior of the container without displacing all of the non-thermal plasma or all
25 of the non-thermal plasma in a de-excited state, wherein the container is sealed while containing the secondary gas and non-thermal plasma or de-excited non-thermal plasma.
- the method further comprises the step of generating the non-thermal plasma from a treatment gas selected from the group consisting of N₂, CO₂ O₂, Ar, Xe, Kr, He, Ne, N₂O, H₂, H₂O₂, CO, NO, and mixtures thereof.
- 30 - the secondary gas is selected from the group consisting of N₂, CO₂ O₂, Ar, Xe, Kr, He, Ne, N₂O, H₂, H₂O₂, CO, NO, and mixtures thereof; and the secondary gas is compositionally different from the non-thermal plasma.

- the method further comprises the steps of:
 - removing all of the non-thermal plasma or all of the non-thermal plasma in a de-excited state; and
 - introducing a shelf-life extending gas into the interior of the container, wherein the container is sealed while containing the shelf-life extending gas.
- the shelf-life extending gas selected from the group consisting of N₂, CO₂ O₂, Ar, Xe, Kr, He, Ne, N₂O, H₂, and mixtures thereof.
- the non-thermal plasma or the de-excited non-thermal plasma is removed by application of vacuum to the container interior.
- the non-thermal plasma or the de-excited non-thermal plasma is purged from the container interior by the introduction of the shelf-life extending gas.
- the method further comprises the step of removing the non-thermal plasma or the non-thermal plasma in a de-excited state with application of vacuum to the container interior, wherein the container is sealed under vacuum.
- the method further comprises the step of combining moisture with the non-thermal plasma.
- the treatment gas is selected from the group consisting of H₂, a mixture of H₂ and He, a mixture of H₂ and Ar, a mixture of H₂ and CO, a mixture of H₂ and H₂O₂, a mixture of H₂ and air, and a mixture of H₂ and N₂O.
- said step of introducing a non-thermal plasma to an interior of the container is performed inside a food packaging machine.
- the food packaging machine is a flow pack type food packaging machine.
- the food packaging machine is a tray type food packaging machine.
- the method further comprises the steps of:
 - generating the non-thermal plasma with a non-thermal plasma generation device located outside the food packaging machine; and
 - conveying the non-thermal plasma from the non-thermal plasma generation device to the interior of the container.
- the food packaging machine is a flow pack type food packaging machine;
- the container is a thin plastic tubular film; and
- the non-thermal plasma is introduced into the interior of the tubular film with a nozzle.
- the food packaging machine is a tray type food packaging machine.

- the food packaging machine is a tray type food packaging machine and the non-thermal plasma is generated with a non-thermal plasma generating device comprising at least one planar microwave power applicator disposed in a lid of the tray type food packaging machine.
- 5 - the food packaging machine is a tray type food packaging machine and the non-thermal plasma is generated with a non-thermal plasma generating device comprising at least one planar microwave power applicator disposed in or on the container.
- the non-thermal plasma generating device comprises at least one planar microwave power applicator
- 10 - said non-thermal plasma is in sustained contact with the foodstuff for a period of time of 0.1 sec to 600 seconds.
- said non-thermal plasma is in sustained contact with the foodstuff for a period of time of 5 to 60 seconds.
- 15 - the method further comprises a step of applying a vacuum to an interior of the container before said step of introducing the non-thermal plasma.
- a biocide is introduced into the container interior before, during or after the introduction of the non-thermal plasma into the container interior.
- the biocide is particulate Silver.

20

Brief Description Of The Drawings

Figure 1 is a flow diagram of a method according to the invention.

Figure 2 is a flow diagram of a method according to the invention including additional optional steps.

25 Figure 3 is a schematic of an application of the invention to a tray-type food packaging device.

Figure 4 is a schematic of an application of the invention to a flow pack-type food packaging device.

30 Figure 3 is a schematic of an application of the invention to a container having a built-in electrode or dielectric discharge barrier.

Description of Preferred Embodiments

Combining plasma treatment with MAP or vacuum packaging provides a synergistic effect by first improving the quality of the food product which when stored under modified atmosphere or vacuum further enhances the shelf-life of the product.

5 As best illustrated in FIG 1, an exemplary method of the invention includes the following steps. In a first step 100, a container containing a foodstuff is provided. In a second step 200, a non-thermal plasma is introduced into the container interior. In a third step 300, the container is sealed. While any type of sealed foodstuff container may be utilized in performance of the method, typically it is sealed using a 10 suitable film or a lid. Or, in the case of a flow pack type food packaging machine, opposite edges of a thin plastic film comprising the container are sealed together to form a hollow tube.

15 It should be noted that the word "container" is intended to mean a food container intended for long-term storage of food and not a plasma treatment chamber. Two non-limiting examples of containers include a tubular plastic film typically used in a flow pack type food packaging machine, and a rigid or semi-rigid plastic tray typically used in a tray type food packaging machine.

20 While the method and system may be used to treat any foodstuff, typical types of foodstuffs include but are not limited to fresh produce, meat, and seafood.

25 The non-thermal plasma is generated from a treatment gas which may be one of several types of gases or gas mixtures. Non-limiting examples include N₂, CO₂ O₂, Ar, Xe, Kr, He, Ne, N₂O, H₂, H₂O₂, CO, NO, and mixtures thereof. In certain embodiments, it may be preferred to utilize a treatment gas of H₂, a mixture of H₂ and He, a mixture of H₂ and Ar, a mixture of H₂ and CO, a mixture of H₂ and H₂O₂, a mixture of H₂ and air, or a mixture of H₂ and N₂O. It is possible to add one or more additives to the treatment gas such as moisture or other compound (for example, Silver or other biocide) to further tailor the efficacy of the plasma. The additive can be in the form of solid, liquid, or gas. Alternatively, the one or more additives may be added to the non-thermal plasma after it has been generated from the treatment gas.

30 As one example of this alternative, the non-thermal plasma may be utilized to convey the one or more additives to the foodstuff surface. A reducing atmosphere (i.e., one having a negative redox potential) may also be employed because it can prevent the degradation of food by oxidation. For example, the treatment gas may include H₂ or

H₂ may be admixed with the non-thermal plasma after it has been generated. In this manner, radicals like atomic hydrogen will be created, which have an extremely strong chemical reducing activity, in fact much higher than any reducing chemical in a commercial form. In addition reducing radicals have germicidal effects comparable 5 to oxidant radicals.

As best shown in FIG 2, performance of the method may include additional optional steps.

In between steps 100 and 200, a step 150 of applying a vacuum to the container may be performed. It may be particularly beneficial to apply a vacuum 10 before exposure of the foodstuff to the non-thermal plasma in order to avoid significant proportions of oxidizing gas which can interfere with sustaining the non-thermal plasma.

After performance of step 200, the method can proceed to step 300 in which case the non-thermal plasma or the non-thermal plasma in a de-excited state is 15 sealed inside the container.

Alternatively, after performance of step 200, a step 230 of applying a vacuum to the interior of the container may be performed followed by step 300. This results in removal of the non-thermal plasma or the non-thermal plasma in a de-excited state and achievement of a vacuum-packaged foodstuff.

20 In another alternative, after performance of step 200, a step 270 of introducing a secondary or shelf-life extending gas into the container interior may be performed. The function of the secondary gas is to combine with the gases comprising the non-thermal plasma to produce a gas which promotes the shelf-life of the foodstuff. In this case, the treatment gas (from which the non-thermal plasma is generated) is 25 selected in such a way to provide both antimicrobial and preservation effects, but this of course can result in a compromise between the two effects. So, the secondary gas can be added to the existing gas atmosphere (the non-thermal plasma or the non-thermal plasma in a de-excited state) inside the container to form a gas mixture more optimal for extending the shelf-life of a particular food product. The function of 30 the shelf-life extending gas is to purge the gaseous atmosphere from inside the container (the non-thermal plasma or the non-thermal plasma in a de-excited state) and replace it with a gas which has better shelf-life extending properties when the above-described compromise is not considered sufficiently satisfactory or when

certain constituents of the non-thermal plasma react with the foodstuff or container to an extent that it no longer will result in sufficiently satisfactory shelf-life extending properties. The shelf-life extending gas can be same or different gas as the treatment gas. Typical shelf-life extending gases include but are not limited to N₂,

5 CO₂ O₂, Ar, Xe, Kr, He, Ne, N₂O, H₂, and mixtures thereof.

In yet another alternative, after performance of step 200, a step 240 of applying a vacuum to the container interior may be performed. It may be particularly beneficial to perform step 240 after exposure of the foodstuff to the non-thermal plasma in order to remove significant portions of oxidizing compounds which for 10 some foodstuffs may have detrimental effects like accelerated oxidation and aging. The method then proceeds to step 270 as described above, but in this case a shelf-life extending gas is used and not a secondary gas. This particular alternative (step 200, step 240, step 270) may be used in lieu of using the shelf-life gas to both purge and replace the non-thermal plasma or the non-thermal plasma in a de-excited state. 15 Hence, less shelf-life extending gas is used.

The non-thermal plasma may be introduced to the interior of the container in a variety of ways. In one embodiment, the non-thermal plasma may be generated remotely from the container. In this embodiment, it may be generated outside of a tray type packaging machine and conveyed to the interior of the tray type packaging 20 machine and the container interior via a conduit. Alternatively in this embodiment, it may be generated outside of a flow pack machine and conveyed to the interior of the tubular plastic film via a nozzle. In another embodiment, the non-thermal plasma may be generated inside (*in situ* generation) or adjacent to the container. This embodiment may be realized in two sub-embodiments. In the first sub-embodiment, 25 the non-thermal plasma generation device is built into the tray type packaging machine (preferably built into a top lid) and the non-thermal plasma allowed to flow towards and into the interior of the container. In the second sub-embodiment, at least a portion of the generation device is built into the container itself.

Any known non-thermal plasma generating device may be utilized in practice 30 of the method and system. It is preferably a planar microwave power-applicating device comprising two or more electrodes energized by DC or AC power including radiofrequency, of a radiofrequency inductor, or a microwave plasma exciter known to people skilled in the art. Preferably, the non-thermal plasma generation device

utilizes a planar microwave applicator of the type disclosed by WO2009047441, the entire contents of which are incorporated herein by reference. This particular type of generation device is particularly advantageous in the embodiments where the generation device (at least portion of) is built into the tray type packaging machine or 5 built into the container. When the non-thermal plasma generation device is located remotely from the container and the generation is not done *in situ*, there is more freedom in designing the plasma excitation device because, as being located remotely, its designed is not constrained by geometrical factors imposed by the container structure. An exemplary interelectrode distance may be in the range of 1- 10 20 cm, preferably 1-5 or 5-20 cm. One of ordinary skill in the art will recognize that process optimization may be achieved by varying the interelectrode distance in a known manner, or any other design parameter of the plasma excitation device.

While one of ordinary skill in the art will recognize that non-thermal plasma treatment of foodstuffs may be optimized by varying the contact time, an exemplary 15 contact time in practice of the invention is between 0.1 sec to 600 seconds, preferably 5 to 60 seconds. Similarly, while such a one will recognize that process optimization may be achieved by varying the pressure inside the container during exposure of the foodstuff to the non-thermal plasma, an exemplary pressure is in the range of 1,000 Pascal to 11,000 Pascal.

20 It is further understood by one ordinarily skilled in the art that the following variables may be varied in an empirical manner in order to optimize the treatment for a particular food product: the route of non-thermal plasma application (direct versus remote), non-thermal plasma power or density, distance from the foodstuff surface to be treated, selection of treatment gas used to generate the non-thermal plasma, the 25 pressure of the non-thermal plasma, the average velocity of the plasma gas flowing into or through the container (i.e. residence time of the plasma active species). This latter parameter has possibly to be matched to the lifetime of the different plasma species so that a sufficient amount of them can reach any point of the surface of the foodstuff so as to complete the sanitation treatment effectively. Such lifetime is 30 generally dependant on pressure.

The non-thermal plasma based disinfection exists even if it does not contain any disinfecting chemical (i.e. a product that would have a germicidal effect regardless of the presence of the plasma excitation or not) such as hydrogen

peroxide. While not being bound by any one theory, it is believed that the mechanisms of the inactivation of the microorganism by this type of plasma can be explained as follows:

- 1) Degradation of the genetic material by ultraviolet radiations emitted by the plasma: In plasma, atoms, molecules, ions, radicals carry a high intrinsic energy and are de-energized by emitting UV photons. These photons are similar to the ones emitted by a spectral lamp and have a similar effect. They however have the advantage of not being subjected to the effects of shading and stacking of the germs. Indeed, UV emitted in-situ with the centre even gas surrounds and bathes the germs from all the directions and can cover the surface exposing the microorganisms evenly.
- 2) Direct antimicrobial action of oxidizing radicals: The latter, in particular atomic oxygen, are oxidants much stronger than any chemical available commercially. They will have a rather similar effect of inactivating microorganisms compared to oxidizing chemical used to destroy microorganisms.
- 3) Erosion of the matter of the micro-organisms by chemical/ physical effects: The oxidizing radicals also have the property to chemically etch the organic matter i.e. they form, with carbon and the hydrogen (from the matter), volatile species like CO₂ and H₂O that go to the gas phase and are pulled by the flow of evacuation. In fact, the microorganisms undergo a "cold combustion on the spot". This volatilization of the matter can also be assisted by the ionic bombardment or UV photons. It should also be noted, although it is less known, that reducing radicals can have the same effect of chemical erosion (for example the atomic hydrogen produced in a plasma makes it possible to effectively degrease metal surfaces without oxidizing them). Finally, the erosion can have purely physical origin: the solid organic matter can be dissociated and vaporized in contact with the high energy species.

Exposure of foodstuff to plasma environment allows a notable reduction in the microorganism contaminant without any cooking effect since the gas remains at the ambient temperature. The other physiochemical effects of the cold plasma on the fresh food products need to be investigated, but the plasma treatment leaves little if

any, in theory, residue since the radical active species responsible for the useful effects have a very short lifespan.

One can use various devices to apply the excitation to the gas to ionize the gas to form plasma. The choice depends in particular on the geometry of the product, the container and the packaging system, and also of the pressure of work imposed.

As best shown in FIG 3, the non-thermal plasma may be generated in conjunction with a tray type packaging machine.

In FIG 3, the foodstuffs 1 are placed into individual compartments of a pre-formed, rigid or semi-rigid, continuous plastic lower film 3. An upper web 4 (comprising a backing 14 and plastic upper film 15) is fed from a roller 3 to the tops of the individual compartments. The combined web 4 and lower film 3 is batchwise fed into the tray type packaging machine 5. The lid 7 is then placed over the combined web 4 and lower film 3. Each compartment rests within a separate portion 9 of the tray type packaging machine 5. If desired, a vacuum may be applied to the interior of the tray type packaging machine 5 to remove the ambient atmosphere (air) from within. The non-thermal plasma is either generated remotely at a non-thermal plasma generation device (not shown) and conveyed to the interior of the tray type packaging machine 5 via a conduit (not shown) or the non-thermal plasma is generated inside the tray type packaging machine 5. The non-thermal plasma is then introduced into the individual compartments of the combined web 4 and lower film 3. If no vacuum was previously applied, the non-thermal plasma flushes out any ambient atmosphere (air) from the compartments.

After the foodstuff 1 is exposed to the non-thermal plasma for the desired period of time, the upper web 4, lower film 3, and foodstuff 1 may be processed in one of three ways. First, the upper web 4 may be sealed to the lower film 3 by heated sealing devices 11 at the expiration of the desired period of exposure time. This option seals the non-thermal plasma or non-thermal plasma in a de-excited state in the containers 19. Second, a vacuum may be applied to the interior of the tray type packaging machine 5 and the upper web 4 sealed to the lower film 3 with devices 11. This results in vacuum-packed containers 19. Third, a vacuum may be applied to the interior of the tray type packaging machine 5, a shelf-life extending gas injected thereinto, and the upper web sealed to the lower film 3 with devices 11.

After the processing step, the treated upper web 4, lower film 3, and foodstuffs 1 are removed from the tray type packaging machine 5 and a backing 14 is removed from the upper web 4 and gathered onto a roller 13. After removal of the backing 14, the plastic upper film 15 remains sealed to the plastic lower film. The upper and lower 5 films 15, 3 are then cut into individual containers 19 at the cutting station 17.

As best illustrated in FIG 4, the non-thermal plasma may be introduced to the interior of the container in the context of a flow pack machine. Pre-formed trays 21 are fed by a conveyor 23 towards a foodstuff feeder 2 that feeds foodstuffs 1 into the pre-formed trays 21. A film 27 is fed from a roll 25 towards the conveyor 23 and pre-10 formed trays 21 and wrapped around itself so that opposite sides 27A of the film 27 are superimposed upon one another to form a tubular plastic film with an unsealed seam along the superimposed sides 27A. The seam is then sealed with a heated sealing device 29. The non-thermal plasma is generated remotely and conveyed (not shown) to a nozzle 31 extending into the interior of the sealed tubular film 27 15 adjacent the foodstuffs 1 to flush the air from within the interior of the sealed tubular film 27. Upper and lower portions of the film 27 in between adjacent pre-formed trays 21 are then sealed to one another with a heated sealing device 33 to trap the non-thermal plasma within sealed containers 37 each one of which contains a pre-formed tray 21 holding the foodstuff 1. A cutting device then cuts apart adjacent 20 sealed containers 37. One of ordinary skill in the art will recognize that this is a continuous process.

As best illustrated in FIG 5, the non-thermal plasma generation device may be built into the lid 7 of the tray type food packing machine 5 of FIG 3. The generation device includes a dielectric discharge barrier 47 that cooperates with an electrode 45 25 (formed into or adhered to the inside or outside bottom surface of tray-shaped container 43) disposed underneath barrier 47. Upon energization of the barrier 47 with electrode 45 (and another electrode not shown), the non-thermal plasma flows downwardly and into the interior of the container 43. Alternatively, the electrode 45 is not built into or adhered to the container 43.

Preferred processes and apparatus for practicing the present invention have 30 been described. It will be understood and readily apparent to the skilled artisan that many changes and modifications may be made to the above-described embodiments without departing from the spirit and the scope of the present

invention. The foregoing is illustrative only and that other embodiments of the integrated processes and apparatus may be employed without departing from the true scope of the invention defined in the following claims.

What is claimed is:

1. A method for sanitation and preservation of foodstuffs, comprising the

5 steps of:

providing a container containing a foodstuff;

introducing a non-thermal plasma to an interior of the container; and

sealing the container.

10 2. The method of claim 1, wherein the container is sealed while containing the non-thermal plasma or the non-thermal plasma in a de-excited state.

3. The method of claim 2, further comprising the step of generating the non-thermal plasma from a treatment gas selected from the group consisting of N₂,

15 CO₂ O₂, Ar, Xe, Kr, He, Ne, N₂O, H₂, H₂O₂, CO, NO, and mixtures thereof.

4. The method of claim 1, further comprising the step of introducing a secondary gas to the interior of the container without displacing all of the non-thermal plasma or all of the non-thermal plasma in a de-excited state, wherein the

20 container is sealed while containing the secondary gas and non-thermal plasma or de-excited non-thermal plasma.

5. The method of claim 4, further comprising the step of generating the non-thermal plasma from a treatment gas selected from the group consisting of N₂,

25 CO₂ O₂, Ar, Xe, Kr, He, Ne, N₂O, H₂, H₂O₂, CO, NO, and mixtures thereof.

6. The method of claim 5, wherein:

the secondary gas is selected from the group consisting of N₂, CO₂ O₂, Ar, Xe, Kr, He, Ne, N₂O, H₂, H₂O₂, CO, NO, and mixtures thereof; and

30 the secondary gas is compositionally different from the non-thermal plasma.

7. The method of claim 1, further comprising the steps of:
removing all of the non-thermal plasma or all of the non-thermal plasma in a
de-excited state; and
introducing a shelf-life extending gas into the interior of the container, wherein
5 the container is sealed while containing the shelf-life extending gas.

8. The method of claim 7, wherein the shelf-life extending gas selected
from the group consisting of N₂, CO₂ O₂, Ar, Xe, Kr, He, Ne, N₂O, H₂, and mixtures
thereof.

10

9. The method of claim 8, wherein the non-thermal plasma or the de-
excited non-thermal plasma is removed by application of vacuum to the container
interior.

15

10. The method of claim 8, wherein the non-thermal plasma or the de-
excited non-thermal plasma is purged from the container interior by the introduction
of the shelf-life extending gas.

20

11. The method of claim 1, further comprising the step of removing the
non-thermal plasma or the non-thermal plasma in a de-excited state with application
of vacuum to the container interior, wherein the container is sealed under vacuum.

12. The method of claim 1, further comprising the step of combining
moisture with the non-thermal plasma.

25

13. The method of claim 1, wherein the treatment gas is selected from the
group consisting of H₂, a mixture of H₂ and He, a mixture of H₂ and Ar, a mixture of
H₂ and CO, a mixture of H₂ and H₂O₂, a mixture of H₂ and air, and a mixture of H₂
and N₂O.

30

14. The method of claim 1, wherein said step of introducing a non-thermal
plasma to an interior of the container is performed inside a food packaging machine.

15. The method of claim 14, wherein the food packaging machine is a flow pack type food packaging machine.


16. The method of claim 14, wherein the food packaging machine is a tray 5 type food packaging machine.


17. The method of claim 14, further comprising the steps of:
generating the non-thermal plasma with a non-thermal plasma generation
device located outside the food packaging machine; and
10 conveying the non-thermal plasma from the non-thermal plasma generation
device to the interior of the container.

18. The method of claim 17, wherein:
the food packaging machine is a flow pack type food packaging machine;
15 the container is a thin plastic tubular film; and
the non-thermal plasma is introduced into the interior of the tubular film with a
nozzle.

19. the method of claim 17, wherein the food packaging machine is a tray 20 type food packaging machine.

20. The method of claim 1, further comprising a step of applying a vacuum to an interior of the container before said step of introducing the non-thermal plasma.

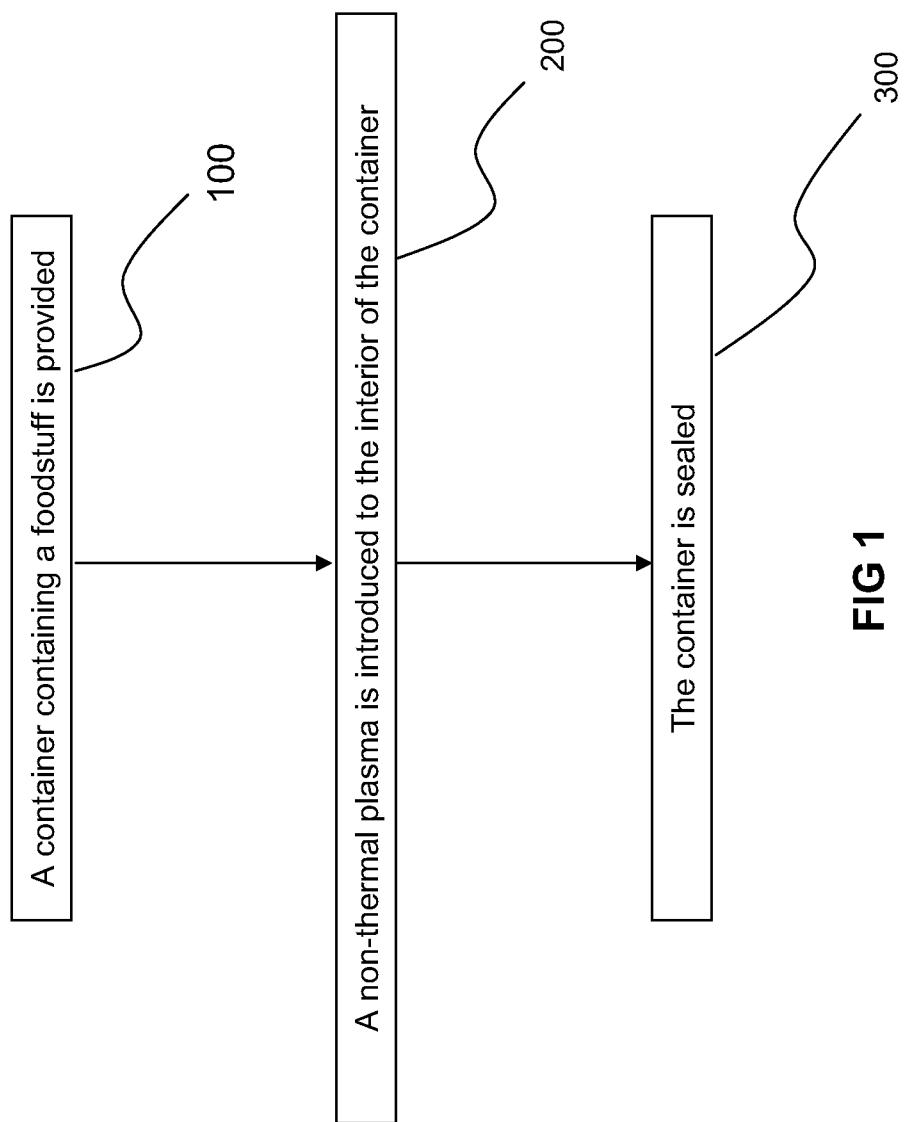**FIG 1**

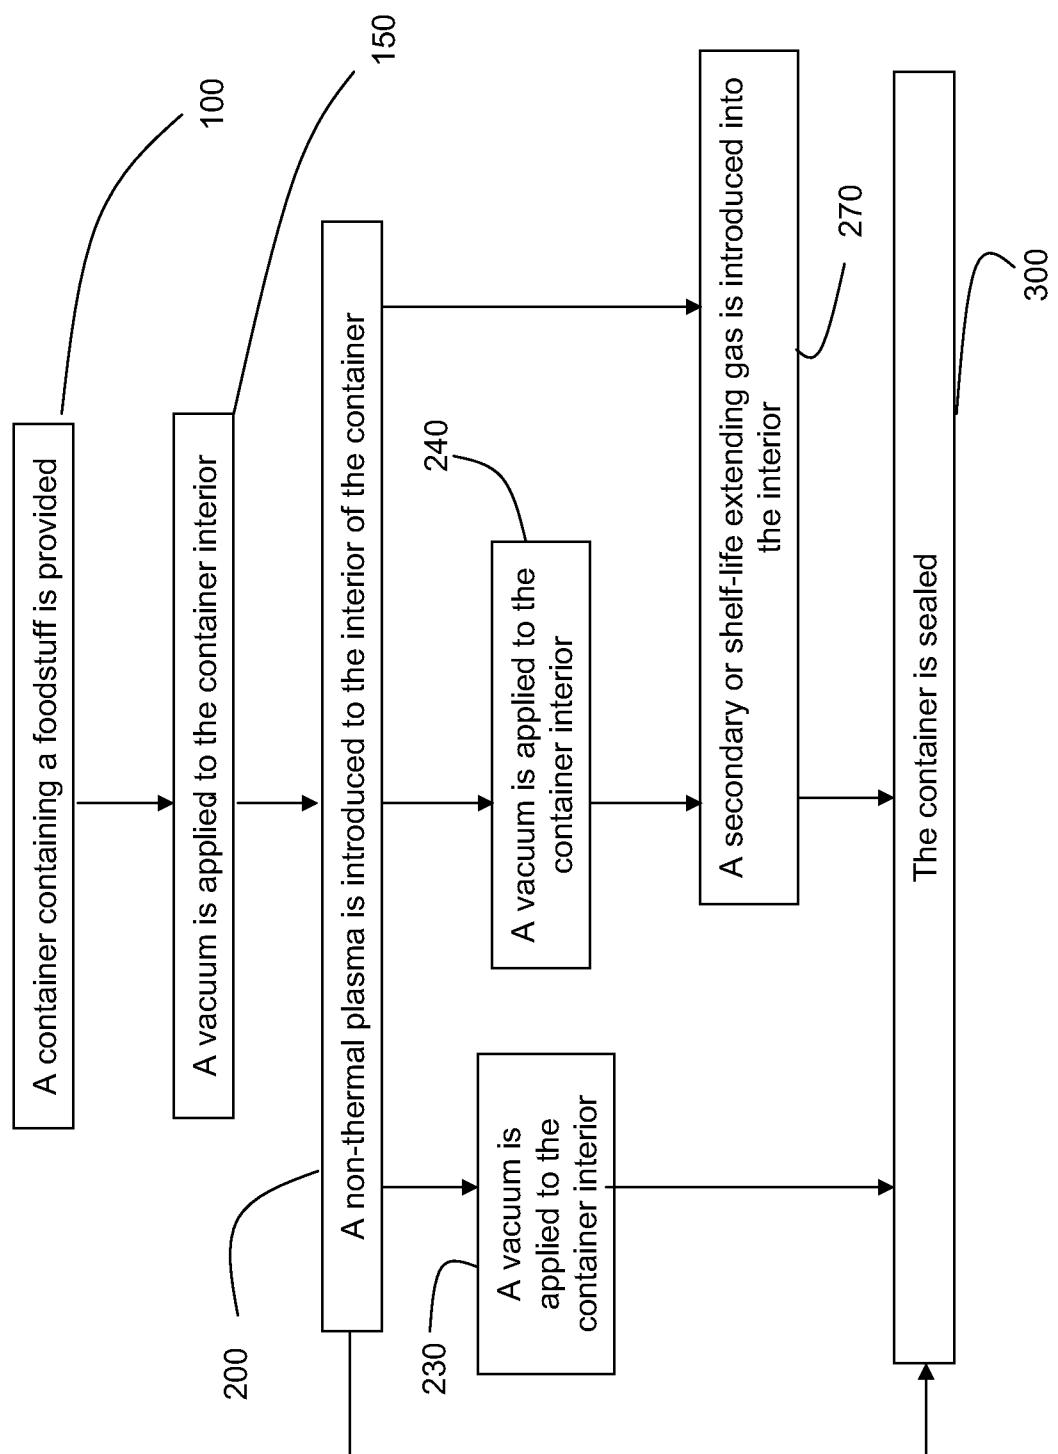**FIG 2**

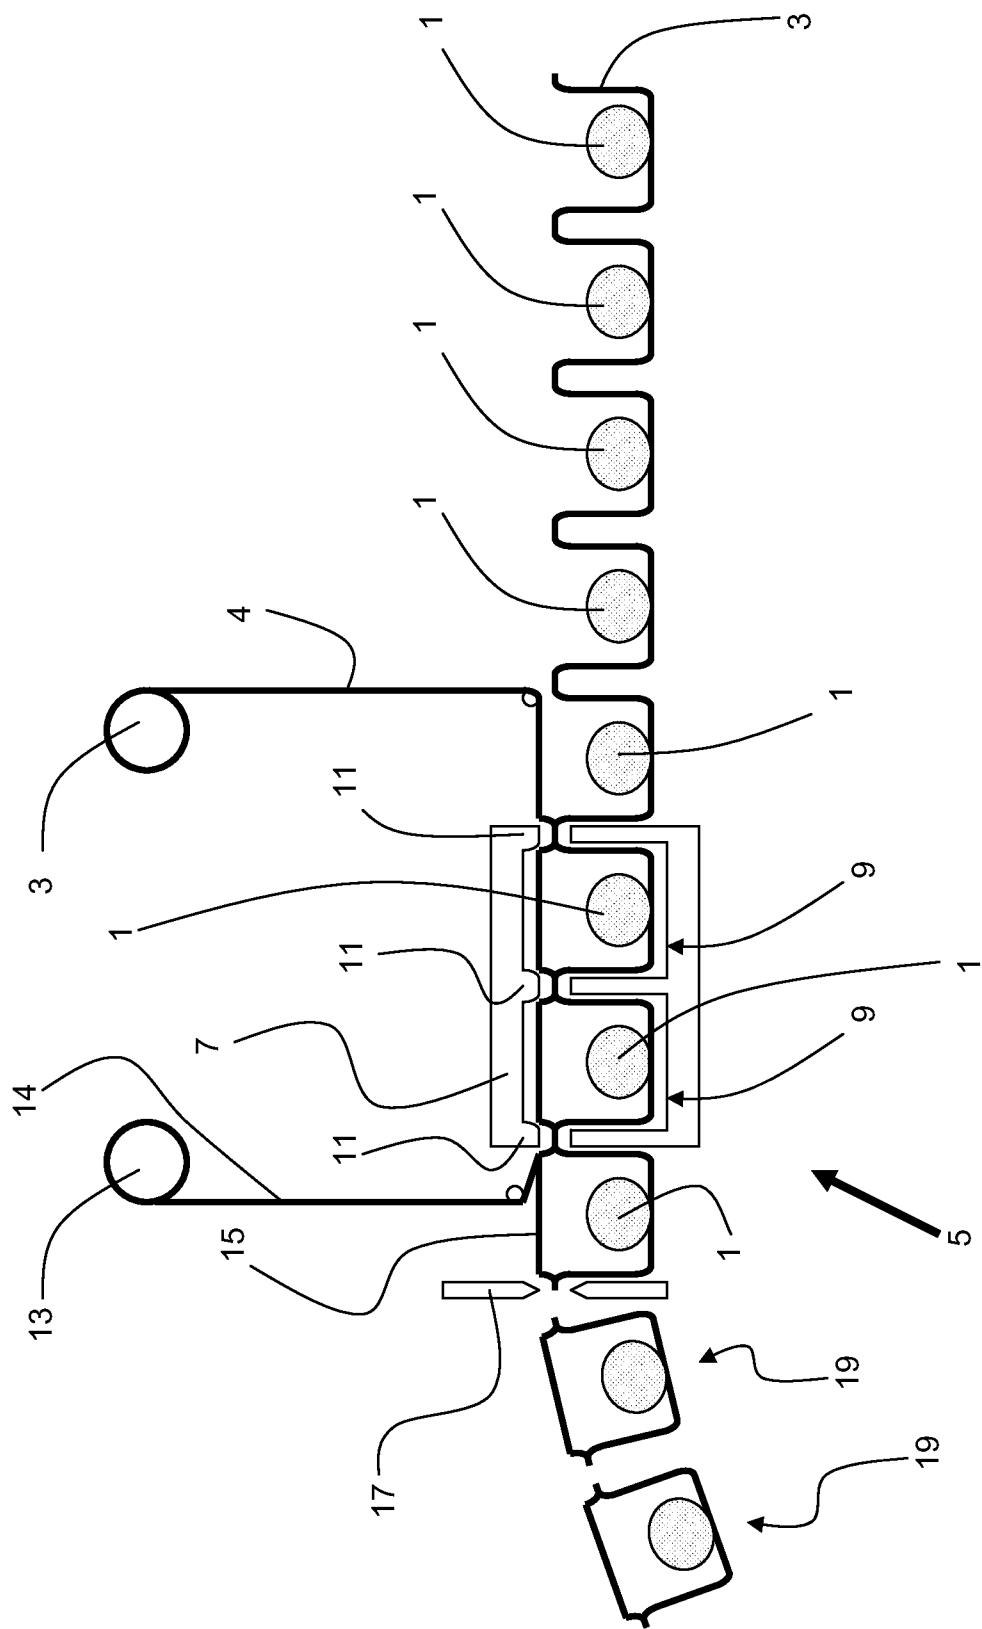


FIG 3

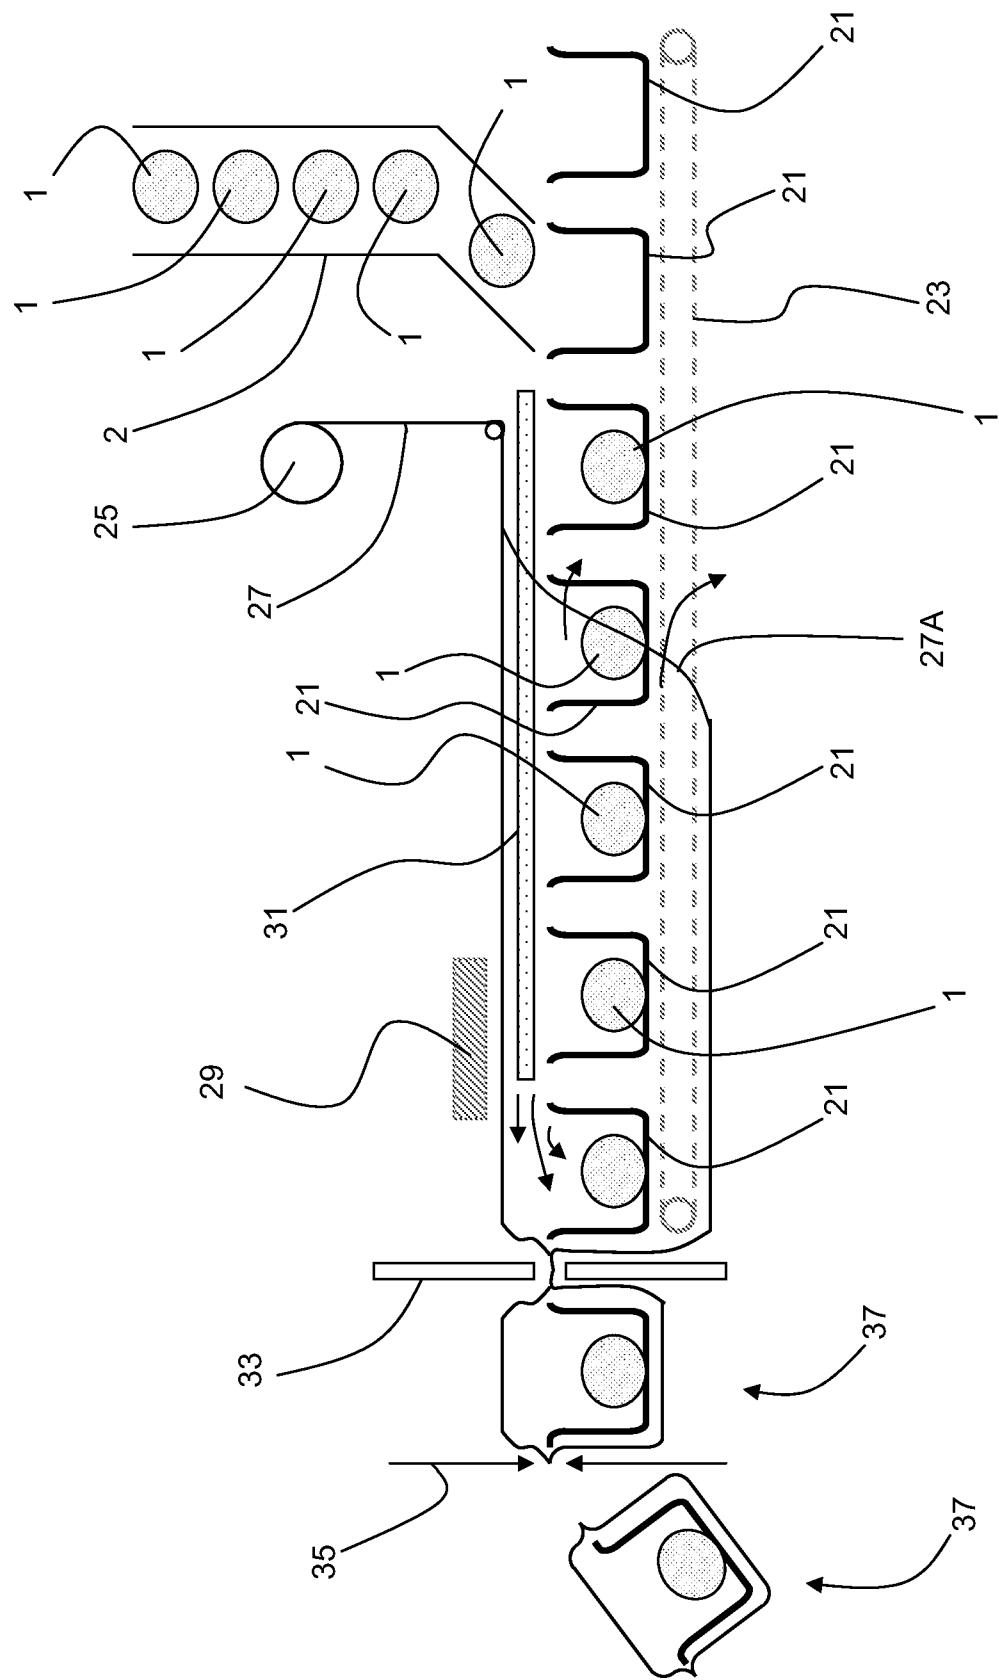
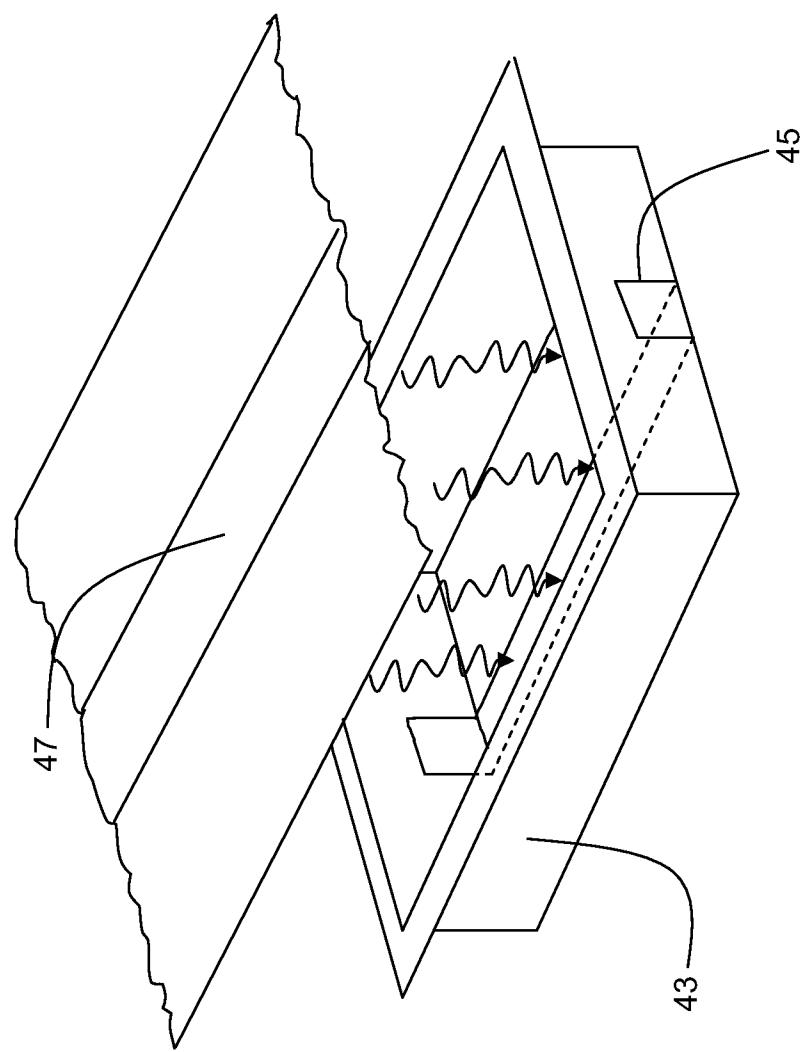


FIG 4

**FIG 5**

INTERNATIONAL SEARCH REPORT

International application No
PCT/US2010/041340

A. CLASSIFICATION OF SUBJECT MATTER
INV. A23L3/3409
ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
A23L

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, BIOSIS, FSTA, PAJ, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 2008/063577 A1 (CROWE RICHARD [US] ET AL) 13 March 2008 (2008-03-13) paragraphs [0003], [0006], [0008], [0011], [0013], [0023], [0027] – [0030] -----	1-20
A	US 2003/026877 A1 (RUAN R ROGER [US] ET AL) 6 February 2003 (2003-02-06) paragraphs [0001], [0005] – [0008], [0029] – [0030] claim 1 figure 1 -----	1-20
A	US 5 115 166 A (CAMPBELL BRYANT A [US] ET AL) 19 May 1992 (1992-05-19) column 1, lines 13-17 column 2, lines 16-52 column 3, lines 7-19 column 5, lines 36-59 -----	1-20
		-/-

Further documents are listed in the continuation of Box C.

See patent family annex.

* Special categories of cited documents :

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search	Date of mailing of the international search report
28 October 2010	04/11/2010
Name and mailing address of the ISA/ European Patent Office, P.B. 5818 Patentlaan 2 NL – 2280 HV Rijswijk Tel. (+31-70) 340-2040, Fax: (+31-70) 340-3016	Authorized officer Couzy, François

INTERNATIONAL SEARCH REPORTInternational application No
PCT/US2010/041340**C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT**

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	EP 0 278 623 A2 (SURGIKOS INC [US] JOHNSON & JOHNSON MEDICAL [US]) 17 August 1988 (1988-08-17) page 3, line 20 – page 4, line 6 column 5, lines 12-30 -----	1-20
A	EP 1 884 248 A1 (AIR LIQUIDE [FR]) 6 February 2008 (2008-02-06) paragraphs [0010] – [0013] examples 1-2 -----	1-20

INTERNATIONAL SEARCH REPORT
Information on patent family members

International application No PCT/US2010/041340

Patent document cited in search report	Publication date	Patent family member(s)		Publication date
US 2008063577	A1 13-03-2008	NONE		
US 2003026877	A1 06-02-2003	CA 2446575 A1 EP 1392134 A1 JP 2004522455 T WO 02089612 A1 US 2003180421 A1		14-11-2002 03-03-2004 29-07-2004 14-11-2002 25-09-2003
US 5115166	A 19-05-1992	AT 113847 T DE 69013947 D1 DK 0387022 T3 EP 0387022 A2 ES 2066969 T3 JP 2279160 A		15-11-1994 15-12-1994 27-02-1995 12-09-1990 16-03-1995 15-11-1990
EP 0278623	A2 17-08-1988	AU 616648 B2 AU 1078988 A BR 8800301 A CA 1299835 C DE 3889235 D1 DE 3889235 T2 ES 2063029 T3 IE 62878 B1 NZ 223182 A ZA 8800531 A		07-11-1991 28-07-1988 06-09-1988 05-05-1992 01-06-1994 06-10-1994 01-01-1995 08-03-1995 26-04-1990 27-09-1989
EP 1884248	A1 06-02-2008	NONE		