



- (51) **International Patent Classification:**
F21V 35/00 (2006.01)
- (21) **International Application Number:**
PCT/EP2015/057564
- (22) **International Filing Date:**
8 April 2015 (08.04.2015)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:**
14461524.2 9 April 2014 (09.04.2014) EP
- (71) **Applicant:** KORONA CANDLES S.A. [PL/PL]; ul. Fabryczna 10, PL-98-300 Wielun (PL).
- (72) **Inventors:** HURYLSKI, Marcin; ul. Południowa 9, PL-98-300 Wielun (PL). WOŁOWIEC, Jarosław Paweł; ul. Południowa 126, PL-98-324 Wierzchlas (PL). KOTAŁA, Roman; ul. Powstanców Warszawy 4, PL-98-300 Wielun (PL). BIEGANSKI, Robert; ul. Kadłub 44, PL-98-300 Wielun (PL). SOJA, Artur; os. Stare Sady 9/14, PL-98-300 Wielun (PL). TOMANIK, Krzysztof; ul. Grunwaldzka 17, PL-98-300 Wielun (PL). ZAWADZKA, Monika; Mokrsko 199, PL-98-345 Mokrsko (PL). WROBEL, Andrzej; ul. Jesionowa 15, PL-98-300 Wielun (PL).
- (74) **Agent:** PAWŁOWSKI, Adam; Eupatent.PL, ul. Żeligowskiego 3/5, PL-90-752 Łódź (PL).
- (81) **Designated States** (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM,

AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.


- (84) **Designated States** (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

- as to the identity of the inventor (Rule 4.17(i))
- as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))
- as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii))
- of inventorship (Rule 4.17(iv))

Published:

- with international search report (Art. 21(3))

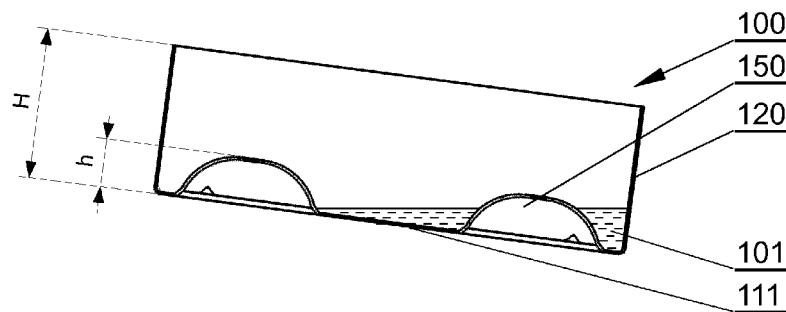(54) **Title:** A TEALIGHT CUP**Fig. 8**

(57) **Abstract:** A tealight cup comprising a side wall (120-720) and a base (110-710) with a flat central area (111-711) and at least two bulges (150-750) positioned around the flat central area (111-711) and having a height (h) of at least 10% of the height (H) of the side wall. The bulges (150-750) are positioned around the flat central area (111-711) circumferentially along a common circumference and have a total volume equal to at least 10% of the volume of the part of the cup from the base (110-710) to the height (h) of the bulges (150-750).

A TEALIGHT CUP

DESCRIPTION

5 TECHNICAL FIELD

The object of the present invention is a tealight cup.

BACKGROUND

10 There are known tealights provided in cups made of heat conductive material, such as metal (for example aluminum) or metal alloy, having a shape of a cylinder, wherein the diameter of a circular base is greater than the height of a sidewall. The cup serves as a bowl for a flammable mass, which melts and decreases its volume as it is combusted, until the whole melted mass is combusted, when the flame stops.

15 An PCT patent application WO2010064941 presents a tealight cup, in which a base has a formed groove along its edge and a central depression connected with three radially formed grooves. The angle between the bottom edge of the grooves and the horizontal level and the angle between the base plane and the horizontal level is between 0 and 60 degrees. The radial grooves serve to
20 guide the flammable mass from the outer edge of the base to the central depression where a wick is secured. The groove is relatively shallow (its depth equals about 5% of the total height of the cup). If the angle of groove inclination were to be increased, this would result in the increase of the angle of the base plane. Therefore, for increased inclination angles, the bottom has a shape of a
25 cone which is convex outwardly, which facilitates flow of melted flammable mass towards the wick.

A German patent document DE19548958 presents a structure of a tealight cup, which allows more efficient use of the flammable mass. The cup has a central cavity connected with shallow radial channels (having depth equal to about 8% of
30 the total height of the cup) formed in the bottom. The radial channels do not extend to the outer edge of the base of the cup.

A PCT patent application WO0139407 discloses a tealight cup having conical side walls and a bottom with small depressions forming legs of the cup, as well as a circumferential groove.

5 A US patent no. US7247017 discloses a construction of a tealight cup allowing a more efficient use of flammable mass. The cup comprises a convex perforated cap having a shape complementary to a recess formed centrally in the bottom of the cup. The cap and the recess are shaped so that, between the surface of the cap and the recess there is formed a capillary gap, through which the melted flammable mass flows towards a wick.

10 A US patent application US2007275336A1 discloses a candle holder with thin stubs formed in the bottom of the holder for preventing the candlewick and its supporting plate from moving horizontally when the solid fuel is melting.

A US patent US6033209 discloses a melody candle assembly, wherein a candle has a bottom cap with two recesses formed around different
15 circumferences around the central area of the cap in order to allow selection of different switches of a candlestick in order to select a melody to be played.

The construction of tealights candleholders depends mainly on their function and aesthetic properties. For example, a candleholder for tealights may form a set with a teapot for making tea - in such case the candleholder has a form
20 of a bowl on which the teapot is positioned. Fancy shapes of candleholders do not always allow for permanent mount of a tealight, especially when its base surface, on which the tealight is positioned, is not flat.

This may cause tilt of tealights with respect to a horizontal level, for example when the tealight is not positioned horizontally or when the candleholder is displaced. In addition, even if the candleholder allows for precise positioning of
25 the tealight within the candleholder, the candleholder itself may be tilted – for example, when it is positioned on an uneven surface, for example a tabletop of a table positioned in a garden or on an inclined window sill. In such a case, the melted flammable mass of the tealight will concentrate mainly in the lowest part of
30 the cup. This may cause loss of contact between the wick and the flammable mass leading to early extinguishing of the flame. As a consequence, an inclined tealight will burn out more quickly than a tealight positioned horizontally and

having the same structure of the cup, due to the fact that part of the flammable mass – concentrated in the lowest point of the inclined tealight – will remain unburnt.

There is therefore a need to provide a tealight cup, which will allow efficient
5 use of flammable mass even in case when the tealight burns in an inclined position.

SUMMARY

There is disclosed a tealight cup comprising a side wall and a base with a
10 flat central area and at least two bulges positioned around the flat central area and having a height (h) of at least 10% of the height (H) of the side wall. The bulges are positioned around the flat central area circumferentially along a common circumference and have a total volume equal to at least 10% of the volume of the part of the cup from the base to the height (h) of the bulges.

15 The bulges may have substantially the same shape.

The bulges may have different shapes.

The bulges may have a convex side wall.

Between the bulges there are formed radial grooves connecting the outer edge of the base with the central area.

20 Around the outer edge of the base there is formed a circumferential groove.

BRIEF DESCRIPTION OF DRAWINGS

The object of the invention has been presented in an exemplary embodiment on a drawing in which:

25 Fig. 1A, 1B show a tealight cup in a first embodiment having three similar bulges in a tilted top a bottom view, respectively;

Fig. 2A, 2B show a tealight cup in a second embodiment having two similar bulges in a tilted top a bottom view, respectively;

Fig. 3A, 3B show a tealight cup in a third embodiment having four similar
30 bulges in a tilted top a bottom view, respectively;

Fig. 4A, 4B show a tealight cup in a fourth embodiment having six similar bulges in a tilted top a bottom view, respectively;

Fig. 5A, 5B show a tealight cup in a fifth embodiment having three similar bulges in a tilted top a bottom view, respectively;

Fig. 6A, 6B show a tealight cup in a sixth embodiment having three similar bulges in a tilted top a bottom view, respectively;

5 Fig. 7A, 7B show a tealight cup in a seventh embodiment having four dissimilar bulges in a tilted top a bottom view, respectively;

Fig. 8 shows a tealight cup of Fig. 1A-1B in an inclined position, filled with melted flammable mass, in a side cross-sectional view along line A-A;

10 DETAILED DESCRIPTION

Figs. 1-7 show various embodiments of tealight cups 100-700, wherein in Fig. A shows the cup in a tilted top view and Fig. B shows the cup in a tilted bottom view.

As shown in the first embodiment on Figs. 1A-1B, the (preferably cylindrical)
15 cup 100 has a base 110, preferably circular, and a side wall 120 having a shape of side wall of a cylinder.

The circular base 110 of the cup 100 has a flat central area 111. The central area 111 is the area including the central point of the circular base and limited by the internal sides of the bulges 150, i.e. the sides which face the central point of
20 the circular base 110. In other words, the central area 111 may be defined as an area of a circle having a centre at the central point of the circular base 110 and circumference touching the closest side edge of the bulges 150. The circular central area 111 is indicated by dashed line on Fig. 5A. One of the functions of the central area 111 is to stabilize a wick cap and therefore to also stabilize the wick of
25 the tealight (not shown in the drawing). The cup 100 also has, along the side edge of the base, a groove 140. The central area 111 may be slightly raised above the bottom edge of the groove 140, such that when one cup 100 is placed on top of another one during transport, the central area 111 of the upper cup does not press on the wick of the lower cup.

30 Moreover, the cup 100 has three similar bulges 150 protruding from the base 110 towards the inside of the cup 100. The height (h) of the bulges is at least 10%, or at least 15%, or at least 20%, or at least 25%, or at least 30%, or at least

35%, or at least 40%, or at least 45%, or at least 50%, or at least 55%, or at least 60%, or at least 65%, or at least 70%, or at least 75% of the height (H) of the side wall 120.

The bulges 150 are positioned around the central area 111 symmetrically, i.e. along a common circumference 152. This may mean, for example, that the common circumference 152 contains the centre of gravity of each bulge 150, or the geometrical center of base of each bulge 150, or any point of the base of each bulge 150, or any point of the highest surface of each bulge 150.

The space for the flammable mass at the bottom of the cup shall have small volume. Preferably, the bulges 150 have a volume of at least 10% of the volume of the cup from the bottom to the height (h) of the bulges (i.e. the volume of the cup up to the height (h) occupied by the bulges is decreased by at least 10% with respect to the volume of a cup having a flat bottom without bulges), or at least 15%, or at least 20%, or at least 25%, or at least 30%, or at least 35%, or at least 40%, or at least 45%, or at least 50%, or at least 55%, or at least 60%, or at least 65%, or at least 70%, or at least 75% of the volume of the cup from the bottom to the height (h) of the bulges.

The bulges 150 are formed circumferentially around the central area 111. The bulges 150 are substantially symmetrical with respect to each other and have similar shapes. The bulges 150 have flat or convex side walls, which facilitates their easy forming and flow of the flammable mass towards the bottom. The side walls of the bulges 150 are shaped such that the flammable mass flows downwards both when the tealight is set horizontally and when the tealight is inclined.

The central area 111 may have a shape dependent on the number of the bulges of the cup 100. For example, in case of three bulges 150, the central area 111 may have a shape of a circle (as shown in Figs. 1A, 1B) or of a triangle (as shown in Figs. 5A, 5B) with straight, concave or convex sides.

Preferably, the bulges 150 have a shape such that their side edges 151 are substantially parallel to edges of neighboring bulges and form narrow radial grooves 130, which connect the central area 111 with the circumferential groove

140 in order to facilitate flow of flammable mass from the circumferential groove 140 to the central area 111.

There are at least two bulges 150 formed in the base 110.

Figs. 1-7 present different example embodiments of cups, whereas the
5 reference numerals 2xx, 3xx, 4xx, 5xx, 6xx, 7xx correspond substantially to reference numerals 1xx.

As shown in Figs. 1-6, the bulges 150-650 may be similar to each other. Alternatively, as shown in Fig. 7, the bulges 750, 755 may have different shapes.

As shown in Figs. 1, 2, 3, 4, 7, between the bulges there may be formed
10 narrow, radial grooves 130, 230, 330, 430, 730. Alternatively, as shown in Figs. 5, 6, the bulges may have a shape such that the edges of the neighboring bulges are not parallel to each other and do not form narrow grooves.

In Fig. 8 there is shown an inclined tealight cup 100 of Fig. 1A in a cross-sectional view along the A-A line.

15 The cup 100 is filled with melted flammable mass 101 and is positioned in an inclined position with respect to the horizontal line. The bulges 150 efficiently prevent concentration of significant amounts of melted flammable mass at the lowest point of the cup 100. The decreased volume of the cup in the circumferential section, as a result of bulges 150 formed in the base, causes
20 increase of the level of the melted flammable mass in the central area 111, in which the wick is located (as compared to cups without bulges), as well as concentration of lower amount of flammable mass at the lowest point of the cup.

The grooves 130 serve as channels through which the melted flammable mass may easily move towards the central area 111 of the cup 100, in which the
25 wick is located, in order to keep the level of the liquid even. The increase of the level of the flammable mass in the central area of the cup increases the burning parameters of the wick and makes it more difficult to accidentally extinguish the wick, due to wind or as a result of shaking of the cup.

Optionally, the whole surface of the circular base 110, apart from the
30 surface occupied by the bulges 150-750, the grooves 130-730 and the circumferential groove 140-740 can be flat.

Therefore, the construction of the base 110 of the cup 100 with bulges 150 formed between grooves 130 around the central area 111 allows maintaining a higher level of liquid (melted flammable mass) in comparison to tealight cups known from prior art, when the cup is set in an inclined position.

CLAIMS

1. A tealight cup comprising a side wall (120-720) and a base (110-710) with a flat central area (111-711) and at least two bulges (150-750) positioned around the flat central area (111-711) and having a height (h) of at least 10% of the height (H) of the side wall, characterized in that the bulges (150-750) are positioned around the flat central area (111-711) circumferentially along a common circumference and have a total volume equal to at least 10% of the volume of the part of the cup from the base (110-710) to the height (h) of the bulges (150-750).
2. The cup according to claim 1, characterized in that the bulges (150-650) have substantially the same shape.
3. The cup according to any of previous claims, characterized in that the bulges (750, 755) have different shapes.
4. The cup according to any of previous claims, characterized in that the bulges (150-750) have a convex side wall.
5. The cup according to any of previous claims, characterized in that between the bulges (150-450, 750) there are formed radial grooves (130-430, 730) connecting the outer edge of the base (110-410, 710) with the central area (111-411, 711).
6. The cup according to any of previous claims, characterized in that around the outer edge of the base (110-710) there is formed a circumferential groove (140-740).

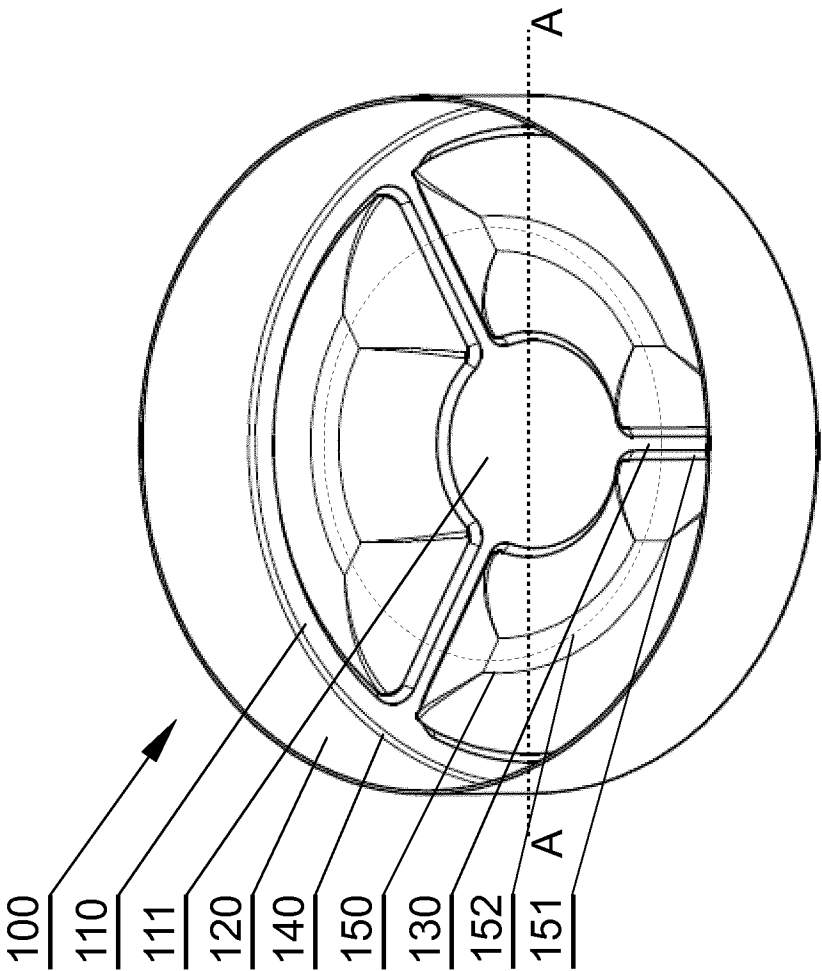


Fig. 1A

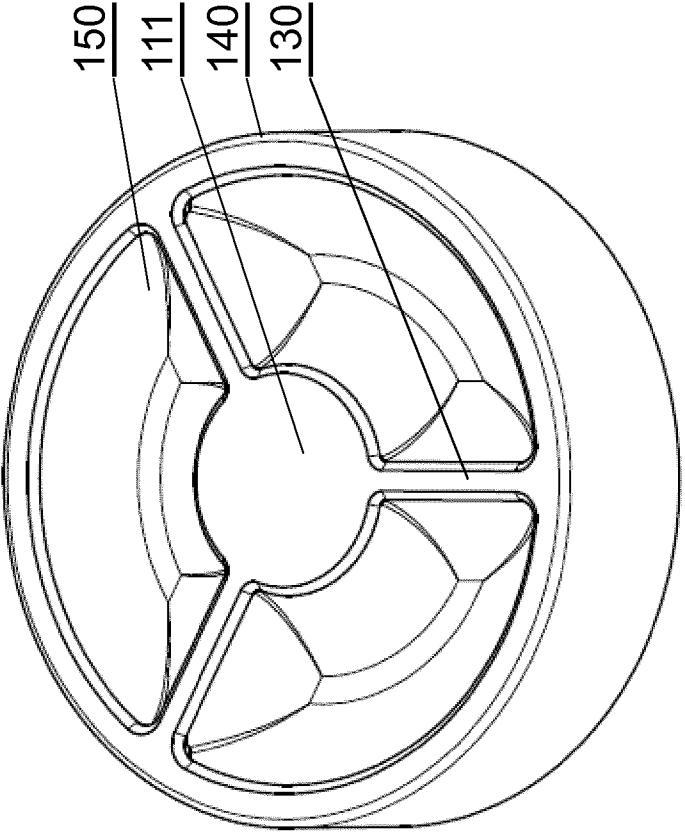


Fig. 1B

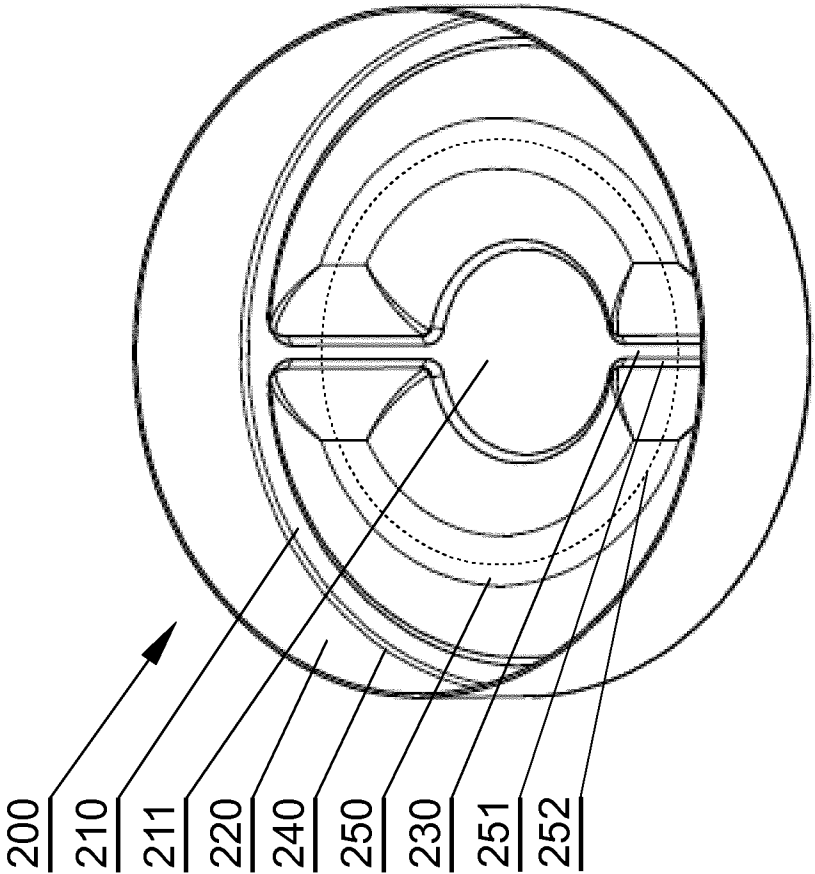


Fig. 2A

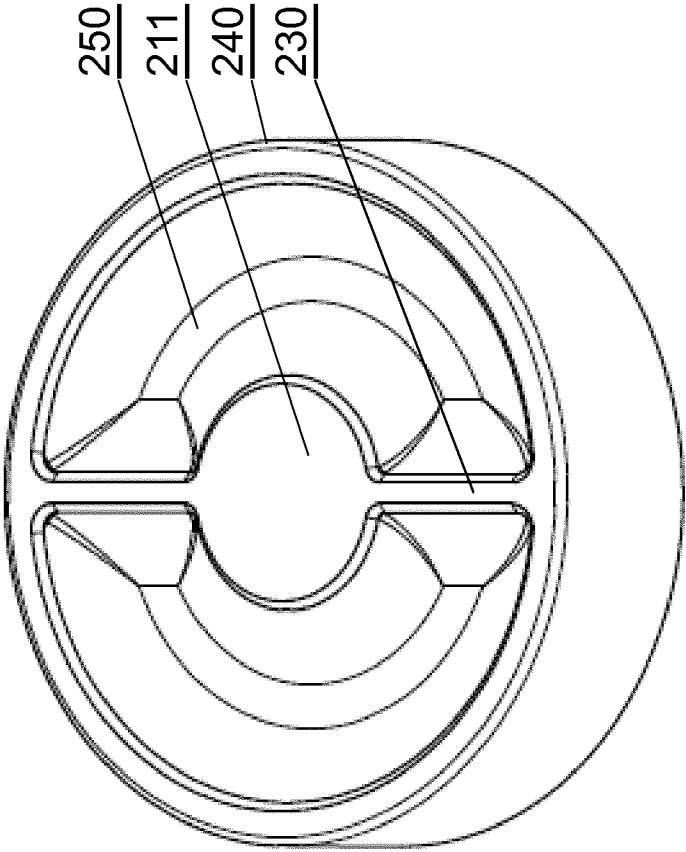


Fig. 2B

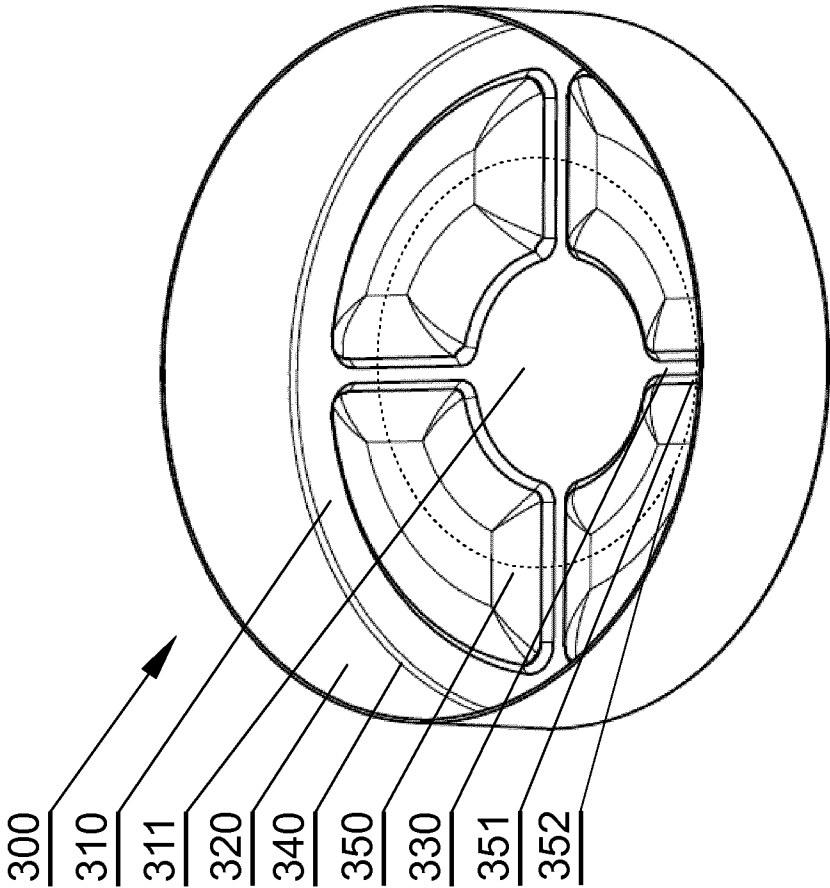


Fig. 3A

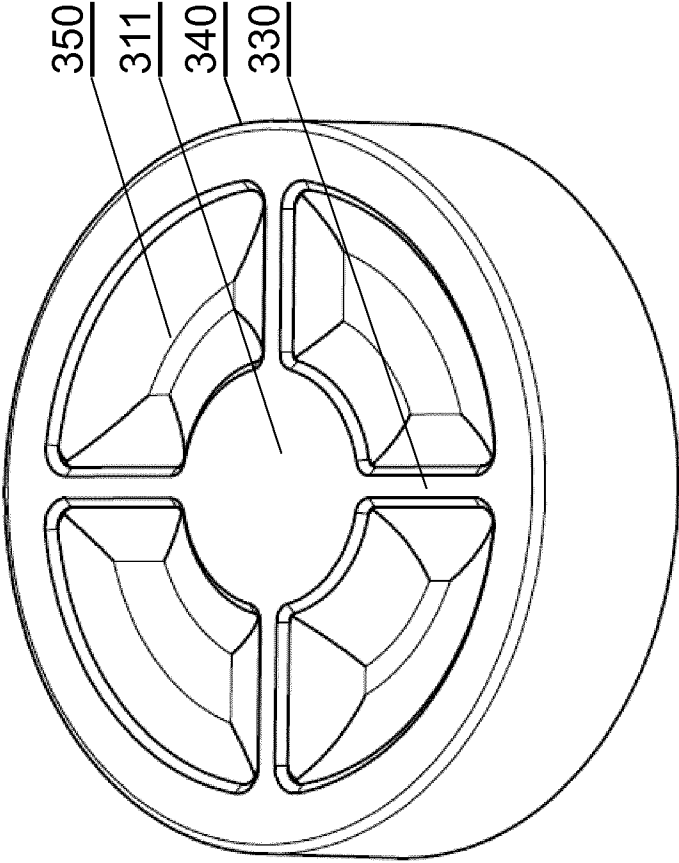


Fig. 3B

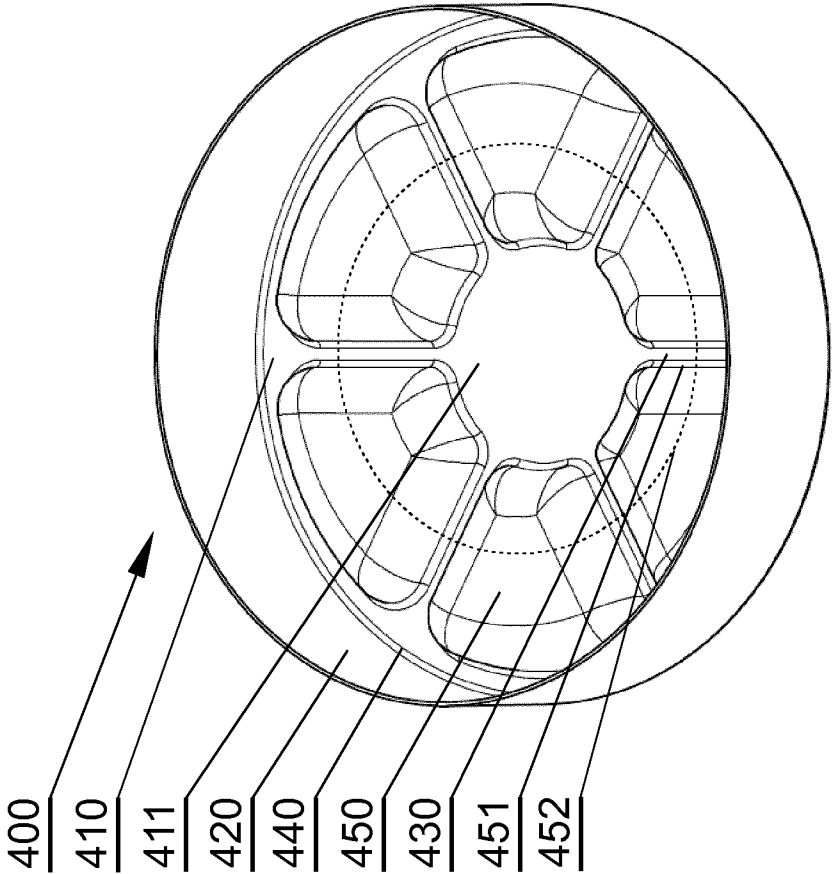


Fig. 4A

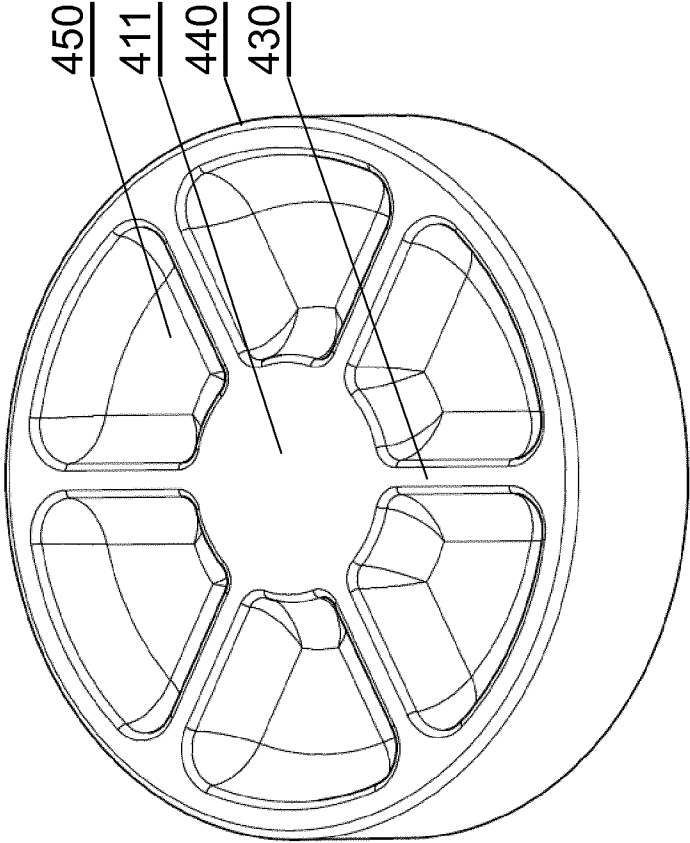


Fig. 4B

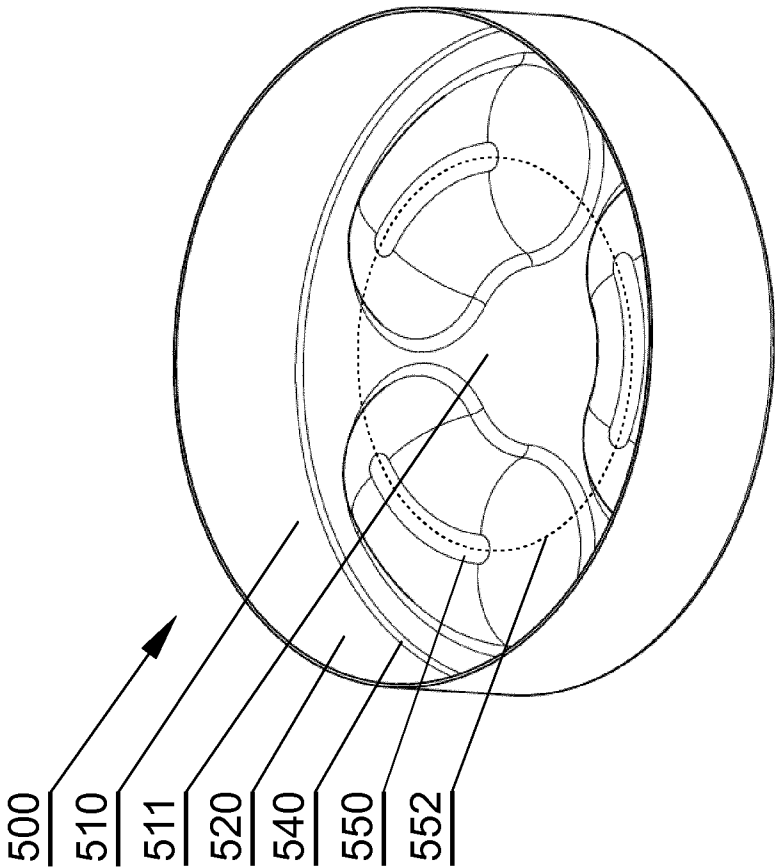


Fig. 5A

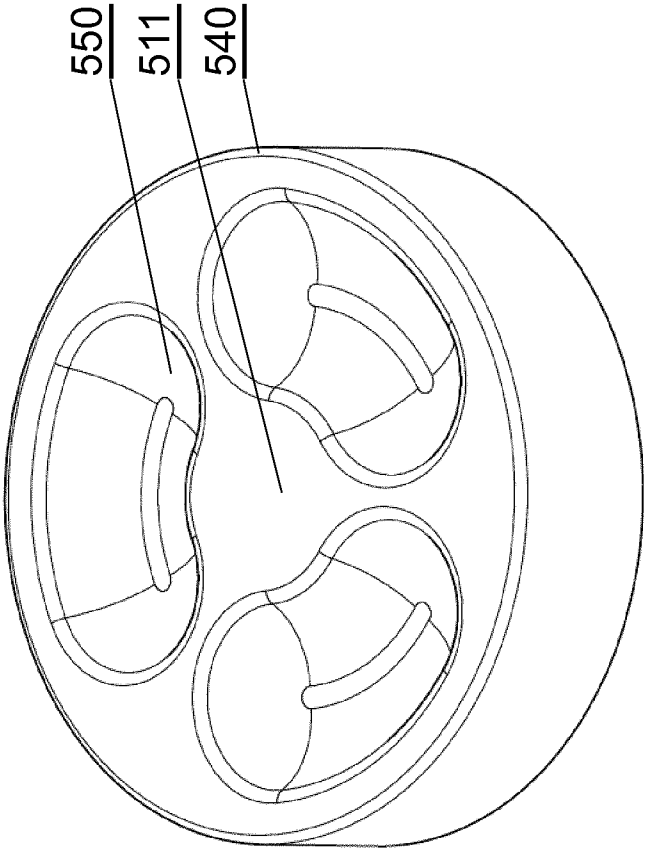


Fig. 5B

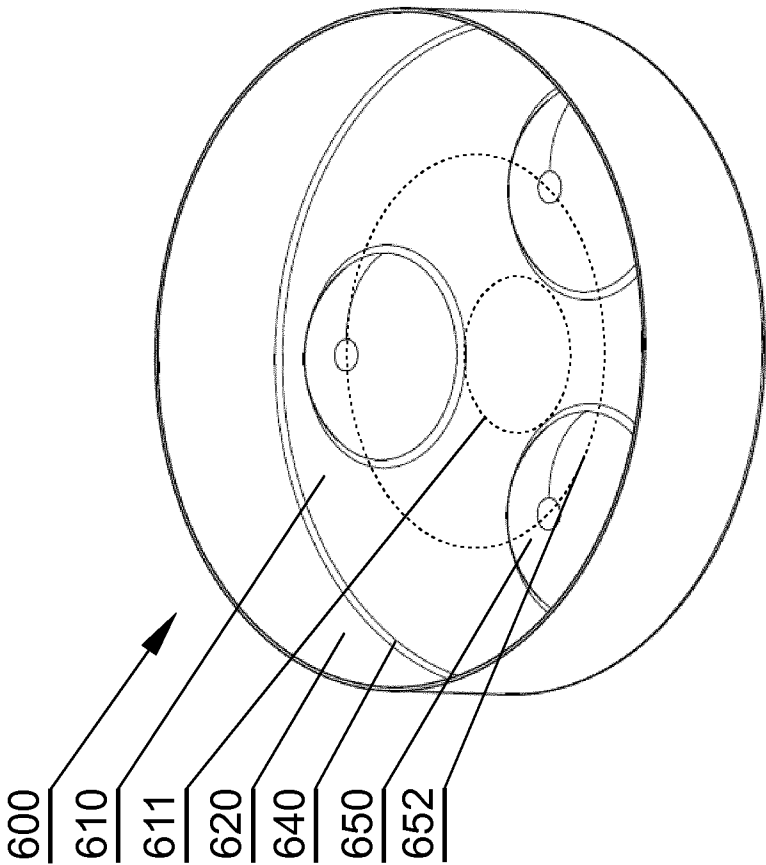


Fig. 6A

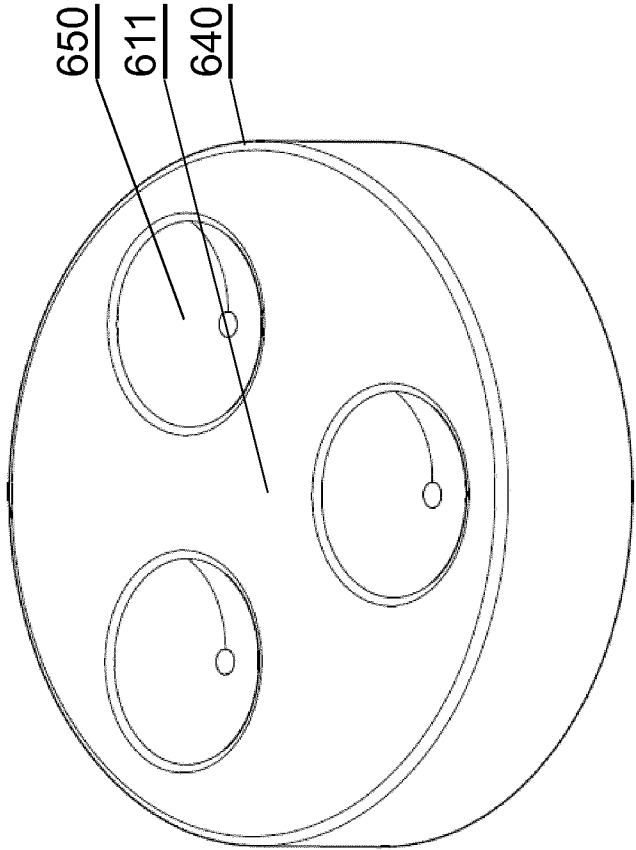


Fig. 6B

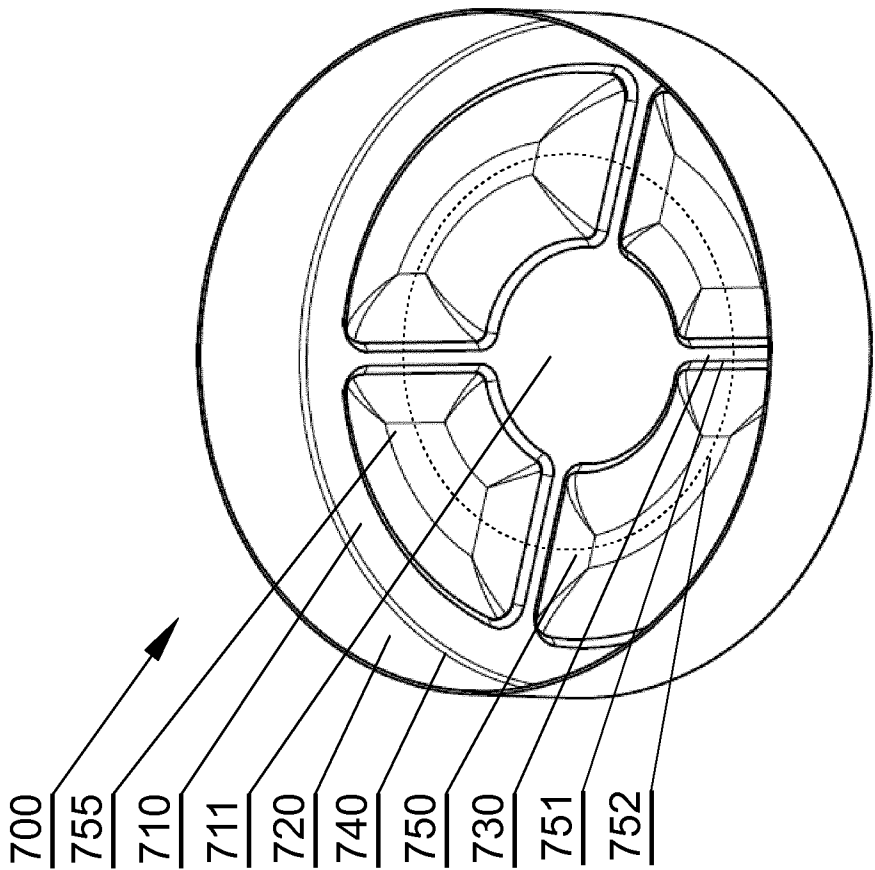


Fig. 7A

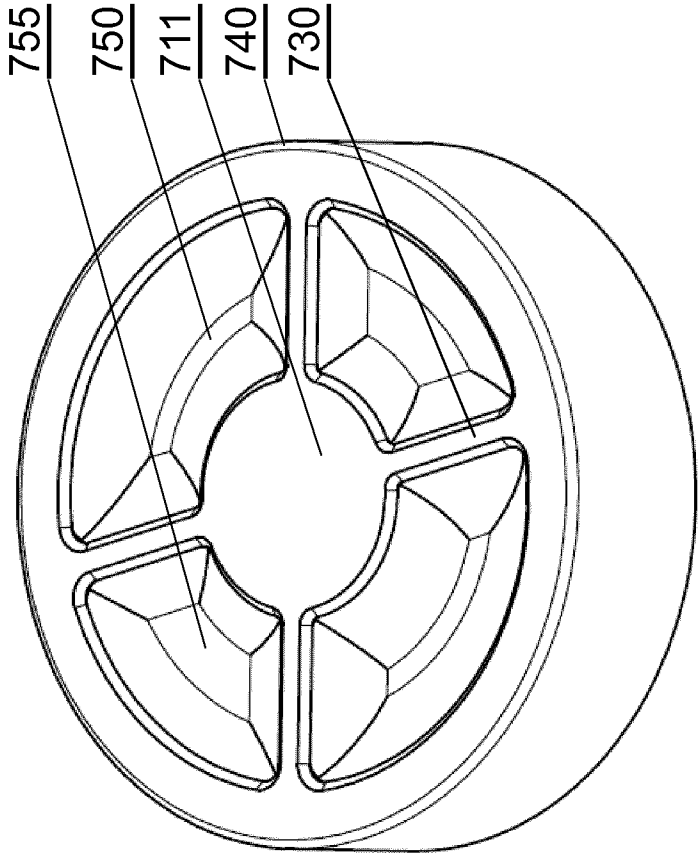


Fig. 7B

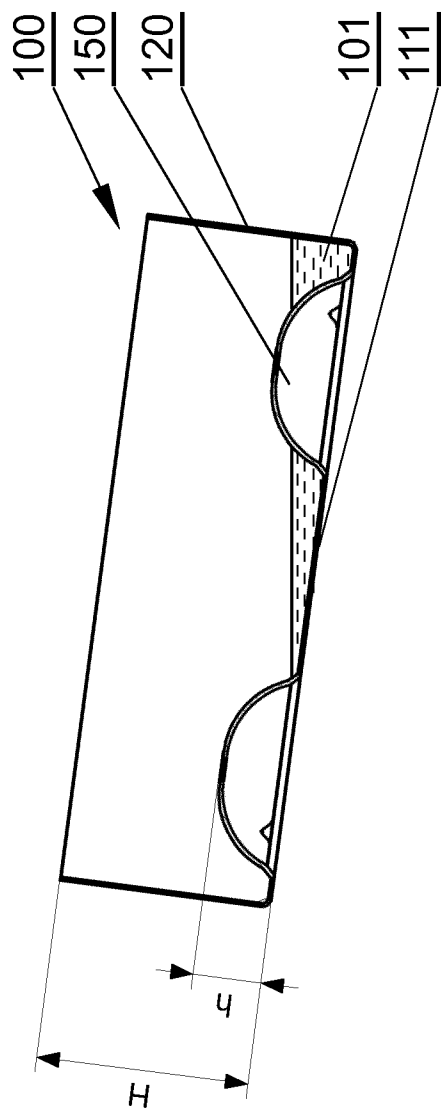


Fig. 8

INTERNATIONAL SEARCH REPORT

International application No
PCT/EP2015/057564

A. CLASSIFICATION OF SUBJECT MATTER
INV. F21V35/00
ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
F21V C11C

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	BE 1 013 350 A6 (BEHEER VAN TURNHOUT NV [BE]) 4 December 2001 (2001-12-04) figures 6,2	1
A	----- US 2007/275336 A1 (SUN CHUNG-CHIN [TW]) 29 November 2007 (2007-11-29) figure 1 paragraph [0018] paragraph [0020]	1
A	----- US 2007/015096 A1 (SOLLER DOUGLAS A [US] ET AL) 18 January 2007 (2007-01-18) figures 6,7,8,9 paragraph [0025] - paragraph [0027] ----- -/-	1



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

23 June 2015

Date of mailing of the international search report

21/07/2015

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040,
Fax: (+31-70) 340-3016

Authorized officer

Prévot, Eric

INTERNATIONAL SEARCH REPORT

International application No
PCT/EP2015/057564

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 6 033 209 A (SHIN HAENG CHUL [KR] ET AL) 7 March 2000 (2000-03-07) cited in the application column 2, line 45 figure 1 -----	1
A	WO 2010/064941 A2 (KORONA S A [PL]; WROBEL ANDRZEJ [PL]; CHUDECKI ADAM [PL]; KOTALA ROMAN) 10 June 2010 (2010-06-10) cited in the application the whole document -----	1
A	WO 01/39407 A2 (CREMER KARL HEINZ [DE]) 31 May 2001 (2001-05-31) cited in the application -----	1
A	DE 195 48 958 C1 (ALCAN GMBH [DE]) 5 December 1996 (1996-12-05) cited in the application -----	1
A	US 7 247 017 B2 (FURNER PAUL E [US]) 24 July 2007 (2007-07-24) cited in the application -----	1
A	DE 10 2008 027693 B3 (WACHSMUTH & CO WERKZEUGBAU [DE]) 14 January 2010 (2010-01-14) figure 3 paragraph [0026] -----	1

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/EP2015/057564

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
BE 1013350	A6	04-12-2001	NONE
US 2007275336	A1	29-11-2007	NONE
US 2007015096	A1	18-01-2007	AU 2006270068 A1 25-01-2007 CA 2615175 A1 25-01-2007 EP 1907753 A1 09-04-2008 US 2007015096 A1 18-01-2007 WO 2007011817 A1 25-01-2007
US 6033209	A	07-03-2000	JP 3505430 B2 08-03-2004 JP 2000149657 A 30-05-2000 US 6033209 A 07-03-2000
WO 2010064941	A2	10-06-2010	CA 2745791 A1 10-06-2010 CN 102239242 A 09-11-2011 EA 201170765 A1 30-12-2011 PL 210656 B1 29-02-2012 WO 2010064941 A2 10-06-2010
WO 0139407	A2	31-05-2001	AT 252025 T 15-11-2003 AU 2150401 A 04-06-2001 CA 2390604 A1 31-05-2001 CN 1399602 A 26-02-2003 DE 19956546 A1 07-06-2001 DK 1232588 T3 17-11-2003 EP 1232588 A2 21-08-2002 ES 2203542 T3 16-04-2004 PT 1232588 E 31-03-2004 TR 200301893 T4 21-01-2004 WO 0139407 A2 31-05-2001
DE 19548958	C1	05-12-1996	NONE
US 7247017	B2	24-07-2007	CA 2496947 A1 17-08-2005 EP 1564485 A2 17-08-2005 US 2004229180 A1 18-11-2004 US 2007287116 A1 13-12-2007
DE 102008027693	B3	14-01-2010	NONE