




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<p>(51) International Patent Classification ⁶ : H04N 5/232, 7/00, 7/14</p>	<p>A1</p>	<p>(11) International Publication Number: WO 99/35826 (43) International Publication Date: 15 July 1999 (15.07.99)</p>
<p>(21) International Application Number: PCT/US98/26970 (22) International Filing Date: 17 December 1998 (17.12.98) (30) Priority Data: 09/003,732 7 January 1998 (07.01.98) US (71) Applicant (for all designated States except US): INTEL CORPORATION [US/US]; 2200 Mission College Boulevard, Santa Clara, CA 95052 (US). (72) Inventor; and (75) Inventor/Applicant (for US only): FICHTNER, Mark, R. [US/US]; 844 N. Rita Court, Chandler, AZ 85226 (US). (74) Agents: TAYLOR, Edwin, H. et al.; Blakely, Sokoloff, Taylor & Zafman LLP, 7th floor, 12400 Wilshire Boulevard, Los Angeles, CA 90025 (US).</p>		<p>(81) Designated States: AL, AM, AT, AT (Utility model), AU (Petty patent), AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, CZ (Utility model), DE, DE (Utility model), DK, DK (Utility model), EE, EE (Utility model), ES, FI, FI (Utility model), GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SK (Utility model), SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).</p> <p>Published With international search report.</p>

(54) Title: AUTOMATIC TRANSFER OF IMAGE INFORMATION BETWEEN IMAGING DEVICE AND HOST SYSTEM

(57) Abstract

Image information is transferred between an imaging device (10) and a host system (20). The host system (20) detects that an imaging device (10) is connected to the host system (20). In response to detecting the imaging device (10), one or more images are transferred between the imaging device (10) and the host system (20).

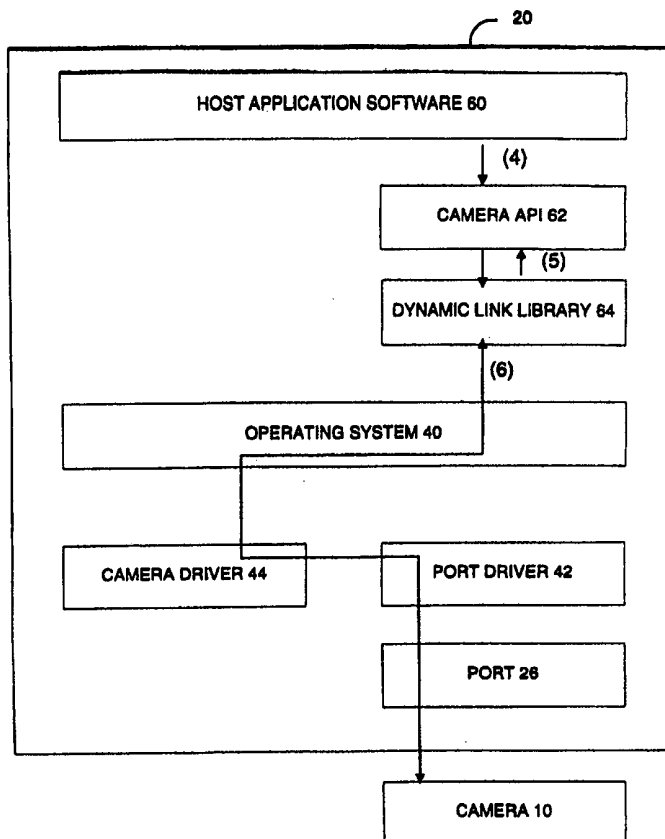

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

-1-

AUTOMATIC TRANSFER OF IMAGE INFORMATION BETWEEN IMAGING DEVICE AND HOST SYSTEM

FIELD OF THE INVENTION

The present invention relates to the field of imaging. More particularly, this invention relates to transferring image information between an imaging device and a host system.

BACKGROUND OF THE INVENTION

Imaging devices, such as cameras, typically store still or moving (video) image information on film, video tape, or other media. Digital cameras capture image information in digital format and store the image information in memory, such as a flash memory, or on other digital storage media. The digital image information can be downloaded to a host system, such as a personal computer. The image information can then be manipulated by rotating the image, cropping the image, or otherwise altering the image with software applications residing on the host system.

In order to process an image on a host system, a user attaches an imaging device to the host system, initiates application software for interfacing with the imaging device, and transfers image information between the imaging device and the host system. Each of these tasks can take several steps, and may be intimidating for a picture taker who has novice computer skills.

SUMMARY OF THE PRESENT INVENTION

A method of transferring image information between an imaging device and a host system is disclosed. The host system detects that an imaging device is connected to the host system. In response to detecting the imaging device, one or more images are transferred between the imaging device and the host system.

Other features, and advantages of the present invention will be apparent from the accompanying drawings and from the detailed description that follows below.

BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 shows a representation of an imaging device that is attachable to a host system.

Figure 2 shows one embodiment of the flow of information among the components of the host system when the imaging device 10 is first connected to the host system 20.

Figure 3 shows one embodiment of the flow of information among the components of the host system after the host application software 60 has been initiated.

Figure 4 shows one embodiment of the polling initialization process.

Figure 5 shows an embodiment of the polling process between the camera API 62 and the host applications software 60.

Figure 6 shows a flowchart of one embodiment of the process of transferring images between the imaging device and host system.

Figure 7 shows a flowchart of one embodiment of the process of detecting that an imaging device such as a camera is attached to a host system.

DETAILED DESCRIPTION

A method of transferring image information between an imaging device and a host system is disclosed. In one embodiment, the transferring of image information is performed automatically upon connecting the imaging device to the host system.

The imaging device may be an image capture device, such as a camera. Alternatively, the techniques disclosed can be used with any device that is capable of storing image information. The host system may be any system which is capable of manipulating image information. For example, the host system may be a personal computer such as an IBM-compatible personal computer running on an Intel Pentium® or Pentium® II processor. However, the host system could alternatively be a printer, plotter, fax machine, display device, or storage device.

-3-

Figure 1 shows a representation of an imaging device 10 that is attachable to a host system 20. In one embodiment, the imaging device 10 is attached via a cable 22 to a port 26 of the host system 20. The imaging device 10 is preferably coupled to the host system 20 using a data transfer protocol that supports a high data transfer rate. In one embodiment, the imaging device 10 is coupled to the host system 20 via a Universal Serial Bus (USB) connection. The USB connection provides for a data transfer rate of up to 12 Mb/s. Other connections and data transfer protocols may alternatively be used, such as the 1394 protocol. (More information on USB can be obtained from the World Wide Web at the URL <http://www.usb.org/>. The 1394 standard is maintained and distributed by the Institute of Electrical and Electronic Engineers. Firewire, one implementation of 1394, is defined by IEEE Standard 1394-1995.)

Figures 2 and 3 are embodiments showing the relationship and messaging between components of the host system 20 and imaging device (camera) 10. Figure 2 shows one embodiment of the flow of information among the components of the host system when the imaging device 10 is first connected to the host system 20. The host system 20 includes an operating system (O/S) 40 and host application software 60. The host system 20 detects when an imaging device such as a camera 10 is attached to the host system 20. In one embodiment, the operating system 40 detects whether a camera 10 is attached to the system by polling the port 26. A port driver 42 may be used to provide an interface between the operating system 40 and the port 26. In one embodiment, the port 26 is a USB port and the port driver is a USB driver.

The operating system may be one of a variety of different operating systems. In one embodiment, the operating system is a Windows* operating system, such as Windows* 95, or Windows* 98 made by Microsoft Corporation. Windows 98 includes hooks which allow the polling of ports. Other operating systems may be modified to provide for such polling. The polling is preferably performed in the background so that the user need not be aware that it is being performed. Alternatively, host application

* Third-party marks and brands are the property of their respective owners.

-4-

software 60 can perform the polling of the port 26. However, polling by the operating system 40 (instead of by host application software 60) has a performance advantage, since the operating system is already set up for polling various activities, such as keyboard pushes, mouse movements, and so forth. For the purposes of illustration, the following description assumes that the operating system does the polling. A person skilled in the art can make the modifications to allow an application to do the polling.

When a camera 10 is connected to the port 26 of the host system 20, the port driver 42 signals the operating system 40 that the camera has been attached to the host system 20. This is illustrated by the arrow marked (1) shown in Figure 1. The operating system 40 identifies the device as a camera and loads the corresponding software driver 44 into memory as illustrated by the arrow (2). In one embodiment, the operating system 40 interrogates the camera 10 to get an identifier. The operating system 40 loads the software driver 44 corresponding to the identifier. In this example, a camera driver 44 is loaded by the operating system 40.

The operating system 40 then loads one or more software applications corresponding to the camera. In one embodiment, the operating system allows software applications to be registered. Upon meeting a predetermined condition (such as a camera with a particular identifier being detected), the registered host software application is loaded. In this case, the host application software 60 (for the camera) is loaded as shown by the arrow (3). In one embodiment, the camera driver 44 signals the operating system 40 to initiate the host application software 60. The host application software 60 initiates the transfer of image information between the image device (camera) 10 and the host system 20. The host application software 60 may also process images. For example, the host application software 60 can perform decompression and/or color correction on the images. Furthermore, the host application software 60 may perform rotation, cropping, and other image manipulation functions.

Some operating systems, such as Windows 98 allow specific events to cause software applications to be launched. For example, the camera driver 44 can be set up with registered events such as "connection detected with camera" or "shutter button on

-5-

camera is pushed.” Thus, an operating system can be set up to automatically launch an application such as the host application software 60 when the camera 10 is attached.

In one embodiment, if the camera driver 44 or the host application software 60 is not installed on the host system 20 when the camera 10 is attached to the host system 20, then the user is requested to provide the camera driver 44 and/or host application software 60 for the device that has been attached to the port 26. Once the installation has been completed, the process proceeds as previously described.

Figure 3 shows one embodiment of the flow of information among the components of the host system after the host application software 60 has been initiated. In this embodiment, after being loaded, the host application software 60 creates and initializes a camera Applications Programming Interface (API) 62 as indicated by arrow (4). The camera API 62 may perform its task in a background thread. In this manner, the host application software 60 need not wait for the camera API 62 to complete before performing other tasks. In one embodiment, the camera API 62 is a COM object which loads an O/S-dependent dynamic link library (DLL) 64 as shown by arrows (5). The camera API 62 communicates to the operating system 40 via the DLL 64. (In another embodiment, the camera API 62 incorporates the DLL 64.) The operating system 40 in turn communicates with the camera 10 via the camera driver 44 and the port driver 42 as shown by arrows (6).

Figure 4 shows one embodiment of the polling initialization process. The polling initialization process begins with the operating system opening the host application software. The host application software 60 then creates and initializes a camera API 62. In one embodiment, the host application software 60 adds itself to the camera API's callback list, so that the host application software 60 will be notified when the camera API is successful in the polling process.

In one embodiment, the camera API upon initialization resets its internal variables, loads an O/S dependent DLL, and creates and starts a background thread. The camera API then inserts a message into the background threaded queue that tries to open the camera driver. (A driver is “opened” by establishing a connection with the

-6-

driver.) In one embodiment, the camera driver is only opened when a camera is attached: If the camera driver cannot be opened, then a camera is not attached to the host system. If a camera driver can be opened, then a camera is attached. In one embodiment, the camera API 44 attempts to open the camera driver every half a second.

Figure 5 shows an embodiment of the polling process between the camera API 62 and the host application software 60. In this embodiment, the camera API 62 attempts to open the camera driver. When it is successful at opening the camera driver, the camera API closes the camera driver, and notifies the applications in its callback queue. Since the host application software 60 is in the callback queue of the camera API, it is notified that a camera has been detected.

In this embodiment, the host application software 60 re-opens the camera driver 44 by signaling the camera API 62 to open the camera driver 44 and check for a compatible camera. The host application software 60 can then send various commands to the camera 10 via the camera API 44 (and the operating system 40 and drivers 44 and 42). For example, the host application software 60 can request the number of images stored in the camera. The host application software 60 can request a list of the names of the images and the image sizes, or it can request a particular image.

Figure 6 shows a flowchart of one embodiment of the process of transferring images between the imaging device and host system. In this case, the imaging device is a camera, and the host system is a personal computer. The flowchart begins at block 100. The process continues at block 102, at which the host application software creates a camera API. The camera API loads a DLL that is operating system dependent at block 104. At block 106, the camera API determines if a camera is available.

At block 108, if a camera is not available, then the flowchart returns to block 106. However, if a camera is available, the process continues at block 110. At block 110, the camera API sends a message to the host application software indicating that a camera is available. The host application software requests that the camera driver be open at block 112. The camera API responds by opening the camera driver, as shown

-7-

at block 114. The process of opening a driver means establishing a connection with the camera driver. At block 116, the host application software requests that images are transferred from the camera to the host system. The camera API responds by transferring image information from the camera to the host application software at block 118. Image information may include image pixel data as well as other information, such as color palette information, compression information, orientation of the image, and so forth. The flowchart terminates at block 120.

Figure 7 shows a flowchart of one embodiment of the process of detecting that an imaging device such as a camera is attached to a host system. The flowchart starts at block 200. It continues at block 202, in which the operating system determines if a camera is available. This may be done with the aid of a port driver such as a USB driver. If the camera is not available, the process returns to block 202. If a camera is available at block 204, the process continues at block 206 at which the operating system loads the camera driver.

In one embodiment, an operating system such as Windows 98 is used. Windows 98 allows the driver to signal the operating system of the camera being connected to the host system (the connection event), as shown by block 208. The operating system then opens the applications that are registered with the connection event. In this case, the host application software for the camera is initiated, as shown at block 210. The flowchart then continues with the flowchart of Figure 6.

If the operating system does not provide a way of opening an application based on the connection event, an alternate embodiment may use a "service" instead of the steps shown by blocks 208 and 210. The service is installed by the user and is initiated on the host system automatically when the host system boots up. The service opens the host application software when a camera is detected. In one embodiment, the service uses the camera API to determine if the camera is available. Thus, the service acts as a mini-host application in a manner similar to that shown in Figure 6. However, the service initiates the host application software when a connection to the camera driver is

-8-

established. The host application then establishes its own connection to the camera driver to transfer images from the camera.

In one embodiment, the host application software 60 and the camera driver 44 are shipped with the camera 10. The host application software 60 and camera driver 44 may be shipped via floppy disk or CD-ROM. Alternatively, the host application software 60 and camera driver 44 can be downloaded via the World Wide Web. The host application software 60 and camera driver 44 are installed to a storage medium on the host system, such as a hard disk, dynamic random access memory (DRAM), static random access memory (SRAM), or flash memory.

In the foregoing specification, the invention has been described with reference to specific exemplary embodiments thereof. It will, however be evident to someone having the benefit of this disclosure, that various modifications and changes may be made thereto without departing from the broader spirit and scope of the invention as set forth in the appended claims. The specification and drawings are, accordingly, to be regarded in an illustrative rather than a restrictive sense.

CLAIMS

WHAT IS CLAIMED IS:

1. A method of transferring image information between an imaging device and a host system, the method comprising the steps of:
 - (a) detecting that the imaging device is connected to the host system; and
 - (b) transferring one or more images between the imaging device and the host system in response to the step (a).
2. The method of claim 1, wherein the step (b) further comprises sensing that the imaging device is connected to a port of the host system.
3. The method of claim 1, wherein the step (b) further comprises sensing that the imaging device is connected to a USB port of the host system.
4. The method of claim 1, wherein the step (b) further comprises sensing that the imaging device is connected to a 1394 port of the host system.
5. The method of claim 1, wherein the steps (a) and (b) further comprise the steps of:
 - (a) detecting that a camera is connected to the host system; and
 - (b) transferring one or more images between the camera and the host system in response to the step (a).
6. The method of claim 5, wherein the step (b) further comprises the step of:
 - (b) transferring one or more images between the camera and a host personal computer system in response to the step (a).
7. The method of claim 1, wherein the step (b) further comprises the step of:

-10-

(b) transferring one or more images between the imaging device and a host personal computer system in response to the step (a).

8. The method of claim 1, wherein the step (b) further comprises the step of:

(b) initiating an application program running on the host system in response to the step (a).

9. A system comprising:

a processor;

a storage medium storing instructions which when executed by the processor cause the processor to perform the steps of:

(a) detecting that an imaging device is connected to the system; and

(b) transferring one or more images between the imaging device and the system in response to the step (a).

10. The system of claim 9, wherein the storage medium stores instructions which when executed by the processor cause the processor to perform the step of:

(c) initiating an application program running on the host system in response to the step (a).

11. A computer-readable medium having stored thereon a plurality of instructions which, when executed by a processor, cause the processor to perform the steps of:

(a) detecting that an imaging device is connected to a host system; and

(b) automatically transferring one or more images between the imaging device and the host system in response to the step (a).

12. The computer-readable medium of claim 11, wherein step (b) further comprises of:

-11-

(b) initiating an application program running on the host system in response to the step (a).

13. A method of transferring image information from a camera to a personal computer, the method comprising the steps of:

- (a) detecting that the camera is connected to the personal computer;
- (b) loading a camera driver in response to the step (a);
- (c) signaling an operating system that the camera is connected to the personal computer; and
- (d) transferring the image information from the camera to the personal computer.

14. The method of claim 13, wherein the step (d) of transferring image information further comprises the step of:

- (d) initiating an application program for transferring the image information from the camera to the personal computer.

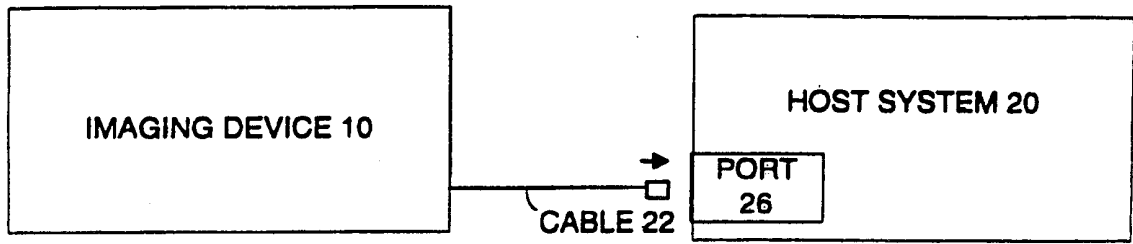


FIG. 1

2/6

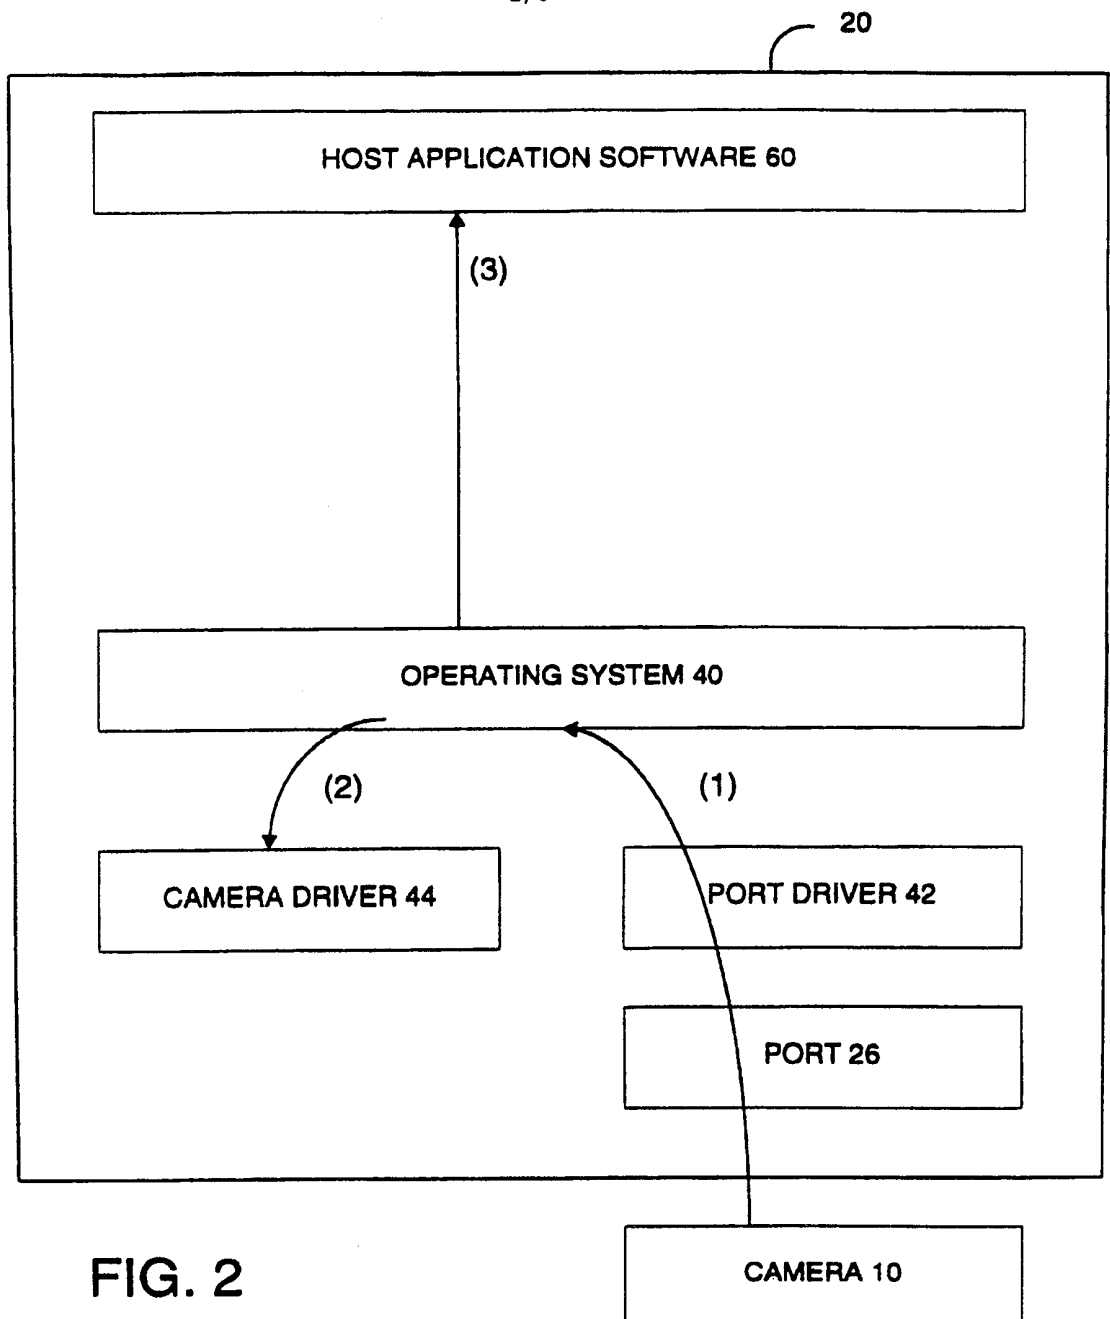


FIG. 2

3/6

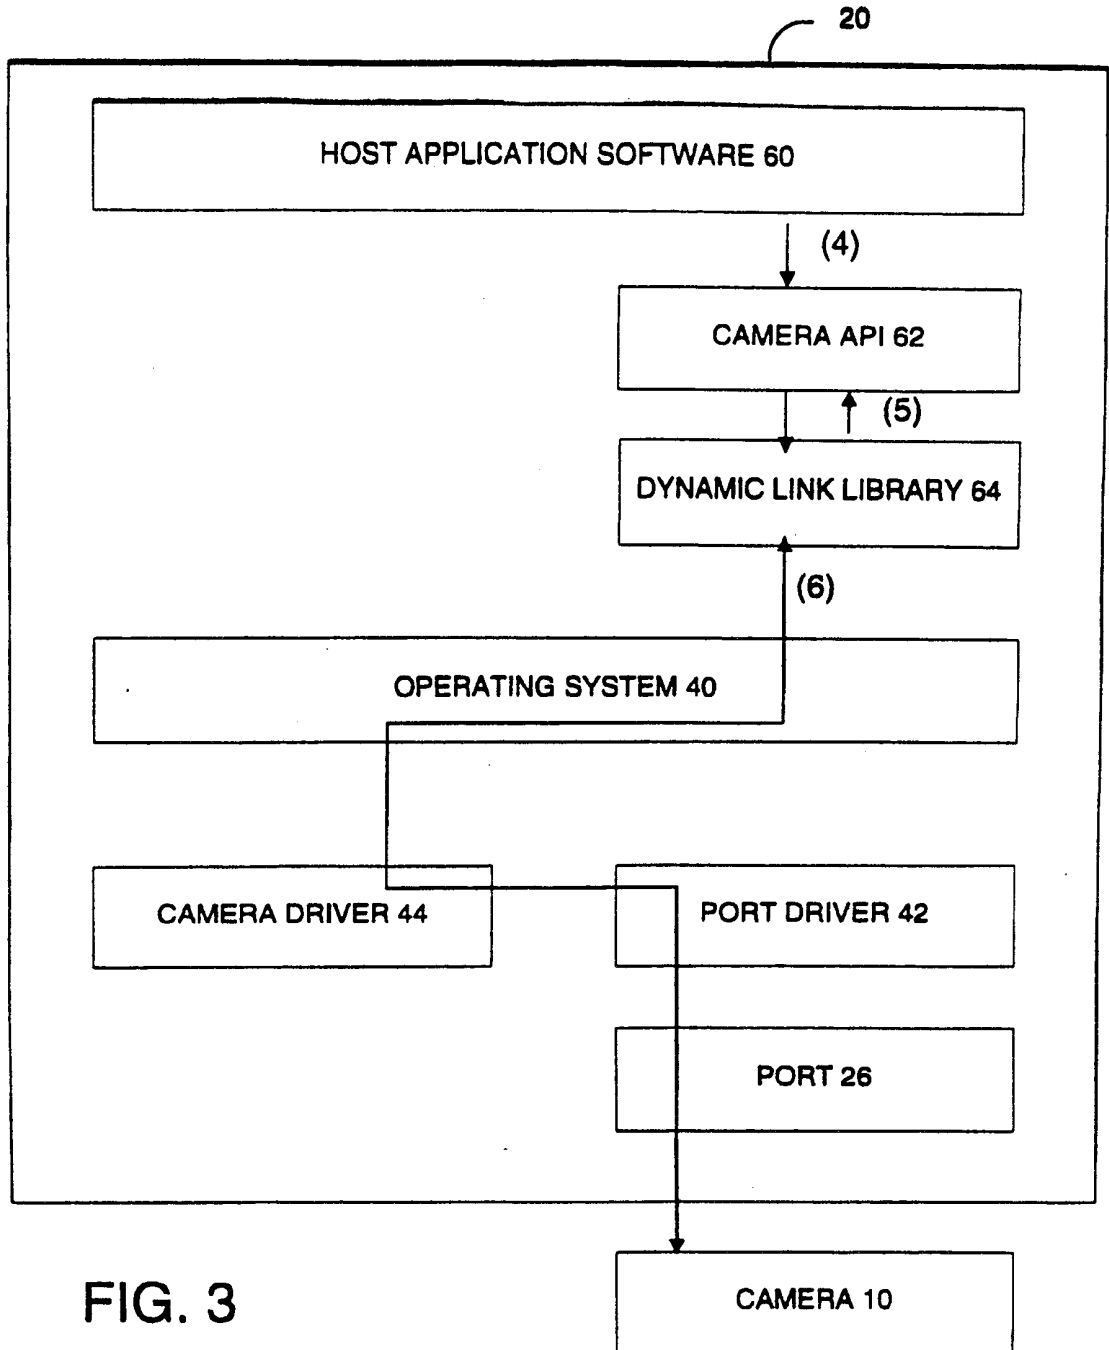


FIG. 3

OPERATING SYSTEM	HOST APPLICATION S/W	CAMERA API
Open Host Application S/W →	Create and Initialize CameraAPI → → → Add main window to CameraAPI's callback list	Reset internal variables Load O/S dependent DLLs Create & start backgrd thread Insert a CM_SIGNAL_STATUS message into backgrd-threaded queue

FIG. 4

CAMERA API	HOST APPLICATION SOFTWARE
CM_SIGNAL_STATUS If Camera is not Open If OpenDriver() succeeds Close Driver() If message has not been sent before Signal all callback windows	→ WM_CAMERAAPI_STATUS If Message is CM_IS_CONNECTED ← OpenDriver()
CM_OPEN_DRIVER Open camera driver Check for compatible camera	← Get number of images
CM_GET_NO_OF_IMAGES Returns number of images on camera	← If number of images > 0 Get image List
CM_GET_IMAGE_LIST Returns list of image names and sizes	← Download images, one-by-one
CM_GET_IMAGE_BY_NAME Returns image with given name	

FIG. 5

5/6

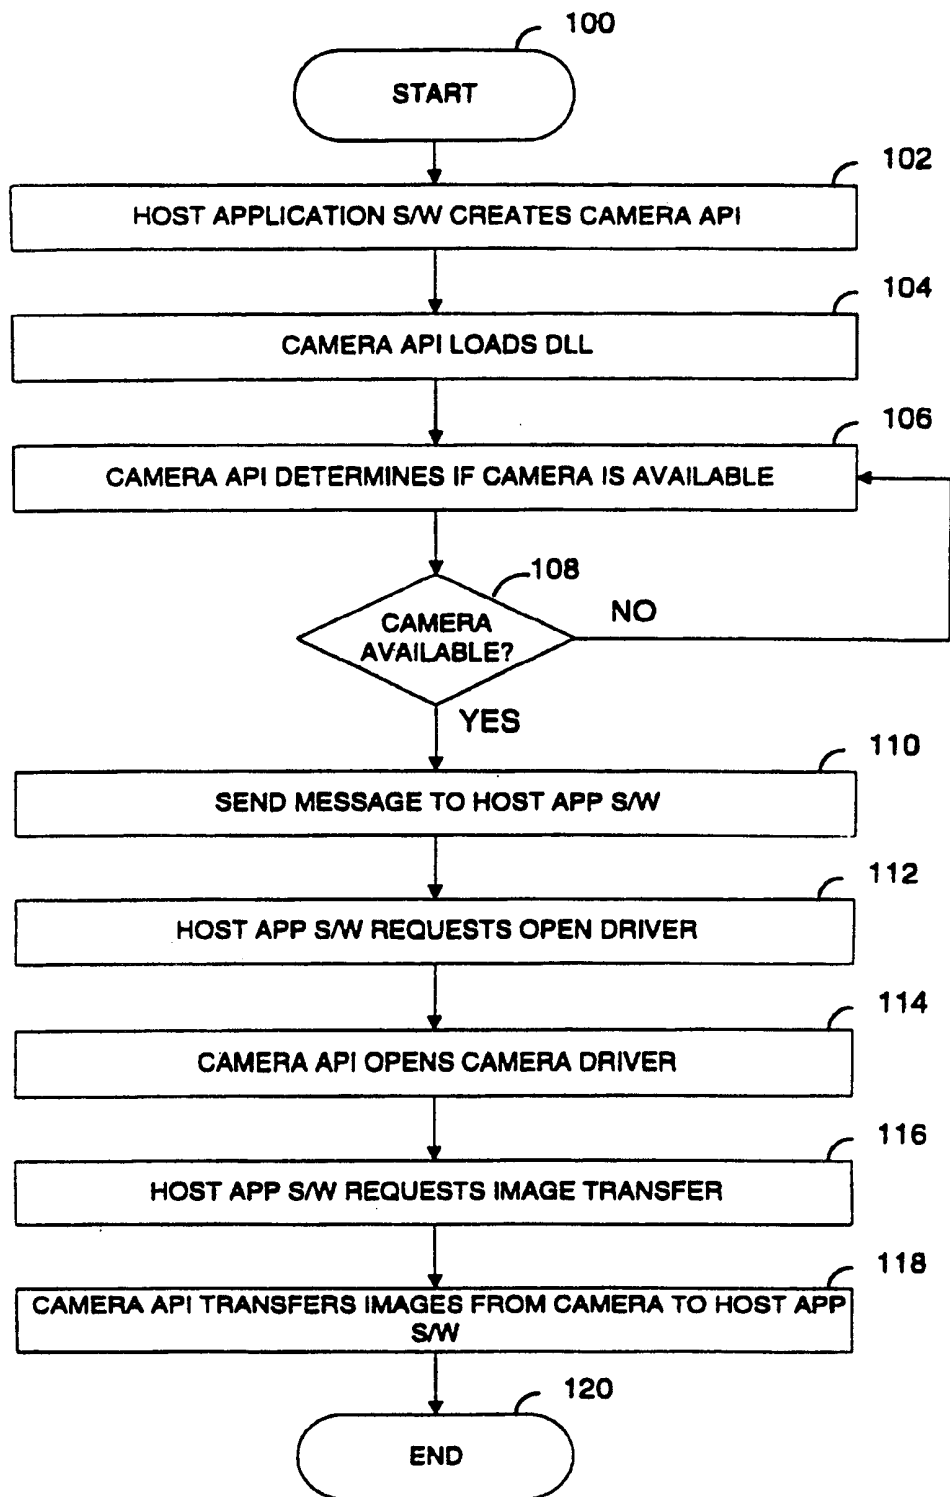


FIG. 6

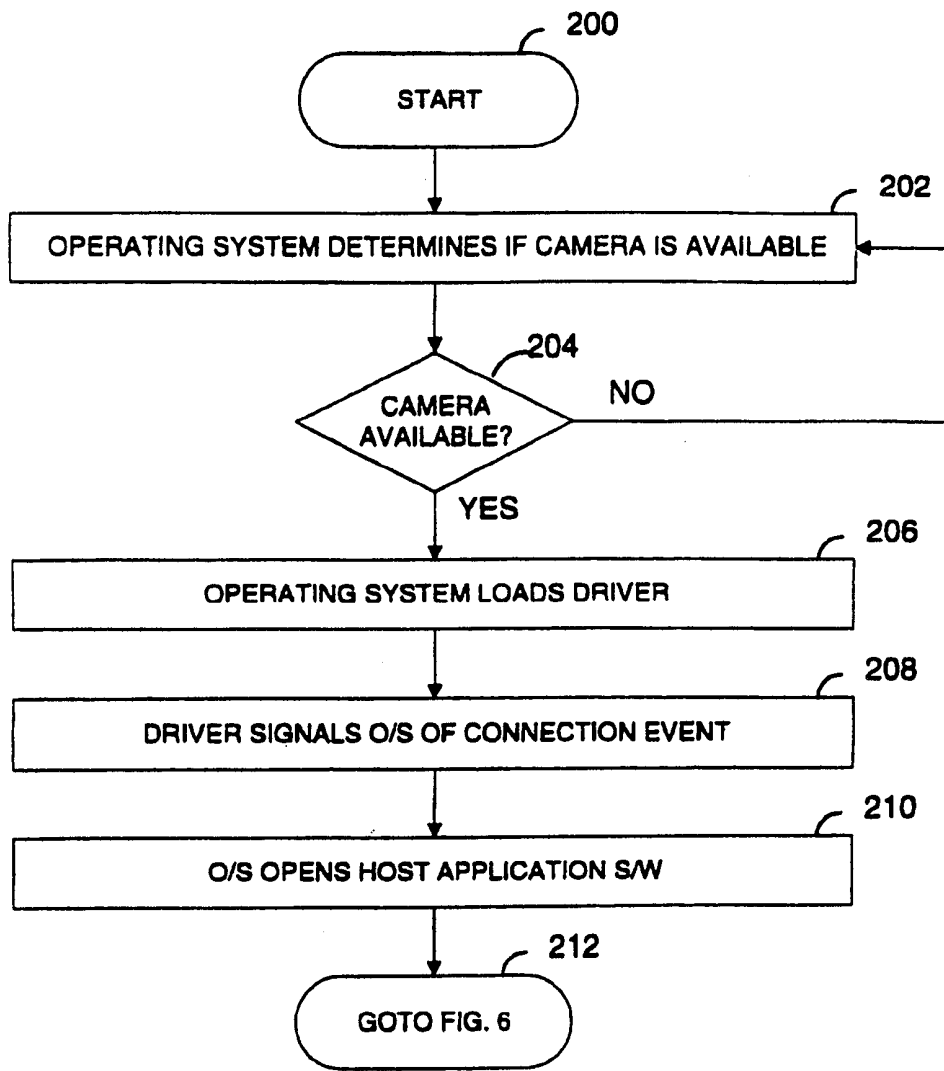


FIG. 7

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US98/26970

A. CLASSIFICATION OF SUBJECT MATTER

IPC(6) :H04N 5/232, 7/00, 7/14

US CL :348/13, 207, 211, 213, 231-233, 552; 358/909.1; 382/293, 295-299

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

U.S. : 348/13, 207, 211, 213, 231-233, 552; 358/909.1; 382/293, 295-299

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

APS

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 5,475,441 A (PARULSKI et al.) 12 December 1995, see entire document	1-14
A	US 5,477,264 A (SARBADHIKARI et al.) 19 December 1995, see entire document	1-14
A	US 5,506,617 A (PARULSKI et al.) 09 April 1996, see entire document	1-14
Y	US 5,534,921 A (SAWANOBORI) 09 July 1996, col. 3 line 16 to col. 4 line 17, col. 5 line 27 to col. 6 line 61.	1-14
Y	US 5,568,192 A (HANNAH) 22 October 1996, col. 3 line 11 to col. 4 line 36.	1-14
A, P	US 5,710,895 A (GERBER et al.) 20 January 1998, see entire document	1-14

 Further documents are listed in the continuation of Box C.
 See patent family annex.

* Special categories of cited documents:	*T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
A document defining the general state of the art which is not considered to be of particular relevance	*X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
E earlier document published on or after the international filing date	*Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
L document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	*&* document member of the same patent family
O document referring to an oral disclosure, use, exhibition or other means	
P document published prior to the international filing date but later than the priority date claimed	

Date of the actual completion of the international search

27 MARCH 1999

Date of mailing of the international search report

19 APR 1999

Name and mailing address of the ISA/US
Commissioner of Patents and Trademarks
Box PCT
Washington, D.C. 20231

Facsimile No. (703) 305-3230

Authorized officer

NGOC-YEN VU

Telephone No. (703) 305-4946