



- (51) **International Patent Classification:**
A61B 17/28 (2006.01) *A61B 18/12* (2006.01)
- (21) **International Application Number:**
PCT/CN2015/077336
- (22) **International Filing Date:**
24 April 2015 (24.04.2015)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (71) **Applicant:** COVIDIEN LP [US/US]; C/O Covidien, 15 HAMPSHIRE STREET, Mansfield, Massachusetts 02048 (US).
- (72) **Inventor; and**
(71) **Applicant (for MG only):** DING, Weijiang [CN/CN]; 789 Puxing Road, Building 10 Pujiang, Minhang District, Shanghai 201114 (CN).
- (72) **Inventors:** SYED, Sarfraz Ahamed; Building No 71, Room 101, No. 359, Pu Xiu Lu, Min Hang Qu, Shanghai 201100 (CN). LU, Weisheng; 801, Building 12, Shuixie-shangdu, 300 Jingdong Avenue, Nanchang, Jiangxi 330096 (CN).
- (74) **Agent:** CCPIT PATENT AND TRADEMARK LAW OFFICE; 8th Floor, Vantone New World Plaza, 2

Fuchengmenwai Street, Xicheng District, Beijing 100037 (CN).

- (81) **Designated States** (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

- (84) **Designated States** (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

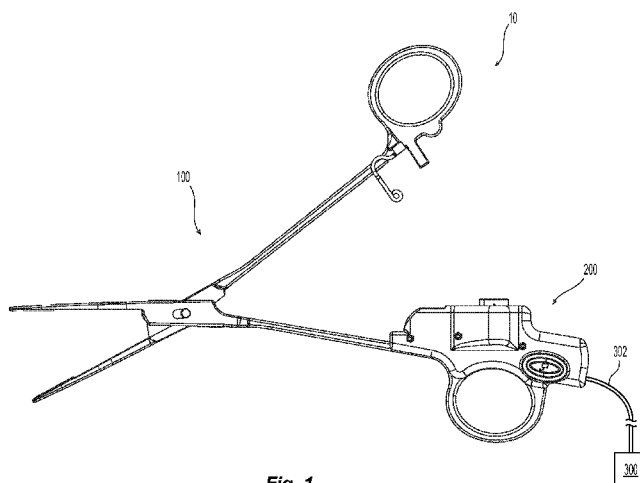
(54) **Title:** VESSEL SEALING DEVICE WITH FINE DISSECTION FUNCTION

Fig. 1

(57) **Abstract:** A electro-surgical forceps (100) includes a first elongated shaft member (110) including a first handle member (130) and a first jaw member (150) having a first tissue contacting surface (152), and a second elongated shaft member (120) including a second handle member (140) and a second jaw member (160) having a second tissue contacting surface (162). At least one of the first and second handle members (130, 140) are movable relative to the other between an open position, a first approximated position where the first and second tissue contacting surfaces (152, 162) are diametrically opposed to one another, and a second approximated position where the first and second tissue contacting surfaces (152, 162) are laterally offset from one another. A handle connector assembly (200) is selectively engageable with the second handle member (140) and is configured to selectively communicate electro-surgical energy between the first and second tissue contacting surfaces (152, 162) when the first and second handle members (130, 140) are disposed in the first approximated position.

VESSEL SEALING DEVICE WITH FINE DISSECTION FUNCTION

BACKGROUND

1. *Background of Related Art*

[0001] The present disclosure relates to energy-based surgical instruments and, more particularly, to energy-based surgical forceps configured for treating and/or cutting tissue.

2. *Technical Field*

[0002] A forceps or hemostat is a plier-like instrument which relies on mechanical action between its jaws to grasp, clamp, and constrict tissue. Energy-based forceps utilize both mechanical clamping action and energy, e.g., electrosurgical energy, ultrasonic energy, light energy, microwave energy, heat, etc., to affect hemostasis by heating tissue to coagulate and/or cauterize tissue. Certain surgical procedures require more than simply cauterizing tissue and rely on the unique combination of clamping pressure, precise energy control, and gap distance (i.e., distance between opposing jaws when closed about tissue) to “seal” tissue. Typically, once tissue is sealed, the surgeon has to accurately sever the tissue along the newly formed tissue seal. Accordingly, many tissue sealing instruments have been designed to incorporate a blade that is movable with respect to a blade slot disposed in a jaw of the tissue sealing instrument to sever the tissue after forming a tissue seal.

[0003] Tissue sealing instruments that include a blade and blade slot, however, are typically single-use devices as the blade and blade slot may be difficult to clean, and the blade may wear and dull with repeated use. The incorporation of a blade slot into a jaw of a tissue sealing instrument may reduce the sealing strength of the jaw, and the

width of the blade slot may increase the width of the jaw which, in turn, may result in a reduction in the dissection capabilities of the tissue sealing instrument.

SUMMARY

[0004] The present disclosure is directed to reusable energy-based surgical instruments having movable, opposed jaw members that are configured for fine dissection, sealing, and/or cutting without the use of a blade and slot jaw configuration.

[0005] In accordance with aspects of the present disclosure, an electrosurgical forceps includes a first elongated shaft member including a proximal end portion having a first handle member and a distal end portion including a first jaw member having a first tissue contacting surface, and a second elongated shaft member including a proximal end having a second handle member and a distal end portion including a second jaw member having a second tissue contacting surface. At least one of the first and second handle members is movable relative to the other between an open position, a first approximated position where the first and second tissue contacting surfaces are diametrically opposed to one other, and a second approximated position where the first and second tissue contacting surfaces are laterally offset from one other. A handle connector assembly includes a housing selectively engageable with an inner surface of the second handle member. The handle connector assembly is configured to communicate electrosurgical energy between the first and second tissue contacting surfaces when the first and second handle members are in disposed the first approximated position.

[0006] In some embodiments, the first handle member includes a bump stopper disposed on an inner surface of the first handle member that extends towards the

second handle member. The bump stopper is spaced from the handle connector assembly when the first and second handle members are disposed in the open position. The bump stopper is configured to engage a switch disposed on the housing of the handle connector assembly when the first and second handle members are moved to the first approximated position.

[0007] In some embodiments, the first handle member includes a connector pin extending towards the second handle member. The connector pin is spaced from the handle connector assembly when the first and second handle members are disposed in the open position. The connector pin is configured to extend through a proximal portion of an opening defined in the housing and into contact with a movable first connector member disposed within the housing to close an electrical circuit when the first and second handle members are moved to the first approximated position. In certain embodiments, the connector pin is disposed in an intermediate portion of the opening in the housing, which is distal to, and laterally offset from, the proximal portion of the opening, when the first and second handle members are moved to the second approximated position.

[0008] In some embodiments, the first handle member includes a spring connector extending towards the second handle member. The spring connector is spaced from the handle connector assembly when the first and second handle members are disposed in the open position. The spring connector is configured to extend through an opening defined in the housing and into a proximal portion of a channel disposed within the housing when the first and second handle members are moved to the first approximated position. In certain embodiments, the spring connector

is disposed within a distal portion of the channel disposed within the housing of the handle connector assembly when the first and second handle members are moved to the second approximated position.

[0009] In some embodiments, the first shaft member includes a body portion including a pivot pin and the second shaft member includes a split body portion including first and second legs defining opposed oblong openings. The body portion of the first shaft member is disposed within a slot defined between the first and second legs of the split body portion and the pivot pin extends into the oblong openings. In certain embodiments, when the first and second handle members are in the first approximated position, the pivot pin is disposed in a proximal portion of the oblong openings. In some embodiments, when the first and second handle members are in the second approximated position, the pivot pin is disposed in a distal portion of the oblong openings.

[0010] In some embodiments, the first and second tissue contacting surfaces define complementary stepped surfaces. In some embodiments, the first and second tissue contacting surfaces each include a base surface laterally disposed relative to a raised surface. The base and raised surfaces are connected by an intermediate wall that forms a shear edge at an intersection with the raised surface. In certain embodiments, when the first and second handle members are in the first approximated position, the base and raised surfaces of the first tissue contacting surface are aligned with the raised and base surfaces of the second tissue contacting surface, respectively, and when the first and second handle members are in the second approximated

position, the raised surfaces of the first and second tissue contacting surfaces are aligned with each other.

[0011] In accordance with aspects of the present disclosure, a surgical forceps includes an end effector including first and second jaw members. The first jaw member has a first tissue contacting surface and the second jaw member has a second tissue contacting surface. At least one of the first and second tissue contacting surfaces is configured to communicate electrosurgical energy between the first and second tissue contacting surfaces of the first and second jaw members. Each of the first and second tissue contacting surfaces includes a base surface laterally disposed relative to a raised surface and connected by an intermediate wall. The raised surface and the intermediate wall define a shear edge at an intersection thereof. At least one of the first and second jaw members is movable relative to the other between an open position, a first approximated sealing position, and a second approximated cutting position.

[0012] In some embodiments, when the first and second jaw members are disposed in the first approximated sealing position, the base and raised surfaces of the first tissue contacting surface align with the raised and base surfaces of the second tissue contacting surface, respectively. In some embodiments, when the first and second jaw members are disposed in the second approximated cutting position, the raised surfaces of the first and second tissue contacting surfaces align with each other.

[0013] In some embodiments, the base and raised surfaces of the first and second tissue contacting surfaces are disposed on curved distal portions of the first and second jaw members. In certain embodiments, distalmost ends of the first and second jaw members include complementary guide surfaces.

[0014] In some embodiments, the first jaw member is disposed on a distal end portion of a first shaft member and the second jaw member is disposed on a distal end portion of a second shaft member. The first shaft member includes a body portion extending through a split body portion of the second shaft member such that the first shaft member is centrally aligned with respect to the second shaft member. In some embodiments, the split body portion of the second shaft member defines opposed oblong openings and the body portion of the first shaft member includes a pivot pin that extends into, and is longitudinally translatable and pivotable within, the oblong openings of the second shaft member. In certain embodiments, the split body portion of the second shaft member includes a removable plate.

[0015] In some embodiments, the body portion of the first shaft member includes a v-shaped recess and the split body portion of the second shaft member includes a protrusion extending into the v-shaped recess of the first shaft member. When the first and second jaw members are disposed in the open position, the protrusion is disposed in a lower portion of the v-shaped recess to limit longitudinal movement of the first and second shaft members relative to each other. When the first and second jaw members are disposed in an approximated position, the protrusion is disposed in an upper portion of the v-shaped recess and is free to translate within the v-shaped recess.

[0016] In accordance with aspects of the present disclosure, a method of treating tissue includes: pivoting at least one of first and second jaw members of an electrosurgical forceps along a first axis to effect movement of the first and second jaw members from an open position to a first approximated position, the first and second jaw members including first and second tissue contacting surfaces, respectively, each of

the first and second tissue contacting surfaces including a base surface laterally disposed relative to a raised surface and connected by an intermediate wall, the raised surface and the intermediate wall defining a shear edge at an intersection thereof, wherein the base and raised surfaces of the first tissue contacting surface align with the raised and base surfaces of the second tissue contacting surface, respectively, to grasp tissue therebetween in the first approximated position; applying electrosurgical energy to the tissue grasped between the first and second tissue contacting surfaces of the first and second jaw members to seal the tissue grasped therebetween; and pivoting at least one of the first and second jaw members along a second axis to effect movement of the first and second jaw members from the first approximated position to a second approximated position in which the raised surfaces of the first and second tissue contacting surfaces align to cut the tissue grasped therebetween via the shear edges.

[0017] Other aspects, features, and advantages will be apparent from the description, drawings, and the claims.

BRIEF DESCRIPTION OF THE DRAWINGS

[0018] FIG. 1 is a side view of a surgical system including an open, assembled electrosurgical forceps having a handle connector assembly connected to a source of electrosurgical energy in accordance with an embodiment of the present disclosure;

[0019] FIG. 2 is a side view of the forceps of FIG. 1 in a disassembled state in accordance with the present disclosure;

[0020] FIG. 3 is a side view of the forceps of FIG. 1 in a first approximated position;

[0021] FIG. 4 is a perspective view of the forceps of FIG. 1 with parts separated;

- [0022]** FIG. 5 is a cross-sectional view of the forceps of FIG. 3 taken along line 5-5 of FIG. 3;
- [0023]** FIG. 6 is a bottom, cross-sectional view of a portion of the forceps of FIG. 3;
- [0024]** FIG. 7 is a side, cross-sectional view of a portion of the forceps of FIG. 3;
- [0025]** FIG. 8 is a side, cross-sectional view of a portion of the forceps of FIG. 1;
- [0026]** FIG. 9 is a side, perspective view of a distal portion of the forceps of FIG. 1;
- [0027]** FIG. 10 is a bottom, perspective view of a portion of the forceps of FIG. 3;
- [0028]** FIG. 11 is a perspective view, in partial cross-section, of first and second jaw members of the forceps of FIG. 3;
- [0029]** FIG. 12 is a side, perspective view, in partial cross-section, of first and second jaw members of the forceps of FIG. 3 in a second approximated position;
- [0030]** FIG. 13 is a side view of a portion of the forceps of FIG. 1, with the handle connector assembly shown in cross-section;
- [0031]** FIG. 14 is a side, perspective view, in partial cross-section, of the forceps of FIG. 3;
- [0032]** FIG. 15 is a side view of the handle connector assembly of FIG. 14;
- [0033]** FIG. 16 is a rear, cross-sectional view of the surgical instrument of FIG. 15 take along line 16-16 of FIG. 15;
- [0034]** FIG. 17A is a side view, in partial cross-section, of a portion of the forceps of FIGS. 14 in a transition position between the first and second approximated positions;

[0035] FIG. 17B is a side, perspective view, in partial cross-section, of the forceps of FIG. 17A in a second approximated position; and

[0036] FIG. 18 is a schematic illustration of a work station configured for use with a forceps of the present disclosure.

[0037] Corresponding reference characters indicate corresponding parts throughout the drawings.

DETAILED DESCRIPTION

[0038] In this disclosure, the term “proximal” refers to a portion of a structure closer to an operator, while the term “distal” refers to a portion of the same structure further from the operator. As used herein, the term “subject” refers to a human patient or animal. The term “operator” refers to a doctor (e.g., a surgeon), a nurse, and other clinicians or care providers, and may include support personnel.

[0039] Referring now to FIGS. 1-4, an energy-based surgical system 10 in accordance with the present disclosure is configured for grasping, electrically treating, and mechanically dissecting tissue or vessels in open and/or laparoscopic surgical procedures. The energy-based system 10 includes a reusable forceps 100 having a handle connector assembly 200 that is disposable and removably attachable to the forceps 100 and releasably connected to a source of electrosurgical energy 300 via cable 302. Alternatively, the handle connector assembly 200 may be reusable.

[0040] The forceps 100 include first and second elongated shaft members 110 and 120. The first elongated shaft member 110 includes proximal and distal end portions 112 and 114, respectively, and the second elongated shaft member 120 includes proximal and distal end portions 122 and 124, respectively. The proximal end

portions 112 and 122 of the first and second shaft members 110 and 120 are first and second handle members 130 and 140, respectively. The first and second handle members 130 and 140 are configured to allow an operator to effect movement of at least one of the first and second shaft members 110 and 120 relative to the other. The distal end portions 114 and 124 of the first and second shaft members 110 and 120 cooperate to define an end effector assembly 115 having opposed first and second jaw members 150 and 160.

[0041] The first and second handle members 130 and 140 each define a finger hole 130a and 140a, respectively, therethrough for receiving a finger of an operator. The finger holes 130a and 140a facilitate movement of the first and handle members 130 and 140 relative to each other. The first and second handle members 130 and 140 are each monolithically formed with respective shaft members 110 and 120. Alternatively, the first and second handle members 130 and 140 may each be engaged with respective shaft members 110 and 120 in any suitable configuration, e.g., via mechanical engagement, molding, adhesion, etc.

[0042] The first handle member 130 includes a bump stopper 132, a connector pin 134, and a spring connector 136, each of which extends from an inner surface 130b of the first handle member 130 toward the second handle member 140. The bump stopper 132 includes an undulating shape or convex contour on the inner surface 130b of the first handle member 130. The connector pin 134 and the spring connector 136 each includes an elongated body 134a and 136a, respectively, that extends toward the second handle member 140 in a generally vertically aligned manner. The elongated body 136a of the spring connector 136 is disposed between a first end 136b that is

secured to the first handle member 130 and a second end 136c defining an opening 136d for receiving a pin 136e securely therethrough.

[0043] The second handle member 140 includes an inner surface 140b including a raised rail 142 configured to matingly engage the handle connector assembly 200 to facilitate longitudinal alignment of the handle connector assembly 200 with respect to the second handle member 140. The raised rail 142 includes a recess 142a defined therein that is configured to receive a locking plate of the handle connector assembly 200 for securing the handle connector assembly 200 to the second handle member 140. The inner surface 140b of the second handle member 140 also includes a pair of raised projections 144 disposed on a distal end 140c of the second handle member 140 that are configured to be received within notches of the handle connector assembly 200 and to stop distal movement of the handle connector assembly 200 with respect to the second handle member 140.

[0044] With reference now to FIGS. 5-8, in conjunction with FIGS. 1-4, the first shaft member 110 intersects the second shaft member 120 at intersection portions 116 and 126 of the first and second shaft members 110 and 120, respectively. The intersection portion 116 of the first shaft member 110 includes a substantially flat body portion 116a including a pivot pin 116b extending transversely therethrough. Pivot pin 116b may be integrally formed with the body portion 116a or secured in an opening defined in the body portion 116a. A first face 116c of the body portion 116a includes a v-shaped recess 116d configured to receive a protrusion 126g extending from the intersection portion 126 of the second shaft member 120 to limit movement of the second shaft member 120 with respect to the first shaft member 110.

[0045] The second shaft member 120 includes a split body 126a including first and second legs 126b and 126c defining a slot 126d therebetween that is configured to receive the body portion 116a of the first shaft member 110. Such a configuration maintains central alignment of the first shaft member 110 with respect to the second shaft member 120, as well as minimizing jaw splay while sealing and cutting. The first and second legs 126b and 126c include diametrically opposed, and longitudinally aligned, oblong openings 126e and 126f, respectively, that are configured to receive the pivot pin 116b of the first shaft member 110. The pivot pin 116b is longitudinally slidable and pivotable within the oblong openings 126e and 126f. The first leg 126b includes a protrusion 126g on an inner surface thereof that engages the v-shaped recess 116d of the body portion 116a of the first shaft member 110. The protrusion 126g is free to move within an upper portion of the v-shaped recess 116d when the first and second jaw members 150 and 160 are in an approximated position (e.g., FIG. 7), and the pivot pin 116b is free to longitudinally move within the oblong openings 126e and 126f. The protrusion 126g is restricted within a lower portion of the v-shaped recess 116d when the jaw members 150 and 160 are in an open position (e.g., FIG. 8), and the pivot pin 116b is restricted to a proximal portion of the oblong openings 126e and 126f. The second leg 126c includes a removable plate 126h to facilitate assembly/disassembly of the first and second shaft members 110 and 120. Alternatively, plate 126h may be permanently secured to the second leg 126c or integrally formed with the second leg 126c.

[0046] The first and second shaft members 110 and 120 are coupled to one another at the pivot pin 116b and the oblong openings 126e and 126f such that

movement of the first and second handle members 130 and 140 from an open, spaced apart position to one or more closed, approximated positions effects corresponding movement of the first and second jaw members 150 and 160 relative to one another. Accordingly, the first and second jaw members 150 and 160 are movable relative to each other in response to movement of the first and second handle members 130 and 140.

[0047] As shown in FIGS. 9-12, in conjunction with FIGS. 1-4, the first and second jaw members 150 and 160 extend distally from the intersection portions 116 and 126 of the first and second shaft members 110 and 120. Proximal portions 150a and 160a of the first and second jaw members 150 and 160 extend longitudinally from the intersection portions 116 and 126, and distal portions 150b and 160b of the first and second jaw members 150 and 160 curve away from the proximal portions 150a and 160a.

[0048] The first and second jaw members 150 and 160 include first and second tissue contacting surfaces 152 and 162 that are opposed to one another. The first and second tissue contacting surfaces 152 and 162 of the first and second jaw members 150 and 160 define complementary stepped surfaces which together seals and/or cuts tissue disposed therebetween. The first tissue contacting surface 152 includes a lower, base surface 152a and an upper, raised surface 152b that are laterally disposed relative to each other. An intermediate wall 152c extends perpendicular to, and connects, the base and raised surfaces 152a and 152b. A shear edge 152d is formed at the intersection of the raised surface 152b and the intermediate wall 152c. In some embodiments, the distal portions 150b and 160b of the first and second jaw members

150 and 160 include the complementary stepped tissue contacting surfaces and the proximal portions 150a and 160a of the first and second jaw members 150 and 160 include only the base surfaces 152a and 162a. It should be understood, however, that the complementary stepped tissue contacting surfaces can extend along any portion of the first and second jaw members 150 and 160.

[0049] Similarly, as described above with respect to the first tissue contacting surface 152, the second tissue contacting surface 162 includes a lower base surface 162a laterally disposed relative to an upper, raised surface 162b, and an intermediate wall 162c extending between and connecting the base and raised surfaces 162a and 162b. A shear edge 162d is disposed at the intersection of the raised surface 162b and the intermediate wall 162c.

[0050] Complementary guide surfaces 154 and 164 are defined at a distalmost end of each of the first and second jaw members 150 and 160 to reduce friction between the first and second jaw members 150 and 160 and facilitate longitudinal sliding of the first and second jaw members 150 and 160 with respect to one another. In some embodiments, the complementary guide surfaces 154 and 164 extend from the raised surfaces 152b and 162b of the first and second tissue contacting surfaces 152 and 162 and are twisted across the base surfaces 152a and 162a at the distalmost end of the first and second jaw members 150 and 160.

[0051] The first and second jaw members 150 and 160 are movable between an open position, a first approximated sealing position, and a second approximated cutting position. In the open position, as shown for example in FIG. 9, the first and second tissue contacting surfaces 152 and 162 are spaced apart from each other. In the first

approximated position, as shown for example in FIG. 11, the first and second tissue contacting surfaces 152 and 162 are approximated and diametrically opposed to one another such that the base surface 152a of the first jaw member 150 is aligned with the raised surface 162b of the second jaw member 160 and the raised surface 152b of the first jaw member 150 is aligned with the base surface 162a of the second jaw member 160. In the second approximated position, as shown for example in FIG. 12, the first and second tissue contacting surfaces 152 and 162 are laterally offset from one another such that the raised surfaces 152b and 162b of the first and second jaw members 150 and 160 are aligned with each other.

[0052] The forceps 100 is formed of a conductive material, such as a metal, and includes an electrically insulative coating disposed over the forceps 100, except at the tissue contacting surfaces 152 and 162 of the first and second jaw members 150 and 160, the connector pin 134 of the first handle member 130, and at least a portion of the raised rail 142 of the second handle member 140. Accordingly, the tissue contacting surfaces 152 and 162, the connector pin 134, and a portion of the raised rail 142 are not coated with an electrically insulative material.

[0053] Referring now to FIG. 13, in conjunction with FIGS. 1-4, the handle connector assembly 200 includes a housing 202 including a lower surface 202a configured to engage the raised rail 142 of the second handle member 140. The lower surface 202a may be contoured for ergonomic fit with a finger of an operator positioned through the finger hole 140a of the second handle member 140. The housing 202 includes a distal end 202b including notches 204 configured to receive the raised projections 144 of the second handle member 140. The housing 202 includes an upper

surface 202c including a switch or power button 206 disposed in general alignment with the bump stopper 132 of the first handle member 130. The upper surface 202c defines an opening 208 including a proximal portion 208a in general alignment with the connector pin 134 of the first handle member 130, an intermediate portion 208b laterally offset from the proximal portion 208a, and a distal portion 208c through which the spring connector 136 of the first handle member 130 may travel.

[0054] First and second conductive connector members 210 and 212 are disposed within the housing 202 and laterally spaced from each other. Cables 214 and 216 connect the first and second connector members 210 and 212 to the power button 206, respectively, and a cable 302 extends from the power button 206 and out through a proximal end 202d (FIG. 2) of the housing 202 for electrically connecting the forceps 100 to an electrosurgical energy source 300, such as an RF generator. A portion of the first connector member 210 is in general alignment with the proximal portion 208a (FIG. 4) of the opening 208 defined in the upper surface 202c of the housing 202. The second connector member 212 is in contact with the portion of the raised rail 142 that does not include the electrically insulative coating. The first connector member 210 is movable into contact with the second connector member 212 in response to movement of the connector pin 134 of the first handle member 130 into the housing 202. A generally u-shaped channel 220 forms a path in and out of the distal portion 208c (FIG. 4) of the opening 208 through which the pin 136c of the spring connector 136 travels. A user control button 222 (FIG. 2) is disposed through the housing 202 and is mechanical engagement with a locking plate 224 disposed within the housing 202 to actuate the locking plate 224 in and out of engagement with the recess 142a defined within the

raised rail 142 of the second handle member 140 to lock and release the handle connector assembly 200 to and from the forceps 100.

[0055] In an example method of assembling the forceps 100, as shown in FIGS. 1-3, the lower surface 202a of the housing 202 of the handle connector assembly 200 is aligned with the raised rail 142 of the second handle member 140 when the forceps 100 are in an open position. The housing 202 is slid distally in the direction of arrow "A" (FIG. 2), along the raised rail 142 until the notches 204 (FIG. 4) defined within the distal end 202b of the housing 202 engage the protrusions 144 formed at the distal end of the second handle member 140. The user control button 222 is then depressed to move the locking plate 224 into engagement with the recess 142a defined in the raised rail 142 of the second handle member 140 to secure the handle connector assembly 200 to the forceps 100.

[0056] In an example method of using the assembled forceps 100, the forceps 100 is placed at a desired surgical site and the first and second jaw members 150 and 160 are positioned in an open position around desired tissue and/or vessel(s). The first and second handle members 130 and 140 are approximated by moving at least one of the first and second handle members 130 and 140 towards the other such that the first and second handle members 130 and 140 pivots with respect to the other about the pivot pin 116b in the proximal portion of the oblong openings 126e and 126f. When the first and second handle members 130 and 140 are brought together in this first, approximated position, as shown in FIG. 14, the bump stopper 132 depresses the power button 206 while the connector pin 134 enters the housing 202 through the proximal portion 208a (FIG. 4) of the opening 208 defined in the upper surface 202c of

the housing 202 and contacts the first connector member 210, which in turn contacts the second connector member 212 to close the electrical circuit and energize the tissue contacting surfaces 152 and 162 of the first and second jaw members 150 and 160 to seal tissue "T" disposed therebetween. At the same time, the spring connector 136 enters the distal portion 208c (FIG. 4) of the opening 208 defined in the upper surface 202c of the housing 202 and moves into a proximal portion of the u-shaped channel 220. Sealing is effected, for example, by the application of pressure on the tissue "T" between the first and second jaw members 150 and 160, and the electrosurgical energy transferred from the electrosurgical energy source. In some embodiments, the minimum seal width is equal to or greater than 0.46mm. In some embodiments, the closure pressure between the first and second jaw members 150 and 160 for sealing tissue is in the range of about 3kg/cm² to about 16 kg/cm². In some embodiments, a gap distance between the first and second jaw members 150 and 160 during sealing is in the range of about 0.001 inches to about 0.006 inches.

[0057] When sealing is complete, the first and second handle members 130 and 140 may be returned to the open position to release the tissue "T" or may be moved to a second, approximated position to cut the tissue "T" disposed between the first and second jaw members 150 and 160. As shown in FIGS. 15-17B, to move to the second approximated position, the first handle member 130 is moved laterally, in the direction of arrow "B" and pushed down in the direction of arrow "C" such that the connector pin 134 enters the intermediate portion 208b (FIG. 4) of the opening 208 defined in the upper surface 202c of the housing 202. At the same time, the bump stopper 132 releases the power button 206 and the spring connector 136 is initially moved into a distal portion of

the u-shaped channel 220 (FIG. 17A). The first handle member 130 is then pulled up in the direction of arrow “D” such that the spring connector 136 is moved through the distal portion of the u-shaped channel 220 (FIG. 17B). This movement of the first handle member 130 causes the pivot pin 116b (FIG. 4) to longitudinally translate within the oblong openings 126e and 126f of the first and second jaw members 150 and 160 to cut the tissue “T” held therebetween. Cutting is effected, for example, by the application of pressure on the tissue “T” between the first and second jaw members 150 and 160, and longitudinal movement of the shear edges 152d and 162d of the first and second tissue contacting surfaces 152 and 162 with respect to each other.

[0058] To disassemble the handle connector housing 200 from the forceps 100, the operator presses the user control button 222 and pulls the handle connector assembly 200 proximally away from the second handle member 140. The forceps 100 may then be sterilized and reused with the same or different handle connector assembly 200. In some embodiments, the forceps 100 may be disassembled such that the first and second shaft members 110 and 120 are separated from each other by removing the plate 126h from the second leg 126c of the second shaft member 120.

[0059] The embodiments disclosed herein may also be configured to work with robotic surgical systems and what is commonly referred to as “Telesurgery.” Such systems employ various robotic elements to assist the operator and allow remote operation (or partial remote operation) of surgical instrumentation. Various robotic arms, gears, cams, pulleys, electric and mechanical motors, etc. may be employed for this purpose and may be designed with a robotic surgical system to assist the operator during the course of an operation or treatment. Such robotic systems may include

remotely steerable systems, automatically flexible surgical systems, remotely flexible surgical systems, remotely articulating surgical systems, wireless surgical systems, modular or selectively configurable remotely operated surgical systems, etc.

[0060] The robotic surgical systems may be employed with one or more consoles that are next to the operating theater or located in a remote location. In this instance, one team of surgeons or nurses may prep a subject (e.g., a patient) for surgery and configure the robotic surgical system with one or more of the instruments disclosed herein while another surgeon (or group of surgeons) remotely control the instruments via the robotic surgical system. As can be appreciated, a highly skilled surgeon may perform multiple operations in multiple locations without leaving his/her remote console which can be both economically advantageous and a benefit to the patient or a series of patients.

[0061] The robotic arms of the surgical system are typically coupled to a pair of master handles by a controller. The handles can be moved by the surgeon to produce a corresponding movement of the working ends of any type of surgical instrument (e.g., end effectors, graspers, knives, scissors, etc.) which may complement the use of one or more of the embodiments described herein. The movement of the master handles may be scaled so that the working ends have a corresponding movement that is different, smaller or larger, than the movement performed by the operating hands of the surgeon. The scale factor or gearing ratio may be adjustable so that the operator can control the resolution of the working ends of the surgical instrument(s).

[0062] The master handles may include various sensors to provide feedback to the surgeon relating to various tissue parameters or conditions, e.g., tissue resistance

due to manipulation, cutting or otherwise treating, pressure by the instrument onto the tissue, tissue temperature, tissue impedance, etc. As can be appreciated, such sensors provide the surgeon with enhanced tactile feedback simulating actual operating conditions. The master handles may also include a variety of different actuators for delicate tissue manipulation or treatment further enhancing the surgeon's ability to mimic actual operating conditions.

[0063] Referring now to FIG. 18, a medical work station is shown generally as work station 1000 and generally may include a plurality of robot arms 1002 and 1003; a control device 1004; and an operating console 1005 coupled with control device 1004. Operating console 1005 may include a display device 1006, which may be set up in particular to display three-dimensional images; and manual input devices 1007 and 1008, by means of which an operator (not shown), for example a surgeon, may be able to telemanipulate robot arms 1002 and 1003 in a first operating mode.

[0064] Each of the robot arms 1002 and 1003 may include a plurality of members, which are connected through joints, and an attaching device 1009 and 1011, to which may be attached, for example, a surgical tool "ST" supporting an end effector 1100, in accordance with any one of several embodiments disclosed herein, as will be described in greater detail below.

[0065] Robot arms 1002 and 1003 may be driven by electric drives (not shown) that are connected to control device 1004. Control device 1004 (e.g., a computer) may be set up to activate the drives, in particular by means of a computer program, in such a way that robot arms 1002 and 1003, their attaching devices 1009 and 1011 and thus the surgical tool (including end effector 1100) execute a desired movement according to a

movement defined by means of manual input devices 1007 and 1008. Control device 1004 may also be set up in such a way that it regulates the movement of robot arms 1002 and 1003, and/or of the drives.

[0066] Medical work station 1000 may be configured for use on a patient 1013 lying on a patient table 1012 to be treated in a minimally invasive manner by means of end effector 1100. Medical work station 1000 may also include more than two robot arms 1002 and 1003, the additional robot arms likewise being connected to control device 1004 and being telemanipulatable by means of operating console 1005. A medical instrument or surgical tool (including an end effector 1100) may also be attached to the additional robot arm. Medical work station 1000 may include a database 1014, in particular coupled to control device 1004, in which are stored, for example, pre-operative data from patient/living being 1013 and/or anatomical atlases.

[0067] While several embodiments of the disclosure have been shown in the drawings and described herein, it is not intended that the disclosure be limited thereto, as it is intended that the disclosure be as broad in scope as the art will allow and that the specification be read likewise. Therefore, the above description should not be construed as limiting, but merely as examples of particular embodiments. Those skilled in the art will envision other modifications within the scope and spirit of the claims appended hereto.

WHAT IS CLAIMED IS:

1. An electrosurgical forceps, comprising:

a first elongated shaft member including a proximal end portion having a first handle member and a distal end portion including a first jaw member having a first tissue contacting surface;

a second elongated shaft member including a proximal end having a second handle member and a distal end portion including a second jaw member having a second tissue contacting surface;

at least one of the first and second handle members movable relative to the other between an open position, a first approximated position where the first and second tissue contacting surfaces are diametrically opposed to one other, and a second approximated position where the first and second tissue contacting surfaces are laterally offset from one other; and

a handle connector assembly including a housing selectively engageable with an inner surface of the second handle member, the handle connector assembly configured to communicate electrosurgical energy between the first and second tissue contacting surfaces when the first and second handle members are disposed in the first approximated position.

2. The forceps according to claim 1, wherein the first handle member includes a bump stopper disposed on an inner surface of the first handle member and extending towards the second handle member, wherein the bump stopper is spaced from the handle connector assembly when the first and second handle members are disposed in the

open position, the bump stopper configured to engage a switch disposed on the housing of the handle connector assembly when the first and second handle members move to the first approximated position.

3. The forceps according to claim 1, wherein the first handle member includes a connector pin extending towards the second handle member, wherein the connector pin is spaced from the handle connector assembly when the first and second handle members are disposed in the open position, the connector pin configured to extend through a proximal portion of an opening defined in the housing and into contact with a movable first connector member disposed within the housing to close an electrical circuit when the first and second handle members move to the first approximated position.

4. The forceps according to claim 1, wherein the first handle member includes a spring connector extending towards the second handle member, wherein the spring connector is spaced from the handle connector assembly when the first and second handle members are disposed in the open position, the spring connector configured to extend through an opening defined in the housing and into a proximal portion of a channel disposed within the housing when the first and second handle members are moved to the first approximated position.

5. The forceps according to claim 3, wherein the connector pin is disposed in an intermediate portion of the opening in the housing, which is distal to, and laterally offset

from, the proximal portion of the opening, when the first and second handle members are moved to the second approximated position.

6. The forceps according to claim 4, wherein the spring connector is disposed within a distal portion of the channel disposed within the housing of the handle connector assembly when the first and second handle members are moved to the second approximated position.

7. The forceps according to claim 1, wherein the first shaft member includes a body portion including a pivot pin and the second shaft member includes a split body portion including first and second legs defining opposed oblong openings, wherein the body portion of the first shaft member is disposed within a slot defined between the first and second legs of the split body portion and the pivot pin extends into the oblong openings.

8. The forceps according to claim 7, wherein when the first and second handle members are in the first approximated position, the pivot pin is disposed in a proximal portion of the oblong openings.

9. The forceps according to claim 8, wherein when the first and second handle members are in the second approximated position, the pivot pin is disposed in a distal portion of the oblong openings.

10. The forceps according to claim 1, wherein the first and second tissue contacting surfaces define complementary stepped surfaces.

11. The forceps according to claim 10, wherein the first and second tissue contacting surfaces each include a base surface laterally disposed relative to a raised surface, the base and raised surfaces connected by an intermediate wall that forms a shear edge at an intersection with the raised surface.

12. The forceps according to claim 11, wherein when the first and second handle members are in the first approximated position, the base and raised surfaces of the first tissue contacting surface are aligned with the raised and base surfaces of the second tissue contacting surface, respectively, and when the first and second handle members are disposed in the second approximated position, the raised surfaces of the first and second tissue contacting surfaces are aligned with each other.

13. An electrosurgical forceps, comprising:

an end effector including first and second jaw members, the first jaw member having a first tissue contacting surface and the second jaw member having a second tissue contacting surface, at least one of the first and second tissue contacting surfaces configured to communicate electrosurgical energy between the first and second tissue contacting surfaces of the first and second jaw members, each of the first and second tissue contacting surfaces including a base surface laterally disposed relative to a raised surface and connected by an intermediate wall, the raised surface and the

intermediate wall defining a shear edge at an intersection thereof, at least one of the first and second jaw members movable relative to the other between an open position, a first approximated sealing position, and a second approximated cutting position.

14. The forceps according to claim 13, wherein when the first and second jaw members are disposed in the first approximated sealing position, the base and raised surfaces of the first tissue contacting surface align with the raised and base surfaces of the second tissue contacting surface, respectively, and when the first and second jaw members are disposed in the second approximated cutting position, the raised surfaces of the first and second tissue contacting surfaces align with each other.

15. The forceps according to claim 13, wherein the base and raised surfaces of the first and second tissue contacting surfaces are disposed on curved distal portions of the first and second jaw members.

16. The forceps according to claim 13, wherein the first jaw member is disposed on a distal end portion of a first shaft member and the second jaw member is disposed on a distal end portion of a second shaft member, the first shaft member including a body portion extending through a split body portion of the second shaft member such that the first shaft member is centrally aligned with respect to the second shaft member.

17. The forceps according to claim 16, wherein the split body portion of the second shaft member defines opposed oblong openings and the body portion of the first shaft

member includes a pivot pin that extends into, and is longitudinally translatable and pivotable within, the oblong openings of the second shaft member.

18. The forceps according to claim 16, wherein the body portion of the first shaft member includes a v-shaped recess and the split body portion of the second shaft member includes a protrusion extending into the v-shaped recess of the first shaft member, wherein when the first and second jaw members are disposed in the open position, the protrusion is disposed in a lower portion of the v-shaped recess to limit longitudinal movement of the first and second shaft members relative to each other and when the first and second jaw members are disposed in an approximated position, the protrusion is disposed in an upper portion of the v-shaped recess and is free to translate within the v-shaped recess.

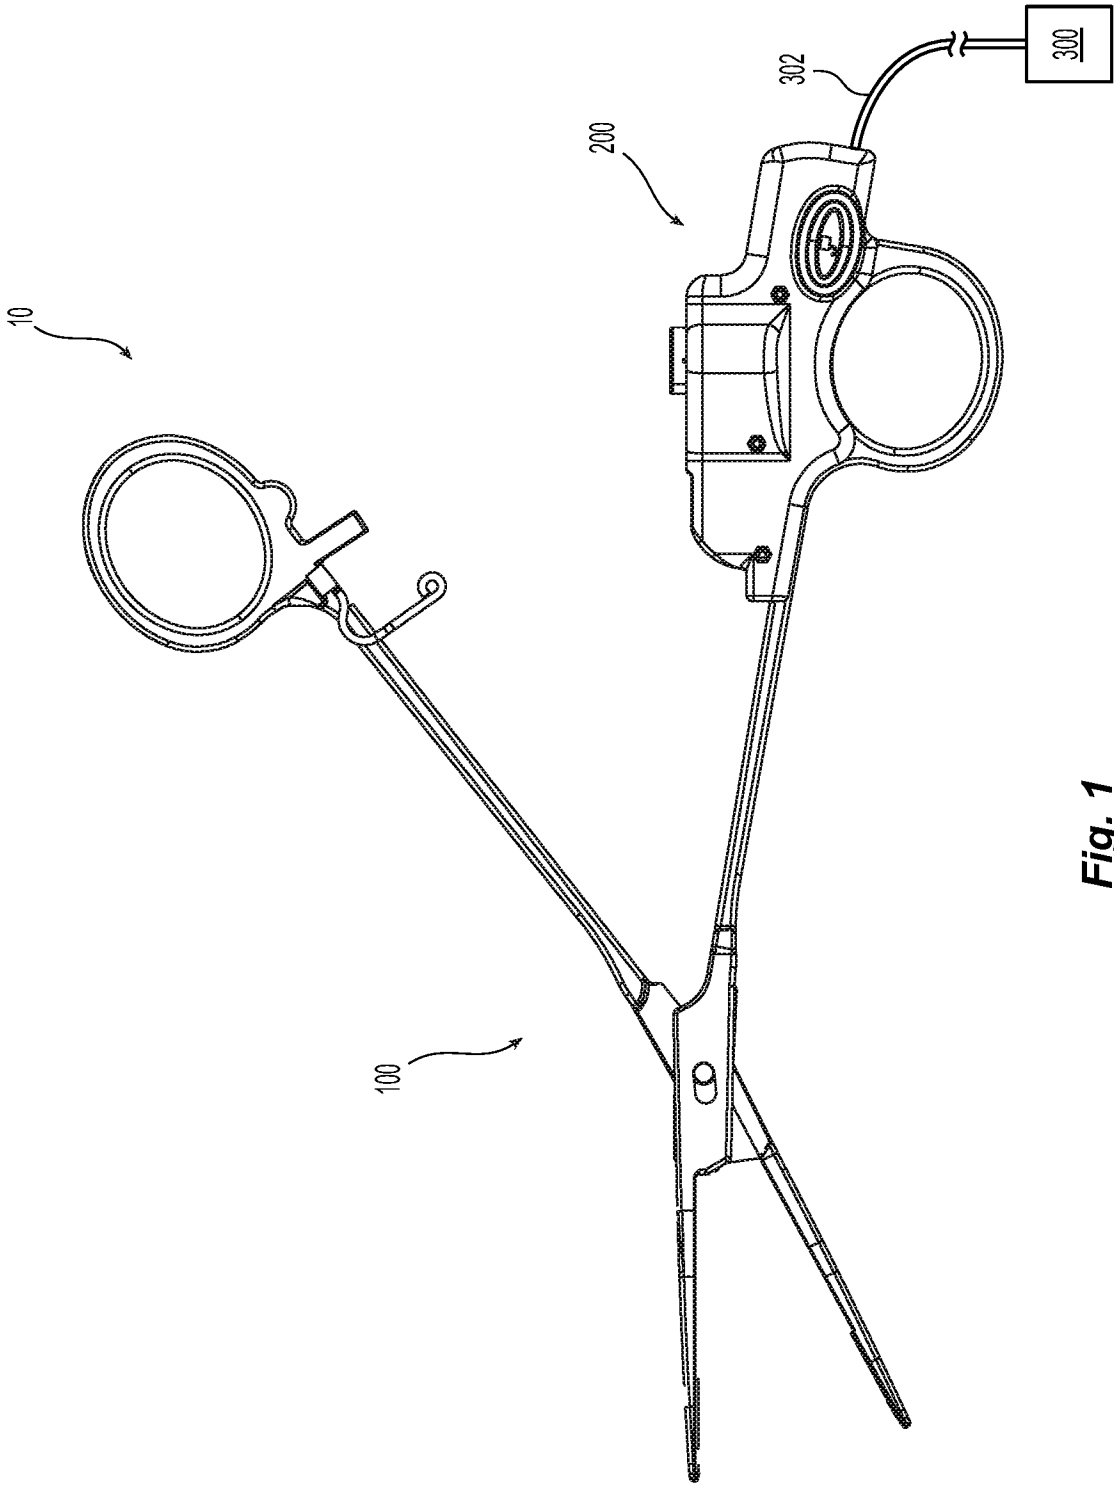


Fig. 1

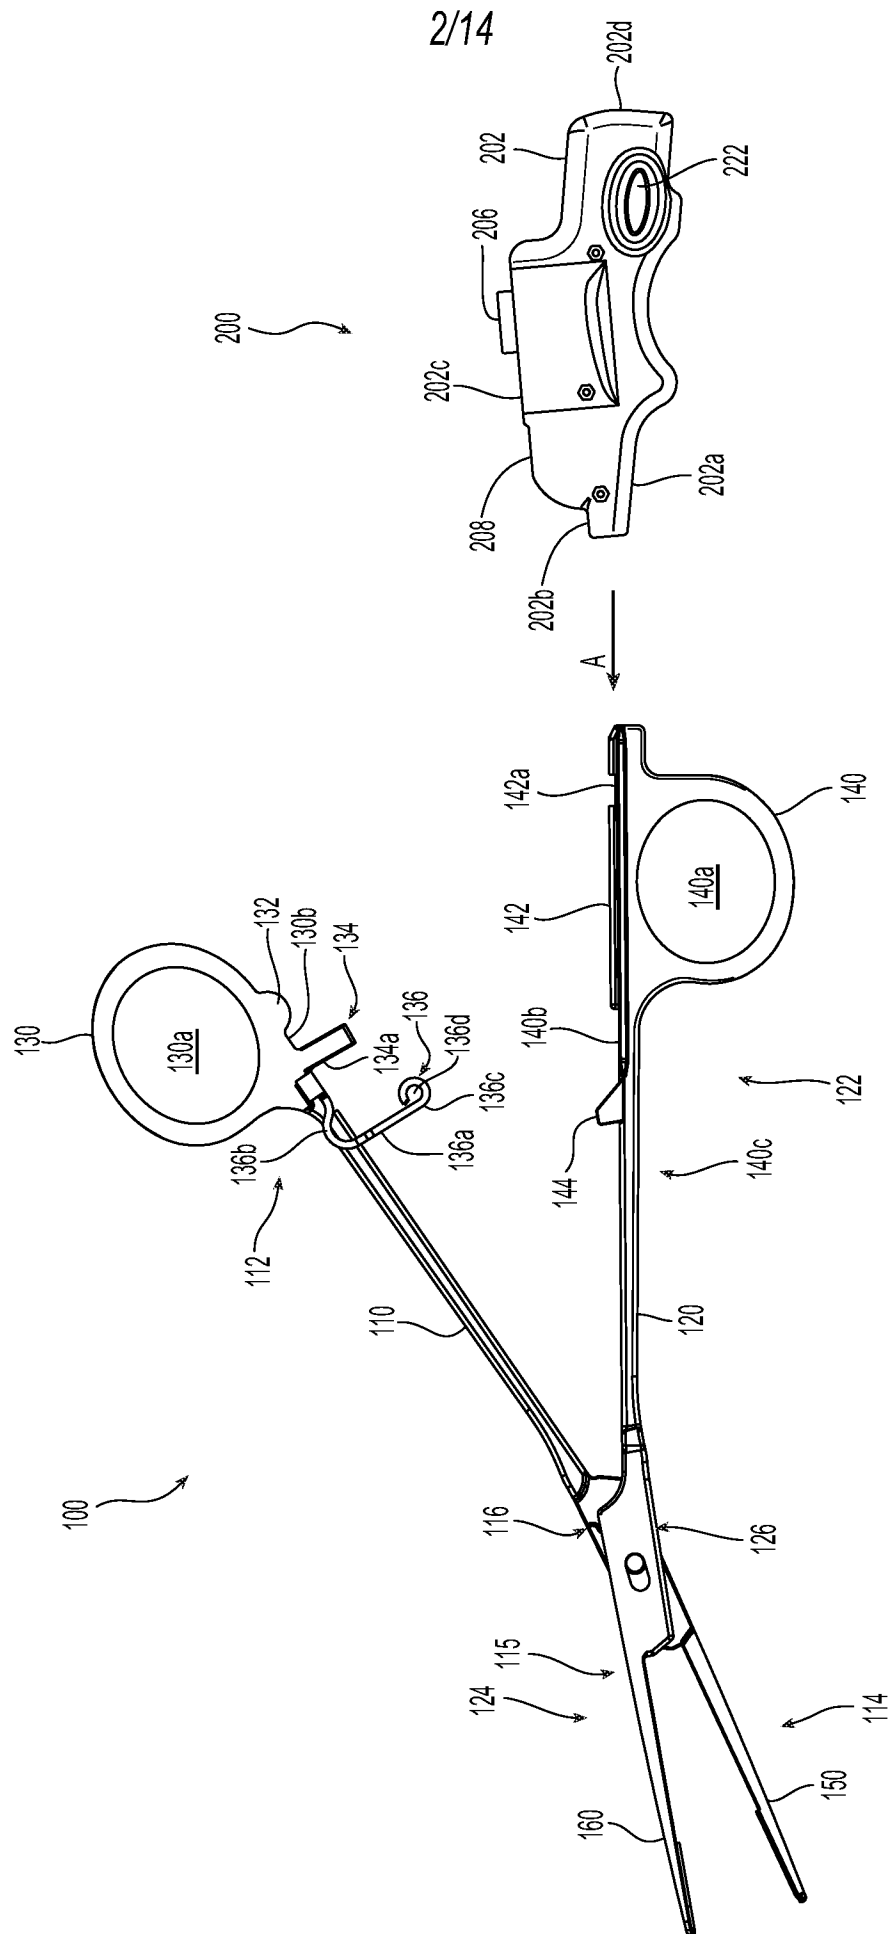


Fig. 2

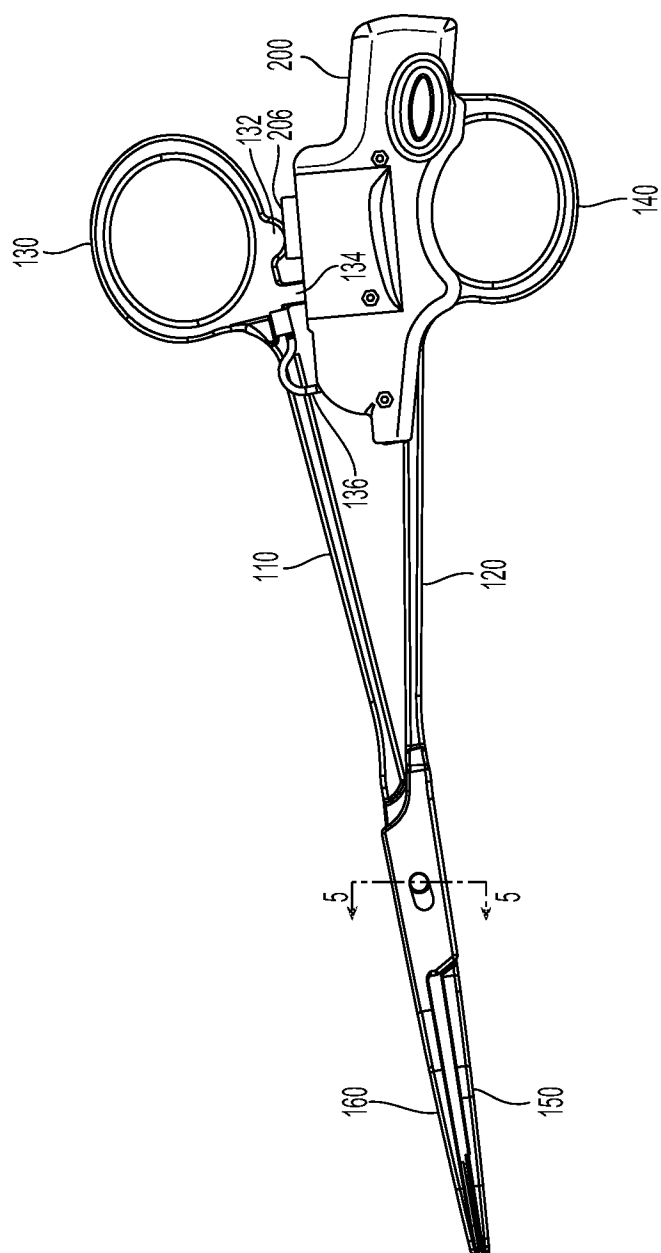


Fig. 3

4/14

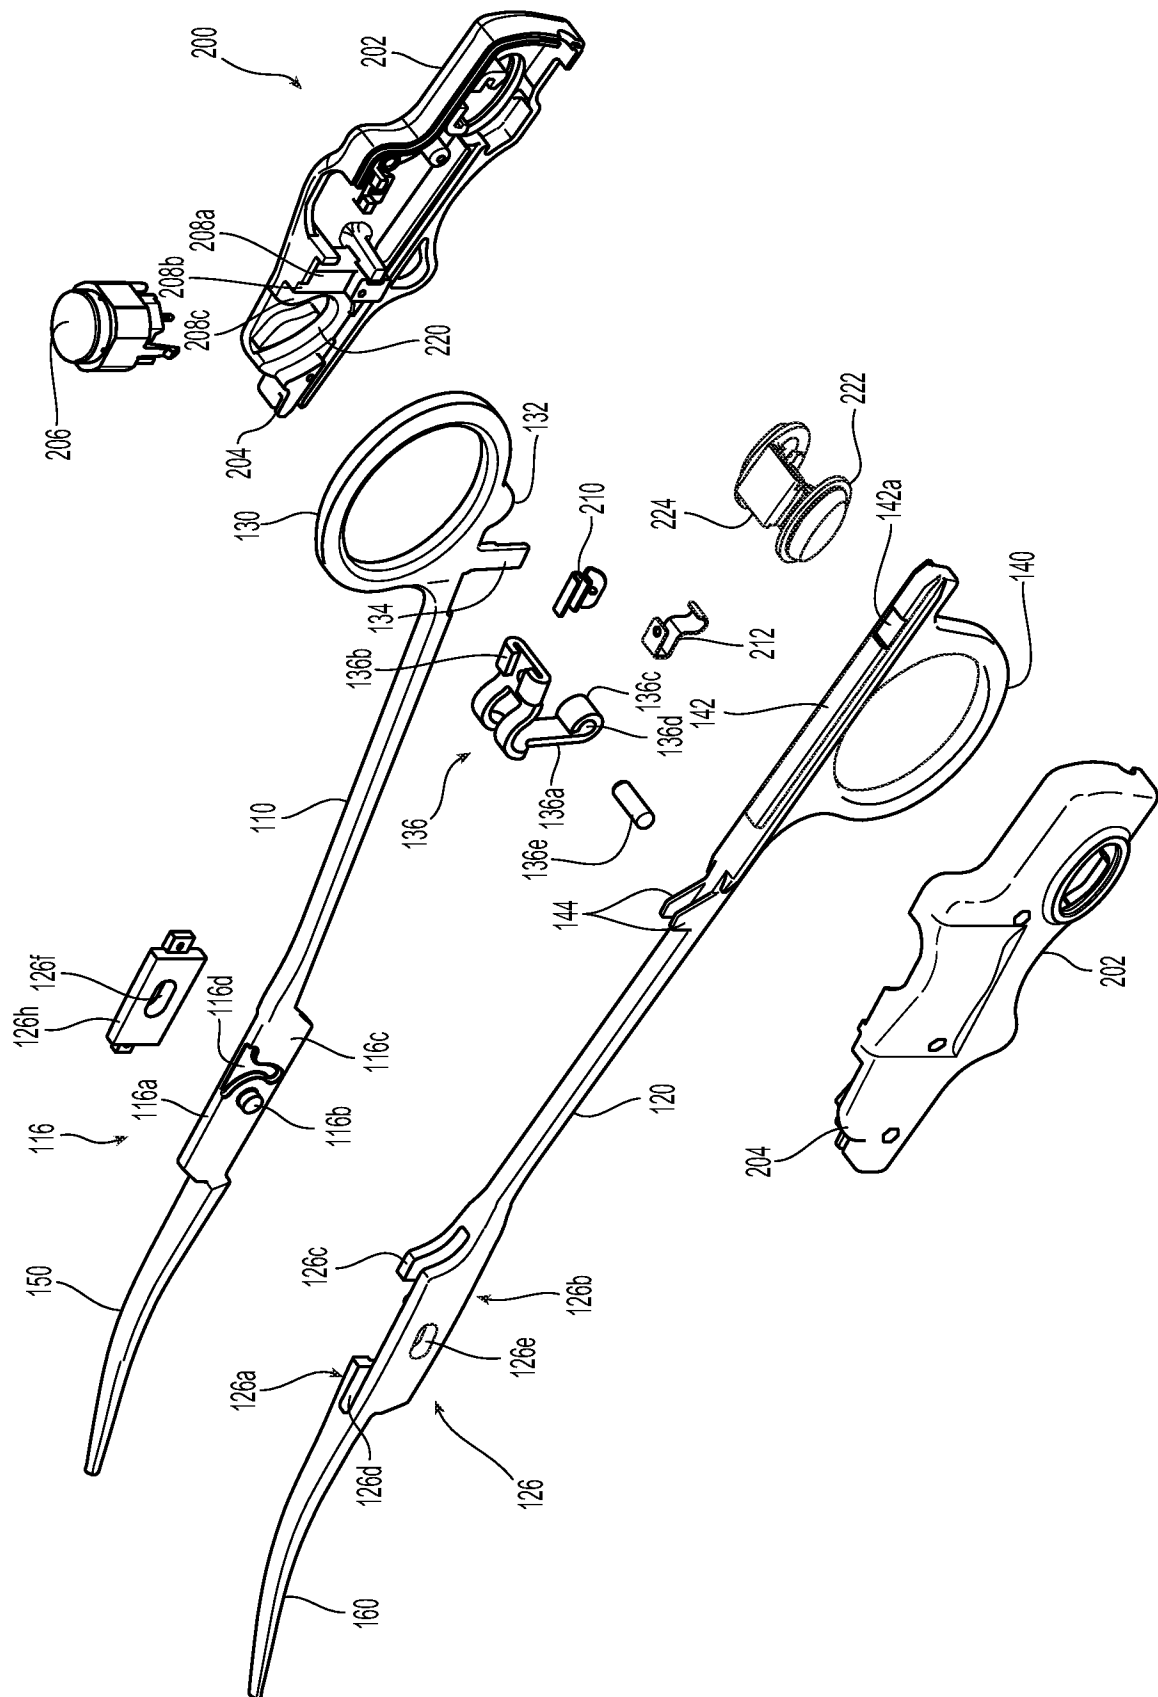


Fig. 4

5/14

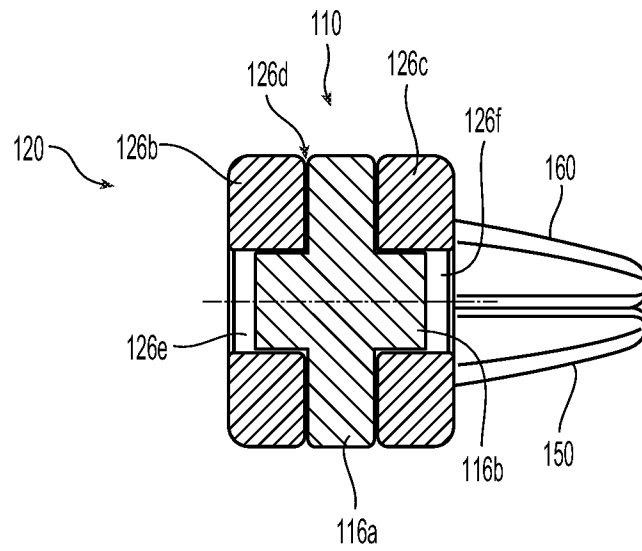


Fig. 5

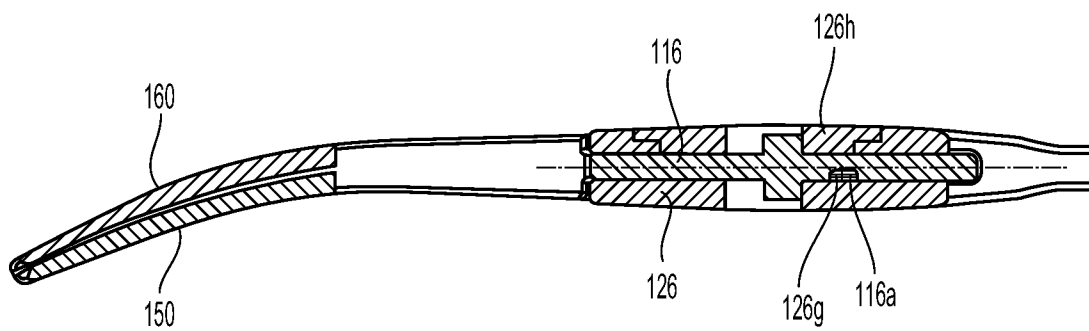


Fig. 6

6/14

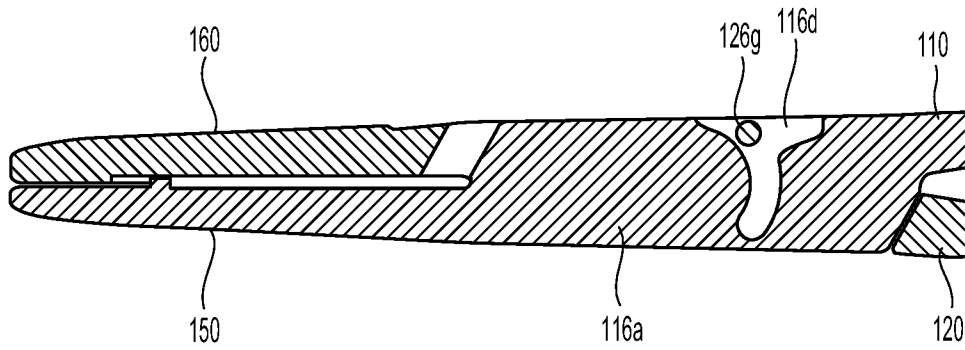


Fig. 7

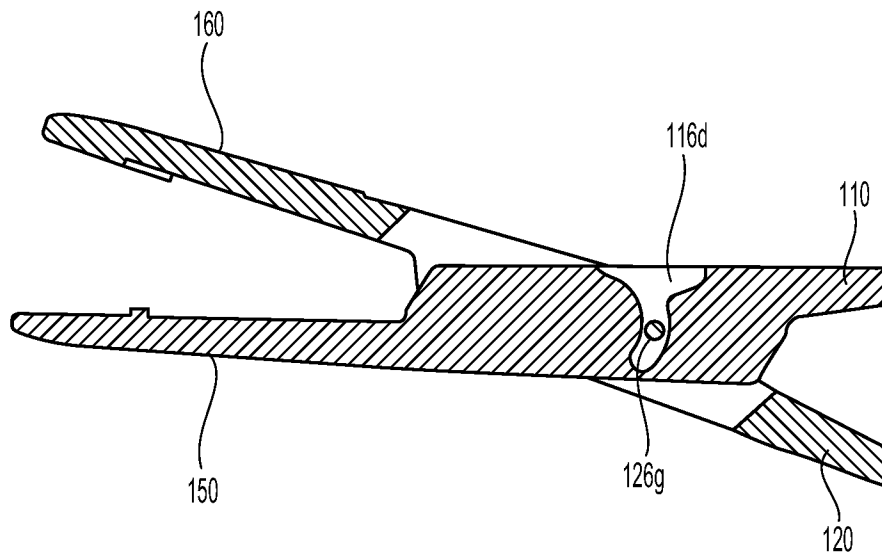


Fig. 8

7/14

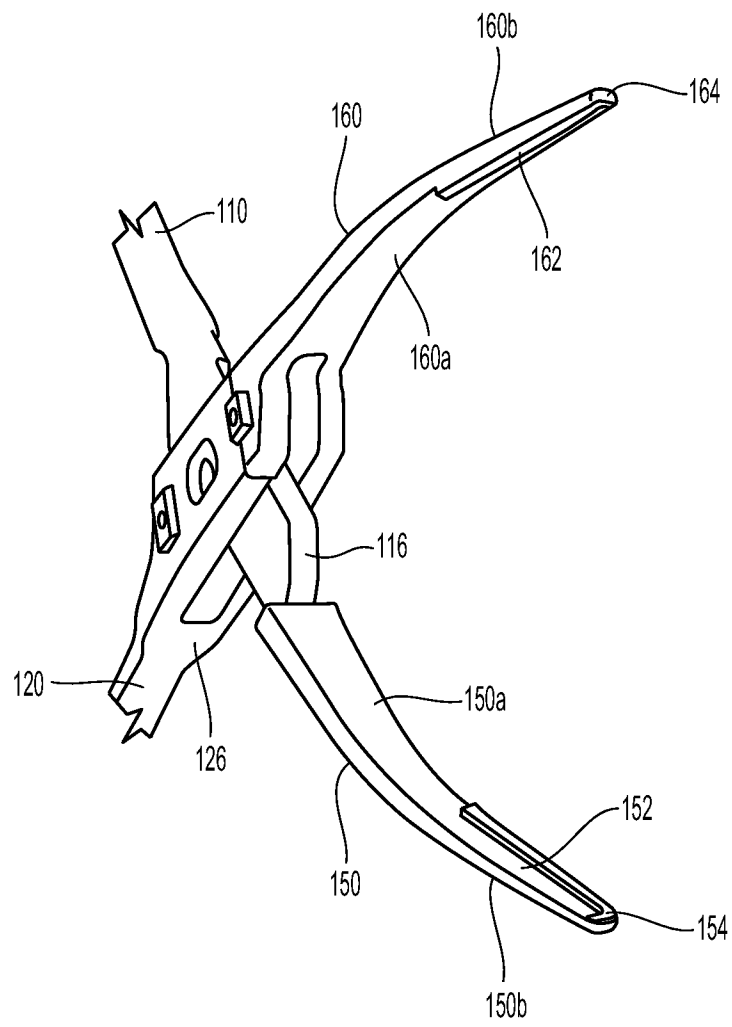


Fig. 9

8/14

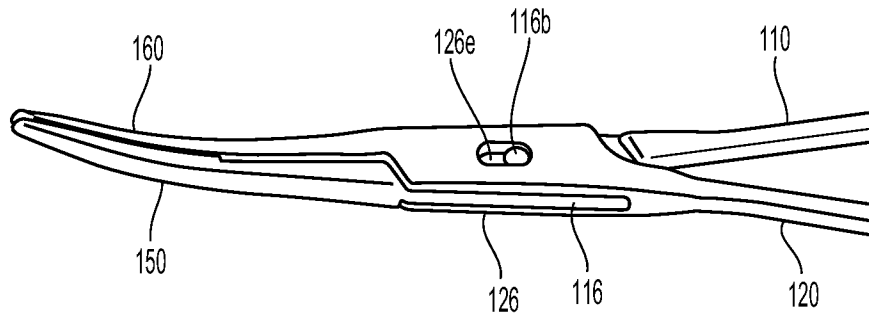


Fig. 10

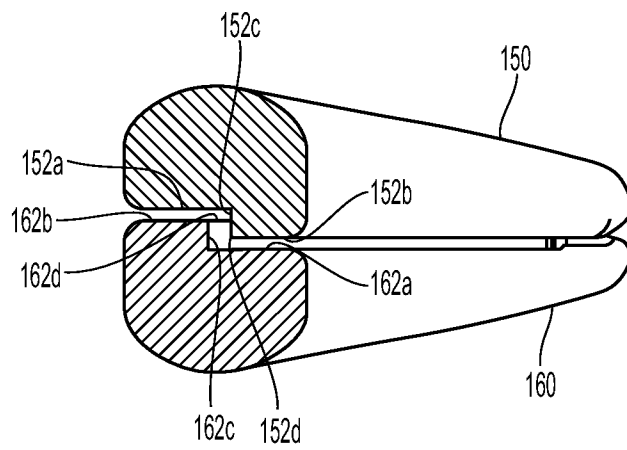


Fig. 11

9/14

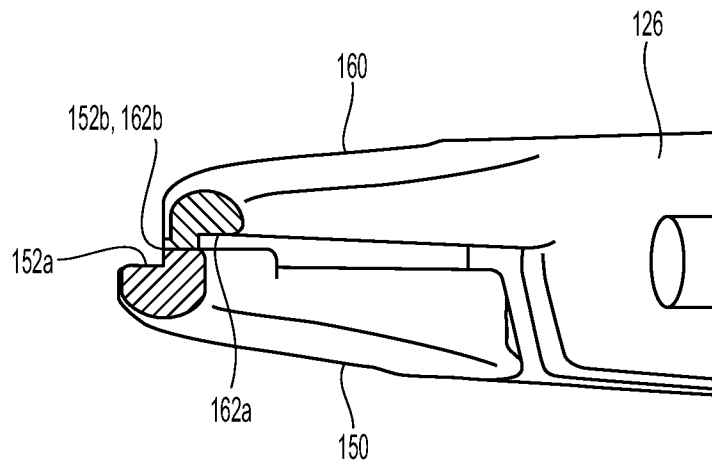


Fig. 12

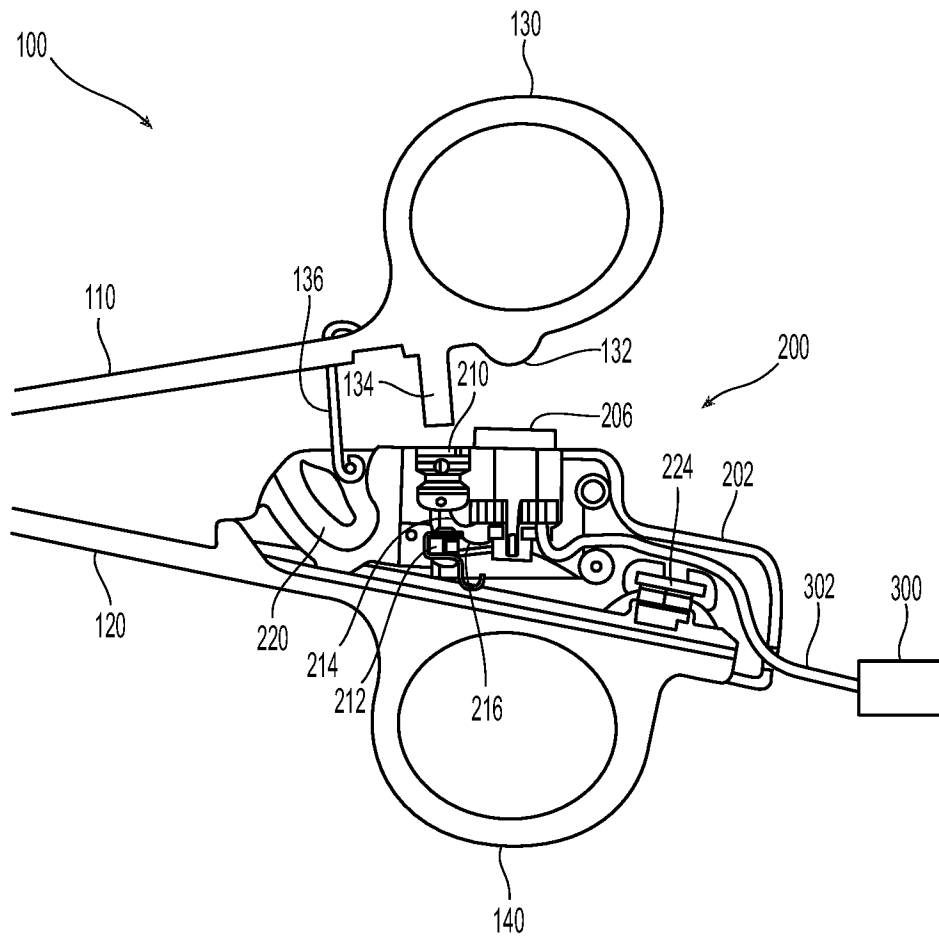


Fig. 13

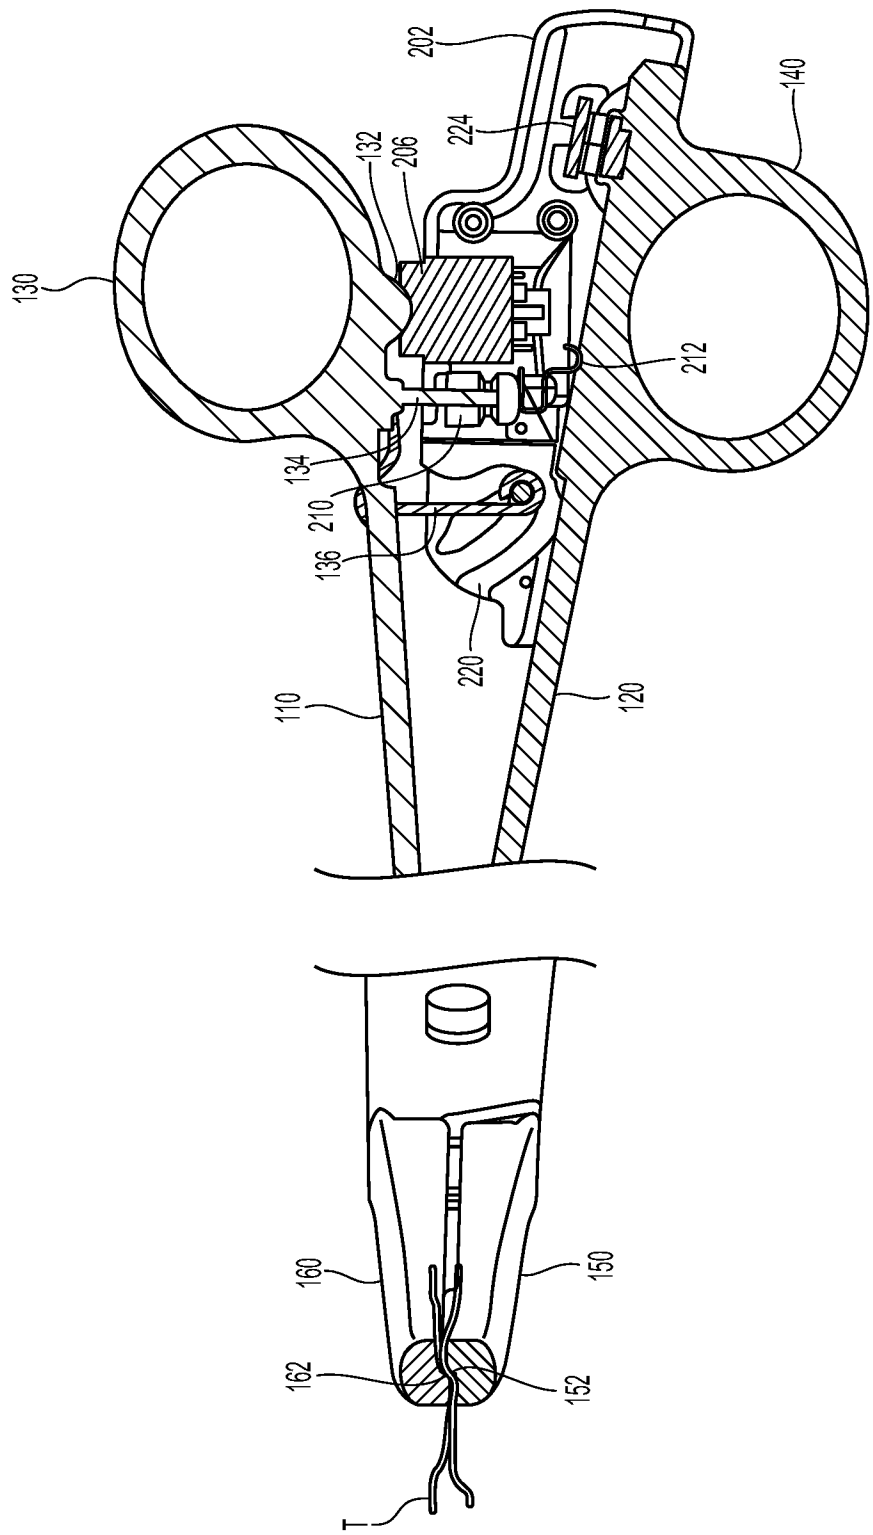


Fig. 14

11/14

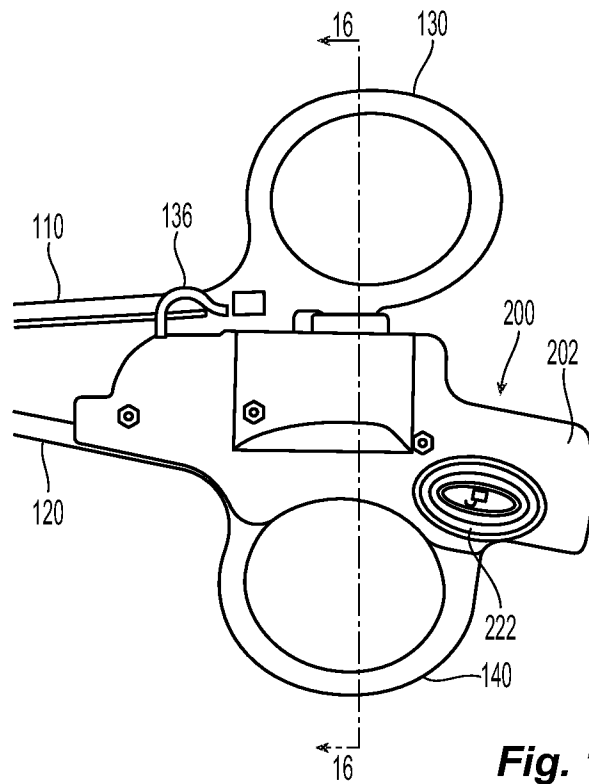


Fig. 15

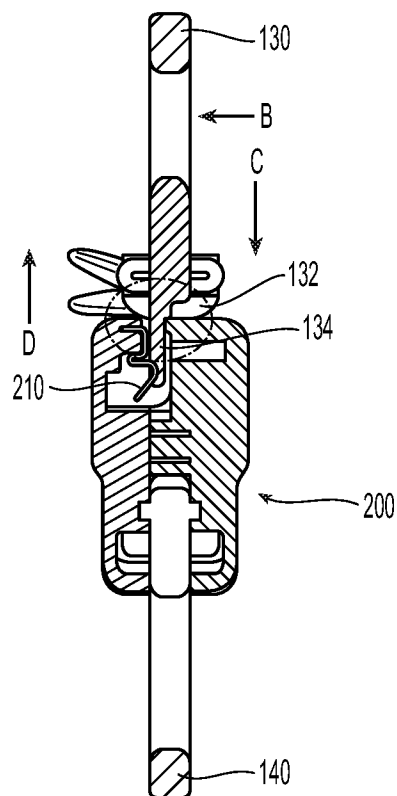


Fig. 16

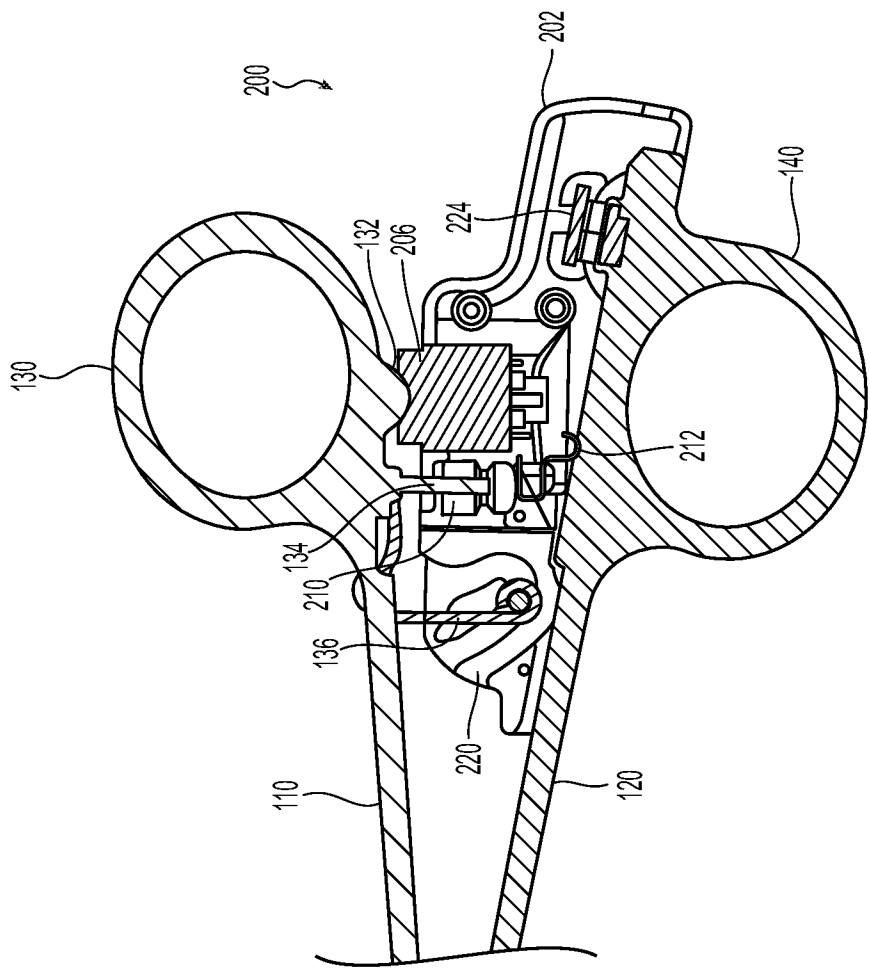


Fig. 17A

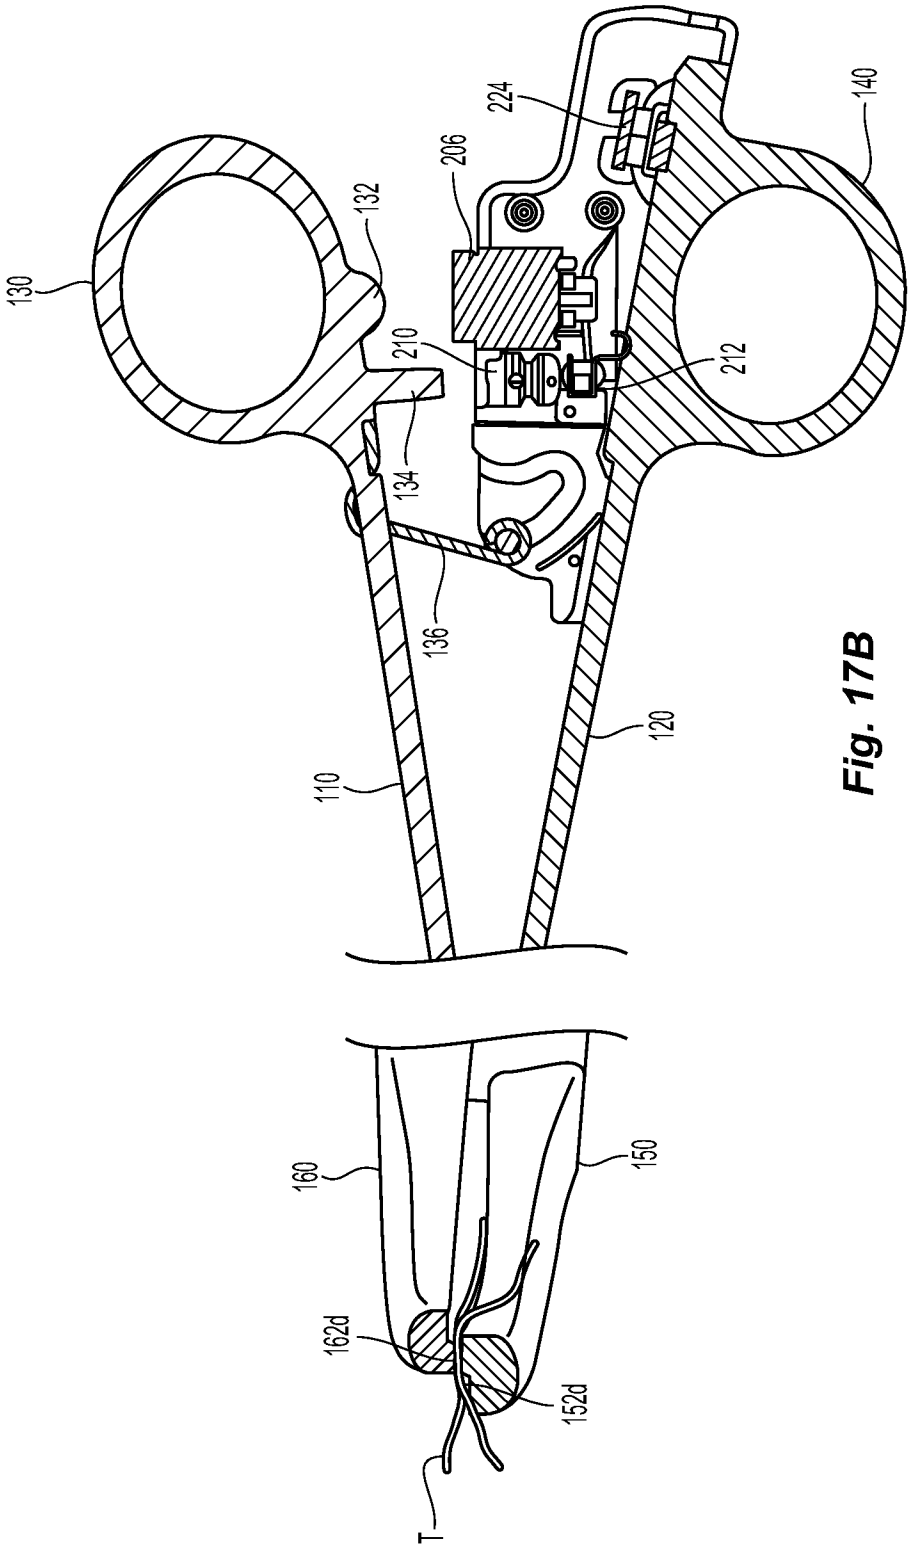


Fig. 17B

14/14

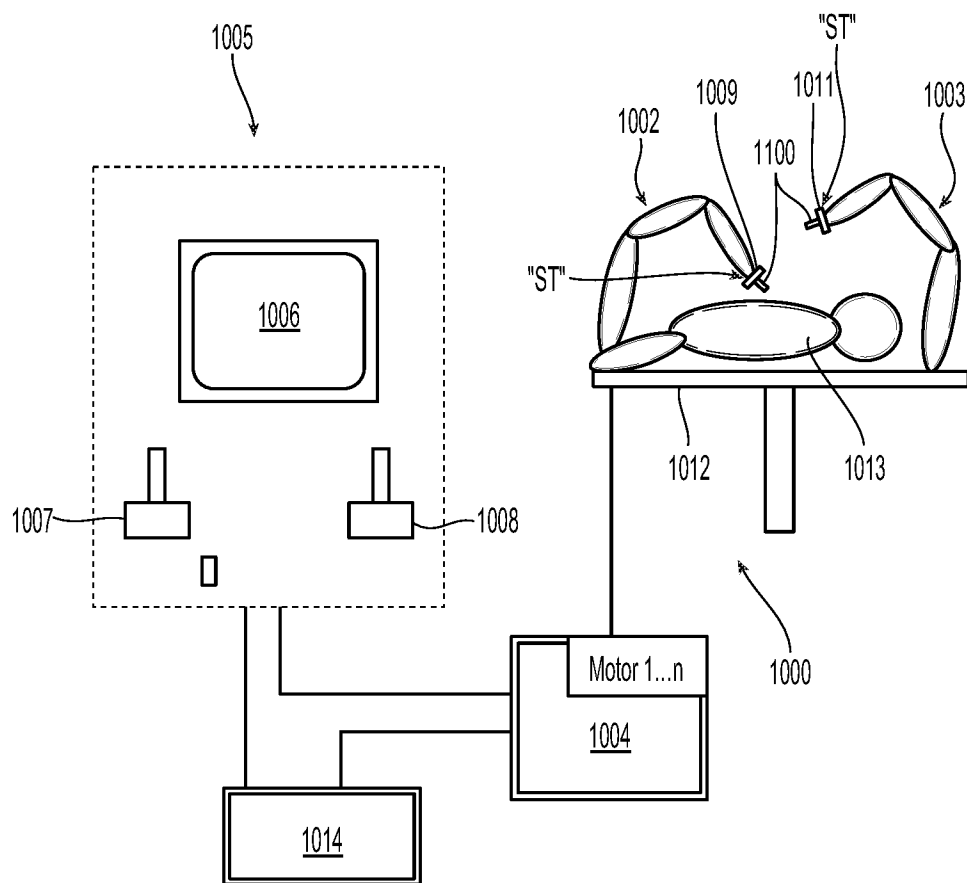


Fig. 18

INTERNATIONAL SEARCH REPORT

International application No.

PCT/CN2015/077336

A. CLASSIFICATION OF SUBJECT MATTER

A61B 17/28(2006.01)i; A61B 18/12(2006.01)i

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

A61B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

CNPAT, CNKI, EPODOC, WPI: energy, electrosurgical, forceps, handle?, connector, engag+, remov+, seal+, cut+, wall, surface

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 2014120442 A2 (ETHICON ENDO-SURGERY, INC.) 07 August 2014 (2014-08-07) description, paragraphs [00087], [00097]-[000105]; figures 1-7	13, 15, 16
A	US 2003109875 A1 (TETZLAFF, PHILIP M. ET AL.) 12 June 2003 (2003-06-12) description, paragraphs [0038]-[0039], [0043], [0047]-[0050], [0053]; figures 3, 8	1-18
A	US 2006074417 A1 (CUNNINGHAM, JAMES S. ET AL.) 06 April 2006 (2006-04-06) the whole document	1-18
A	WO 0024330 A1 (VALLEYLAB, INC.) 04 May 2000 (2000-05-04) the whole document	1-18
A	CN 103841911 A (COVIDIEN LP) 04 June 2014 (2014-06-04) the whole document	1-18
A	CN 103381104 A (COVIDIEN LP) 06 November 2013 (2013-11-06) the whole document	1-18
A	CN 102525639 A (TYCO HEALTHCARE GROUP) 04 July 2012 (2012-07-04) the whole document	1-18

☐ Further documents are listed in the continuation of Box C.
☒ See patent family annex.

* Special categories of cited documents:

“A” document defining the general state of the art which is not considered to be of particular relevance

“E” earlier application or patent but published on or after the international filing date

“L” document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

“O” document referring to an oral disclosure, use, exhibition or other means

“P” document published prior to the international filing date but later than the priority date claimed

“T” later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

“X” document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

“Y” document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

“&” document member of the same patent family

Date of the actual completion of the international search

03 January 2016

Date of mailing of the international search report

12 January 2016

Name and mailing address of the ISA/CN

STATE INTELLECTUAL PROPERTY OFFICE OF THE
P.R.CHINA
6, Xitucheng Rd., Jimen Bridge, Haidian District, Beijing
100088, China

Authorized officer

WU,Xinzhong

Facsimile No. (86-10)62019451

Telephone No. (86-10)82245605

INTERNATIONAL SEARCH REPORT
Information on patent family members

International application No.

PCT/CN2015/077336

Patent document cited in search report			Publication date (day/month/year)	Patent family member(s)			Publication date (day/month/year)
WO	2014120442	A2	07 August 2014	US	2014214019	A1	31 July 2014
				CN	104955413	A	30 September 2015
				EP	2950732	A2	09 December 2015
US	2003109875	A1	12 June 2003	US	2009043304	A1	12 February 2009
				US	8361071	B2	29 January 2013
				US	7267677	B2	11 September 2007
				US	2003199869	A1	23 October 2003
				US	6511480	B1	28 January 2003
				US	2003014053	A1	16 January 2003
				WO	02080797	A1	17 October 2002
				US	2004162557	A1	23 October 2003
				US	7582087	B2	01 September 2009
				US	2004249374	A1	09 December 2004
				US	2005137592	A1	23 June 2005
				US	7510556	B2	31 March 2009
				US	2006189980	A1	24 August 2006
				US	7329256	B2	12 February 2008
				US	2006259036	A1	16 November 2006
				US	9107672	B2	18 August 2015
				US	2008114356	A1	15 May 2008
				US	7513898	B2	07 April 2009
				US	2008167651	A1	10 July 2008
				US	7553312	B2	30 June 2009
				US	2009171353	A1	02 July 2009
				US	7896878	B2	01 March 2011
				US	2009306660	A1	10 December 2009
				US	7887536	B2	15 February 2011
				US	2010042100	A1	18 February 2010
				US	7947041	B2	24 May 2011
				US	2015282865	A1	08 October 2015
US	2006074417	A1	06 April 2006	EP	1769764	A2	04 April 2007
				US	7500975	B2	10 March 2009
				US	8303586	B2	06 November 2012
				US	2009149854	A1	11 June 2009
				US	2005107784	A1	19 May 2005
				US	7252667	B2	07 August 2007
				CA	2487914	A1	19 May 2005
				CA	2487914	C	08 October 2013
				EP	1532932	A1	25 May 2005
				EP	1532932	B1	09 September 2015
				US	2005119655	A1	02 June 2005
				US	7131970	B2	07 November 2006
				AU	2004231212	A1	02 June 2005
				AU	2004231212	B2	24 June 2010
				JP	2005144193	A	09 June 2005
				JP	5237521	B2	17 July 2013
				US	2005154387	A1	14 July 2005
				US	7811283	B2	12 October 2010
				CA	2522317	A1	08 April 2006
				CA	2522317	C	23 June 2015

INTERNATIONAL SEARCH REPORT
Information on patent family members

International application No.

PCT/CN2015/077336

Patent document cited in search report			Publication date (day/month/year)	Patent family member(s)		Publication date (day/month/year)	
				EP	1645238	A1	12 April 2006
				EP	1645238	B1	24 March 2010
				US	2006079891	A1	13 April 2006
				US	7955332	B2	07 June 2011
				JP	2006102515	A	20 April 2006
				JP	5137303	B2	06 February 2013
				AU	2005220187	A1	27 April 2006
				AU	2005220187	B2	15 September 2011
				US	2007088356	A1	19 April 2007
				US	7922718	B2	12 April 2011
				US	2008312653	A1	18 December 2008
				US	8123743	B2	28 February 2012
				US	2010023009	A1	28 January 2010
				US	8623017	B2	07 January 2014
				ES	2341258	T3	17 June 2010
				AU	2010224379	A1	14 October 2010
				AU	2010224379	B2	04 July 2013
				JP	2011045746	A	10 March 2011
				JP	5214706	B2	19 June 2013
				US	2011238067	A1	29 September 2011
				US	8394096	B2	12 March 2013
				JP	2011235119	A	24 November 2011
				EP	2942026	A1	11 November 2015
WO	0024330	A1	04 May 2000	CA	2347014	C	04 January 2011
				JP	4245278	B2	25 March 2009
				JP	2002528166	A	03 September 2002
				JP	2008253792	A	23 October 2008
				EP	1123058	B1	28 December 2005
				JP	4819091	B2	16 November 2011
				AU	1225700	A	15 May 2000
				AU	756626	B2	16 January 2003
				CA	2347014	A1	04 May 2000
				ES	2251260	T3	16 April 2006
				DE	69929230	T2	24 August 2006
				EP	1123058	A1	16 August 2001
				WO	0024331	A1	04 May 2000
				CA	2347633	A1	04 May 2000
				CA	2347633	C	04 January 2011
				AU	757278	B2	13 February 2003
				AU	1225800	A	15 May 2000
				US	6277117	B1	21 August 2001
				EP	1131010	A1	12 September 2001
				EP	1131010	B1	15 June 2005
				JP	2002528167	A	03 September 2002
				JP	4164235	B2	15 October 2008
				US	6458130	B1	01 October 2002
				WO	02080797	A1	17 October 2002
				US	2003014053	A1	16 January 2003
				US	6511480	B1	28 January 2003
				US	2003040745	A1	27 February 2003

INTERNATIONAL SEARCH REPORT
Information on patent family members

International application No.

PCT/CN2015/077336

Patent document cited in search report			Publication date (day/month/year)	Patent family member(s)		Publication date (day/month/year)
				US	6682528 B2	27 January 2004
				US	6585735 B1	01 July 2003
				US	2003181910 A1	25 September 2003
				US	2003199869 A1	23 October 2003
				US	7267677 B2	11 September 2007
				US	2004162557 A1	19 August 2004
				US	7582087 B2	01 September 2009
				US	2004249374 A1	09 December 2004
				US	2005137592 A1	23 June 2005
				US	7510556 B2	31 March 2009
				ES	2241369 T3	16 October 2005
				EP	1595508 A2	16 November 2005
				EP	1595508 B1	08 April 2009
				DE	69925854 T2	11 May 2006
				US	2006189980 A1	24 August 2006
				US	7329256 B2	12 February 2008
				US	2006259036 A1	16 November 2006
				US	9107672 B2	18 August 2015
				US	2008114356 A1	15 May 2008
				US	7513898 B2	07 April 2009
				US	2008167651 A1	10 July 2008
				US	7553312 B2	30 June 2009
				JP	2008246216 A	16 October 2008
				JP	4851489 B2	11 January 2012
				EP	2072017 A2	24 June 2009
				US	2009171353 A1	02 July 2009
				US	7896878 B2	01 March 2011
				US	ES2324479 T3	07 August 2009
				US	2009306660 A1	10 December 2009
				US	7887536 B2	15 February 2011
				US	2010042100 A1	18 February 2010
				US	7947041 B2	24 May 2011
				US	2015282865 A1	08 October 2015
CN	103841911	A	04 June 2014	US	8968306 B2	03 March 2015
				US	2013041370 A1	14 February 2013
				WO	2013022928 A1	14 February 2013
				EP	2741703 A1	18 June 2014
				US	2015164525 A1	18 June 2015
CN	103381104	A	06 November 2013	EP	2659844 B1	17 June 2015
				AU	2013205093 A1	21 November 2013
				US	9034009 B2	19 May 2015
				JP	2013230368 A	14 November 2013
				US	2013296923 A1	07 November 2013
				CA	2812677 A1	01 November 2013
				AU	2013205093 B2	28 May 2015
				EP	2659844 A2	06 November 2013
				US	2015245866 A1	03 September 2015
CN	102525639	A	04 July 2012	JP	5789470 B2	07 October 2015
				CA	2754243 A1	04 April 2012
				AU	2011226904 A1	19 April 2012

INTERNATIONAL SEARCH REPORT
Information on patent family members

International application No.

PCT/CN2015/077336

Patent document cited in search report	Publication date (day/month/year)	Patent family member(s)	Publication date (day/month/year)
		KR 20120035129 A	13 April 2012
		MX 2011010210 A	12 April 2012
		JP 2015165966 A	24 September 2015
		CN 105055020 A	18 November 2015
		EP 2436330 A1	04 April 2012
		US 2012083786 A1	05 April 2012
		CN 102525639 B	25 November 2015
		EP 2671528 A2	11 December 2013
		JP 2012075906 A	19 April 2012
		AU 2011226904 B2	03 July 2014
		ES 2438172 T3	16 January 2014
		US 2015320483 A1	12 November 2015
		EP 2436330 B1	13 November 2013
		US 2012172873 A1	05 July 2012