




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<p>(51) International Patent Classification ⁶ : C10L 1/04, 1/08</p>	<p>A1</p>	<p>(11) International Publication Number: WO 99/57232</p> <p>(43) International Publication Date: 11 November 1999 (11.11.99)</p>
<p>(21) International Application Number: PCT/US99/09018</p> <p>(22) International Filing Date: 26 April 1999 (26.04.99)</p> <p>(30) Priority Data: 09/074,270 7 May 1998 (07.05.98) US</p> <p>(71) Applicant: EXXON RESEARCH AND ENGINEERING COMPANY [US/US]; P.O. Box 390, 180 Park Avenue, Florham Park, NJ 07932-0390 (US).</p> <p>(72) Inventors: WITTENBRINK, Robert, John; 836 Shadyglen Drive, Baton Rouge, LO 70816 (US). KLEIN, Darryl, Patrick; 265 Belle Grove Avenue, Baton Rouge, LO 70820 (US). TOUVELLE, Michele, Sue; 7222 Wickham, Baton Rouge, LO 70808 (US). DAAGE, Michel; 530 Highland Trace Drive, Baton Rouge, LA 70810 (US). BERLOWITZ, Paul, Joseph; 4 Nicole Terrace, Glen Gardner, NJ 08826 (US).</p> <p>(74) Agents: NAYLOR, Henry, E. et al.; Exxon Research and Engineering Company, P.O. Box 390, Florham Park, NJ 07932-0390 (US).</p>		<p>(81) Designated States: AL, AU, BA, BB, BG, BR, CA, CN, CU, CZ, EE, GE, HR, HU, ID, IL, IN, IS, JP, KP, KR, LC, LK, LR, LT, LV, MG, MK, MN, MX, NO, NZ, PL, RO, SG, SI, SK, SL, TR, TT, UA, UZ, VN, YU, ZA, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).</p> <p>Published <i>With international search report.</i></p>

(54) Title: PROCESS FOR THE PRODUCTION OF HIGH LUBRICITY LOW SULFUR DISTILLATE FUELS

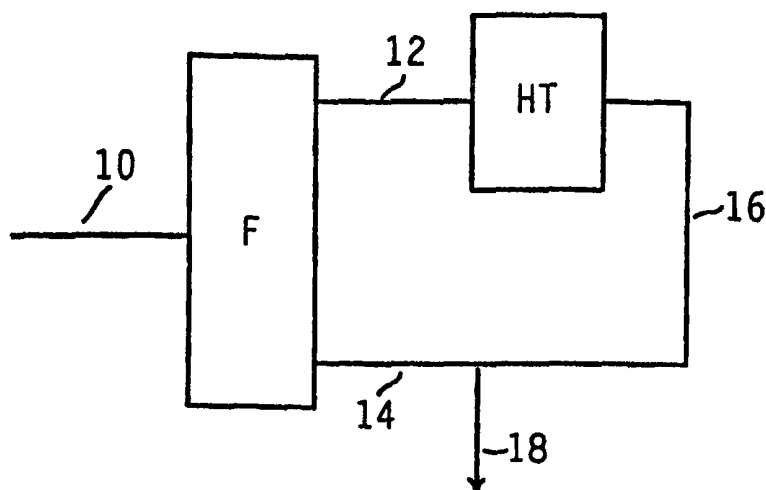

(57) Abstract

A process for producing distillate fuels, such as diesel fuels and jet fuels, having both high lubricity and low sulfur levels. Such fuels are produced by fractionating a distillate feedstream (10) into a light fraction (12) which is relatively low in lubricity and which contains from about 50 to 100 wpm of sulfur and a heavy fraction (14) having a relatively high lubricity. The first fraction (12) is hydrotreated to remove substantially all of the sulfur (16) and is then blended with the second fraction (14) to produce a distillate fuel product (18) having relatively low sulfur levels and a relatively high lubricity.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon		Republic of Korea	PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakistan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

**PROCESS FOR THE PRODUCTION OF HIGH LUBRICITY
LOW SULFUR DISTILLATE FUELS**

FIELD OF THE INVENTION

The present invention relates to a process for producing distillate fuels, such as diesel fuels and jet fuels, having both high lubricity and low sulfur levels. Such fuels are produced by fractionating a distillate feedstream into a light fraction which is relatively low in lubricity but which contains from about 50 to 100 wppm of sulfur and a heavy fraction having a relatively high lubricity and the balance of the sulfur. The light fraction is hydrotreated to remove substantially all of the sulfur and is then blended with at least a portion of the second fraction to produce a distillate fuel product having a relatively low sulfur level and a relatively high lubricity.

BACKGROUND OF THE INVENTION

There is a continuing need to produce fuels that meet the ever stricter requirements of regulatory agencies around the world. Of particular need are fuels that have relatively low levels of aromatics and sulfur. While regulated fuel properties are not identical for all regions, they are generally achieved by the use of hydroprocessing (hydrotreating) to lower the levels of both aromatics and sulfur. Hydrotreating, particularly hydrodesulfurization, is one of the fundamental processes of the refining and chemical industries. The removal of feed sulfur by conversion to hydrogen sulfide is typically achieved by reaction with hydrogen over non-noble metal sulfides, especially those of Co/Mo, Ni/Mo and Ni/W, at fairly rigorous temperatures and pressures to meet product quality specifications. Environmental considerations and mandates have driven product quality specifications in the direction of lower sulfur and aromatics levels.

Currently, the maximum allowable sulfur level for U.S. on-road diesel is 500 wppm. All countries in the European Community have instituted maximum sulfur levels of 500 wppm. In some European countries diesel fuels having even lower sulfur levels are produced. For example, Swedish Class I and Class II diesel fuels currently allow maximum sulfur levels of 10 and 50 wppm, respectively. It seems very likely that other European countries will move to the <500 wppm sulfur fuels in the foreseeable future.

Environmental and regulatory initiatives are also requiring lower levels of total aromatics in hydrocarbons and, more specifically, lower levels of the multi-ring aromatics found in distillate fuels and heavier hydrocarbon products (i.e., lubes). The maximum allowable aromatics level for U.S. on-road diesel, California Air Resources Board (CARB) reference diesel and Swedish Class I diesel are 35, 10 and 5 vol.%, respectively. Further, the CARB reference diesel and Swedish Class I diesel fuels allow no more than 1.4 and 0.02 vol.% polyaromatics, respectively.

During hydrotreating, aromatics are saturated and feed sulfur is converted to hydrogen sulfide. While this achieves the desired result with respect to emissions, it has an adverse affect on the inherent lubricity properties of the distillate fuel. This lower lubricity leads to increased maintenance costs of diesel engines, e.g., pump failures, and in extreme cases to catastrophic failure of the engine. Consequently, there is a need in the art for processes that can produce distillate fuels that meet current emissions requirements with regard to low aromatics and sulfur, but which have good inherent lubricity properties.

SUMMARY OF THE INVENTION

In accordance with the present invention, there is provided a process for producing a distillate fuel product having less than about 500 wppm

sulfur and a lubricity characterized by a wear scar diameter of less than about 400μ as measure by The High Frequency Reciprocating Rig Test from a distillate feedstream having a sulfur content up to about 2,000 wt.%, which process comprises hydrodesulfurizing said stream to a level of less than about:

(i) fractionating said distillate feedstream into a light fraction and a heavy fraction, said light fraction containing less than about 100 wppm sulfur; and said heavy fraction containing the balance of sulfur; (ii) hydrotreating said light fraction in the presence of a hydrotreating catalyst having hydrodesulfurization activity, and at hydrotreating conditions, thereby producing a light fraction which is substantially free of sulfur; and (iii) blending said hydrotreated light fraction with said heavy fraction, thereby resulting in a distillate stream having less than about 500 wppm sulfur and having relatively high lubricity.

In a preferred embodiment of the present invention the distillate feedstream is a diesel fuel stream boiling in the range of about 160° to about 400°C .

In another preferred embodiment of the present invention the distillate feedstream is a jet fuel stream boiling in the range of about 180° to about 300°C .

In still another preferred embodiment of the present invention the light fraction contains less than about 100 wppm sulfur and represents a boiling range cut of from the initial boiling point of the stream to about 70 vol. %.

BRIEF DESCRIPTION OF THE FIGURES

Figure 1 is a schematic flow plan of a non-limiting preferred embodiment of the present invention.

Figure 2 is a graphical representation of the results of the High Frequency Reciprocating Rig test.

DETAILED DESCRIPTION OF THE INVENTION

Feedstocks which are suitable for being processed in accordance to the present invention are those petroleum streams boiling in the distillate range and above. Non-limiting examples of such streams include diesel fuels, jet fuels, heating oils, kerosenes, and lubes. Such streams typically have a boiling range from about 150 to about 600°C, preferably from about 160 to about 400°C, and most preferably from about 175 to 350°C. Non-limiting examples of preferred distillate streams are those boiling in the 160-400°C range, although the trend, particularly in Europe and in California is for lighter diesel fuels. For example, Swedish Class I diesel has a T 95% of 250°C while the Class II has a T 95% of 295°C and have no more than about 50 wppm sulfur and less than 10 wt.% aromatics, based on the total weight of the fuel. T 95% means that 95% of the stream boils up to the designated temperature. Also, commercial jet fuels, which are included in the definition of distillate streams of this invention are generally classified by ASTM D 1655 and include: narrow cut Jet A1, a low freezing point variation of Jet A; and wide cut Jet B, similar to JP-4. Jet fuels and kerosene fuels can be generally classified as fuels boiling in the range of about 180-300°C.

These streams may be obtained from normal petroleum sources as well as from synthetic fuels, such as hydrocarbons obtained from shale oils. Fuels from normal petroleum sources are generally derived from their appropriate distillate streams and may be virgin stocks, cracked stocks, or a mixture thereof. The sulfur content of the source streams typically ranges from about 0.7 wt.% to about 2 wt.%. It is preferred that the streams first be hydrotreated to reduce sulfur contents, preferably to less than about 1,000 wppm sulfur.

This invention describes a unique process wherein a significant amount of the inherent lubricity of the fuel is maintained while the sulfur level and the aromatics level are substantially reduced. More particularly, a distillate boiling range stream of the present invention is fractionated such that a high lubricity higher boiling fraction and a lower boiling lower lubricity fraction are separated via distillation. The low lubricity fraction is processed to remove essentially all of the sulfur and aromatic species. The two streams, or at least a portion of the two streams, are then blended together yielding a low sulfur, low aromatic distillate product stream having high lubricity.

Reference is now made to the figure wherein the distillate stream, which contains less than about 1,000 wppm sulfur, is fed via line 10 to fractionator F to produce a light fraction having relatively low lubricity and sulfur and a heavy fraction, having a relatively high lubricity and the remaining sulfur. The light fraction exits the fractionator via line 12 and the heavy fraction via line 14. The light fraction is passed to hydrotreater HT where it is hydrotreated in the presence of a hydrotreating catalyst to remove heteroatoms, particularly sulfur and to saturate aromatics. This light fraction will typically represent that portion of the stream that contains less than about 100 wppm, preferably less than about 50 wppm, and more preferably less than about 25 wppm sulfur.

The light fraction will also contain less than about 100 wppm sulfur, typically from about 50 to 100 wppm sulfur. Suitable hydrotreating catalysts for use in the present invention are any conventional hydrotreating catalyst used in the petroleum and petrochemical industries. A common type of such catalysts are those comprised of at least one Group VIII metal, preferably Fe, Co and Ni, more preferably Co and/or Ni, and most preferably Ni; and at least one Group VI metal, preferably Mo and W, more preferably Mo, on a high

surface area support material, such as alumina, silica alumina, and zeolites. The Group VIII metal is typically present in an amount ranging from about 2 to 20 wt.%, preferably from about 4 to 12%. The Group VI metal will typically be present in an amount ranging from about 5 to 50 wt.%, preferably from about 10 to 40 wt.%, and more preferably from about 20 to 30 wt.%. All metal weight percents are on support. By "on support" we mean that the percents are based on the weight of the support. For example, if the support were to weigh 100 g. then 20 wt. % Group VIII metal would mean that 20 g. of Group VIII metal was on the support. Typical hydroprocessing temperatures will be from about 100°C to about 450°C at pressures from about 50 psig to about 2,000 psig, or higher.

Other suitable hydrotreating catalysts include noble metal catalysts such as those where the noble metal is selected from Pd, Pt, Pd and Pt, and bimetallics thereof. It is within the scope of the present invention that more than one type of hydrotreating catalyst be used in the same bed.

Suitable support materials for the catalysts of the present invention include inorganic refractory materials, such as alumina, silica, silicon carbide, amorphous and crystalline silica-aluminas, silica magnesias, alumina-magnesias, bororia, titania, zirconia and mixtures and cogels thereof. Preferred support materials include alumina, amorphous silica-alumina, and the crystalline silica-aluminas, particularly those materials classified as clays or zeolites. The most preferred crystalline silica-aluminas are controlled acidity zeolites modified by their manner of synthesis, by the incorporation of acidity moderators, and post-synthesis modifications such as dealumination.

The hydrotreated stream, which now contains substantially no sulfur, leaves the hydrotreater HT via line 16 and is blended with the heavy fraction of line 14 to produce a blended stream via 18. This heavy fraction, which contains the balance of the sulfur components, also is a high lubricity

fraction, and when blended with the substantially zero sulfur light fraction results in a stream which is relatively low in sulfur, but which has relatively high lubricity.

The following examples will serve to illustrate, but not to limit, this invention:

EXAMPLE 1:

A diesel fuel feedstream consisting of hydrotreated 60% LCCO/40% virgin distillate was distilled into two fractions. The light fraction represents 70 vol. % of the total material. Physical properties and chemical compositions of the feed and the two fractions are listed in Table 1 below.

TABLE 1

<u>Sample</u>	<u>Feed</u>	<u>Light Fraction (IBP¹-70 vol%)</u>	<u>Heavy Fraction (70-100 vol%)</u>
°API Gravity	27.1	30.5	19.9
Viscosity @ 40 °C, cSt	3.51	1.94	10.89
Sulfur, wppm	663	28	2000
Nitrogen, wppm	333	25	1037
Distillation			
IBP/5	249/378	242/353	553/580
10/20	422/467	394/431	594/610
30/40	499/524	458/481	624/638
50/60	549/575	499/515	651/666
70/80	605/641	532/548	681/700
90/95	689/720	570/585	727/751
99.5/FBP ²	788/826	615	877
Aromatics, wt. %	51.7	44.6	56.0
Saturates, wt. %	48.4	55.4	44.0

¹IBP - initial boiling point

²FBP = final boiling point

EXAMPLE 2:

A reactor was charged with a mixed bed of 2.36 g of a commercial 0.6 wt. % Pt on alumina catalyst and 5.01 g of a commercial ZnO. The mixed bed was reduced overnight at 300° C, 500 psig, and 50 cc/min H₂. The light fraction was then introduced into said reactor and hydrotreated at a temperature about 250° C, 500 psig, 3000 SCF/B H₂ and 1.0 liquid hourly space velocity, wherein SCF/B is standard cubic feet per barrel. The resulting treated light fraction contained 2 wppm S and 1.75 wt. % aromatics.

EXAMPLE 3:

A High Frequency Reciprocating Rig (HFRR) was used to determine the lubricating ability of the diesel fuels and diesel fuel blend stocks. This test was developed at the Department of Mechanical Engineering, Imperial College, London. The machine uses an electromagnetic vibrator to oscillate a moving specimen over a small amplitude under a constant load against a fixed specimen. The lower fixed specimen is held in a bath that contains the test fuel. A wear scar is formed which is measured and is used to assess the lubricity of the test fuel. In addition, the frictional force transmitted between the two specimens is measured. A working group of the International organization of Standardization (ISO), in cooperation with Coordinating European Council (CEC) has conducted a round robin test program to compare laboratory bench tests to evaluate the lubricity characteristics of diesel fuels. Their conclusions led to the selection of the High Frequency Reciprocating Rig Test (HFRR), ISO Provisional Standard TC22/SC7N595, as the proper screening tool for lubricity evaluations of diesel fuels. The test consists of a ball moving in a reciprocating

motion over a stationary disk. The ball moves at 50 Hz over a stroke length of 1 mm for 75 minutes at 60°C when testing distillate fuel. The wear scar on the disk is measured to the nearest micron in a microscope with the current proposed European standard of 460 microns as the largest allowable wear scar.

Six fuels were evaluated in the HFRR unit:

- Fuel #1) Total feed from Example 1.
- Fuel #2) Light fraction of feed from Example 1.
- Fuel #3) Heavy fraction of feed from Example 1.
- Fuel #4) The hydrotreated light fraction - Example 2.
- Fuel #5) A severely hydrotreated distillate fuel.
- Fuel #6) Blend of 15 wt. % Fuel #3 and 85 wt. % Fuel #4

The properties of these test fuels are summarized in Table 2 below.

TABLE 2

	<u>Fuel #1</u>	<u>Fuel #2</u>	<u>Fuel #3</u>	<u>Fuel #4</u>	<u>Fuel #5</u>	<u>Fuel #6</u>
°API Gravity	27.1	30.5	19.9	35.3	33.2	32.9
Viscosity @ 40 °C, cSt	3.51	1.94	10.89	2.62	2.53	3.03
Sulfur, wppm	663	28	2000	2	<1	310
Nitrogen, wt. %	333	25	1037	4	<1	171
Distillation						
IBP/5	249/378	242/353	553/580	246/345	221/338	
10/20	422/467	394/431	594/610	385/418	388/408	

30/40	499/524	458/481	624/638	446/470	418/431	
50/60	549/575	499/515	651/666	488/505	446/461	
70/80	605/641	532/548	681/700	522/542	480/498	
90/95	689/720	570/585	727/751	568/586	520/532	
99.5/FBP	788/826	615	877	640	551	
Aromatics, wt. %	51.7	44.6	56.0	1.8	0.6	12.5
Saturates, wt. %	48.4	55.4	44.0	98.2	99.4	87.5

The test conditions used in the HFRR are summarized in Table 3 below and the results are summarized in Figure 2 hereof. Typical low sulfur diesel fuels as described previously will have a wear scar diameter well above the proposed target of 400 μ and a friction force above 200. The results shown below clearly show that the product of this present invention, Fuel #6, has superior lubricity reflected in the low wear scar diameter and friction force.

TABLE 3

HFRR Run Conditions

Temperature, °C	60
Load, grams	200
Frequency, Hz	50
Stroke, μ	1000

CLAIMS:

1. A process for producing a distillate fuel product having less than about 500 wppm sulfur and a lubricity characterized by a wear scar diameter of less than about 400 μ as measure by The High Frequency Reciprocating Rig Test from a distillate feedstream having a sulfur content up to about 2,000 wt. %, which process comprises hydrodesulfurizing said stream to a level of less than about: (i) fractionating said distillate feedstream into a light fraction and a heavy fraction, said light fraction containing less than about 100 wppm sulfur; and said heavy fraction containing the balance of sulfur; (ii) hydrotreating said light fraction in the presence of a hydrotreating catalyst having hydrodesulfurization activity, and at hydrotreating conditions, thereby producing a light fraction which is substantially free of sulfur; and (iii) blending said hydrotreated light fraction with said heavy fraction, thereby resulting in a distillate stream having less than about 500 wppm sulfur and having relatively high lubricity.
2. The process of claim 1 wherein the distillate feedstream is a diesel fuel stream boiling in the range of about 160° to about 400°C.
3. The process of claim 1 wherein the distillate feedstream is a jet fuel stream boiling in the range of about 180° to about 300°C.
4. The process of claim 1 wherein the light fraction contains less than about 100 wppm sulfur and represents a boiling range cut of from the initial boiling point of the stream to about 70 vol. %.

FIG. 1


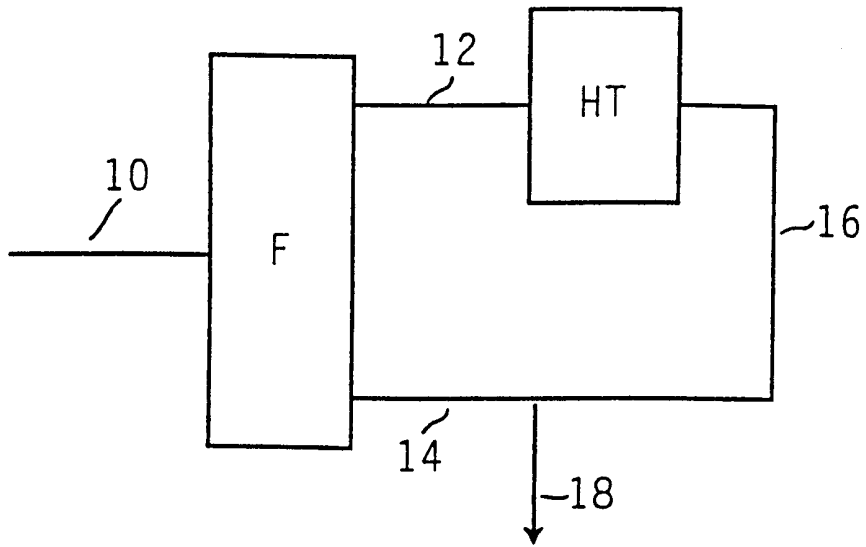


FIG. 2

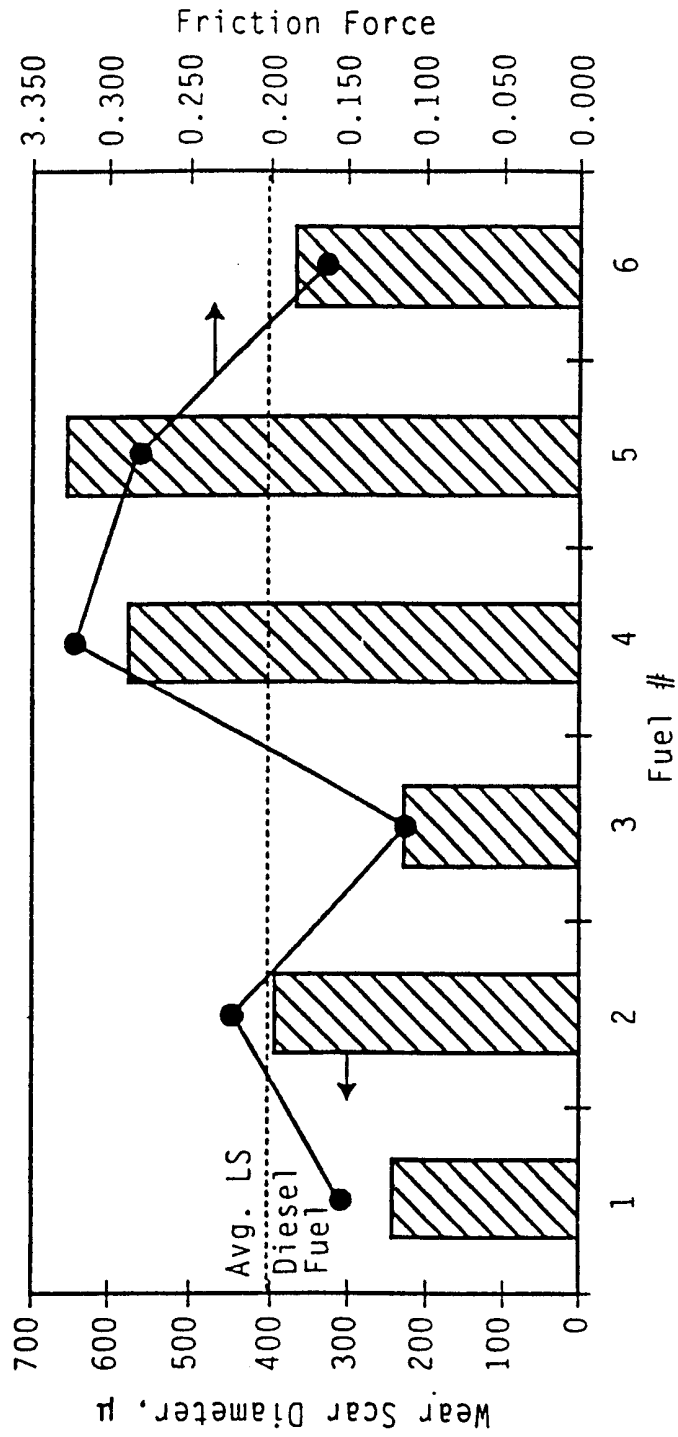

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US99/09018

A. CLASSIFICATION OF SUBJECT MATTER

IPC(6) :C10L 1/04; 1/08
US CL :44/300; 585/14

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

U.S. : 44/300; 585/14

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched
NONE

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

APS search terms: process (10W) distillate fuel, low sulfur, high lubricity

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A,P	US 5,792,339 A (RUSSELL) 11 August 1998, col. 2, line 57 to col. 3, line 10.	1-4
A	US 5,389,112 A (NIKANJAM et al) 14 February 1995, col. 5, line 3 to col. 6, line 8.	1-4
A	US 5,389,111 A (NIKANJAM et al) 14 February 1995, col. 4, line 65 to col. 5, line 53.	1-4
A	US 4,864,067 A (HARANDI et al) 05 September 1989, col. 2, line 42 to col. 3, line 19.	1-4
A	US 4,846,959 A (KENNEDY et al) 11 July 1989, col. 3, lines 26-68.	1-4

Further documents are listed in the continuation of Box C. See patent family annex.

* Special categories of cited documents:	*T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
A document defining the general state of the art which is not considered to be of particular relevance	*X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
E earlier document published on or after the international filing date	*Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
L document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	*G* document member of the same patent family
O document referring to an oral disclosure, use, exhibition or other means	
P document published prior to the international filing date but later than the priority date claimed	

Date of the actual completion of the international search

18 JUNE 1999

Date of mailing of the international search report

06 JUL 1999

Name and mailing address of the ISA/US
Commissioner of Patents and Trademarks
Box PCT
Washington, D.C. 20231

Facsimile No. (703) 305-3230

Authorized officer

B. McAvoy
ELLEN MCAVOY

Telephone No. (703) 308-0661