

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
25 September 2008 (25.09.2008)

PCT

(10) International Publication Number  
**WO 2008/114903 A1**

(51) International Patent Classification:  
*H04L 12/58* (2006.01) *H04L 12/56* (2006.01)

(74) Agent: KASAN IP & LAW FIRM; Youngpoong Building-6th Floor 142, Nonhyun-dong, Gangnam-gu, Seoul 135-822 (KR).

(21) International Application Number:  
PCT/KR2007/002437

(81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VC, VN, ZA, ZM, ZW.

(22) International Filing Date: 18 May 2007 (18.05.2007)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
11/725,859 20 March 2007 (20.03.2007) US


(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, MT, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(71) Applicant: SAMSUNG ELECTRONICS CO., LTD.  
[KR/KR]; 416, Maetan-dong, Yeongtong-gu, Suwon-si, Gyeonggi-do 442-742 (KR).

(72) Inventors: SHAO, Huai-Rong; 827 Spindrift Avenue, San Jose, CA 95134 (US). SINGH, Harkirat; 1940 Don Avenue, #1, Santa Clara, CA 95050 (US). NGO, Chiu; 227 Monticello Street, San Francisco, CA 94132 (US).

Published:  
— with international search report

(54) Title: METHOD AND SYSTEM FOR TRANSMISSION OF DIFFERENT TYPES OF INFORMATION IN WIRELESS COMMUNICATION

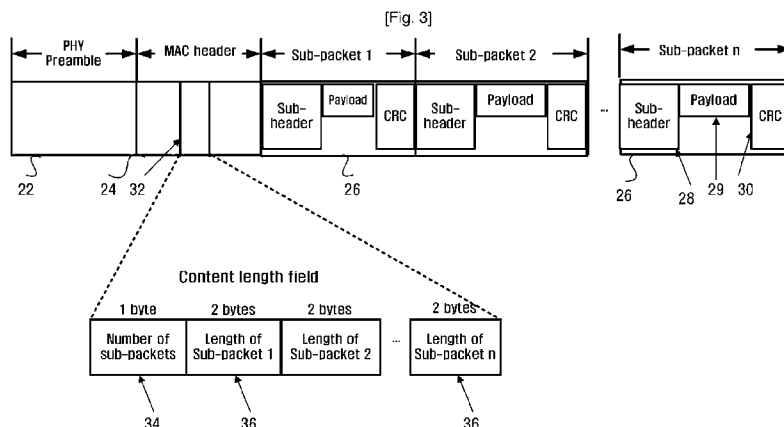

(57) Abstract: A method and system for wireless communication of different information types over a wireless channel, is provided. Information comprising different information types is formed into a composite aggregation of the different information types, and the composite aggregation is transmitted from a sender to a receiver over a wireless channel. A composite acknowledgement (ACK) format is utilized by the receiver to reduce the overhead in low-rate channels.

# **Description**

## **METHOD AND SYSTEM FOR TRANSMISSION OF DIFFERENT TYPES OF INFORMATION IN WIRELESS COM- MUNICATION**

### **Technical Field**

- [1] The present invention relates to transmission of video information and in particular, to transmission of uncompressed video over wireless communication channels.

### **Background Art**

- [2] With the proliferation of high quality video, an increasing number of electronic devices (e.g., consumer electronic devices) utilize high definition (HD) video which can require more than 1 Gbps (giga bits per second) in bandwidth for transmission. As such, when transmitting such HD video between devices, conventional transmission approaches compress the HD video to a fraction of its size to lower the required transmission bandwidth. The compressed video is then decompressed for consumption. However, with each compression, and subsequent decompression of the video data, some data can be lost and the picture quality can be degraded.

### **Disclosure of Invention**

#### **Technical Problem**

- [3] The High-Definition Multimedia Interface (HDMI) specification allows for the transfer of uncompressed HD signals between devices via a cable. While consumer electronics makers are beginning to offer HDMI-compatible equipment, there is not yet a suitable wireless (e.g., a radio frequency) technology that is capable of transmitting uncompressed HD video signals. Wireless local area network (WLAN) and similar technologies can suffer interference issues when several devices are connected which do not have the bandwidth to carry the uncompressed HD signal, and do not provide an air interface to transmit uncompressed video over 60 GHz band. There is, therefore, a need for a method and system for wireless transmission of uncompressed video information.

#### **Technical Solution**

- [4] The present invention provides a method and system for transmission of different types of information in wireless communication of video information. This is achieved by aggregating different types of information for wireless communication of video, audio, control, and data information. An example involves transmission of uncompressed HD video information between wireless stations communicating over a wireless channel, such as in wireless networks.

- [5] The aggregation process comprises forming a composite aggregation packet for transmission of different types of information (e.g., audio, video, control messages), between wireless stations. In addition, a composite acknowledgement (ACK) format is utilized in the aggregation process.
- [6] The aggregation of different types of information into composite packages, along with corresponding composite ACK packages, increases transmission efficiency in wireless networks, and reduces overhead in low-rate channels. For example, transmission efficiency is increased for wireless HD video transmission in wireless networks that use Time Division Duplex (TDD) for coordinating high-rate and low-rate channels.
- [7] These and other features, aspects and advantages of the present invention will become understood with reference to the following description, appended claims and accompanying figures.

### **Brief Description of the Drawings**

- [8] Fig. 1 shows a functional block diagram of a wireless network that implements uncompressed HD video transmission between wireless stations by aggregating information types, according to an embodiment of the present invention.
- [9] Fig. 2 shows an example timing diagram for TDD scheduling applied to low-rate and high-rate wireless communication channels in Fig. 1.
- [10] Fig. 3 shows an example composite packet format for aggregating different information types into a packet, according to the present invention.
- [11] Fig. 4 shows further details of the format of a sub-packet in Fig. 3.
- [12] Fig. 5 shows the details of an Information Type Mask in the sub-packet in Fig. 4.
- [13] Fig. 6 shows the format of an example composite ACK packet according to the present invention.
- [14] Fig. 7 shows another example composite packet utilizing Unequal Error Protection (UEP) for some of the information in the packet, according to the present invention.
- [15] Fig. 8 shows further details of each sub-packet in the packet of Fig. 7.
- [16] Figs. 9-10 show flowcharts of example communication processes between a sender and a receiver in a wireless network, using a composite packet and a composite ACK packet, according to the present invention.
- [17] Fig. 11 shows a composite packet format for aggregating different types of information that require Equal Error Protection (EEP), according to an embodiment of the present invention.
- [18] Fig. 12 shows a packet format for aggregating a single type of information that requires UEP, according to an embodiment of the present invention.
- [19] Fig. 13 shows an example function block diagram of a wireless communication

system including a sender and a receiver implementing the processes in Figs. 9-10, according to the present invention.

### **Mode for the Invention**

- [20] The present invention provides a method and system for aggregating different types of information for wireless communication of video information, and in particular, transmission of uncompressed HD video information between wireless stations communicating over a wireless channel.
- [21] In many wireless communication systems, a frame structure is used for data transmission between a transmitter and a receiver. For example, the IEEE 802.11 standard uses frame aggregation in a Media Access Control (MAC) layer and a physical (PHY) layer. In a typical transmitter, a MAC layer receives a MAC Service Data Unit (MSDU) and attaches a MAC header thereto, in order to construct a MAC Protocol Data Unit (MPDU). The MAC header includes information such as a source address (SA) and a destination address (DA). The MPDU is a part of a PHY Service Data Unit (PSDU) and is transferred to a PHY layer in the transmitter to attach a PHY header (i.e., a PHY preamble) thereto to construct a PHY Protocol Data Unit (PPDU). The PHY header includes parameters for determining a transmission scheme including a coding/modulation scheme.
- [22] Typically, the most reliable coding/modulation scheme is applied to a PHY signal field in the PHY header, and an additional cyclic redundancy code (CRC) check is added to ensure this information is received correctly at the receiver. The MAC header and payload data in the MSDU are usually treated equally and transmitted using the same coding/modulation scheme, which is less robust than that for the PHY signal field of the PHY header. Further, before transmission as a packet from a transmitter to a receiver, a preamble is attached to the PPDU, wherein the preamble can include channel estimation and synchronization information.
- [23] In one embodiment, an aggregation process according to the present invention comprises forming a composite aggregation packet for transmission of audio, video and control messages, etc., between wireless stations. In addition, a composite ACK format is utilized in the aggregation process to reduce the overhead in low-rate channels. The aggregation process improves transmission efficiency for wireless HD video transmission in wireless networks wherein TDD is used for coordinating high-rate and low-rate channels.
- [24] Fig. 1 shows a functional block diagram of a wireless network 10 that implements uncompressed HD video transmission between wireless stations, according to an embodiment of the present invention. The network 10 includes a coordinator 12, such as a wireless HD (WiHD) coordinator, and multiple wireless stations 14 (e.g., Dev1,

..., DevN). The coordinator 12 and the stations 14 utilize a low-rate channel 16 (dashed lines in Fig. 1) and a high-rate channel 18 (heavy solid lines in Fig. 1) for communication there between.

[25] In this example, the coordinator 12 is a sink of video and/or audio data implemented, for example, in a HDTV set in a home wireless network environment, which is a type of WLAN. The coordinator need not be tied with a sender or receiver, and further can be either a video source or a video sink. As such, the coordinator can be implemented in a station or separately.

[26] Each station 14 comprises a device that can be the source of uncompressed video or audio. Examples of each device can be a set-top box, a DVD player, etc. A station 14 can also be an audio sink.

[27] The coordinator 12 uses the low-rate channel 16, and the high-rate channel 18, for communication with the stations 14. Each station 14 uses the low-rate channel 16 for communication with other stations 14. The high-rate channel 18 only supports single direction unicast transmission with, e.g., multi-Gb/s bandwidth to support uncompressed HD video. The low-rate channel 16 can support bi-directional transmission, e.g., with at most 40 Mbps (megabits per second) throughput. The low-rate channel 16 is mainly used to transmit control frames, such as ACK frames.

[28] As shown by the example timing diagram in Fig. 2, TDD scheduling is applied to the low-rate and high-rate channels 16 and 18, whereby at any one time the low-rate and high-rate channels 16 and 18, cannot be used in parallel for transmission. In Fig. 2, Beacon and ACK frames are transmitted over the low-rate channel 16 in between the transmission of video packets, audio and control information over the high-rate channel 18.

[29] For the same amount of information, the transmission duration over the high-rate channel 18 is much shorter than over the low-rate channel 16. Therefore, the high-rate channel 18 should be utilized as long as a packet can be transmitted over the high-rate channel 18, rather than over the low-rate channel 16, to achieve high system throughput.

[30] However, since the high-rate channel 18 can only support single-direction unicast transmission, use of the low-rate channel 16 is necessary for bi-directional transmissions. For example, after a video packet is transmitted from a station 14 to the coordinator 12 over the high-rate channel 18, an ACK packet would be sent back from the coordinator 12 to that station 14 over the low-rate channel 16. Since switching between the high-rate and low-rate channels 16 and 18 requires a transition period, frequent channel switching wastes bandwidth and can degrade the network throughput since no data can be transmitted during a channel switch time.

[31] To reduce bandwidth waste caused by channel switching for communicating

different types of information over different channels, in one embodiment the present invention utilizes a composite WiHD packet format specifying the aggregation of different types of information such as video, audio, data, control messages, etc. Information of the same type can be placed into different sub-packets to provide more robust transmission.

- [32] Fig. 3 shows an example composite WiHD packet format 20, comprising a PHY Preamble 22, a MAC header 24, and multiple Sub-packets 26 (i.e., Sub-packet 1, ..., Sub-packet n). Each Sub-packet 26 includes a Sub-header 28, a Payload 29 and a Cyclic Redundancy Check (CRC) 30. The MAC header 24 includes a Content length field 32 comprising a Number of sub-packets field 34, and multiple Length of Sub-packet fields 36 (i.e., Length of Sub-packet 1, ..., Length of Sub-packet n), corresponding to the multiple Sub-packets 26.
- [33] The composite packet 20 includes sub-packet and information type location/length information, such as in fields 32, 34, 36 and 28 described herein, to allow a receiver to use such sub-packet and information type location/length information, for locating and retrieving the different information types within the composite packet 20.
- [34] The Content length field 32 is added to the MAC header 24, and uses one byte for the Number of sub-packets field 34 to indicate the number of Sub-packets 26 in the packet 20. The Content length field 32 uses two bytes for each Length of Sub-packet field 36 to indicate the length of each Sub-packet 26.
- [35] Fig. 4 shows further details of the format of a Sub-packet 26 in Fig. 3. The Sub-header 28, located at the beginning of the Sub-packet 26, comprises a Sub-packet Index 28A, an Information Type Mask 28B, and one or more Length of Type fields 28C. Further, the Payload field 29 includes one or more Payload of Type fields 28D.
- [36] In this example, the Sub-packet index 28A is a 1 byte field indicating the sequence number of that Sub-packet 26 within the packet 20. Further, the Information Type Mask 28B (shown in more detail in Fig. 5) is a 1 byte field, indicating different information types based on bit settings therein. For example, if an information type bit is set to "1" in the Information Type Mask 28B, then: (1) there is a corresponding Length of Type field 28C for that type in the Sub-header 26, and (2) there is an information Payload of Type field 28D for that information type in the Sub-packet payload 29.
- [37] If an information type bit is set to "0" in the Information Type Mask 28B, then there are no fields 28C, 28D for that information type in the Sub-packet 26. The sequence (order) of the Length of Type fields 28C (i.e., Length of Type *i*, Length of Type *k*, ..., Length of Type *m*) in the Sub-header 28 is the same as the sequence (order) of the corresponding information type bits in the Information Type Mask 28B. Similarly, the sequence (order) of the Payload of Type field 28D (i.e., Payload of Type *i*, Payload of Type *k*, ..., Payload of Type *m*) in the Payload field 29 is the same as the sequence

(order) of the corresponding information type bits in the Information Type Mask 28B, and the same as the sequence (order) of the corresponding Length of Type fields 28C (i.e., Length of Type  $i$ , Length of Type  $k$ , ..., Length of Type  $m$ ) in the Sub-header 28.

- [38] As noted, Fig. 5 shows details of the Information Type Mask 28B of a Sub-packet 26, including a Control bit 40, an Audio bit 42, a Data bit 44, a Video bit 46, a Beam-Track bit 48, an Others bit 50 and two Reserved bits 52. Each of the bits 42, 44, 46, 48 and 50, when set (i.e., set to "1"), indicates that information of that type is in the Payload 29 of that Sub-packet 26.
- [39] The sender station 14 or the coordinator 12 can generate such a composite packet 20 including a CRC value for the payload in each Sub-packet 26, and then transmits the composite packet 20 to the receiving station 14. If uncompressed video data is included in the composite packet, then the packet 20 is transmitted over the high-rate channel 18, otherwise, the packet 20 can be transmitted over the low-rate channel 16. Transmitting one composite packet 20 for different information types, rather than transmitting different packets for different information types, reduces transmission overhead.
- [40] After receiving the composite packet 20, the receiving station 14 uses the packet and Sub-packet field information (e.g., fields 32, 34, 36, 28 (Fig. 3)) in the composite packet 20 to locate and retrieve the different information types including payloads 29 in Sub-packets 26 within the composite packet 20. The receiving station 14 further uses the CRC information 30 corresponding to each Sub-packet 26 to conduct a CRC check for the payload 29 of each Sub-packet 26. The station 14 then forms a Composite ACK packet 60, shown in Fig. 6, based on the CRC check and transmits the Composite ACK packet 60 back to the sender over the low-rate channel 16.
- [41] As shown in Fig. 6, the Composite ACK packet 60 (corresponding to the composite packet 20), comprises a PHY Preamble 62, a MAC header 64, an ACK payload 66 including a CRC field 68 for the ACK payload 66. The MAC header 64 includes an ACK length field 70 which indicates the number of Sub-packets 26 that are acknowledged in the payload 66 of the ACK packet 60. The ACK payload 66 further includes multiple acknowledgments for sub-packet fields 72, each providing an ACK for a Sub-packet 26 in a received composite packet 20. Transmitting one Composite ACK packet 60 to acknowledge a composite packet 20 that includes different information types, rather than transmitting different ACK packets for different information types, reduces transmission overhead over the low-rate channel 16.
- [42] Fig. 7 shows another example format for a composite WiHD packet 80 when UEP is applied to some of the information in the packet. The packet 80 comprises a PHY Preamble 82, a MAC header 84 and multiple Sub-packets 86. Compared to the composite packet 20 of Fig. 3, in the composite packet 80 (Fig. 7) all Sub-packet Sub-

headers 28 have been moved from the Payload 29 into a Sub-header field 88 in the MAC header 84 to simplify the UEP operation. The MAC header 84 further includes a UEP offset field 89 that indicates the offset of UEP in the packet 80. The offset of UEP indicates the location where UEP processing begins. Fig. 8 shows further details of each Sub-packet 86 of the packet 80, wherein each Sub-packet 86 includes a Payload 29 and a corresponding CRC value 30, such that the Payload 29 includes multiple Payload of Type fields 28D as in Fig. 4.

[43] Figs. 9-10 show flowcharts of example communication process 90 and 91 for a wireless sender (e.g., coordinator 12, station 14) and a wireless receiver (e.g., station 14, coordinator 12), respectively, in the network 10, according to the present invention. The communication processes use the WiHD Composite Packet 20 (or 80) and the Composite ACK packet 60, for implementing the aggregation of different types of information. The communication processes 90 and 91 include the steps of:

[44]

[45] Sender steps (Fig. 9):

[46] *Step 92:* Obtain information to transmit. Such information can include, e.g., audio, video, control message (e.g., a user control command, such as a TV program switch, etc.).

[47] *Step 94:* Form a WiHD Composite Packet using the obtained information.

[48] *Step 96:* Transmit the WiHD Composite Packet to the receiver (over the low-rate channel 16 or the high-rate channel 18).

[49] *Step 98:* Wait for a Composite ACK Packet from the receiver. Upon receipt, the sender checks the ACK bit for each sub-packet, wherein if the bit is "0" indicating error, the sender retransmits the sub-packet if time allows.

[50]

[51] Receiver steps (Fig. 10):

[52] *Step 100:* Wait for a WiHD Composite Packet from the sender.

[53] *Step 102:* Receive a WiHD Composite Packet from the sender.

[54] *Step 104:* Perform a CRC check for each Sub-packet in the WiHD Composite Packet. Pass sub-packets with a successful CRC check (i.e., no error) for transfer to higher layers in step 110.

[55] *Step 106:* Form a Composite ACK packet based on the CRC check in step 104, indicating sub-packets received in error.

[56] *Step 108:* Transmit the Composite ACK packet to the sender over the low-rate channel 16, thereby completing processing of the packet 20.

[57] *Step 110:* Transfer received sub-packet information (e.g., audio, video, control) to high-layers. In one example, the receiver uses the packet and Sub-packet field information (e.g., fields 32, 34, 36, 28) in the composite packet 20 to locate and retrieve



the different information types (e.g., audio, video, control) included in the Payloads 29 in the received Sub-packets 26 within the composite packet 20, and provides the retrieved information to higher layers in the receiver for consumption and/or further processing.

[58]

[59] Fig. 11 shows another example composite packet frame format 120, which only aggregates different types of information such as control, audio and data, etc., that require EEP. Information such as video which requires UEP (e.g., uncompressed video which requires UEP), is packetized separately using the example packet format 130 shown in Fig. 12 for a single type of information. The packet 130 is a variation of the packet 80 in Fig. 7, and the MAC header 132 in the packet 130 includes an UEP offset 89 and a Content length field 32. The Payload 29 for each Sub-packet 86 is for the same type of information (e.g., uncompressed video).

[60] Fig. 13 shows an example function block diagram of a wireless communication system 200 including an access point (AP) 202 as the coordinator 12 (Fig. 1), and at least one station (STA) 202 as a receiver device 14 (Fig. 1), implementing the communication processes in Figs. 9-10 according to the present invention.

[61] The AP 202 comprises a physical (PHY) layer 206 and a media access control (MAC) layer 208. The PHY layer 206 implements a type of IEEE 802.11 communication standard for transmitting data over a channel. The MAC layer 208 comprises a composite packet aggregator 212 and a re-transmitter 210, which together implement the steps in Fig. 9. As such, the composite aggregator generates composite packets 20 for transmission to the STA 204, and the re-transmitter 210 that retransmits information based on ACK packets from a STA 204.

[62] A STA 204 includes a PHY layer 214 corresponding to the PHY layer 206 of the AP 202. Each STA 204 further includes a MAC layer 216 that comprises a composite ACK generator 217 and an error recovery module 218, which together implement the steps in Fig. 10. As such, the error recovery module 218 checks the CRC of received composite packets 20 for errors and the composite ACK generator 217 generates composite ACK packets accordingly for transmission to the AP 202. The error recovery module further uses the packet and Sub-packet field information (e.g., fields 32, 34, 36 and 28) in the composite packet 20 to locate and retrieve the different information types (e.g., audio, video, control) included in the Payloads 29 in correctly received Sub-packets 26 within the composite packet 20, and provides the retrieved information to higher layers in the receiver for consumption and/or further processing. Further, the error recovery module may use the UEP and EEP information in the packet 20 for error detection/recovery.

[63] Although in Fig. 13, the modules 210, 214, 217 and 218 are implemented in MAC

layers, as those skilled in the art will recognize, one or more of the modules 210, 214, 217 and 218 can be implemented in a different software, hardware, firmware layer. Further, although in the description of Fig. 13 the STAs and the AP have been shown separately, each is a type of wireless communication station capable of transmitting and/or receiving over a wireless channel in a wireless communication system such as a WLAN. Therefore, a wireless communication station herein can function as a transmitter, a receiver, an initiator and/or a responder. It then follows that an AP can function as a transmitter, a receiver, an initiator and/or a responder. Similarly, a STA can function as a transmitter, a receiver, an initiator and/or a responder.

### **Industrial Applicability**

- [64] As is known to those skilled in the art, the aforementioned example architectures described above, according to the present invention, can be implemented in many ways, such as program instructions for execution by a processor, as logic circuits, as an application specific integrated circuit, as firmware, etc. The present invention has been described in considerable detail with reference to certain preferred versions thereof; however, other versions are possible. Therefore, the spirit and scope of the appended claims should not be limited to the description of the preferred versions contained herein.

## Claims

- [1] A method for wireless communication of different information types, comprising the steps of:  
inputting information comprising different information types;  
forming a composite aggregation of the different information types; and  
transmitting the composite aggregation from a wireless sender to a wireless receiver over a wireless channel.
- [2] The method of claim 1 wherein the different information types include audio, video, control and data.
- [3] The method of claim 1 wherein forming a composite aggregation of the different information types further includes forming a composite information packet including multiple sub-packets and location information for each sub-packet composite information packet, wherein at least one of the sub-packets contains different information types.
- [4] The method of claim 3 wherein each sub-packet comprises:  
payload fields for different information types; and  
a sub-header that indicates: (a) the information types in that sub-packet, and (b) the length of payload fields for different information types in the sub-packet.
- [5] The method of claim 4 wherein the sub-header comprises an information mask that indicates the different information types in the sub-packet.
- [6] The method of claim 4 wherein the sub-header comprises a sub-packet index that indicates a sequence number of that sub-packet within the composite information packet.
- [7] The method of claim 4 wherein each sub-packet further includes a CRC value for the information types in the packet.
- [8] The method of claim 7 further comprising the steps of:  
receiving the composite information packet at a wireless receiver; and  
using the location information therein to locate and retrieve the different information types in the sub-packets within the composite information packet.
- [9] The method of claim 1 further comprising the steps of:  
receiving the composite aggregation at a wireless receiver;  
forming an aggregated acknowledgment; and  
transmitting the aggregated acknowledgment to the transmitter over a wireless channel.
- [10] The method of claim 9 wherein forming the aggregated acknowledgment comprises forming an aggregated acknowledgment that includes an acknowledgment for the different information types in the received composite aggregation.

gregation, the method further comprising the step of the transmitter re-transmitting information based on the aggregated acknowledgment.

- [11] The method of claim 10 wherein:  
forming a composite aggregation of the different information types further includes forming a composite information packet including multiple sub-packets, wherein at least one of the sub-packets contains different information types; and forming an aggregated acknowledgment (ACK) includes forming a composite ACK packet that includes an acknowledgment for the different information types in the composite information packet.
- [12] The method of claim 11 wherein:  
the composite ACK packet further includes multiple ACK sub-packets, each ACK sub-packet includes an acknowledgment for a sub-packet of the composite information packet.
- [13] The method of claim 9 wherein the composite aggregation is transmitted over a high-rate channel.
- [14] The method of claim 13 wherein the aggregated acknowledgment is transmitted over a low-rate channel.
- [15] The method of claim 14 further comprising the steps of performing TDD for coordinating the usage of the high-rate and low-rate channels.
- [16] The method of claim 1 wherein forming the composite aggregation further includes providing Unequal Error Protection (UEP) for one or more information types in the composite aggregation.
- [17] The method of claim 1 wherein forming the composite aggregation further includes providing Equal Error Protection (EEP) for a plurality of different information types in the composite aggregation.
- [18] The method of claim 17 wherein:  
inputting information further includes inputting information comprising different information types and same information types;  
forming the composite aggregation further includes providing UEP for same information types in the composite aggregation.
- [19] The method of claim 1 wherein the different information types include two or more of audio, uncompressed video, control and data.
- [20] A system for wireless communication of different information types, comprising:  
a transmitter including a composite aggregator configured to form a composite aggregation of information comprising different information types, and a communication module configured to transmit the composite aggregation over a wireless channel; and  
a receiver configured to receive the composite information.

- [21] The system of claim 20 wherein the different information types include audio, video, control and data.
- [22] The system of claim 20 wherein the composite aggregation comprises a composite information packet including multiple sub-packets and location information for each sub-packet composite information packet, wherein at least one of the sub-packets contains different information types.
- [23] The system of claim 22 wherein each sub-packet comprises:  
payload fields for different information types; and  
a sub-header that indicates: (a) the information types in that sub-packet, and (b) the length of payload fields for different information types in the sub-packet.
- [24] The system of claim 23 wherein the sub-header comprises an information mask that indicates the different information types in the sub-packet.
- [25] The system of claim 23 wherein the sub-header comprises a sub-packet index that indicates a sequence number of that sub-packet within the composite information packet.
- [26] The system of claim 23 wherein each sub-packet further includes a CRC value for the information types in the packet.
- [27] The system of claim 26 wherein:  
the receiver is configured to receive the composite information packet and uses the location information therein to locate and retrieve the different information types in the sub-packets within the composite packet.
- [28] The system of claim 20 wherein the receiver includes:  
a communication module configured to receive the composite aggregation; and  
an acknowledgment generator configured to form an aggregated acknowledgment;  
wherein the communication module of the receiver is further configured to transmit the aggregated acknowledgment to the transmitter over a wireless channel.
- [29] The system of claim 28 wherein the aggregated acknowledgment comprises an acknowledgment for the different information types in the received composite aggregation, the transmitter further including a re-transmitter configured for re-transmitting information based on the aggregated acknowledgment.
- [30] The system of claim 29 wherein:  
the composite aggregation comprises a composite information packet including multiple sub-packets, wherein at least one of the sub-packets contains different information types; and  
the aggregated ACK comprises a composite ACK packet including an acknowledgment for the different information types in the composite information

packet.

- [31] The system of claim 30 wherein:  
the composite ACK packet further includes multiple ACK sub-packets, each ACK sub-packet includes an acknowledgment for a sub-packet of the composite information packet.
- [32] The system of claim 28 wherein the composite aggregation is transmitted over a high-rate channel.
- [33] The system of claim 32 wherein the aggregated acknowledgment is transmitted over a low-rate channel.
- [34] The system of claim 33 further comprising the transmitter and the receiver are configured to perform TDD for coordinating the usage of the high-rate and low-rate channels.
- [35] The system of claim 20 wherein the composite aggregator is further configured to provide UEP for one or more information types in the composite aggregation.
- [36] The system of claim 20 wherein the composite aggregator is further configured to provide EEP for a plurality of different information types in the composite aggregation.
- [37] The system of claim 36 wherein the composite aggregator is further configured to provide UEP for same information types in the composite aggregation.
- [38] A transmitter for wireless communication of different information types, comprising:  
a composite aggregator configured to form a composite aggregation of information comprising different information types; and  
a communication module configured to transmit the composite aggregation over a wireless channel.
- [39] The transmitter of claim 38 wherein the different information types include audio, video, control and data.
- [40] The transmitter of claim 38 wherein the composite aggregation comprises a composite information packet including multiple sub-packets and location information for each sub-packet composite information packet, wherein at least one of the sub-packets contains different information types.
- [41] The transmitter of claim 40 wherein each sub-packet comprises:  
payload fields for different information types; and  
a sub-header that indicates: (a) the information types in that sub-packet, and (b) the length of the payload fields for different information types in the sub-packet.
- [42] The transmitter of claim 41 wherein the sub-header comprises an information mask that indicates the different information types in the sub-packet.
- [43] The transmitter of claim 41 wherein the sub-header comprises a sub-packet index

that indicates a sequence number of that sub-packet within the composite information packet.

[44] The transmitter of claim 41 wherein each sub-packet further includes a CRC value for the information types in the packet.

[45] The transmitter of claim 38 further including a re-transmitter configured to receive an acknowledgment for the composite packet from a receiver, and retransmit information based on the acknowledgment.

[46] The transmitter of claim 38 wherein the composite aggregation is transmitted over a high-rate channel.

[47] The transmitter of claim 38 wherein the composite aggregator is further configured to provide UEP for one or more information types in the composite aggregation.

[48] The transmitter of claim 38 wherein the composite aggregator is further configured to provide EEP for a plurality of different information types in the composite aggregation.

[49] The transmitter of claim 48 wherein the composite aggregator is further configured to provide UEP for same information types in the composite aggregation.

[50] A receiver for wireless communication of different information types, comprising:  
a communication module configured to receive a composite aggregation over a wireless channel, the composite aggregation including different information types; and  
an acknowledgment generator configured to form an aggregated acknowledgment;  
wherein the communication module of the receiver is further configured to transmit the aggregated acknowledgment to the transmitter over a wireless channel.


[51] The receiver of claim 50 wherein the aggregated acknowledgment comprises an acknowledgment for the different information types in the received composite aggregation.

[52] The receiver of claim 51 wherein:  
the composite aggregation comprises a composite information packet including multiple sub-packets, wherein at least one of the sub-packets contains different information types; and  
the aggregated ACK comprises a composite ACK packet including an acknowledgment for the different information types in the composite information packet.


- [53]       The receiver of claim 50 wherein:  
the composite aggregation comprises a composite information packet including multiple sub-packets and location information for each sub-packet composite information packet, wherein at least one of the sub-packets contains different information types,  
each sub-packet comprises: payload fields for different information types; and a sub-header that indicates: (a) the information types in that sub-packet, (b) the length of the payload fields for different information types in the sub-packet, and (c) the location of the information types in the composite aggregation; and  
the receiver is further configured to receive the composite aggregation and use the location information therein to locate and retrieve the different information types in the sub-packets within the composite packet.
- [54]       The receiver of claim 50 wherein:  
the composite ACK packet further includes multiple ACK sub-packets, each ACK sub-packet includes an acknowledgment for a sub-packet of the composite information packet.
- [55]       The receiver of claim 54 wherein the aggregated acknowledgment is transmitted over a low-rate channel.




[Fig. 1]

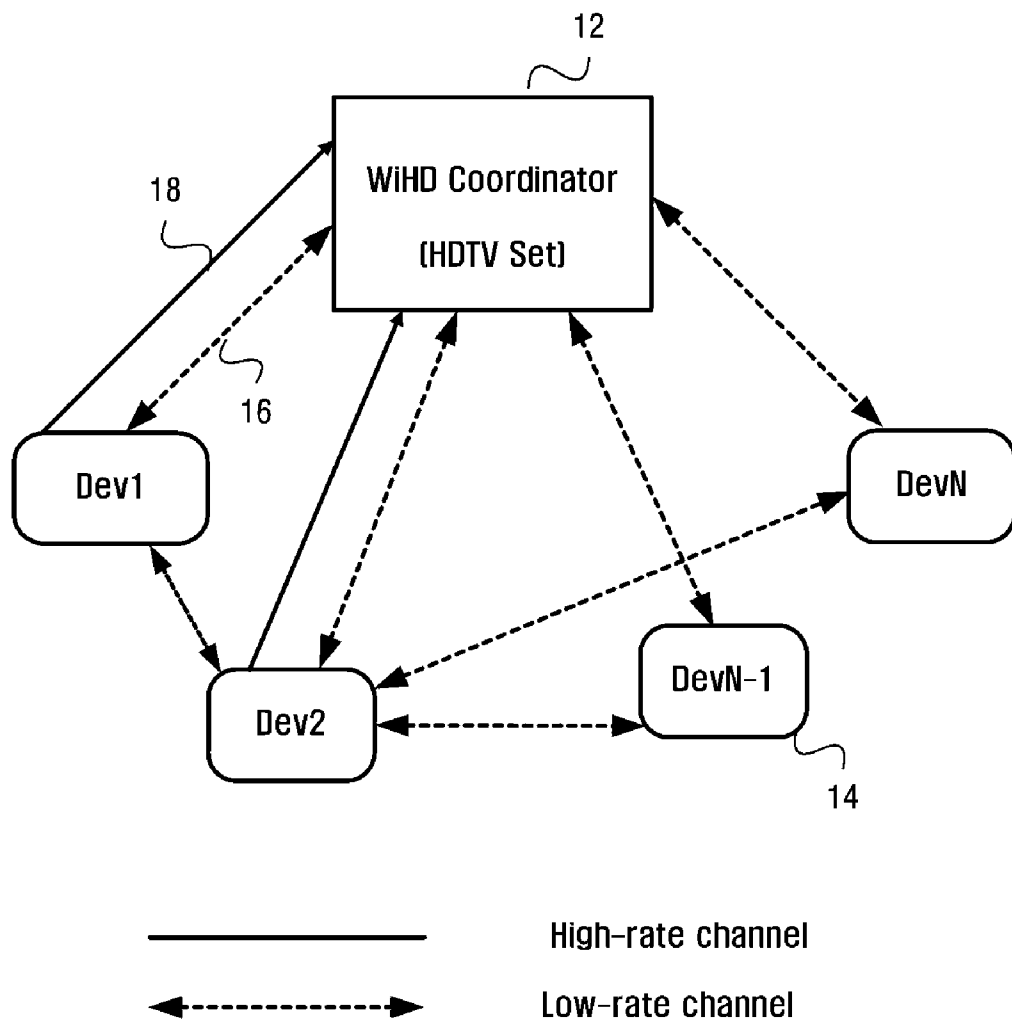


[Fig. 2]

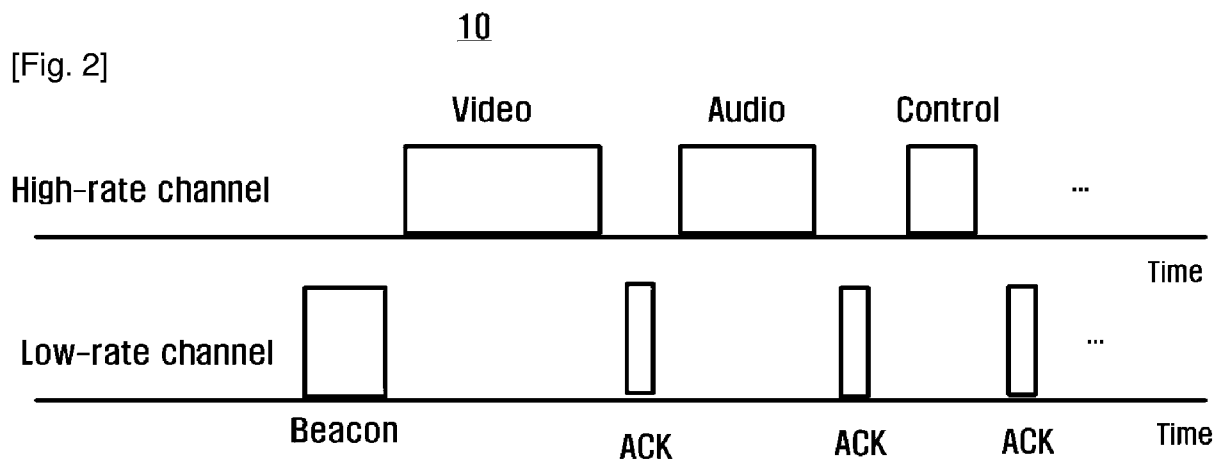

[Fig. 3]

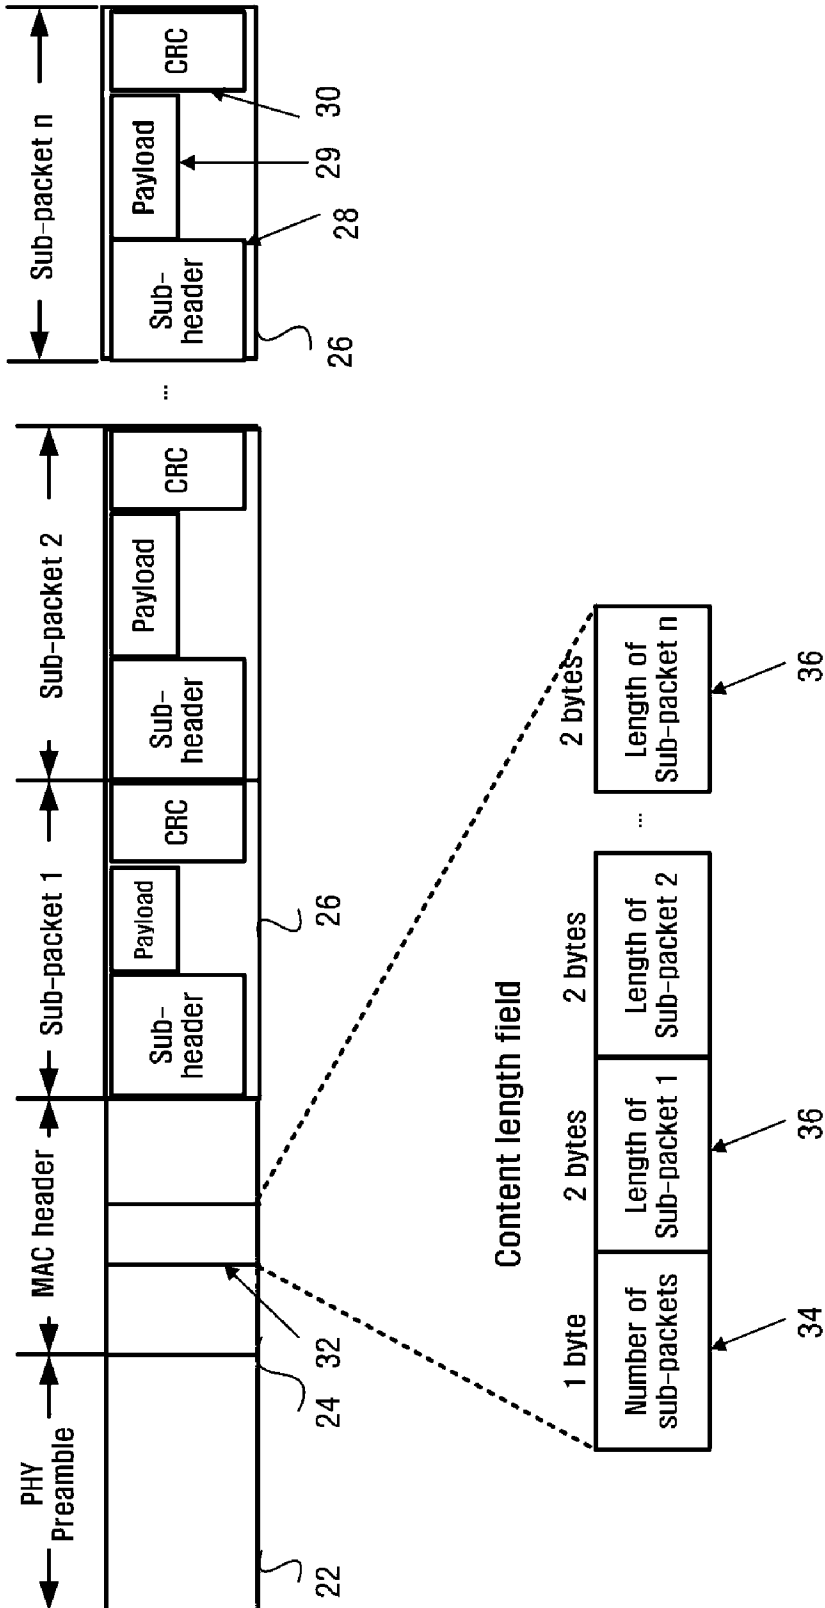


[Fig. 4]

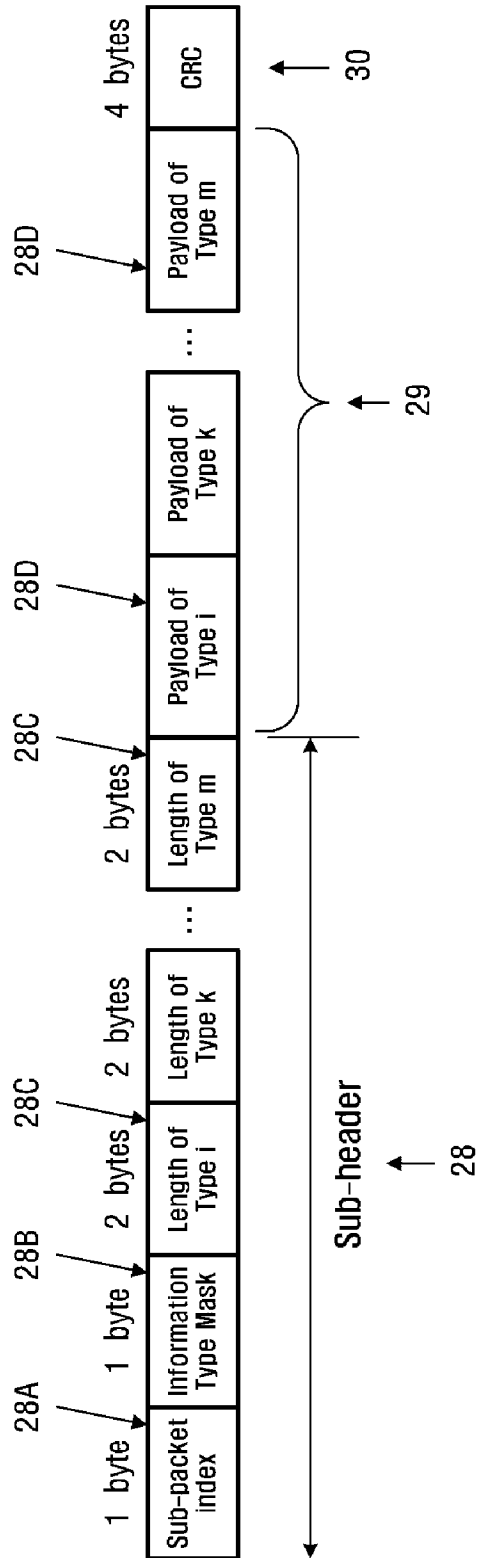


26

[Fig. 5]


## Information Type Mask

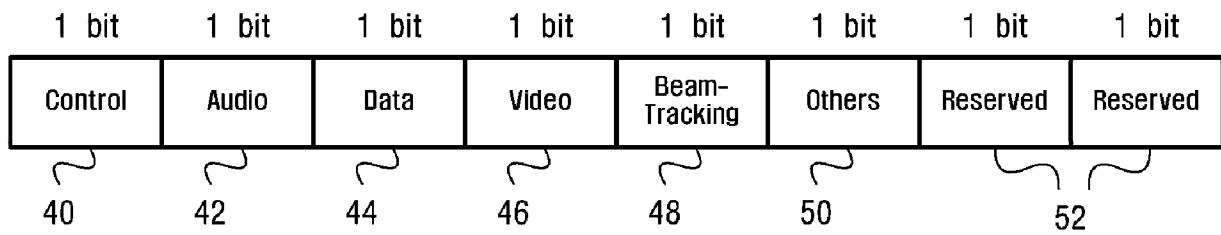


[Fig. 6]

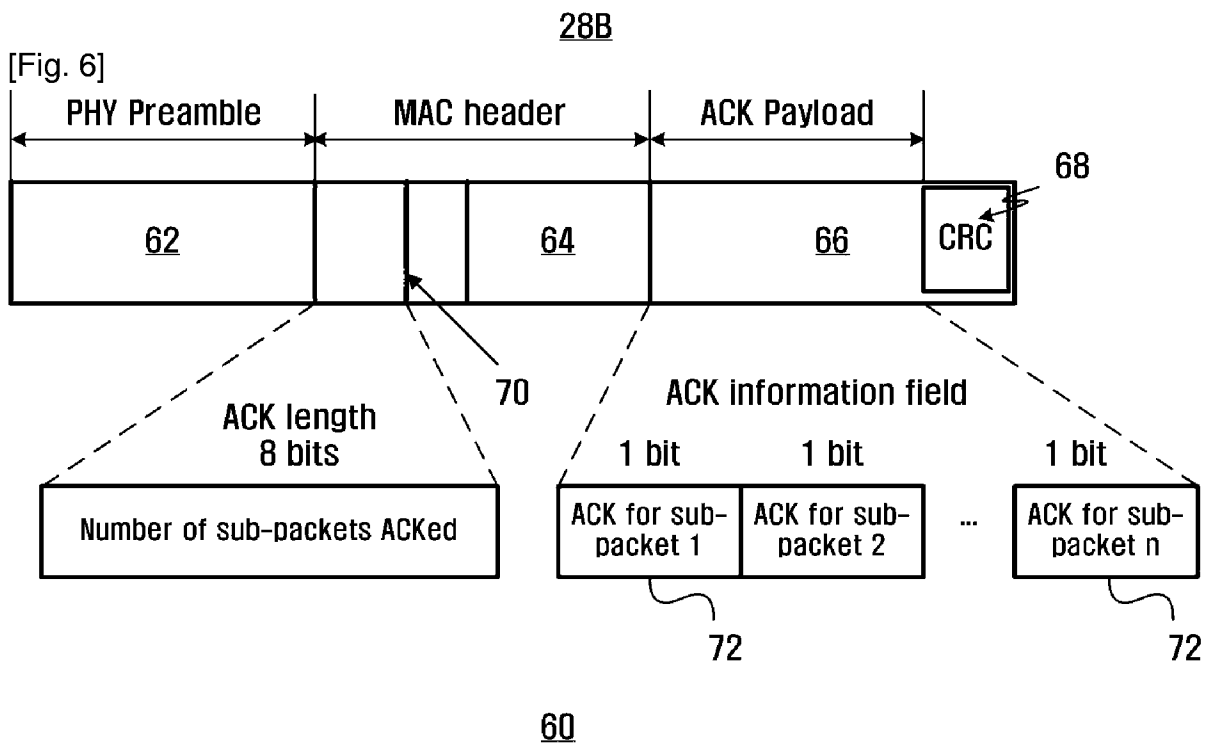


[Fig. 7]

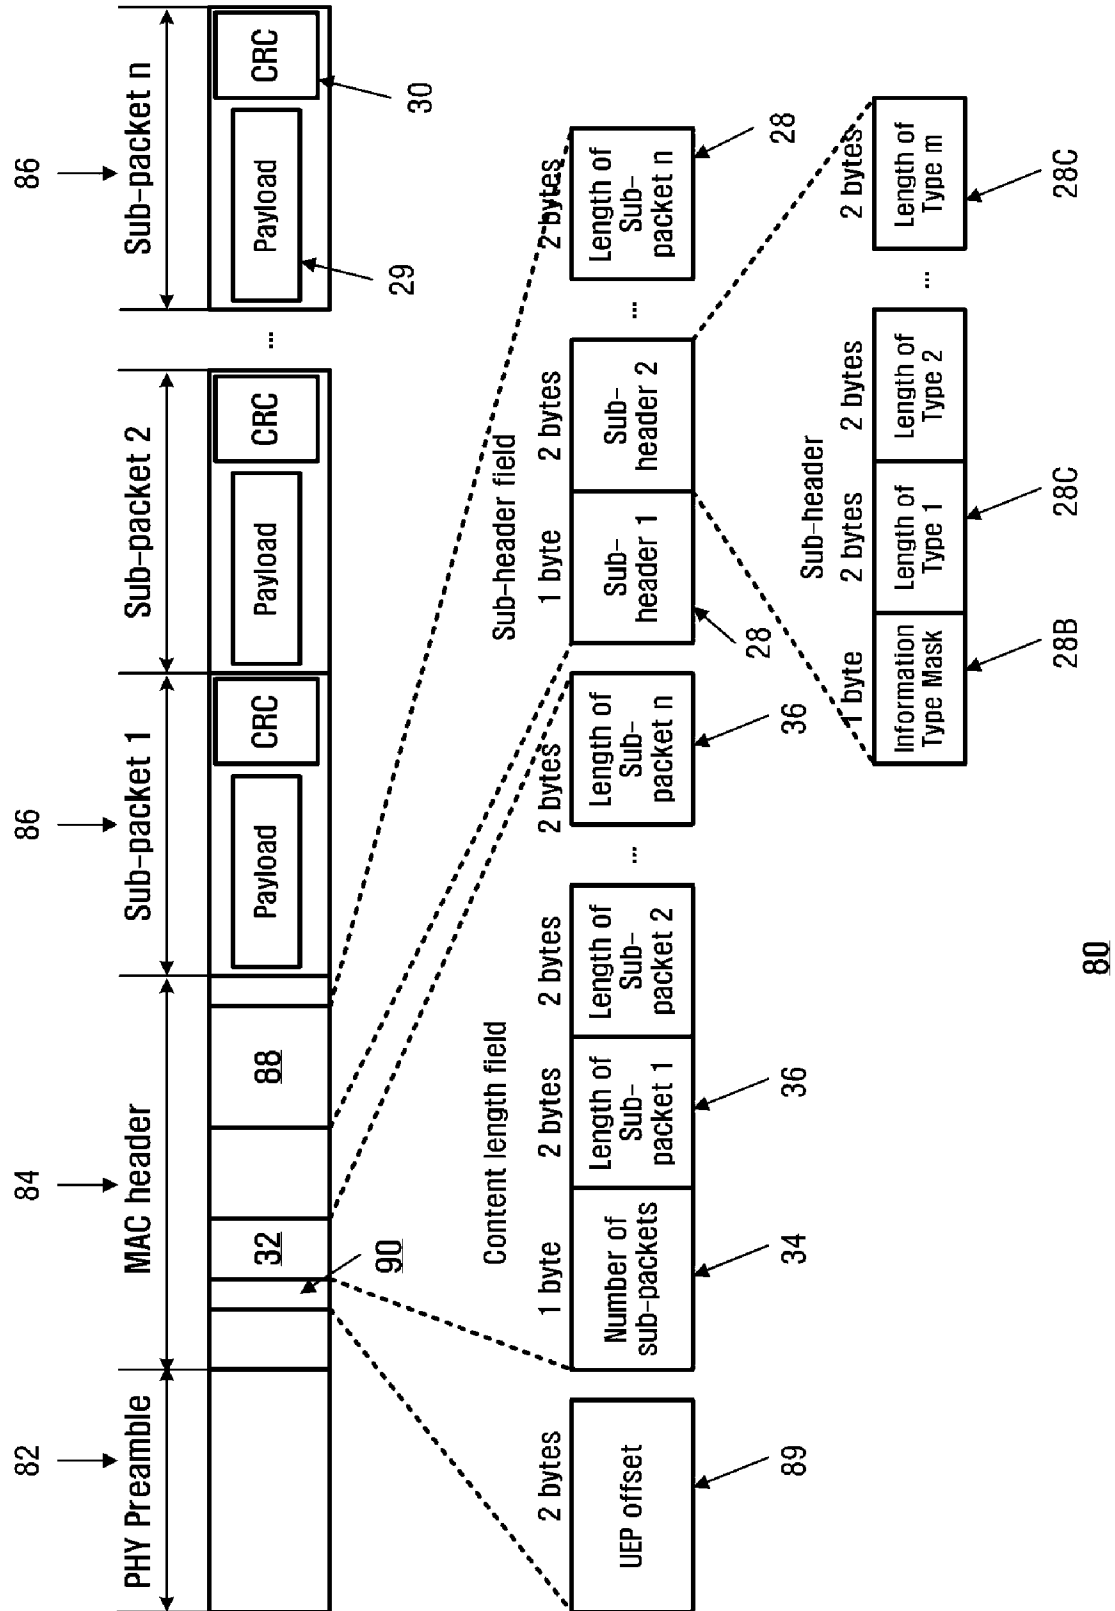


[Fig. 8]

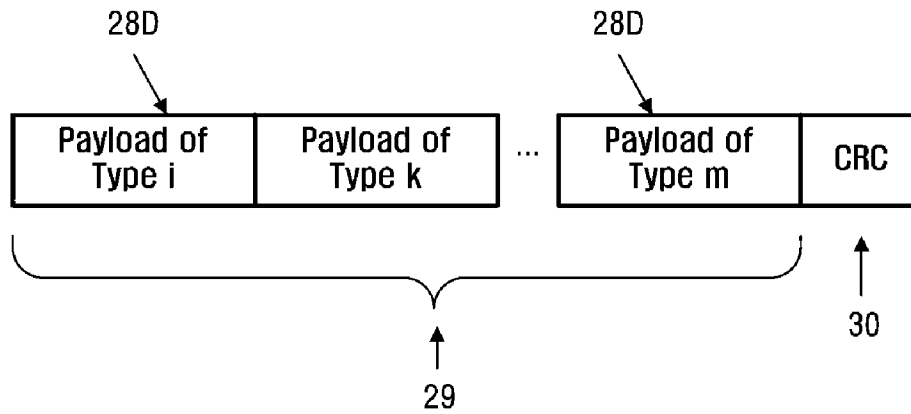


[Fig. 9]

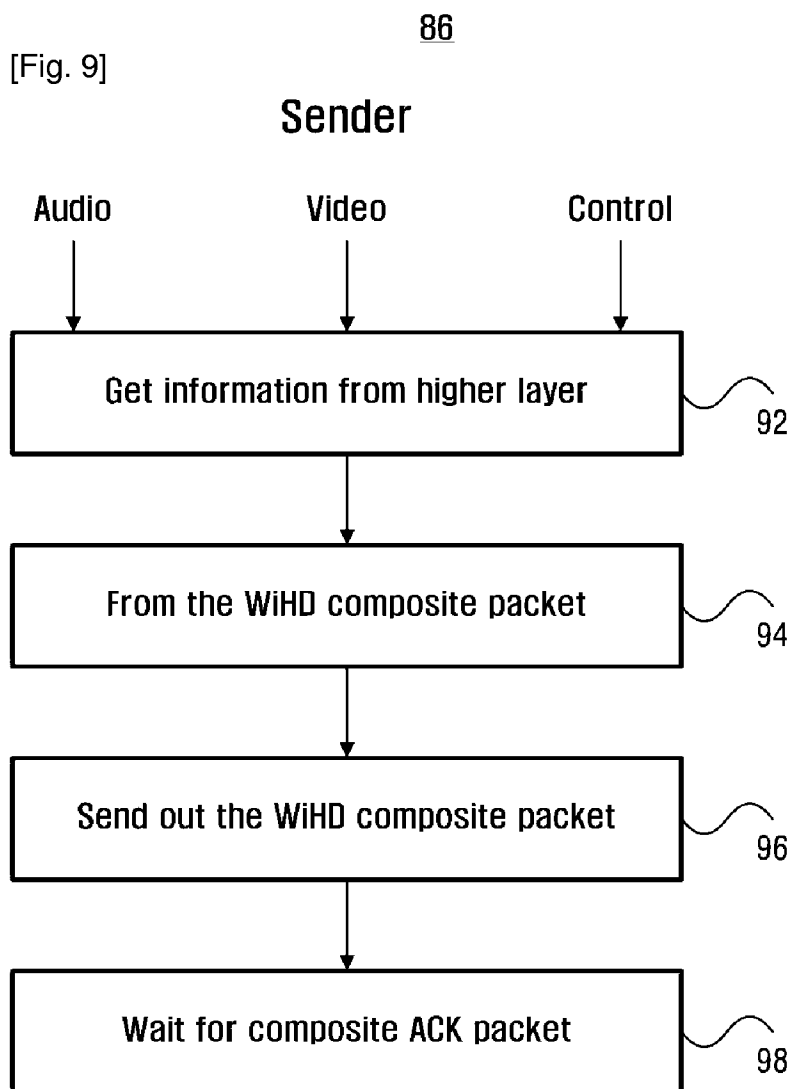

[Fig. 10]

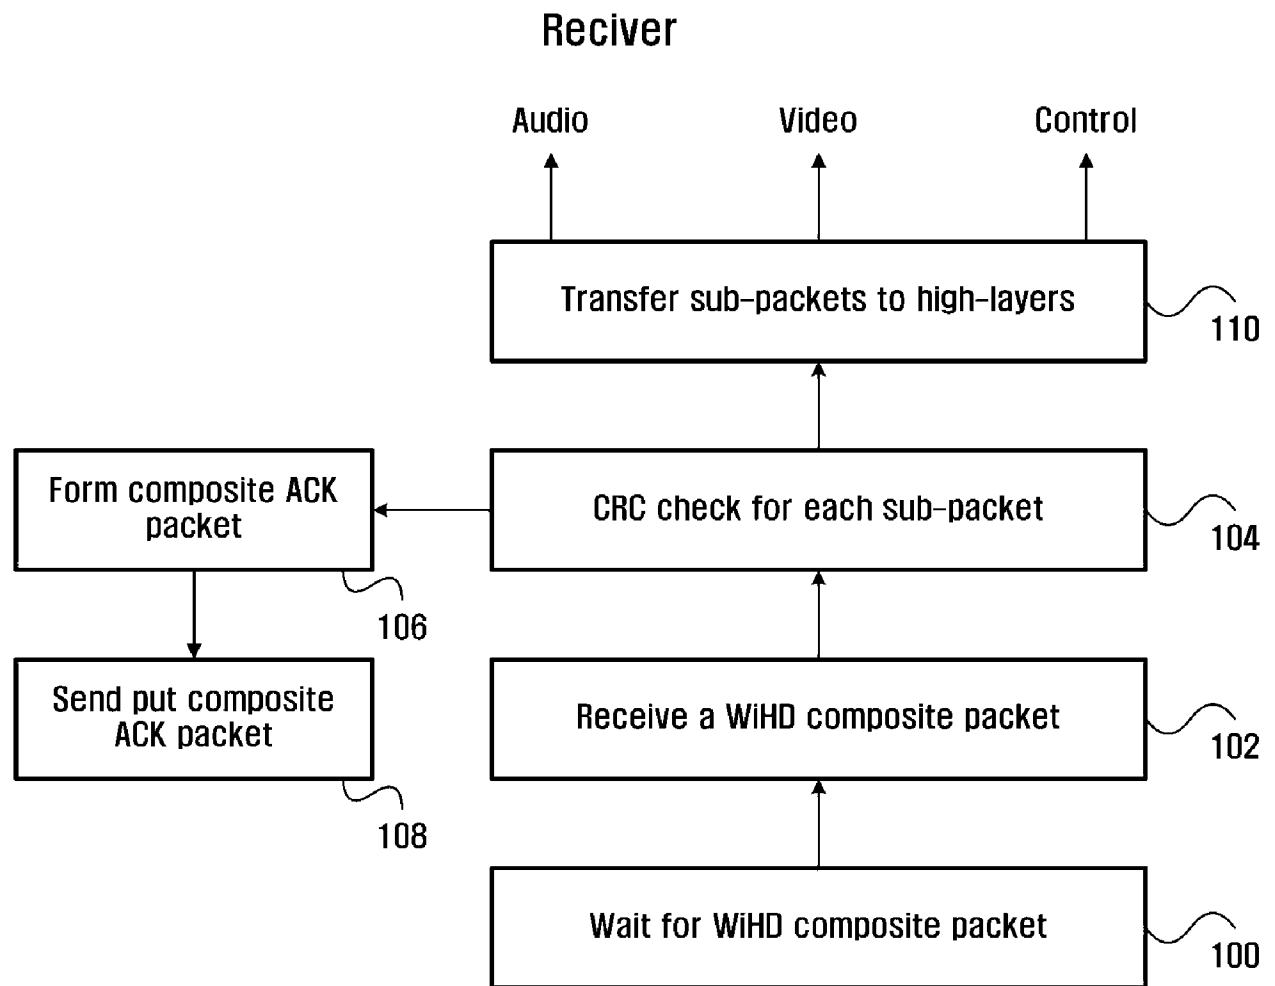


[Fig. 11]

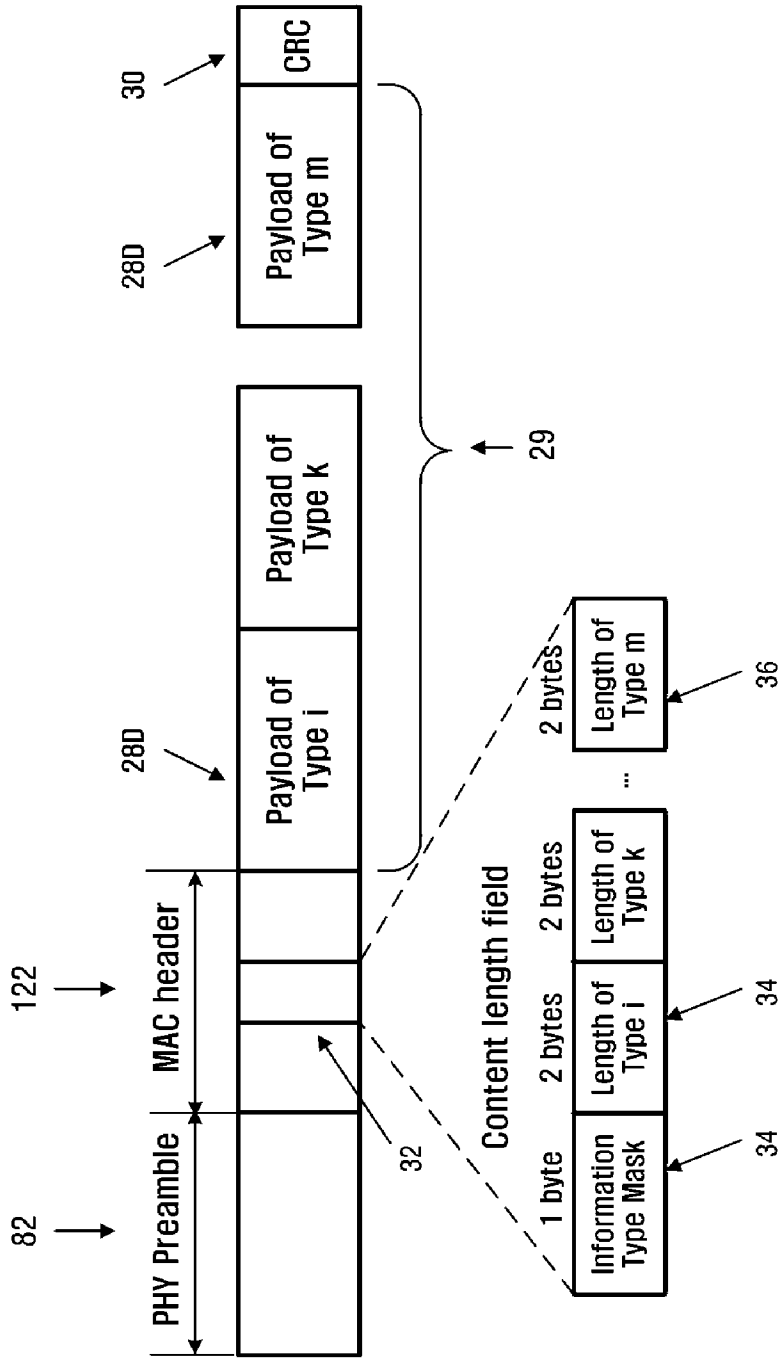




[Fig. 12]

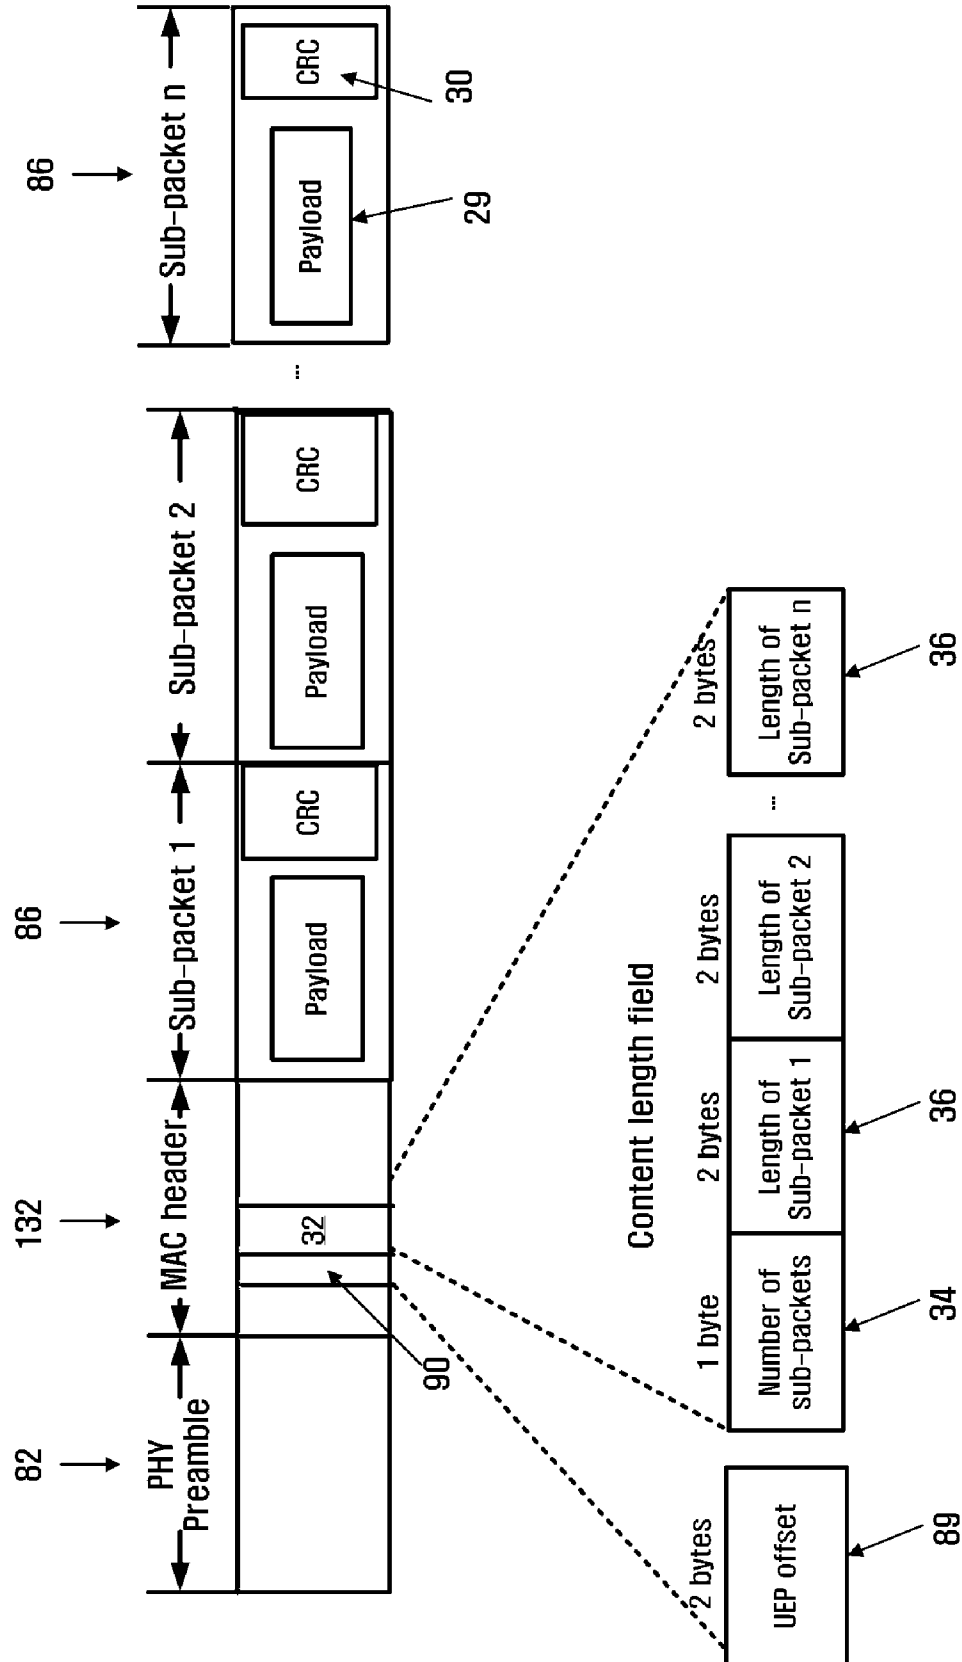

[Fig. 13]

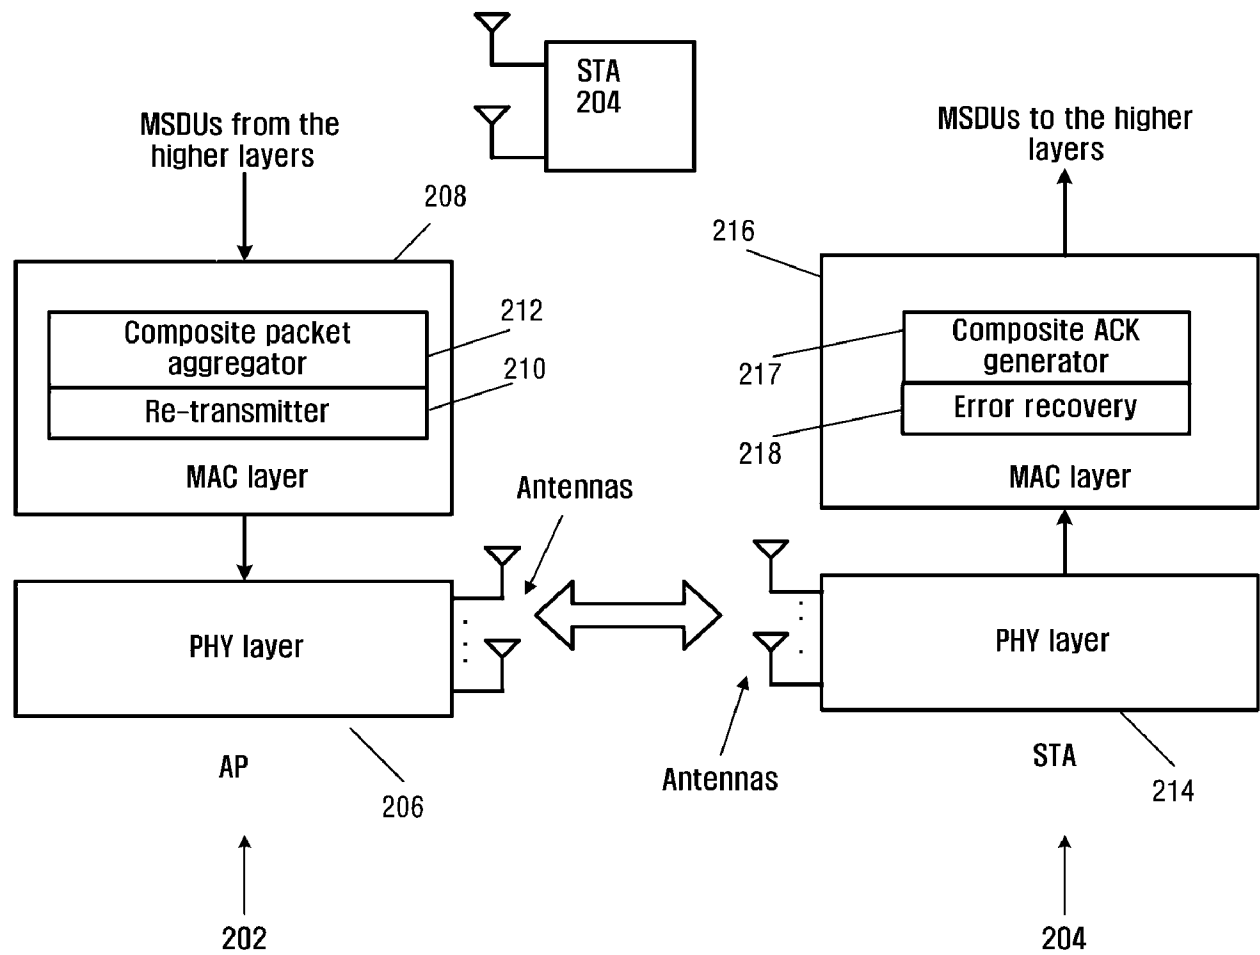

**A. CLASSIFICATION OF SUBJECT MATTER*****H04L 12/58(2006.01)i, H04L 12/56(2006.01)i***

According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**

Minimum documentation searched (classification system followed by classification symbols)

IPC 8 : H04L 7/00, H04N 7/04, H04N 7/10

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched  
Korean Utility models and applications for Utility models since 1975Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)  
eKIPASS(KIPO internal) "different information", "aggregated information", "HDTV"**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 5475716 A (ZHENG HUANG) 12 December 1995 see column 3, lines 20-63	1-2, 19, 20-21, 38-39
A	US 5231494 A (DAVID E. WACHOB) 27 July 1993 see column 3, lines 45-62	1-55
A	US 7031249 B2 (JOHN MICHAEL KOWALSKI) 18 April 2006 see abstract	1-55



Further documents are listed in the continuation of Box C.



See patent family annex.

\* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&amp;" document member of the same patent family

Date of the actual completion of the international search

18 DECEMBER 2007 (18.12.2007)

Date of mailing of the international search report

**18 DECEMBER 2007 (18.12.2007)**

Name and mailing address of the ISA/KR

Korean Intellectual Property Office  
920 Dunsan-dong, Seo-gu, Daejeon 302-701,  
Republic of Korea

Facsimile No. 82-42-472-7140

Authorized officer

LEE, JEONG SU

Telephone No. 82-42-481-5684



**INTERNATIONAL SEARCH REPORT**

Information on patent family members

International application No.

**PCT/KR2007/002437**

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US05475716A	12. 12. 1995	AT195048E	15. 08. 2000
		AU1026995A1	27. 07. 1995
		AU678871B2	12. 06. 1997
		CA2140483AA	19. 07. 1995
		CA2140483C	07. 12. 1999
		DE69518095C0	31. 08. 2000
		DE69518095T2	22. 03. 2001
		EP00663776A2	19. 07. 1995
		EP00663776B1	26. 07. 2000
		EP663776A3	19. 11. 1997
		ES2150506T3	01. 12. 2000
		JP3058807B2	04. 07. 2000
		JP7288550A2	31. 10. 1995
		KR1019950035432	30. 12. 1995
		N0314678B1	28. 04. 2003
US05231494A	27. 07. 1993	N0950191A0	18. 01. 1995
		AT160251E	15. 11. 1997
		DE69223114C0	18. 12. 1997
		DE69223114T2	20. 05. 1998
		DK536628T3	27. 07. 1998
		EP00536628A1	14. 04. 1993
		EP00536628B1	12. 11. 1997
		ES2111026T3	01. 03. 1998
		GR3025757T3	31. 03. 1998
US07031249B2	18. 04. 2006	HK1005634A1	15. 01. 1999
		EP01202515A2	02. 05. 2002
		EP01202515A3	27. 07. 2005
		JP2002198936A2	12. 07. 2002
		US20020167962A1	14. 11. 2002